

SECTION 5 EXPLODED VIEWS


NOTE :

- Non-serviceable items with no part number and no description are not stocked because they are not required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked “**” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifique.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

5-1. CHASSIS

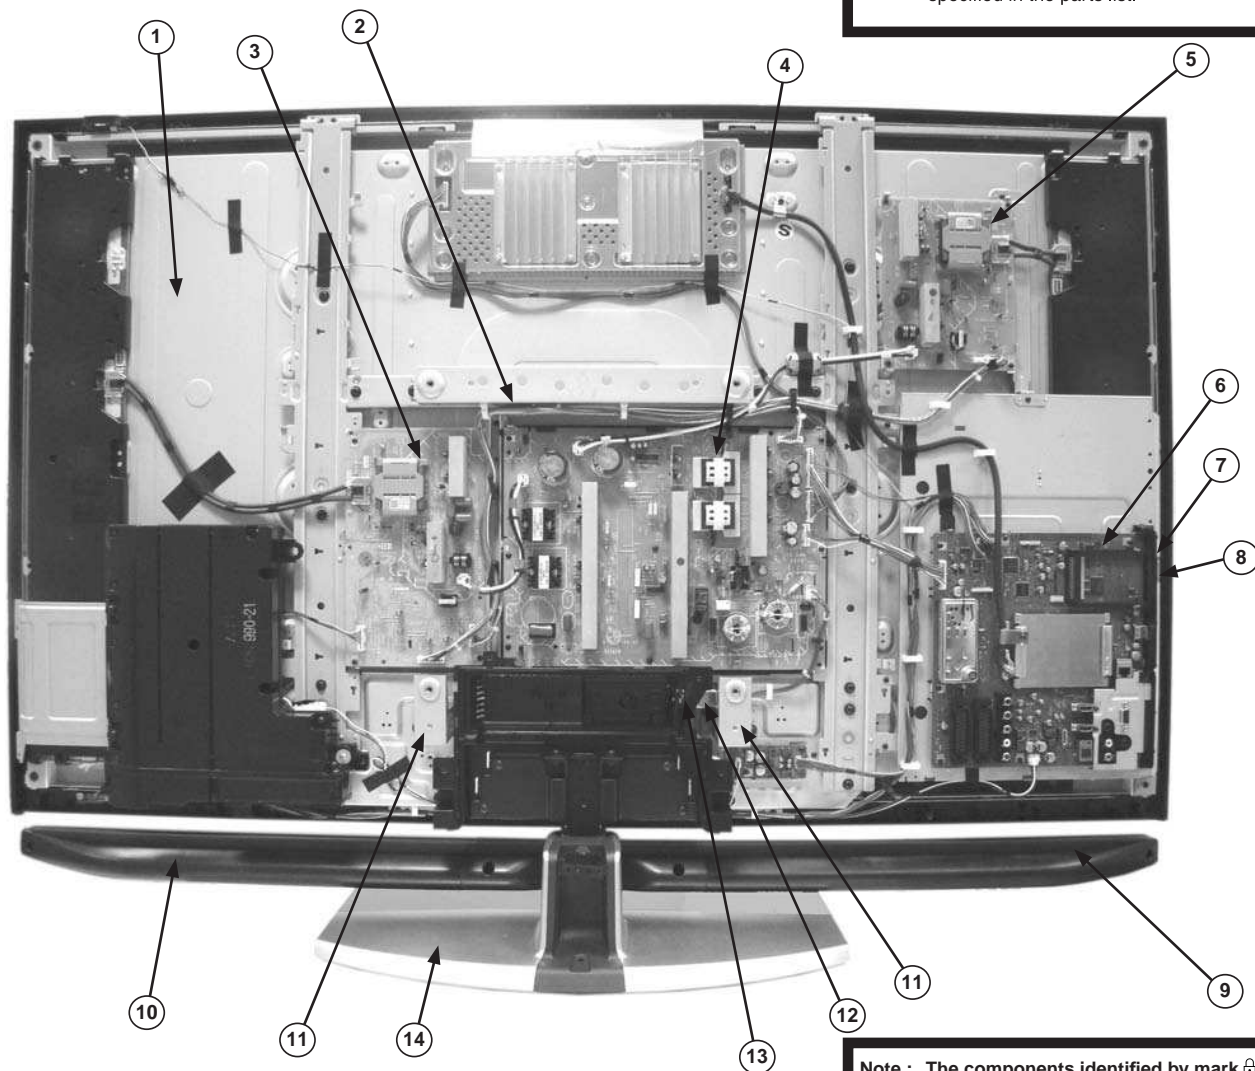


Note : The components identified by mark contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
1	Δ 1-802-823-11	LCD PANEL (40 INCH FHD 3TFT)	40 inches	8	*4-101-356-02	CARD, DUMMY	
	Δ 1-802-822-11	LCD PANEL (46 INCH FHD 3TFT)	46 inches	9	1-826-987-11	LOUDSPEAKER	40 inches
	Δ 1-802-821-11	LCD PANEL (52 INCH FHD 3TFT)	52 inches		1-826-985-11	LOUDSPEAKER	46/52 inches
2	4-106-323-01	FRAME, VESA (TOP)	40 inches	10	1-826-987-21	LOUDSPEAKER	40 inches
	4-106-324-02	FRAME, VESA (TOP)	46/52 inches		1-826-985-21	LOUDSPEAKER	46/52 inches
3	A-1557-278-A	D4Z-40 BOARD, COMPLETE	40 inches	11	4-106-322-01	FRAME, VESA (BOTTOM)	
	A-1557-281-A	D4Z-46 BOARD, COMPLETE	46 inches	12	Δ 1-822-147-11	AC INLET	
	A-1553-195-A	D4-52K BOARD, COMPLETE	52 inches	13	Δ 3-298-060-01	BRACKET, AC INLET	40/46 inches
4	A-1552-097-A	G6-SS BOARD, COMPLETE	40 inches		Δ 3-293-964-01	BRACKET, AC INLET	52 inches
	A-1552-099-A	G6-S BOARD, COMPLETE	46/52 inches	14	X-2189-871-1	STAND ASSY (ML-3)	40 inches
5	A-1553-197-A	D5-52K BOARD, COMPLETE	52 inches		X-2189-872-1	STAND ASSY (L-3)	46 inches
6	A-1579-116-A	BGE BOARD, COMPLETE			X-2189-873-1	STAND ASSY (LL-2)	52 inches
7	X-2189-647-1	SIDE JACK BRACKET ASSY					

5-1. CHASSIS Cont.

Note : Les composants indentifiés par une trame et par une marque Δ sont d'une importance critique pour la securite. Ne les remplacer que par des pieces du numero specifie.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

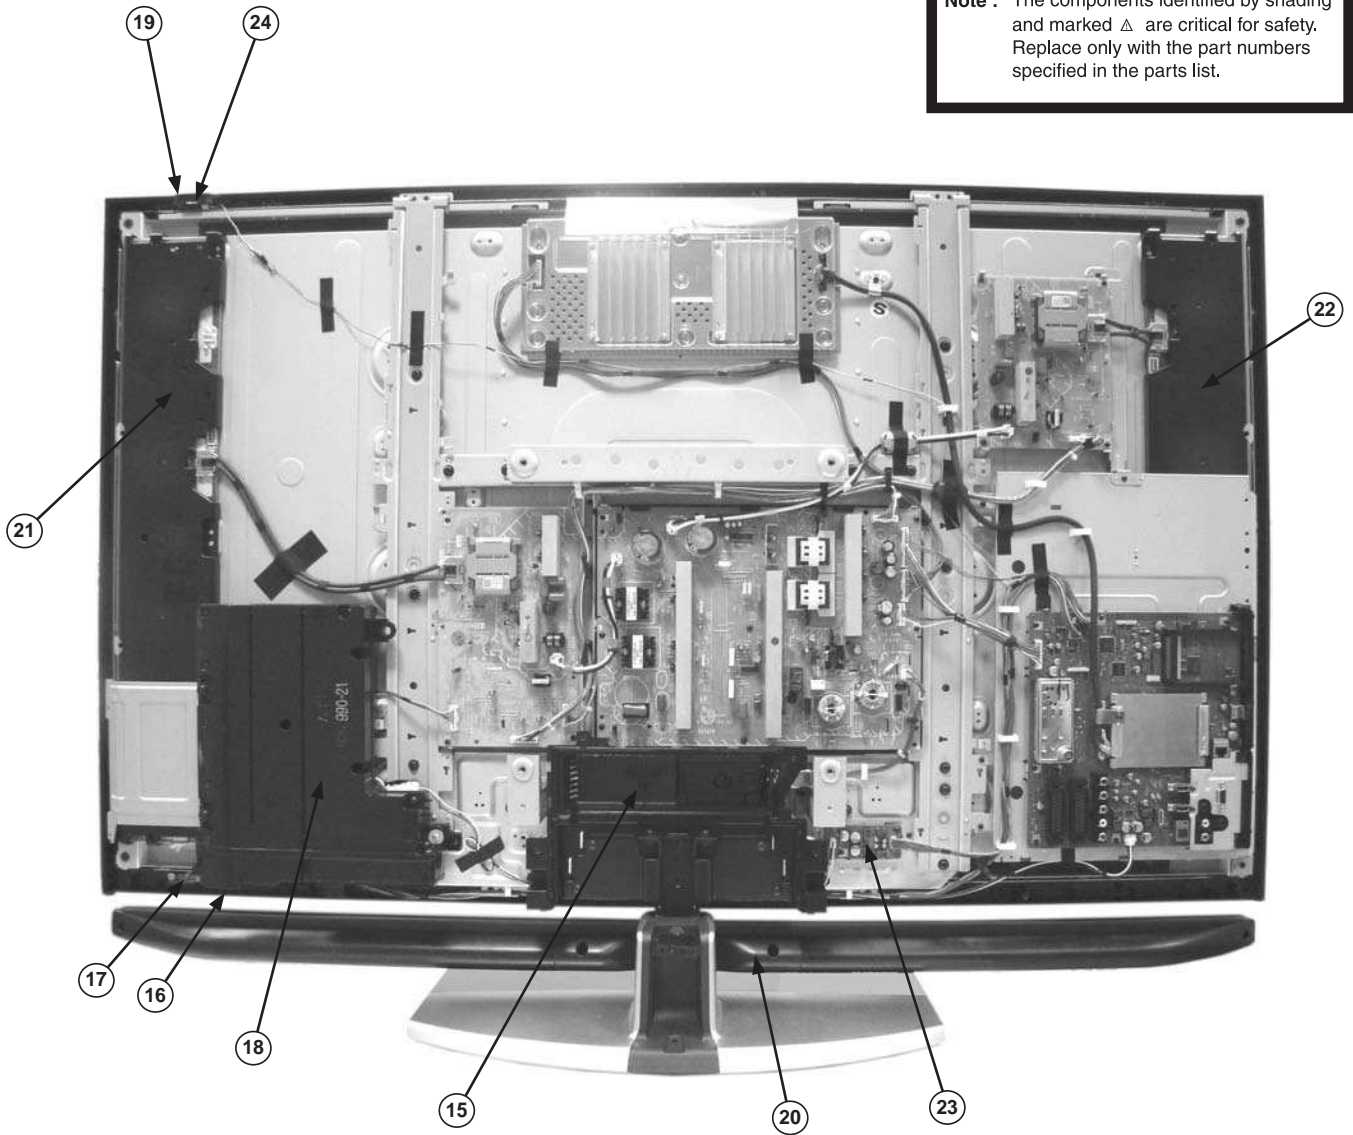

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
15	4-106-326-01	COVER, UNDER (40)	40 inches	21	1-857-046-12	ETC-INVERTER MT BOARD	40 inches
	3-293-126-01	COVER, UNDER (46)	46 inches		1-857-047-12	ETC-INVERTER MT BOARD	46 inches
	3-293-127-01	COVER, UNDER (52)	52 inches		1-857-111-12	ETC-INVERTER MT BOARD (LU)	52 inches
16	A-1617-902-A	H3VM BOARD, COMPLETE			1-857-112-12	ETC-INVERTER MT BOARD (LL)	52 inches
17	A-1557-911-A	H4 BOARD, COMPLETE		22	1-857-113-12	ETC-INVERTER MT BOARD (RU)	52 inches
18	1-858-039-11	LOUDSPEAKER	40/46 inches		1-857-114-12	ETC-INVERTER MT BOARD (RL)	52 inches
	1-826-990-21	LOUDSPEAKER	52 inches	23	A-1616-334-A	AWF BOARD, COMPLETE	
19	X-2318-866-2	BUTTON, POWER ASSY		24	A-1557-912-A	H1VM BOARD, COMPLETE	
20	3-293-084-01	SP JOINT, REAR	40/46 inches				
	3-876-546-01	SP JOINT, REAR	52 inches				

5-2. BEZEL

Note : Les composants indentifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.



REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
51	A-1660-231-A	BEZEL (40) ASSY	40 inches	55	3-293-083-01	SP JOINT, FRONT	40/46 inches
	A-1660-232-A	BEZEL (46) ASSY	46 inches		3-876-545-01	SP JOINT, FRONT	52 inches
Ver 2.0	A-1660-233-A	BEZEL (52) ASSY	52 inches				
52	3-293-081-01	COVER, SP CABLE					
53	X-2189-163-1	COVER, SP ASSY (40)	40 inches				
	X-2189-164-1	COVER, SP ASSY (46)	46 inches				
	X-2189-165-1	COVER, SP ASSY (52)	52 inches				
54	1-480-680-11	ILLUMINATION MODULE					



NOTE :

The "SP Joint, Front" is fitted behind the "Cover, SP Assy" please refer to Section 2 for the removal instructions.

5-3. REAR COVER & POWER SUPPLY CORDS

Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

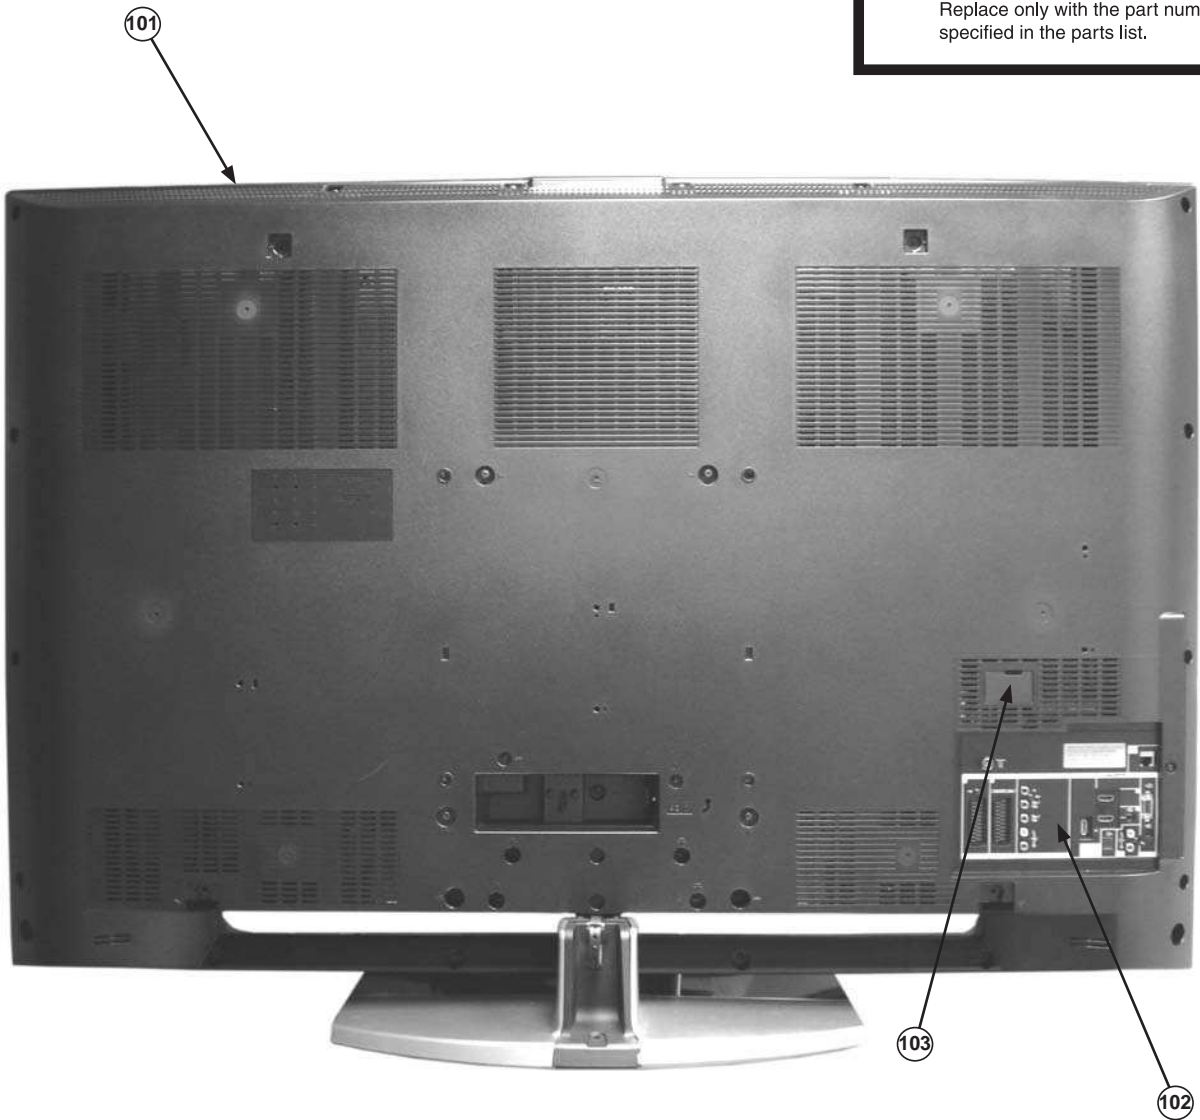

REF.NO.	PART.NO	DESCRIPTION	REMARK
101	3-296-656-01	REAR COVER (40)	40 inches
	3-293-130-01	COVER, REAR (46)	46 inches
	3-293-131-01	COVER, REAR (52)	52 inches
102	*4-114-194-01	LABEL, REAR TERMINAL	
103	3-106-546-21	COVER, ECS	40/46 inches
	3-094-483-11	COVER, ECS	52 inches
104	Δ 1-835-200-11	POWER SUPPLY CORD (AEP)	
105	Δ 1-835-165-11	POWER SUPPLY CORD (UK)	

REF.NO.	PART.NO	DESCRIPTION	REMARK
---------	---------	-------------	--------

NOTE :

When ordering item 101 "Rear Cover" please order item 102 "Label, Rear Terminal" as well.


SECTION 6 ELECTRICAL PARTS LIST

PARTS LISTING TABLE OF CONTENTS


	<u>Page</u>
BGE BOARD COMPLETE Parts List :	56
AWF BOARD COMPLETE Parts List :	74
H1VM BOARD COMPLETE Parts List :	75
H3VM BOARD COMPLETE Parts List :	75
H4 BOARD COMPLETE Parts List :	76
ACCESSORIES AND CONNECTORS :	77
REMOTE COMMANDER :	77

Note: To ensure safety and reliability it is Sony policy that power supply boards should not be repaired at component level in the field as a result... The D4, D4Z, D5, and G6 boards are regarded as non service items for exchange only and are not indicated in the parts list of this service manual

Note : Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note : The components identified by mark  contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.



REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
 A-1579-116-A BGE Board, Complete				C2219	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C1000	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C2220	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1001	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C2223	1-135-366-11	ELECT CHIP 100UF	20% 16V
C1002	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C2225	1-135-366-11	ELECT CHIP 100UF	20% 16V
C1003	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C2226	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V
C1004	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2227	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C1006	1-114-399-21	ELECT CHIP 47UF	20% 6.3V	C2228	1-135-366-11	ELECT CHIP 100UF	20% 16V
C1009	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2229	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V
C1010	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C2230	1-135-366-11	ELECT CHIP 100UF	20% 16V
C1011	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2231	1-112-776-11	CERAMIC CHIP 0.0047UF	10% 50V
C1012	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C2236	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1017	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C2237	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1018	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C2238	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1019	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C2239	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1020	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2240	1-100-904-11	CERAMIC CHIP 330PF	10% 50V
C1021	1-100-765-21	ELECT CHIP 10UF	20% 16V	C2244	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C1022	1-100-765-21	ELECT CHIP 10UF	20% 16V	C2245	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C1025	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C2246	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C1026	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C2247	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C1027	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2249	1-112-161-21	ELECT CHIP 1000UF	20% 6.3V
C1028	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2250	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C1029	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C2251	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1030	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C2254	1-114-407-21	ELECT CHIP 4.7UF	20% 50V
C1031	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C2255	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V
C1036	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C2256	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C1037	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2257	1-114-817-11	CERAMIC CHIP 2.2UF	10% 50V
C1038	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2258	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C1039	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2259	1-114-868-11	CERAMIC CHIP 0.1UF	10% 50V
C1040	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C2260	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C1203	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2261	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C1206	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2268	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C1208	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2269	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C1209	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2270	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C1210	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C2272	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C1211	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2275	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1216	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C3014	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C2200	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3026	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2201	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C3027	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2202	1-112-001-81	CERAMIC CHIP 270PF	5% 50V	C3028	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2205	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3029	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2206	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3030	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C2208	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V	C3031	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C2210	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V	C3032	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C2211	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3033	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C2212	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3046	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2215	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3047	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2216	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V	C3048	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2217	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C3049	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2218	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3060	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
				C3061	1-114-813-11	CERAMIC CHIP 1UF	10% 16V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3062	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C3245	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V
C3063	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C3246	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V
C3072	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3250	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3073	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3251	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3075	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3406	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C3076	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3407	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C3077	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3417	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C3078	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C3418	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C3079	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C3419	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C3080	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3420	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C3081	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C3426	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3082	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C3427	1-114-407-21	ELECT CHIP 4.7UF	20% 50V
C3083	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3428	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C3084	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3429	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C3202	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3430	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3203	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3431	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3204	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V	C3442	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3205	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3443	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3206	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C3446	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C3207	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3447	1-114-193-11	ELECT CHIP 470UF	20% 25V
C3208	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3448	1-114-193-11	ELECT CHIP 470UF	20% 25V
C3209	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C3449	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C3210	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3450	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C3211	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3451	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C3212	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3452	1-114-193-11	ELECT CHIP 470UF	20% 25V
C3213	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V	C3453	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C3214	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3458	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3215	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3459	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3216	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3464	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3217	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3465	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3218	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3466	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3220	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3467	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3221	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3469	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C3222	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3470	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C3223	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3480	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C3225	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3482	1-100-767-21	ELECT CHIP 220UF	20% 16V
C3226	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3484	1-112-065-11	CERAMIC CHIP 4.7UF	10% 16V
C3227	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C4003	1-135-366-11	ELECT CHIP 100UF	20% 16V
C3229	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C4006	1-135-366-11	ELECT CHIP 100UF	20% 16V
C3230	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C4007	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3231	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C4009	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3233	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4012	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C3234	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C4013	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3235	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4014	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3238	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C4016	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C3239	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4017	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3240	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4019	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3241	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C4021	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3242	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C4023	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3243	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4025	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C5023	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5094	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5024	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5095	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5026	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5096	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5027	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5097	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5028	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5098	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5029	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5099	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5030	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5100	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5031	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5101	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5032	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5102	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5033	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5103	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C5034	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5104	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5035	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5500	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C5036	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5501	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5038	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5502	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C5039	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5503	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5040	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5504	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V
C5041	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5505	1-164-842-11	CERAMIC CHIP 2PF	0.25PF 50V
C5043	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5506	1-164-843-11	CERAMIC CHIP 3PF	0.25PF 50V
C5044	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5507	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5045	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5508	1-114-399-21	ELECT CHIP 47UF	20% 6.3V
C5046	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5509	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5047	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5510	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C5049	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5511	1-104-905-11	DOUBLE LAYER 0.22F	5.5V
C5050	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5512	1-164-862-11	CERAMIC CHIP 33PF	5.00% 50V
C5051	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5513	1-164-862-11	CERAMIC CHIP 33PF	5.00% 50V
C5052	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5514	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5058	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5515	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5060	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5516	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5062	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5517	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5064	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5519	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5065	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5520	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5067	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5523	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5068	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5527	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5069	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5528	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5070	1-114-172-91	CERAMIC CHIP 2.2UF	20% 4V	C5532	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C5073	1-114-172-91	CERAMIC CHIP 2.2UF	20% 4V	C5540	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5074	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5543	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5075	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5544	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5076	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5545	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C5078	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5546	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5079	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5550	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C5082	1-114-172-91	CERAMIC CHIP 2.2UF	20% 4V	C5551	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5084	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5552	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V
C5086	1-114-172-91	CERAMIC CHIP 2.2UF	20% 4V	C5553	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V
C5087	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6400	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5088	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6401	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C5089	1-114-172-91	CERAMIC CHIP 2.2UF	20% 4V	C6402	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C5091	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6403	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C5092	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6404	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C5093	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6405	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C6406	1-114-353-11	CAP, CERAMIC 0.01MF X7R	(1410)	C6488	1-135-366-11	ELECT CHIP 100UF	20% 16V
C6407	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6489	1-135-366-11	ELECT CHIP 100UF	20% 16V
C6408	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6494	1-100-963-21	ELECT CHIP 330UF	20% 4V
C6409	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C6499	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C6410	1-135-366-11	ELECT CHIP 100UF	20% 16V	C6502	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6411	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6503	1-112-065-11	CERAMIC CHIP 4.7UF	10% 16V
C6412	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6505	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C6413	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C6514	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6414	1-135-366-11	ELECT CHIP 100UF	20% 16V	C6516	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C6415	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6517	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C6416	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6519	1-112-774-11	CERAMIC CHIP 470PF	10% 50V
C6417	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6522	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6418	1-114-802-11	CERAMIC CHIP 0.0033UF	10% 50V	C6525	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C6421	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6530	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6422	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C6531	1-112-065-11	CERAMIC CHIP 4.7UF	10% 16V
C6423	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6532	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6424	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6535	1-100-963-21	ELECT CHIP 330UF	20% 4V
C6426	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6536	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C6427	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6537	1-114-415-21	ELECT CHIP 100UF	20% 6.3V
C6428	1-114-807-11	CERAMIC CHIP 0.015UF	10% 25V	C6543	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6429	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C6545	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6430	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C6570	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C6431	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6571	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6432	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V	C6572	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6434	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C6573	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6436	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C6574	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C6437	1-218-957-11	METAL CHIP 2.2K 5%	1/16W	C6575	1-114-808-11	CERAMIC CHIP 0.033UF	10% 16V
C6438	1-114-807-11	CERAMIC CHIP 0.015UF	10% 25V	C6576	1-164-882-11	CERAMIC CHIP 220PF	5.00% 16V
C6439	1-114-415-21	ELECT CHIP 100UF	20% 6.3V	C6577	1-114-802-11	CERAMIC CHIP 0.0033UF	10% 50V
C6440	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6578	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C6441	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C6579	1-112-786-11	ELECT CHIP 330UF	20% 4V
C6442	1-114-415-21	ELECT CHIP 100UF	20% 6.3V	C6580	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6445	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C6581	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6447	1-114-808-11	CERAMIC CHIP 0.033UF	10% 16V	C6582	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V
C6448	1-112-774-11	CERAMIC CHIP 470PF	10% 50V	C6584	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6449	1-114-807-11	CERAMIC CHIP 0.015UF	10% 25V	C6585	1-114-807-11	CERAMIC CHIP 0.015UF	10% 25V
C6450	1-112-775-11	CERAMIC CHIP 0.0022UF	10% 50V	C6586	1-114-320-11	CERAMIC CHIP 0.22UF	10% 6.3V
C6451	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C6587	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C6452	1-112-774-11	CERAMIC CHIP 470PF	10% 50V	C6588	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6454	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C6591	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6456	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6593	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6457	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6594	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6460	1-114-415-21	ELECT CHIP 100UF	20% 6.3V	C6596	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6470	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C6597	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C6471	1-112-774-11	CERAMIC CHIP 470PF	10% 50V	C6598	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C6472	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6599	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6474	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6608	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6476	1-112-774-11	CERAMIC CHIP 470PF	10% 50V	C6613	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C6479	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6614	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6483	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6615	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C6616	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7106	1-164-856-81	CERAMIC CHIP 18PF	5.00% 50V
C6617	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7107	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6618	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7108	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6619	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7109	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C6620	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7110	1-164-854-11	CERAMIC CHIP 15PF	5.00% 50V
C7000	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C7111	1-114-296-11	ELECT CHIP 820UF	20% 6.3V
C7001	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C7112	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7002	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7113	1-100-767-21	ELECT CHIP 220UF	20% 16V
C7003	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7114	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7004	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7115	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C7005	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7200	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C7006	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7201	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C7007	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7202	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7008	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7203	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7009	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7204	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7010	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7205	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7011	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7206	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7013	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7207	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7014	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7208	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7015	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7210	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7017	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7211	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7018	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7212	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7019	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7213	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7020	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7214	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7021	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7215	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7022	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7216	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7023	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7217	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7024	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7218	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7026	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7219	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7027	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7220	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7028	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7221	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7029	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7222	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7030	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7223	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7034	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7224	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7035	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7225	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7036	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7226	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7037	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7227	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7038	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7228	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7039	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7229	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7040	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7230	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7041	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7231	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7043	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7232	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C7044	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C7233	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7045	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C7234	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7100	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7235	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7101	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7236	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7102	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C7237	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7103	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7238	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7104	1-164-849-11	CERAMIC CHIP 9PF	0.50PF 50V	C7239	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7105	1-164-849-11	CERAMIC CHIP 9PF	0.50PF 50V	C7240	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C7241	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8207	1-100-765-21	ELECT CHIP 10UF	20% 16V
C7242	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8208	1-100-765-21	ELECT CHIP 10UF	20% 16V
C7243	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8209	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7244	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8216	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C7245	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8220	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7246	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C8222	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7300	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C8224	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7301	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C8226	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C7302	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C8227	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C7400	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8228	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C7401	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8230	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C7402	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C8231	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7403	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C8232	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7404	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C8235	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C7405	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8237	1-100-766-21	ELECT CHIP 47UF	20% 16V
C7406	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8238	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C7407	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C8239	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C7600	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C8241	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C7601	1-114-399-21	ELECT CHIP 47UF	20% 6.3V	C8242	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C7602	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V	C8243	1-100-765-21	ELECT CHIP 10UF	20% 16V
C7603	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8244	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C7605	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V	C8245	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C7606	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8246	1-100-765-21	ELECT CHIP 10UF	20% 16V
C7607	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8247	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C7608	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8248	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C7609	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8249	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C7610	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8250	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C7611	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8251	1-100-766-21	ELECT CHIP 47UF	20% 16V
C7612	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8252	1-100-766-21	ELECT CHIP 47UF	20% 16V
C7613	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V	C8253	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C7614	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8254	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C7615	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C8256	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C7703	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8258	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7708	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8260	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C7709	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C8261	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C7710	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	< CONNECTOR >			
C7711	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	CN1000	1-821-054-11	21PIN SOCKET	
C7712	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	CN1001	1-821-054-11	21PIN SOCKET	
C7713	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	CN1200	*1-819-928-11	HEADER ASSEMBLY 20P	
C7714	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	CN3001	1-821-013-11	D SUB CONNECTOR	
C7715	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	CN3002	*1-821-879-11	CONNECTOR, SQUARE TYPE (RECE)	
C7716	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	CN3004	1-821-844-11	OPTICAL OUT CONNECTOR	
C7717	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	CN3400	1-819-460-11	HEADER ASSEMBLY FOR PWB 4P	
C8030	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	CN4500	*1-821-916-12	HDMI CONNECTOR	
C8031	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	CN4502	1-821-645-11	CONNECTOR, HDMI	
C8032	1-114-320-11	CERAMIC CHIP 0.22UF	10% 6.3V	CN4503	*1-821-916-12	HDMI CONNECTOR	
C8201	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	CN5503	1-779-936-51	CONNECTOR, FFC/FPC 18P	
C8203	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	CN5505	*1-820-235-11	HEADER ASSEMBLY 30P	
C8204	1-114-813-11	CERAMIC CHIP 1UF	10% 16V				
C8205	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V				

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
CN6401	1-819-797-11	HEADER ASSEMBLY FOR PWB 13P		D5504	8-719-060-48	DIODE RB751V-40TE-17	
CN7100	1-817-109-11	CONNECTOR, USB (A)		D5505	6-501-817-01	DIODE MA2J1110GLSO	
CN7501	1-822-033-11	MEMORY STICK CONNECTOR		D5506	6-501-817-01	DIODE MA2J1110GLSO	
CN7600	*1-821-868-11	ETHERNET CONNECTOR (8P)		D5507	6-502-318-01	DI MA4J1130GLSO	
CN7700	*1-793-769-22	CONNECTOR, CARD (PCMCIA CARD)		D5508	6-502-318-01	DI MA4J1130GLSO	
CN8000	1-819-784-21	PIN, CONNECTOR 50P		D5510	6-502-172-01	DI UMZ5.6KTL	
		< DIODE >		D5520	6-501-614-01	DIODE PZU5.6B2	
D1000	8-719-058-24	DIODE RB501V-40TE-17		D5521	6-502-318-01	DI MA4J1130GLSO	
D1001	6-502-177-01	DI UMZ9.1KTL		D5522	6-502-318-01	DI MA4J1130GLSO	
D1002	6-502-177-01	DI UMZ9.1KTL		D5523	8-719-058-24	DIODE RB501V-40TE-17	
D1003	6-502-177-01	DI UMZ9.1KTL		D5524	8-719-058-24	DIODE RB501V-40TE-17	
D1004	6-501-623-01	DIODE PZU13B2		D5525	8-719-058-24	DIODE RB501V-40TE-17	
D1005	6-502-180-01	DI UMZ12KTL		D5526	8-719-058-24	DIODE RB501V-40TE-17	
D1006	6-502-177-01	DI UMZ9.1KTL		D6401	6-501-614-01	DIODE PZU5.6B2	
D1007	6-502-177-01	DI UMZ9.1KTL		D6404	6-502-318-01	DI MA4J1130GLSO	
D1008	6-502-177-01	DI UMZ9.1KTL		D6406	6-501-528-01	DIODE 1SMA5915BT3G	
D1009	6-502-177-01	DI UMZ9.1KTL		D6407	6-501-528-01	DIODE 1SMA5915BT3G	
D1010	6-501-623-01	DIODE PZU13B2		D6408	6-501-817-01	DIODE MA2J1110GLSO	
D1012	6-501-619-01	DIODE PZU9.1B2		D6409	6-500-295-01	DIODE PTZ-TE25-5.6B	
D1013	6-502-180-01	DI UMZ12KTL		D6412	6-501-528-01	DIODE 1SMA5915BT3G	
D1014	6-502-180-01	DI UMZ12KTL		D6414	6-501-614-01	DIODE PZU5.6B2	
D3000	6-502-180-01	DI UMZ12KTL		D6418	6-502-318-01	DI MA4J1130GLSO	
D3002	6-502-180-01	DI UMZ12KTL		D6431	6-501-528-01	DIODE 1SMA5915BT3G	
D3011	6-501-614-01	DIODE PZU5.6B2		D6432	6-502-318-01	DI MA4J1130GLSO	
D3014	6-502-318-01	DI MA4J1130GLSO		D6433	6-502-318-01	DI MA4J1130GLSO	
D3027	6-502-180-01	DI UMZ12KTL		D7100	6-502-318-01	DI MA4J1130GLSO	
D3029	6-502-180-01	DI UMZ12KTL		D7101	6-500-701-01	DIODE PGB1010603NR	
D3031	6-501-619-01	DIODE PZU9.1B2		D7102	6-500-701-01	DIODE PGB1010603NR	
D3049	6-502-180-01	DI UMZ12KTL		D8202	6-502-318-01	DI MA4J1130GLSO	
D3050	6-502-180-01	DI UMZ12KTL		D8210	6-502-177-01	DI UMZ9.1KTL	
D3055	6-501-620-01	DIODE PZU10B2		D8212	6-502-177-01	DI UMZ9.1KTL	
D3056	6-502-180-01	DI UMZ12KTL		D8213	6-502-177-01	DI UMZ9.1KTL	
D3057	6-502-177-01	DI UMZ9.1KTL		ET2201	1-780-482-11	EARTH TERMINAL	
D3058	6-502-180-01	DI UMZ12KTL		ET2211	1-780-434-11	TERMINAL, GROUND (ON BOARD CON	
D3059	6-502-180-01	DI UMZ12KTL		ET2212	1-780-434-11	TERMINAL, GROUND (ON BOARD CON	
D3400	6-501-732-01	DIODE MAZ8056G0LS0		ET5001	1-780-638-21	CONTACT TERMINAL	
D3401	6-501-732-01	DIODE MAZ8056G0LS0		ET5002	1-780-638-21	CONTACT TERMINAL	
D3403	6-502-318-01	DI MA4J1130GLSO		ET5003	1-780-638-21	CONTACT TERMINAL	
D3404	6-501-817-01	DIODE MA2J1110GLSO		ET5004	1-780-638-21	CONTACT TERMINAL	
D3405	6-501-817-01	DIODE MA2J1110GLSO		ET5006	1-780-638-21	CONTACT TERMINAL	
D3406	6-501-619-01	DIODE PZU9.1B2		ET6400	1-780-482-11	EARTH TERMINAL	
D3407	6-502-172-01	DI UMZ5.6KTL		ET6401	1-780-482-11	EARTH TERMINAL	
D4502	6-500-335-01	DIODE MC2838-T112-1		ET6402	1-780-482-11	EARTH TERMINAL	
D4505	6-500-335-01	DIODE MC2838-T112-1		ET6403	1-780-482-11	EARTH TERMINAL	
D4506	6-500-335-01	DIODE MC2838-T112-1		ET6404	1-780-482-11	EARTH TERMINAL	
D5501	6-501-817-01	DIODE MA2J1110GLSO		ET6405	1-780-482-11	EARTH TERMINAL	
D5503	6-501-818-01	DIODE MA2J1130GLSO		ET6406	1-780-482-11	EARTH TERMINAL	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.



REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< FUSE >							
F1200	Δ 1-576-933-21	FUSE	5A 24V	FB5511	1-400-834-11	FERRITE	Ouh
F3000	Δ 1-576-646-11	FUSE	0.5A 50V	FB5513	1-400-834-11	FERRITE	Ouh
F3200	Δ 1-576-913-11	FUSE	1.6A 36V	FB5515	1-400-834-11	FERRITE	Ouh
F3401	Δ 1-576-933-21	FUSE	5A 24V	FB6400	1-400-915-21	FERRITE	Ouh
				FB6401	1-400-089-21	FERRITE	Ouh
< FERRITE BEAD >							
FB2200	1-469-869-21	FERRITE	Ouh	FB6402	1-400-834-11	FERRITE	Ouh
FB2201	1-400-834-11	FERRITE	Ouh	FB6403	1-400-089-21	FERRITE	Ouh
FB2202	1-400-834-11	FERRITE	Ouh	FB6404	1-400-834-11	FERRITE	Ouh
FB2203	1-400-834-11	FERRITE	Ouh	FB6405	1-400-834-11	FERRITE	Ouh
FB2204	1-400-834-11	FERRITE	Ouh	FB6406	1-400-089-21	FERRITE	Ouh
FB2205	1-400-834-11	FERRITE	Ouh	FB6407	1-400-834-11	FERRITE	Ouh
FB2206	1-400-834-11	FERRITE	Ouh	FB6409	1-400-089-21	FERRITE	Ouh
FB2207	1-400-834-11	FERRITE	Ouh	FB6410	1-400-915-21	FERRITE	Ouh
FB2208	1-400-834-11	FERRITE	Ouh	FB6411	1-400-915-21	FERRITE	Ouh
FB2209	1-400-834-11	FERRITE	Ouh	FB6413	1-400-089-21	FERRITE	Ouh
FB2210	1-400-834-11	FERRITE	Ouh	FB6414	1-400-915-21	FERRITE	Ouh
FB2211	1-400-834-11	FERRITE	Ouh	FB6415	1-400-915-21	FERRITE	Ouh
FB2214	1-400-591-22	FERRITE	Ouh	FB6417	1-400-089-21	FERRITE	Ouh
FB2215	1-400-834-11	FERRITE	Ouh	FB6418	1-400-915-21	FERRITE	Ouh
FB2216	1-400-462-21	FERRITE	Ouh	FB6419	1-400-915-21	FERRITE	Ouh
FB2218	1-400-462-21	FERRITE	Ouh	FB6420	1-400-915-21	FERRITE	Ouh
FB2219	1-400-834-11	FERRITE	Ouh	FB6421	1-400-915-21	FERRITE	Ouh
FB2220	1-400-834-11	FERRITE	Ouh	FB6423	1-400-915-21	FERRITE	Ouh
FB2221	1-400-834-11	FERRITE	Ouh	FB6424	1-400-915-21	FERRITE	Ouh
FB3004	1-400-141-22	FERRITE	Ouh	FB6425	1-400-915-21	FERRITE	Ouh
FB3006	1-400-834-11	FERRITE	Ouh	FB6426	1-400-915-21	FERRITE	Ouh
FB3007	1-400-244-11	FERRITE	Ouh	FB6428	1-400-915-21	FERRITE	Ouh
FB3080	1-469-869-21	FERRITE	Ouh	FB7100	1-400-382-11	FERRITE	Ouh
FB3200	1-400-462-21	FERRITE	Ouh	FB7101	1-400-382-11	FERRITE	Ouh
FB3406	1-400-089-21	FERRITE	Ouh	FB7102	1-400-382-11	FERRITE	Ouh
FB3407	1-400-089-21	FERRITE	Ouh	FB7500	1-400-807-21	FERRITE	Ouh
FB3408	1-400-089-21	FERRITE	Ouh	FB7501	1-400-832-21	FERRITE	Ouh
FB3409	1-400-089-21	FERRITE	Ouh	FB7600	1-400-382-11	FERRITE	Ouh
FB4000	1-400-244-11	FERRITE	Ouh	FB7601	1-400-382-11	FERRITE	Ouh
FB4001	1-400-244-11	FERRITE	Ouh	FB7602	1-400-382-11	FERRITE	Ouh
FB4500	1-400-693-21	FERRITE	Ouh	FB7603	1-400-382-11	FERRITE	Ouh
FB4502	1-400-693-21	FERRITE	Ouh	FB7709	1-469-869-21	FERRITE	Ouh
FB4503	1-400-693-21	FERRITE	Ouh	FB8200	1-469-084-21	FERRITE	OMH
FB4504	1-400-141-22	FERRITE	Ouh				
FB5500	1-400-834-11	FERRITE	Ouh	< FILTER >			
FB5501	1-400-834-11	FERRITE	Ouh	FL5000	1-234-939-21	FILTER, EMI REMOVAL (SMD)	
FB5502	1-400-834-11	FERRITE	Ouh	FL5001	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
FB5503	1-400-834-11	FERRITE	Ouh	FL5002	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
FB5504	1-400-834-11	FERRITE	Ouh	FL5003	1-234-939-21	FILTER, EMI REMOVAL (SMD)	
FB5505	1-400-834-11	FERRITE	Ouh	FL5004	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
FB5507	1-400-834-11	FERRITE	Ouh	FL5007	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
FB5510	1-400-834-11	FERRITE	Ouh	FL5008	1-234-939-21	FILTER, EMI REMOVAL (SMD)	
				FL5009	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
				FL5010	1-234-939-21	FILTER, EMI REMOVAL (SMD)	
				FL5011	1-234-939-21	FILTER, EMI REMOVAL (SMD)	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
FL5012	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC6571	6-710-949-01	IC SN0608006PWPR	
FL5013	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC6572	6-712-787-01	IC MM1701VHBE	
FL5015	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC6573	6-706-419-01	IC LM393DT (A)	
FL5016	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC7000	6-713-132-01	IC UPD61300F1-230-LU2-A	
FL5018	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7100	6-703-175-01	IC PST3629UL	
FL5019	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC7101	6-711-288-01	IC MIC2005-0.5YM6TR	
FL5020	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7200	6-712-189-01	IC EDE5116AJBG-6E-E	
FL5021	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7201	6-712-189-01	IC EDE5116AJBG-6E-E	
FL5022	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7300	6-711-242-01	IC K9F1208U0C-PCB0T	
FL5023	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC7600	6-712-775-11	IC KSZ8041TLTR	
FL5024	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC7701	6-707-850-01	IC TC74LCX245FT (EKJ)	
FL5025	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7704	6-707-853-01	IC TC74LCX541FT (EKJ)	
FL5026	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7705	6-707-853-01	IC TC74LCX541FT (EKJ)	
FL6400	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7706	6-707-853-01	IC TC74LCX541FT (EKJ)	
FL6401	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7707	6-707-853-01	IC TC74LCX541FT (EKJ)	
FL6402	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7708	6-707-853-01	IC TC74LCX541FT (EKJ)	
FL6403	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7709	6-707-853-01	IC TC74LCX541FT (EKJ)	
		< IC >		IC7710	6-711-288-01	IC MIC2005-0.5YM6TR	
IC1000	6-701-173-01	IC MC74LVXT4053DTR2		IC8200	8-753-299-00	IC CXA3767R-T6	
IC1201	6-705-973-01	IC PCM1754DBQR				< SOCKET >	
IC2200	6-709-257-01	IC 74LVC4066PW		J1000	1-821-055-12	PHONO JACK 5P	
IC2202	6-709-932-01	IC MM3141CNRE		J3000	1-820-765-11	PHONO JACK 2P	
IC2203	6-709-607-01	IC LA5795T-TLM-E		J3001	1-821-899-11	JACK (SMALL TYPE)	
IC3000	6-704-600-01	IC M24C02-WMN6T (B)		J3002	1-821-899-11	JACK (SMALL TYPE)	
IC3004	8-759-242-64	IC TC4W53F		J3005	1-821-115-11	PHONO JACK (RIGHT ANGLE) 3P	
IC3080	6-712-525-01	IC MIC2005-0.8YM6TR		J8200	1-815-325-11	JACK	
IC3201	6-712-974-01	IC CXD9926ATQ				< COIL >	
IC3400	6-710-904-01	IC TPA3100D2PHPR		L1200	1-400-177-21	FERRITE	0UH
IC4001	6-711-262-01	IC HYB18TC256160BF-3S		L1201	1-400-177-21	FERRITE	0UH
IC4002	6-711-262-01	IC HYB18TC256160BF-3S		L1203	1-469-555-21	INDUCTOR	10UH
IC4500	6-704-600-01	IC M24C02-WMN6T (B)		L2200	1-412-058-11	INDUCTOR	10UH
IC4504	6-704-600-01	IC M24C02-WMN6T (B)		L2201	1-469-549-21	INDUCTOR	1UH
IC4505	6-704-600-01	IC M24C02-WMN6T (B)		L2202	1-412-058-11	INDUCTOR	10UH
IC4508	8-753-282-08	IC CXB1444R-T6		L2203	1-412-058-11	INDUCTOR	10UH
IC4509	6-711-332-01	IC TC7SG17FU (TE85R,F)		L2204	1-412-058-11	INDUCTOR	10UH
IC5004	6-712-787-01	IC MM1701VHBE		L2206	1-412-058-11	INDUCTOR	10UH
IC5500	6-704-573-01	IC M24C32-WMN6T (B)		L2207	1-412-058-11	INDUCTOR	10UH
IC5501	6-710-443-01	IC LM75AD		L2208	1-412-058-11	INDUCTOR	10UH
IC5502	6-712-337-01	IC PCA8563T/4		L2209	1-469-549-21	INDUCTOR	1UH
IC5503	6-702-688-01	IC M24C64-WMN6T (B)		L2210	1-469-549-21	INDUCTOR	1UH
IC5504	6-703-175-01	IC PST3629UL		L2211	1-469-549-21	INDUCTOR	1UH
IC5505	6-808-489-01	IC MB90F335APMC-G-SPE1		L2212	1-469-555-21	INDUCTOR	10UH
IC5507	6-712-527-01	IC MM3154XURE		L3200	1-400-179-21	FERRITE	0UH
IC6401	6-712-744-01	IC TK11190CSCCL-G		L3201	1-400-179-21	FERRITE	0UH
IC6402	6-710-922-01	IC BD9853AFV-E2		L3202	1-469-555-21	INDUCTOR	10UH
IC6403	6-710-922-01	IC BD9853AFV-E2		L3401	1-457-429-11	INDUCTOR	22UH
IC6405	6-711-145-01	IC TPS51124RGER		L3402	1-457-429-11	INDUCTOR	22UH
IC6570	6-712-749-01	IC MM1701YHBE					

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.



REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
L3403	1-457-429-11	INDUCTOR	22UH	Q2203	6-551-904-01	TR RT3S03M-T111-1	
L3406	1-457-429-11	INDUCTOR	22UH	Q2204	6-551-904-01	TR RT3S03M-T111-1	
L5503	1-400-179-21	FERRITE	0UH	Q2205	6-551-817-01	TR UNR52A3G0LS0	
L5504	1-400-179-21	FERRITE	0UH	Q2207	6-550-871-01	TRANSISTOR 2SA2048TL QR	
L5505	1-400-179-21	FERRITE	0UH	Q2208	6-550-871-01	TRANSISTOR 2SA2048TL QR	
L5506	1-400-179-21	FERRITE	0UH	Q2209	6-551-825-01	TR UNR52A5G0LS0	
L5507	1-400-179-21	FERRITE	0UH	Q2212	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
L5508	1-400-179-21	FERRITE	0UH	Q3400	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
L6403	1-457-439-11	INDUCTOR	4.7UH	Q3401	6-551-817-01	TR UNR52A3G0LS0	
L6404	1-457-439-11	INDUCTOR	4.7UH	Q4500	6-551-904-01	TR RT3S03M-T111-1	
L6405	1-457-439-11	INDUCTOR	4.7UH	Q4501	6-551-701-01	TRANSISTOR INK0003AC1-T112A-1	
L6407	1-457-439-11	INDUCTOR	4.7UH	Q4502	6-551-701-01	TRANSISTOR INK0003AC1-T112A-1	
L6411	1-457-455-11	INDUCTOR	10UH	Q4503	6-551-701-01	TRANSISTOR INK0003AC1-T112A-1	
L6412	1-400-692-11	INDUCTOR	10UH	Q4700	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)	
L6413	1-457-439-11	INDUCTOR	4.7UH	Q4701	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)	
L6418	1-457-497-11	INDUCTOR	4.7UH	Q4702	8-729-028-96	TRANSISTOR DTC114EUA-T106	
L6419	1-457-439-11	INDUCTOR	4.7UH	Q4703	8-729-028-86	TRANSISTOR DTA143EUA-T106	
L7100	1-457-374-21	INDUCTOR	0UH	Q5500	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
L7400	1-412-058-11	INDUCTOR	10UH	Q5501	8-729-028-73	TRANSISTOR DTA114EUA-T106	
L8000	1-457-539-11	INDUCTOR	0UH	Q5503	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)	
L8001	1-457-539-11	INDUCTOR	0UH	Q5504	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)	
L8002	1-457-539-11	INDUCTOR	0UH	Q5506	8-729-029-14	TRANSISTOR DTC144EUA-T106	
L8003	1-457-539-11	INDUCTOR	0UH	Q5508	8-729-029-14	TRANSISTOR DTC144EUA-T106	
L8004	1-457-539-11	INDUCTOR	0UH	Q5510	8-729-029-14	TRANSISTOR DTC144EUA-T106	
L8005	1-457-539-11	INDUCTOR	0UH	Q5511	6-551-776-01	TR 2SC5950G0LS0	
L8200	1-412-058-11	INDUCTOR	10UH	Q5512	6-551-776-01	TR 2SC5950G0LS0	
L8203	1-412-058-11	INDUCTOR	10UH	Q5513	6-551-456-01	TRANSISTOR RTR020P02TL	
L8204	1-412-058-11	INDUCTOR	10UH	Q5514	8-729-028-96	TRANSISTOR DTC114EUA-T106	
L8205	1-412-058-11	INDUCTOR	10UH	Q5515	8-729-028-96	TRANSISTOR DTC114EUA-T106	
L8206	1-412-058-11	INDUCTOR	10UH	Q6400	8-729-028-73	TRANSISTOR DTA114EUA-T106	
< PROTECTOR MODULE >				Q6401	6-551-986-01	TR RT3DL1M-T111A-1F	
PS6400 Δ	1-576-736-41	IC LINK	3.15A 24V	Q6403	6-551-986-01	TR RT3DL1M-T111A-1F	
PS6401 Δ	1-576-736-41	IC LINK	3.15A 24V	Q6404	6-551-986-01	TR RT3DL1M-T111A-1F	
PS6402 Δ	1-576-736-41	IC LINK	3.15A 24V	Q6407	6-551-382-01	TRANSISTOR RSS040P03FD5TB	
PS6403 Δ	1-576-736-41	IC LINK	3.15A 24V	Q6408	6-551-456-01	TRANSISTOR RTR020P02TL	
PS6404 Δ	1-576-736-41	IC LINK	3.15A 24V	Q6409	6-551-123-01	TRANSISTOR RSS065N03FU7TB	
< TRANSISTOR >				Q6410	6-550-718-01	TRANSISTOR RSR025N03TL	
Q1000	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)		Q6411	6-551-382-01	TRANSISTOR RSS040P03FD5TB	
Q1001	8-729-029-14	TRANSISTOR DTC144EUA-T106		Q6412	6-551-123-01	TRANSISTOR RSS065N03FU7TB	
Q1002	6-551-775-01	TR 2SA2122G0LS0		Q6413	6-551-456-01	TRANSISTOR RTR020P02TL	
Q1003	6-551-776-01	TR 2SC5950G0LS0		Q6414	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
Q1006	6-551-943-01	TR RT3XBBM-T111-1		Q6415	6-550-718-01	TRANSISTOR RSR025N03TL	
Q1007	6-551-775-01	TR 2SA2122G0LS0		Q6416	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)	
Q1008	6-551-776-01	TR 2SC5950G0LS0		Q6417	6-551-775-01	TR 2SA2122G0LS0	
Q1200	8-729-028-96	TRANSISTOR DTC114EUA-T106		Q6418	6-551-986-01	TR RT3DL1M-T111A-1F	
Q2201	6-551-696-01	TRANSISTOR ISA1235AC1TP-1EF		Q6419	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q2202	6-551-904-01	TR RT3S03M-T111-1		Q6421	6-551-690-01	TRANSISTOR RT3N11M-TP-1	
				Q6430	6-550-663-01	TRANSISTOR RSS100N03FD5TB	
				Q6431	6-550-663-01	TRANSISTOR RSS100N03FD5TB	
				Q6434	6-551-986-01	TR RT3DL1M-T111A-1F	



REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
Q6436	6-551-986-01	TR RT3DL1M-T111A-1F		R1050	1-218-989-11	METAL CHIP 1M 5%	1/16W
Q6437	6-551-986-01	TR RT3DL1M-T111A-1F		R1052	1-218-941-81	METAL CHIP 100 5%	1/16W
Q6440	6-550-663-01	TRANSISTOR RSS100N03FD5TB		R1054	1-218-949-11	METAL CHIP 470 5%	1/16W
Q6441	6-550-663-01	TRANSISTOR RSS100N03FD5TB		R1055	1-216-811-11	METAL CHIP 150 5%	1/10W
Q6443	6-551-986-01	TR RT3DL1M-T111A-1F		R1056	1-218-972-11	METAL CHIP 39K 5%	1/16W
Q6446	6-551-639-01	TRANSISTOR RTR040N03TL		R1057	1-218-972-11	METAL CHIP 39K 5%	1/16W
Q6447	6-551-639-01	TRANSISTOR RTR040N03TL		R1058	1-218-971-11	METAL CHIP 33K 5%	1/16W
Q7100	6-551-690-01	TRANSISTOR RT3N11M-TP-1		R1059	1-218-965-11	METAL CHIP 10K 5%	1/16W
Q7101	6-551-690-01	TRANSISTOR RT3N11M-TP-1		R1060	1-218-963-11	METAL CHIP 6.8K 5%	1/16W
Q8000	8-729-028-96	TRANSISTOR DTC114EUA-T106		R1061	1-218-957-11	METAL CHIP 2.2K 5%	1/16W
Q8200	6-551-943-01	TR RT3XBBM-T111-1		R1062	1-218-963-11	METAL CHIP 6.8K 5%	1/16W
Q8210	6-551-943-01	TR RT3XBBM-T111-1		R1063	1-218-957-11	METAL CHIP 2.2K 5%	1/16W
Q8212	6-551-943-01	TR RT3XBBM-T111-1		R1064	1-208-860-81	METAL CHIP 75 0.5%	1/16W
		< RESISTOR >		R1066	1-208-860-81	METAL CHIP 75 0.5%	1/16W
				R1068	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1000	1-218-957-11	METAL CHIP 2.2K 5%	1/16W	R1070	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1001	1-218-965-11	METAL CHIP 10K 5%	1/16W	R1073	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1002	1-218-965-11	METAL CHIP 10K 5%	1/16W	R1074	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1015	1-216-864-11	SHORT CHIP 0		R1076	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1016	1-218-971-11	METAL CHIP 33K 5%	1/16W	R1078	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1017	1-218-971-11	METAL CHIP 33K 5%	1/16W	R1081	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1018	1-208-860-81	METAL CHIP 75 0.5%	1/16W	R1083	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1020	1-211-990-11	METAL CHIP 75 0.5%	1/10W	R1085	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1021	1-218-941-81	METAL CHIP 100 5%	1/16W	R1201	1-218-965-11	METAL CHIP 10K 5%	1/16W
R1022	1-216-813-11	METAL CHIP 220 5%	1/10W	R1202	1-218-953-11	METAL CHIP 1K 5%	1/16W
R1023	1-216-853-11	METAL CHIP 470K 5%	1/10W	R1205	1-218-953-11	METAL CHIP 1K 5%	1/16W
R1024	1-218-989-11	METAL CHIP 1M 5%	1/16W	R1210	1-218-949-11	METAL CHIP 470 5%	1/16W
R1025	1-218-989-11	METAL CHIP 1M 5%	1/16W	R1211	1-218-949-11	METAL CHIP 470 5%	1/16W
R1026	1-216-811-11	METAL CHIP 150 5%	1/10W	R1212	1-218-945-11	METAL CHIP 220 5%	1/16W
R1027	1-216-853-11	METAL CHIP 470K 5%	1/10W	R1241	1-218-965-11	METAL CHIP 10K 5%	1/16W
R1028	1-218-949-11	METAL CHIP 470 5%	1/16W	R1243	1-218-990-81	SHORT CHIP 0	
R1029	1-216-811-11	METAL CHIP 150 5%	1/10W	R2204	1-218-949-11	METAL CHIP 470 5%	1/16W
R1030	1-218-971-11	METAL CHIP 33K 5%	1/16W	R2207	1-218-969-11	METAL CHIP 22K 5%	1/16W
R1031	1-218-965-11	METAL CHIP 10K 5%	1/16W	R2208	1-218-981-91	METAL CHIP 220K 5%	1/16W
R1032	1-216-864-11	SHORT CHIP 0		R2213	1-218-965-11	METAL CHIP 10K 5%	1/16W
R1033	1-208-860-81	METAL CHIP 75 0.5%	1/16W	R2216	1-218-971-11	METAL CHIP 33K 5%	1/16W
R1036	1-218-972-11	METAL CHIP 39K 5%	1/16W	R2218	1-218-971-11	METAL CHIP 33K 5%	1/16W
R1037	1-218-972-11	METAL CHIP 39K 5%	1/16W	R2219	1-218-965-11	METAL CHIP 10K 5%	1/16W
R1038	1-211-990-11	METAL CHIP 75 0.5%	1/10W	R2222	1-218-969-11	METAL CHIP 22K 5%	1/16W
R1039	1-218-941-81	METAL CHIP 100 5%	1/16W	R2225	1-218-965-11	METAL CHIP 10K 5%	1/16W
R1040	1-218-941-81	METAL CHIP 100 5%	1/16W	R2227	1-218-949-11	METAL CHIP 470 5%	1/16W
R1041	1-218-941-81	METAL CHIP 100 5%	1/16W	R2229	1-218-949-11	METAL CHIP 470 5%	1/16W
R1042	1-218-941-81	METAL CHIP 100 5%	1/16W	R2233	1-218-969-11	METAL CHIP 22K 5%	1/16W
R1043	1-216-853-11	METAL CHIP 470K 5%	1/10W	R2234	1-218-965-11	METAL CHIP 10K 5%	1/16W
R1044	1-216-813-11	METAL CHIP 220 5%	1/10W	R2242	1-218-937-11	METAL CHIP 47 5%	1/16W
R1045	1-218-989-11	METAL CHIP 1M 5%	1/16W	R2250	1-218-990-81	SHORT CHIP 0	
R1046	1-218-989-11	METAL CHIP 1M 5%	1/16W	R2251	1-218-941-81	METAL CHIP 100 5%	1/16W
R1047	1-216-853-11	METAL CHIP 470K 5%	1/10W	R2253	1-216-864-11	SHORT CHIP 0	
R1048	1-218-989-11	METAL CHIP 1M 5%	1/16W	R2255	1-218-990-81	SHORT CHIP 0	
R1049	1-216-811-11	METAL CHIP 150 5%	1/10W	R2257	1-218-990-81	SHORT CHIP 0	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R2258	1-218-990-81	SHORT CHIP	0	R3427	1-218-990-81	SHORT CHIP	0
R2259	1-218-965-11	METAL CHIP	10K 5% 1/16W	R3431	1-218-990-81	SHORT CHIP	0
R2266	1-218-965-11	METAL CHIP	10K 5% 1/16W	R3432	1-218-977-11	METAL CHIP	100K 5% 1/16W
R3002	1-216-864-11	SHORT CHIP	0	R3434	1-218-977-11	METAL CHIP	100K 5% 1/16W
R3010	1-218-990-81	SHORT CHIP	0	R3453	1-218-981-91	METAL CHIP	220K 5% 1/16W
R3011	1-218-990-81	SHORT CHIP	0	R3455	1-218-953-11	METAL CHIP	1K 5% 1/16W
R3012	1-218-990-81	SHORT CHIP	0	R3456	1-218-969-11	METAL CHIP	22K 5% 1/16W
R3019	1-218-953-11	METAL CHIP	1K 5% 1/16W	R3457	1-218-949-11	METAL CHIP	470 5% 1/16W
R3029	1-218-953-11	METAL CHIP	1K 5% 1/16W	R3458	1-218-973-11	METAL CHIP	47K 5% 1/16W
R3035	1-218-977-11	METAL CHIP	100K 5% 1/16W	R3459	1-218-941-81	METAL CHIP	100 5% 1/16W
R3036	1-216-864-11	SHORT CHIP	0	R3460	1-218-965-11	METAL CHIP	10K 5% 1/16W
R3040	1-218-989-11	METAL CHIP	1M 5% 1/16W	R4000	1-218-943-11	METAL CHIP	150 5% 1/16W
R3041	1-218-989-11	METAL CHIP	1M 5% 1/16W	R4003	1-218-943-11	METAL CHIP	150 5% 1/16W
R3042	1-218-989-11	METAL CHIP	1M 5% 1/16W	R4010	1-218-933-11	METAL CHIP	22 5% 1/16W
R3043	1-218-989-11	METAL CHIP	1M 5% 1/16W	R4011	1-218-933-11	METAL CHIP	22 5% 1/16W
R3045	1-211-990-11	METAL CHIP	75 0.5% 1/10W	R4012	1-218-933-11	METAL CHIP	22 5% 1/16W
R3048	1-218-965-11	METAL CHIP	10K 5% 1/16W	R4013	1-218-933-11	METAL CHIP	22 5% 1/16W
R3053	1-218-941-81	METAL CHIP	100 5% 1/16W	R4014	1-218-935-11	METAL CHIP	33 5% 1/16W
R3078	1-218-967-11	METAL CHIP	15K 5% 1/16W	R4015	1-218-935-11	METAL CHIP	33 5% 1/16W
R3079	1-218-967-11	METAL CHIP	15K 5% 1/16W	R4016	1-218-935-11	METAL CHIP	33 5% 1/16W
R3080	1-218-967-11	METAL CHIP	15K 5% 1/16W	R4017	1-218-935-11	METAL CHIP	33 5% 1/16W
R3081	1-218-967-11	METAL CHIP	15K 5% 1/16W	R4018	1-218-935-11	METAL CHIP	33 5% 1/16W
R3100	1-208-860-81	METAL CHIP	75 0.5% 1/16W	R4019	1-218-935-11	METAL CHIP	33 5% 1/16W
R3101	1-218-941-81	METAL CHIP	100 5% 1/16W	R4020	1-218-933-11	METAL CHIP	22 5% 1/16W
R3107	1-218-941-81	METAL CHIP	100 5% 1/16W	R4021	1-218-933-11	METAL CHIP	22 5% 1/16W
R3108	1-216-853-11	METAL CHIP	470K 5% 1/10W	R4022	1-218-933-11	METAL CHIP	22 5% 1/16W
R3109	1-216-853-11	METAL CHIP	470K 5% 1/10W	R4023	1-218-933-11	METAL CHIP	22 5% 1/16W
R3110	1-218-989-11	METAL CHIP	1M 5% 1/16W	R4028	1-218-933-11	METAL CHIP	22 5% 1/16W
R3111	1-218-989-11	METAL CHIP	1M 5% 1/16W	R4029	1-218-933-11	METAL CHIP	22 5% 1/16W
R3112	1-218-941-81	METAL CHIP	100 5% 1/16W	R4032	1-208-671-11	METAL CHIP	330 0.5% 1/16W
R3113	1-208-860-81	METAL CHIP	75 0.5% 1/16W	R4033	1-208-671-11	METAL CHIP	330 0.5% 1/16W
R3117	1-208-860-81	METAL CHIP	75 0.5% 1/16W	R4034	1-208-671-11	METAL CHIP	330 0.5% 1/16W
R3119	1-208-860-81	METAL CHIP	75 0.5% 1/16W	R4035	1-208-671-11	METAL CHIP	330 0.5% 1/16W
R3205	1-218-990-81	SHORT CHIP	0	R4500	1-218-953-11	METAL CHIP	1K 5% 1/16W
R3206	1-218-990-81	SHORT CHIP	0	R4502	1-218-967-11	METAL CHIP	15K 5% 1/16W
R3207	1-218-990-81	SHORT CHIP	0	R4512	1-218-953-11	METAL CHIP	1K 5% 1/16W
R3208	1-218-990-81	SHORT CHIP	0	R4513	1-218-953-11	METAL CHIP	1K 5% 1/16W
R3209	1-218-965-11	METAL CHIP	10K 5% 1/16W	R4514	1-218-967-11	METAL CHIP	15K 5% 1/16W
R3210	1-218-953-11	METAL CHIP	1K 5% 1/16W	R4515	1-218-967-11	METAL CHIP	15K 5% 1/16W
R3214	1-218-957-11	METAL CHIP	2.2K 5% 1/16W	R4517	1-218-965-11	METAL CHIP	10K 5% 1/16W
R3215	1-208-715-11	METAL CHIP	22K 0.5% 1/16W	R4519	1-218-965-11	METAL CHIP	10K 5% 1/16W
R3216	1-218-945-11	METAL CHIP	220 5% 1/16W	R4525	1-218-965-11	METAL CHIP	10K 5% 1/16W
R3217	1-218-945-11	METAL CHIP	220 5% 1/16W	R4528	1-218-977-11	METAL CHIP	100K 5% 1/16W
R3218	1-218-989-11	METAL CHIP	1M 5% 1/16W	R4529	1-208-699-11	METAL CHIP	4.7K 0.5% 1/16W
R3219	1-218-990-81	SHORT CHIP	0	R4533	1-218-941-81	METAL CHIP	100 5% 1/16W
R3220	1-218-990-81	SHORT CHIP	0	R4534	1-218-941-81	METAL CHIP	100 5% 1/16W
R3407	1-208-699-11	METAL CHIP	4.7K 0.5% 1/16W	R4535	1-218-965-11	METAL CHIP	10K 5% 1/16W
R3408	1-208-699-11	METAL CHIP	4.7K 0.5% 1/16W	R4537	1-218-965-11	METAL CHIP	10K 5% 1/16W
R3415	1-208-911-11	METAL CHIP	10K 0.5% 1/16W	R4538	1-218-981-91	METAL CHIP	220K 5% 1/16W
R3416	1-208-911-11	METAL CHIP	10K 0.5% 1/16W	R4540	1-218-981-91	METAL CHIP	220K 5% 1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R4541	1-218-981-91	METAL CHIP	220K	5%	1/16W	R5592	1-218-957-11	METAL CHIP	2.2K	5%	1/16W
R4542	1-218-941-81	METAL CHIP	100	5%	1/16W	R5602	1-218-941-81	METAL CHIP	100	5%	1/16W
R4708	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5604	1-218-965-11	METAL CHIP	10K	5%	1/16W
R4709	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5614	1-218-957-11	METAL CHIP	2.2K	5%	1/16W
R4725	1-218-990-81	SHORT CHIP	0			R5616	1-218-941-81	METAL CHIP	100	5%	1/16W
R4728	1-218-990-81	SHORT CHIP	0			R5617	1-218-963-11	METAL CHIP	6.8K	5%	1/16W
R4755	1-218-990-81	SHORT CHIP	0			R5621	1-218-941-81	METAL CHIP	100	5%	1/16W
R4756	1-208-671-11	METAL CHIP	330	0.5%	1/16W	R5623	1-218-941-81	METAL CHIP	100	5%	1/16W
R4757	1-208-671-11	METAL CHIP	330	0.5%	1/16W	R5629	1-218-941-81	METAL CHIP	100	5%	1/16W
R4761	1-218-990-81	SHORT CHIP	0			R5630	1-218-963-11	METAL CHIP	6.8K	5%	1/16W
R5016	1-216-864-11	SHORT CHIP	0			R5643	1-218-941-81	METAL CHIP	100	5%	1/16W
R5020	1-216-864-11	SHORT CHIP	0			R5644	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5021	1-216-864-11	SHORT CHIP	0			R5646	1-218-941-81	METAL CHIP	100	5%	1/16W
R5022	1-208-635-11	METAL CHIP	10	0.5%	1/16W	R5647	1-218-933-11	METAL CHIP	22	5%	1/16W
R5024	1-208-635-11	METAL CHIP	10	0.5%	1/16W	R5648	1-218-933-11	METAL CHIP	22	5%	1/16W
R5501	1-216-864-11	SHORT CHIP	0			R5649	1-218-941-81	METAL CHIP	100	5%	1/16W
R5502	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R5650	1-218-933-11	METAL CHIP	22	5%	1/16W
R5503	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5651	1-218-941-81	METAL CHIP	100	5%	1/16W
R5504	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5652	1-218-933-11	METAL CHIP	22	5%	1/16W
R5505	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5655	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5508	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5656	1-218-949-11	METAL CHIP	470	5%	1/16W
R5509	1-218-941-81	METAL CHIP	100	5%	1/16W	R5669	1-218-941-81	METAL CHIP	100	5%	1/16W
R5512	1-218-941-81	METAL CHIP	100	5%	1/16W	R5670	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5513	1-208-927-11	METAL CHIP	47K	0.5%	1/16W	R5671	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5514	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5674	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5518	1-218-973-11	METAL CHIP	47K	5%	1/16W	R5675	1-218-953-11	METAL CHIP	1K	5%	1/16W
R5519	1-208-927-11	METAL CHIP	47K	0.5%	1/16W	R5676	1-218-953-11	METAL CHIP	1K	5%	1/16W
R5522	1-218-973-11	METAL CHIP	47K	5%	1/16W	R5677	1-218-941-81	METAL CHIP	100	5%	1/16W
R5523	1-218-941-81	METAL CHIP	100	5%	1/16W	R5678	1-218-941-81	METAL CHIP	100	5%	1/16W
R5524	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5684	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R5527	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R5685	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R5528	1-243-975-11	METAL CHIP	4.7M	5%	1/16W	R5686	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R5530	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5689	1-218-941-81	METAL CHIP	100	5%	1/16W
R5531	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5690	1-218-941-81	METAL CHIP	100	5%	1/16W
R5533	1-218-945-11	METAL CHIP	220	5%	1/16W	R5700	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R5541	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5702	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5542	1-218-970-11	METAL CHIP	27K	5%	1/16W	R5709	1-218-990-81	SHORT CHIP	0		
R5544	1-218-990-81	SHORT CHIP	0			R5711	1-218-990-81	SHORT CHIP	0		
R5555	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5712	1-218-990-81	SHORT CHIP	0		
R5556	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5715	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R5563	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	R5716	1-218-953-11	METAL CHIP	1K	5%	1/16W
R5568	1-218-941-81	METAL CHIP	100	5%	1/16W	R5717	1-218-957-11	METAL CHIP	2.2K	5%	1/16W
R5569	1-218-945-11	METAL CHIP	220	5%	1/16W	R5719	1-218-941-81	METAL CHIP	100	5%	1/16W
R5570	1-218-941-81	METAL CHIP	100	5%	1/16W	R5722	1-218-990-81	SHORT CHIP	0		
R5571	1-218-941-81	METAL CHIP	100	5%	1/16W	R5723	1-218-957-11	METAL CHIP	2.2K	5%	1/16W
R5572	1-218-933-11	METAL CHIP	22	5%	1/16W	R5725	1-218-941-81	METAL CHIP	100	5%	1/16W
R5574	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5805	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5576	1-218-941-81	METAL CHIP	100	5%	1/16W	R6401	1-218-953-11	METAL CHIP	1K	5%	1/16W
R5578	1-218-941-81	METAL CHIP	100	5%	1/16W	R6402	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5590	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6403	1-218-965-11	METAL CHIP	10K	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R6405	1-218-953-11	METAL CHIP	1K	5%	1/16W	R6499	1-218-983-11	METAL CHIP	330K	5%	1/16W
R6408	1-218-941-81	METAL CHIP	100	5%	1/16W	R6500	1-218-973-11	METAL CHIP	47K	5%	1/16W
R6409	1-218-969-11	METAL CHIP	22K	5%	1/16W	R6524	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R6416	1-218-949-11	METAL CHIP	470	5%	1/16W	R6533	1-218-953-11	METAL CHIP	1K	5%	1/16W
R6417	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6534	1-218-990-81	SHORT CHIP	0		
R6418	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R6535	1-218-990-81	SHORT CHIP	0		
R6419	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W	R6538	1-208-931-11	METAL CHIP	68K	0.5%	1/16W
R6420	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W	R6542	1-208-910-11	METAL CHIP	9.1K	0.5%	1/16W
R6421	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R6545	1-218-974-11	METAL CHIP	56K	5%	1/16W
R6423	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6551	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W
R6424	1-218-943-11	METAL CHIP	150	5%	1/16W	R6553	1-216-791-11	METAL CHIP	3.3	5%	1/10W
R6426	1-208-703-11	METAL CHIP	6.8K	0.5%	1/16W	R6554	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R6427	1-218-941-11	METAL CHIP	100	5%	1/16W	R6555	1-208-721-11	METAL CHIP	39K	0.5%	1/16W
R6428	1-208-890-11	METAL CHIP	1.3K	0.5%	1/16W	R6556	1-218-937-11	METAL CHIP	47	5%	1/16W
R6430	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6557	1-218-937-11	METAL CHIP	47	5%	1/16W
R6432	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	R6558	1-218-990-81	SHORT CHIP	0		
R6433	1-218-990-81	SHORT CHIP	0			R6561	1-208-695-11	METAL CHIP	3.3K	0.5%	1/16W
R6435	1-218-990-81	SHORT CHIP	0			R6562	1-218-965-11	METAL CHIP	10K	5%	1/16W
R6436	1-218-990-81	SHORT CHIP	0			R6563	1-218-990-81	SHORT CHIP	0		
R6437	1-218-990-81	SHORT CHIP	0			R6564	1-218-990-81	SHORT CHIP	0		
R6438	1-218-990-81	SHORT CHIP	0			R6565	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R6439	1-218-967-11	METAL CHIP	15K	5%	1/16W	R6568	1-218-941-11	METAL CHIP	100	5%	1/16W
R6441	1-218-990-81	SHORT CHIP	0			R6583	1-218-965-11	METAL CHIP	10K	5%	1/16W
R6443	1-208-909-11	METAL CHIP	8.2K	0.5%	1/16W	R6585	1-218-982-11	METAL CHIP	270K	5%	1/16W
R6444	1-218-990-81	SHORT CHIP	0			R6587	1-216-295-91	SHORT CHIP	0		
R6451	1-218-990-81	SHORT CHIP	0			R6603	1-218-953-11	METAL CHIP	1K	5%	1/16W
R6453	1-218-990-81	SHORT CHIP	0			R6609	1-218-967-11	METAL CHIP	15K	5%	1/16W
R6454	1-218-941-81	METAL CHIP	100	5%	1/16W	R6610	1-218-953-11	METAL CHIP	1K	5%	1/16W
R6455	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6611	1-218-965-11	METAL CHIP	10K	5%	1/16W
R6459	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	R6614	1-218-990-81	SHORT CHIP	0		
R6461	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R6615	1-216-864-11	SHORT CHIP	0		
R6462	1-218-941-11	METAL CHIP	100	5%	1/16W	R6624	1-218-977-11	METAL CHIP	100K	5%	1/16W
R6463	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W	R6625	1-218-941-81	METAL CHIP	100	5%	1/16W
R6466	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6626	1-216-797-11	METAL CHIP	10	5%	1/10W
R6467	1-208-671-11	METAL CHIP	330	0.5%	1/16W	R6629	1-216-797-11	METAL CHIP	10	5%	1/10W
R6468	1-208-883-81	METAL CHIP	680	0.5%	1/16W	R6630	1-216-797-11	METAL CHIP	10	5%	1/10W
R6469	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	R6631	1-208-931-11	METAL CHIP	68K	0.5%	1/16W
R6470	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6632	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R6473	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6633	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R6474	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R6634	1-218-941-81	METAL CHIP	100	5%	1/16W
R6475	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R6635	1-218-941-81	METAL CHIP	100	5%	1/16W
R6476	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W	R6636	1-216-295-91	SHORT CHIP	0		
R6477	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7100	1-218-941-81	METAL CHIP	100	5%	1/16W
R6479	1-218-939-11	METAL CHIP	68	5%	1/16W	R7103	1-218-953-11	METAL CHIP	1K	5%	1/16W
R6489	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	R7104	1-218-941-81	METAL CHIP	100	5%	1/16W
R6490	1-218-973-11	METAL CHIP	47K	5%	1/16W	R7107	1-218-949-11	METAL CHIP	470	5%	1/16W
R6491	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7108	1-218-937-11	METAL CHIP	47	5%	1/16W
R6495	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7109	1-218-937-11	METAL CHIP	47	5%	1/16W
R6496	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7110	1-220-884-81	METAL CHIP	39	0.5%	1/16W
R6497	1-218-941-81	METAL CHIP	100	5%	1/16W	R7111	1-220-884-81	METAL CHIP	39	0.5%	1/16W



REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R7112	1-218-949-11	METAL CHIP	470	5%	1/16W	R7509	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7113	1-208-688-11	METAL CHIP	1.6K	0.5%	1/16W	R7510	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7114	1-218-967-11	METAL CHIP	15K	5%	1/16W	R7513	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7115	1-218-967-11	METAL CHIP	15K	5%	1/16W	R7516	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7122	1-218-990-81	SHORT CHIP	0			R7518	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7123	1-218-937-11	METAL CHIP	47	5%	1/16W	R7520	1-218-941-81	METAL CHIP	100	5%	1/16W
R7202	1-218-943-11	METAL CHIP	150	5%	1/16W	R7521	1-218-937-11	METAL CHIP	47	5%	1/16W
R7203	1-208-663-11	METAL CHIP	150	0.5%	1/16W	R7522	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7204	1-208-663-11	METAL CHIP	150	0.5%	1/16W	R7523	1-218-937-11	METAL CHIP	47	5%	1/16W
R7205	1-218-933-11	METAL CHIP	22	5%	1/16W	R7524	1-218-937-11	METAL CHIP	47	5%	1/16W
R7206	1-218-933-11	METAL CHIP	22	5%	1/16W	R7525	1-218-937-11	METAL CHIP	47	5%	1/16W
R7207	1-218-933-11	METAL CHIP	22	5%	1/16W	R7530	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7208	1-218-933-11	METAL CHIP	22	5%	1/16W	R7531	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7209	1-218-933-11	METAL CHIP	22	5%	1/16W	R7532	1-218-941-81	METAL CHIP	100	5%	1/16W
R7211	1-218-943-11	METAL CHIP	150	5%	1/16W	R7600	1-218-941-11	METAL CHIP	100	5%	1/16W
R7215	1-218-943-11	METAL CHIP	150	5%	1/16W	R7601	1-218-941-11	METAL CHIP	100	5%	1/16W
R7219	1-218-929-11	METAL CHIP	10	5%	1/16W	R7602	1-218-941-11	METAL CHIP	100	5%	1/16W
R7220	1-218-929-11	METAL CHIP	10	5%	1/16W	R7603	1-218-941-11	METAL CHIP	100	5%	1/16W
R7300	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7605	1-208-703-11	METAL CHIP	6.8K	0.5%	1/16W
R7302	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7606	1-218-990-81	SHORT CHIP	0		
R7305	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7607	1-218-937-11	METAL CHIP	47	5%	1/16W
R7306	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7608	1-218-978-11	METAL CHIP	120K	5%	1/16W
R7308	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7610	1-218-933-11	METAL CHIP	22	5%	1/16W
R7310	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7612	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7312	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7613	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7313	1-218-949-11	METAL CHIP	470	5%	1/16W	R7615	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7315	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7618	1-218-953-11	METAL CHIP	1K	5%	1/16W
R7317	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7619	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7319	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7622	1-218-953-11	METAL CHIP	1K	5%	1/16W
R7321	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7624	1-218-953-11	METAL CHIP	1K	5%	1/16W
R7324	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7625	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7325	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7628	1-218-953-11	METAL CHIP	1K	5%	1/16W
R7328	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7630	1-218-953-11	METAL CHIP	1K	5%	1/16W
R7329	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7631	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7330	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7635	1-218-941-11	METAL CHIP	100	5%	1/16W
R7331	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7636	1-218-941-11	METAL CHIP	100	5%	1/16W
R7333	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7637	1-218-941-11	METAL CHIP	100	5%	1/16W
R7334	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7638	1-218-941-11	METAL CHIP	100	5%	1/16W
R7337	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7712	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7338	1-218-949-11	METAL CHIP	470	5%	1/16W	R7718	1-218-937-11	METAL CHIP	47	5%	1/16W
R7339	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7722	1-218-941-81	METAL CHIP	100	5%	1/16W
R7341	1-218-949-11	METAL CHIP	470	5%	1/16W	R7723	1-218-941-81	METAL CHIP	100	5%	1/16W
R7408	1-220-180-11	METAL CHIP	620	5%	1/16W	R7724	1-218-941-81	METAL CHIP	100	5%	1/16W
R7409	1-220-174-11	METAL CHIP	200	5%	1/16W	R7725	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7410	1-220-174-11	METAL CHIP	200	5%	1/16W	R7726	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7411	1-220-174-11	METAL CHIP	200	5%	1/16W	R7727	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7412	1-208-866-11	METAL CHIP	130	0.5%	1/16W	R7729	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7414	1-218-990-81	SHORT CHIP	0			R7730	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7503	1-218-937-11	METAL CHIP	47	5%	1/16W	R7731	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7507	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7733	1-218-953-11	METAL CHIP	1K	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R7734	1-218-937-11	METAL CHIP	47 5% 1/16W	R8099	1-208-890-11	METAL CHIP	1.3K 0.5% 1/16W
R7735	1-218-953-11	METAL CHIP	1K 5% 1/16W	R8101	1-208-890-11	METAL CHIP	1.3K 0.5% 1/16W
R7736	1-218-965-11	METAL CHIP	10K 5% 1/16W	R8103	1-208-890-11	METAL CHIP	1.3K 0.5% 1/16W
R8004	1-218-965-11	METAL CHIP	10K 5% 1/16W	R8106	1-218-941-81	METAL CHIP	100 5% 1/16W
R8007	1-218-990-81	SHORT CHIP	0	R8107	1-218-941-81	METAL CHIP	100 5% 1/16W
R8008	1-218-941-81	METAL CHIP	100 5% 1/16W	R8108	1-218-941-81	METAL CHIP	100 5% 1/16W
R8009	1-218-935-11	METAL CHIP	33 5% 1/16W	R8112	1-218-990-81	SHORT CHIP	0
R8010	1-218-935-11	METAL CHIP	33 5% 1/16W	R8113	1-218-990-81	SHORT CHIP	0
R8011	1-218-935-11	METAL CHIP	33 5% 1/16W	R8120	1-218-941-81	METAL CHIP	100 5% 1/16W
R8012	1-218-935-11	METAL CHIP	33 5% 1/16W	R8122	1-218-965-11	METAL CHIP	10K 5% 1/16W
R8013	1-218-935-11	METAL CHIP	33 5% 1/16W	R8207	1-208-695-11	METAL CHIP	3.3K 0.5% 1/16W
R8014	1-218-935-11	METAL CHIP	33 5% 1/16W	R8208	1-218-941-81	METAL CHIP	100 5% 1/16W
R8015	1-218-935-11	METAL CHIP	33 5% 1/16W	R8215	1-218-949-11	METAL CHIP	470 5% 1/16W
R8016	1-218-935-11	METAL CHIP	33 5% 1/16W	R8216	1-218-949-11	METAL CHIP	470 5% 1/16W
R8017	1-218-935-11	METAL CHIP	33 5% 1/16W	R8222	1-218-990-81	SHORT CHIP	0
R8018	1-218-935-11	METAL CHIP	33 5% 1/16W	R8223	1-218-990-81	SHORT CHIP	0
R8019	1-218-935-11	METAL CHIP	33 5% 1/16W	R8224	1-218-990-81	SHORT CHIP	0
R8020	1-218-935-11	METAL CHIP	33 5% 1/16W	R8225	1-218-990-81	SHORT CHIP	0
R8021	1-218-935-11	METAL CHIP	33 5% 1/16W	R8235	1-218-945-11	METAL CHIP	220 5% 1/16W
R8022	1-218-935-11	METAL CHIP	33 5% 1/16W	R8236	1-218-945-11	METAL CHIP	220 5% 1/16W
R8023	1-218-935-11	METAL CHIP	33 5% 1/16W	R8237	1-218-945-11	METAL CHIP	220 5% 1/16W
R8024	1-218-935-11	METAL CHIP	33 5% 1/16W	R8240	1-218-965-11	METAL CHIP	10K 5% 1/16W
R8025	1-218-935-11	METAL CHIP	33 5% 1/16W	< RESISTOR CHIP >			
R8026	1-218-935-11	METAL CHIP	33 5% 1/16W	RB1000	1-234-382-21	RES, NETWORK 220K	(1005X4)
R8027	1-218-935-11	METAL CHIP	33 5% 1/16W	RB1001	1-234-382-21	RES, NETWORK 220K	(1005X4)
R8028	1-218-935-11	METAL CHIP	33 5% 1/16W	RB1002	1-239-678-81	RESISTOR, NETWORK 220	
R8029	1-218-935-11	METAL CHIP	33 5% 1/16W	RB1005	1-234-372-11	RES, NETWORK 100	(1005X4)
R8030	1-218-935-11	METAL CHIP	33 5% 1/16W	RB1007	1-239-674-81	RESISTOR, NETWORK 100	
R8031	1-218-935-11	METAL CHIP	33 5% 1/16W	RB1008	1-239-682-11	RESISTOR, NETWORK 470	
R8032	1-218-935-11	METAL CHIP	33 5% 1/16W	RB1010	1-239-678-81	RESISTOR, NETWORK 220	
R8033	1-218-935-11	METAL CHIP	33 5% 1/16W	RB1011	1-234-372-11	RES, NETWORK 100	(1005X4)
R8034	1-218-935-11	METAL CHIP	33 5% 1/16W	RB1200	1-234-371-21	RES, NETWORK 47	(1005X4)
R8035	1-218-935-11	METAL CHIP	33 5% 1/16W	RB2200	1-239-670-81	RESISTOR, NETWORK 47	
R8036	1-218-935-11	METAL CHIP	33 5% 1/16W	RB2201	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
R8037	1-218-935-11	METAL CHIP	33 5% 1/16W	RB2202	1-239-674-81	RESISTOR, NETWORK 100	
R8038	1-218-935-11	METAL CHIP	33 5% 1/16W	RB2203	1-239-666-81	RESISTOR, NETWORK 22	
R8039	1-218-941-81	METAL CHIP	100 5% 1/16W	RB2205	1-239-694-81	RESISTOR, NETWORK 4.7K	
R8042	1-218-941-81	METAL CHIP	100 5% 1/16W	RB3005	1-239-698-11	RESISTOR, NETWORK 10K	
R8043	1-218-941-81	METAL CHIP	100 5% 1/16W	RB3006	1-239-674-81	RESISTOR, NETWORK 100	
R8049	1-218-937-11	METAL CHIP	47 5% 1/16W	RB3010	1-239-704-81	RESISTOR, NETWORK 33K	
R8050	1-218-941-81	METAL CHIP	100 5% 1/16W	RB3011	1-239-705-81	RESISTOR, NETWORK 39K	
R8051	1-218-941-81	METAL CHIP	100 5% 1/16W	RB3021	1-239-674-81	RESISTOR, NETWORK 100	
R8052	1-218-941-81	METAL CHIP	100 5% 1/16W	RB3023	1-239-704-81	RESISTOR, NETWORK 33K	
R8078	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB3024	1-239-678-81	RESISTOR, NETWORK 220	
R8081	1-218-963-11	METAL CHIP	6.8K 5% 1/16W	RB3025	1-239-698-11	RESISTOR, NETWORK 10K	
R8082	1-218-963-11	METAL CHIP	6.8K 5% 1/16W	RB3028	1-239-698-11	RESISTOR, NETWORK 10K	
R8085	1-218-953-11	METAL CHIP	1K 5% 1/16W	RB3080	1-239-698-11	RESISTOR, NETWORK 10K	
R8089	1-218-990-81	SHORT CHIP	0	RB3200	1-234-378-21	RES, NETWORK 10K	(1005X4)
R8094	1-218-965-11	METAL CHIP	10K 5% 1/16W				
R8097	1-208-890-11	METAL CHIP	1.3K 0.5% 1/16W				

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
RB3201	1-234-376-11	RES, NETWORK 2.2K	(1005X4)	RB5514	1-239-690-81	RESISTOR, NETWORK 2.2K	
RB3202	1-234-371-21	RES, NETWORK 47	(1005X4)	RB5515	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB3203	1-234-371-21	RES, NETWORK 47	(1005X4)	RB5516	1-239-674-81	RESISTOR, NETWORK 100	
RB3204	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB5517	1-239-698-11	RESISTOR, NETWORK 10K	
RB3205	1-234-371-21	RES, NETWORK 47	(1005X4)	RB5518	1-239-674-81	RESISTOR, NETWORK 100	
RB3400	1-234-381-11	RES, NETWORK 100K	(1005X4)	RB5520	1-239-674-81	RESISTOR, NETWORK 100	
RB3401	1-234-382-21	RES, NETWORK 220K	(1005X4)	RB5521	1-239-690-81	RESISTOR, NETWORK 2.2K	
RB3402	1-239-674-81	RESISTOR, NETWORK 100		RB5522	1-234-372-11	RES, NETWORK 100	(1005X4)
RB4012	1-234-892-21	RES, CHIP NETWORK 33X8	(3816)	RB5525	1-239-674-81	RESISTOR, NETWORK 100	
RB4013	1-234-892-21	RES, CHIP NETWORK 33X8	(3816)	RB5526	1-234-372-11	RES, NETWORK 100	(1005X4)
RB4014	1-242-963-21	RES, NETWORK 33	(1005X4)	RB5527	1-234-372-11	RES, NETWORK 100	(1005X4)
RB4015	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)	RB5528	1-234-372-11	RES, NETWORK 100	(1005X4)
RB4016	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)	RB5529	1-239-674-81	RESISTOR, NETWORK 100	
RB4017	1-234-370-21	RES, NETWORK 22	(1005X4)	RB6403	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB4018	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)	RB6404	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB4019	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)	RB6405	1-239-698-11	RESISTOR, NETWORK 10K	
RB4020	1-234-370-21	RES, NETWORK 22	(1005X4)	RB6406	1-239-698-11	RESISTOR, NETWORK 10K	
RB4501	1-239-674-81	RESISTOR, NETWORK 100		RB7100	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB4502	1-239-700-81	RESISTOR, NETWORK 15K		RB7103	1-239-698-11	RESISTOR, NETWORK 10K	
RB4512	1-239-674-81	RESISTOR, NETWORK 100		RB7104	1-239-670-81	RESISTOR, NETWORK 47	
RB4513	1-239-674-81	RESISTOR, NETWORK 100		RB7105	1-234-371-21	RES, NETWORK 47	(1005X4)
RB4514	1-239-700-81	RESISTOR, NETWORK 15K		RB7200	1-234-370-21	RES, NETWORK 22	(1005X4)
RB4515	1-239-700-81	RESISTOR, NETWORK 15K		RB7201	1-234-702-11	RES, NETWORK 68	(1005X4)
RB4528	1-239-670-81	RESISTOR, NETWORK 47		RB7202	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)
RB4529	1-239-686-11	RESISTOR, NETWORK 1K		RB7203	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)
RB4702	1-239-674-81	RESISTOR, NETWORK 100		RB7300	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB4703	1-239-674-81	RESISTOR, NETWORK 100		RB7301	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB4704	1-239-698-11	RESISTOR, NETWORK 10K		RB7302	1-239-670-81	RESISTOR, NETWORK 47	
RB4705	1-239-698-11	RESISTOR, NETWORK 10K		RB7303	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB4706	1-239-674-81	RESISTOR, NETWORK 100		RB7304	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB4707	1-234-723-21	RES, NETWORK 75	(1005X4)	RB7305	1-234-371-21	RES, NETWORK 47	(1005X4)
RB4708	1-239-698-11	RESISTOR, NETWORK 10K		RB7306	1-234-371-21	RES, NETWORK 47	(1005X4)
RB4709	1-234-106-81	RES, NETWORK 0		RB7400	1-239-694-81	RESISTOR, NETWORK 4.7K	
RB4711	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)	RB7402	1-234-372-11	RES, NETWORK 100	(1005X4)
RB4712	1-234-371-21	RES, NETWORK 47	(1005X4)	RB7404	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5000	1-239-674-81	RESISTOR, NETWORK 100		RB7500	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5001	1-239-674-81	RESISTOR, NETWORK 100		RB7501	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB5002	1-239-674-81	RESISTOR, NETWORK 100		RB7503	1-239-670-81	RESISTOR, NETWORK 47	
RB5003	1-239-674-81	RESISTOR, NETWORK 100		RB7504	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5500	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7505	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5501	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7506	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5502	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7508	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5503	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7509	1-239-670-81	RESISTOR, NETWORK 47	
RB5504	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB7510	1-234-372-11	RES, NETWORK 100	(1005X4)
RB5506	1-239-690-81	RESISTOR, NETWORK 2.2K		RB7511	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB5507	1-239-690-81	RESISTOR, NETWORK 2.2K		RB7513	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB5509	1-239-674-81	RESISTOR, NETWORK 100		RB7517	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5511	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7518	1-234-799-21	RES, CHIP NETWORK 10KX8	(3816)
RB5512	1-234-376-11	RES, NETWORK 2.2K	(1005X4)	RB7519	1-234-372-11	RES, NETWORK 100	(1005X4)
RB5513	1-239-690-81	RESISTOR, NETWORK 2.2K		RB7520	1-239-670-81	RESISTOR, NETWORK 47	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
RB7521	1-239-670-81	RESISTOR, NETWORK 47		VD1003	1-802-078-11	VARISTOR (SMD)	
RB7522	1-239-670-81	RESISTOR, NETWORK 47		VD1004	1-802-078-11	VARISTOR (SMD)	
RB7523	1-239-698-11	RESISTOR, NETWORK 10K					
RB7524	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD1005	1-802-078-11	VARISTOR (SMD)	
RB7600	1-234-372-11	RES, NETWORK 100	(1005X4)	VD1006	1-802-078-11	VARISTOR (SMD)	
				VD1007	1-802-078-11	VARISTOR (SMD)	
RB7706	1-239-698-11	RESISTOR, NETWORK 10K		VD1008	1-802-078-11	VARISTOR (SMD)	
RB7707	1-234-371-21	RES, NETWORK 47	(1005X4)	VD1009	1-802-078-11	VARISTOR (SMD)	
RB7709	1-239-698-11	RESISTOR, NETWORK 10K					
RB7712	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD1010	1-802-078-11	VARISTOR (SMD)	
RB7713	1-234-799-21	RES, CHIP NETWORK 10KX8	(3816)	VD1011	1-802-078-11	VARISTOR (SMD)	
				VD1012	1-802-078-11	VARISTOR (SMD)	
RB7714	1-234-799-21	RES, CHIP NETWORK 10KX8	(3816)	VD3001	1-802-078-11	VARISTOR (SMD)	
RB7715	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD3002	1-802-078-11	VARISTOR (SMD)	
RB7716	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)				
RB7717	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)	VD3003	1-802-078-11	VARISTOR (SMD)	
RB8005	1-239-674-81	RESISTOR, NETWORK 100		VD3004	1-802-078-11	VARISTOR (SMD)	
				VD3005	1-802-078-11	VARISTOR (SMD)	
RB8006	1-239-674-81	RESISTOR, NETWORK 100		VD3006	1-802-078-11	VARISTOR (SMD)	
RB8007	1-239-674-81	RESISTOR, NETWORK 100		VD3007	1-802-493-21	VARISTOR, NETWORK (1005X2)	
RB8008	1-239-674-81	RESISTOR, NETWORK 100					
RB8009	1-234-372-11	RES, NETWORK 100	(1005X4)	VD4500	1-802-078-11	VARISTOR (SMD)	
RB8010	1-234-372-11	RES, NETWORK 100	(1005X4)	VD4501	1-802-078-11	VARISTOR (SMD)	
				VD4502	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8011	1-239-674-81	RESISTOR, NETWORK 100		VD4503	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8012	1-234-372-11	RES, NETWORK 100	(1005X4)	VD4504	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8015	1-234-372-11	RES, NETWORK 100	(1005X4)				
RB8016	1-234-372-11	RES, NETWORK 100	(1005X4)	VD4505	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8017	1-239-674-81	RESISTOR, NETWORK 100		VD4506	1-802-078-11	VARISTOR (SMD)	
				VD4507	1-802-078-11	VARISTOR (SMD)	
RB8018	1-239-690-81	RESISTOR, NETWORK 2.2K		VD4509	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8201	1-239-674-81	RESISTOR, NETWORK 100		VD4510	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8210	1-239-674-81	RESISTOR, NETWORK 100					
RB8213	1-239-674-81	RESISTOR, NETWORK 100		VD4511	1-802-078-11	VARISTOR (SMD)	
RB8214	1-239-674-81	RESISTOR, NETWORK 100		VD4512	1-802-078-11	VARISTOR (SMD)	
				VD7100	1-804-988-21	VARISTOR, CHIP	(1608)
RB8215	1-239-674-81	RESISTOR, NETWORK 100		VD8201	1-802-078-11	VARISTOR (SMD)	
RB8216	1-239-674-81	RESISTOR, NETWORK 100		VD8202	1-802-078-11	VARISTOR (SMD)	
RB8217	1-239-674-81	RESISTOR, NETWORK 100					
RB8220	1-239-682-11	RESISTOR, NETWORK 470		VD8203	1-802-078-11	VARISTOR (SMD)	
RB8222	1-239-698-11	RESISTOR, NETWORK 10K		VDR001	1-802-078-11	VARISTOR (SMD)	
RB8223	1-234-372-11	RES, NETWORK 100	(1005X4)	< CRYSTAL >			
RB8224	1-234-372-11	RES, NETWORK 100	(1005X4)	X3200	1-814-130-11	QUARTZ CRYSTAL UNIT	
RB8225	1-234-372-11	RES, NETWORK 100	(1005X4)	X5500	1-813-784-21	VIBRATOR, CRYSTAL	
RB8226	1-234-372-11	RES, NETWORK 100	(1005X4)	X5501	1-795-537-21	VIBRATOR, CRYSTAL	
RB8227	1-234-372-11	RES, NETWORK 100	(1005X4)	X7100	1-814-145-11	QUARTS CRYSTAL UNIT	
RB8228	1-234-372-11	RES, NETWORK 100	(1005X4)	X7101	1-813-990-11	QUARTS CRYSTAL 30MHZ	
< TUNER >				X7600	1-814-147-11	QUARTZ CRYSTAL OSCILLATOR	
TU2200	8-597-641-00	TUNER UNIT, DIGITAL BTD-HF411T		X8000	1-781-867-21	VIBRATOR, CRYSTAL	
< VARISTOR >				A-1616-334-A AWF Board, Complete			
				< CAPACITOR >			
VD1000	1-802-078-11	VARISTOR (SMD)		C5707	1-100-764-21	ELECT CHIP 4.7UF	20% 25V
VD1001	1-802-078-11	VARISTOR (SMD)		C5708	1-100-764-21	ELECT CHIP 4.7UF	20% 25V
VD1002	1-802-078-11	VARISTOR (SMD)					

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C5709	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	L5702	1-457-429-11	INDUCTOR	22UH
C5710	1-112-797-11	ELECT CHIP 470UF	20% 25V	L5703	1-457-429-11	INDUCTOR	22UH
C5711	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V	L5704	1-457-429-11	INDUCTOR	22UH
C5712	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	< TRANSISTOR >			
C5713	1-100-764-21	ELECT CHIP 4.7UF	20% 25V	Q5701	6-551-469-01	TRANSISTOR RT3N33M-T111-1	
C5714	1-100-764-21	ELECT CHIP 4.7UF	20% 25V	Q5702	6-551-271-01	TRANSISTOR RT3AMMM	
C5715	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V	Q5703	6-551-693-01	TRANSISTOR RT3T11M-TP-1	
C5716	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V	Q5705	6-551-690-01	TRANSISTOR RT3N11M-TP-1	
C5717	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V	< RESISTOR >			
C5718	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V	R5717	1-218-977-11	METAL CHIP	100K 5% 1/16W
C5719	1-112-797-11	ELECT CHIP 470UF	20% 25V	R5721	1-216-295-91	SHORT CHIP	0
C5720	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V	R5722	1-216-295-91	SHORT CHIP	0
C5721	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	R5725	1-218-990-81	SHORT CHIP	0
C5722	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	R5729	1-218-973-11	METAL CHIP	47K 5% 1/16W
C5723	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V	R5730	1-218-965-11	METAL CHIP	10K 5% 1/16W
C5724	1-112-797-11	ELECT CHIP 470UF	20% 25V	< RESISTOR CHIP >			
C5725	1-165-818-91	CERAMIC CHIP 0.68UF	10% 25V	RB5701	1-234-378-21	RES, NETWORK 10K	(1005X4)
C5726	1-165-818-91	CERAMIC CHIP 0.68UF	10% 25V	RB5702	1-234-380-21	RES, NETWORK 47K	(1005X4)
C5731	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	RB5703	1-234-375-21	RES, NETWORK 1K	(1005X4)
C5732	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	A-1557-912-A H1VM Board, Complete			
C5733	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	< CONNECTOR >			
C5734	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	CN101	*1-820-297-11	HEADER ASSEMBLY (PRINT PWB)	3P
C5735	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V	< SWITCH >			
C5736	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V	S101	1-786-700-11	SWITCH, TACTILE	
C5737	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	A-1617-902-A H3VM Board, Complete			
C5738	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	< CAPACITOR >			
C5739	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C302	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5740	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C303	1-114-399-21	ELECT CHIP 47UF	20% 6.3V
C5741	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C304	1-114-130-11	CERAMIC CHIP 1UF	10% 6.3V
C5742	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C305	1-114-130-11	CERAMIC CHIP 1UF	10% 6.3V
< CONNECTOR >				< CONNECTOR >			
CN5701	*1-819-928-11	HEADER ASSEMBLY 20P		< DIODE >			
CN5702	*1-820-080-11	HEADER ASSEMBLY FOR PWB 3P		D5700	6-501-732-01	DIODE MAZ8056G0LS0	
< DIODE >				D5701	6-501-732-01	DIODE MAZ8056G0LS0	
D5700	6-501-732-01	DIODE MAZ8056G0LS0		D5702	6-501-732-01	DIODE MAZ8056G0LS0	
D5701	6-501-732-01	DIODE MAZ8056G0LS0		D5703	6-501-732-01	DIODE MAZ8056G0LS0	
D5702	6-501-732-01	DIODE MAZ8056G0LS0		D5704	6-501-817-01	DIODE MA2J1110GLS0	
D5703	6-501-732-01	DIODE MAZ8056G0LS0		< CONNECTOR >			
D5704	6-501-817-01	DIODE MA2J1110GLS0		CN301	1-820-288-11	HEADER ASSEMBLY (PRINT PWB)	9P
ET5700	1-780-482-11	EARTH TERMINAL		< DIODE >			
ET5702	1-780-521-11	CAPACITOR PROTECTOR		D302	6-501-734-01	DIODE MAZ8056GMLS0	
< IC >				D308	6-502-297-01	DI FR1105W-730-TR	
IC5701	6-710-904-01	IC TPA3100D2PHPR		D322	6-502-297-01	DI FR1105W-730-TR	
< COIL >				D323	6-502-296-01	DI VYPY1105W-5C43A-TR	
L5701	1-457-429-11	INDUCTOR	22UH	D324	6-502-297-01	DI FR1105W-730-TR	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D325	6-502-296-01	DI VYPY1105W-5C43A-TR					
		< IC >					
IC301	6-600-680-01	PHOTO DIODE BH1690FVC-TR					
		< TRANSISTOR >					
Q301	6-551-815-01	TR UNR52A1G0LS0					
Q302	6-551-815-01	TR UNR52A1G0LS0					
Q303	6-551-815-01	TR UNR52A1G0LS0					
Q304	6-551-815-01	TR UNR52A1G0LS0					
Q305	6-551-815-01	TR UNR52A1G0LS0					
Q306	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF					
		< RESISTOR >					
R301	1-208-663-11	METAL CHIP	150	0.5%	1/16W		
R302	1-208-675-11	METAL CHIP	470	0.5%	1/16W		
R303	1-208-663-11	METAL CHIP	150	0.5%	1/16W		
R304	1-208-675-11	METAL CHIP	470	0.5%	1/16W		
R305	1-208-675-11	METAL CHIP	470	0.5%	1/16W		
R306	1-218-990-81	SHORT CHIP	0				
R307	1-218-955-11	METAL CHIP	1.5K	5%	1/16W		
R309	1-218-990-81	SHORT CHIP	0				
R310	1-218-979-11	METAL CHIP	150K	5%	1/16W		
R311	1-218-965-11	METAL CHIP	10K	5%	1/16W		
R312	1-218-973-11	METAL CHIP	47K	5%	1/16W		
R314	1-218-953-11	METAL CHIP	1K	5%	1/16W		
A-1557-911-A H4 Board, Complete							
		< CAPACITOR >					
C401	1-112-068-11	CERAMIC CHIP 220PF	10%	50V			
C402	1-100-909-11	CERAMIC CHIP 10UF	10%	6.3V			
		< CONNECTOR >					
CN401	1-820-180-11	HEADER ASSEMBLY (PRINT PWB) 3P					
		< IC >					
IC401	6-600-681-01	IC RS-770N					
		< RESISTOR >					
R401	1-218-949-11	METAL CHIP	470	5%	1/16W		
R402	1-218-937-11	METAL CHIP	47	5%	1/16W		

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
ACCESSORIES AND CONNECTORS							
	*1-835-146-11	CONNECTOR ASSY, MDF61 (CN6700 (D4) -BALANCER)	(52 inches)		*1-910-052-63	CONNECTOR ASSY 12P (CN6503 (G6) -CON3)	(52 inches)
	*1-835-147-11	CONNECTOR ASSY, MDF61 (CN6700 (D4) -BALANCER)	(46 inches)		*1-910-052-64	CONNECTOR ASSY 10P (CN6703 (D4) -CN6950 (D5))	(52 inches)
	*1-835-149-11	CONNECTOR ASSY, MDF61 (CN6951 (D5) -BALANCER)	(52 inches)		*1-910-052-65	CONNECTOR ASSY 9P (CN6702 (D4) -CN6151 (G6))	(52 inches)
	*1-835-187-11	CONNECTOR ASSY (CN6501 (G6) -CN6900 (D5))	(52 inches)		*4-116-578-11	INSTRUCTION MANUAL (UK) ENGLISH	
	*1-835-570-11	CONNECTOR ASSY (CN6500 (G6) -CN6600 (D4))			*4-116-578-21	INSTRUCTION MANUAL (AEP) GERMAN/FRENCH/ ITALIAN/DUTCH	
	*1-835-714-11	CONNECTOR ASSY, MDF61 (CN6700 (D4Z) -BALANCER)	(40 inches)		*4-116-578-31	INSTRUCTION MANUAL (AEP) SPANISH/GREEK/PORTUGUESE	
	1-836-213-11	LEAD WIRE WITH CONNECTOR (LVDS)	(40 inches)		*4-116-578-41	INSTRUCTION MANUAL (AEP) DANISH/FINNISH/ NORWEGIAN/SWEDISH	
	1-836-214-11	LEAD WIRE WITH CONNECTOR (LVDS)	(46 inches)		*4-116-578-51	INSTRUCTION MANUAL (AEP) ENGLISH/POLISH/ RUSSIAN	
	1-836-383-11	LEAD WIRE WITH CONNECTOR (LVDS)	(52 inches)		*4-116-578-61	INSTRUCTION MANUAL (AEP) CZECH/HUNGARIAN/ SLOVAK/TURKISH	
	*1-910-052-28	CONNECTOR ASSY 30P (CN5505 (BGE) -CN101 (H1VM) , CN301 (H3VM) ,CN401 (H4) J1 ,LOGO ,CN6410 (BGE) ,CN6150/CN6502 (G6))	(40 inches)	REMOTE COMMANDER			
	*1-910-052-29	XA CONNECTOR ASSY 7P (CN6701 (D4Z) -CN104)	(40 inches)		1-480-895-12	REMOTE COMMANDER (RM-ED012)	
	*1-910-052-30	SP CONNECTOR ASSY 4P (CN3400 (BGE) -SP)	(40 inches)				
	*1-910-052-31	CONNECTOR ASSY 8P (CN6702 (D4Z) -CN6154 (G6))	(40 inches)				
	*1-910-052-32	CONNECTOR ASSY 20P (CN1200 (BGE) -CN5701 (AWF))	(40/46 inches)				
	*1-910-052-33	CONNECTOR ASSY 3P (CN5702 (AWF) -AWF)	(40/46 inches)				
	*1-910-052-34	CONNECTOR ASSY 12P (CN6503 (G6) -CON3)	(40/46 inches)				
	*1-910-052-41	CONNECTOR ASSY 30P (CN5505 (BGE) -CN101 (H1VM) , CN301 (H3VM) ,CN401 (H4) J1 ,LOGO ,CN6410 (BGE) ,CN6150/CN6502 (G6))	(46 inches)				
	*1-910-052-42	CONNECTOR ASSY 9P (CN6706 (D4Z) -CN125)	(46 inches)				
	*1-910-052-43	SP CONNECTOR ASSY 4P (CN3400 (BGE) -SP)	(46 inches)				
	*1-910-052-44	CONNECTOR ASSY 9P (CN6702 (D4Z) -CN6151 (G6))	(46 inches)				
	*1-910-052-58	CONNECTOR ASSY 20P (CN1200 (BGE) -CN5701 (AWF))	(52 inches)				
	*1-910-052-59	CONNECTOR ASSY 30P (CN5505 (BGE) -CN101 (H1VM) , CN301 (H3VM) ,CN401 (H4) J1 ,LOGO ,CN6410 (BGE) ,CN6150/CN6502 (G6))	(52 inches)				
	*1-910-052-60	CONNECTOR ASSY 3P (CN5702 (AWF) -AWF)	(52 inches)				
	*1-910-052-62	CONNECTOR ASSY 4P (CN3400 (BGE) -SP)	(52 inches)				

