

CCD-TRV3E/TRV13E/TRV23E/TRV45E/TRV55E/TRV65E/ TRV69E/TRV75/TRV75PK/TRV715

SECTION 6 REPAIR PARTS LIST

6-1. EXPLODED VIEWS

NOTE:


- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.

- Abbreviation
CND : Canadian Model
EE : East European Model
NE : North European Model
RU : Russian Model
HK : Hong Kong Model
AUS : Australian Model
JE : Tourist Model
CN : Chinese Model

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.


Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

6-1-1. CABINET (L) BLOCK ASSEMBLY

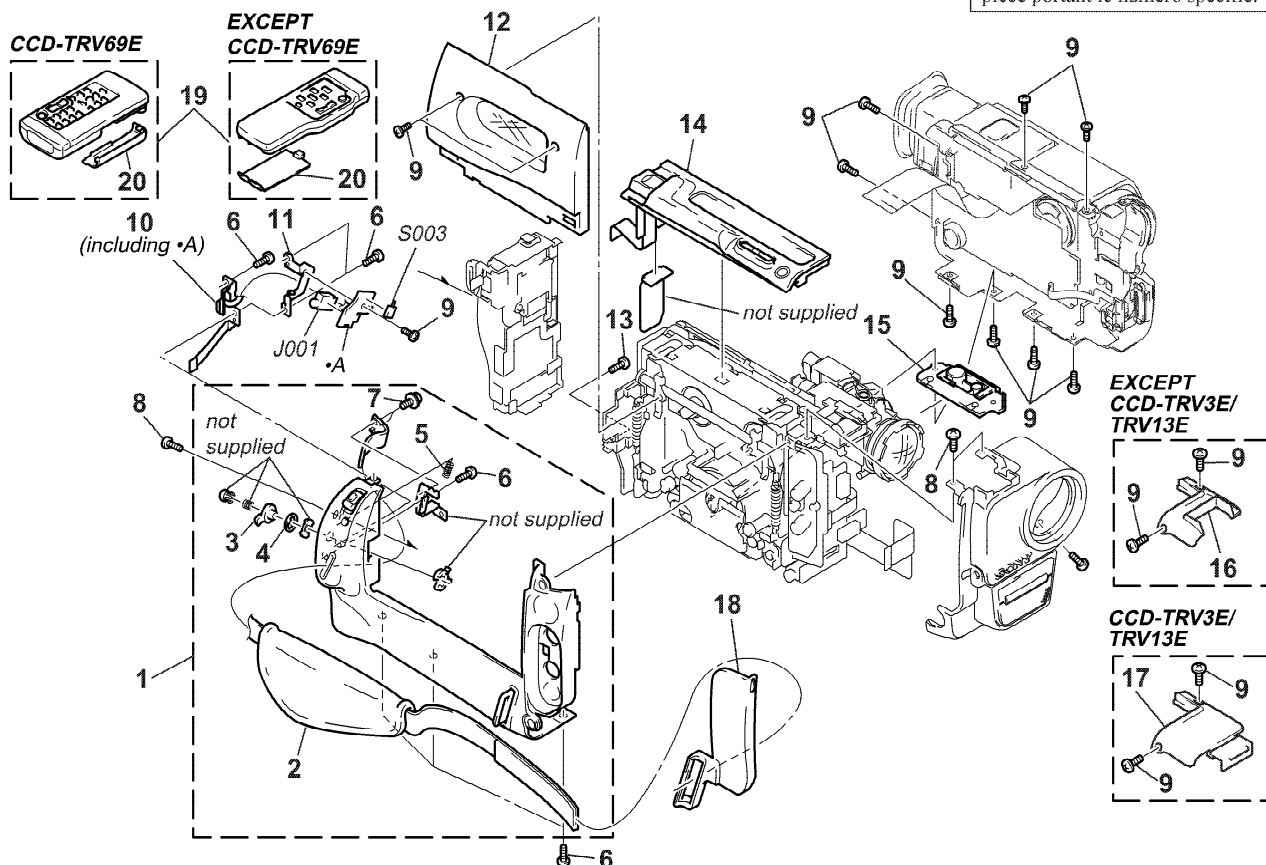


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
1	X-3948-205-1	CABINET (L) ASSY (TRV65E)		13	3-713-786-21	SCREW (M2X3)	
1	X-3948-315-1	CABINET (L) ASSY (TRV75/TRV75PK/TRV715)		14	1-475-617-11	SWITCH BLOCK, CONTROL(FK-8500)	
1	X-3948-207-1	CABINET (L) ASSY				(TRV3E/TRV13E)	
		(TRV3E/TRV13E/TRV23E/TRV69E)		14	1-475-617-31	SWITCH BLOCK, CONTROL (FK-8500)	
1	X-3948-316-1	CABINET (L) ASSY (TRV45E/TRV55E)				(TRV23E/TRV65E/TRV69E)	
2	3-969-339-31	BELT, GRIP		14	1-475-618-21	SWITCH BLOCK, CONTROL(FK-8500)	
						(TRV45E/TRV55E)	
3	3-969-081-01	KNOB, STAND-BY		14	1-475-618-41	SWITCH BLOCK, CONTROL(FK-8500)	
4	3-970-854-01	SPRING, STAND-BY				(TRV75/TRV75PK/TRV715)	
5	3-302-492-00	SPRING, COMPRESSION		15	3-987-717-01	SCREW, TRIPOD	
6	3-948-339-61	TAPPING		16	3-987-639-11	CABINET (S) (878)	
7	3-679-362-11	SCREW				(TRV45E/TRV55E/TRV75/TRV75PK/TRV715)	
8	3-962-826-01	SCREW (2X4)		16	3-987-639-01	CABINET (S) (870))	
9	3-968-729-01	SCREW (M2), LOCK ACE, P2				(TRV23E/TRV65E/TRV69E)	
10	1-475-619-21	SWITCH BLOCK, CONTROL(SS-8500)(TRV55E)		17	3-987-645-01	CABINET (N)(TRV3E/TRV13E)	
10	1-475-619-11	SWITCH BLOCK, CONTROL(SS-8500)		18	3-975-522-01	COVER, JACK	
		(EXCEPT TRV55E)		19	1-467-574-21	REMOTE COMMANDER (RMT-708)	
* 11	3-975-532-01	HOLDER, EL				(EXCEPT TRV69E)	
12	X-3947-199-1	LID ASSY, CASSETTE (TRV75:US,CND/TRV715)		19	8-917-593-90	REMOTE COMMANDER (RMT-717)(TRV69E)	
12	X-3948-222-1	LID ASSY, CASSETTE (TRV65E/69E)		20	3-958-131-01	LID, BATTERY CASE (for RMT-708)	
12	X-3948-223-1	LID ASSY, CASSETTE (TRV3E/TRV13E/TRV23E)		20	3-742-854-01	LID, BATTERY CASE (for RMT-717)	
12	X-3948-329-1	LID ASSY, CASSETTE (TRV45E/TRV55E)		J001	1-565-276-31	JACK, ULTRA SMALL 1P (LANC)	
12	X-3948-331-1	LID ASSY, CASSETTE (TRV75:E,JE/TRV75PK)		S003	1-572-688-11	SWITCH, PUSH (1 KEY) (EJECT)	

6-1-2. FRONT PANEL BLOCK ASSEMBLY

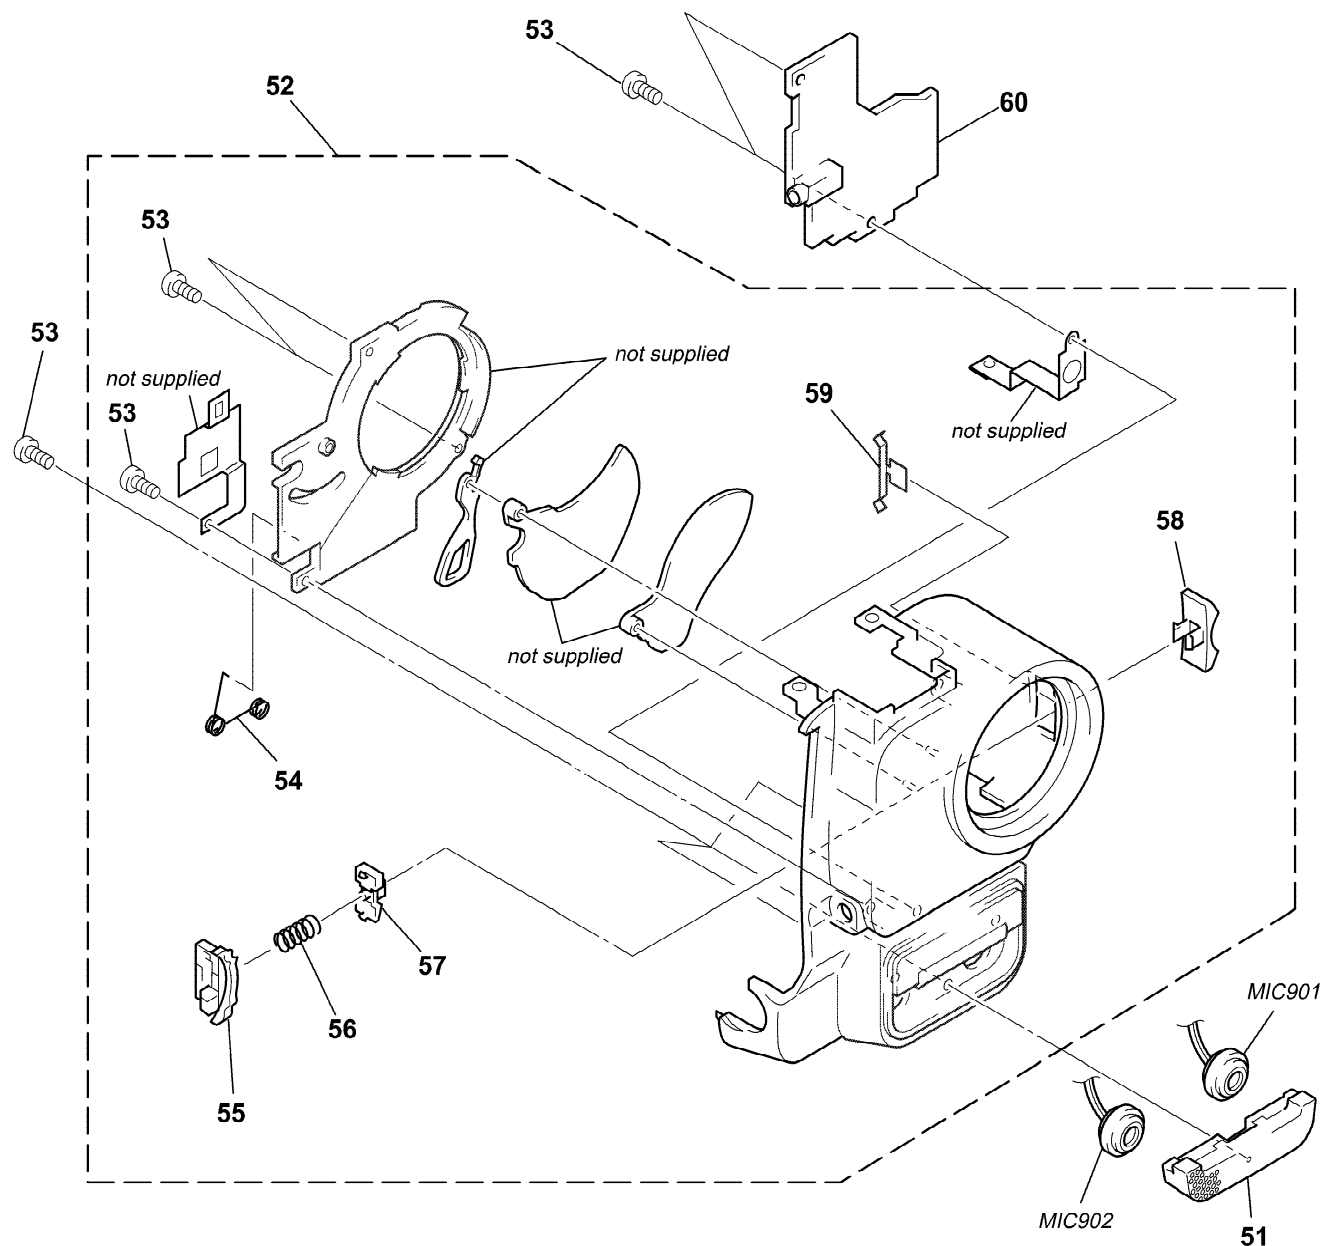


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	X-3948-170-1	GRILLE (870) ASSY, MICROPHONE		58	3-987-631-02	KNOB, P (TRV3E/TRV13E/TRV23E:E2/ TRV45E:E1,HK/TRV65E:AEP,UK/TRV69E/TRV75:E/TRV715)	
52	X-3948-189-1	PANEL (870) ASSY, FRONT (TRV3E/TRV13E)		59	3-987-642-01	SPRING, CLICK	
52	X-3948-198-1	PANEL (870) ASSY, FRONT (TRV23E)		60	A-7073-476-A	MA-331(VZL) BOARD, COMPLETE (TRV3E/TRV13E)	
52	X-3948-197-1	PANEL (870) ASSY, FRONT (TRV69E)		60	A-7073-478-A	MA-331(VHO) BOARD, COMPLETE (TRV45E/TRV55E)	
52	X-3948-200-1	PANEL (870) ASSY, FRONT (TRV65E)		60	A-7073-430-A	MA-312(VHI) BOARD, COMPLETE (TRV75/TRV75PK/TRV715)	
52	X-3948-203-1	PANEL (887) ASSY, FRONT (TRV45E/TRV55E)		60	A-7073-501-A	MA-331(VHO) BOARD, COMPLETE (TRV65E)	
52	X-3948-275-1	PANEL (887) ASSY, FRONT (TRV75/TRV75PK/TRV715)		60	A-7073-451-A	MA-331(VMM0) BOARD, COMPLETE (TRV23E/TRV69E)	
53	3-948-339-61	TAPPING		MIC901	1-542-312-11	MICROPHONE (L-CH)	
54	3-987-882-01	SPRING, TORSION		MIC902	1-542-312-11	MICROPHONE (R-CH)	
55	3-987-632-01	HOLDER, P KNOB				(EXCEPT TRV3E/TRV13E/TRV23E)	
56	3-973-619-01	SPRING, COMPRESSION					
57	3-987-633-01	BUTTON, LOCK					
58	3-987-631-01	KNOB, P(TRV23E:E1,HK,AUS/TRV45E:AUS,E2/ TRV55E/TRV65E:AEP,EE,NE,RU/TRV75:HK,US,CND/TRV75PK)					

6-1-3. CABINET (R) BLOCK ASSEMBLY (TRV45E/TRV55E/TRV75/TRV75PK/TRV715)

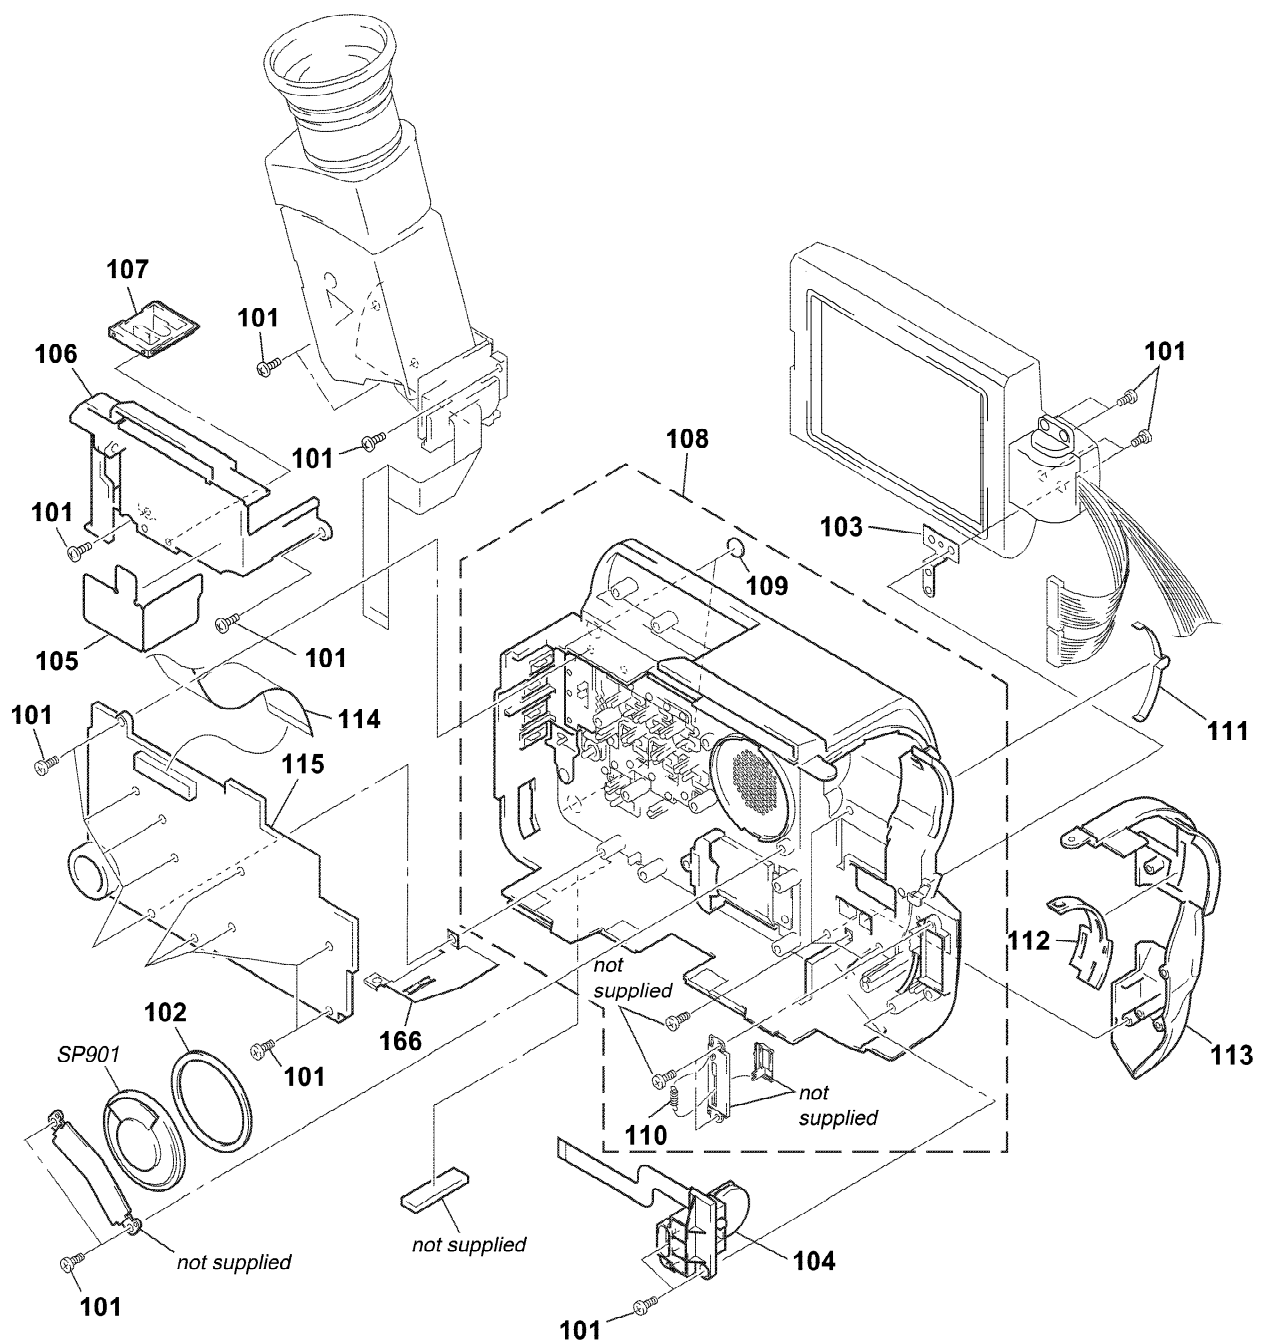


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	3-948-339-61	TAPPING		109	3-959-978-02	CUSHION, PANEL	
102	3-965-367-01	SPACER, SP		110	3-989-121-01	SPRING, TENSION	
103	3-987-769-01	PLATE, HINGE GROUND		111	3-987-739-01	SPRING, LINK PLATE	
104	1-475-621-11	SWITCH BLOCK, CONTROL(MR-8500)		112	3-987-744-01	KNOB, IR	
* 105	3-987-842-01	SHEET, VF FLEXIBLE RETAINE		113	3-987-764-01	COVER, IR	
106	3-987-792-01	BASE (887), VF		114	1-783-240-11	CABLE, FLEXIBLE FLAT (FFC-236)	
107	3-987-783-01	LOCK, TILT		115	A-7073-431-A	CF-51(VH) BOARD, COMPLETE	(TRV45E/TRV75/TRV75PK/TRV715)
108	X-3948-267-1	CABINET (R) (887) ASSY		115	A-7073-479-A	CF-51(VMR) BOARD, COMPLETE	(TRV55E)
108	X-3948-268-1	CABINET (R) (883) ASSY		116	3-987-770-01	PLATE (887), GROUND	
		(TRV45E/TRV75:E/TRV75PK)		SP901	1-504-753-21	SPEAKER (2.8CM)	
108	X-3948-269-1	CABINET (R) (886) ASSY (TRV55E)					

6-1-4. CABINET (R) BLOCK ASSEMBLY (TRV3E/TRV13E/TRV23E/TRV65E/TRV69E)

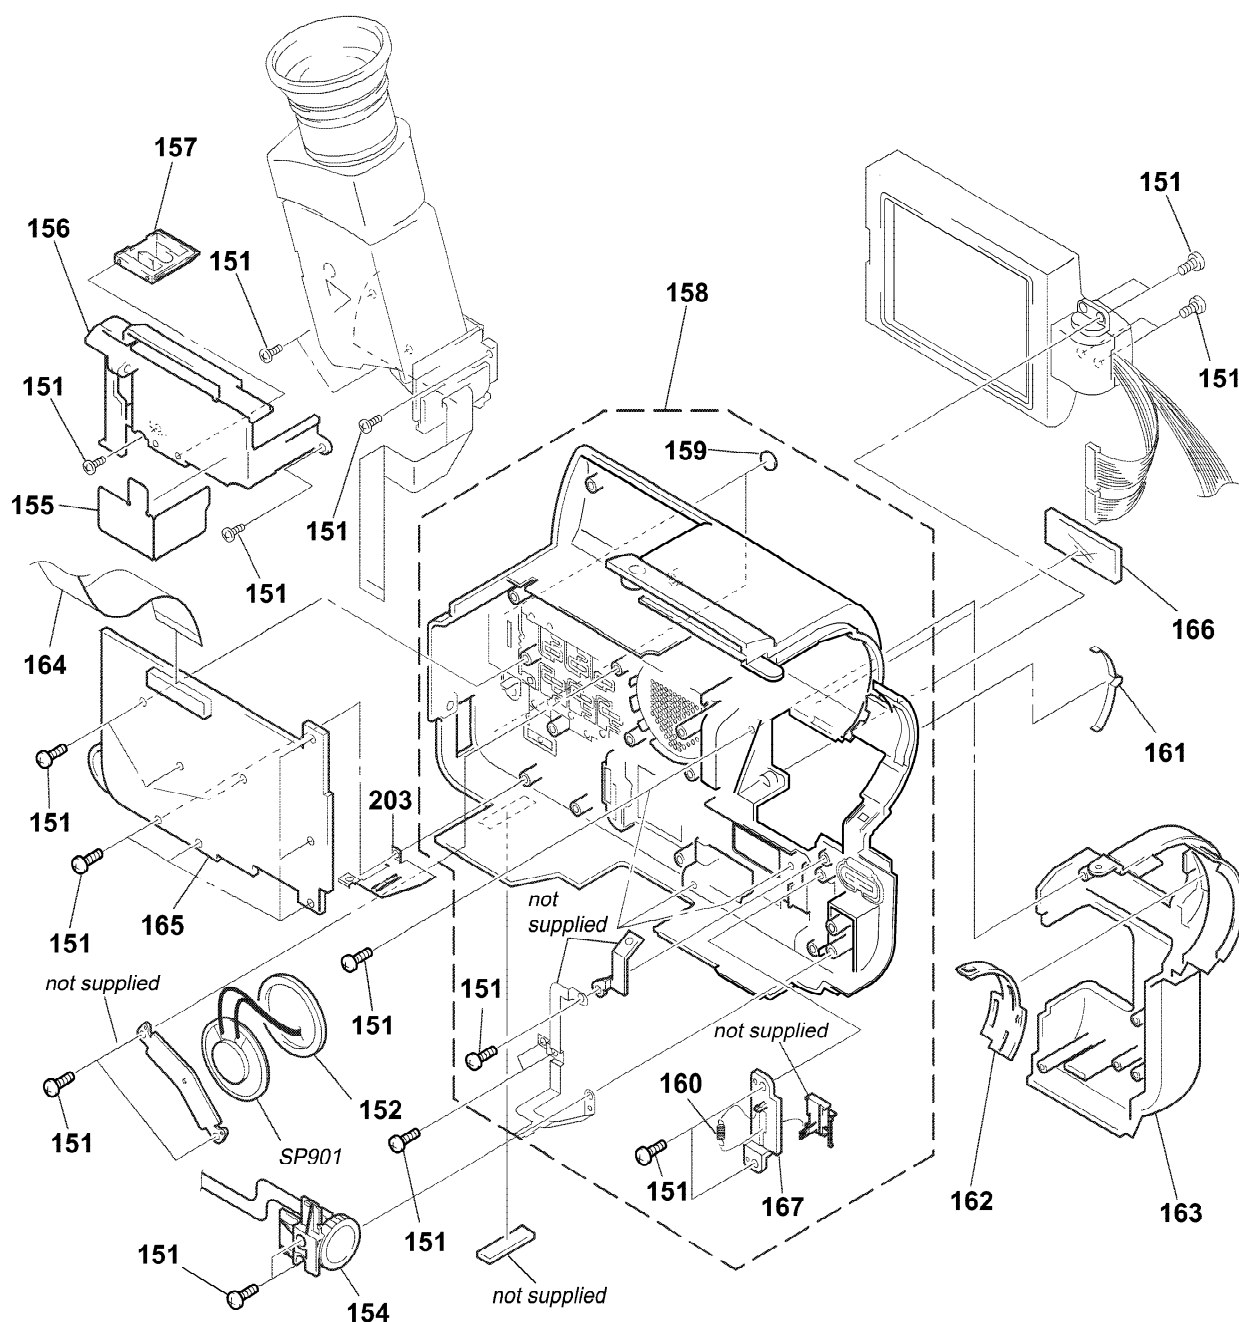

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
151	3-948-339-61	TAPPING		160	3-987-742-01	SPRING, TENSION	
152	3-965-367-01	SPACER, SP		161	3-987-739-01	SPRING, LINK PLATE (TRV23E/TRV65E/TRV69E)	
153	3-987-742-01	PLATE(878), GROUND		162	3-987-744-01	KNOB, IR (TRV23E/TRV65E/TRV69E)	
154	1-475-620-11	SWITCH BLOCK, CONTROL(MF-8500)		163	3-987-730-01	COVER, IR (TRV65E)	
* 155	3-987-842-01	SHEET, VF FLEXIBLE RETAINER		163	3-987-730-41	COVER, IR (TRV3E/TRV13E)	
156	3-987-786-01	BASE (878),VF (TRV13E/TRV23E)		163	3-987-730-21	COVER, IR (TRV23E)	
156	X-3948-603-1	BASE, VF ASSY (TRV3E/TRV65E/TRV69E)		163	3-987-730-31	COVER, IR (TRV69E)	
157	3-987-783-01	LOCK, TILT		164	1-783-240-11	CABLE, FLEXIBLE FLAT (FFC-236)	
158	X-3948-239-1	CABINET (R) (878) ASSY (TRV65E:AEP,UK,CN)		165	A-7073-403-A	CF-50(E7V) BOARD, COMPLETE	(TRV3E/TRV13E)
158	X-3948-243-1	CABINET (R) (8451) ASSY (TRV13E:AEP,UK)		165	A-7073-412-A	CF-50(ESV) BOARD, COMPLETE	(TRV23E/TRV65E/TRV69E)
158	X-3948-241-1	CABINET (R) (872) ASSY (TRV69E)		166	3-987-729-01	PLATE, ORNAMENTAL (TRV65E)	
158	X-3948-242-1	CABINET (R) (871) ASSY (TRV23E)		166	3-987-729-11	PLATE, ORNAMENTAL (TRV3E/TRV13E/TRV23E)	
158	X-3948-244-1	CABINET (R) (877) ASSY (TRV65E:EE,NE,RU)		166	3-987-729-41	PLATE, ORNAMENTAL (TRV69E)	
158	X-3948-245-1	CABINET (R) (877) ASSY (TRV13E:EE,NE,RU)		167	3-987-736-01	LID,MK	
158	X-3948-484-1	CABINET (R) (8451E) ASSY (TRV3E)		SP901	1-505-291-11	SPEAKER (DIA 2.8CM)	
159	3-959-978-02	CUSHION,PANEL (EXCEPT TRV65E:EE,NE,RU,CN)					


6-1-5. LCD BLOCK ASSEMBLY(3/3.5INCH) (TRV45E/TRV55E/TRV75/TRV75PK/TRV715)

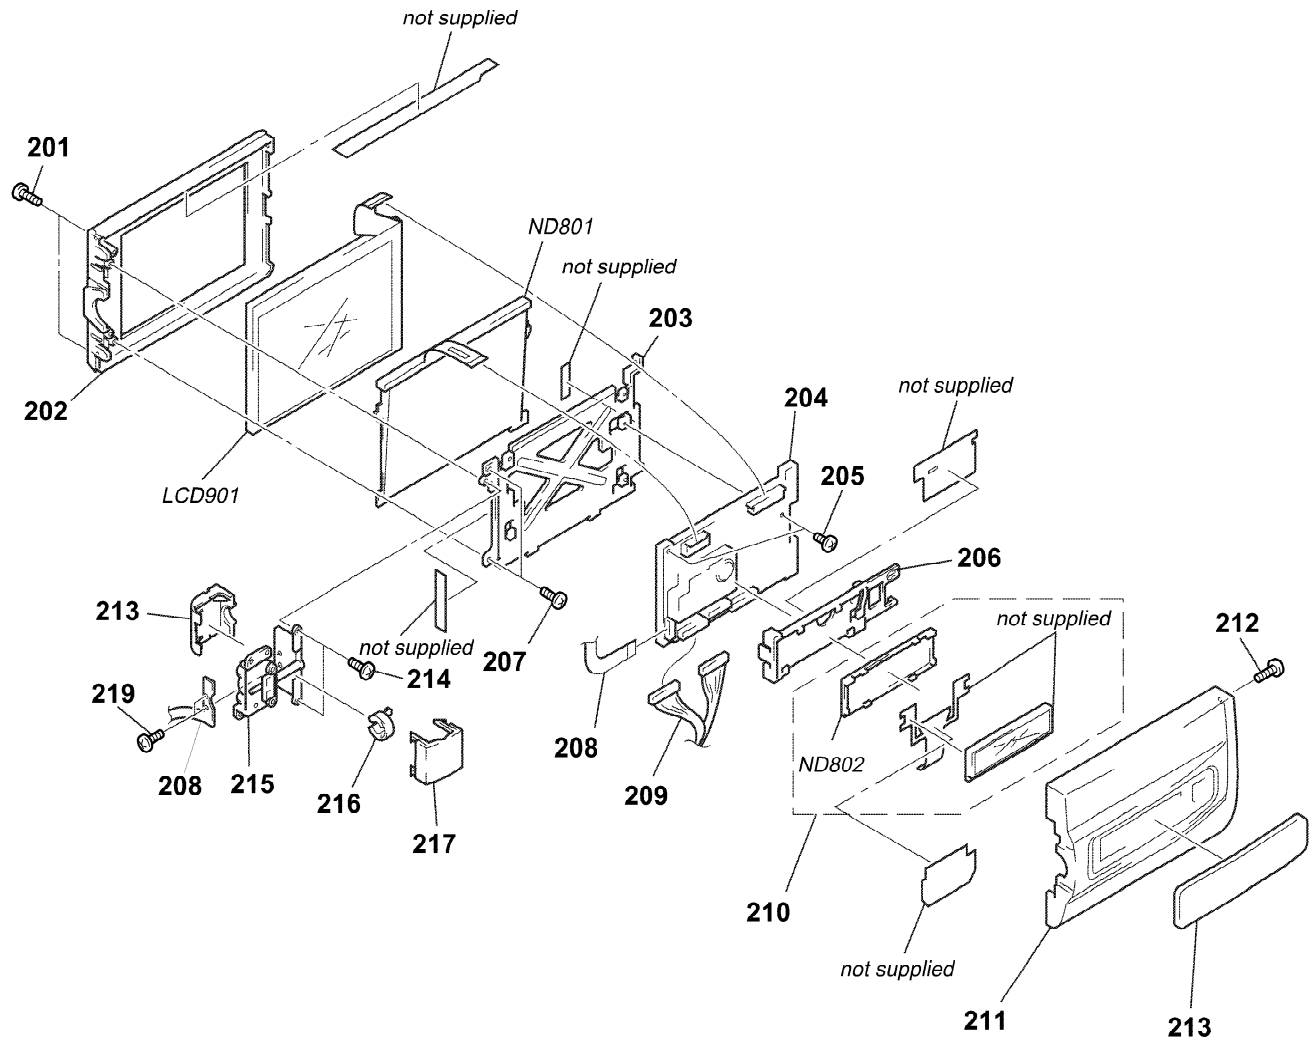

The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque $\triangle$ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.
--	--

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
201	3-948-339-11	SCREW, TAPPING		213	3-987-601-31	WINDOW (885), LCD (TRV55E)	
202	3-987-593-01	CABINET (M) (885), P (TRV45E/TRV55E)		213	3-987-601-41	WINDOW (885), LCD (TRV45E)	
202	3-987-593-11	CABINET (M) (885), P (TRV75/TRV75PK/TRV715)		214	3-948-339-01	SCREW, TAPPING	
203	3-987-594-01	FRAME (885), PANEL		215	X-3948-169-1	HINGE ASSY	
204	A-7073-480-A	PD-93(SP3.5) BOARD, COMPLETE (TRV45E/TRV55E)		216	3-987-623-01	CLAMP, HARNESS	
204	A-7073-457-A	PD-93(SN3) BOARD, COMPLETE (TRV75/TRV75PK/TRV715)		217	3-987-626-01	COVER (C) (885), HINGE	
205	3-713-786-21	SCREW (M2X3)		218	3-987-625-11	COVER (M), HINGE	
206	3-987-597-01	HOLDER (885), LCD		219	4-981-286-01	SCREW(M1.7x2), IB LOCK	
207	3-948-339-61	TAPPING		LCD901	1-803-038-21	INDICATOR MODULE, LIQUID CRYST (TRV45E/TRV55E)	
208	1-668-963-41	FP-642 FLEXIBLE BOARD		LCD901	1-803-037-21	INDICATOR MODULE, LIQUID CRYST (TRV75/TRV75PK/TRV715)	
209	1-958-332-11	HARNESS (DP-71)		$\triangle$ ND801	1-517-753-11	TUBE, FLUORESCENT,COLD CATHODE (TRV75/TRV75PK/TRV715)	
210	A-7093-486-A	INDICATION LCD BLOCK ASSY		$\triangle$ ND801	1-517-754-11	TUBE, FLUORESCENT,COLD CATHODE (TRV45E/TRV55E)	
211	X-3948-165-1	CABINET (C) (885) H ASSY, P		$\triangle$ ND802	1-517-759-11	LIGHT, BACK	
212	3-962-826-01	SCREW (2X4)					
213	3-987-601-21	WINDOW (885), LCD (TRV75/TRV75PK/TRV715)					

6-1-6. LCD BLOCK ASSEMBLY (2.5INCH)(TRV3E/TRV13E/TRV23E/TRV65E/TRV69E)

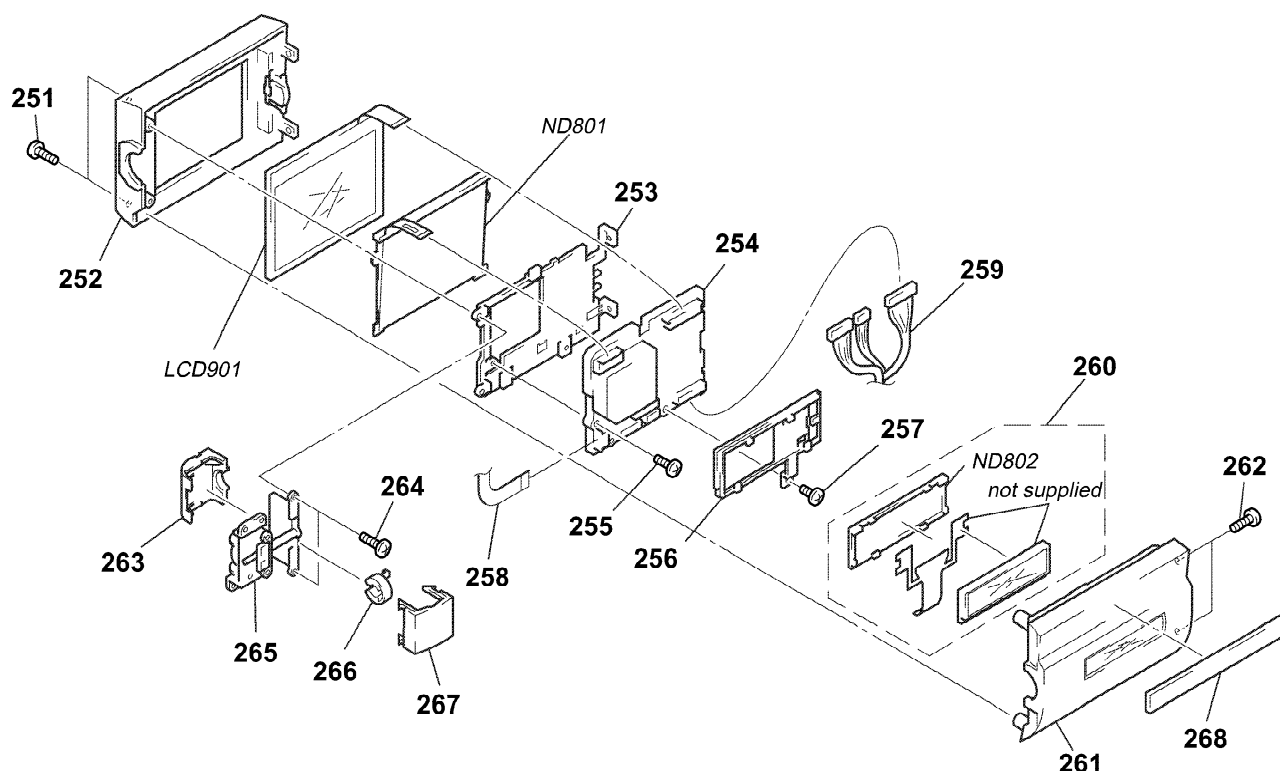


The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque $\triangle$ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
251	3-948-339-11	SCREW, TAPPING		262	3-962-826-01	SCREW(2X4)	
252	X-3948-162-1	CABINET (M) (870) ASSY, P		263	3-987-625-01	COVER (M), HINGE	
253	3-987-582-01	FRAME (870), PANEL		264	3-948-339-01	SCREW, TAPPING	
254	A-7073-502-A	PD-92(SP8) BOARD, COMPLETE (TRV65E)		265	X-3948-169-1	HINGE ASSY	
254	A-7073-452-A	PD-92(SP6) BOARD, COMPLETE (TRV23E/TRV69E)		266	3-987-623-01	CLAMP, HARNESS	
254	A-7073-460-A	PD-92(CP6) BOARD, COMPLETE (TRV3E/TRV13E)		267	3-987-624-01	COVER (C) (870), HINGE (TRV65E/TRV69E)	
255	3-713-786-21	SCREW (M2X3)		267	3-987-624-11	COVER (C) (870), HINGE (TRV23E)	
256	3-987-584-01	HOLDER (870), LCD (TRV23E:E1,HK,AUS,CN/TRV65E/TRV69E)		267	3-987-624-21	COVER (C) (870), HINGE (TRV3E/TRV13E)	
256	3-987-584-11	HOLDER (870), LCD (TRV3E/TRV13E/TRV23E:E2)		268	3-987-585-61	SHEET, MODEL NAME (TRV23E)	
257	3-948-339-61	TAPPING		268	3-987-585-71	SHEET, MODEL NAME (TRV13E)	
258	1-668-963-41	FP-642 FLEXIBLE BOARD		268	3-987-585-81	SHEET, MODEL NAME (TRV65E)	
259	1-958-379-11	HARNESS (DP-70)		268	3-987-585-91	SHEET, MODEL NAME (TRV3E/TRV69E)	
260	A-7093-473-A	INDICATION LCD BLOCK ASSY (TRV3E/TRV13E)		LCD901	1-803-035-21	INDICATOR MODULE, LIQUID CRYST (TRV23E)	
260	A-7093-509-A	INDICATION LCD BLOCK ASSY (TRV23E)		LCD901	1-803-036-21	INDICATOR MODULE, LIQUID CRYST (TRV65E/TRV69E)	
260	A-7093-486-A	INDICATION LCD BLOCK ASSY (TRV65E/TRV69E)		LCD901	1-803-040-11	INDICATOR MODULE, LIQUID CRYST (TRV3E/TRV13E)	
261	X-3948-158-1	CABINET (C) (870) ASSY, P (TRV65E)		$\triangle$ ND801	1-517-751-11	TUBE, FLUORESCENT,COLD CATHODE (TRV3E/TRV13E)	
261	X-3948-392-1	CABINET (C) (846) ASSY, P (TRV3E/TRV13E)		$\triangle$ ND801	1-517-752-11	TUBE, FLUORESCENT,COLD CATHODE (TRV23E)	
261	X-3948-160-1	CABINET (C) (872) ASSY, P (TRV23E)		$\triangle$ ND801	1-517-752-21	TUBE, FLUORESCENT,COLD CATHODE (TRV65E/TRV69E)	
261	X-3948-161-1	CABINET (C) (878D) ASSY, P (TRV69E)		$\triangle$ ND802	1-517-759-11	LIGHT, BACK	

6-1-7. EVF BLOCK ASSEMBLY (B/W EVF)

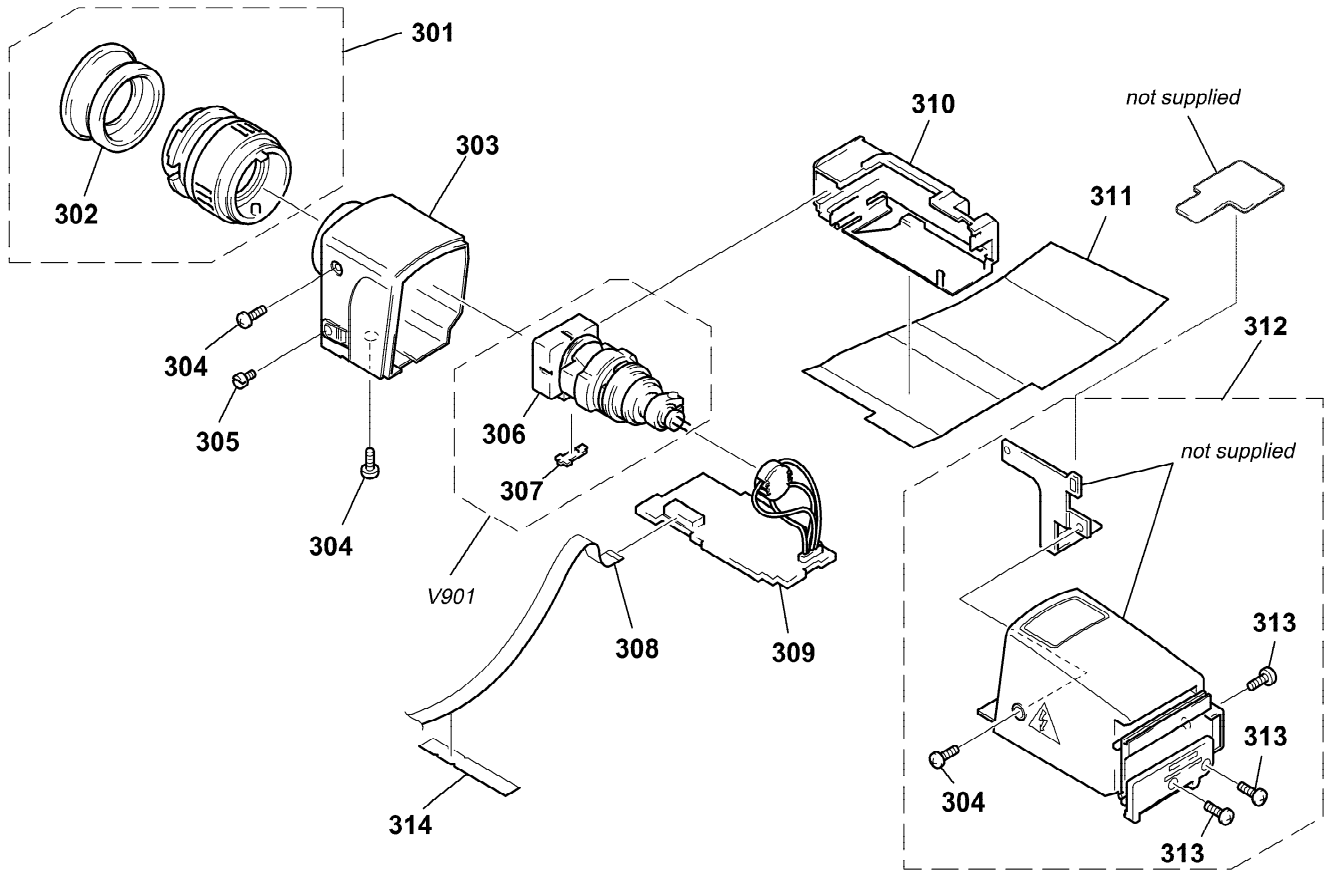


The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.
--	---

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
301	X-3944-966-1	FINDER ASSY		310	X-3948-279-1	HOLDER (878) ASSY, CRT	
302	3-963-391-01	EYE CUP		* 311	3-987-844-01	SHEET, VF (B/W) ELECTROSTATIC	
303	X-3948-278-1	CABINET (REAR) (878) B ASSY (TRV3E/TRV13E/TRV23E/TRV65E/TRV69E)		312	X-3948-277-1	CABINET (FRONT) (878) B ASSY (TRV65E)	
303	X-3948-281-1	CABINET (REAR) (887) B ASSY (TRV45E:AUS,E2/TRV55E/TRV75:US,CND/TRV75PK)		312	X-3948-280-1	CABINET (FRONT) (887) B ASSY (TRV45E:AUS,E2/TRV55E/TRV75:US,CND/TRV75PK)	
303	X-3948-281-2	CABINET (REAR) (887) B ASSY (TRV45E:E1,CN,HK/TRV55E/TRV75:E,JE/TRV715)		312	X-3948-280-2	CABINET (FRONT) (887) B ASSY (TRV45E:E1,CN,HK/TRV75:E,JE)	
304	3-968-729-61	SCREW (M2X3), LOCK ACE, P2		312	X-3948-364-1	CABINET (FRONT) (845) B ASSY (TRV3E/TRV13E)	
305	3-975-898-01	SCREW (T), F LOCK		312	X-3948-363-1	CABINET (FRONT) (872) B ASSY (TRV23ETRV69E)	
306	3-977-292-01	MASK, CRT		312	X-3948-366-1	CABINET (FRONT) (887D) B ASSY (TRV715)	
307	3-725-130-01	COVER, HINGE VOLTAGE		313	3-948-339-61	TAPPING	
308	1-783-241-11	CABLE, FLEXIBLE FLAT (FFC-235)		* 314	3-987-843-01	SHEET, VF FLEXIBLE LOCK	
309	A-7066-774-A	VF-99(863) BOARD, COMPLETE (EXCEPT TRV75/TRV75PK/TRV715)		Δ V901	1-452-673-31	CRT ASSY (M01KXX90WB)	
309	A-7066-792-A	VF-99(VHL4) BOARD, COMPLETE (TRV75/TRV75PK/TRV715)					

6-1-8. MAIN BOARDS ASSEMBLY


Intelligent and Normal accessory shoe model.

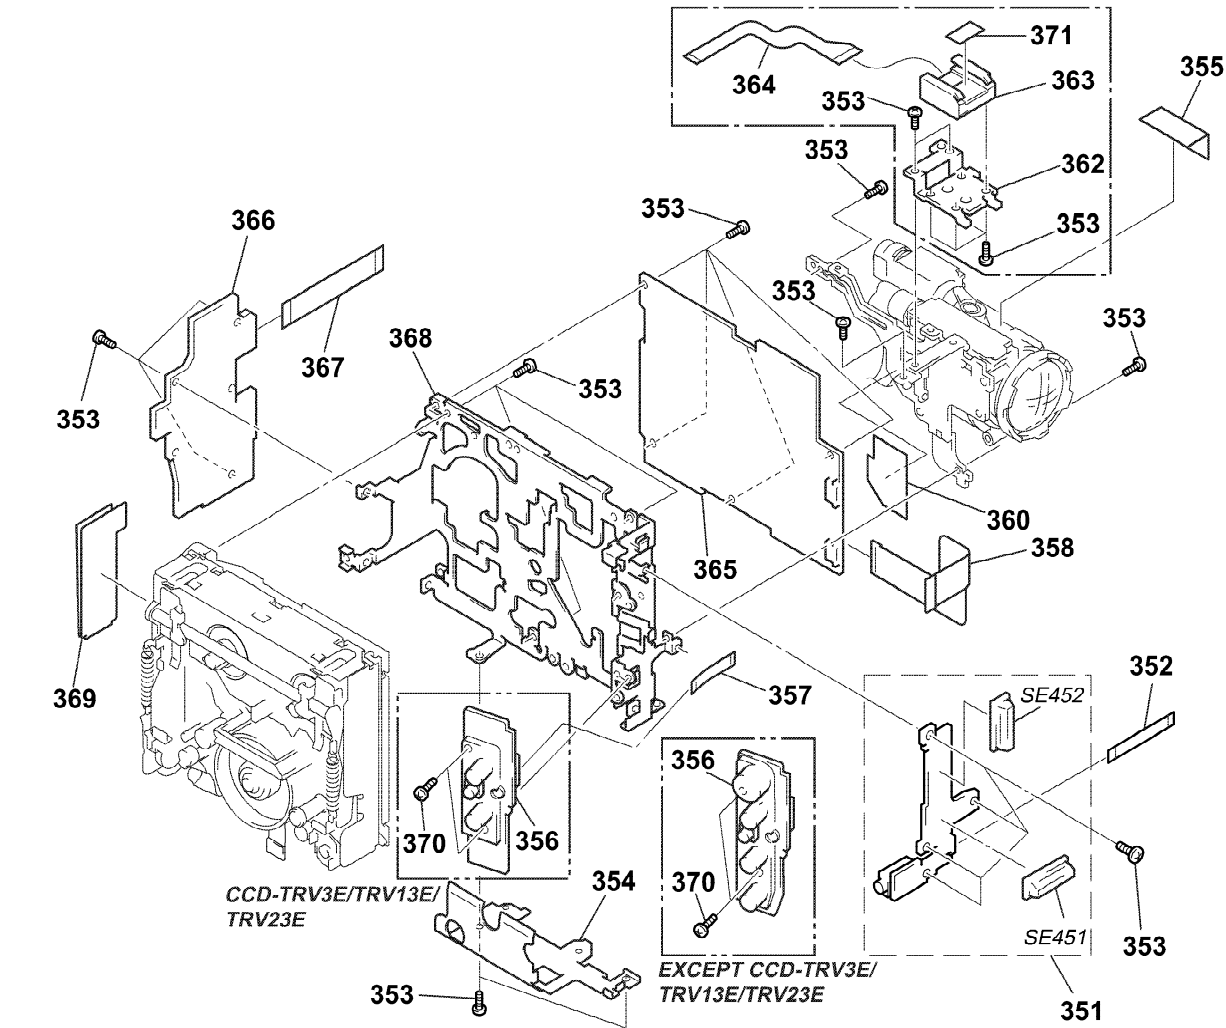

Ref. No.	Part No.	Description	Remark
351	A-7073-404-A	SE-66(V) BOARD, COMPLETE (TRV3E/TRV13E/TRV23E)	
351	A-7073-409-A	SE-66(VH) BOARD, COMPLETE (TRV65E)	
351	A-7073-434-A	SE-67(VH) BOARD, COMPLETE (TRV45E/TRV55E/TRV75/TRV75PK/TRV715)	
351	A-7073-443-A	SE-66(VMM) BOARD, COMPLETE (TRV69E)	
352	1-668-957-11	FP-621 FLEXIBLE BOARD	
353	3-713-786-21	SCREW (M2X3)	
* 354	3-987-675-01	FRAME (B), MD (EXCEPT TRV75/TRV75PK/TRV715)	
354	X-3948-224-1	FRAME (B) ASSY, MD (TRV75/TRV75PK/TRV715)	
* 355	3-989-122-01	SHEET, LENS INSULATING	
356	A-7073-405-A	PJ-83(M) BOARD, COMPLETE (TRV3E/TRV13E/TRV23E)	
356	A-7073-410-A	PJ-83(H) BOARD, COMPLETE (TRV65E/TRV69E)	
356	A-7073-433-A	PJ-84(H) BOARD, COMPLETE (TRV75/TRV75PK/TRV715)	
356	A-7073-477-A	PJ-84(S) BOARD, COMPLETE (TRV45E/TRV55E)	
357	1-668-956-11	FP-620 FLEXIBLE BOARD	
358	1-668-960-11	FP-629 FLEXIBLE BOARD	
* 360	3-987-718-01	PROTECTOR, HS FLEXIBLE (TRV65E/TRV69E)	
362	3-987-719-01	BRACKET, SHOE	
363	1-774-867-31	CONNECTOR, EXTERNAL (HOT SHOE) 8P (EXCEPT TRV3E/TRV13E/TRV23E)	

Ref. No.	Part No.	Description	Remark
363	X-3946-197-1	SHOE ASSY (TRV23E)	
364	1-668-978-11	FP-633 FLEXIBLE BOARD (EXCEPT TRV3E/TRV13E/TRV23E)	
365	A-7093-449-A	VC-195(VH10U) BOARD, COMPLETE (TRV75/TRV75PK/TRV715)	
365	A-7093-461-A	VC-195(VMOP) BOARD, COMPLETE (TRV45E)	
365	A-7093-453-A	VC-195(VHOE) BOARD, COMPLETE (TRV65E)	
365	A-7093-732-A	VC-195(VMMOP) BOARD, COMPLETE (TRV69E)	
365	A-7093-456-A	VC-195(VZOP) BOARD, COMPLETE (TRV3E/TRV13E/TRV23E)	
365	A-7093-460-A	VC-195(VMROP) BOARD, COMPLETE (TRV55E)	
366	A-7073-408-A	DD-105(VHIF) BOARD, COMPLETE (TRV75:US,CND/TRV715)	
366	A-7073-416-A	DD-105(VMMI) BOARD, COMPLETE (TRV3E/TRV13E/TRV23E)	
366	A-7073-481-A	DD-105(VMMIF) BOARD, COMPLETE (TRV45E/TRV55E/TRV65E/TRV69E/TRV75:E,HK,JE/TRV75PK)	
367	1-668-958-11	FP-622 FLEXIBLE BOARD	
368	3-987-711-01	FRAME (A), MD	
* 369	3-987-716-01	PROTECTOR, LS FLEXIBLE	
370	3-948-339-61	TAPPING	
371	2-532-810-00	CUSHION (TRV65E/TRV69E)	
SE451	1-803-041-11	SENSOR, ANGULAR VELOCITY (YAW) (EXCEPT TRV3E/TRV13E/TRV23E)	
SE452	1-803-041-21	SENSOR, ANGULAR VELOCITY (PITCH) (EXCEPT TRV3E/TRV13E/TRV23E)	


6-1-9. BATTERY PANEL AND CCD BLOCK ASSEMBLY

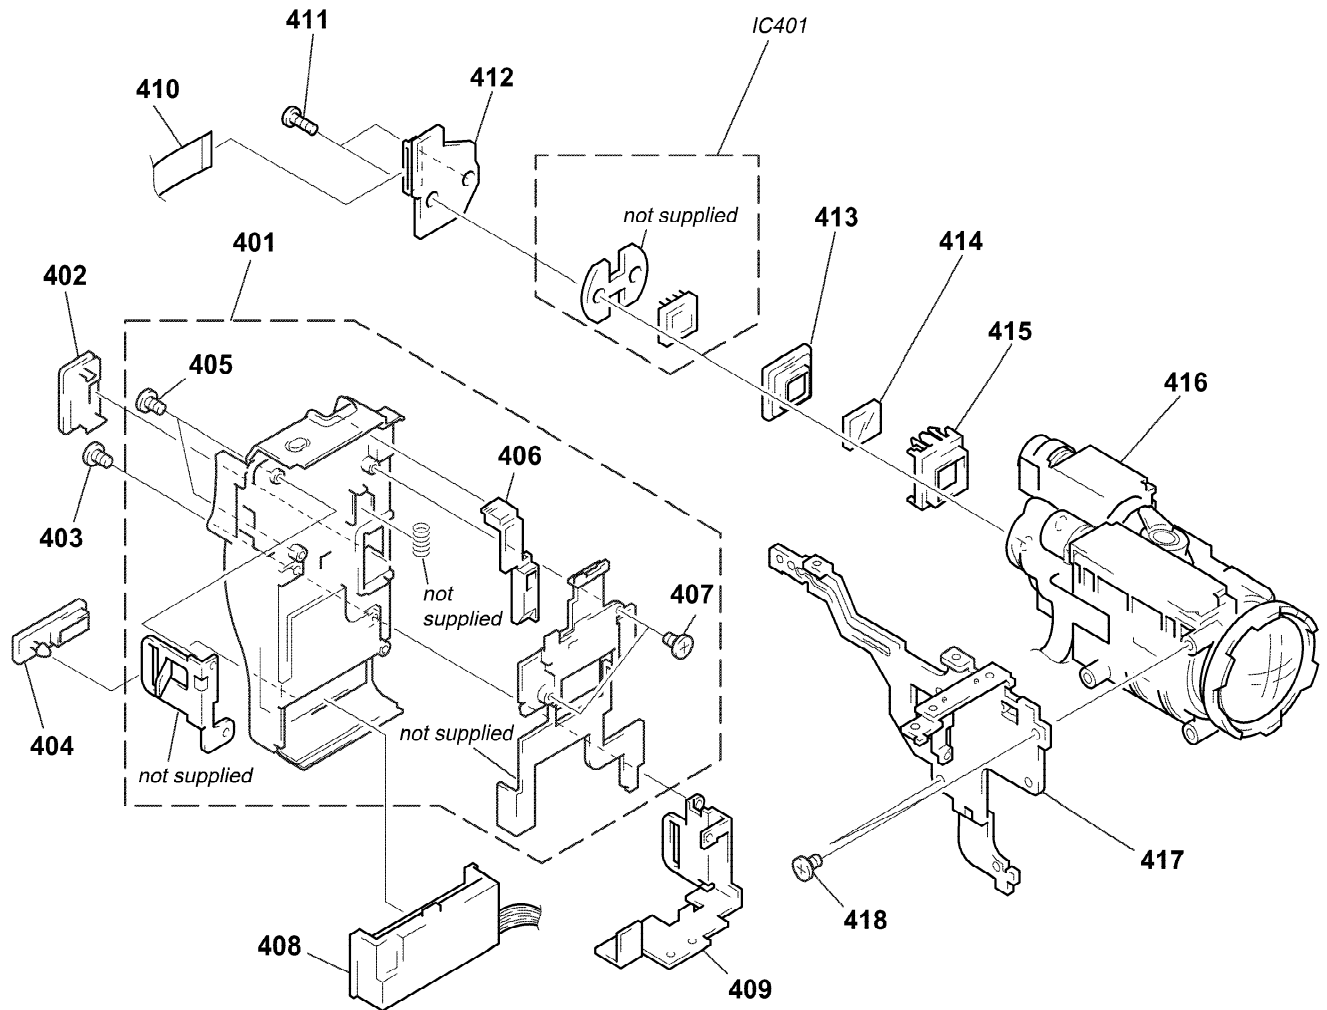

Be sure to read "Note on the CCD imager replacement" on page 4-9 when changing the CCD imager.


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
401	X-3948-171-1	PANEL ASSY, BATTERY (TRV3E/TRV13E/TRV23E/TRV65E/TRV69E)		413	3-953-817-01	RUBBER (F), SEAL (TRV3E/TRV13E/TRV23E)	
401	X-3948-172-1	PANEL ASSY, BATTERY (TRV45E/TRV75/TRV75PK/TRV715)		413	3-968-054-11	RUBBER (FM), SHIELD (EXCEPT TRV3E/TRV13E/TRV23E)	
401	X-3948-173-1	PANEL ASSY, BATTERY (TRV55E)		414	1-758-084-21	FILTER BLOCK, OPTICAL (EXCEPT TRV3E/TRV13E/TRV23E)	
402	3-975-752-01	LID (BT), CPC		414	1-758-133-21	FILTER BLOCK, OPTICAL (TRV3E/TRV13E/TRV23E)	
403	3-962-826-01	SCREW (2X4)		415	3-978-981-11	ADAPTOR (FK), CCD FITTING	
* 404	3-987-683-01	LID, BATTERY		416	8-848-722-01	DEVICE, LENS LSV-600A (SOC) (EXCEPT TRV3E/TRV13E)	
405	3-968-729-61	SCREW (M2X3), LOCK ACE, P2		416	8-848-724-01	DEVICE, LENS LSV-601A (SOC) (TRV3E/TRV13E)	
406	3-987-656-01	LID, JACK		417	3-987-712-01	FRAME, LENS	
407	3-713-791-51	SCREW (M1.7X3.5), TAPPING, P2		418	3-948-339-61	TAPPING	
408	1-694-384-11	TERMINAL BOARD, BATTERY		IC401	A-7030-865-A	CCD BLOCK ASSY (209 SERVIC) (CCD IMAGER) (TRV75/TRV75PK/TRV715)	
409	3-987-679-01	SHEET METAL (LOWER), STRAP		IC401	A-7030-871-A	CCD BLOCK ASSY (211 SERVIC) (CCD IMAGER) (TRV45E/TRV55E/TRV65E/TRV69E)	
410	1-668-959-11	FP-623 FLEXIBLE BOARD		IC401	A-7030-874-A	CCD BLOCK ASSY (207 SERVIC) (CCD IMAGER) (TRV3E/TRV13E/TRV23E)	
411	3-318-203-11	SCREW (B1.7X6), TAPPING					
412	A-7073-407-A	CD-197 BOARD, COMPLETE (TRV3E/TRV13E/TRV23E/TRV65E/TRV69E)					
412	A-7073-435-A	CD-198 BOARD, COMPLETE (TRV45E/TRV55E/TRV75/TRV75PK/TRV715)					

6-1-10. DEVICE LENS (LSV-600A/LSV-601A)

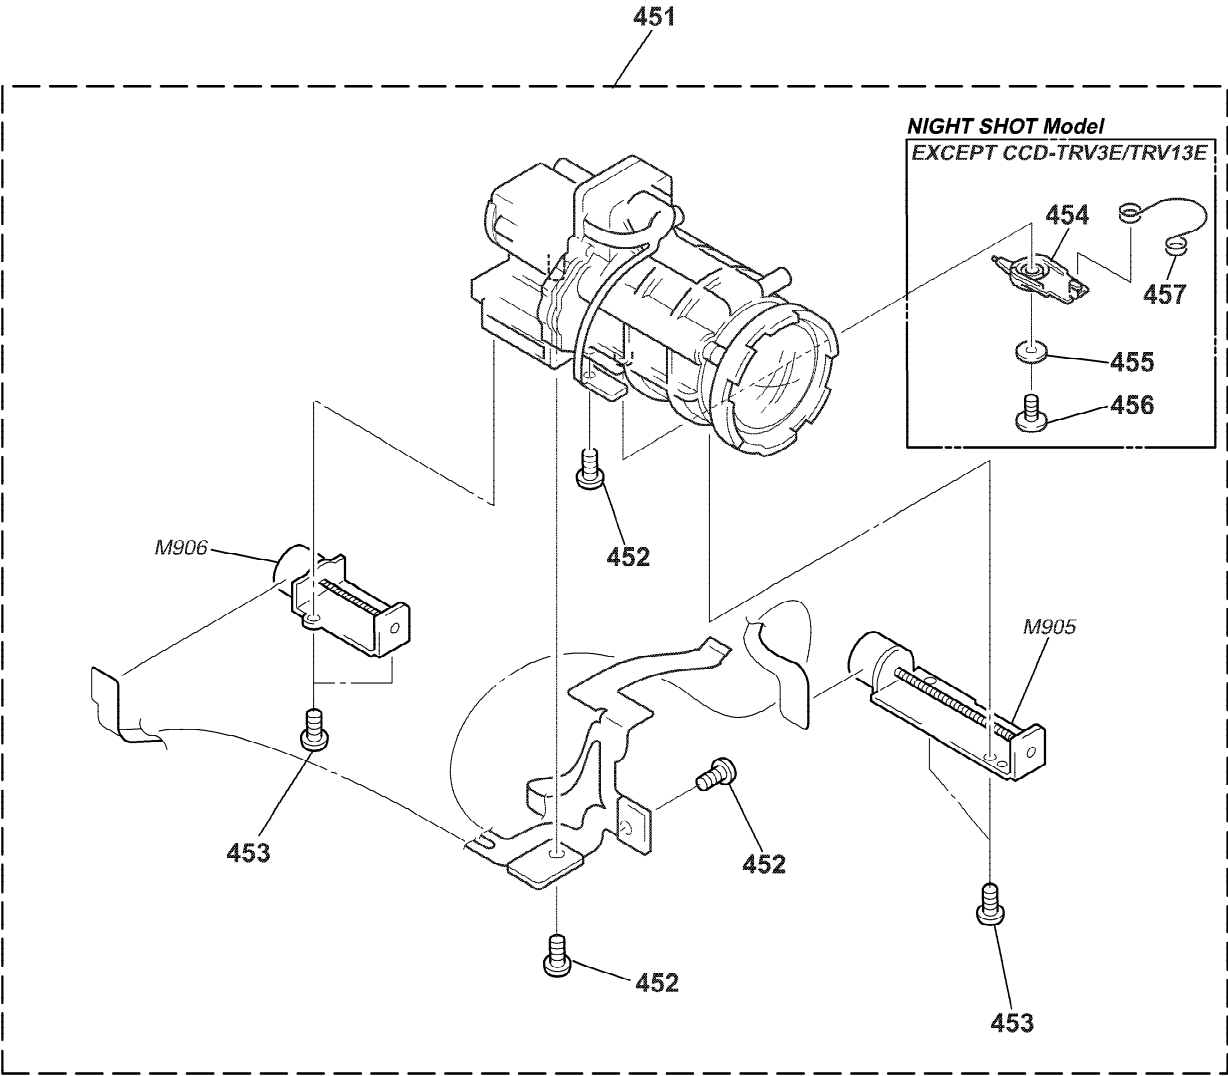


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
451	8-848-722-01	DEVICE, LENS LSV-600A (SOC)(NIGHT SHOT) (EXCEPT TRV3E/TRV13E)		455	2-327-405-01	WASHER	
451	8-848-724-01	DEVICE, LENS LSV-601A (SOC) (TRV3E/TRV13E)		456	3-623-756-21	SCREW (B1.7x5), P	
452	3-713-791-51	SCREW (M1.7X3.5), TAPPING, P2		457	3-979-037-11	SPRING, RETURN	
453	3-713-791-41	SCREW (M1.7X5), TAPPING, PS		M905	1-763-047-11	MOTOR, FOCUS STEPPING	
454	3-979-029-01	LEVER, IR		M906	1-763-046-11	MOTOR, ZOOM STEPPING	

6-1-11. CASSETTE COMPARTMENT ASSEMBLY

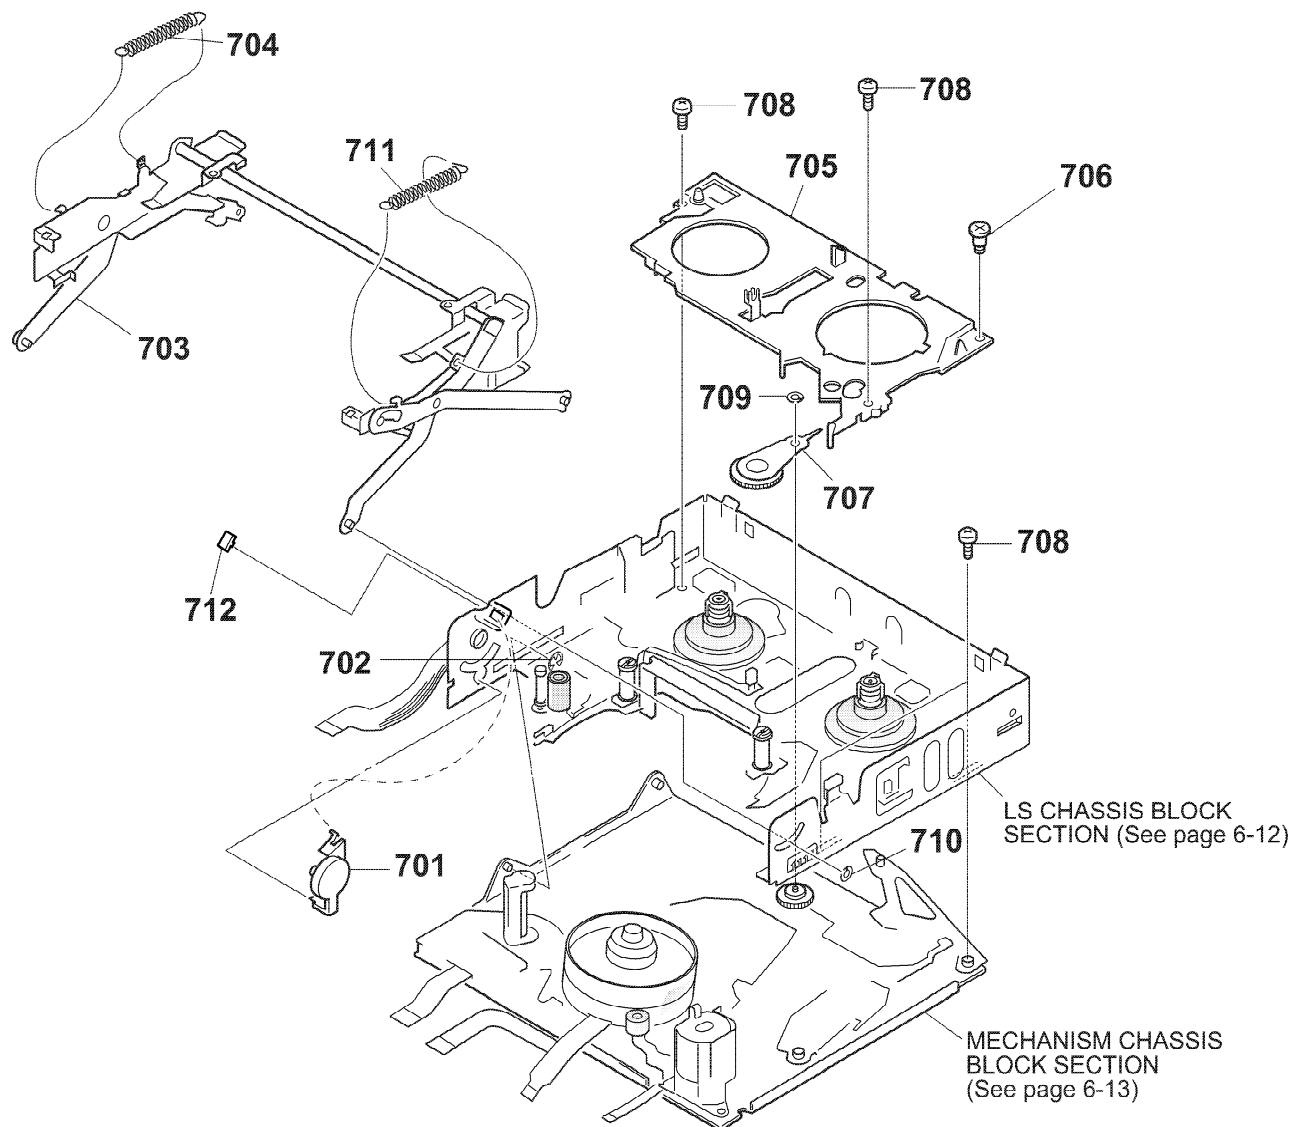


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
701	A-7040-421-A	DAMPER ASSY		707	X-3945-399-1	GEAR ASSY, GOOSENECK	
702	7-624-102-04	STOP RING 1.5, TYPE -E		708	3-947-503-01	SCREW (M1.4X2.5)	
703	X-3945-400-X	CASSETTE COMPARTMENT ASSY		709	3-331-007-21	WASHER	
704	3-965-587-03	SPRING, TENSION		710	3-727-176-01	WASHER, STOPPER	
705	3-965-584-08	RETAINER, GOOSENECK		711	3-973-268-01	SPRING, TENSION	
706	3-976-055-01	SCREW (M1.4X1)		712	3-971-076-01	FASTENER, D	

6-1-12. LS CHASSIS ASSEMBLY

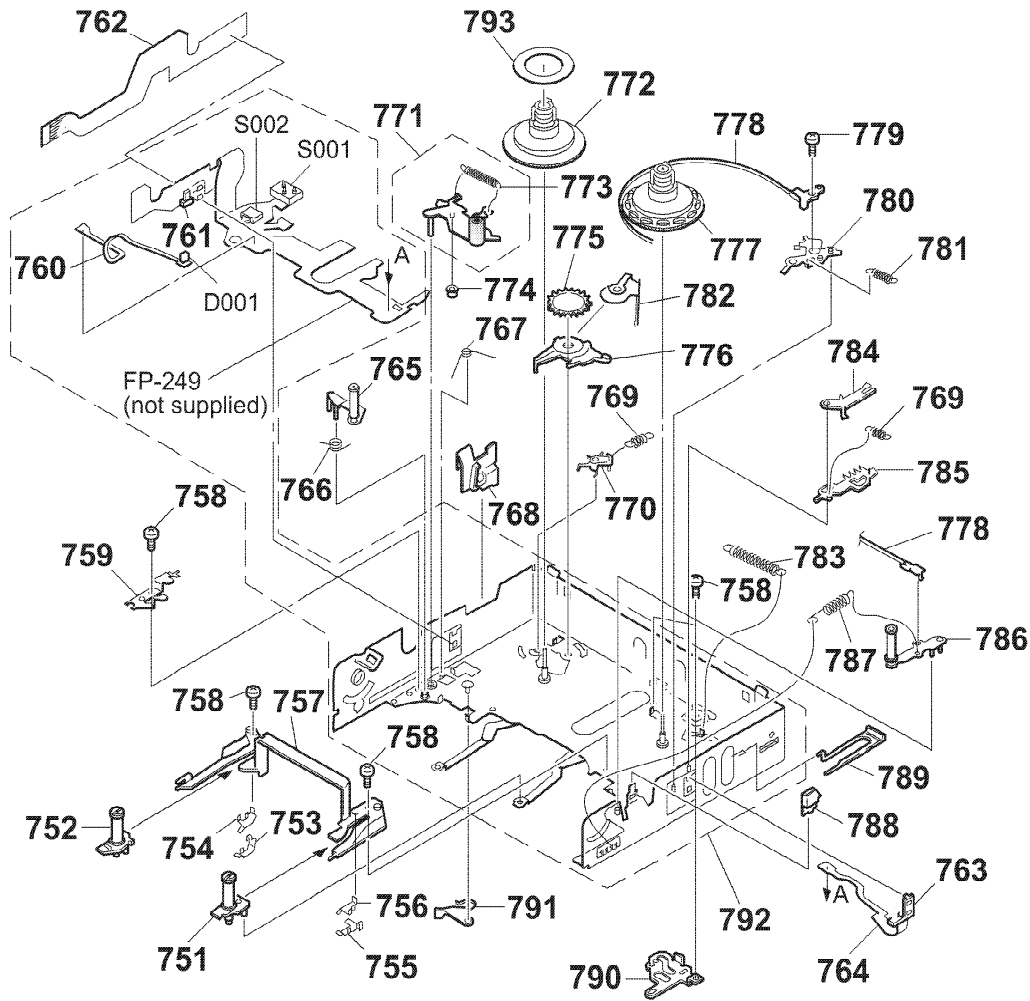

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
751	A-7040-419-A	BASE (S) BLOCK ASSY, GUIDE		775	3-965-563-01	GEAR, T SOFT	
752	A-7040-418-B	BASE (T) BLOCK ASSY, GUIDE		776	3-965-565-01	CLAW, T SOFT	
753	3-965-559-01	STOPPER (T)		777	X-3945-397-1	DECK ASSY, REEL, S	
754	3-965-557-01	STOPPER (T), GB		778	X-3945-396-1	BAND ASSY, TENSION REGULATOR	
755	3-965-558-01	STOPPER (S)		779	3-945-756-01	SCREW (M1.4X3)	
756	3-965-556-01	STOPPER (S), GB		780	3-965-583-01	ARM, RVS	
757	3-965-553-01	RAIL, GUIDE		781	3-965-580-01	SPRING, TENSION	
758	3-947-503-01	SCREW (M1.4X2.5)		782	3-966-384-01	SPRING, T SOFT	
759	3-965-573-01	RETAINER, TG4		783	3-965-578-01	SPRING, TENSION COIL	
760	1-658-213-11	FP-355 FLEXIBLE BOARD		784	3-965-560-01	RATCHET, S	
761	3-965-552-01	HOLDER (T), SENSOR		785	3-965-561-01	PLATE, RELEASE, S RATCHET	
762	1-657-786-13	FP-221 FLEXIBLE BOARD		786	X-3945-395-1	ARM ASSY, TG1	
763	3-965-551-01	HOLDER (S), SENSOR		787	3-965-576-01	SPRING (TG1), TENSION	
764	1-658-214-11	FP-356 FLEXIBLE BOARD		788	3-965-567-01	LID OPEN	
765	A-7040-417-A	ARM BLOCK ASSY, TG4		789	3-965-566-01	COVER, LS GUIDE	
766	3-965-574-01	SPRING, TORSION		* 790	3-965-577-01	PLATE, CAM, LS	
767	3-965-575-01	SPRING (PINCH), TORSION		791	3-965-569-01	ARM, EJ	
768	3-965-568-01	GUIDE, LOCK		792	A-7040-427-A	CHASSIS (S1) ASSY, LS	
769	3-965-562-01	SPRING (RATCHET), TENSION		* 793	3-972-838-01	SPACER, REEL	
770	3-965-581-03	RATCHET, T		D001	8-719-988-42	DIODE GL453	
771	X-3945-394-1	ARM ASSY, PINCH		S001	1-692-614-11	SWITCH, PUSH (3 KEY) (Hi8 MP, ME/MP, REC PROOF)	
772	X-3945-398-2	DECK ASSY, REEL, T		S002	1-572-688-11	SWITCH, PUSH (1 KEY)(C.C. LOCK)	
773	3-965-648-01	SPRING (PINCH), TENSION					
774	3-965-579-01	ROLLER, PINCH PRESS					

6-1-13. MECHANISM CHASSIS ASSEMBLY

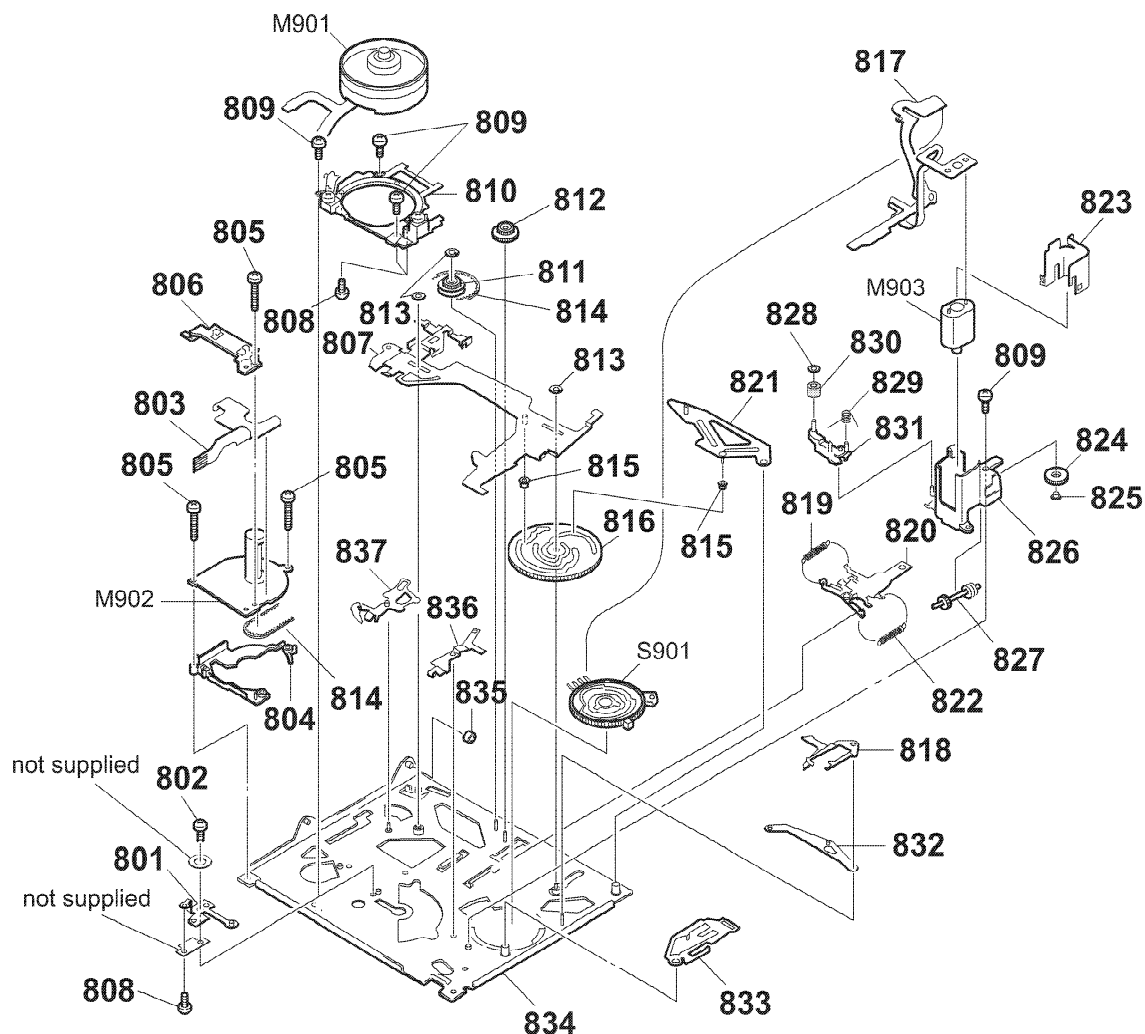

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
801	X-3947-343-1	GROUND (IM) ASSY, SHAFT		823	3-965-542-01	SHIELD, MOTOR	
802	3-965-550-02	SCREW (M1.7X1.6)		824	3-965-539-01	GEAR (A)	
803	1-657-785-11	FP-248 FLEXIBLE BOARD		825	3-965-538-01	SLEEVE, MOTOR HOLDER	
804	3-965-545-01	SPACER, CAPSTAN					
805	3-965-549-01	SCREW (M1.4 X 6.5)		826	3-965-540-01	HOLDER, MOTOR	
806	3-966-349-01	HOLDER, FLEXIBLE		827	3-965-541-01	SHAFT, WORM	
807	3-971-644-01	SLIDER (2), M		828	3-321-393-01	WASHER, STOPPER	
808	3-971-939-01	SCREW (M1.4)		829	3-965-724-01	SPRING, TORSION	
809	3-947-503-01	SCREW (M1.4X2.5)		830	A-7040-423-A	ROLLER BLOCK ASSY, HC	
810	A-7040-416-A	BASE BLOCK ASSY, DRUM					
811	3-965-527-01	GEAR, CHANGE		831	X-3945-407-1	ARM ASSY, HC ROLLER	
812	3-965-544-01	GEAR, RELAY		832	3-965-531-01	ARM, GL	
813	3-331-007-21	WASHER		833	3-965-530-01	PLATE (2), REGULATOR, TENSION	
814	3-965-546-01	BELT, TIMING		834	X-3947-915-2	CHASSIS ASSY, MECHANICAL	
815	3-965-533-01	ROLLER, LS		835	3-965-526-02	ROLLER, LS GUIDE	
816	3-965-528-01	GEAR, CAM					
817	1-657-784-11	FP-220 FLEXIBLE BOARD		836	3-965-547-01	ARM, HC DRIVING	
818	3-965-529-01	PLATE, REGULATOR (LIMITER ARM T), COIL		837	3-965-534-01	PLATE, PRESS, PINCH	
819	3-965-536-01	SPRING (LIMITER ARM T), COIL		M901	A-7048-851-A	DRUM ASSY (DGH-0D5A-R)(PAL) (EXCEPT TRV75/TRV75PK/TRV715)	
820	X-3945-388-1	SLIDER ASSY, GL		M901	A-7048-842-A	DRUM ASSY (DGH-0E1A-R)(NTSC)(5HEAD) (TRV75/TRV75PK/TRV715)	
821	3-965-532-01	ARM, LS					
822	3-965-535-01	SPRING (LIMITER ARM S), COIL		M902	8-835-531-32	CAPSTAN ASSY	
				M903	X-3945-401-1	MOTOR ASSY, DC (LOADING)	
				S901	1-762-436-15	SWITCH, ROTARY (ENCODER)	

6-2. ELECTRICAL PARTS LIST

Note:

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX, -X mean standardized parts, so they may have some difference from the original one.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- RESISTORS
All resistors are in ohms
METAL: Metal-film resistor
METAL OXIDE: Metal Oxide-film resistor
F : nonflammable

- SEMICONDUCTORS
In each case, u: μ , for example:
uA...: μ A..., uPA...: μ PA..., uPB...: μ PB...,
uPC...: μ PC..., uPD...: μ PD...
- CAPACITORS
uF : μ F
- COILS
uH : μ H
- Abbreviation
CND : Canadian Model
EE : East European Model
NE : North European Model
RU : Russian Model
HK : Hong Kong Model
AUS : Australian Model
JE : Tourist Model
CN : Chinese Model

Ref. No.	Part No.	Description	Remark
	A-7073-407-A	CD-197 BOARD, COMPLETE (TRV3E/TRV13E/TRV23E/TRV65E/TRV69E) ***** (Ref. No. 4000 series)	
	A-7073-435-A	CD-198 BOARD, COMPLETE (TRV45E/TRV55E/TRV75/TRV75PK/TRV715) ***** (Ref. No. 9000 series) (IC401 is not including to the mounted board)	
		< CAPACITOR >	
C401	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C405	1-135-210-11	TANTALUM CHIP 4.7uF	20% 10V
C406	1-135-214-21	TANTAL. CHIP 4.7uF	20% 20V
		< CONNECTOR >	
CN401	1-766-346-21	CONNECTOR, FFC/FPC 16P	
		< IC >	
IC401	A-7030-865-A	CCD BLOCK ASSY (209 SERVICE)(CCD IMAGER) (TRV75/TRV75PK/TRV715)	
IC401	A-7030-871-A	CCD BLOCK ASSY (211 SERVICE)(CCD IMAGER) (TRV45E/TRV55E/TRV65E/TRV69E)	
IC401	A-7030-874-A	CCD BLOCK ASSY (207 SERVICE)(CCD IMAGER) (TRV3E/TRV13E/TRV23E)	
		< COIL >	
L401	1-414-757-11	INDUCTOR 100uH	
		< TRANSISTOR >	
Q402	8-729-117-73	TRANSISTOR 2SC4178-F13F14-T1	
		< RESISTOR >	
R404	1-216-829-11	METAL CHIP 4.7K	5% 1/16W
R405	1-216-809-11	METAL CHIP 100	5% 1/16W

Ref. No.	Part No.	Description	Remark
	A-7073-403-A	CF-50(E7V) BOARD, COMPLETE (TRV3E/TRV13E) *****	
	A-7073-412-A	CF-50(ESV) BOARD, COMPLETE (TRV23E/TRV65E/TRV69E) ***** (Ref. No. 4000 series)	
	A-7073-431-A	CF-51(VH) BOARD, COMPLETE (TRV45E/TRV75/TRV75PK/TRV715) *****	
	A-7073-479-A	CF-51(VMR) BOARD, COMPLETE (TRV55E) ***** (Ref. No. 9000 series)	
		< BATTERY HOLDER >	
BH001	1-550-104-11	HOLDER, BATTERY	
		< CONNECTOR >	
CN001	1-778-637-21	CONNECTOR, FFC/FPC (ZIF) 50P	
CN002	1-774-765-11	CONNECTOR, FFC/FPC 8P (EXCEPT TRV3E/TRV13E/TRV23E)	
CN003	1-580-055-21	PIN, CONNECTOR 2P	
CN005	1-779-064-11	PIN, CONNECTOR (PC BOARD) 12P	
CN006	1-778-508-21	PIN, CONNECTOR (PC BOARD) 6P	
* CN008	1-778-283-11	CONNECTOR, FFC/FPC 4P	
		< DIODE >	
D001	8-719-059-57	DIODE MAZJ082DFLSO	
D001	8-719-064-61	DIODE 01BZA8.2(TE85L)	
D005	8-719-420-14	DIODE MA8082-TX	
D006	8-719-420-14	DIODE MA8082-TX	
D008	8-719-404-49	DIODE MA111-TX	
		< TRANSISTOR >	
Q001	8-729-402-42	TRANSISTOR UN5213-TX	
Q003	8-729-230-63	TRANSISTOR 2SD1819A-QRS-TX (EXCEPT TRV3E/TRV13E/TRV23E)	
Q005	8-729-230-72	TRANSISTOR 2SA1362-YG-EL (EXCEPT TRV3E/TRV13E/TRV23E)	
		< RESISTOR >	
R003	1-216-833-11	METAL CHIP 10K	5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)
R005	1-216-833-11	METAL CHIP 10K	5% 1/16W
R006	1-216-833-11	METAL CHIP 10K	5% 1/16W
R007	1-216-833-11	METAL CHIP 10K	5% 1/16W
R008	1-216-833-11	METAL CHIP 10K	5% 1/16W

Be sure to read "Note on the CCD Imager replacement" on page 4-9 when changing the CCD imager.

Ref. No.	Part No.	Description	Remark		
R009	1-216-833-11	METAL CHIP	10K	5%	1/16W
R013	1-216-822-11	METAL CHIP	1.2K	5%	1/16W
R015	1-216-822-11	METAL CHIP	1.2K	5%	1/16W
R016	1-216-822-11	METAL CHIP	1.2K	5%	1/16W
R019	1-216-823-11	METAL CHIP	1.5K	5%	1/16W
R020	1-216-823-11	METAL CHIP	1.5K	5%	1/16W
R022	1-216-823-11	METAL CHIP	1.5K	5%	1/16W
R023	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R025	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R026	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R029	1-216-828-11	METAL CHIP	3.9K	5%	1/16W
R031	1-216-828-11	METAL CHIP	3.9K	5%	1/16W
R032	1-216-828-11	METAL CHIP	3.9K	5%	1/16W
R036	1-216-832-11	METAL CHIP	8.2K	5%	1/16W
R038	1-216-832-11	METAL CHIP	8.2K	5%	1/16W
R039	1-216-838-11	METAL CHIP	27K	5%	1/16W
R041	1-216-838-11	METAL CHIP	27K	5%	1/16W
R049	1-216-849-11	METAL CHIP	220K	5%	1/16W
R050	1-216-853-11	METAL CHIP	470K	5%	1/16W
R051	1-216-837-11	METAL CHIP	22K	5%	1/16W
R052	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
R053	1-216-864-11	METAL CHIP	0	5%	1/16W
< SWITCH >					
S001	1-762-851-21	SWITCH, KEY BOARD (DIGITAL EFFECT) (TRV55E)			
S012	1-771-029-31	SWITCH, TACTILE (EXPOSURE) (EXCEPT TRV3E/TRV13E)			
S003	1-762-851-21	SWITCH, KEY BOARD (DATE)			
S004	1-771-029-21	SWITCH, TACTILE (PROGRAM AE)			
S006	1-762-851-21	SWITCH, KEY BOARD (PICTURE EFFECT)			
S008	1-762-851-21	SWITCH, KEY BOARD (COUNTER RESET)			
S010	1-762-851-21	SWITCH, KEY BOARD (MENU)			
S013	1-762-851-21	SWITCH, KEY BOARD (END SEARCH)			
S015	1-771-025-21	SWITCH, ROTARY (ENCODER)(SEL/PUSH ESEC)			
S017	1-771-029-21	SWITCH, TACTILE (BACK LIGHT)			
S018	1-762-851-21	SWITCH, KEY BOARD (TITLE)			
S021	1-762-851-21	SWITCH, KEY BOARD (TIME)			
S022	1-762-851-21	SWITCH, KEY BOARD (DISPLAY)			
S024	1-762-648-21	SWITCH, SLIDE (START/STOP MODE)			
S027	1-771-029-31	SWITCH, TACTILE (FADER) (TRV45E/TRV55E/TRV75/TRV75PK/TRV715)			
A-7073-408-A DD-105 (VHIF) BOARD, COMPLETE (TRV75:US,CND/TRV715) *****					
A-7073-416-A DD-105(VMMI) BOARD, COMPLETE (TRV3E/TRV13E/TRV23E) *****					
A-7073-481-A DD-105(VHI) BOARD, COMPLETE (TRV45E/TRV55E/TRV65E/TRV69E/TRV75:E,JE/75PK) ***** (Ref. No. 2000 series)					

Ref. No.	Part No.	Description	Remark		
< CAPACITOR >					
C801	1-162-967-11	CERAMIC CHIP	0.0033uF	10%	50V
C802	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
C803	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C804	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C805	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C806	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C807	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C808	1-164-227-11	CERAMIC CHIP	0.022uF	10%	25V
C809	1-162-967-11	CERAMIC CHIP	0.0033uF	10%	50V
C810	1-164-227-11	CERAMIC CHIP	0.022uF	10%	25V
C811	1-162-965-11	CERAMIC CHIP	0.0015uF	10%	50V
C812	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C813	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C814	1-104-913-11	TANTAL. CHIP	10uF	20%	16V
C815	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C816	1-119-751-11	TANTAL. CHIP	22uF	20%	16V
C817	1-113-991-11	TANTAL. CHIP	33uF	20%	16V
C819	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C820	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C821	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C822	1-104-913-11	TANTAL. CHIP	10uF	20%	16V
C823	1-115-566-11	CERAMIC CHIP	4.7uF	10%	10V
C824	1-115-566-11	CERAMIC CHIP	4.7uF	10%	10V
C825	1-115-566-11	CERAMIC CHIP	4.7uF	10%	10V
C826	1-115-566-11	CERAMIC CHIP	4.7uF	10%	10V
C827	1-164-227-11	CERAMIC CHIP	0.022uF	10%	25V
C828	1-162-962-11	CERAMIC CHIP	470PF	10%	50V
C829	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C830	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C831	1-164-489-11	CERAMIC CHIP	0.22uF	10%	16V
C832	1-115-566-11	CERAMIC CHIP	4.7uF	10%	10V
C833	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C834	1-115-566-11	CERAMIC CHIP	4.7uF	10%	10V
C836	1-115-566-11	CERAMIC CHIP	4.7uF	10%	10V
C837	1-115-566-11	CERAMIC CHIP	4.7uF	10%	10V
C838	1-115-566-11	CERAMIC CHIP	4.7uF	10%	10V
C840	1-115-566-11	CERAMIC CHIP	4.7uF	10%	10V
C841	1-135-157-21	TANTALUM CHIP	10uF	20%	6.3V
C843	1-135-157-21	TANTALUM CHIP	10uF	20%	6.3V
C844	1-135-157-21	TANTALUM CHIP	10uF	20%	6.3V
C846	1-135-157-21	TANTALUM CHIP	10uF	20%	6.3V
C847	1-164-506-11	CERAMIC CHIP	4.7uF		16V
C848	1-164-506-11	CERAMIC CHIP	4.7uF		16V
C849	1-135-157-21	TANTALUM CHIP	10uF	20%	6.3V
C850	1-135-157-21	TANTALUM CHIP	10uF	20%	6.3V
C851	1-135-157-21	TANTALUM CHIP	10uF	20%	6.3V
C852	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C853	1-165-319-11	CERAMIC CHIP	0.1uF		50V
C855	1-135-157-21	TANTALUM CHIP	10uF	20%	6.3V
C856	1-109-982-11	CERAMIC CHIP	1uF	10%	10V
(EXCEPT TRV3E/TRV13E/TRV23E)					
C857	1-135-157-21	TANTALUM CHIP	10uF	20%	6.3V
C860	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C861	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
C862	1-164-227-11	CERAMIC CHIP	0.022uF	10%	25V
C863	1-164-227-11	CERAMIC CHIP	0.022uF	10%	25V

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C864	1-113-985-11	TANTAL. CHIP 10uF 20%	20V			< IC >	
C865	1-164-505-11	CERAMIC CHIP 2.2uF	16V	IC801	8-759-384-78	IC SN104241PM-TEB	
C866	1-164-505-11	CERAMIC CHIP 2.2uF	16V	IC802	8-759-492-30	IC MB3817PFV-G-BND	
C868	1-135-214-21	TANTAL. CHIP 4.7uF 20%	20V			< COIL >	
C869	1-164-505-11	CERAMIC CHIP 2.2uF	16V				
C871	1-135-157-21	TANTALUM CHIP 10uF 20%	6.3V	L804	1-412-056-11	INDUCTOR CHIP 4.7uH	
C872	1-164-227-11	CERAMIC CHIP 0.022uF 10%	25V	L805	1-424-674-11	INDUCTOR 0uH	
C873	1-164-227-11	CERAMIC CHIP 0.022uF 10%	25V	L806	1-409-532-41	INDUCTOR 0uH	
C875	1-164-489-11	CERAMIC CHIP 0.22uF 10%	16V	L806	1-424-675-11	INDUCTOR 0uH	
C876	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	L807	1-424-674-11	INDUCTOR 0uH	
C877	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V				
		< CONNECTOR >		L808	1-424-674-11	INDUCTOR 0uH	
* CN801	1-580-756-21	PIN, CONNECTOR 7P		L809	1-424-674-11	INDUCTOR 0uH	
CN931	1-691-520-11	CONNECTOR, BOARD TO BOARD 48P		L810	1-414-396-21	INDUCTOR 4.7uH	
CN932	1-766-346-21	CONNECTOR, FFC/FPC 16P		L811	1-414-396-21	INDUCTOR 4.7uH	
CN933	1-778-509-21	PIN, CONNECTOR (PC BOARD) 11P		L812	1-414-396-21	INDUCTOR 4.7uH	
CN934	1-766-673-21	CONNECTOR, FFC/FPC 12P					
CN935	1-764-709-11	CONNECTOR, FFC/FPC (LIF) 10P		L813	1-414-396-21	INDUCTOR 4.7uH	
		< DIODE >		L814	1-414-396-21	INDUCTOR 4.7uH	
D801	8-719-067-36	DIODE MA3ZD1200LS0		L815	1-414-396-21	INDUCTOR 4.7uH	
D802	8-719-067-36	DIODE MA3ZD1200LS0		L817	1-414-396-21	INDUCTOR 4.7uH	
D803	8-719-067-36	DIODE MA3ZD1200LS0		L818	1-414-396-21	INDUCTOR 4.7uH	
D804	8-719-067-36	DIODE MA3ZD1200LS0					
D805	8-719-067-36	DIODE MA3ZD1200LS0		L819	1-414-400-11	INDUCTOR 22uH	
				L820	1-424-674-11	INDUCTOR 0uH	
D806	8-719-027-76	DIODE 1SS357-TPH3				< LINE FILTER >	
D807	8-719-067-36	DIODE MA3ZD1200LS0		LF801	1-411-957-11	FILTER, COMMON MODE	
D809	8-719-027-77	DIODE MA796-TX				< IC LINK >	
D810	8-719-027-76	DIODE 1SS357-TPH3		△ PS801	1-533-760-21	FUSE (SMD) 1.4A (TRV75:US,CND/TRV715)	
D812	8-719-027-76	DIODE 1SS357-TPH3		△ PS801	1-533-761-21	LINK, IC (SMD) 1.4A (EXCEPT TRV75:US,CND/TRV715)	
D813	8-719-420-14	DIODE MA8082-TX		△ PS802	1-533-760-21	FUSE (SMD) 1.4A (TRV75:US,CND/TRV715)	
D814	8-719-420-14	DIODE MA8082-TX		△ PS802	1-533-761-21	LINK, IC (SMD) 1.4A (EXCEPT TRV75:US,CND/TRV715)	
D815	8-719-420-14	DIODE MA8082-TX		△ PS803	1-533-760-21	FUSE (SMD) 1.4A (TRV75:US,CND/TRV715)	
D816	8-719-027-76	DIODE 1SS357-TPH3		△ PS803	1-533-761-21	LINK, IC (SMD) 1.4A (EXCEPT TRV75:US,CND/TRV715)	
D817	8-719-421-27	DIODE MA728-TX		△ PS804	1-533-760-21	FUSE (SMD) 1.4A (TRV75:US,CND/TRV715)	
D818	8-719-027-76	DIODE 1SS357-TPH3		△ PS804	1-533-761-21	LINK, IC (SMD) 1.4A (EXCEPT TRV75:US,CND/TRV715)	
D819	8-719-404-49	DIODE MA111-TX (EXCEPT TRV3E/TRV13E/TRV23E)		△ PS805	1-533-760-21	FUSE (SMD) 1.4A (TRV75:US,CND/TRV715)	
D932	8-719-062-16	DIODE 01ZA8.2(TPL3)		△ PS805	1-533-761-21	LINK, IC (SMD) 1.4A (EXCEPT TRV75:US,CND/TRV715)	
D932	8-719-045-87	DIODE MA4Z082WA-(K8).SO					
D933	8-719-062-16	DIODE 01ZA8.2(TPL3)		△ PS806	1-533-760-21	FUSE (SMD) 1.4A (TRV75:US,CND/TRV715)	
D933	8-719-045-87	DIODE MA4Z082WA-(K8).SO		△ PS806	1-533-761-21	LINK, IC (SMD) 1.4A (TRV45E/TRV55E/TRV65E/TRV69E/TRV75:E,JE/75PK)	
D934	8-719-062-16	DIODE 01ZA8.2(TPL3)				< TRANSISTOR >	
D934	8-719-045-87	DIODE MA4Z082WA-(K8).SO		Q801	8-729-024-48	TRANSISTOR 2SK1830-TE85L	
D935	8-719-062-16	DIODE 01ZA8.2(TPL3)		Q802	8-729-041-69	TRANSISTOR MMSF5P02HDR2	
D935	8-719-045-87	DIODE MA4Z082WA-(K8).SO		Q803	8-729-804-41	TRANSISTOR 2SB1122-ST-TD	
D936	8-719-062-16	DIODE 01ZA8.2(TPL3)		Q804	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
D936	8-719-045-87	DIODE MA4Z082WA-(K8).SO		Q805	8-729-024-48	TRANSISTOR 2SK1830-TE85L	
D938	8-719-420-14	DIODE MA8082-TX					
		< FERRITE BEAD >		Q806	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
FB931	1-414-228-11	INDUCTOR CHIP 0uH		Q807	8-729-804-41	TRANSISTOR 2SB1122-ST-TD	
FB932	1-414-228-11	INDUCTOR CHIP 0uH		Q808	8-729-043-94	TRANSISTOR CPH3106-PM-TL	
FB933	1-414-228-11	INDUCTOR CHIP 0uH		Q809	8-729-043-94	TRANSISTOR CPH3106-PM-TL	
FB934	1-414-228-11	INDUCTOR CHIP 0uH		Q810	8-729-043-94	TRANSISTOR CPH3106-PM-TL	

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
Q812	8-729-041-24	TRANSISTOR	NDS355AN			R818	1-216-813-11	METAL CHIP	220	5%	1/16W
Q813	8-729-037-53	TRANSISTOR	2SA1832F-Y/GR(TPL3)			R819	1-218-887-11	RES,CHIP	47K	0.50%	1/16W
Q814	8-729-043-94	TRANSISTOR	CPH3106-PM-TL			R820	1-216-845-11	METAL CHIP	100K	5%	1/16W
Q815	8-729-043-94	TRANSISTOR	CPH3106-PM-TL								
Q817	8-729-041-24	TRANSISTOR	NDS355AN			R821	1-218-879-11	RES,CHIP	22K	0.50%	1/16W
						R822	1-216-150-91	RES,CHIP	10	5%	1/8W
Q819	8-729-043-94	TRANSISTOR	CPH3106-PM-TL			R824	1-216-837-11	METAL CHIP	22K	5%	1/16W
Q820	8-729-037-74	TRANSISTOR	UN9213J-(K8).SO (EXCEPT TRV3E/TRV13E/TRV23E)			R825	1-218-879-11	RES,CHIP	22K	0.50%	1/16W
Q824	8-729-042-56	TRANSISTOR	MG5F3455VT1 (EXCEPT TRV3E/TRV13E/TRV23E)			R826	1-216-821-11	METAL CHIP	1K	5%	1/16W
Q823	8-729-037-74	TRANSISTOR	UN9213J-(K8).SO			R827	1-216-821-11	METAL CHIP	1K	5%	1/16W
Q826	8-729-037-74	TRANSISTOR	UN9213J-(K8).SO			R828	1-216-831-11	METAL CHIP	6.8K	5%	1/16W
						R829	1-216-837-11	METAL CHIP	22K	5%	1/16W
Q827	8-729-037-61	TRANSISTOR	RN2104F(TPL3)			R830	1-218-883-11	RES,CHIP	33K	0.50%	1/16W
Q828	8-729-037-74	TRANSISTOR	UN9213J-(K8).SO			R831	1-216-841-11	METAL CHIP	47K	5%	1/16W
Q829	8-729-037-53	TRANSISTOR	2SA1832F-Y/GR(TPL3)								
Q830	8-729-037-52	TRANSISTOR	2SC4738F-Y/GR(TPL3)			R832	1-218-879-11	RES,CHIP	22K	0.50%	1/16W
Q831	8-729-041-23	TRANSISTOR	NDS356AP			R833	1-216-839-11	METAL CHIP	33K	5%	1/16W
						R834	1-218-883-11	RES,CHIP	33K	0.50%	1/16W
Q832	8-729-041-23	TRANSISTOR	NDS356AP			R835	1-218-879-11	RES,CHIP	22K	0.50%	1/16W
Q833	8-729-041-23	TRANSISTOR	NDS356AP			R836	1-216-837-11	METAL CHIP	22K	5%	1/16W
Q834	8-729-037-53	TRANSISTOR	2SA1832F-Y/GR(TPL3)								
Q835	8-729-037-52	TRANSISTOR	2SC4738F-Y/GR(TPL3)			R837	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
Q836	8-729-037-53	TRANSISTOR	2SA1832F-Y/GR(TPL3)			R838	1-216-837-11	METAL CHIP	22K	5%	1/16W
						R839	1-216-837-11	METAL CHIP	22K	5%	1/16W
Q838	8-729-037-53	TRANSISTOR	2SA1832F-Y/GR(TPL3)			R840	1-216-839-11	METAL CHIP	33K	5%	1/16W
Q839	8-729-037-52	TRANSISTOR	2SC4738F-Y/GR(TPL3)			R841	1-216-834-11	METAL CHIP	12K	5%	1/16W
Q840	8-729-037-53	TRANSISTOR	2SA1832F-Y/GR(TPL3)								
Q842	8-729-037-52	TRANSISTOR	2SC4738F-Y/GR(TPL3)			R842	1-218-903-11	RES,CHIP	220K	0.50%	1/16W
Q843	8-729-037-53	TRANSISTOR	2SA1832F-Y/GR(TPL3)			R843	1-218-895-11	RES,CHIP	100K	0.50%	1/16W
						R845	1-218-847-11	RES,CHIP	1K	0.50%	1/16W
Q844	8-729-037-53	TRANSISTOR	2SA1832F-Y/GR(TPL3)			R849	1-216-837-11	METAL CHIP	22K	5%	1/16W
Q845	8-729-037-52	TRANSISTOR	2SC4738F-Y/GR(TPL3)			R850	1-216-857-11	METAL CHIP	1M	5%	1/16W
Q847	8-729-037-52	TRANSISTOR	2SC4738F-Y/GR(TPL3)								
Q848	8-729-037-52	TRANSISTOR	2SC4738F-Y/GR(TPL3)			R852	1-218-851-11	RES,CHIP	1.5K	0.50%	1/16W
Q849	8-729-037-53	TRANSISTOR	2SA1832F-Y/GR(TPL3)			R853	1-216-849-11	METAL CHIP	220K	5%	1/16W
						R854	1-218-887-11	RES,CHIP	47K	0.50%	1/16W
Q850	8-729-037-52	TRANSISTOR	2SC4738F-Y/GR(TPL3)			R859	1-216-845-11	METAL CHIP	100K	5%	1/16W
Q851	8-729-041-69	TRANSISTOR	MMSF5P02HDR2								(EXCEPT TRV3E/TRV13E/TRV23E)
Q852	8-729-017-61	TRANSISTOR	2SB1581-T1			R864	1-216-857-11	METAL CHIP	1M	5%	1/16W
Q853	8-729-037-53	TRANSISTOR	2SA1832F-Y/GR(TPL3)								(EXCEPT TRV3E/TRV13E/TRV23E)
Q854	8-729-037-52	TRANSISTOR	2SC4738F-Y/GR(TPL3)								
						R865	1-216-841-11	METAL CHIP	47K	5%	1/16W
Q855	8-729-037-52	TRANSISTOR	2SC4738F-Y/GR(TPL3)			R866	1-216-837-11	METAL CHIP	22K	5%	1/16W
Q856	8-729-037-52	TRANSISTOR	2SC4738F-Y/GR(TPL3)			R868	1-216-849-11	METAL CHIP	220K	5%	1/16W
Q932	8-729-037-74	TRANSISTOR	UN9213J-(K8).SO			R870	1-216-857-11	METAL CHIP	1M	5%	1/16W
Q933	8-729-037-74	TRANSISTOR	UN9213J-(K8).SO			R871	1-216-857-11	METAL CHIP	1M	5%	1/16W
Q934	8-729-037-53	TRANSISTOR	2SA1832F-Y/GR(TPL3)								
		< RESISTOR >				R872	1-216-845-11	METAL CHIP	100K	5%	1/16W
						R873	1-216-841-11	METAL CHIP	47K	5%	1/16W
						R874	1-216-857-11	METAL CHIP	1M	5%	1/16W
R801	1-216-841-11	METAL CHIP	47K	5%	1/16W	R875	1-216-849-11	METAL CHIP	220K	5%	1/16W
R802	1-218-893-11	RES,CHIP	82K	0.50%	1/16W	R876	1-216-845-11	METAL CHIP	100K	5%	1/16W
R803	1-216-833-11	METAL CHIP	10K	5%	1/16W						
R804	1-216-837-11	METAL CHIP	22K	5%	1/16W	R878	1-216-857-11	METAL CHIP	1M	5%	1/16W
R805	1-216-835-11	METAL CHIP	15K	5%	1/16W	R879	1-216-837-11	METAL CHIP	22K	5%	1/16W
						R880	1-218-895-11	RES,CHIP	100K	0.50%	1/16W
R806	1-218-879-11	RES,CHIP	22K	0.50%	1/16W	R881	1-216-864-11	METAL CHIP	0	5%	1/16W
R807	1-216-839-11	METAL CHIP	33K	5%	1/16W	R882	1-218-903-11	RES,CHIP	220K	0.50%	1/16W
R808	1-218-879-11	RES,CHIP	22K	0.50%	1/16W						
R809	1-216-813-11	METAL CHIP	220	5%	1/16W	R883	1-216-841-11	METAL CHIP	47K	5%	1/16W
R810	1-216-837-11	METAL CHIP	22K	5%	1/16W	R884	1-216-845-11	METAL CHIP	100K	5%	1/16W
						R887	1-216-849-11	METAL CHIP	220K	5%	1/16W
R811	1-218-883-11	RES,CHIP	33K	0.50%	1/16W	R888	1-216-845-11	METAL CHIP	100K	5%	1/16W
R812	1-218-901-11	RES,CHIP	180K	0.50%	1/16W	R890	1-216-845-11	METAL CHIP	100K	5%	1/16W
R813	1-216-857-11	METAL CHIP	1M	5%	1/16W						
R814	1-218-879-11	RES,CHIP	22K	0.50%	1/16W	R891	1-218-895-11	RES,CHIP	100K	0.50%	1/16W
R815	1-216-813-11	METAL CHIP	220	5%	1/16W	R892	1-218-903-11	RES,CHIP	220K	0.50%	1/16W
						R893	1-216-835-11	METAL CHIP	15K	5%	1/16W
R816	1-218-879-11	RES,CHIP	22K	0.50%	1/16W	R895	1-216-837-11	METAL CHIP	22K	5%	1/16W
R817	1-218-879-11	RES,CHIP	22K	0.50%	1/16W	R896	1-218-903-11	RES,CHIP	220K	0.50%	1/16W

DD-105

FP-249

FP-355

MA-312

MA-331

Ref. No.	Part No.	Description	Remark
R897	1-218-891-11	RES,CHIP 68K 0.50% 1/16W	
R900	1-218-895-11	RES,CHIP 100K 0.50% 1/16W	
R901	1-218-887-11	RES,CHIP 47K 0.50% 1/16W	
R902	1-216-864-11	METAL CHIP 0 5% 1/16W	
R903	1-216-845-11	METAL CHIP 100K 5% 1/16W	
R904	1-216-849-11	METAL CHIP 220K 5% 1/16W	
R905	1-218-901-11	RES,CHIP 180K 0.50% 1/16W	
R906	1-216-833-11	METAL CHIP 10K 5% 1/16W	
R907	1-218-903-11	RES,CHIP 220K 0.50% 1/16W	
R908	1-216-841-11	METAL CHIP 47K 5% 1/16W	
R910	1-216-833-11	METAL CHIP 10K 5% 1/16W	
R911	1-218-883-11	RES,CHIP 33K 0.50% 1/16W	
R912	1-218-879-11	RES,CHIP 22K 0.50% 1/16W	
R913	1-216-857-11	METAL CHIP 1M 5% 1/16W	
R914	1-216-811-11	METAL CHIP 150 5% 1/16W	
R915	1-218-911-11	RES,CHIP 470K 0.50% 1/16W	
R917	1-216-864-11	METAL CHIP 0 5% 1/16W	
R918	1-216-849-11	METAL CHIP 220K 5% 1/16W	
R921	1-216-296-91	SHORT 0	
R922	1-216-296-91	SHORT 0	
R923	1-216-296-91	SHORT 0	
R924	1-216-849-11	METAL CHIP 220K 5% 1/16W	
R932	1-216-841-11	METAL CHIP 47K 5% 1/16W	
R933	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R934	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R935	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R936	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R937	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R938	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R939	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R940	1-216-819-11	METAL CHIP 680 5% 1/16W	
R941	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R942	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R943	1-216-029-00	METAL CHIP 150 5% 1/10W	

< TRANSFORMER >

△ T801 1-429-565-21 TRANSFORMER, CONVERTER

FP-249 BOARD, COMPLETE (Not supplied)

(Ref. No. 10000 series)

1-658-214-11 FP-355 FLEXIBLE BOARD

3-965-551-01 HOLDER (S), SENSOR

3-965-552-01 HOLDER (T), SENSOR

< HALL ELEMENT >

H001 8-719-033-37 ELEMENT, HALL HW-105C

H002 8-719-033-37 ELEMENT, HALL HW-105C

< TRANSISTOR >

Q001 8-729-907-25 PHOTO TRANSISTOR PT4850F

Q002 8-729-907-25 PHOTO TRANSISTOR PT4850F

< SWITCH >

S001 1-692-614-11 SWITCH, PUSH (3 KEY)

(Hi8 MP, ME/MP, REC PROOF)

S002 1-572-688-11 SWITCH, PUSH (1 KEY)(C.C LOCK)

Ref. No.	Part No.	Description	Remark
	1-658-213-11	FP-355 FLEXIBLE BOARD ***** (Ref. No. 10000 series)	
		< DIODE >	
D991	8-719-988-42	DIODE GL453	
A-7073-451-A	MA-331(VMM0) BOARD, COMPLETE (TRV23E)	*****	
A-7073-476-A	MA-331(VZL) BOARD, COMPLETE (TRV3E/TRV13E)	*****	
A-7073-501-A	MA-331(VH0) BOARD, COMPLETE (TRV65E/TRV69E)	***** (Ref. No. 4000 series)	
A-7073-430-A	MA-312(VHI) BOARD, COMPLETE (TRV75/TRV75PK/TRV715)	*****	
A-7073-478-A	MA-312(VH0) BOARD, COMPLETE (TRV45E/TRV55E)	***** (Ref. No. 9000 series)	
		< CAPACITOR >	

C301 1-107-686-11 TANTAL. CHIP 4.7uF 20% 16V
(TRV75/TRV75PK/TRV715)C302 1-107-826-11 CERAMIC CHIP 0.1uF 10% 16V
(TRV75/TRV75PK/TRV715)C303 1-107-826-11 CERAMIC CHIP 0.1uF 10% 16V
(TRV75/TRV75PK/TRV715)C304 1-107-826-11 CERAMIC CHIP 0.1uF 10% 16V
(TRV75/TRV75PK/TRV715)C305 1-107-826-11 CERAMIC CHIP 0.1uF 10% 16V
(TRV75/TRV75PK/TRV715)C306 1-135-259-11 TANTAL. CHIP 10uF 20% 6.3V
(EXCEPT TRV3E/TRV13E)C321 1-163-809-11 CERAMIC CHIP 0.047uF 10% 25V
(TRV3E/TRV13E/TRV23E)C322 1-115-467-11 CERAMIC CHIP 0.22uF 10% 10V
(TRV3E/TRV13E/TRV23E)C323 1-162-927-11 CERAMIC CHIP 100PF 5% 50V
(TRV3E/TRV13E/TRV23E)

C324 1-109-982-11 CERAMIC CHIP 1uF 10% 10V

C325 1-162-970-11 CERAMIC CHIP 0.01uF 10% 25V

C326 1-119-749-11 TANTAL. CHIP 33uF 20% 4V
(TRV3E/TRV13E/TRV23E)C327 1-110-563-11 CERAMIC CHIP 0.068uF 10% 16V
(TRV3E/TRV13E/TRV23E)C328 1-107-826-11 CERAMIC CHIP 0.1uF 10% 16V
(TRV3E/TRV13E/TRV23E)C329 1-162-927-11 CERAMIC CHIP 100PF 5% 50V
(TRV3E/TRV13E/TRV23E)

C330 1-109-982-11 CERAMIC CHIP 1uF 10% 10V

C331 1-107-826-11 CERAMIC CHIP 0.1uF 10% 16V
(TRV3E/TRV13E/TRV23E)

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C332	1-162-927-11	CERAMIC CHIP 100PF 5% 50V (TRV3E/TRV13E/TRV23E)		C365	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)	
C333	1-162-927-11	CERAMIC CHIP 100PF 5% 50V (EXCEPT TRV3E/TRV13E/TRV23E)		C366	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)	
C334	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V (EXCEPT TRV3E/TRV13E/TRV23E)		C367	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)	
C335	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		C368	1-164-245-11	CERAMIC CHIP 0.015uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)	
C336	1-162-927-11	CERAMIC CHIP 100PF 5% 50V (EXCEPT TRV3E/TRV13E/TRV23E)		C369	1-162-962-11	CERAMIC CHIP 470PF 10% 50V (EXCEPT TRV3E/TRV13E/TRV23E)	
C337	1-135-259-11	TANTAL. CHIP 10uF 20% 6.3V (EXCEPT TRV3E/TRV13E/TRV23E)		C370	1-162-962-11	CERAMIC CHIP 470PF 10% 50V (EXCEPT TRV3E/TRV13E/TRV23E)	
C338	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V (EXCEPT TRV3E/TRV13E/TRV23E)		C371	1-164-346-11	CERAMIC CHIP 1uF 16V (EXCEPT TRV3E/TRV13E/TRV23E)	
C339	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		C372	1-164-346-11	CERAMIC CHIP 1uF 16V (EXCEPT TRV3E/TRV13E/TRV23E)	
C340	1-162-927-11	CERAMIC CHIP 100PF 5% 50V (EXCEPT TRV3E/TRV13E/TRV23E)		C373	1-164-156-11	CERAMIC CHIP 0.1uF 25V (EXCEPT TRV3E/TRV13E/TRV23E)	
C341	1-165-176-11	CERAMIC CHIP 0.047uF 10% 16V (EXCEPT TRV3E/TRV13E/TRV23E)		C375	1-164-346-11	CERAMIC CHIP 1uF 16V (EXCEPT TRV3E/TRV13E/TRV23E)	
C342	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		C376	1-135-259-11	TANTAL. CHIP 10uF 20% 6.3V	
C343	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		C377	1-162-966-11	CERAMIC CHIP 0.0022uF 50V	
C344	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		C378	1-165-128-11	CERAMIC CHIP 0.22uF 16V (EXCEPT TRV3E/TRV13E/TRV23E)	
C345	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V (EXCEPT TRV3E/TRV13E/TRV23E)		< CONNECTOR >			
C346	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		* CN301	1-695-320-21	PIN, CONNECTOR (1.5MM)(SMD) 2P	
C348	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		* CN302	1-695-320-21	PIN, CONNECTOR (1.5MM)(SMD) 2P (EXCEPT TRV3E/TRV13E/TRV23E)	
C349	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V (EXCEPT TRV3E/TRV13E/TRV23E)		CN303	1-779-334-11	CONNECTOR, FFC/FPC 20P	
C350	1-135-259-11	TANTAL. CHIP 10uF 20% 6.3V (EXCEPT TRV3E/TRV13E/TRV23E)		< DIODE >			
C351	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		D301	8-719-061-86	DIODE DCR2810 (TRV75/TRV75PK/TRV715)	
C352	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V (EXCEPT TRV3E/TRV13E/TRV23E)		D321	8-719-420-14	DIODE MA8082-TX (EXCEPT TRV3E/TRV13E/TRV23E)	
C353	1-162-927-11	CERAMIC CHIP 100PF 5% 50V (EXCEPT TRV3E/TRV13E/TRV23E)		D302	8-749-060-65	DIODE DCC3810 (EXCEPT TRV3E/TRV13E)	
C354	1-165-176-11	CERAMIC CHIP 0.047uF 10% 16V (EXCEPT TRV3E/TRV13E/TRV23E)		D303	8-719-061-82	DIODE TLSU1002(TPX1,SONY)	
C355	1-164-245-11	CERAMIC CHIP 0.015uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		D305	8-719-404-49	DIODE MA111-TX (EXCEPT TRV3E/TRV13E)	
C356	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		D309	8-719-067-44	DIODE CL-310IRS-X-TU (TRV23E/TRV45E/TRV55E/TRV65E/TRV69E)	
C357	1-164-245-11	CERAMIC CHIP 0.015uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		D322	8-719-420-14	DIODE MA8082-TX	
C358	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		D323	8-719-404-49	DIODE MA111-TX (EXCEPT TRV3E/TRV13E/TRV23E)	
C359	1-162-968-11	CERAMIC CHIP 0.0047uF 10% 50V (EXCEPT TRV3E/TRV13E/TRV23E)		< FUSE >			
C360	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		△ F301	1-533-874-11	FUSE, MICRO 200mA/24V (EXCEPT TRV3E/TRV13E)	
C361	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		< IC >			
C362	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		IC301	8-749-012-83	IC RS-180-T (EXCEPT TRV3E/TRV13E)	
C363	1-162-968-11	CERAMIC CHIP 0.0047uF 10% 50V (EXCEPT TRV3E/TRV13E/TRV23E)		IC321	8-759-339-63	IC NJM2118V-TE2 (TRV3E/TRV13E/TRV23E)	
C364	1-164-245-11	CERAMIC CHIP 0.015uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)		IC322	8-759-248-31	IC BA7780KV-E2 (EXCEPT TRV3E/TRV13E/TRV23E)	
				< JACK >			
				J301	1-568-027-11	JACK, SMALL TYPE (MIC (PLUG IN POWER)) (TRV3E/TRV13E/TRV23E)	
				J301	1-691-737-11	JACK (SMALL TYPE) (MIC (PLUG IN POWER)) (EXCEPT TRV3E/TRV13E/TRV23E)	

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

MA-312
MA-331

Ref. No.	Part No.	Description	Remark
< COIL >			
L301	1-216-295-91	SHORT 0 (TRV23E/TRV45E/TRV55E/TRV65E/TRV69E)	
L301	1-414-754-11	INDUCTOR 10uH (TRV75/TRV75PK/TRV715)	
< TRANSISTOR >			
Q301	8-729-420-24	TRANSISTOR 2SB1218A-QRS-TX (TRV75/TRV75PK/TRV715)	
Q301	8-729-422-51	TRANSISTOR UN5110-QRS-TX (TRV23E/TRV45E/TRV55E/TRV65E/TRV69E)	
Q302	8-729-122-63	TRANSISTOR 2SA1226-T1E4 (TRV75/TRV75PK/TRV715)	
Q303	8-729-140-75	TRANSISTOR 2SD999-T1-CLCK (EXCEPT TRV3E/TRV13E)	
Q304	8-729-402-42	TRANSISTOR UN5213-TX	
Q305	8-729-402-42	TRANSISTOR UN5213-TX (TRV23E/TRV45E/TRV55E/TRV65E/TRV69E)	
Q321	8-729-230-63	TRANSISTOR 2SD1819A-QRS-TX (TRV3E/TRV13E/TRV23E)	
Q322	8-729-420-24	TRANSISTOR 2SB1218A-QRS-TX (TRV3E/TRV13E/TRV23E)	
< RESISTOR >			
R301	1-216-823-11	METAL CHIP 1.5K 5% 1/16W (TRV75/TRV75PK/TRV715)	
R302	1-216-810-11	METAL CHIP 120 5% 1/16W (TRV75/TRV75PK/TRV715)	
R304	1-216-309-00	METAL CHIP 5.6 5% 1/10W (TRV23E/TRV45E/TRV55E/TRV65E/TRV69E)	
R304	1-216-311-00	METAL CHIP 6.8 5% 1/10W (TRV75/TRV75PK/TRV715)	
R305	1-216-302-00	METAL CHIP 2.7 5% 1/10W (EXCEPT TRV3E/TRV13E/TRV23E)	
R306	1-216-864-11	METAL CHIP 0 5% 1/16W	
R310	1-216-824-11	METAL CHIP 1.8K 5% 1/16W	
R311	1-216-805-11	METAL CHIP 47 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R312	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV75/TRV75PK/TRV715)	
R314	1-216-815-11	METAL CHIP 330 5% 1/16W (TRV23E/TRV45E/TRV55E/TRV65E/TRV69E)	
R315	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV75/TRV75PK/TRV715)	
R321	1-216-864-11	METAL CHIP 0 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R322	1-216-864-11	METAL CHIP 0 5% 1/16W	
R323	1-216-864-11	METAL CHIP 0 5% 1/16W	
R324	1-216-864-11	METAL CHIP 0 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R325	1-216-824-11	METAL CHIP 1.8K 5% 1/16W (TRV3E/TRV13E/TRV23E)	
R326	1-216-817-11	METAL CHIP 470 5% 1/16W (TRV3E/TRV13E/TRV23E)	
R327	1-216-841-11	METAL CHIP 47K 5% 1/16W (TRV3E/TRV13E/TRV23E)	
R328	1-216-841-11	METAL CHIP 47K 5% 1/16W (TRV3E/TRV13E/TRV23E)	
R329	1-216-829-11	METAL CHIP 4.7K 5% 1/16W (TRV3E/TRV13E/TRV23E)	

Ref. No.	Part No.	Description	Remark
R330	1-216-830-11	METAL CHIP 5.6K 5% 1/16W (TRV3E/TRV13E/TRV23E)	
R331	1-216-831-11	METAL CHIP 6.8K 5% 1/16W (TRV3E/TRV13E/TRV23E)	
R332	1-216-803-11	METAL CHIP 33 5% 1/16W (TRV3E/TRV13E/TRV23E)	
R333	1-216-838-11	METAL CHIP 27K 5% 1/16W (TRV3E/TRV13E/TRV23E)	
R334	1-216-838-11	METAL CHIP 27K 5% 1/16W (TRV3E/TRV13E/TRV23E)	
R335	1-216-839-11	METAL CHIP 33K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R336	1-216-836-11	METAL CHIP 18K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R337	1-216-835-11	METAL CHIP 15K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R338	1-216-835-11	METAL CHIP 15K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R339	1-216-831-11	METAL CHIP 6.8K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R340	1-216-825-11	METAL CHIP 2.2K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R341	1-216-821-11	METAL CHIP 1K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R342	1-216-831-11	METAL CHIP 6.8K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R343	1-216-829-11	METAL CHIP 4.7K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R344	1-216-833-11	METAL CHIP 10K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R345	1-216-821-11	METAL CHIP 1K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R346	1-216-825-11	METAL CHIP 2.2K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R347	1-216-831-11	METAL CHIP 6.8K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R348	1-216-831-11	METAL CHIP 6.8K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R349	1-216-831-11	METAL CHIP 6.8K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R350	1-216-864-11	METAL CHIP 0 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R351	1-216-838-11	METAL CHIP 27K 5% 1/16W (TRV45E/TRV55E/TRV75/TRV75PK/TRV715)	
R351	1-216-839-11	METAL CHIP 33K 5% 1/16W (TRV65E/TRV69E)	
R352	1-216-839-11	METAL CHIP 33K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R353	1-216-839-11	METAL CHIP 33K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R354	1-216-829-11	METAL CHIP 4.7K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R355	1-216-833-11	METAL CHIP 10K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R356	1-216-864-11	METAL CHIP 0 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R357	1-216-831-11	METAL CHIP 6.8K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R358	1-216-838-11	METAL CHIP 27K 5% 1/16W (TRV45E/TRV55E/TRV75/TRV75PK/TRV715)	
R358	1-216-839-11	METAL CHIP 33K 5% 1/16W (TRV65E/TRV69E)	

Ref. No.	Part No.	Description	Remark
R359	1-216-835-11	METAL CHIP 15K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R360	1-216-835-11	METAL CHIP 15K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R361	1-216-835-11	METAL CHIP 15K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R362	1-216-835-11	METAL CHIP 15K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R363	1-216-830-11	METAL CHIP 5.6K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R364	1-216-839-11	METAL CHIP 33K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R365	1-216-834-11	METAL CHIP 12K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R366	1-216-839-11	METAL CHIP 33K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R367	1-216-818-11	METAL CHIP 560 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
R368	1-216-832-11	METAL CHIP 8.2K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)	
< SWITCH >			
S302	1-771-040-21	SWITCH, PUSH (POWER (VTR/PLAYER))	
S303	1-771-039-11	SWITCH, PUSH (POWER (CAMERA))	
A-7073-452-A PD-92(SP6) BOARD, COMPLETE (TRV23E) *****			
A-7073-460-A PD-92(CP6) BOARD, COMPLETE (TRV3E/TRV13E) *****			
A-7073-502-A PD-92(SP8) BOARD, COMPLETE (TRV65E/TRV69E) ***** (Ref.No.10000 series)			
< CAPACITOR >			
C5501	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C5502	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C5503	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C5504	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C5505	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C5506	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V	
C5507	1-104-851-11	TANTAL. CHIP 10uF 20% 10V	
C5508	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C5509	1-135-180-21	TANTALUM CHIP 3.3uF 20% 6.3V	
C5511	1-109-982-11	CERAMIC CHIP 1uF 10% 10V	
C5512	1-104-851-11	TANTAL. CHIP 10uF 20% 10V	
C5513	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C5514	1-110-501-11	CERAMIC CHIP 0.33uF 10% 16V (TRV3E/TRV13E)	
C5514	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V (TRV23E/TRV65E/TRV69E)	
C5515	1-110-501-11	CERAMIC CHIP 0.33uF 10% 16V (TRV3E/TRV13E)	
C5515	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V (TRV23E/TRV65E/TRV69E)	

Ref. No.	Part No.	Description	Remark
C5516	1-110-501-11	CERAMIC CHIP 0.33uF 10% 16V (TRV3E/TRV13E)	
C5516	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V (TRV23E/TRV65E/TRV69E)	
C5517	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C5518	1-109-982-11	CERAMIC CHIP 1uF 10% 10V	
C5519	1-104-851-11	TANTAL. CHIP 10uF 20% 10V	
C5520	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C5601	1-104-851-11	TANTAL. CHIP 10uF 20% 10V (TRV3E/TRV13E)	
C5602	1-107-687-11	TANTAL. CHIP 3.3uF 20% 20V	
C5603	1-110-501-11	CERAMIC CHIP 0.33uF 10% 16V (TRV3E/TRV13E)	
C5603	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V (TRV23E/TRV65E/TRV69E)	
C5604	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C5605	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C5607	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V	
C5608	1-164-357-11	CERAMIC CHIP 1000PF 5% 50V	
C5610	1-162-926-11	CERAMIC CHIP 82PF 5% 50V	
C5612	1-162-926-11	CERAMIC CHIP 82PF 5% 50V	
C5616	1-107-682-11	CERAMIC CHIP 1uF 10% 16V	
C5618	1-113-994-11	TANTAL. CHIP 6.8uF 20% 16V (TRV23E/TRV65E/TRV69E)	
C5619	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV23E/TRV65E/TRV69E)	
C5620	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C5621	1-135-177-21	TANTALUM CHIP 1uF 20% 20V	
C5622	1-107-682-11	CERAMIC CHIP 1uF 10% 16V	
C5623	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V (TRV3E/TRV13E)	
C5624	1-107-688-11	TANTAL. CHIP 1.5uF 20% 10V	
C5625	1-107-688-11	TANTAL. CHIP 1.5uF 20% 10V	
C5633	1-162-967-11	CERAMIC CHIP 0.0033uF 10% 50V	
C5701	1-104-911-11	TANTAL. CHIP 33uF 20% 10V	
C5702	1-164-346-11	CERAMIC CHIP 1uF 16V	
C5703	1-164-664-11	CERAMIC CHIP 0.033uF 10% 50V	
C5704	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V	
C5705	1-113-521-11	CERAMIC CHIP 12PF 10% 3KV	
C5706	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C5801	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
< CONNECTOR >			
* CN5501	1-573-984-11	CONNECTOR, BOARD TO BOARD 10P	
CN5601	1-691-362-11	CONNECTOR, FFC/FPC (ZIF) 24P	
CN5701	1-764-709-11	CONNECTOR, FFC/FPC (LIF) 10P	
CN5801	1-750-360-21	CONNECTOR, FFC/FPC (ZIF) 24P	
CN5802	1-778-509-21	PIN, CONNECTOR (PC BOARD) 11P	
CN5803	1-778-508-21	PIN, CONNECTOR (PC BOARD) 6P	
CN5804	1-779-064-11	PIN, CONNECTOR (PC BOARD) 12P	
CN5805	1-766-336-21	CONNECTOR, FFC/FPC 6P	
< DIODE >			
D5604	8-719-976-96	DIODE MA8047-H-TX	
D5605	8-713-102-80	DIODE 1T369-01-T8A	
D5703	8-719-058-86	DIODE PG1101H-TR	
D5704	8-719-404-49	DIODE MA111-TX	

Ref. No.	Part No.	Description	Remark
< IC >			
IC5501	8-759-364-05	IC M62376GP-65AD	
IC5502	8-759-486-77	IC IR3Y37M4	
IC5601	8-759-495-00	IC LZ9GH184 (TRV23E/TRV65E/TRV69E)	
IC5601	8-759-530-20	IC CM7017L3-T4 (TRV3E/TRV13E)	
IC5602	8-759-327-01	IC NJM062V(Te2)	
IC5701	8-759-075-70	IC TA75S393F-TE85R	
IC5801	8-759-494-53	IC BU9729K-E2	
< COIL >			
L5501	1-414-754-11	INDUCTOR 10uH	
L5502	1-414-754-11	INDUCTOR 10uH	
L5503	1-414-754-11	INDUCTOR 10uH	
L5601	1-414-754-11	INDUCTOR 10uH (TRV3E/TRV13E)	
L5603	1-414-754-11	INDUCTOR 10uH	
L5604	1-414-754-11	INDUCTOR 10uH	
L5605	1-412-953-11	INDUCTOR 15uH (TRV65E/TRV69E)	
L5605	1-412-956-21	INDUCTOR 27uH (TRV23E)	
L5605	1-412-957-11	INDUCTOR 33uH (TRV3E/TRV13E)	
L5701	1-409-536-41	INDUCTOR 0uH	
< TRANSISTOR >			
Q5501	8-729-420-24	TRANSISTOR 2SB1218A-QRS-TX	
Q5601	8-729-402-42	TRANSISTOR UN5213-TX	
Q5602	8-729-402-42	TRANSISTOR UN5213-TX	
Q5605	8-729-230-63	TRANSISTOR 2SD1819A-QRS-TX	
Q5606	8-729-420-24	TRANSISTOR 2SB1218A-QRS-TX	
Q5607	8-729-230-63	TRANSISTOR 2SD1819A-QRS-TX	
Q5608	8-729-420-24	TRANSISTOR 2SB1218A-QRS-TX	
Q5701	8-729-039-43	TRANSISTOR FP216-TL	
Q5702	8-729-015-74	TRANSISTOR UN5111-TX	
< RESISTOR >			
R5501	1-216-840-11	METAL CHIP 39K 5% 1/16W	
R5505	1-216-841-11	METAL CHIP 47K 5% 1/16W	
R5512	1-216-837-11	METAL CHIP 22K 5% 1/16W	
R5513	1-216-834-11	METAL CHIP 12K 5% 1/16W	
R5516	1-216-837-11	METAL CHIP 22K 5% 1/16W	
R5517	1-216-835-11	METAL CHIP 15K 5% 1/16W	
R5518	1-216-839-11	METAL CHIP 33K 5% 1/16W	
R5520	1-216-852-11	METAL CHIP 390K 5% 1/16W	
R5521	1-216-834-11	METAL CHIP 12K 5% 1/16W	
R5522	1-216-840-11	METAL CHIP 39K 5% 1/16W (TRV23E/TRV65E/TRV69E)	
R5522	1-216-843-11	METAL CHIP 68K 5% 1/16W (TRV3E/TRV13E)	
R5528	1-218-895-11	RES,CHIP 100K 0.50% 1/16W	
R5531	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R5532	1-216-841-11	METAL CHIP 47K 5% 1/16W	
R5533	1-216-864-11	METAL CHIP 0 5% 1/16W	
R5537	1-216-828-11	METAL CHIP 3.9K 5% 1/16W (TRV3E/TRV13E)	
R5537	1-216-831-11	METAL CHIP 6.8K 5% 1/16W (TRV65E/TRV69E)	
R5537	1-216-832-11	METAL CHIP 8.2K 5% 1/16W (TRV23E)	
R5541	1-216-825-11	METAL CHIP 2.2K 5% 1/16W	
R5542	1-216-824-11	METAL CHIP 1.8K 5% 1/16W	

Ref. No.	Part No.	Description	Remark
R5544	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R5602	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV3E/TRV13E)	
R5603	1-216-864-11	METAL CHIP 0 5% 1/16W	
R5604	1-216-864-11	METAL CHIP 0 5% 1/16W	
R5605	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV3E/TRV13E)	
R5607	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV23E/TRV65E/TRV69E)	
R5608	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV23E/TRV65E/TRV69E)	
R5610	1-216-842-11	METAL CHIP 56K 5% 1/16W (TRV3E/TRV13E)	
R5610	1-216-845-11	METAL CHIP 100K 5% 1/16W (TRV23E/TRV65E/TRV69E)	
R5612	1-216-833-11	METAL CHIP 10K 5% 1/16W	
R5613	1-216-841-11	METAL CHIP 47K 5% 1/16W	
R5615	1-216-849-11	METAL CHIP 220K 5% 1/16W (TRV3E/TRV13E/TRV23E)	
R5615	1-216-851-11	METAL CHIP 330K 5% 1/16W (TRV65E/TRV69E)	
R5617	1-216-833-11	METAL CHIP 10K 5% 1/16W	
R5621	1-216-857-11	METAL CHIP 1M 5% 1/16W (TRV23E/TRV65E/TRV69E)	
R5622	1-216-864-11	METAL CHIP 0 5% 1/16W	
R5625	1-218-891-11	RES,CHIP 68K 0.50% 1/16W (TRV3E/TRV13E)	
R5625	1-218-895-11	RES,CHIP 100K 0.50% 1/16W (TRV23E/TRV65E/TRV69E)	
R5627	1-218-895-11	RES,CHIP 100K 0.50% 1/16W (TRV3E/TRV13E)	
R5627	1-218-901-11	RES,CHIP 180K 0.50% 1/16W (TRV23E/TRV65E/TRV69E)	
R5628	1-216-864-11	METAL CHIP 0 5% 1/16W	
R5629	1-216-833-11	METAL CHIP 10K 5% 1/16W	
R5630	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R5632	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV23E)	
R5636	1-216-864-11	METAL CHIP 0 5% 1/16W	
R5637	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV23E/TRV65E/TRV69E)	
R5640	1-216-845-11	METAL CHIP 100K 5% 1/16W	
R5641	1-216-839-11	METAL CHIP 33K 5% 1/16W	
R5643	1-216-845-11	METAL CHIP 100K 5% 1/16W	
R5644	1-216-839-11	METAL CHIP 33K 5% 1/16W	
R5647	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV3E/TRV13E)	
R5648	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV3E/TRV13E)	
R5651	1-218-883-11	RES,CHIP 33K 0.50% 1/16W (TRV23E/TRV65E/TRV69E)	
R5652	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV3E/TRV13E)	
R5652	1-218-879-11	RES,CHIP 22K 0.50% 1/16W (TRV23E/TRV65E/TRV69E)	
R5653	1-218-883-11	RES,CHIP 33K 0.50% 1/16W (TRV23E/TRV65E/TRV69E)	
R5654	1-218-879-11	RES,CHIP 22K 0.50% 1/16W (TRV23E/TRV65E/TRV69E)	
R5657	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV23E/TRV65E/TRV69E)	
R5658	1-216-864-11	METAL CHIP 0 5% 1/16W (TRV23E/TRV65E/TRV69E)	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
R5659	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV23E/TRV65E/TRV69E)	R5703	1-216-055-00	METAL CHIP	1.8K 5% 1/10W
R5660	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV23E/TRV65E/TRV69E)	R5704	1-216-055-00	METAL CHIP	1.8K 5% 1/10W
R5661	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV23E/TRV65E/TRV69E)	R5705	1-216-845-11	METAL CHIP	100K 5% 1/16W
R5663	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV3E/TRV13E)	R5706	1-216-831-11	METAL CHIP	6.8K 5% 1/16W
R5664	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV3E/TRV13E)	R5707	1-216-837-11	METAL CHIP	22K 5% 1/16W
R5665	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV3E/TRV13E)	R5708	1-216-810-11	METAL CHIP	120 5% 1/16W
R5666	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV3E/TRV13E)	R5709	1-216-817-11	METAL CHIP	470 5% 1/16W
R5667	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV3E/TRV13E)	R5710	1-216-864-11	METAL CHIP	0 5% 1/16W
R5668	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV3E/TRV13E)	R5801	1-216-823-11	METAL CHIP	1.5K 5% 1/16W
R5669	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV23E/TRV65E/TRV69E)	R5802	1-216-825-11	METAL CHIP	2.2K 5% 1/16W
R5670	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV23E/TRV65E/TRV69E)	R5803	1-216-828-11	METAL CHIP	3.9K 5% 1/16W
R5671	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV23E/TRV65E/TRV69E)	R5804	1-216-832-11	METAL CHIP	8.2K 5% 1/16W
R5672	1-216-849-11	METAL CHIP	220K 5% 1/16W (TRV3E/TRV13E)	R5805	1-216-838-11	METAL CHIP	27K 5% 1/16W
R5673	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV3E/TRV13E)	R5806	1-216-822-11	METAL CHIP	1.2K 5% 1/16W
R5674	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV23E/TRV65E/TRV69E)	R5807	1-216-809-11	METAL CHIP	100 5% 1/16W
R5676	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV23E/TRV65E/TRV69E)	R5808	1-216-809-11	METAL CHIP	100 5% 1/16W
R5678	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV3E/TRV13E)	R5811	1-216-864-11	METAL CHIP	0 5% 1/16W
R5679	1-216-805-11	METAL CHIP	47 5% 1/16W (TRV23E/TRV65E/TRV69E)	R5812	1-216-855-11	METAL CHIP	680K 5% 1/16W
R5680	1-216-805-11	METAL CHIP	47 5% 1/16W (TRV23E/TRV65E/TRV69E)	< SWITCH >			
R5681	1-216-805-11	METAL CHIP	47 5% 1/16W (TRV23E/TRV65E/TRV69E)	S5801	1-692-088-41	SWITCH, TACTILE (LCD BRIGHT +)	
R5682	1-216-805-11	METAL CHIP	47 5% 1/16W (TRV3E/TRV13E)	S5802	1-692-088-41	SWITCH, TACTILE (LCD BRIGHT -)	
R5683	1-216-805-11	METAL CHIP	47 5% 1/16W (TRV3E/TRV13E)	S5803	1-692-088-41	SWITCH, TACTILE (VOLUME +)	
R5684	1-216-805-11	METAL CHIP	47 5% 1/16W (TRV3E/TRV13E)	S5804	1-692-088-41	SWITCH, TACTILE (VOLUME -)	
R5685	1-216-845-11	METAL CHIP	100K 5% 1/16W	< TRANSFORMER >			
R5686	1-216-845-11	METAL CHIP	100K 5% 1/16W	△ T5701	1-429-547-31	TRANSFORMER, INVERTER	
R5688	1-216-864-11	METAL CHIP	0 5% 1/16W				
R5692	1-216-851-11	METAL CHIP	330K 5% 1/16W (TRV3E/TRV13E/TRV23E)	A-7073-457-A PD-93(SN3) BOARD, COMPLETE (TRV75/TRV75PK/TRV715) *****			
R5692	1-216-852-11	METAL CHIP	390K 5% 1/16W (TRV65E/TRV69E)	A-7073-480-A PD-93(SP3.5) BOARD, COMPLETE (TRV45E/TRV55E) ***** (Ref. No. 10000 series)			
R5694	1-216-839-11	METAL CHIP	33K 5% 1/16W	< CAPACITOR >			
R5695	1-216-833-11	METAL CHIP	10K 5% 1/16W	C4501	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
R5696	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV23E/TRV65E/TRV69E)	C4502	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
R5697	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV3E/TRV13E)	C4503	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
R5698	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV3E/TRV13E)	C4504	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
				C4505	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
				C4506	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V
				C4507	1-104-851-11	TANTAL. CHIP	10uF 20% 10V
				C4508	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
				C4509	1-135-180-21	TANTALUM CHIP	3.3uF 20% 6.3V
				C4511	1-107-682-11	CERAMIC CHIP	1uF 10% 16V
				C4512	1-104-851-11	TANTAL. CHIP	10uF 20% 10V
				C4513	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
				C4514	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V
				C4515	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V
				C4516	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V
				C4517	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
				C4518	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
				C4519	1-104-851-11	TANTAL. CHIP	10uF 20% 10V
				C4520	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V

The components identified by
mark △ or dotted line with mark
△ are critical for safety.
Replace only with part number
specified.

Les composants identifiés par une
marque △ sont critiques pour la
sécurité.
Ne les remplacer que par une
pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remark
C4602	1-107-687-11	TANTAL. CHIP 3.3uF 20% 20V	
C4603	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V	
C4604	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C4605	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C4607	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V	
C4608	1-164-357-11	CERAMIC CHIP 1000PF 5% 50V	
C4610	1-162-926-11	CERAMIC CHIP 82PF 5% 50V	
C4612	1-162-926-11	CERAMIC CHIP 82PF 5% 50V	
C4616	1-107-682-11	CERAMIC CHIP 1uF 10% 16V	
C4618	1-113-994-11	TANTAL. CHIP 6.8uF 20% 16V	
C4619	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C4620	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C4621	1-135-177-21	TANTALUM CHIP 1uF 20% 20V	
C4622	1-107-682-11	CERAMIC CHIP 1uF 10% 16V	
C4624	1-107-688-11	TANTAL. CHIP 1.5uF 20% 10V	
C4625	1-107-688-11	TANTAL. CHIP 1.5uF 20% 10V	
C4633	1-162-967-11	CERAMIC CHIP 0.0033uF 10% 50V	
C4701	1-104-911-11	TANTAL. CHIP 33uF 20% 10V	
C4702	1-164-346-11	CERAMIC CHIP 1uF 10% 16V	
C4703	1-164-664-11	CERAMIC CHIP 0.033uF 10% 50V	
C4704	1-164-004-11	CERAMIC CHIP 0.1uF 10% 25V	
△ C4705	1-113-520-11	CERAMIC CHIP 10PF 10% 3KV (TRV75/TRV75PK/TRV715)	
△ C4705	1-113-521-11	CERAMIC CHIP 12PF 10% 3KV (TRV45E/TRV55E)	
C4706	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C4801	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
< CONNECTOR >			
* CN4501	1-573-984-11	CONNECTOR, BOARD TO BOARD 10P	
CN4601	1-691-362-11	CONNECTOR, FFC/FPC (ZIF) 24P	
CN4701	1-764-709-11	CONNECTOR, FFC/FPC (LIF) 10P	
CN4801	1-750-360-21	CONNECTOR, FFC/FPC (ZIF) 24P	
CN4802	1-778-509-21	PIN, CONNECTOR (PC BOARD) 11P	
CN4803	1-778-508-21	PIN, CONNECTOR (PC BOARD) 6P	
CN4804	1-779-064-11	PIN, CONNECTOR (PC BOARD) 12P	
CN4805	1-766-336-21	CONNECTOR, FFC/FPC 6P	
< DIODE >			
D4604	8-719-976-96	DIODE MA8047-H-TX	
D4605	8-713-102-80	DIODE 1T369-01-T8A	
D4704	8-719-404-49	DIODE MA111-TX	
< IC >			
IC4501	8-759-364-05	IC M62376GP-65AD	
IC4502	8-759-486-77	IC IR3Y37M4	
IC4601	8-759-491-14	IC LZ9GH174 (TRV45E/TRV55E)	
IC4601	8-759-491-15	IC LZ9GH164 (TRV75/TRV75PK/TRV715)	
IC4602	8-759-327-01	IC NJM062V(Te2)	
IC4701	8-759-075-70	IC TA75S393F-TE85R	
IC4801	8-759-494-53	IC BU9729K-E2	
< COIL >			
L4501	1-414-754-11	INDUCTOR 10uH	
L4502	1-414-754-11	INDUCTOR 10uH	
L4503	1-414-754-11	INDUCTOR 10uH	

Ref. No.	Part No.	Description	Remark
L4603	1-414-754-11	INDUCTOR 10uH	
L4604	1-414-754-11	INDUCTOR 10uH	
L4605	1-412-951-11	INDUCTOR 10uH (TRV45E/TRV55E)	
L4605	1-412-954-11	INDUCTOR 18uH (TRV75/TRV75PK/TRV715)	
L4701	1-409-536-41	INDUCTOR 0uH	
< TRANSISTOR >			
Q4501	8-729-420-24	TRANSISTOR 2SB1218A-QRS-TX	
Q4601	8-729-402-42	TRANSISTOR UN5213-TX	
Q4602	8-729-402-42	TRANSISTOR UN5213-TX	
Q4605	8-729-230-63	TRANSISTOR 2SD1819A-QRS-TX	
Q4606	8-729-420-24	TRANSISTOR 2SB1218A-QRS-TX	
Q4607	8-729-230-63	TRANSISTOR 2SD1819A-QRS-TX	
Q4608	8-729-420-24	TRANSISTOR 2SB1218A-QRS-TX	
Q4701	8-729-039-43	TRANSISTOR FP216-TL	
Q4702	8-729-015-74	TRANSISTOR UN5111-TX	
< RESISTOR >			
R4501	1-216-840-11	METAL CHIP 39K 5% 1/16W	
R4505	1-216-841-11	METAL CHIP 47K 5% 1/16W	
R4512	1-216-837-11	METAL CHIP 22K 5% 1/16W	
R4513	1-216-834-11	METAL CHIP 12K 5% 1/16W	
R4516	1-216-837-11	METAL CHIP 22K 5% 1/16W	
R4517	1-216-835-11	METAL CHIP 15K 5% 1/16W	
R4518	1-216-839-11	METAL CHIP 33K 5% 1/16W	
R4520	1-216-852-11	METAL CHIP 390K 5% 1/16W	
R4521	1-216-834-11	METAL CHIP 12K 5% 1/16W	
R4522	1-216-840-11	METAL CHIP 39K 5% 1/16W	
R4528	1-218-895-11	RES.CHIP 100K 0.50% 1/16W	
R4531	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R4532	1-216-841-11	METAL CHIP 47K 5% 1/16W	
R4533	1-216-864-11	METAL CHIP 0 5% 1/16W	
R4534	1-216-805-11	METAL CHIP 47 5% 1/16W	
R4535	1-216-805-11	METAL CHIP 47 5% 1/16W	
R4536	1-216-805-11	METAL CHIP 47 5% 1/16W	
R4537	1-216-829-11	METAL CHIP 4.7K 5% 1/16W (TRV75/TRV75PK/TRV715)	
R4537	1-216-831-11	METAL CHIP 6.8K 5% 1/16W (TRV45E/TRV55E)	
R4541	1-216-825-11	METAL CHIP 2.2K 5% 1/16W	
R4542	1-216-824-11	METAL CHIP 1.8K 5% 1/16W	
R4544	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R4603	1-216-864-11	METAL CHIP 0 5% 1/16W	
R4604	1-216-864-11	METAL CHIP 0 5% 1/16W	
R4607	1-216-864-11	METAL CHIP 0 5% 1/16W	
R4608	1-216-864-11	METAL CHIP 0 5% 1/16W	
R4610	1-216-845-11	METAL CHIP 100K 5% 1/16W	
R4612	1-216-833-11	METAL CHIP 10K 5% 1/16W	
R4613	1-216-841-11	METAL CHIP 47K 5% 1/16W	
R4615	1-216-839-11	METAL CHIP 33K 5% 1/16W	
R4617	1-216-833-11	METAL CHIP 10K 5% 1/16W	
R4621	1-216-857-11	METAL CHIP 1M 5% 1/16W	
R4622	1-216-864-11	METAL CHIP 0 5% 1/16W	
R4625	1-218-893-11	RES.CHIP 82K 0.50% 1/16W	
R4627	1-218-893-11	RES.CHIP 82K 0.50% 1/16W (TRV75/TRV75PK/TRV715)	

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remark
R4627	1-218-899-11	RES,CHIP	150K 0.50% 1/16W (TRV45E/TRV55E)
R4628	1-216-864-11	METAL CHIP	0 5% 1/16W
R4629	1-216-833-11	METAL CHIP	10K 5% 1/16W
R4630	1-216-821-11	METAL CHIP	1K 5% 1/16W
R4632	1-216-864-11	METAL CHIP	0 5% 1/16W (TRV75/TRV75PK/TRV715)
R4636	1-216-864-11	METAL CHIP	0 5% 1/16W
R4637	1-216-864-11	METAL CHIP	0 5% 1/16W
R4640	1-216-845-11	METAL CHIP	100K 5% 1/16W
R4641	1-216-839-11	METAL CHIP	33K 5% 1/16W
R4643	1-216-842-11	METAL CHIP	56K 5% 1/16W
R4644	1-216-839-11	METAL CHIP	33K 5% 1/16W
R4651	1-218-883-11	RES,CHIP	33K 0.50% 1/16W
R4652	1-218-879-11	RES,CHIP	22K 0.50% 1/16W
R4653	1-218-883-11	RES,CHIP	33K 0.50% 1/16W
R4654	1-218-879-11	RES,CHIP	22K 0.50% 1/16W
R4657	1-216-864-11	METAL CHIP	0 5% 1/16W
R4658	1-216-864-11	METAL CHIP	0 5% 1/16W
R4659	1-216-864-11	METAL CHIP	0 5% 1/16W
R4660	1-216-864-11	METAL CHIP	0 5% 1/16W
R4661	1-216-864-11	METAL CHIP	0 5% 1/16W
R4669	1-216-864-11	METAL CHIP	0 5% 1/16W
R4670	1-216-864-11	METAL CHIP	0 5% 1/16W
R4671	1-216-864-11	METAL CHIP	0 5% 1/16W
R4674	1-216-864-11	METAL CHIP	0 5% 1/16W
R4676	1-216-864-11	METAL CHIP	0 5% 1/16W
R4679	1-216-864-11	METAL CHIP	0 5% 1/16W
R4680	1-216-864-11	METAL CHIP	0 5% 1/16W
R4681	1-216-864-11	METAL CHIP	0 5% 1/16W
R4685	1-216-845-11	METAL CHIP	100K 5% 1/16W
R4686	1-216-845-11	METAL CHIP	100K 5% 1/16W
R4688	1-216-864-11	METAL CHIP	0 5% 1/16W
R4692	1-216-840-11	METAL CHIP	39K 5% 1/16W
R4693	1-216-849-11	METAL CHIP	220K 5% 1/16W (TRV45E/TRV55E)
R4693	1-216-850-11	METAL CHIP	270K 5% 1/16W (TRV75/TRV75PK/TRV715)
R4694	1-216-833-11	METAL CHIP	10K 5% 1/16W
R4695	1-216-833-11	METAL CHIP	10K 5% 1/16W
R4696	1-216-864-11	METAL CHIP	0 5% 1/16W
R4703	1-216-055-00	METAL CHIP	1.8K 5% 1/10W
R4704	1-216-055-00	METAL CHIP	1.8K 5% 1/10W
R4705	1-216-845-11	METAL CHIP	100K 5% 1/16W
R4706	1-216-831-11	METAL CHIP	6.8K 5% 1/16W
R4707	1-216-837-11	METAL CHIP	22K 5% 1/16W
R4708	1-216-810-11	METAL CHIP	120 5% 1/16W
R4709	1-216-817-11	METAL CHIP	470 5% 1/16W
R4710	1-216-816-11	METAL CHIP	390 5% 1/16W
R4801	1-216-823-11	METAL CHIP	1.5K 5% 1/16W
R4802	1-216-825-11	METAL CHIP	2.2K 5% 1/16W
R4803	1-216-828-11	METAL CHIP	3.9K 5% 1/16W
R4804	1-216-832-11	METAL CHIP	8.2K 5% 1/16W
R4805	1-216-838-11	METAL CHIP	27K 5% 1/16W
R4806	1-216-822-11	METAL CHIP	1.2K 5% 1/16W
R4807	1-216-809-11	METAL CHIP	100 5% 1/16W
R4808	1-216-809-11	METAL CHIP	100 5% 1/16W
R4811	1-216-864-11	METAL CHIP	0 5% 1/16W
R4812	1-216-855-11	METAL CHIP	680K 5% 1/16W

Ref. No.	Part No.	Description	Remark
		< SWITCH >	
S4801	1-692-088-41	SWITCH, TACTILE (LCD BRIGHT +)	
S4802	1-692-088-41	SWITCH, TACTILE (LCD BRIGHT -)	
S4803	1-692-088-41	SWITCH, TACTILE (VOLUME +)	
S4804	1-692-088-41	SWITCH, TACTILE (VOLUME -)	
		< TRANSFORMER >	
△ T4701	1-429-507-31	TRANSFORMER, INVERTER	
		A-7073-405-A PJ-83(M) BOARD, COMPLETE (TRV3E/TRV13E/TRV23E) *****	
		A-7073-410-A PJ-83(H) BOARD, COMPLETE (TRV65E/TRV69E) ***** (Ref. No. 4000 series)	
		A-7073-433-A PJ-84(H) BOARD, COMPLETE (TRV75/TRV75PK/TRV715) *****	
		A-7073-477-A PJ-84(S) BOARD, COMPLETE (TRV45E/TRV55E) ***** (Ref. No. 9000 series)	
		< CAPACITOR >	
C101	1-110-569-11	TANTAL. CHIP 47uF 20% 6.3V	
		< CONNECTOR >	
* CN101	1-764-521-11	CONNECTOR, FFC/FPC (ZIF) 12P	
		< DIODE >	
D101	8-719-059-57	DIODE MAZJ082DFLSO (EXCEPT TRV3E/TRV13E/TRV23E)	
D102	8-719-059-57	DIODE MAZJ082DFLSO	
D103	8-719-059-57	DIODE MAZJ082DFLSO	
D104	8-719-420-14	DIODE MA8082-TX (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
D105	8-719-059-57	DIODE MAZJ082DFLSO (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
D106	8-719-059-57	DIODE MAZJ082DFLSO (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
		< JACK >	
J101	1-537-747-21	TERMINAL BOARD (S VIDEO/VIDEO/AUDIO) (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
J101	1-537-747-31	TERMINAL BOARD (S VIDEO/VIDEO/AUDIO) (TRV45E/TRV55E)	
J101	1-537-747-41	TERMINAL BOARD (VIDEO/AUDIO) (TRV3E/TRV13E/TRV23E)	
		< COIL >	
L101	1-414-072-11	INDUCTOR 1uH	
L102	1-216-295-91	SHORT 0	
L103	1-216-295-91	SHORT 0 (EXCEPT TRV3E/TRV13E/TRV23E)	
L104	1-216-295-91	SHORT 0 (EXCEPT TRV3E/TRV13E/TRV23E)	

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remark			
< TRANSISTOR >						
Q101	8-729-101-07	TRANSISTOR	2SB798-T1-DLDK			
Q102	8-729-230-63	TRANSISTOR	2SD1819A-QRS-TX			
< RESISTOR >						
R101	1-216-864-11	METAL CHIP	0	5%	1/16W	
R102	1-216-138-00	METAL CHIP	3.3	5%	1/8W	
R103	1-216-830-11	METAL CHIP	5.6K	5%	1/16W	
R104	1-216-820-11	METAL CHIP	820	5%	1/16W	
R105	1-216-836-11	METAL CHIP	18K	5%	1/16W	
R106	1-216-864-11	METAL CHIP	0	5%	1/16W	
			(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)			
R107	1-216-864-11	METAL CHIP	0	5%	1/16W	
			(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)			
R108	1-216-821-11	METAL CHIP	1K	5%	1/16W	
			(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)			
R109	1-216-821-11	METAL CHIP	1K	5%	1/16W	
A-7073-404-A SE-66(V) BOARD, COMPLETE						
(TRV3E/TRV13E/TRV23E)						

A-7073-409-A SE-66(VH) BOARD, COMPLETE						
(TRV65E/TRV69E)						

(Ref. No. 4000 series)						
A-7073-434-A SE-67(VH) BOARD, COMPLETE						
(TRV45E/TRV55E/TRV75/TRV75PK/TRV715)						

(Ref. No. 9000 series)						
< CAPACITOR >						
C451	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C452	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C453	1-104-847-11	TANTAL. CHIP	22uF	20%	4V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C454	1-104-847-11	TANTAL. CHIP	22uF	20%	4V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C457	1-164-343-11	CERAMIC CHIP	0.056uF	10%	25V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C458	1-164-343-11	CERAMIC CHIP	0.056uF	10%	25V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C459	1-164-343-11	CERAMIC CHIP	0.056uF	10%	25V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C460	1-110-666-11	ELECT CHIP	22uF	20%	6.3V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C461	1-164-343-11	CERAMIC CHIP	0.056uF	10%	25V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C462	1-110-666-11	ELECT CHIP	22uF	20%	6.3V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C464	1-110-501-11	CERAMIC CHIP	0.33uF	10%	16V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C465	1-135-259-11	TANTAL. CHIP	10uF	20%	6.3V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			
C466	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
			(EXCEPT TRV3E/TRV13E/TRV23E)			

Ref. No.	Part No.	Description	Remark		
< CONNECTOR >					
CN451	1-691-348-11	CONNECTOR, FFC/FPC (ZIF) 10P			
< DIODE >					
D451	8-719-059-57	DIODE MAZJ082DFLSO			
D452	8-719-059-57	DIODE MAZJ082DFLSO (EXCEPT TRV3E/TRV13E/TRV23E)			
< IC >					
IC451	8-759-489-19	IC uPC6756GR-8JG-E2 (EXCEPT TRV3E/TRV13E/TRV23E)			
< JACK >					
J451	1-695-514-11	JACK (SMALL TYPE) 1P (EARPHONE) (TRV3E/TRV13E/TRV23E)			
J451	1-695-514-21	JACK (SMALL TYPE) 1P (HEADPHONE) (EXCEPT TRV3E/TRV13E/TRV23E)			
< COIL >					
L451	1-414-754-11	INDUCTOR 10uH (EXCEPT TRV3E/TRV13E/TRV23E)			
L453	1-216-295-91	SHORT 0			
L454	1-216-295-91	SHORT 0 (EXCEPT TRV3E/TRV13E/TRV23E)			
< RESISTOR >					
R451	1-216-837-11	METAL CHIP 22K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)			
R452	1-216-837-11	METAL CHIP 22K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)			
R453	1-216-837-11	METAL CHIP 22K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)			
R454	1-216-837-11	METAL CHIP 22K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)			
R455	1-216-864-11	METAL CHIP 0 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)			
R456	1-216-857-11	METAL CHIP 1M 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)			
R458	1-216-833-11	METAL CHIP 10K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)			
R459	1-216-857-11	METAL CHIP 1M 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)			
R461	1-216-835-11	METAL CHIP 15K 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)			
R463	1-216-809-11	METAL CHIP 100 5% 1/16W (EXCEPT TRV3E/TRV13E/TRV23E)			
< SENSOR >					
SE451	1-803-041-31	SENSOR, ANGULAR VELOCITY (PITCH) (EXCEPT TRV3E/TRV13E/TRV23E)			
SE452	1-803-041-41	SENSOR, ANGULAR VELOCITY (YAW) (EXCEPT TRV3E/TRV13E/TRV23E)			

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
	A-7093-449-A	VC-195(VHIOU) BOARD, COMPLETE (TRV75/TRV75PK/715) *****		C039	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
				C040	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV75/TRV75PK/TRV715)	
	A-7093-453-A	VC-195(VH0E) BOARD, COMPLETE (TRV65E) *****		C041	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
				C042	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
				C043	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
	A-7093-456-A	VC-195(VZ0P) BOARD, COMPLETE (TRV3E/TRV13E/TRV23E) *****		C047	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV69E)	
				C048	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
				C049	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
	A-7093-460-A	VC-195(VMROP) BOARD, COMPLETE (TRV55E) *****		C050	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
				C052	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
	A-7093-461-A	VC-195 (VMOP) BOARD, COMPLETE (TRV45E) *****		C053	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
				C055	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
				C058	1-162-968-11	CERAMIC CHIP 0.0047uF 10% 50V	
	A-7093-732-A	VC-195(VH0DE) BOARD, COMPLETE (TRV69E) ***** (Ref. No. 1.000 series)		C059	1-164-217-11	CERAMIC CHIP 150PF 5% 50V	
				C060	1-163-809-11	CERAMIC CHIP 0.047uF 10% 25V	
		< CAPACITOR >		C061	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C001	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		C062	1-162-926-11	CERAMIC CHIP 82PF 5% 50V	
C004	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		C065	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C006	1-104-752-11	TANTAL. CHIP 33uF 20% 6.3V		C068	1-162-921-11	CERAMIC CHIP 33PF 5% 50V	
C007	1-104-752-11	TANTAL. CHIP 33uF 20% 6.3V		C069	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C008	1-162-927-11	CERAMIC CHIP 100PF 5% 50V		C070	1-162-908-11	CERAMIC CHIP 3PF 0.25PF 50V	
C009	1-164-217-11	CERAMIC CHIP 150PF 5% 50V		C071	1-104-752-11	TANTAL. CHIP 33uF 20% 6.3V	
C010	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		C072	1-162-958-11	CERAMIC CHIP 270PF 5% 50V	
C011	1-162-926-11	CERAMIC CHIP 82PF 5% 50V		C073	1-164-392-11	CERAMIC CHIP 390PF 5% 50V	
C012	1-162-927-11	CERAMIC CHIP 100PF 5% 50V		C074	1-162-915-11	CERAMIC CHIP 10PF 0.5PF 50V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C013	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV75/TRV75PK/TRV715)		C075	1-164-315-11	CERAMIC CHIP 470PF 5% 50V (TRV3E/TRV13E/TRV23E)	
C014	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV75/TRV75PK/TRV715)		C075	1-162-959-11	CERAMIC CHIP 330PF 5% 50V (EXCEPT TRV3E/TRV13E/TRV23E)	
C015	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV75/TRV75PK/TRV715)		C076	1-162-921-11	CERAMIC CHIP 33PF 5% 50V (TRV75/TRV75PK/TRV715)	
C016	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV75/TRV75PK/TRV715)		C076	1-162-922-11	CERAMIC CHIP 39PF 5% 50V (TRV65E/TRV69E)	
C017	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V		C078	1-162-928-11	CERAMIC CHIP 120PF 5% 50V	
C018	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		C079	1-162-922-11	CERAMIC CHIP 39PF 5% 50V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C019	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V		C080	1-162-915-11	CERAMIC CHIP 10PF 0.5PF 50V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C020	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V (TRV75/TRV75PK/TRV715)		C080	1-162-919-11	CERAMIC CHIP 22PF 5% 50V (TRV3E/TRV13E/TRV23E/TRV45E/TRV55E)	
C021	1-164-156-11	CERAMIC CHIP 0.1uF 25V		C081	1-162-916-11	CERAMIC CHIP 12PF 5% 50V	
C022	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		C082	1-162-915-11	CERAMIC CHIP 10PF 0.5PF 50V	
C023	1-165-176-11	CERAMIC CHIP 0.047uF 10% 16V		C083	1-162-924-11	CERAMIC CHIP 56PF 5% 50V (TRV3E/TRV13E/TRV23E/TRV45E/TRV55E/TRV65E/TRV69E)	
C024	1-165-176-11	CERAMIC CHIP 0.047uF 10% 16V		C083	1-162-926-11	CERAMIC CHIP 82PF 5% 50V (TRV75/TRV75PK/TRV715)	
C025	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V (TRV75/TRV75PK/TRV715)		C085	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C026	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		C086	1-115-156-11	CERAMIC CHIP 1uF 10V	
C027	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		C088	1-162-925-11	CERAMIC CHIP 68PF 5% 50V (TRV3E/TRV13E/TRV23E/TRV45E/TRV55E)	
C028	1-135-259-11	TANTAL. CHIP 10uF 20% 6.3V		C088	1-162-957-11	CERAMIC CHIP 220PF 5% 50V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C029	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		C089	1-162-919-11	CERAMIC CHIP 22PF 5% 50V (TRV3E/TRV13E/TRV23E)	
C030	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		C089	1-162-923-11	CERAMIC CHIP 47PF 5% 50V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C031	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		C089	1-162-925-11	CERAMIC CHIP 68PF 5% 50V (TRV45E/TRV55E)	
C032	1-165-176-11	CERAMIC CHIP 0.047uF 10% 16V		C090	1-162-958-11	CERAMIC CHIP 270PF 5% 50V	
C033	1-165-176-11	CERAMIC CHIP 0.047uF 10% 16V					
C034	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V					
C035	1-162-920-11	CERAMIC CHIP 27PF 5% 50V					
C036	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V					
C037	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V					
C038	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV75/TRV75PK/TRV715)					

Ref. No.	Part No.	Description	Remark
C152	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C156	1-164-677-11	CERAMIC CHIP 0.033uF 10% 16V	
C157	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V (EXCEPT TRV3E/TRV13E/TRV23E)	
C158	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C159	1-164-346-11	CERAMIC CHIP 1uF 16V	
C160	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C161	1-115-467-11	CERAMIC CHIP 0.22uF 10% 10V	
C162	1-135-180-21	TANTALUM CHIP 3.3uF 20% 6.3V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C163	1-135-180-21	TANTALUM CHIP 3.3uF 20% 6.3V	
C164	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C166	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C168	1-109-982-11	CERAMIC CHIP 1uF 10% 10V	
C169	1-109-982-11	CERAMIC CHIP 1uF 10% 10V	
C170	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C171	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)	
C172	1-110-501-11	CERAMIC CHIP 0.33uF 10% 16V (EXCEPT TRV3E/TRV13E/TRV23E)	
C173	1-164-227-11	CERAMIC CHIP 0.022uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)	
C174	1-162-928-11	CERAMIC CHIP 120PF 5% 50V (TRV45E/TRV55E/TRV65E/TRV69E)	
C174	1-164-217-11	CERAMIC CHIP 150PF 5% 50V (TRV75/TRV75PK/TRV715)	
C175	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V (EXCEPT TRV3E/TRV13E/TRV23E)	
C177	1-162-927-11	CERAMIC CHIP 100PF 5% 50V (EXCEPT TRV3E/TRV13E/TRV23E)	
C178	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)	
C179	1-162-919-11	CERAMIC CHIP 22PF 5% 50V (EXCEPT TRV3E/TRV13E/TRV23E)	
C180	1-115-467-11	CERAMIC CHIP 0.22uF 10% 10V	
C181	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C182	1-135-149-21	TANTALUM CHIP 2.2uF 20% 10V	
C183	1-135-149-21	TANTALUM CHIP 2.2uF 20% 10V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C184	1-115-156-11	CERAMIC CHIP 1uF 10V	
C185	1-126-246-11	ELECT CHIP 220uF 20% 4V	
C187	1-126-246-11	ELECT CHIP 220uF 20% 4V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C188	1-135-259-11	TANTAL. CHIP 10uF 20% 6.3V	
C190	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C191	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C192	1-104-852-11	TANTAL. CHIP 22uF 20% 6.3V	
C202	1-135-259-11	TANTAL. CHIP 10uF 20% 6.3V	
C204	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V	
C205	1-115-156-11	CERAMIC CHIP 1uF 10V	
C206	1-162-967-11	CERAMIC CHIP 0.0033uF 10% 50V	
C207	1-162-965-11	CERAMIC CHIP 0.0015uF 10% 50V	
C209	1-162-915-11	CERAMIC CHIP 10PF 0.5PF 50V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C209	1-162-921-11	CERAMIC CHIP 33PF 5% 50V (TRV3E/TRV13E/TRV23E/TRV45E/TRV55E)	
C210	1-162-922-11	CERAMIC CHIP 39PF 5% 50V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C211	1-135-181-21	TANTALUM CHIP 4.7uF 20% 6.3V	
C212	1-164-392-11	CERAMIC CHIP 390PF 5% 50V	
C217	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	

Ref. No.	Part No.	Description	Remark
C218	1-107-823-11	CERAMIC CHIP 0.47uF 10% 16V	
C219	1-109-982-11	CERAMIC CHIP 1uF 10% 10V	
C224	1-162-927-11	CERAMIC CHIP 100PF 5% 50V	
C225	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C226	1-109-982-11	CERAMIC CHIP 1uF 10% 10V	
C227	1-135-201-11	TANTALUM CHIP 10uF 20% 4V	
C229	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C230	1-115-156-11	CERAMIC CHIP 1uF 10V	
C232	1-164-156-11	CERAMIC CHIP 0.1uF 25V	
C233	1-135-201-11	TANTALUM CHIP 10uF 20% 4V	
C234	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C235	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C237	1-164-156-11	CERAMIC CHIP 0.1uF 25V	
C239	1-115-156-11	CERAMIC CHIP 1uF 10V	
C243	1-115-156-11	CERAMIC CHIP 1uF 10V (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
C243	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV55E)	
C244	1-115-156-11	CERAMIC CHIP 1uF 10V (TRV55E/TRV65E/TRV75/TRV75PK/TRV715)	
C245	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C246	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C247	1-135-201-11	TANTALUM CHIP 10uF 20% 4V	
C250	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C252	1-135-259-11	TANTAL. CHIP 10uF 20% 6.3V (TRV55E)	
C301	1-135-201-11	TANTALUM CHIP 10uF 20% 4V	
C302	1-135-201-11	TANTALUM CHIP 10uF 20% 4V (EXCEPT TRV3E/TRV13E/TRV23E)	
C307	1-135-151-21	TANTALUM CHIP 4.7uF 20% 4V	
C308	1-135-259-11	TANTAL. CHIP 10uF 20% 6.3V	
C309	1-135-318-11	TANTAL. CHIP 33uF 20% 4V	
C310	1-104-847-11	TANTAL. CHIP 22uF 20% 4V	
C312	1-107-823-11	CERAMIC CHIP 0.47uF 10% 16V	
C313	1-115-467-11	CERAMIC CHIP 0.22uF 10% 10V (EXCEPT TRV3E/TRV13E/TRV23E)	
C316	1-115-467-11	CERAMIC CHIP 0.22uF 10% 10V	
C317	1-115-467-11	CERAMIC CHIP 0.22uF 10% 10V (EXCEPT TRV3E/TRV13E/TRV23E)	
C318	1-104-847-11	TANTAL. CHIP 22uF 20% 4V	
C319	1-115-467-11	CERAMIC CHIP 0.22uF 10% 10V	
C320	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C321	1-162-968-11	CERAMIC CHIP 0.0047uF 10% 50V (EXCEPT TRV3E/TRV13E/TRV23E)	
C322	1-163-017-00	CERAMIC CHIP 0.0047uF 5% 50V	
C323	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)	
C324	1-109-982-11	CERAMIC CHIP 1uF 10% 10V (EXCEPT TRV3E/TRV13E/TRV23E)	
C325	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV3E/TRV13E/TRV23E)	
C327	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (EXCEPT TRV3E/TRV13E/TRV23E)	
C326	1-109-982-11	CERAMIC CHIP 1uF 10% 10V	
C328	1-164-232-11	CERAMIC CHIP 0.01uF 50V	
C329	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV75/TRV75PK/TRV715)	
C330	1-109-982-11	CERAMIC CHIP 1uF 10% 10V (EXCEPT TRV3E/TRV13E/TRV23E)	
C331	1-162-968-11	CERAMIC CHIP 0.0047uF 10% 50V (EXCEPT TRV3E/TRV13E/TRV23E)	
C332	1-109-982-11	CERAMIC CHIP 1uF 10% 10V	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C333	1-162-968-11	CERAMIC CHIP	0.0047uF 10% 50V	C463	1-165-176-11	CERAMIC CHIP	0.047uF 10% 16V
C334	1-115-467-11	CERAMIC CHIP	0.22uF 10% 10V	C464	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
		(EXCEPT TRV3E/TRV13E/TRV23E)		C465	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C335	1-115-467-11	CERAMIC CHIP	0.22uF 10% 10V	C467	1-162-968-11	CERAMIC CHIP	0.0047uF 10% 50V
				C468	1-165-176-11	CERAMIC CHIP	0.047uF 10% 16V
C336	1-109-982-11	CERAMIC CHIP	1uF 10% 10V				
		(EXCEPT TRV3E/TRV13E/TRV23E)		C469	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C337	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	C470	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C338	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	C471	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C339	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	C472	1-164-156-11	CERAMIC CHIP	0.1uF 25V
		(EXCEPT TRV3E/TRV13E/TRV23E)		C473	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V
C340	1-109-982-11	CERAMIC CHIP	1uF 10% 10V				
				C474	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V
C341	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	C475	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V
		(EXCEPT TRV3E/TRV13E/TRV23E)		C476	1-165-176-11	CERAMIC CHIP	0.047uF 10% 16V
C342	1-165-176-11	CERAMIC CHIP	0.047uF 10% 16V	C478	1-165-176-11	CERAMIC CHIP	0.047uF 10% 16V
C344	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C480	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V
		(EXCEPT TRV3E/TRV13E/TRV23E)					
C346	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C483	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C347	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C484	1-164-156-11	CERAMIC CHIP	0.1uF 25V
				C485	1-164-505-11	CERAMIC CHIP	2.2uF 16V
C349	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C486	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C367	1-162-969-11	CERAMIC CHIP	0.0068uF 10% 25V	C487	1-162-957-11	CERAMIC CHIP	220PF 5% 50V
		(TRV55E)					
C371	1-104-908-11	TANTAL. CHIP	47uF 20% 4V	C488	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C372	1-104-908-11	TANTAL. CHIP	47uF 20% 4V	C489	1-162-962-11	CERAMIC CHIP	470PF 10% 50V
C378	1-135-259-11	TANTAL. CHIP	10uF 20% 6.3V	C501	1-162-919-11	CERAMIC CHIP	22PF 5% 50V
				C502	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V
C380	1-135-259-11	TANTAL. CHIP	10uF 20% 6.3V	C503	1-162-919-11	CERAMIC CHIP	22PF 5% 50V
C381	1-164-346-11	CERAMIC CHIP	1uF 16V				
C382	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V	C504	1-162-922-11	CERAMIC CHIP	39PF 5% 50V
C383	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C506	1-115-156-11	CERAMIC CHIP	1uF 10V
C384	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C507	1-115-156-11	CERAMIC CHIP	1uF 10V
				C508	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C385	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C509	1-135-214-21	TANTAL. CHIP	4.7uF 20% 20V
C386	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V				
C387	1-104-847-11	TANTAL. CHIP	22uF 20% 4V	C510	1-135-201-11	TANTALUM CHIP	10uF 20% 4V
C388	1-162-961-11	CERAMIC CHIP	330PF 10% 50V	C511	1-164-232-11	CERAMIC CHIP	0.01uF 50V
C402	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	C512	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
				C513	1-115-156-11	CERAMIC CHIP	1uF 10V
C404	1-162-915-11	CERAMIC CHIP	10PF 0.5PF 50V	C514	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V
C405	1-162-915-11	CERAMIC CHIP	10PF 0.5PF 50V				
C406	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C515	1-162-917-11	CERAMIC CHIP	15PF 5% 50V
C410	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	C516	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C411	1-162-969-11	CERAMIC CHIP	0.0068uF 10% 25V	C517	1-115-467-11	CERAMIC CHIP	0.22uF 10% 10V
				C518	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V
C412	1-162-969-11	CERAMIC CHIP	0.0068uF 10% 25V	C519	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C414	1-164-156-11	CERAMIC CHIP	0.1uF 25V				
C415	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C520	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C416	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C521	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C417	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C522	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
				C523	1-115-467-11	CERAMIC CHIP	0.22uF 10% 10V
C418	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C524	1-162-962-11	CERAMIC CHIP	470PF 10% 50V
C419	1-164-156-11	CERAMIC CHIP	0.1uF 25V				
C420	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C525	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C451	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C526	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C452	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C527	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
				C528	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C453	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C529	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C454	1-162-968-11	CERAMIC CHIP	0.0047uF 10% 50V				
C455	1-162-968-11	CERAMIC CHIP	0.0047uF 10% 50V	C530	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C456	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C531	1-104-847-11	TANTAL. CHIP	22uF 20% 4V
C457	1-162-968-11	CERAMIC CHIP	0.0047uF 10% 50V	C532	1-162-917-11	CERAMIC CHIP	15PF 5% 50V
						(EXCEPT TRV3E/TRV13E/TRV23E)	
C458	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C533	1-162-917-11	CERAMIC CHIP	15PF 5% 50V
C459	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V			(EXCEPT TRV3E/TRV13E/TRV23E)	
C460	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C552	1-162-968-11	CERAMIC CHIP	0.0047uF 10% 50V
C461	1-165-176-11	CERAMIC CHIP	0.047uF 10% 16V				
C462	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C553	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C710	1-135-201-11	TANTAL CHIP	10MF 20% 4V
C554	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				(TRV69E)
C555	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C711	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C556	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				(TRV69E)
C557	1-162-962-11	CERAMIC CHIP	470PF 10% 50V	C712	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
							(TRV69E)
C558	1-115-467-11	CERAMIC CHIP	0.22uF 10% 10V	C713	1-164-004-11	CERAMIC CHIP	0.1MF 10% 25V
C559	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				(TRV69E)
C560	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C714	1-162-964-11	CERAMIC CHIP	0.001uF 10% 25V
C561	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				(TRV69E)
C562	1-162-966-11	CERAMIC CHIP	0.0022uF 10% 50V	C715	1-164-156-11	CERAMIC CHIP	0.1uF 25V
							(TRV69E)
C563	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C716	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C564	1-104-752-11	TANTAL. CHIP	33uF 20% 6.3V				(TRV69E)
C565	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C751	1-135-201-11	TANTALUM CHIP	10uF 20% 4V
C566	1-115-156-11	CERAMIC CHIP	1uF 10V				(TRV75/TRV75PK/TRV715)
C567	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V	C752	1-135-259-11	TANTAL. CHIP	10uF 20% 6.3V
							(TRV75/TRV75PK/TRV715)
C569	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C753	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C570	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				(TRV75/TRV75PK/TRV715)
C571	1-104-851-11	TANTAL. CHIP	10uF 20% 10V	C754	1-107-823-11	CERAMIC CHIP	0.47uF 10% 16V
C572	1-104-851-11	TANTAL. CHIP	10uF 20% 10V				(TRV75/TRV75PK/TRV715)
C605	1-135-091-00	TANTALUM CHIP	1uF 20% 16V	C755	1-107-823-11	CERAMIC CHIP	0.47uF 10% 16V
							(TRV75/TRV75PK/TRV715)
C607	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C756	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C610	1-164-156-11	CERAMIC CHIP	0.1uF 25V				(TRV75/TRV75PK/TRV715)
C611	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C757	1-135-201-11	TANTALUM CHIP	10uF 20% 4V
C612	1-119-749-11	TANTAL. CHIP	33uF 20% 4V				(TRV75/TRV75PK/TRV715)
C613	1-104-851-11	TANTAL. CHIP	10uF 20% 10V	C758	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
							(TRV75/TRV75PK/TRV715)
C615	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C759	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C616	1-164-156-11	CERAMIC CHIP	0.1uF 25V				(TRV75/TRV75PK/TRV715)
C617	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C760	1-135-181-21	TANTALUM CHIP	4.7uF 20% 6.3V
C618	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				(TRV75/TRV75PK/TRV715)
C619	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C761	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
							(TRV75/TRV75PK/TRV715)
C620	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C762	1-164-668-11	CERAMIC CHIP	510PF 5% 50V
C621	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				(TRV75/TRV75PK/TRV715)
C622	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C763	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C623	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				(TRV75/TRV75PK/TRV715)
C624	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C764	1-135-259-11	TANTAL. CHIP	10uF 20% 6.3V
							(TRV75/TRV75PK/TRV715)
C625	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C765	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C626	1-164-156-11	CERAMIC CHIP	0.1uF 25V				(TRV75/TRV75PK/TRV715)
C627	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V	C766	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C628	1-162-919-11	CERAMIC CHIP	22PF 5% 50V				(TRV75/TRV75PK/TRV715)
C629	1-162-917-11	CERAMIC CHIP	15PF 5% 50V	C767	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
							(TRV75/TRV75PK/TRV715)
C630	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C768	1-162-909-11	CERAMIC CHIP	4PF 0.25PF 50V
C634	1-164-156-11	CERAMIC CHIP	0.1uF 25V				(TRV75/TRV75PK/TRV715)
			(EXCEPT TRV3E/TRV13E/TRV23E)	C769	1-107-823-11	CERAMIC CHIP	0.47uF 10% 16V
C636	1-164-156-11	CERAMIC CHIP	0.1uF 25V				(TRV75/TRV75PK/TRV715)
C637	1-162-969-11	CERAMIC CHIP	0.0068uF 10% 25V	C770	1-107-823-11	CERAMIC CHIP	0.47uF 10% 16V
C702	1-115-156-11	CERAMIC CHIP	1uF 10% 10V				(TRV75/TRV75PK/TRV715)
			(TRV69E)	C771	1-162-921-11	CERAMIC CHIP	33PF 5% 50V
C703	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				(TRV75/TRV75PK/TRV715)
			(TRV69E)	C772	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C704	1-162-924-11	CERAMIC CHIP	56PF 5% 50V				(TRV75/TRV75PK/TRV715)
			(TRV69E)	C773	1-162-922-11	CERAMIC CHIP	39PF 5% 50V
C705	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				(TRV75/TRV75PK/TRV715)
			(TRV69E)	C774	1-109-982-11	CERAMIC CHIP	1uF 10% 10V
C706	1-162-923-11	CERAMIC CHIP	47pF 5% 50V				(TRV75/TRV75PK/TRV715)
			(TRV69E)	C775	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C707	1-162-915-11	CERAMIC CHIP	10pF 0.5pF 50V				(TRV75/TRV75PK/TRV715)
			(TRV69E)				
C708	1-162-925-11	CERAMIC CHIP	68PF 5% 50V				
			(TRV69E)				
C709	1-164-156-11	CERAMIC CHIP	0.1uF 25V				
			(TRV69E)				

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C776	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV75/TRV75PK/TRV715)		FB205	1-414-228-11	INDUCTOR CHIP 0UH (TRV55E/TRV65E/TRV75/TRV75PK/TRV715)	
C777	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV75/TRV75PK/TRV715)		FB206	1-414-228-11	INDUCTOR CHIP 0UH	
C778	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V (TRV75/TRV75PK/TRV715)		FB501	1-414-228-11	INDUCTOR CHIP 0UH	
C781	1-104-847-11	TANTAL. CHIP 22uF 20% 4V (TRV75/TRV75PK/TRV715)		FB503	1-500-284-21	INDUCTOR CHIP 0UH	
		< CONNECTOR >		FB504	1-500-284-21	INDUCTOR CHIP 0UH	
CN001	1-766-677-21	CONNECTOR, FFC/FPC 16P		FB505	1-500-284-21	INDUCTOR CHIP 0UH (TRV3E/TRV13E/TRV23E)	
CN501	1-779-332-11	CONNECTOR, FFC/FPC 16P		FB506	1-414-228-11	INDUCTOR CHIP 0UH	
CN551	1-766-353-21	CONNECTOR, FFC/FPC 23P (TRV3E/TRV13E/TRV23E/TRV45E/TRV55E/TRV65E/TRV69E)		FB701	1-414-228-11	INDUCTOR CHIP 0UH (TRV69E)	
CN901	1-766-644-21	CONNECTOR, FFC/FPC 8P		FB702	1-414-921-11	INDUCTOR CHIP 0UH (TRV69E)	
CN902	1-766-673-21	CONNECTOR, FFC/FPC 12P				< IC >	
CN903	1-766-353-21	CONNECTOR, FFC/FPC 23P		IC001	8-752-079-46	IC CXA2084R-T6	
CN904	1-691-374-11	CONNECTOR, FFC/FPC 10P		IC151	8-752-078-82	IC CXA2030R-T6	
CN905	1-766-646-21	CONNECTOR, FFC/FPC 10P		IC152	8-759-169-02	IC MB88344BPFV-G-BND-ER	
CN906	1-766-673-21	CONNECTOR, FFC/FPC 12P		IC201	8-759-494-73	IC MB90097PFV-G-104-ER	
CN907	1-766-346-21	CONNECTOR, FFC/FPC 16P		IC202	8-759-494-55	IC MB87F126DPFF-G-BND	
CN908	1-766-345-21	CONNECTOR, FFC/FPC 15P		IC204	8-752-389-54	IC CXD3124R-T6 (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
CN909	1-766-621-21	CONNECTOR, FFC/FPC 10P (EXCEPT TRV3E/TRV13E/TRV23E)		IC204	8-752-390-53	IC CXD3131R-T6 (TRV55E)	
CN910	1-766-346-21	CONNECTOR, FFC/FPC 16P		IC301	8-759-494-29	IC AN2982FH-EB (EXCEPT TRV3E/TRV13E/TRV23E)	
CN911	1-778-637-21	CONNECTOR, FFC/FPC (ZIF) 50P		IC301	8-759-494-30	IC AN2984FH-EB (TRV3E/TRV13E/TRV23E)	
CN912	1-766-677-21	CONNECTOR, FFC/FPC 16P		IC371	8-759-494-52	IC BA7783FS-E2	
CN914	1-691-542-21	CONNECTOR, BOARD TO BOARD 48P		IC401	8-759-445-94	IC AK6480AM-E2	
		< DIODE >		IC402	8-759-529-57	IC MB91191PFF-G-108-BND	
D002	8-719-404-49	DIODE MA111-TX (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)		IC451	8-759-327-67	IC LB1950V-TLM	
D201	8-719-055-86	DIODE KV1470TL1-3		IC452	8-759-327-62	IC TA8482FN-EL (EXCEPT TRV75/TRV75PK/TRV715)	
D202	8-719-055-86	DIODE KV1470TL1-3		IC452	8-759-327-61	IC LB8112V-TLM (TRV75/TRV75PK/TRV715)	
D371	8-719-404-49	DIODE MA111-TX		IC501	8-752-384-70	IC CXD2486R-T4	
D502	8-713-102-28	DIODE 1T379-04-T8A		IC502	8-759-462-43	IC AD9800JCSTRL	
D551	8-719-404-49	DIODE MA111-TX		IC551	8-759-444-87	IC NJM324V(TE2)	
D601	8-719-421-27	DIODE MA728-TX		IC552	8-759-475-79	IC uPD16833AG3-E2 (EXCEPT TRV75/TRV75PK/TRV715)	
D602	8-719-421-27	DIODE MA728-TX		IC552	8-759-351-46	IC MPC17A34RVMEL (TRV75/TRV75PK/TRV715)	
D604	8-719-404-49	DIODE MA111-TX		IC602	8-759-424-79	IC S-8423YFS-T2	
D608	8-719-404-49	DIODE MA111-TX		IC603	8-759-059-05	IC TL1596CPW-ELM1000	
D609	8-719-049-09	DIODE 1SS367-T3SONY		IC604	8-759-532-17	IC S579214PZ-TEB	
D610	8-719-421-27	DIODE MA728-TX		IC701	8-759-421-52	IC MB87B110CPFV-G-BND-ER (TRV69E)	
D910	8-719-059-57	DIODE MAZJ082DFLSO (EXCEPT TRV3E/TRV13E/TRV23E)		IC751	8-759-498-52	IC LA9511W-TBM (TRV75/TRV75PK/TRV715)	
D911	8-719-420-14	DIODE MA8082-TX (EXCEPT TRV3E/TRV13E/TRV23E)				< COIL >	
		< FERRITE BEAD >		L001	1-414-406-11	INDUCTOR 220uH	
FB001	1-414-229-11	INDUCTOR CHIP 0UH		L002	1-412-952-11	INDUCTOR 12uH	
FB002	1-414-229-11	INDUCTOR CHIP 0UH		L003	1-414-406-11	INDUCTOR 220uH	
FB003	1-414-229-11	INDUCTOR CHIP 0UH		L004	1-414-754-11	INDUCTOR 10uH	
FB004	1-414-229-11	INDUCTOR CHIP 0UH		L005	1-412-948-11	INDUCTOR 5.6uH	
FB151	1-414-228-11	INDUCTOR CHIP 0UH		L006	1-412-963-11	INDUCTOR 100uH	
FB152	1-414-921-11	INDUCTOR CHIP 0UH		L008	1-412-280-31	INDUCTOR 330uH	
FB201	1-414-228-11	INDUCTOR CHIP 0UH		L009	1-410-656-11	INDUCTOR CHIP 150uH	
FB202	1-414-228-11	INDUCTOR CHIP 0UH		L010	1-410-657-21	INDUCTOR CHIP 180uH	
FB203	1-414-228-11	INDUCTOR CHIP 0UH		L011	1-412-956-21	INDUCTOR 27uH (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
FB204	1-414-228-11	INDUCTOR CHIP 0UH (TRV55E/TRV65E/TRV75/TRV75PK/TRV715)		L012	1-412-955-11	INDUCTOR 22uH	
				L013	1-412-944-11	INDUCTOR 2.7uH	
				L015	1-412-951-11	INDUCTOR 10uH	
				L016	1-412-946-11	INDUCTOR 3.9uH	
				L017	1-414-754-11	INDUCTOR 10uH	

Ref. No.	Part No.	Description	Remark
L018	1-410-656-11	INDUCTOR CHIP 150uH	
L019	1-412-957-11	INDUCTOR 33uH	
L152	1-412-937-11	INDUCTOR 0.68uH	
		(TRV45E/TRV55E/TRV65E/TRV69E)	
L152	1-412-939-11	INDUCTOR 1uH	
		(TRV75/TRV75PK/TRV715)	
L153	1-414-754-11	INDUCTOR 10uH	
L154	1-414-754-11	INDUCTOR 10uH	
L155	1-414-754-11	INDUCTOR 10uH	
L156	1-414-754-11	INDUCTOR 10uH	
L201	1-414-754-11	INDUCTOR 10uH	
L202	1-414-754-11	INDUCTOR 10uH	
L203	1-414-754-11	INDUCTOR 10uH	
L204	1-410-658-31	INDUCTOR CHIP 220uH	
L205	1-412-955-11	INDUCTOR 22uH	
		(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
L205	1-412-957-11	INDUCTOR 33uH	
		(TRV3E/TRV13E/TRV23E/TRV45E/TRV55E)	
L206	1-412-945-11	INDUCTOR 3.3uH	
L207	1-414-754-11	INDUCTOR 10uH	
L209	1-414-754-11	INDUCTOR 10uH	
L402	1-414-754-11	INDUCTOR 10uH	
L501	1-414-398-11	INDUCTOR 10uH	
L502	1-216-295-91	SHORT 0 (TRV3E/TRV13E/TRV23E)	
L502	1-412-955-11	INDUCTOR 22uH	
		(EXCEPT TRV3E/TRV13E/TRV23E)	
L552	1-414-398-11	INDUCTOR 10uH	
L553	1-414-754-11	INDUCTOR 10uH	
L555	1-414-754-11	INDUCTOR 10uH	
L602	1-414-754-11	INDUCTOR 10uH	
L701	1-414-754-11	INDUCTOR 10uH (TRV69E)	
L702	1-412-950-11	INDUCTOR 8.2uH (TRV69E)	
L704	1-410-658-31	INDUCTOR CHIP 220uH (TRV69E)	
L751	1-412-948-11	INDUCTOR 5.6uH	
		(TRV75/TRV75PK/TRV715)	
L752	1-412-957-11	INDUCTOR 33uH	
		(TRV75/TRV75PK/TRV715)	
L753	1-412-957-11	INDUCTOR 33uH	
		(TRV75/TRV75PK/TRV715)	
< TRANSISTOR >			
Q001	8-729-031-69	TRANSISTOR 2SA1965-TL	
Q002	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)	
Q003	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)	
Q004	8-729-031-69	TRANSISTOR 2SA1965-TL	
		(TRV75/TRV75PK/TRV715)	
Q005	8-729-031-69	TRANSISTOR 2SA1965-TL	
		(TRV75/TRV75PK/TRV715)	
Q006	8-729-031-69	TRANSISTOR 2SA1965-TL	
		(TRV75/TRV75PK/TRV715)	
Q007	8-729-031-69	TRANSISTOR 2SA1965-TL	
		(TRV75/TRV75PK/TRV715)	
Q008	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
		(TRV75/TRV75PK/TRV715)	
Q009	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
		(TRV75/TRV75PK/TRV715)	
Q010	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
		(TRV75/TRV75PK/TRV715)	
Q011	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
		(TRV75/TRV75PK/TRV715)	
Q012	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	

Ref. No.	Part No.	Description	Remark
Q017	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
Q018	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3) (TRV69E)	
Q019	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
Q020	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
Q021	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
Q022	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
		(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
Q023	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
Q024	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
Q025	8-729-037-89	TRANSISTOR 2SC4627J-C(K8).SO	
		(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
Q026	8-729-031-69	TRANSISTOR 2SA1965-TL	
		(TRV75/TRV75PK/TRV715)	
Q027	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)	
Q028	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
Q029	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)	
Q030	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)	
		(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
Q032	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)	
Q033	8-729-031-69	TRANSISTOR 2SA1965-TL	
Q034	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)	
Q036	8-729-037-89	TRANSISTOR 2SC4627J-C(K8).SO	
Q038	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
Q039	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
Q040	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
Q041	8-729-230-72	TRANSISTOR 2SA1362-YG-EL	
Q042	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
Q043	8-729-031-69	TRANSISTOR 2SA1965-TL	
		(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
Q044	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
		(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
Q151	8-729-037-61	TRANSISTOR RN2104F(TPL3)	
Q153	8-729-040-77	TRANSISTOR 2SC5376-B(TE85L)	
Q154	8-729-040-77	TRANSISTOR 2SC5376-B(TE85L)	
		(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
Q156	8-729-040-77	TRANSISTOR 2SC5376-B(TE85L)	
		(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
Q202	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
Q203	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)	
Q204	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
Q205	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
Q208	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
		(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	
Q213	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
Q214	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
Q215	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)	
Q217	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)	
Q301	8-729-042-74	TRANSISTOR UN9216J-(K8).SO	
		(EXCEPT TRV3E/TRV13E/TRV23E)	
Q302	8-729-042-74	TRANSISTOR UN9216J-(K8).SO	
Q305	8-729-037-63	TRANSISTOR UN9115J-(K8).SO	
Q306	8-729-037-76	TRANSISTOR UN9215J-(K8).SO	
Q307	8-729-037-76	TRANSISTOR UN9215J-(K8).SO	
		(EXCEPT TRV3E/TRV13E/TRV23E)	
Q308	8-729-037-61	TRANSISTOR RN2104F(TPL3)	
Q309	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
Q310	8-729-037-74	TRANSISTOR UN9213J-(K8).SO	
		(TRV75/TRV75PK/TRV715)	
Q371	8-729-042-74	TRANSISTOR UN9216J-(K8).SO	
Q372	8-729-042-74	TRANSISTOR UN9216J-(K8).SO	
		(EXCEPT TRV3E/TRV13E/TRV23E)	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
Q452	8-729-037-74	TRANSISTOR UN9213J-(K8).SO		R029	1-216-837-11	METAL CHIP 22K 5% 1/16W	
Q453	8-729-037-74	TRANSISTOR UN9213J-(K8).SO		R031	1-216-837-11	METAL CHIP 22K 5% 1/16W	
Q454	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)		R032	1-216-816-11	METAL CHIP 390 5% 1/16W	
Q455	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)		R033	1-216-816-11	METAL CHIP 390 5% 1/16W	
Q456	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)		R034	1-216-864-11	METAL CHIP 0 5% 1/16W	(EXCEPT TRV69E)
Q501	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)		R035	1-216-841-11	METAL CHIP 47K 5% 1/16W	
Q551	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)		R037	1-216-824-11	METAL CHIP 1.8K 5% 1/16W	
Q552	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)		R038	1-216-841-11	METAL CHIP 47K 5% 1/16W	
Q553	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)		R039	1-216-824-11	METAL CHIP 1.8K 5% 1/16W	
Q607	8-729-041-43	TRANSISTOR HN1L02FU(TE85R)		R040	1-216-864-11	METAL CHIP 0 5% 1/16W	
Q608	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)		R043	1-216-833-11	METAL CHIP 10K 5% 1/16W	(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)
Q609	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3)		R045	1-216-845-11	METAL CHIP 100K 5% 1/16W	
Q610	8-729-037-74	TRANSISTOR UN9213J-(K8).SO		R046	1-216-821-11	METAL CHIP 1K 5% 1/16W	
Q611	8-729-037-74	TRANSISTOR UN9213J-(K8).SO		R047	1-216-864-11	METAL CHIP 0 5% 1/16W	(EXCEPT TRV69E)
Q619	8-729-037-53	TRANSISTOR 2SA1832F-Y/GR(TPL3)	(EXCEPT TRV3E/TRV13E/TRV23E)	R048	1-216-864-11	METAL CHIP 0 5% 1/16W	(EXCEPT TRV69E)
Q620	8-729-042-58	TRANSISTOR UN9111J-(K8).SO		R049	1-216-833-11	METAL CHIP 10K 5% 1/16W	
Q701	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3) (TRV69E)		R050	1-216-837-11	METAL CHIP 22K 5% 1/16W	
Q702	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3) (TRV69E)		R051	1-216-825-11	METAL CHIP 2.2K 5% 1/16W	
Q703	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3) (TRV69E)		R052	1-216-833-11	METAL CHIP 10K 5% 1/16W	
Q704	8-729-037-61	TRANSISTOR RN2104(TPL3) (TRV69E)		R055	1-216-830-11	METAL CHIP 5.6K 5% 1/16W	(EXCEPT TRV75/TRV75PK/TRV715)
Q705	8-729-037-52	TRANSISTOR 2SC4738F-Y/GR(TPL3) (TRV69E)		R055	1-216-829-11	METAL CHIP 4.7K 5% 1/16W	(TRV75/TRV75PK/TRV715)
< RESISTOR >				R056	1-216-855-11	METAL CHIP 680K 5% 1/16W	
R001	1-216-864-11	METAL CHIP 0 5% 1/16W	(EXCEPT TRV75/TRV75PK/TRV715)	R057	1-216-819-11	METAL CHIP 680 5% 1/16W	(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)
R002	1-216-864-11	METAL CHIP 0 5% 1/16W	(EXCEPT TRV75/TRV75PK/TRV715)	R057	1-216-864-11	METAL CHIP 0 5% 1/16W	(TRV3E/TRV13E/TRV23E/TRV45E/TRV55E)
R003	1-216-806-11	RES.CHIP 56 5% 1/16W		R058	1-216-853-11	METAL CHIP 470K 5% 1/16W	
R004	1-216-818-11	METAL CHIP 560 5% 1/16W		R059	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R005	1-216-809-11	METAL CHIP 100 5% 1/16W		R060	1-216-837-11	METAL CHIP 22K 5% 1/16W	
R006	1-216-825-11	METAL CHIP 2.2K 5% 1/16W		R061	1-216-833-11	METAL CHIP 10K 5% 1/16W	
R007	1-216-829-11	METAL CHIP 4.7K 5% 1/16W		R062	1-216-818-11	METAL CHIP 560 5% 1/16W	
R008	1-216-814-11	METAL CHIP 270 5% 1/16W		R063	1-216-817-11	METAL CHIP 470 5% 1/16W	(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)
R009	1-216-813-11	METAL CHIP 220 5% 1/16W		R063	1-216-818-11	METAL CHIP 560 5% 1/16W	(TRV3E/TRV13E/TRV23E/TRV45E/TRV55E)
R010	1-216-828-11	METAL CHIP 3.9K 5% 1/16W	(TRV75/TRV75PK/TRV715)	R064	1-216-828-11	METAL CHIP 3.9K 5% 1/16W	(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)
R011	1-216-828-11	METAL CHIP 3.9K 5% 1/16W	(TRV75/TRV75PK/TRV715)	R064	1-216-864-11	METAL CHIP 0 5% 1/16W	(TRV3E/TRV13E/TRV23E/TRV45E/TRV55E)
R012	1-216-828-11	METAL CHIP 3.9K 5% 1/16W	(TRV75/TRV75PK/TRV715)	R065	1-216-833-11	METAL CHIP 10K 5% 1/16W	(TRV65E/TRV69E/TRV75/TRV75PK/TRV715)
R013	1-216-828-11	METAL CHIP 3.9K 5% 1/16W	(TRV75/TRV75PK/TRV715)	R066	1-216-823-11	METAL CHIP 1.5K 5% 1/16W	(EXCEPT TRV75/TRV75PK/TRV715)
R014	1-216-837-11	METAL CHIP 22K 5% 1/16W		R066	1-216-825-11	METAL CHIP 2.2K 5% 1/16W	(TRV75/TRV75PK/TRV715)
R015	1-216-839-11	METAL CHIP 33K 5% 1/16W		R067	1-216-817-11	METAL CHIP 470 5% 1/16W	
R016	1-216-829-11	METAL CHIP 4.7K 5% 1/16W	(TRV75/TRV75PK/TRV715)	R068	1-216-817-11	METAL CHIP 470 5% 1/16W	
R017	1-216-829-11	METAL CHIP 4.7K 5% 1/16W	(TRV75/TRV75PK/TRV715)	R069	1-216-864-11	METAL CHIP 0 5% 1/16W	
R018	1-216-829-11	METAL CHIP 4.7K 5% 1/16W	(TRV75/TRV75PK/TRV715)	R072	1-216-864-11	METAL CHIP 0 5% 1/16W	
R019	1-216-829-11	METAL CHIP 4.7K 5% 1/16W	(TRV75/TRV75PK/TRV715)	R073	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R020	1-216-837-11	METAL CHIP 22K 5% 1/16W		R074	1-216-816-11	METAL CHIP 390 5% 1/16W	
R021	1-216-837-11	METAL CHIP 22K 5% 1/16W		R075	1-216-817-11	METAL CHIP 470 5% 1/16W	
R023	1-216-837-11	METAL CHIP 22K 5% 1/16W		R076	1-216-816-11	METAL CHIP 390 5% 1/16W	
R025	1-216-837-11	METAL CHIP 22K 5% 1/16W		R077	1-216-814-11	METAL CHIP 270 5% 1/16W	(TRV3E/TRV13E/TRV23E/TRV45E/TRV55E)
R026	1-216-816-11	METAL CHIP 390 5% 1/16W					
R027	1-216-816-11	METAL CHIP 390 5% 1/16W					

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R078	1-216-815-11	METAL CHIP	330	5%	1/16W (TRV75/TRV75PK/TRV715)	R166	1-216-804-11	METAL CHIP	39	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)
R078	1-216-817-11	METAL CHIP	470	5%	1/16W (TRV65E/TRV69E)	R167	1-216-803-11	METAL CHIP	33	5%	1/16W
R079	1-216-815-11	METAL CHIP	330	5%	1/16W (TRV75/TRV75PK/TRV715)	R170	1-216-804-11	METAL CHIP	39	5%	1/16W
R079	1-216-817-11	METAL CHIP	470	5%	1/16W (TRV65E/TRV69E)	R175	1-216-836-11	METAL CHIP	18K	5%	1/16W (EXCEPT TRV75/TRV75PK/TRV715)
R080	1-216-813-11	METAL CHIP	220	5%	1/16W (TRV75/TRV75PK/TRV715)	R175	1-216-837-11	METAL CHIP	22K	5%	1/16W (TRV75/TRV75PK/TRV715)
R080	1-216-821-11	METAL CHIP	1K	5%	1/16W (TRV65E/TRV69E)	R176	1-216-837-11	METAL CHIP	22K	5%	1/16W (EXCEPT TRV3E/TRV13E/TRV23E)
R081	1-216-826-11	METAL CHIP	2.7K	5%	1/16W	R177	1-216-821-11	METAL CHIP	1K	5%	1/16W
R082	1-216-822-11	METAL CHIP	1.2K	5%	1/16W	R178	1-216-821-11	METAL CHIP	1K	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)
R083	1-216-820-11	METAL CHIP	820	5%	1/16W (TRV75/TRV75PK/TRV715)	R179	1-216-815-11	METAL CHIP	330	5%	1/16W
R083	1-216-864-11	METAL CHIP	0	5%	1/16W (TRV65E/TRV69E)	R180	1-216-815-11	METAL CHIP	330	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)
R084	1-216-833-11	METAL CHIP	10K	5%	1/16W (TRV75/TRV75PK/TRV715)	R183	1-218-876-11	RES.CHIP	16K	0.50%	1/16W
R085	1-216-833-11	METAL CHIP	10K	5%	1/16W	R184	1-218-847-11	RES.CHIP	1K	0.50%	1/16W
R087	1-216-821-11	METAL CHIP	1K	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	R202	1-216-833-11	METAL CHIP	10K	5%	1/16W
R088	1-216-864-11	METAL CHIP	0	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	R203	1-216-814-11	METAL CHIP	270	5%	1/16W
R092	1-216-809-11	METAL CHIP	100	5%	1/16W	R205	1-216-835-11	METAL CHIP	15K	5%	1/16W
R093	1-216-833-11	METAL CHIP	10K	5%	1/16W	R206	1-216-827-11	METAL CHIP	3.3K	5%	1/16W
R094	1-216-814-11	METAL CHIP	270	5%	1/16W (TRV65E/TRV69E)	R208	1-216-827-11	METAL CHIP	3.3K	5%	1/16W
R094	1-216-815-11	METAL CHIP	330	5%	1/16W (TRV75/TRV75PK/TRV715)	R210	1-216-809-11	METAL CHIP	100	5%	1/16W
R095	1-216-839-11	METAL CHIP	33K	5%	1/16W	R211	1-216-830-11	METAL CHIP	5.6K	5%	1/16W
R096	1-216-813-11	METAL CHIP	220	5%	1/16W	R212	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R098	1-216-817-11	METAL CHIP	470	5%	1/16W	R214	1-216-823-11	METAL CHIP	1.5K	5%	1/16W
R099	1-216-817-11	METAL CHIP	470	5%	1/16W	R215	1-216-822-11	METAL CHIP	1.2K	5%	1/16W
R101	1-216-837-11	METAL CHIP	22K	5%	1/16W	R216	1-216-811-11	METAL CHIP	150	5%	1/16W
R102	1-216-834-11	METAL CHIP	12K	5%	1/16W	R217	1-216-864-11	METAL CHIP	0	5%	1/16W (TRV3E/TRV13E/TRV23E)
R103	1-216-816-11	METAL CHIP	390	5%	1/16W	R218	1-216-826-11	METAL CHIP	2.7K	5%	1/16W
R104	1-216-828-11	METAL CHIP	3.9K	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	R219	1-216-826-11	METAL CHIP	2.7K	5%	1/16W
R105	1-216-814-11	METAL CHIP	270	5%	1/16W (TRV3E/TRV13E/TRV23E/TRV45E/TRV55E)	R220	1-216-815-11	METAL CHIP	330	5%	1/16W
R105	1-216-819-11	METAL CHIP	680	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	R223	1-216-821-11	METAL CHIP	1K	5%	1/16W
R106	1-216-823-11	METAL CHIP	1.5K	5%	1/16W	R224	1-216-831-11	METAL CHIP	6.8K	5%	1/16W
R107	1-216-833-11	METAL CHIP	10K	5%	1/16W	R225	1-216-826-11	METAL CHIP	2.7K	5%	1/16W
R109	1-216-829-11	METAL CHIP	4.7K	5%	1/16W	R226	1-216-820-11	METAL CHIP	820	5%	1/16W
R110	1-216-829-11	METAL CHIP	4.7K	5%	1/16W	R227	1-216-811-11	METAL CHIP	150	5%	1/16W
R112	1-216-833-11	METAL CHIP	10K	5%	1/16W	R228	1-216-813-11	METAL CHIP	220	5%	1/16W
R113	1-216-825-11	METAL CHIP	2.2K	5%	1/16W	R229	1-216-805-11	METAL CHIP	47	5%	1/16W
R152	1-216-822-11	METAL CHIP	1.2K	5%	1/16W	R230	1-216-812-11	METAL CHIP	180	5%	1/16W
R154	1-216-822-11	METAL CHIP	1.2K	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	R231	1-216-812-11	METAL CHIP	180	5%	1/16W
R157	1-216-822-11	METAL CHIP	1.2K	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	R232	1-216-815-11	METAL CHIP	330	5%	1/16W
R161	1-216-804-11	METAL CHIP	39	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	R233	1-216-824-11	METAL CHIP	1.8K	5%	1/16W
R162	1-216-803-11	METAL CHIP	33	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	R234	1-216-832-11	METAL CHIP	8.2K	5%	1/16W
R165	1-216-803-11	METAL CHIP	33	5%	1/16W (TRV65E/TRV69E/TRV75/TRV75PK/TRV715)	R236	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
						R237	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
						R238	1-216-832-11	METAL CHIP	8.2K	5%	1/16W
						R239	1-216-827-11	METAL CHIP	3.3K	5%	1/16W
						R240	1-216-857-11	METAL CHIP	1M	5%	1/16W
						R241	1-216-828-11	METAL CHIP	3.9K	5%	1/16W
						R242	1-216-845-11	METAL CHIP	100K	5%	1/16W
						R243	1-216-845-11	METAL CHIP	100K	5%	1/16W
						R244	1-216-845-11	METAL CHIP	100K	5%	1/16W
						R245	1-216-840-11	METAL CHIP	39K	5%	1/16W
						R246	1-216-835-11	METAL CHIP	15K	5%	1/16W
						R247	1-216-817-11	METAL CHIP	470	5%	1/16W
						R248	1-216-822-11	METAL CHIP	1.2K	5%	1/16W

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
R249	1-216-833-11	METAL CHIP	10K 5% 1/16W	R403	1-216-845-11	METAL CHIP	100K 5% 1/16W
R250	1-216-295-91	SHORT	0	R404	1-216-845-11	METAL CHIP	100K 5% 1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)					
R251	1-216-833-11	METAL CHIP	10K 5% 1/16W	R405	1-216-845-11	METAL CHIP	100K 5% 1/16W
R252	1-216-821-11	METAL CHIP	1K 5% 1/16W	R406	1-216-845-11	METAL CHIP	100K 5% 1/16W
R253	1-216-845-11	METAL CHIP	100K 5% 1/16W	R407	1-216-845-11	METAL CHIP	100K 5% 1/16W
R254	1-216-864-11	METAL CHIP	0 5% 1/16W	R409	1-216-845-11	METAL CHIP	100K 5% 1/16W
		(EXCEPT TRV55E)		R410	1-216-829-11	METAL CHIP	4.7K 5% 1/16W
R255	1-216-833-11	METAL CHIP	10K 5% 1/16W	R412	1-216-829-11	METAL CHIP	4.7K 5% 1/16W
R256	1-216-845-11	METAL CHIP	100K 5% 1/16W	R414	1-216-864-11	METAL CHIP	0 5% 1/16W
R257	1-216-295-91	SHORT	0	R415	1-216-821-11	METAL CHIP	1K 5% 1/16W
R302	1-216-817-11	METAL CHIP	470 5% 1/16W	R416	1-216-821-11	METAL CHIP	1K 5% 1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)		R417	1-216-821-11	METAL CHIP	1K 5% 1/16W
R303	1-216-817-11	METAL CHIP	470 5% 1/16W	R418	1-216-821-11	METAL CHIP	1K 5% 1/16W
R304	1-216-817-11	METAL CHIP	470 5% 1/16W	R419	1-216-839-11	METAL CHIP	33K 5% 1/16W
R305	1-216-817-11	METAL CHIP	470 5% 1/16W	R420	1-216-833-11	METAL CHIP	10K 5% 1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)		R421	1-216-833-11	METAL CHIP	10K 5% 1/16W
R308	1-216-864-11	METAL CHIP	0 5% 1/16W	R424	1-216-841-11	METAL CHIP	47K 5% 1/16W
		(TRV3E/TRV13E/TRV23E)		R425	1-216-853-11	METAL CHIP	470K 5% 1/16W
R311	1-216-841-11	METAL CHIP	47K 5% 1/16W	R426	1-216-825-11	METAL CHIP	2.2K 5% 1/16W
R313	1-216-864-11	METAL CHIP	0 5% 1/16W	R427	1-216-841-11	METAL CHIP	47K 5% 1/16W
R314	1-216-823-11	METAL CHIP	1.5K 5% 1/16W	R428	1-216-841-11	METAL CHIP	47K 5% 1/16W
R315	1-216-823-11	METAL CHIP	1.5K 5% 1/16W	R429	1-216-811-11	METAL CHIP	150 5% 1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)		R430	1-216-813-11	METAL CHIP	220 5% 1/16W
R316	1-216-841-11	METAL CHIP	47K 5% 1/16W	R431	1-216-825-11	METAL CHIP	2.2K 5% 1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)		R432	1-216-845-11	METAL CHIP	100K 5% 1/16W
R317	1-216-845-11	METAL CHIP	100K 5% 1/16W	R433	1-216-845-11	METAL CHIP	100K 5% 1/16W
R318	1-216-845-11	METAL CHIP	100K 5% 1/16W	R434	1-216-853-11	METAL CHIP	470K 5% 1/16W
R319	1-216-845-11	METAL CHIP	100K 5% 1/16W	R435	1-216-853-11	METAL CHIP	470K 5% 1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)		R440	1-216-841-11	METAL CHIP	47K 5% 1/16W
R320	1-216-849-11	METAL CHIP	220K 5% 1/16W	R441	1-216-845-11	METAL CHIP	100K 5% 1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)		R452	1-217-671-11	METAL CHIP	1 5% 1/10W
R321	1-216-843-11	METAL CHIP	68K 5% 1/16W	R453	1-217-671-11	METAL CHIP	1 5% 1/10W
R322	1-216-845-11	METAL CHIP	100K 5% 1/16W	R454	1-217-671-11	METAL CHIP	1 5% 1/10W
		(TRV3E/TRV13E/TRV23E)		R455	1-216-833-11	METAL CHIP	10K 5% 1/16W
R322	1-216-849-11	METAL CHIP	220K 5% 1/16W	R456	1-216-833-11	METAL CHIP	10K 5% 1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)		R457	1-216-833-11	METAL CHIP	10K 5% 1/16W
R323	1-216-837-11	METAL CHIP	22K 5% 1/16W	R458	1-216-808-11	METAL CHIP	82 5% 1/16W
R325	1-216-849-11	METAL CHIP	220K 5% 1/16W	R459	1-216-864-11	METAL CHIP	0 5% 1/16W
		(TRV3E/TRV13E/TRV23E)		R460	1-216-864-11	METAL CHIP	0 5% 1/16W
R325	1-216-851-11	METAL CHIP	330K 5% 1/16W	R461	1-216-853-11	METAL CHIP	470K 5% 1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)		R462	1-216-853-11	METAL CHIP	470K 5% 1/16W
R328	1-162-925-11	CERAMIC CHIP	68PF 5% 50V	R463	1-216-853-11	METAL CHIP	470K 5% 1/16W
R331	1-216-820-11	METAL CHIP	820 5% 1/16W	R464	1-216-851-11	METAL CHIP	330K 5% 1/16W
R343	1-216-864-11	METAL CHIP	0 5% 1/16W	R465	1-216-845-11	METAL CHIP	100K 5% 1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)		R466	1-216-841-11	METAL CHIP	47K 5% 1/16W
R371	1-216-821-11	METAL CHIP	1K 5% 1/16W	R467	1-216-833-11	METAL CHIP	10K 5% 1/16W
R373	1-216-809-11	METAL CHIP	100 5% 1/16W	R468	1-216-833-11	METAL CHIP	10K 5% 1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)		R469	1-216-841-11	METAL CHIP	47K 5% 1/16W
R374	1-216-809-11	METAL CHIP	100 5% 1/16W	R470	1-216-829-11	METAL CHIP	4.7K 5% 1/16W
R375	1-216-834-11	METAL CHIP	12K 5% 1/16W	R471	1-216-833-11	METAL CHIP	10K 5% 1/16W
R376	1-216-834-11	METAL CHIP	12K 5% 1/16W	R472	1-216-837-11	METAL CHIP	22K 5% 1/16W
R377	1-216-834-11	METAL CHIP	12K 5% 1/16W			(EXCEPT TRV75/TRV75PK/TRV715)	
R378	1-216-825-11	METAL CHIP	2.2K 5% 1/16W	R472	1-216-833-11	METAL CHIP	10K 5% 1/16W
R379	1-216-852-11	METAL CHIP	390K 5% 1/16W			(TRV75/TRV75PK/TRV715)	
R382	1-216-837-11	METAL CHIP	22K 5% 1/16W	R473	1-216-841-11	METAL CHIP	47K 5% 1/16W
R383	1-216-837-11	METAL CHIP	22K 5% 1/16W	R474	1-216-817-11	METAL CHIP	470 5% 1/16W
R384	1-216-829-11	METAL CHIP	4.7K 5% 1/16W	R475	1-216-838-11	METAL CHIP	27K 5% 1/16W
R385	1-216-826-11	METAL CHIP	2.7K 5% 1/16W	R476	1-216-817-11	METAL CHIP	470 5% 1/16W
R386	1-216-849-11	METAL CHIP	220K 5% 1/16W	R477	1-216-864-11	METAL CHIP	0 5% 1/16W
R402	1-216-821-11	METAL CHIP	1K 5% 1/16W				

Ref. No.	Part No.	Description	Remark		
R479	1-216-864-11	METAL CHIP	0	5%	1/16W
R480	1-216-864-11	METAL CHIP	0	5%	1/16W
R481	1-216-864-11	METAL CHIP	0	5%	1/16W
R482	1-216-830-11	METAL CHIP	5.6K	5%	1/16W
		(EXCEPT TRV75/TRV75PK/TRV715)			
R482	1-216-833-11	METAL CHIP	10K	5%	1/16W
		(TRV75/TRV75PK/TRV715)			
R483	1-216-836-11	METAL CHIP	18K	5%	1/16W
R484	1-217-671-11	METAL CHIP	1	5%	1/10W
R485	1-217-671-11	METAL CHIP	1	5%	1/10W
R486	1-216-845-11	METAL CHIP	100K	5%	1/16W
R487	1-216-827-11	METAL CHIP	3.3K	5%	1/16W
R488	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
R490	1-216-023-00	METAL CHIP	82	5%	1/10W
R502	1-216-798-11	RES.CHIP	12	5%	1/16W
R503	1-216-798-11	RES.CHIP	12	5%	1/16W
R504	1-216-845-11	METAL CHIP	100K	5%	1/16W
R505	1-216-864-11	METAL CHIP	0	5%	1/16W
R506	1-216-857-11	METAL CHIP	1M	5%	1/16W
R508	1-216-809-11	METAL CHIP	100	5%	1/16W
R509	1-216-864-11	METAL CHIP	0	5%	1/16W
R510	1-216-809-11	METAL CHIP	100	5%	1/16W
R511	1-216-809-11	METAL CHIP	100	5%	1/16W
		(TRV3E/TRV13E/TRV23E)			
R512	1-216-853-11	METAL CHIP	470K	5%	1/16W
R513	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R514	1-216-821-11	METAL CHIP	1K	5%	1/16W
R515	1-216-864-11	METAL CHIP	0	5%	1/16W
R522	1-216-864-11	METAL CHIP	0	5%	1/16W
R525	1-216-864-11	METAL CHIP	0	5%	1/16W
R526	1-216-864-11	METAL CHIP	0	5%	1/16W
R527	1-216-864-11	METAL CHIP	0	5%	1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)			
R529	1-216-864-11	METAL CHIP	0	5%	1/16W
R551	1-216-841-11	METAL CHIP	47K	5%	1/16W
R554	1-216-843-11	METAL CHIP	68K	5%	1/16W
R555	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
R556	1-216-001-00	METAL CHIP	10	5%	1/10W
R557	1-216-843-11	METAL CHIP	68K	5%	1/16W
R558	1-216-295-91	SHORT	0		
R560	1-216-821-11	METAL CHIP	1K	5%	1/16W
R561	1-216-853-11	METAL CHIP	470K	5%	1/16W
R562	1-216-849-11	METAL CHIP	220K	5%	1/16W
R563	1-216-853-11	METAL CHIP	470K	5%	1/16W
R564	1-216-853-11	METAL CHIP	470K	5%	1/16W
R565	1-216-833-11	METAL CHIP	10K	5%	1/16W
R566	1-216-835-11	METAL CHIP	15K	5%	1/16W
R567	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R569	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R570	1-216-841-11	METAL CHIP	47K	5%	1/16W
R571	1-216-837-11	METAL CHIP	22K	5%	1/16W
R572	1-216-845-11	METAL CHIP	100K	5%	1/16W
R573	1-216-815-11	METAL CHIP	330	5%	1/16W
R574	1-216-821-11	METAL CHIP	1K	5%	1/16W
R575	1-216-821-11	METAL CHIP	1K	5%	1/16W
R576	1-216-821-11	METAL CHIP	1K	5%	1/16W
R577	1-216-833-11	METAL CHIP	10K	5%	1/16W
R579	1-216-821-11	METAL CHIP	1K	5%	1/16W
R582	1-216-864-11	METAL CHIP	0	5%	1/16W

Ref. No.	Part No.	Description	Remark		
R603	1-216-845-11	METAL CHIP	100K	5%	1/16W
R604	1-216-813-11	METAL CHIP	220	5%	1/16W
R605	1-216-841-11	METAL CHIP	47K	5%	1/16W
R606	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
		(TRV75/TRV75PK/TRV715)			
R608	1-216-845-11	METAL CHIP	100K	5%	1/16W
R610	1-216-821-11	METAL CHIP	1K	5%	1/16W
R611	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
		(TRV75/TRV75PK/TRV715)			
R612	1-216-853-11	METAL CHIP	470K	5%	1/16W
R613	1-216-821-11	METAL CHIP	1K	5%	1/16W
R614	1-216-821-11	METAL CHIP	1K	5%	1/16W
		(TRV75/TRV75PK/TRV715)			
R618	1-216-853-11	METAL CHIP	470K	5%	1/16W
R619	1-216-853-11	METAL CHIP	470K	5%	1/16W
R620	1-216-853-11	METAL CHIP	470K	5%	1/16W
R621	1-216-853-11	METAL CHIP	470K	5%	1/16W
R622	1-216-853-11	METAL CHIP	470K	5%	1/16W
R624	1-216-853-11	METAL CHIP	470K	5%	1/16W
R625	1-216-845-11	METAL CHIP	100K	5%	1/16W
R627	1-216-853-11	METAL CHIP	470K	5%	1/16W
R628	1-216-841-11	METAL CHIP	47K	5%	1/16W
R629	1-216-833-11	METAL CHIP	10K	5%	1/16W
R630	1-216-826-11	METAL CHIP	2.7K	5%	1/16W
R631	1-216-845-11	METAL CHIP	100K	5%	1/16W
R632	1-216-857-11	METAL CHIP	1M	5%	1/16W
R633	1-216-853-11	METAL CHIP	470K	5%	1/16W
R634	1-216-853-11	METAL CHIP	470K	5%	1/16W
R635	1-216-857-11	METAL CHIP	1M	5%	1/16W
R636	1-216-857-11	METAL CHIP	1M	5%	1/16W
R637	1-216-845-11	METAL CHIP	100K	5%	1/16W
R638	1-216-845-11	METAL CHIP	100K	5%	1/16W
R639	1-216-845-11	METAL CHIP	100K	5%	1/16W
R640	1-216-845-11	METAL CHIP	100K	5%	1/16W
R641	1-216-845-11	METAL CHIP	100K	5%	1/16W
R642	1-216-821-11	METAL CHIP	1K	5%	1/16W
R643	1-216-857-11	METAL CHIP	1M	5%	1/16W
R644	1-216-841-11	METAL CHIP	47K	5%	1/16W
R645	1-216-845-11	METAL CHIP	100K	5%	1/16W
R646	1-216-853-11	METAL CHIP	470K	5%	1/16W
R647	1-216-853-11	METAL CHIP	470K	5%	1/16W
R648	1-216-853-11	METAL CHIP	470K	5%	1/16W
R649	1-216-857-11	METAL CHIP	1M	5%	1/16W
R650	1-219-570-11	RES.CHIP	10M	5%	1/16W
R651	1-216-845-11	METAL CHIP	100K	5%	1/16W
R652	1-216-853-11	METAL CHIP	470K	5%	1/16W
R653	1-216-853-11	METAL CHIP	470K	5%	1/16W
R654	1-216-817-11	METAL CHIP	470	5%	1/16W
R655	1-216-853-11	METAL CHIP	470K	5%	1/16W
R662	1-216-841-11	METAL CHIP	47K	5%	1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)			
R663	1-216-853-11	METAL CHIP	470K	5%	1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)			
R665	1-216-853-11	METAL CHIP	470K	5%	1/16W
		(EXCEPT TRV3E/TRV13E/TRV23E)			
R666	1-216-821-11	METAL CHIP	1K	5%	1/16W
R667	1-216-821-11	METAL CHIP	1K	5%	1/16W
R668	1-216-821-11	METAL CHIP	1K	5%	1/16W
R669	1-216-821-11	METAL CHIP	1K	5%	1/16W

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R670	1-216-821-11	METAL CHIP	1K	5%	1/16W	R720	1-216-821-11	METAL CHIP	1K	5%	1/16W
R671	1-216-821-11	METAL CHIP	1K	5%	1/16W						(TRV69E)
R672	1-216-821-11	METAL CHIP	1K	5%	1/16W	R721	1-216-821-11	METAL CHIP	1K	5%	1/16W
R673	1-216-821-11	METAL CHIP	1K	5%	1/16W						(TRV69E)
R675	1-216-821-11	METAL CHIP	1K	5%	1/16W	R722	1-216-821-11	METAL CHIP	1K	5%	1/16W
R676	1-216-821-11	METAL CHIP	1K	5%	1/16W						(TRV69E)
R677	1-216-821-11	METAL CHIP	1K	5%	1/16W	R723	1-216-830-11	METAL CHIP	5.6K	5%	1/16W
											(TRV69E)
R678	1-216-821-11	METAL CHIP	1K	5%	1/16W	R724	1-216-864-11	SHORT	0		1/16W
R679	1-216-821-11	METAL CHIP	1K	5%	1/16W						(TRV69E)
R680	1-216-845-11	METAL CHIP	100K	5%	1/16W	R725	1-216-821-11	METAL CHIP	1K	5%	1/16W
R681	1-216-821-11	METAL CHIP	1K	5%	1/16W						(TRV69E)
R682	1-216-821-11	METAL CHIP	1K	5%	1/16W	R726	1-216-864-11	METAL CHIP	0	5%	1/16W
											(EXCEPT TRV69E)
R683	1-216-821-11	METAL CHIP	1K	5%	1/16W	R752	1-216-841-11	METAL CHIP	47K	5%	1/16W
R684	1-216-821-11	METAL CHIP	1K	5%	1/16W						(TRV75/TRV75PK/TRV715)
R685	1-216-821-11	METAL CHIP	1K	5%	1/16W	R753	1-216-841-11	METAL CHIP	47K	5%	1/16W
R686	1-216-821-11	METAL CHIP	1K	5%	1/16W						(TRV75/TRV75PK/TRV715)
R687	1-216-821-11	METAL CHIP	1K	5%	1/16W	R755	1-216-837-11	METAL CHIP	22K	5%	1/16W
											(TRV75/TRV75PK/TRV715)
R689	1-216-864-11	METAL CHIP	0	5%	1/16W	R756	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
					(TRV3E/TRV13E/TRV23E)						(TRV75/TRV75PK/TRV715)
R690	1-216-821-11	METAL CHIP	1K	5%	1/16W	R757	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
R691	1-216-845-11	METAL CHIP	100K	5%	1/16W						(TRV75/TRV75PK/TRV715)
R692	1-216-853-11	METAL CHIP	470K	5%	1/16W	R758	1-216-833-11	METAL CHIP	10K	5%	1/16W
R693	1-216-821-11	METAL CHIP	1K	5%	1/16W						(TRV75/TRV75PK/TRV715)
R697	1-216-854-11	METAL CHIP	560K	5%	1/16W	R759	1-216-833-11	METAL CHIP	10K	5%	1/16W
R701	1-216-839-11	METAL CHIP	33K	5%	1/16W						(TRV75/TRV75PK/TRV715)
					(TRV69E)	R760	1-216-835-11	METAL CHIP	15K	5%	1/16W
R702	1-216-838-11	METAL CHIP	27K	5%	1/16W						(TRV75/TRV75PK/TRV715)
					(TRV69E)	R761	1-216-857-11	METAL CHIP	1M	5%	1/16W
R703	1-216-821-11	METAL CHIP	1K	5%	1/16W						(TRV75/TRV75PK/TRV715)
					(TRV69E)	R763	1-218-879-11	RES,CHIP	22K	0.50%	1/16W
R704	1-216-819-11	METAL CHIP	680	5%	1/16W						(TRV75/TRV75PK/TRV715)
					(TRV69E)	R764	1-216-815-11	METAL CHIP	330	5%	1/16W
											(TRV75/TRV75PK/TRV715)
R705	1-216-812-11	METAL CHIP	180	5%	1/16W	R765	1-216-821-11	METAL CHIP	1K	5%	1/16W
					(TRV69E)						(TRV75/TRV75PK/TRV715)
R706	1-216-821-11	METAL CHIP	1K	5%	1/16W	R767	1-216-817-11	METAL CHIP	470	5%	1/16W
					(TRV69E)						(TRV75/TRV75PK/TRV715)
R707	1-216-824-11	METAL CHIP	1.8K	5%	1/16W						
					(TRV69E)	R768	1-216-847-11	METAL CHIP	150K	5%	1/16W
R708	1-216-816-11	METAL CHIP	390	5%	1/16W						(TRV75/TRV75PK/TRV715)
					(TRV69E)	R770	1-216-847-11	METAL CHIP	150K	5%	1/16W
R709	1-216-821-11	METAL CHIP	1K	5%	1/16W						(TRV75/TRV75PK/TRV715)
					(TRV69E)	R771	1-216-818-11	METAL CHIP	560	5%	1/16W
											(TRV75/TRV75PK/TRV715)
R710	1-216-826-11	METAL CHIP	2.7K	5%	1/16W	R772	1-216-831-11	METAL CHIP	6.8K	5%	1/16W
					(TRV69E)						(TRV75/TRV75PK/TRV715)
R711	1-216-820-11	METAL CHIP	820	5%	1/16W	R773	1-216-817-11	METAL CHIP	470	5%	1/16W
					(TRV69E)						(TRV75/TRV75PK/TRV715)
R712	1-216-826-11	METAL CHIP	2.7K	5%	1/16W						
					(TRV69E)	R774	1-216-840-11	METAL CHIP	39K	5%	1/16W
R713	1-216-825-11	METAL CHIP	2.2K	5%	1/16W						(TRV75/TRV75PK/TRV715)
					(TRV69E)	R775	1-216-864-11	METAL CHIP	0	5%	1/16W
R714	1-216-833-11	METAL CHIP	10K	5%	1/16W						(EXCEPT TRV75/TRV75PK/TRV715)
					(TRV69E)	R917	1-216-837-11	METAL CHIP	22K	5%	1/16W
											(EXCEPT TRV45E/TRV55E)
R715	1-216-829-11	METAL CHIP	4.7K	5%	1/16W	R917	1-216-842-11	METAL CHIP	56K	5%	1/16W
					(TRV69E)						(TRV45E/TRV55E)
R716	1-216-819-11	METAL CHIP	680	5%	1/16W	R918	1-216-843-11	METAL CHIP	68K	5%	1/16W
					(TRV69E)						(TRV45E/TRV55E)
R717	1-216-821-11	METAL CHIP	1K	5%	1/16W						
					(TRV69E)	R918	1-216-845-11	METAL CHIP	100K	5%	1/16W
R718	1-216-816-11	METAL CHIP	390	5%	1/16W						(EXCEPT TRV45E/TRV55E)
					(TRV69E)	R919	1-216-833-11	METAL CHIP	10K	5%	1/16W
R719	1-216-817-11	METAL CHIP	470	5%	1/16W						(TRV75/TRV75PK/TRV715)
					(TRV69E)						

Ref. No.	Part No.	Description	Remark		
R919	1-216-841-11	METAL CHIP 47K 5%	1/16W		
			(TRV55E)		
R919	1-216-843-11	METAL CHIP 68K 5%	1/16W		
			(TRV65E)		
R919	1-216-842-11	METAL CHIP 56K 5%	1/16W		
			(TRV45E)		
R919	1-216-845-11	METAL CHIP 100K 5%	1/16W		
			(TRV3E/TRV13E/TRV23E/TRV69E)		
R920	1-216-833-11	METAL CHIP 10K 5%	1/16W		
			(TRV69E)		
R920	1-216-837-11	METAL CHIP 22K 5%	1/16W		
			(TRV3E/TRV13E/TRV23E)		
R920	1-216-842-11	METAL CHIP 56K 5%	1/16W		
			(TRV65E)		
R920	1-216-843-11	METAL CHIP 68K 5%	1/16W		
			(TRV45E)		
R920	1-216-845-11	METAL CHIP 100K 5%	1/16W		
			(TRV55E/TRV75/TRV75PK/TRV715)		
R921	1-216-845-11	METAL CHIP 100K 5%	1/16W		
R922	1-217-671-11	METAL CHIP 1 5%	1/10W		
R923	1-217-671-11	METAL CHIP 1 5%	1/10W		
R924	1-216-821-11	METAL CHIP 1K 5%	1/16W		
R925	1-216-821-11	METAL CHIP 1K 5%	1/16W		
R926	1-216-864-11	METAL CHIP 0 5%	1/16W		
			(EXCEPT TRV3E/TRV13E/TRV23E)		
R928	1-216-821-11	METAL CHIP 1K 5%	1/16W		
R929	1-216-864-11	METAL CHIP 0 5%	1/16W		
< THERMISTOR >					
TH401	1-809-360-21	THERMISTOR, NTC (2125) (TRV69E)			
< VIBRATOR >					
X151	1-767-029-21	VIBRATOR, CRYSTAL (14.318MHz)			
			(EXCEPT TRV3E/TRV13E/TRV23E)		
X401	1-760-655-41	VIBRATOR, CRYSTAL (20MHz)			
X501	1-760-320-11	VIBRATOR, CRYSTAL (28.6363MHz)			
			(TRV75/TRV75PK/TRV715)		
X501	1-760-321-11	VIBRATOR, CRYSTAL (28.375MHz)			
			(EXCEPT TRV75/TRV75PK/TRV715)		
X601	1-579-907-21	VIBRATOR, CERAMIC (20MHz)			
X602	1-760-458-21	VIBRATOR, CRYSTAL (32.798kHz)			
A-7066-774-A VF-99(HP) BOARD, COMPLETE					
			(EXCEPT TRV75/TRV75PK/TRV715)		

A-7066-792-A VF-99(VHL4) BOARD, COMPLETE					
			(TRV75/TRV75PK/TRV715)		

(Ref. No. 10000 series)					
< CAPACITOR >					
C901	1-107-854-11	TANTAL. CHIP 68uF 20%	6.3V		
C902	1-163-038-91	CERAMIC CHIP 0.1uF	25V		
C903	1-135-145-11	TANTALUM CHIP 0.47uF 10%	35V		
C904	1-162-965-11	CERAMIC CHIP 0.0015uF 10%	50V		
C905	1-104-752-11	TANTAL. CHIP 33uF 20%	6.3V		
C906	1-162-638-11	CERAMIC CHIP 1uF	16V		
C907	1-104-563-11	FILM CHIP 0.1uF 5%	16V		
C908	1-162-920-11	CERAMIC CHIP 27PF 5%	50V		

Ref. No.	Part No.	Description	Remark		
C909	1-163-009-11	CERAMIC CHIP 0.001uF 10%	50V		
△C910	1-164-758-11	CERAMIC CHIP 0.0039uF 5%	50V		
△C911	1-164-715-11	CERAMIC CHIP 0.0068uF 5%	50V		
C912	1-107-854-11	TANTAL. CHIP 68uF 20%	6.3V		
C913	1-135-145-11	TANTALUM CHIP 0.47uF 10%	35V		
C914	1-113-984-11	TANTAL. CHIP 1.5uF 20%	35V		
C915	1-163-037-11	CERAMIC CHIP 0.022uF 10%	25V		
C916	1-164-611-11	CERAMIC CHIP 0.001uF 10%	500V		
< CONNECTOR >					
CN901	1-573-506-41	CONNECTOR, FPC (NON ZIF) 4P			
CN902	1-580-057-11	PIN, CONNECTOR 4P			
< DIODE >					
D901	8-719-951-21	DIODE PR1102W-TR			
D903	8-719-404-49	DIODE MA111-TX			
< IC >					
IC901	8-759-196-14	IC BA7149F-E2			
< COIL >					
L901	1-412-031-11	INDUCTOR CHIP 47uH			
L902	1-410-387-11	INDUCTOR CHIP 33uH			
△L903	1-411-697-11	COIL, FERRITE (HLC)			
< TRANSISTOR >					
Q901	8-729-230-63	TRANSISTOR 2SD1819A-QRS-TX			
Q902	8-729-106-68	TRANSISTOR 2SD1615-T1GLGK			
Q903	8-729-216-31	TRANSISTOR 2SA1163G-TE85L			
Q904	8-729-230-63	TRANSISTOR 2SD1819A-QRS-TX			
< RESISTOR >					
R901	1-216-817-11	METAL CHIP 470 5%	1/16W		
R902	1-216-817-11	METAL CHIP 470 5%	1/16W		
R903	1-216-057-00	METAL CHIP 2.2K 5%	1/10W		
R904	1-216-833-11	METAL CHIP 10K 5%	1/16W		
R905	1-216-822-11	METAL CHIP 1.2K 5%	1/16W		
R906	1-216-813-11	METAL CHIP 220 5%	1/16W		
R907	1-216-845-11	METAL CHIP 100K 5%	1/16W		
R908	1-216-852-11	METAL CHIP 390K 5%	1/16W		
R909	1-216-833-11	METAL CHIP 10K 5%	1/16W		
R910	1-216-835-11	METAL CHIP 15K 5%	1/16W		
R911	1-216-160-00	RES,CHIP 27 5%	1/8W		
R912	1-216-857-11	METAL CHIP 1M 5%	1/16W		
R913	1-216-820-11	METAL CHIP 820 5%	1/16W		
R914	1-216-813-11	METAL CHIP 220 5%	1/16W		
R915	1-216-793-11	RES,CHIP 4.7 5%	1/16W		
R916	1-218-879-11	RES,CHIP 22K 0.50%	1/16W		
			(TRV75/TRV75PK/TRV715)		
R916	1-218-881-11	RES,CHIP 27K 0.50%	1/16W		
			(EXCEPT TRV75/TRV75PK/TRV715)		
R917	1-218-891-11	RES,CHIP 68K 0.50%	1/16W		
			(TRV75/TRV75PK/TRV715)		
R917	1-218-893-11	RES,CHIP 82K 0.50%	1/16W		
			(EXCEPT TRV75/TRV75PK/TRV715)		
R918	1-216-829-11	METAL CHIP 4.7K 5%	1/16W		

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
R919	1-216-843-11	METAL CHIP 68K 5% 1/16W (EXCEPT TRV75/TRV75PK/TRV715)		367	1-668-958-11	FP-622 FLEXIBLE BOARD	
R920	1-216-837-11	METAL CHIP 22K 5% 1/16W		408	1-694-384-11	TERMINAL BOARD, BATTERY	
R921	1-216-795-11	RES,CHIP 6.8 5% 1/16W		410	1-668-959-11	FP-623 FLEXBLE BOARD	
R922	1-216-847-11	METAL CHIP 150K 5% 1/16W		414	1-758-084-21	FILTER BLOCK, OPTICAL (EXCEPT TRV3E/TRV13E/TRV23E)	
R923	1-216-857-11	METAL CHIP 1M 5% 1/16W		414	1-758-133-21	FILTER BLOCK, OPTICAL (TRV3E/TRV13E/TRV23E)	
R924	1-216-862-11	RES,CHIP 2.7M 5% 1/16W		451	8-848-722-01	DEVICE, LENS LSV-600A(SOC) (EXCEPT TRV3E/TRV13E)	
R925	1-216-862-11	RES,CHIP 2.7M 5% 1/16W		451	8-848-724-01	DEVICE, LENS LSV-601A(SOC) (TRV3E/TRV13E)	
R926	1-216-821-11	METAL CHIP 1K 5% 1/16W		760	1-658-213-11	FP-355 FLEXIBLE BOARD	
R927	1-216-821-11	METAL CHIP 1K 5% 1/16W		762	1-657-786-13	FP-221 FLEXIBLE BOARD	
R928	1-216-827-11	METAL CHIP 3.3K 5% 1/16W		764	1-658-214-11	FP-356 FLEXIBLE BOARD	
R929	1-216-818-11	METAL CHIP 560 5% 1/16W		803	1-657-785-11	FP-248 FLEXIBLE BOARD	
		< VARIABLE RESISTOR >		817	1-657-784-11	FP-220 FLEXIBLE BOARD	
RV903	1-238-852-11	RES, ADJ, CERMET 470		D001	8-719-988-42	DIODE GL453	
RV904	1-223-566-11	RES, ADJ, METAL GLAZE 1M		IC401	A-7030-865-A	CCD BLOCK ASSY (209 SERVICE) (CCD IMAGER) (TRV75/TRV75PK/TRV715)	
		< TRANSFORMER >		IC401	A-7030-871-A	CCD BLOCK ASSY (211 SERVICE) (CCD IMAGER) (TRV45E/TRV55E/TRV65E/TRV69E)	
△ T901	1-453-124-11	TRANSFORMER ASSY, FLYBACK		IC401	A-7030-874-A	CCD BLOCK ASSY (207 SERVICE) (CCD IMAGER) (TRV3E/TRV13E/TRV23E)	
		< THERMISTOR >		J001	1-565-276-31	JACK, ULTRA SMALL 1P (LANC)	
TH901	1-809-350-21	THERMISTOR, NTC (2125)		LCD901	1-803-038-11	INDICATOR MODULE, LIQUID CRYST (TRV55E:E1,HK,CN)	
		< FLEXIBLE BOARD >		LCD901	1-803-038-21	INDICATOR MODULE, LIQUID CRYST (TRV45E/TRV55E:EE2,JE)	
△ W901	1-540-019-21	SOCKET ASSY, CRT		LCD901	1-803-037-21	INDICATOR MODULE, LIQUID CRYST (TRV75/TRV75PK/TRV715)	
MISCELLANEOUS *****				LCD901	1-803-035-21	INDICATOR MODULE, LIQUID CRYST (TRV23E)	
10	1-475-619-21	SWITCH BLOCK, CONTROL (SS-8500) (TRV55E)		LCD901	1-803-036-21	INDICATOR MODULE, LIQUID CRYST (TRV65E/TRV69E)	
10	1-475-619-11	SWITCH BLOCK, CONTROL (SS-8500) (EXCEPT TRV55E)		LCD901	1-803-040-21	INDICATOR MODULE, LIQUID CRYST (TRV3E/TRV13E)	
14	1-475-617-11	SWITCH BLOCK, CONTROL (FK-8500) (TRV3E/TRV13E)		M901	A-7048-851-A	DRUM ASSY (DGH-0D5A-R)(PAL) (EXCEPT TRV75/TRV75PK/TRV715)	
14	1-475-617-31	SWITCH BLOCK, CONTROL (FK-8500) (TRV23E/TRV65E/TRV69E)		M901	A-7048-842-A	DRUM ASSY (DGH-0E1A-R)(NTSC)(5HEAD) (TRV75/TRV75PK/TRV715)	
14	1-475-618-21	SWITCH BLOCK, CONTROL (FK-8500) (TRV45E/TRV55E)		M902	8-835-531-32	CAPSTAN ASSY	
14	1-475-618-41	SWITCH BLOCK, CONTROL (FK-8500) (TRV75/TRV75PK/TRV715)		M903	X-3945-401-1	MOTOR ASSY, DC (LOADING)	
104	1-475-621-11	SWITCH BLOCK, CONTROL (MR-8500) (TRV45E/TRV55E/TRV75/TRV75PK/TRV715)		M905	1-763-047-11	MOTOR, FOCUS STEPPING	
114	1-783-240-11	CABLE, FLEXIBLE FLAT (FFC-236)		M906	1-763-046-11	MOTOR, ZOOM STEPPING	
154	1-475-620-11	SWITCH BLOCK,CONTROL (MF-8500) (TRV3E/TRV13E/TRV23E/TRV65E/TRV69E)		MIC901	1-542-312-11	MICROPHONE (L-CH)	
164	1-783-240-11	CABLE, FLEXIBLE FLAT (FFC-236)		MIC902	1-542-312-11	MICROPHONE (R-CH) (EXCEPT TRV3E/TRV13E/TRV23E)	
208	1-668-963-41	FP-642FLEXBLE BOARD		△ ND801	1-517-753-11	TUBE, FLUORESCENT,COLD CATHODE (TRV75/TRV75PK/TRV715)	
209	1-958-332-11	HARNESS (DP-71) (TRV45E/TRV55E/TRV75/TRV75PK/TRV715)		△ ND801	1-517-754-11	TUBE, FLUORESCENT,COLD CATHODE (TRV45E/TRV55E)	
258	1-668-963-11	FP-642 FLEXIBLE BOARD		△ ND801	1-517-751-11	TUBE, FLUORESCENT,COLD CATHODE (TRV3E/TRV13E)	
259	1-958-379-11	HARNESS (DP-70) (TRV3E/TRV13E/TRV23E/TRV65E/TRV69E)		△ ND801	1-517-752-11	TUBE, FLUORESCENT,COLD CATHODE (TRV23E)	
308	1-783-241-11	CABLE,FLEXIBLE FLAT (FFC-235)		△ ND801	1-517-752-21	TUBE, FLUORESCENT,COLD CATHODE (TRV65E/TRV69E)	
352	1-668-957-11	FP-621 FLEXBLBOARD		△ ND802	1-517-759-11	LIGHT, BACK	
357	1-668-956-11	FP-620 FLEXIBLE BOARD		S001	1-692-614-11	SWITCH, PUSH (3 KEY) (Hi8 MP, ME/MP, REC PROOF)	
358	1-668-960-11	FP-629 FLEXIBLE BOARD		S002	1-572-688-11	SWITCH, PUSH (1 KEY)(C.C. LOCK)	
363	1-774-867-31	CONNECTOR,EXTERNAL(HOT SHOE)8P (EXCEPT TRV3E/TRV13E/TRV23E)		S003	1-572-688-11	SWITCH, PUSH (1 KEY) (EJECT)	
364	1-668-978-11	FP-633 FLEXIBLE BOARD (EXCEPT TRV3E/TRV13E/TRV23E)		The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.			Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remark
S901	1-762-436-15	SWITCH, ROTARY (ENCODER)	
SE451	1-803-041-31	SENSOR, ANGULAR VELOCITY (YAW) (EXCEPT TRV3E/TRV13E/TRV23E)	
SE452	1-803-041-41	SENSOR, ANGULAR VELOCITY (PITCH) (EXCEPT TRV3E/TRV13E/TRV23E)	
SP901	1-504-753-41	SPEAKER (2.8CM) (TRV45E/TRV55E/TRV75/TRV75PK/TRV715)	
SP901	1-505-291-11	SPEAKER (DIA 2.8CM) (TRV3E/TRV13E/TRV23E/TRV65E/TRV69E)	
△ V901	1-452-673-31	CRT ASSY (M01KXX90WB)	
ACCESSORIES MATERIALS			

	1-467-574-21	REMOTE, COMMANDER (RMT-708) (EXCEPT TRV69E)	
△	1-475-599-11	ADAPTOR, AC (AC-L10)	
△	1-569-008-11	ADAPTOR, CONVERSION 2P (TRV3E:HK/TRV23E:E, HK/TRV45E:E, HK/TRV55E:E, HK/TRV75E:TRV75PK)	
△	1-573-856-11	ADAPTOR, CONVERSION 2P (TRV3E:JE/TRV55E:JE/TRV75E:JE)	
	1-574-039-21	CORD, CONNECTION (A/V connecting cable (Monaural), 1.5m) (TRV3E/TRV13E/TRV23E)	
△	1-575-131-11	CORD, POWER (TRV3E:E/TRV13E:AEP,EE,NE,RU/TRV23E:E/TRV45E:E/TRV55E:E1/ TRV65E:AEP,EE,NE,RU/TRV69E/TRV75E:TRV75PK)	
	1-575-334-11	CORD, CONNECTION (A/V connecting cable (Stereo), 1.5m) (EXCEPT TRV3E/TRV13E/TRV23E)	
△	1-696-819-11	CORD, POWER (TRV23E:AUS)	
△	1-696-819-21	CORD, POWER (TRV3E:AUS/TRV45E:AUS)	
	1-764-622-11	ADAPTOR, CONVERSION 21 Pin adaptor (VMC-89) (TRV13E)	
	1-770-783-11	CONNECTOR, CONVERSION 21 Pin adaptor (VMC-91)(TRV65E/TRV69E)	
△	1-769-322-11	CORD, POWER 2P (TRV55E:JE)	
△	1-775-549-21	CORD, POWER (TRV75:US,CND/TRV715)	
△	1-782-476-11	CORD, POWER (TRV3E:CN/TRV55E:CN)	
△	1-783-374-11	CORD, POWER (TRV3E:HK/TRV13E:UK/ TRV23E:HK/TRV45E:HK/TRV55E:HK/TRV65E:UK)	
	3-861-891-11	MANUAL (3), INSTRUCTION (ENGLISH) (TRV75:US,CND/TRV715)	
	3-861-891-21	MANUAL (3), INSTRUCTION (FRENCH) (TRV75:CND/TRV715:CND)	
	3-861-891-31	MANUAL (3), INSTRUCTION (ENGLISH) (TRV75E:TRV75PK)	
	3-861-891-41	MANUAL (3), INSTRUCTION (SPANISH, PORTUGUESE)(TRV75E:TRV75PK)	
	3-861-891-51	MANUAL (3), INSTRUCTION (CHINESE) (TRV75E:TRV75PK)	
	3-861-891-61	MANUAL (3), INSTRUCTION (KOREAN) (TRV75:JE)	
	3-861-892-11	MANUAL (3), INSTRUCTION (ENGLISH, RUSSIAN)(TRV45E/TRV55E)	
	3-861-892-21	MANUAL (3), INSTRUCTION (FRENCH, GERMAN)(TRV45E:E, HK/TRV55E)	
	3-861-892-31	MANUAL (3), INSTRUCTION (ARABIC, PERSIAN)(TRV45E:E/TRV55E:E, CN)	
	3-861-892-41	MANUAL (3), INSTRUCTION (CHINESE) (TRV45E:E, CN/TRV55E:HK)	

Ref. No.	Part No.	Description	Remark
	3-861-892-51	MANUAL (3), INSTRUCTION (CHINESE) (TRV45E:E/TRV55E:E, CN, JE)	
	3-861-902-11	MANUAL, INSTRUCTION (ENGLISH, RUSSIAN) (TRV13E:EE, NE, RU, UK/TRV65E:EE, NE, RU, UK/TRV69E)	
	3-861-902-21	MANUAL, INSTRUCTION (SPANISH, PORTUGUESE) (TRV13E:AEP1/TRV65E:AEP1/TRV69E)	
	3-861-902-31	MANUAL, INSTRUCTION (GERMAN, ITALIAN) (TRV13E:AEP/TRV65E:AEP/TRV69E)	
	3-861-902-41	MANUAL, INSTRUCTION (FRENCH, DUTCH) (TRV13E:AEP2/TRV65E:AEP2/TRV69E)	
	3-861-902-51	MANUAL, INSTRUCTION (SWEDISH, POLISH) (TRV13E:EE/TRV65E:EE)	
	3-861-903-11	MANUAL, INSTRUCTION (ENGLISH, RUSSIAN) (TRV3E/TRV23E)	
	3-861-903-21	MANUAL, INSTRUCTION (FRENCH, GERMAN) (TRV3E:E, HK, CN/TRV23E:E, HK)	
	3-861-903-31	MANUAL, INSTRUCTION (ARABIC, PERSIAN) (TRV3E:E, CN/TRV23E:E)	
	3-861-903-41	MANUAL, INSTRUCTION (CHINESE) (TRV3E:HK/TRV23E:HK)	
	3-861-903-51	MANUAL, INSTRUCTION (CHINESE) (TRV3E:E, CN/TRV23E:E)	
	3-971-463-01	LABEL, FIRE CAUTION DISCERN (TRV75:US)	
	3-947-969-21	BELT (S), SHOULDER	
	3-988-960-01	BAG, CARRY (TRV75PK)	
	8-917-593-90	REMOTE COMMANDER (RMT-717) (TRV69E)	
	A-7092-699-A	CASE (L) ASSY, BATTERY (TRV75:CND)	
	A-7092-936-A	CASE (L) ASSY (U), BATTERY (TRV75:US)	
**	NP-F330	BATTERY PACK	
Note.			
**	MARKPARTSIS	AVAILABLE AS AN OPTIONAL ACCESSORY.	


The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

< PARTS REFERENCE SHEET >

You can find the parts position of mount locations applying to boards of a set.

Take a copy CAMERA COLOR REPRODUCTION FRAME and Parts reference sheets with a clear sheet for use.

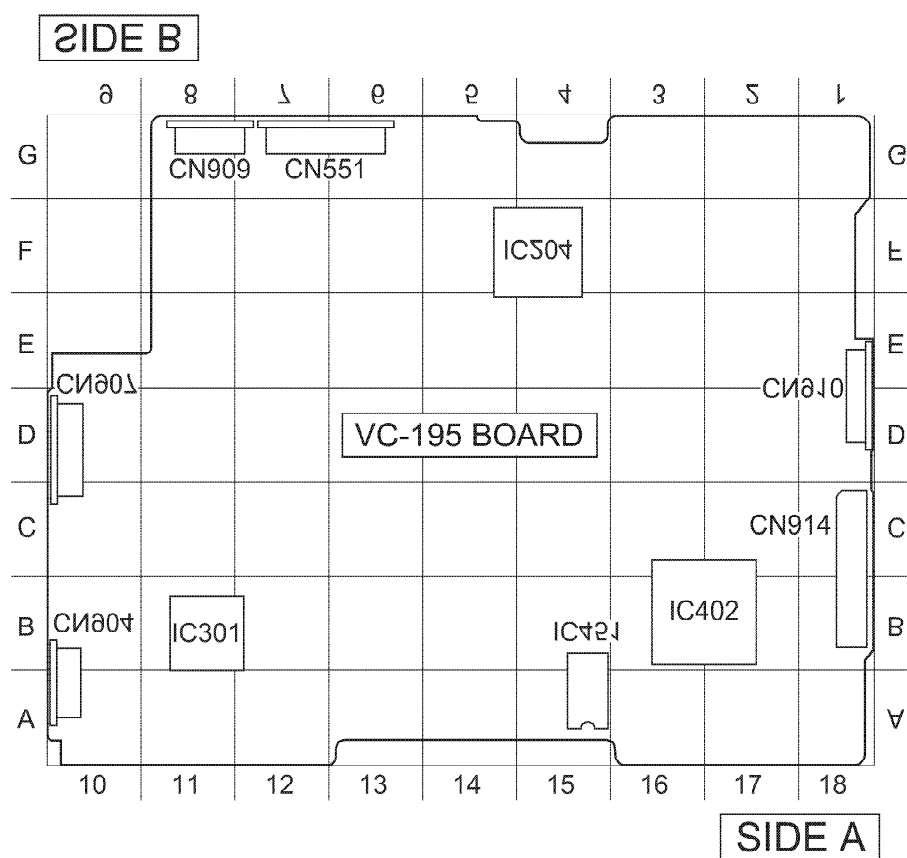


CCD-TRV3E/TRV13E/TRV23E/TRV45E/TRV55E/TRV65E/TRV69E/TRV75/TRV75PK/TRV715

FOR CAMERA COLOR REPRODUCTION ADJUSTMENT


Take a copy CAMERA COLOR REPRODUCTION FRAME and Parts reference sheets with a clear sheet for use.

For NTSC 760H model

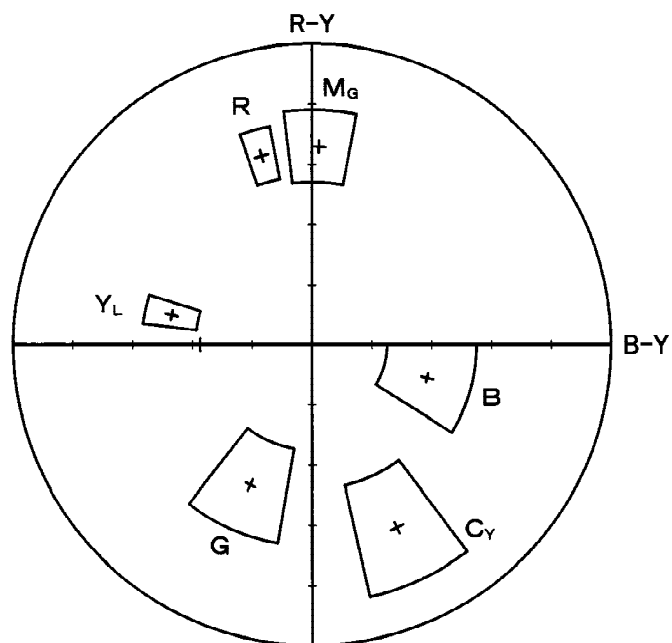

CCD-TRV75/TRV75PK/TRV715

For PAL 510H, 760H model

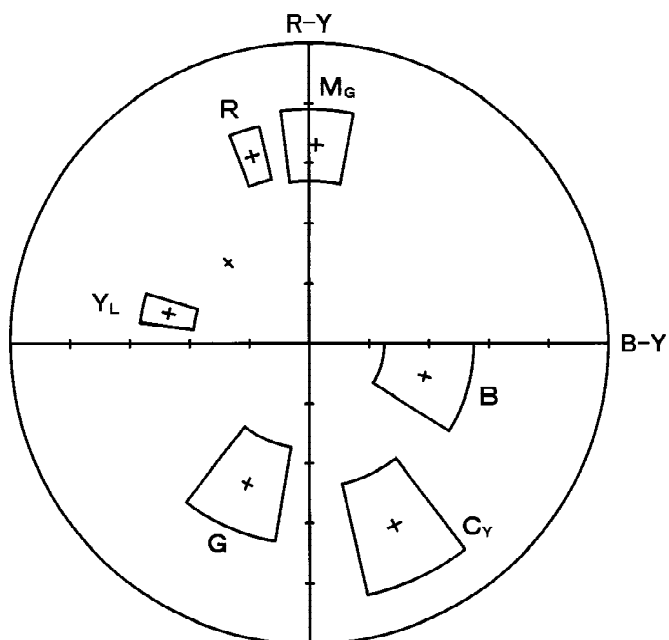

CCD-TRV3E/TRV13E/TRV23E/TRV45E/
TRV55E/TRV65E/TRV69E

**CCD-TRV3E/TRV13E/TRV23E/TRV45E/TRV55E/TRV65E/
TRV69E/TRV75/TRV75PK/TRV715**