

PARTS LIST

SAFETY PRECAUTION

Parts identified by the $\triangle$ symbol are critical for safety. Replace only with specified part numbers.


BEWARE OF BOGUS PARTS


Parts that do not meet specifications may cause trouble in regard to safety and performance. We recommend that genuine JVC parts be used.

1. EXPLODED VIEW


1.1 FINAL ASSEMBLY<M1>

The instruction manual to be provided with this product will differ according to the destination.

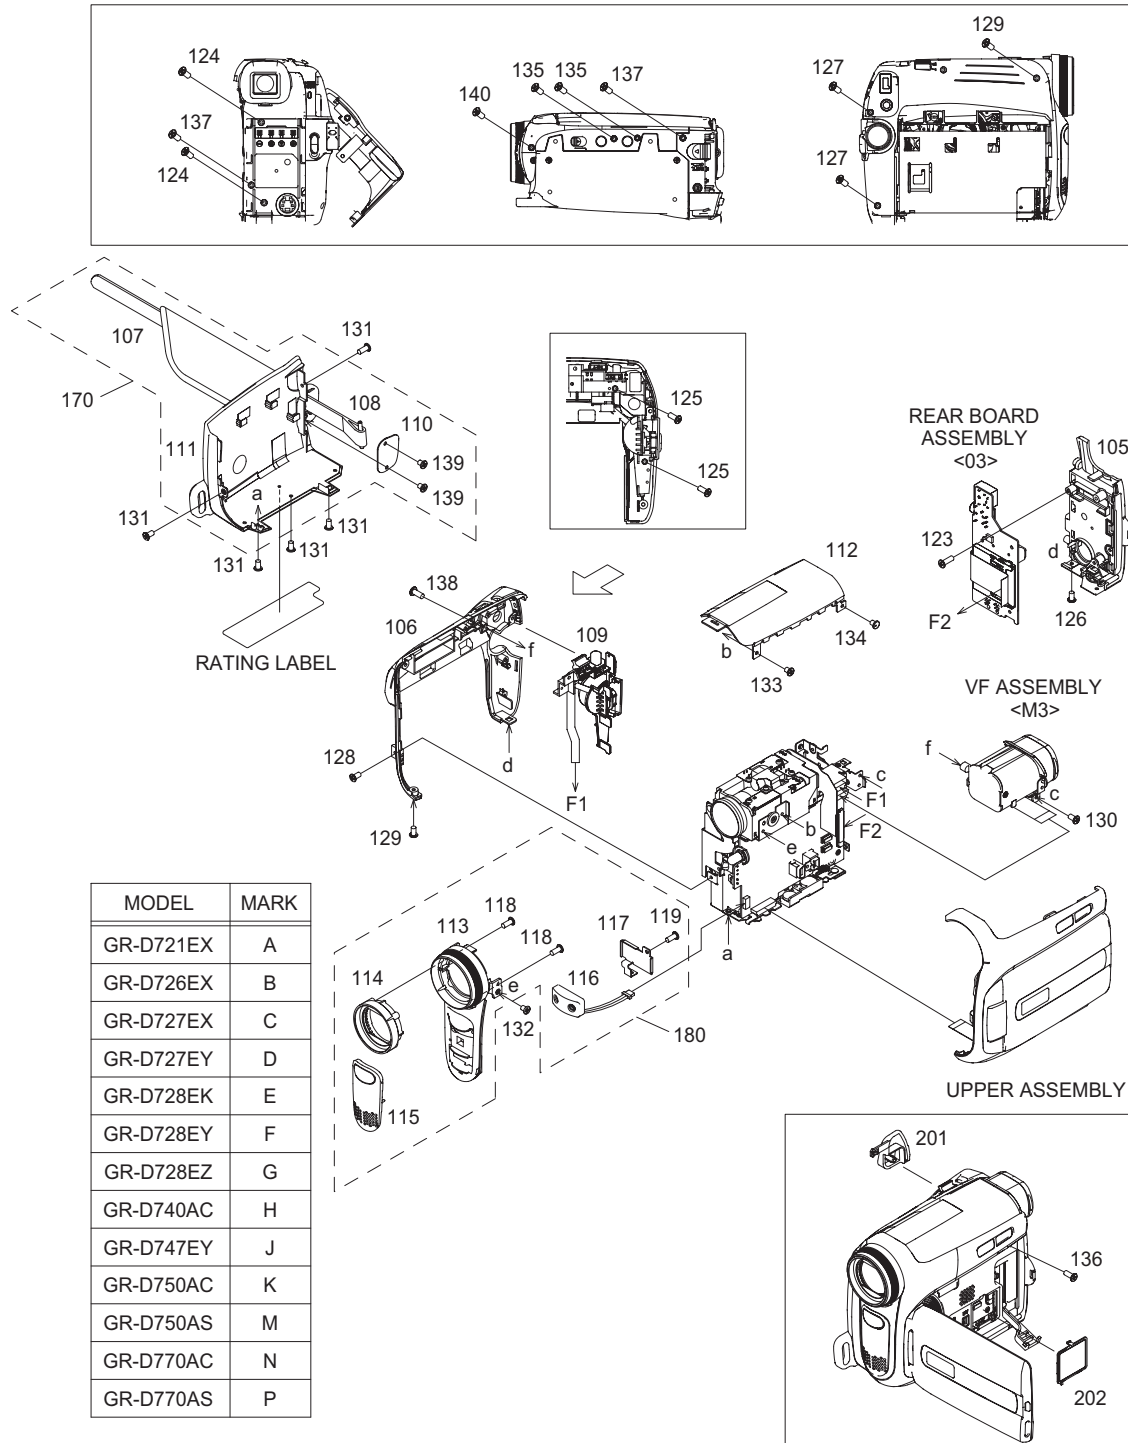

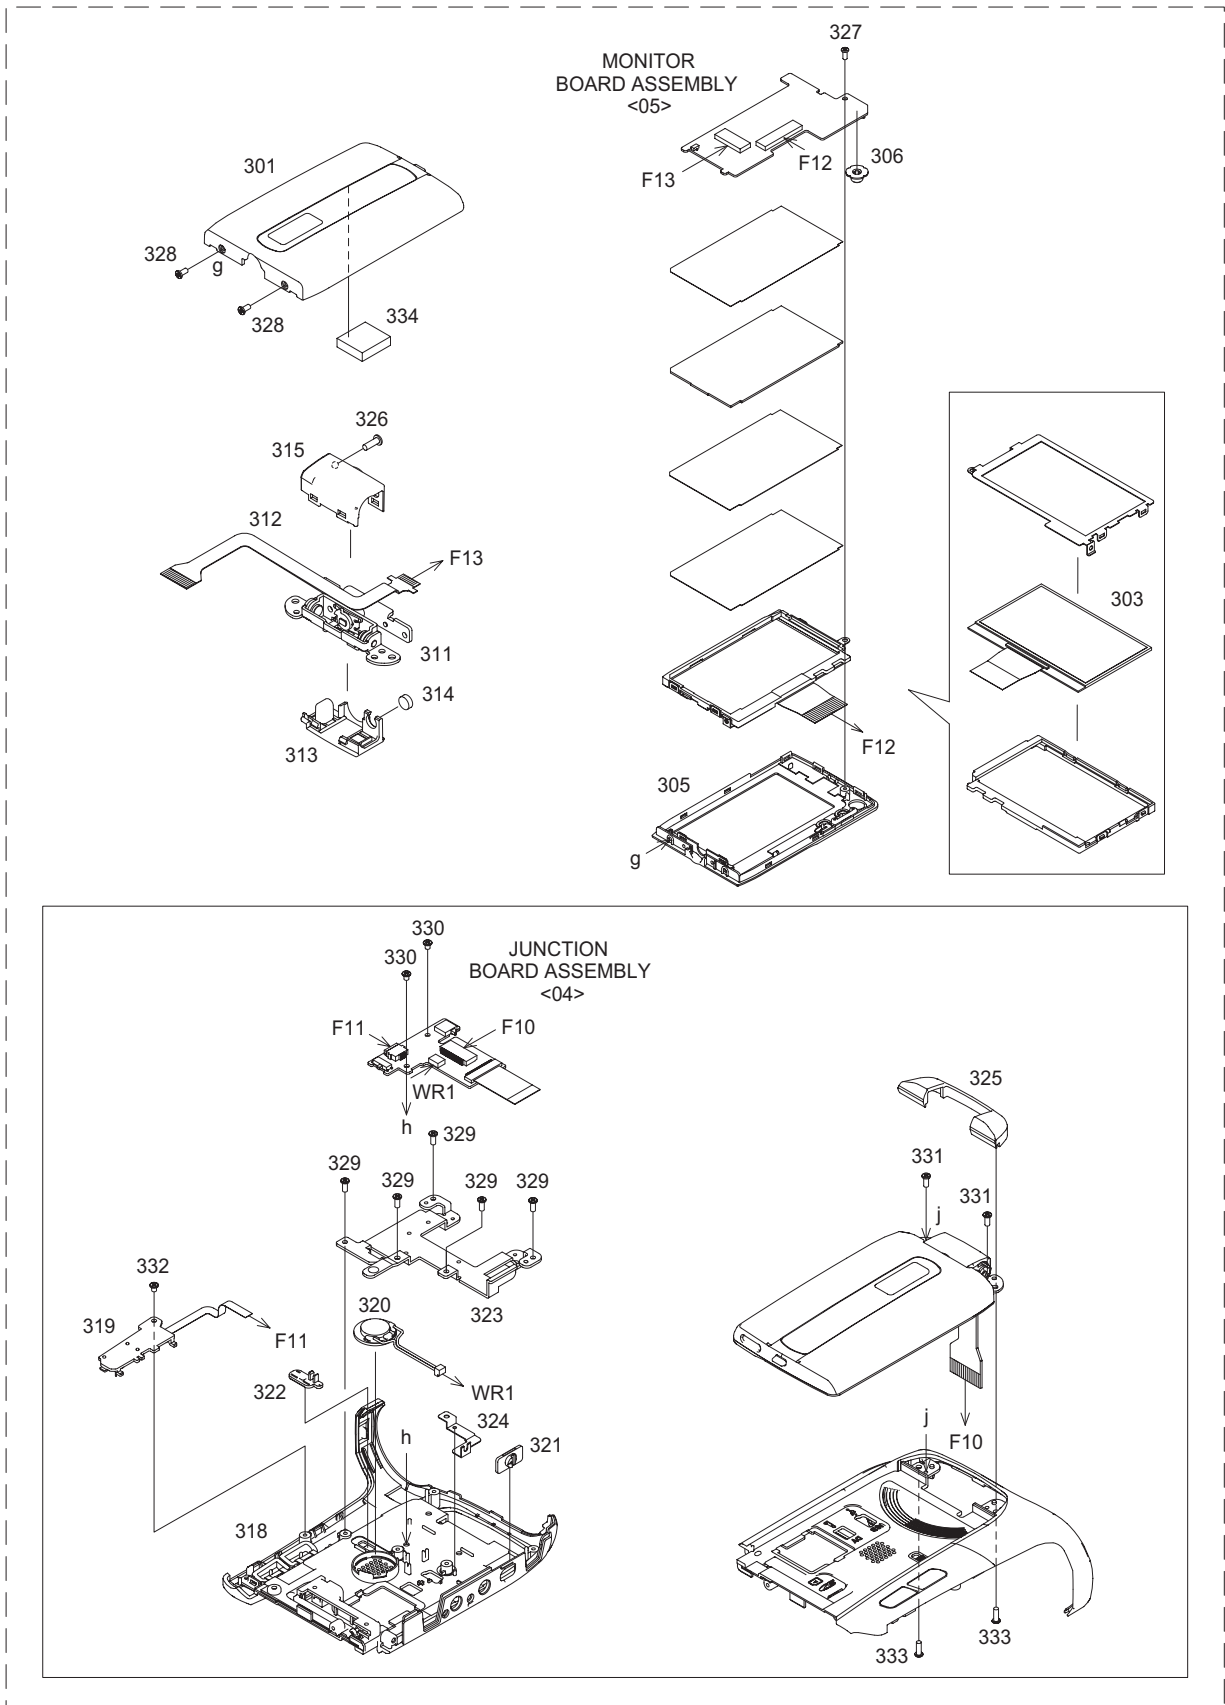


1.2 MECHANISM ASSEMBLY<M2>

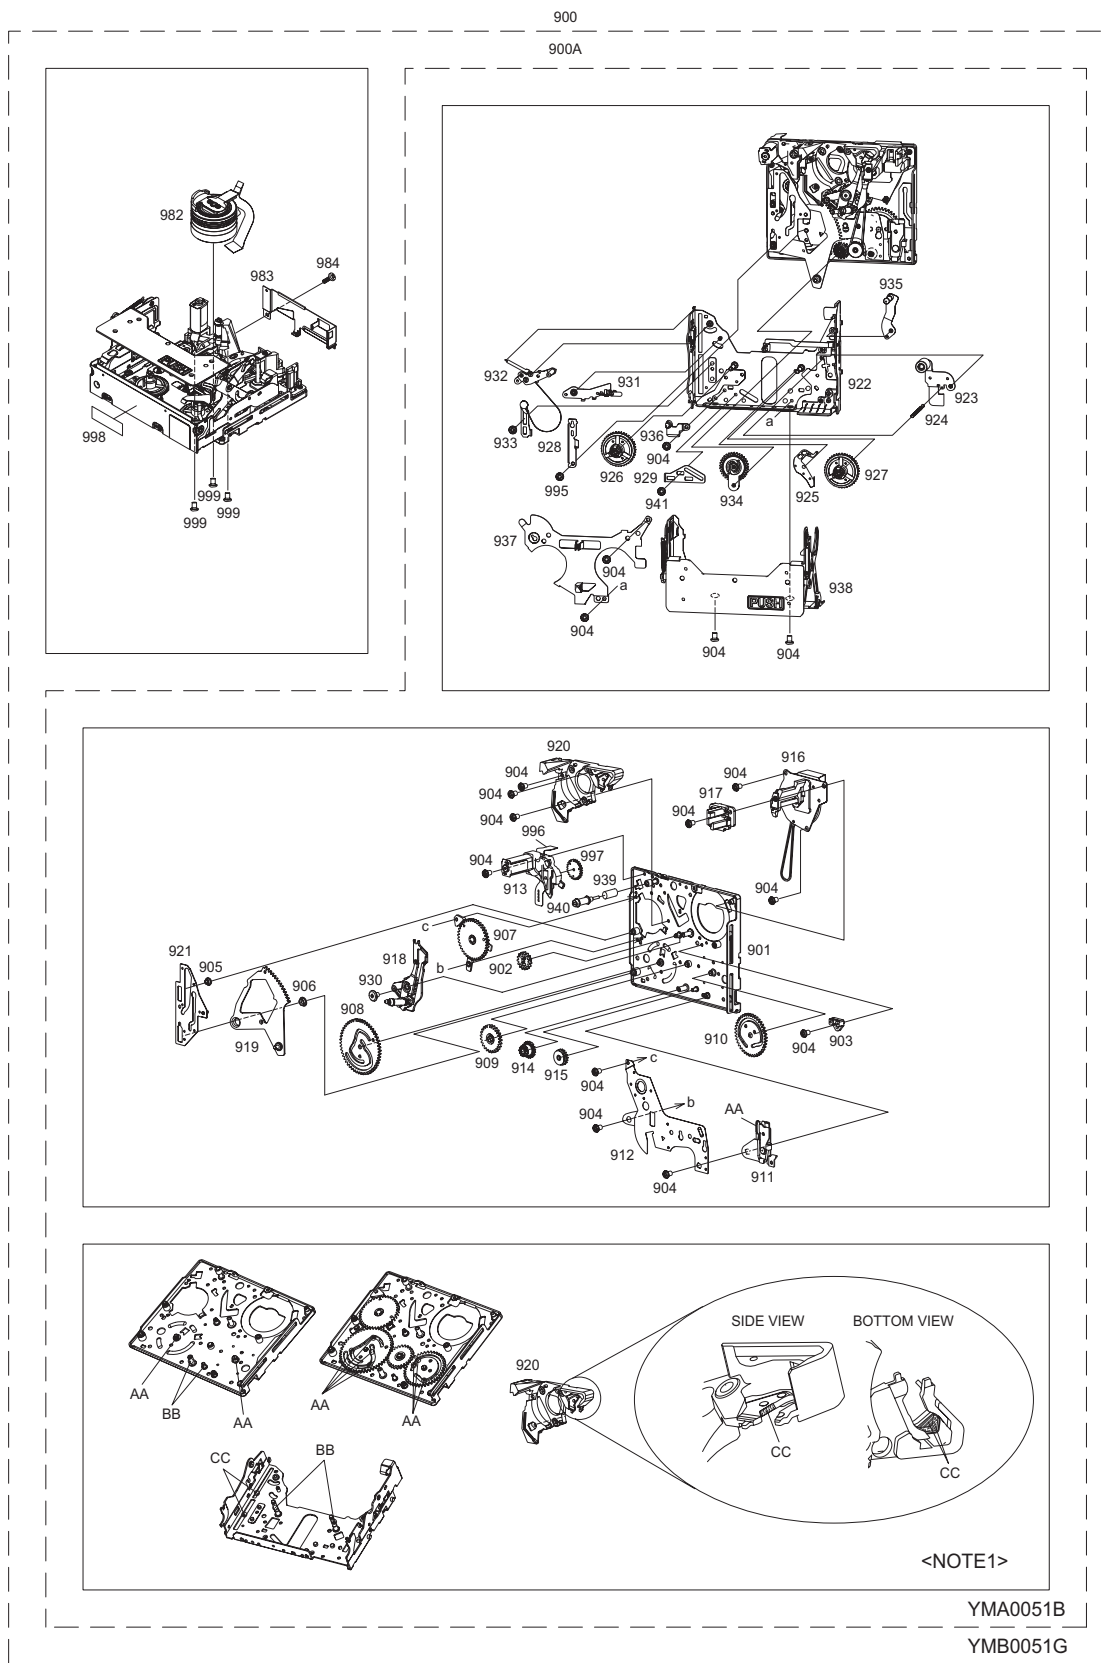


Classification	Part No.	Symbol in drawing
Grease	KYODO-SH-JB	AA
Oil	YTU94027	BB
Grease	JVS-306U	CC

NOTE1: The section marked in AA, BB and CC indicate lubrication and greasing areas.

1.3 VF ASSEMBLY <M3>

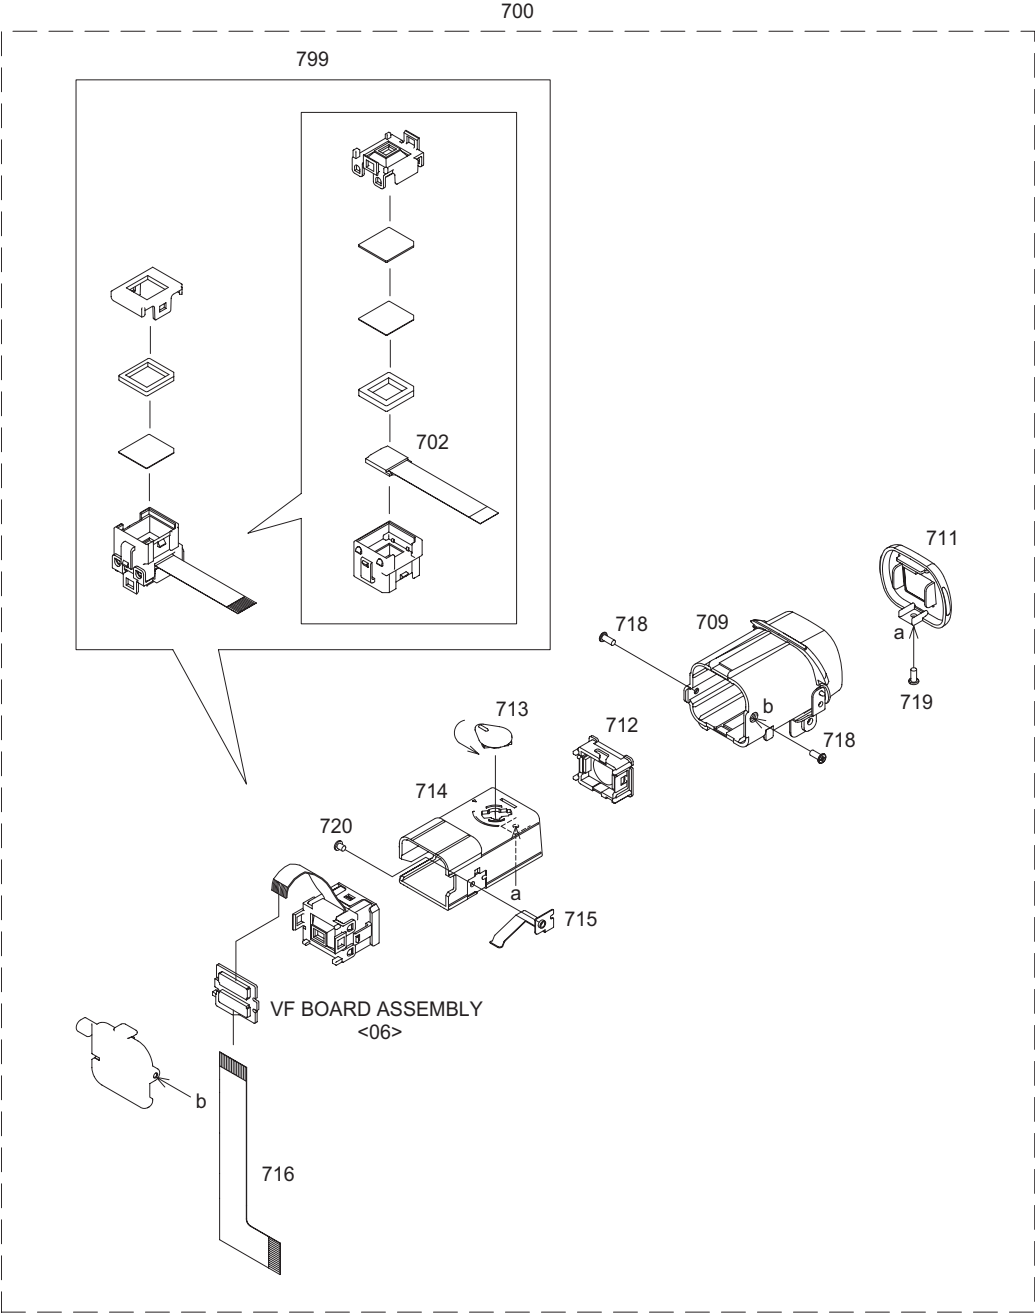

1.4 PACKING AND ACCESSORY ASSEMBLY <M5>

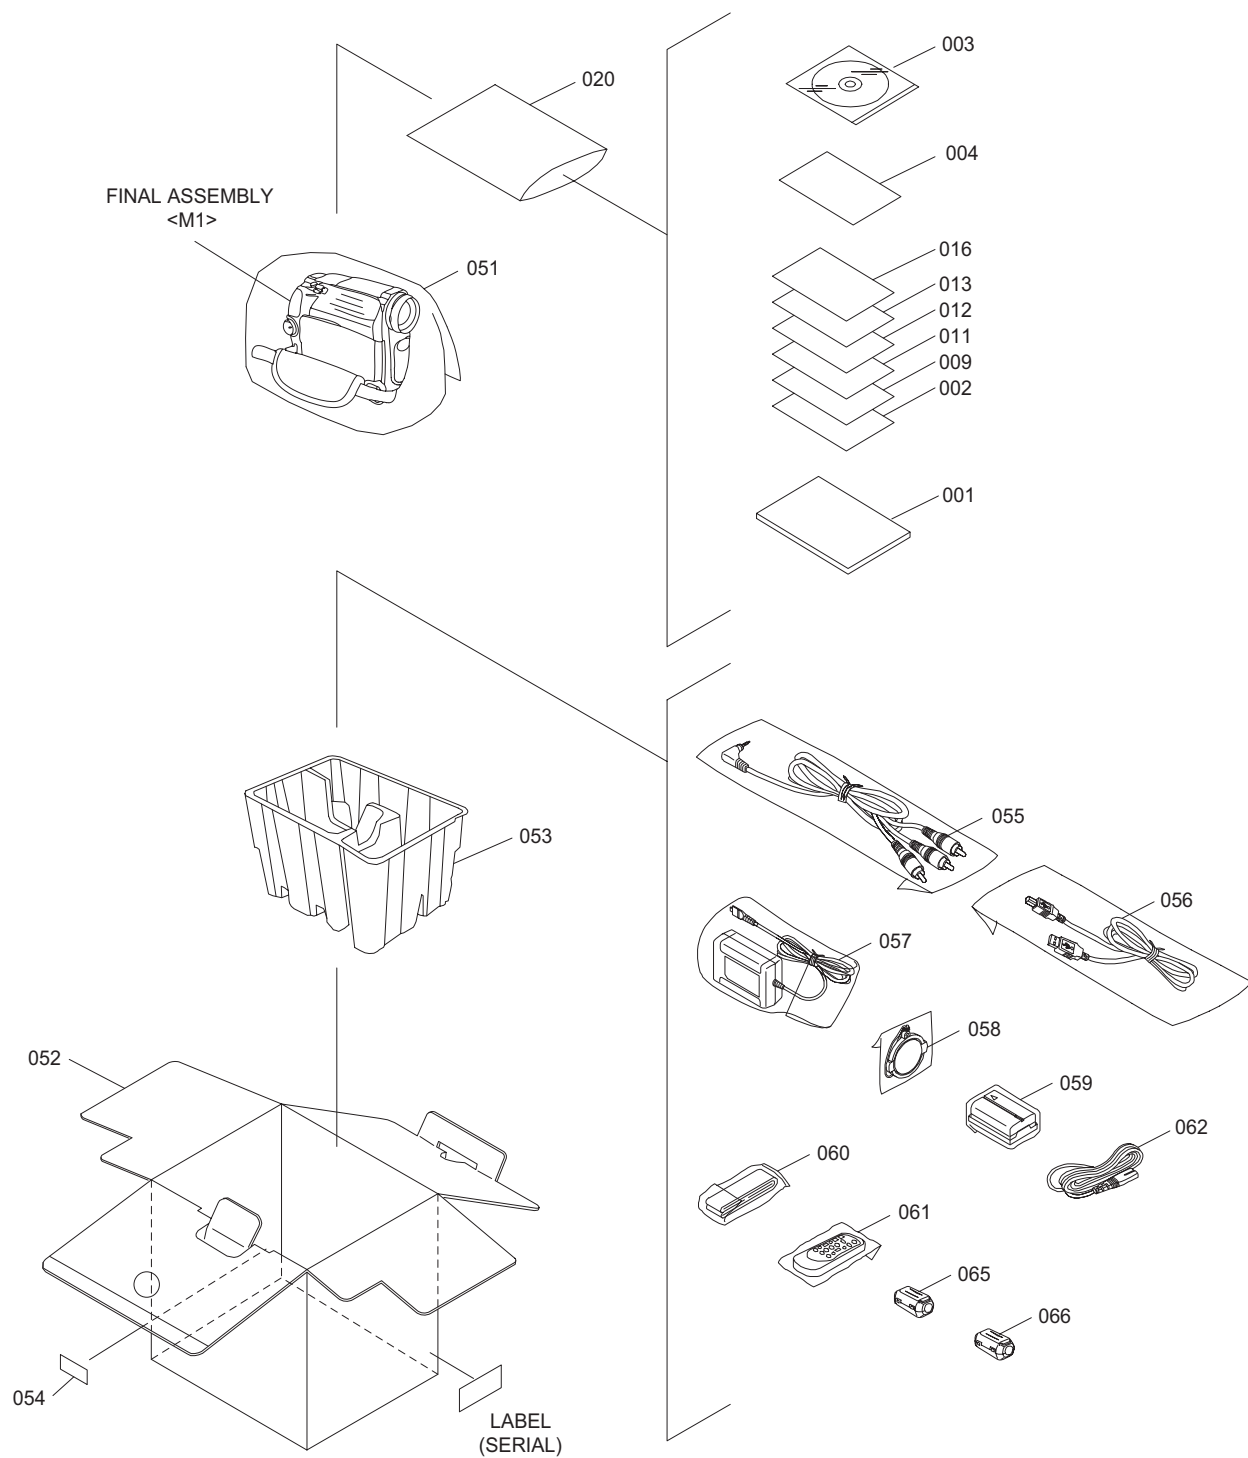

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GR-D721EX	A	GR-D727EY	D	GR-D728EZ	G	GR-D750AC	K	GR-D770AS	P
GR-D726EX	B	GR-D728EK	E	GR-D740AC	H	GR-D750AS	M		
GR-D727EX	C	GR-D728EY	F	GR-D747EY	J	GR-D770AC	N		

2. PARTS LIST

FINAL ASSEMBLY <M1>

△ Symbol No.	Part No.	Part Name	Description	Local
101	LY21532-001H	FRAME ASSY	A,B,C,D,E,F,G,H,J,K,N	
101	LY21532-001G-ML	FRAME ASSY	JPN M,P	
103	LY21534-001B	BKT TOP		
△ 105	LY35427-001E	REAR COVER ASSY	A,B,C,D,E,F,G	
△ 105	LY35427-002E	REAR COVER ASSY	H,J,K,M,N,P	
106	LY21537-004F	LOWER CASE	A,B,C,D,E,F,G	
106	LY21537-001E-ML	LOWER CASE	JPN N	
106	LY21537-001F	LOWER CASE	P	
106	LY21537-002C	LOWER CASE	J	
106	LY21537-002F	LOWER CASE	H,K,M	
107	LY21538-001A	GRIP BELT		
108	LY44829-001B	SHAFT(G.BELT)		
109	LY21539-001A	POWER UNIT		
110	LY45339-001B	PLATE (G.BELT)		
111	LY21536-001C	CASS COVER	H,J,K,M,N,P	
111	LY21536-003C	CASS COVER	A,B,C,D,E,F,G	
112	LY21552-002C	TOP COVER		
113	LY21540-001D	FRONT COVER	C,D,F,G,J,N,P	
113	LY21540-002D	FRONT COVER	A,B,E,H,K,M	
114	LY35133-003A	HOOD (SCREW)	A,B,C,D,E,F,G	
114	LY35133-005A	HOOD (SCREW)	H,J,K,M,N,P	
115	LY35451-003B	WINDOW	A,B,H,K,M	
115	LY35451-001B	WINDOW	C,D,E,F,G,J,N,P	
116	LY34598-001A	MIC	A,B,C,D,E,F,G,J	
116	LY35319-001A	MIC	H,K,M,N,P	
117	LY35819-001A	PLATE (MIC 2)		
118	LY30031-003A	SPECIAL SCREW	FRONT-HOOD(x2)	
119	LY30031-003A	SPECIAL SCREW	PLATE MIC	
120	LY30032-002A	SPECIAL SCREW	FRM-MECHA(x4)	
121	LY30031-053A	SPECIAL SCREW	M.PWB-FRM	
122	LY30031-0H5A	SPECIAL SCREW	BKTTOP-FRM(x4)	
123	LY30031-008A	SPECIAL SCREW	R.PWB-REAR	
124	LY30031-081A	SPECIAL SCREW	R.CVR-FRM(x2)	
125	LY30031-008A	SPECIAL SCREW	POWER UNIT(x2)	
126	LY30031-081A	SPECIAL SCREW	REAR-LOWER	
127	LY30031-008A	SPECIAL SCREW	LOWER-REAR(x2)	
128	LY30031-0H5A	SPECIAL SCREW	LOWER-FRM	
129	LY30031-081A	SPECIAL SCREW	LOWER-FRNT(x2)	
130	LY30031-053A	SPECIAL SCREW	VF-BKT.TOP	
131	LY30031-0H5A	SPECIAL SCREW	CASS COVER(x5)	
132	LY30031-0H5A	SPECIAL SCREW	FRONT-BKT	
133	LY30031-0H5A	SPECIAL SCREW	TOP-BKTTOP	
134	LY30031-0H5A	SPECIAL SCREW	TOP-VF	
135	LY30031-081A	SPECIAL SCREW	UPPER-TRI(x2)	
136	LY30031-081A	SPECIAL SCREW	UPPER-BKT	
137	LY30031-003A	SPECIAL SCREW	REAR-UPPER(x2)	
138	LY30031-008A	SPECIAL SCREW	LOWER-VF	
139	LY30031-003A	SPECIAL SCREW	PLATE-COVR(x2)	
140	LY30031-003A	SPECIAL SCREW	UPPR-FRNT	
170	LY35815-001B	C.COVER ASSY	EMPTY H,K,M	
170	LY35815-002A	C.COVER ASSY	EMPTY N,P	
170	or CU07D101A	C.UNIT ASSY	H,K,M	
170	or CU07D102A	C.UNIT ASSY	N,P	
180	LY35738-001D	FRONT ASSY	EMPTY N,P	
180	LY35738-002D	FRONT ASSY	EMPTY H,K,M	
180	or FU07D101A	F.UNIT ASSY	N,P	
180	or FU07D102A	F.UNIT ASSY	H,K,M	
201	LY35462-001D	COVER (JACK)		
202	LY35465-001B	COVER (JIG)		
△ 300	LY35430-005G	UPPER ASSY	EMPTY N,P	
△ 300	LY35430-008G	UPPER ASSY	B	
△ 300	LY35430-014F	UPPER ASSY	A	
△ 300	LY35430-015G	UPPER ASSY	EMPTY H,K,M	
△ 300	LY35430-017C	UPPER ASSY	E,F,G	
△ 300	LY35430-018A	UPPER ASSY	C,D	
△ 300	LY35430-019A	UPPER ASSY	EMPTY J	
△ 300	or UU07D105A	U.UNIT ASSY	N,P	
△ 300	or UU07D108A	U.UNIT ASSY	B	
△ 300	or UU07D114A	U.UNIT ASSY	A	
△ 300	or UU07D115A	U.UNIT ASSY	H,K,M	
△ 300	or UU07D117A	U.UNIT ASSY	E,F,G	
△ 300	or UU07D118A	U.UNIT ASSY	C,D	
△ 300	or UU07D119A	U.UNIT ASSY	J	
301	LY35626-002E	M.COVER ASSY	C,D	

△ Symbol No.	Part No.	Part Name	Description	Local
301	LY35626-004E	M.COVER ASSY		B
301	LY35626-007C	M.COVER ASSY		A
301	LY35437-001F	M.COVER ASSY		N,P
301	LY35437-002F	M.COVER ASSY		J
301	LY35437-009C	M.COVER ASSY		H,K,M
301	LY35437-011C	M.COVER ASSY		E,F,G
303	QLD0470-001	LCD MODULE		
305	LY35439-001D	M.CASE ASSY		N,P
305	LY35439-002D	M.CASE ASSY		A
305	LY35439-004D	M.CASE ASSY		B,H,K,M
305	LY35439-006B	M.CASE ASSY		C,D,E,F,G
305	LY35439-007B	M.CASE ASSY		J
306	LY45238-001B	KNOB (CURSOL)		A,J,N,P
306	LY45238-002B	KNOB (CURSOL)		B,C,D,E,F,G,H,K,M
311	LY35441-001A	HINGE ASSY		A
311	LY35441-001C	HINGE ASSY		B,C,D,E,F,G,H,K,M,N,P
312	QAL0931-002	FPC		
313	LY35469-001B	H.COVER (L)		A,J,N,P
313	LY35469-002B	H.COVER (L)		B,C,D,E,F,G,H,K,M
314	LY42355-001A	P.C.MAGNET		
315	LY35158-005A	H.COVER(U)		A,J,N,P
315	LY35158-006A	H.COVER(U)		B,C,D,E,F,G,H,K,M
△ 318	LY21541-008F	U.CASE ASSY		A
△ 318	LY21541-003G	U.CASE ASSY		H,J,K,M
△ 318	LY21541-004G	U.CASE ASSY		B,C,D,E,F,G
△ 318	LY21541-005G	U.CASE ASSY		N,P
319	LY35436-001A	BUTTON UNIT		
320	QAS0494-001	SPEAKER		
321	LY35433-001B	KNOB (EJECT)		
322	LY35464-001B	KNOB (SLIDE)		N,P
323	LY35434-001B	BKT (HINGE)		
324	LY35552-001A	BKT(GROUND)		
325	LY35473-001B	COVER UPPER		A,J,N,P
325	LY35473-002B	COVER UPPER		B,C,D,E,F,G,H,K,M
326	LY30031-008A	SPECIAL SCREW	H.COVER(U)	
327	LY30031-003A	SPECIAL SCREW	MONI. PWB	
328	LY30031-081A	SPECIAL SCREW	MONI COVER(x2)	
329	LY30031-003A	SPECIAL SCREW	BKT-UPPER(x5)	
330	LY30031-0H5A	SPECIAL SCREW	JUNCT PWB(x2)	
331	LY30031-081A	SPECIAL SCREW	MONI HINGE(x2)	
332	LY30031-003A	SPECIAL SCREW	BUTTN UNIT	
333	LY30031-003A	SPECIAL SCREW	BKT-C.UPPR(x2)	
334	LY45291-008A	GASKET		E,F,G,H,J,K,M,N,P
501	LY35128-001B	CUSHION (OP)		A,B,C,D,E,F,G,J,M
501	LY35128-001B-ML	CUSHION (OP)	JPN	H,K,N,P
502	LY35161-005A	OP BLOCK ASSY		
502A	PTY35161-102	FOCUS MOTOR UNIT		
502B	PTY35161-101	ZOOM MOTOR UNIT		
502C	PTY35161-506	IRIS MOTOR UNIT		
502D	PTY35161-535	SCREW	M1.7 x 3.5(x7)	
504	LY45175-001A	SHEET		
505	LY45275-001A	OPTICAL LPF		
506	LY30031-0M3A	SPECIAL SCREW	(x2)	
507	LYH30691-004A	CCD BASE ASSY		A,B,C,D,E,F,G,J
507	LY45303-003A	CCD BASE ASSY	EMPTY	H,K,M
507	LY45303-002A	CCD BASE ASSY	EMPTY	N,P

MECHANISM ASSEMBLY <M2>

△ Symbol No.	Part No.	Part Name	Description	Local
900	YMB0051G	MECHA(B)ASSY		
900A	YMA0051B	MECHA(A)ASSY		
901	LY10525-001F	MAIN DECK ASSY		
902	LY34335-001B	LOADING GEAR 1		
903	LY34338-001A	BELT GUIDE		
904	LY34229-001A	MINI SCREW	(x16)	
905	LY44973-001B	SLIDE COLLAR 1		
906	LY44974-001B	SLIDE COLLAR 2		
907	QSW1116-002	ROTARY ENCODER		
908	LY21263-001B	MAIN CAM		
909	LY34319-001A	CONNECT GEAR		
910	LY34320-001A	SUB CAM		
911	LY34321-001B	PRESS ARM ASSY		

△ Symbol No.	Part No.	Part Name	Description	Local
912	LY21264-001C	GEAR COVER		
913	LY34315-001E	M.BRACKET ASSY		
914	LY34337-001A	CENTER GEAR		
915	LY34336-001A	REEL PULLEY		
916	QAR0338-002	CAPSTAN MOTOR		
917	LY21270-001A	T5 CATCHER		
918	LY21266-001G	GUIDE RAIL ASSY		
919	LY34325-001B	DRIVE ARM ASSY		
920	LY10530-001E	DRUM BASE		
921	LY34326-001E	T.C.PLATE ASSY		
922	LY21271-005A	SLIDE DECK ASSY		
923	LY34345-001A	P.R.ARM ASSY		
924	LY44764-001B	TEN.SPRING(P.R)		
925	LY34348-001A	BRAKE PLATE		
926	LY34349-001D	REEL DISK ASSY		
927	LY34349-002B	REEL DISK ASSY		
928	LY34342-001A	GUIDE PLATE		
929	LY34340-001A	SLIDE GUIDE PLT		
930	LY34229-005A	MINI SCREW		
931	LY34358-001G	S1 ARM ASSY		
932	LY21273-001K	T.ARM ASSY		
933	LY43675-007A	MINI SCREW		
934	LY34355-001B	IDLER ARM ASSY		
935	LY34343-001B	T5 ARM ASSY		
936	LY34341-001B	CASSETTE GUIDE		
937	LY34365-001E	REEL COVER ASSY		
938	LY10531-001K	HOUSING ASSY		
939	LY44734-001B	COMP.SPRING		
940	LY34314-001A	G.ROLLER(S)ASSY		
941	LY45076-001A	TRUSTER SCREW		
982	YDV2104P-CX	DRUM ASSY	Y09207-02	
983	LY10599-001A	PROTECTOR		
984	LY34229-006A	MINI SCREW		
995	LY34229-010A	MINI SCREW		
996	LY34676-002A	MOTOR FPC ASSY		
997	LY34318-001A	WORM WHEEL		
998	LY44890-001A	LABEL(HOUSING)		
999	LY34229-006A	MINI SCREW	(x3)	

VF ASSEMBLY <M3>

△ Symbol No.	Part No.	Part Name	Description	Local
700	LY35445-001E	VF ASSY	EMPTY	
700	or VU07D101A	V.UNIT ASSY		
702	QLD0471-001	LCD MODULE		
709	LY35551-001C	COVER (S) ASSY		
711	LY35444-001A	EYE CUP		
712	LY45114-001A	LENS ASSY		
713	LY35121-002A	LEVER (VF)		
714	LY21547-001C	CASE (VF)		
715	LY35447-001A	CLICK PLATE		
716	QAL0932-001	FPC	VF FPC	
718	LY30031-003A	SPECIAL SCREW	BKT.COVER(x2)	
719	LY30031-003A	SPECIAL SCREW	EYE CUP	
720	LY30031-0H5A	SPECIAL SCREW	CLICKPLATE	
799	LY35561-001A	LCD UNIT ASSY		

PACKING AND ACCESSORY ASSEMBLY <M5>

△ Symbol No.	Part No.	Part Name	Description	Local
△ 001	LYT1648-001A	INST BOOK(CS)	BJVC-LP (SIMPLIFIED CHINESE)	N
△ 001	LYT1681-001A	INST BOOK(EN.GE)	(ENGLISH GERMAN)	P
△ 001	LYT1681-002A	INST BOOK(FR.RU)	(FRENCH RUSSIAN)	P
△ 001	LYT1681-003A	INST BOOK(AR.PE)	(ARABIC PERSIAN)	P
△ 001	LYT1682-001A	INST BOOK(EN.GE)	(ENGLISH GERMAN)	M
△ 001	LYT1682-002A	INST BOOK(FR.RU)	(FRENCH RUSSIAN)	M
△ 001	LYT1682-003A	INST BOOK(AR.PE)	(ARABIC PERSIAN)	M
△ 001	LYT1685-001A	INST BOOK(CS)	BJVC-LP (SIMPLIFIED CHINESE)	K
△ 001	LYT1688-001A	INST BOOK(CS)	BJVC-LP (SIMPLIFIED CHINESE)	H
△ 001	LYT1698-002A	INST BOOK(GE.DU)	(GERMAN DUTCH)	B
△ 001	LYT1698-003A	INST BOOK(FR.IT)	(FRENCH ITALIAN)	B

△ Symbol No.	Part No.	Part Name	Description	Local
△ 001	LYT1695-003A	INST BOOK(FR.IT)	(FRENCH ITALIAN)	A
△ 001	LYT1695-004A	INST BOOK(SP.PT)	(SPANISH PORTUGUESE)	A
△ 001	LYT1701-002A	INST BOOK(GE.DU)	(GERMAN DUTCH)	C
△ 001	LYT1701-003A	INST BOOK(FR.IT)	(FRENCH ITALIAN)	C
△ 001	LYT1701-004A	INST BOOK(SP.PT)	(SPANISH PORTUGUESE)	C
△ 001	LYT1701-005A	INST BOOK(DA.FI)	(DANISH FINN)	D
△ 001	LYT1701-006A	INST BOOK(SW.NO)	(SWEDISH NORWEGIAN)	D
△ 001	LYT1711-001A	INST BOOK(EN)	(ENGLISH)	E
△ 001	LYT1711-003A	INST BOOK(FR.IT)	(FRENCH ITALIAN)	G
△ 001	LYT1711-005B	INST BOOK(DA.FI)	(DANISH FINN)	F
△ 001	LYT1711-006B	INST BOOK(SW.NO)	(SWEDISH NORWEGIAN)	F
△ 001	LYT1711-008A	INST BOOK(CZ.HU)	(CZECH HUNGARIAN)	G
△ 001	LYT1711-009A	INST BOOK(PO)	(PORTUGUESE)	G
△ 001	LYT1712-005C	INST BOOK(DA.FI)	(DANISH FINN)	J
△ 001	LYT1712-006C	INST BOOK(SW.NO)	(SWEDISH NORWEGIAN)	J
002	LYT1642-007A	INST BOOK(SOFT.CS)	BJVC-LP (SOFT SIMPLIFIED CHINESE)	N
002	LYT1642-010A	INST BOOK(SOFT.ASLANG)	(SOFT.ASLANG)	P
003	LY35840-002A-S	CD ROM ASSY		N
003	LY35273-005A	CD ROM ASSY		P
004	LY35631-002A	SHEET(ACC.GUIDE)		A,B,C,D,E,F,J
004	LY35631-003A	SHEET(ACC.GUIDE)		G,H,K,M,N,P
009	-----	WARRANTY CARD	BT-54031-1CAM	A,B,C,D,E,F,G,J
009	-----	WARRANTY CARD	BJVC-LP BT-59019-1CAM	H,K,N
011	LYT0194-001B	Q.CARD		E
012	LY35208-001A	SHEET(E-SHOP)		E
013	BT-59021-7CAM	SVC CENTER LIST	BJVC-LP	H,K,N
016	LP40235-001A	SHEET(APPROVAL)	BJVC-LP	H,K,N
020	LY34452-001B	POLY BAG	DOCUMENT	M,P
051	LY30023-003A	POLY BAG		A,B,C,D,E,F,G,J,M,P
051	LY30023-047A	POLY BAG	BJVC-LP	H,K,N
052	LY35475-015B	PACKING CASE	BJVC-LP	K
052	LY35475-016B	PACKING CASE	BJVC-LP	N
052	LY35475-022A	PACKING CASE	PRODUCTION	M
052	LY35475-024A	PACKING CASE	BJVC-LP	P
052	LY35475-025B	PACKING CASE	PRODUCTION	A
052	LY35475-028B	PACKING CASE	PRODUCTION	E,F,G
052	LY35475-029B	PACKING CASE	PRODUCTION	B
052	LY35475-030B	PACKING CASE	PRODUCTION	C,D
052	LY35475-031B	PACKING CASE	PRODUCTION	J
052	LY35475-032B	PACKING CASE	BJVC-LP	H
053	LY35449-001D	CUSHION		A,B,C,D,E,F,G,J,M,P
053	LY35869-001B	CUSHION ASSY	FOR BJVC	H,K,N
054	LY45161-003A	LABEL		
055	QAM0508-001	A/V CABLE		
056	QAM0719-001	USB CABLE	USB	N,P
△ 057	LY21104-001F	AC ADAPTER	AP-V14E	E
△ 057	LY21104-002C	AC ADAPTER	AP-V14A	M,P
△ 057	LY21104-003E	AC ADAPTER	BJVC-LP	H,K,N
△ 057	LY21527-001A	AC ADAPTER	AP-V19E	A,B,C,D,F,G,J
058	LY34194-003B	HOOD CAP ASSY(N)		
△ 059	LY35320-002B	BATTERY PACK	BN-VF808US	
060	LY21397-002A	SHOULDER STRAP		
061	LY21503-002A	REMOTE CTL UNIT	RM-V740US	N,P
△ 062	QMPP210-190-JR	POWER CORD	1.9m BLACK	E
△ 062	QMPL270-190-JR	POWER CORD	CEE PLUG 1.9m BLACK	M,P
△ 062	QMPS410-190-JR	POWER CORD	BJVC-LP 1.9m BLACK	H,K,N
065	QQR0491-002	FERRITE CORE	USB TDK (BLACK)	N,P
066	QQR0917-004	CORE FILTER	AC ADAPTER	A,B,C,D,F,G,J

MAIN BOARD ASSEMBLY <01>

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LYA10086-04D	MAIN BOARD ASSY		A,B
PW1	LYA10086-07D	MAIN BOARD ASSY	MAIN PWB	N
PW1	LYA10086-11D	MAIN BOARD ASSY	MAIN PWB	P
PW1	LYA10086-14D	MAIN BOARD ASSY	MAIN PWB	H
PW1	LYA10086-15D	MAIN BOARD ASSY	MAIN PWB	K
PW1	LYA10086-16D	MAIN BOARD ASSY	MAIN PWB	M
PW1	LYA10086-18D	MAIN BOARD ASSY	MAIN PWB	C,D,E,F,G
PW1	LYA10086-19D	MAIN BOARD ASSY	MAIN PWB	J
IC1001	MN103SF66RCB	IC(MICRO C ROM)	FLASH(AP)	A,B,C,D,E,F,G,J
IC1001	or MN103S97NCB	IC(MICRO C ROM)	MP	A,B,C,D,E,F,G,J
IC1001	MN103SF66RCC	IC(MICRO C ROM)	FLASH(AP)	H,K,M,N,P
IC1001	or MN103S97NCC	IC(MICRO C ROM)	MP	H,K,M,N,P

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GR-D721EX	A	GR-D727EY	D	GR-D728EZ	G	GR-D750AC	K	GR-D770AS	P
GR-D726EX	B	GR-D728EK	E	GR-D740AC	H	GR-D750AS	M		
GR-D727EX	C	GR-D728EY	F	GR-D747EY	J	GR-D770AC	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
IC1002	MB90099PFV142EX	IC(MICRO C ROM)	OSD EX	A,B,C,D,E,F,G,H,I	Q7701	or BC847S-X	PAIR TRANSISTOR		
IC1002	BU3095-OPFV-X	IC	OSD AC	H,K,N,P	Q7701	or KTC801U/G/-X	PAIR TRANSISTOR		
IC1005	M95640-WDW6P-X	IC	EEP64		Q7701	or RT3CLLM/EF/-X	PAIR TRANSISTOR		
IC1006	R2033T-F-X	IC			Q7701	or UMX1N-W	PAIR TRANSISTOR		
IC1008	KSM-2003SN2E	IR DETECT UNIT	IRU	N,P	Q7702	PUMX1-W	PAIR TRANSISTOR		
IC1009	YCBCJVSNS8031-X	IC(MICRO C ROM)			Q7702	or BC847S-X	PAIR TRANSISTOR		
IC1601	BD6637KV	IC	MDA 64PIN		Q7702	or KTC801U/G/-X	PAIR TRANSISTOR		
IC1701	BA10358FVM-W	IC	REELAMP5V		Q7702	or RT3CLLM/EF/-X	PAIR TRANSISTOR		
IC1701	or BA2904FVM-W	IC	REELAMP5V		Q7702	or UMX1N-W	PAIR TRANSISTOR		
IC1702	BA2903FVM-W	IC	REELSM T		Q7703	PUMX1-W	PAIR TRANSISTOR		
IC1702	or NJM2407R-W	IC			Q7703	or BC847S-X	PAIR TRANSISTOR		
IC2201	AK4666VQ	IC	48P0.5		Q7703	or KTC801U/G/-X	PAIR TRANSISTOR		
IC3001	JCY0220	IC			Q7703	or RT3CLLM/EF/-X	PAIR TRANSISTOR		
IC3006	MM3142FN-X	IC			Q7703	or UMX1N-W	PAIR TRANSISTOR		
IC3501	LA70054W-W	IC			Q7704	UMD3N-W	DIGI TRANSISTOR		
IC3701	LA73076V-X	IC		H,J,K,M,N,P	Q7704	or XP4311-W	TRANSISTOR		
IC3702	NJW1351RB1-X	IC		A,B,C,D,E,F,G	Q7704	or RT3T11M-X	DIGI TRANSISTOR		
IC4201	R2J45021BG-X	IC			Q7704	or KRX201U-X	DIGI TRANSISTOR		
IC4901	AN41904A-X	IC			Q7704	or SUR491J-W	DIGI TRANSISTOR		
IC4901	or JCY0233-X	IC			Q7801	PUMX1-W	PAIR TRANSISTOR		
IC4904	BA10358FVM-W	IC			Q7801	or BC847S-X	PAIR TRANSISTOR		
△ IC6001	FA7760F	IC			Q7801	or KTC801U/G/-X	PAIR TRANSISTOR		
IC6701	MM3143BN-X	IC		N,P	Q7801	or RT3CLLM/EF/-X	PAIR TRANSISTOR		
IC6703	MM3143BN-X	IC	MM3143BN		Q7801	or UMX1N-W	PAIR TRANSISTOR		
IC8001	TMS320DSC24GHKL	IC	DSC24	N,P	Q7802	PUMX1-W	PAIR TRANSISTOR		
IC8002	K4S641632K-UC75	IC	4X16B	N,P	Q7802	or BC847S-X	PAIR TRANSISTOR		
IC8003	MR27T1602F301LA	IC(MICRO C ROM)	MP P2ROM	N,P	Q7802	or KTC801U/G/-X	PAIR TRANSISTOR		
IC8003	or SG32A90BFIR4C44	IC(MICRO C ROM)	AP FLASH	N,P	Q7802	or RT3CLLM/EF/-X	PAIR TRANSISTOR		
IC8801	TSB41AB1ZQE-X	IC			Q7802	or UMX1N-W	PAIR TRANSISTOR		
Q1001	DTA114EE-X	DIGI TRANSISTOR			Q7803	PUMX1-W	PAIR TRANSISTOR		
Q1001	or BCR183T-X	DIGI TRANSISTOR			Q7803	or BC847S-X	PAIR TRANSISTOR		
Q1001	or RT1P141U-X	DIGI TRANSISTOR			Q7803	or KTC801U/G/-X	PAIR TRANSISTOR		
Q1001	or KRA302E-X	DIGI TRANSISTOR			Q7803	or RT3CLLM/EF/-X	PAIR TRANSISTOR		
Q1001	or SRA2202EF-X	DIGI TRANSISTOR			Q7803	or UMX1N-W	PAIR TRANSISTOR		
Q1002	DTA143XE-X	DIGI TRANSISTOR			Q7807	UMD3N-W	DIGI TRANSISTOR		
Q1002	or SRA2219EF-X	DIGI TRANSISTOR			Q7807	or XP4311-W	TRANSISTOR		
Q1003	DTA143XE-X	DIGI TRANSISTOR			Q7807	or RT3T11M-X	DIGI TRANSISTOR		
Q1003	or SRA2219EF-X	DIGI TRANSISTOR			Q7807	or KRX201U-X	DIGI TRANSISTOR		
Q1005	DTC143XE-X	DIGI TRANSISTOR			Q7807	or SUR491J-W	DIGI TRANSISTOR		
Q1005	or UN921FJ-X	DIGI TRANSISTOR			Q8002	DTA114EE-X	DIGI TRANSISTOR		N,P
Q1005	or RT1N432U-X	DIGI TRANSISTOR			Q8002	or BCR183T-X	DIGI TRANSISTOR		N,P
Q1005	or KRC419E-X	DIGI TRANSISTOR			Q8002	or RT1P141U-X	DIGI TRANSISTOR		N,P
Q1005	or SRC1219EF-X	DIGI TRANSISTOR			Q8002	or KRA302E-X	DIGI TRANSISTOR		N,P
Q1006	2SC4617/QR/-X	TRANSISTOR			Q8002	or SRA2202EF-X	DIGI TRANSISTOR		N,P
Q1006	or BC847BT-X	TRANSISTOR			D1001	DA221-X	DIODE ARRAY		
Q1006	or 2SD2216J/QR/-X	TRANSISTOR			D1001	or MA133-X	SI DIODE		
Q1006	or 2SC5383/E/-X	TRANSISTOR			D1001	or KDS221E-X	SI DIODE		
Q1006	or 2SC4738/YG/-X	TRANSISTOR			D1003	NSPW500CS/C0TU/	LED		C,D,E,F,G,J,N,P
Q1007	DTC124EE-X	DIGI TRANSISTOR			D1603	DAP222-X	DIODE ARRAY		
Q1007	or BCR141T-X	DIGI TRANSISTOR			D1603	or MA132WA-X	SI DIODE		
Q1007	or RT1N241U-X	DIGI TRANSISTOR			D1603	or SDS2836EF-X	SI DIODE		
Q1007	or KRC403E-X	DIGI TRANSISTOR			D3001	EC2C01C-TR-X	VARI CAP DIODE	EC2C01CTR X	
Q1007	or SRC1203EF-X	DIGI TRANSISTOR			D3002	EC2C01C-TR-X	VARI CAP DIODE	EC2C01CTR X	K,M,N,P
Q1008	PUMX1-W	PAIR TRANSISTOR		C,D,E,F,G,J,N,P	D4201	1SS355-X	SI DIODE		
Q1008	or BC847S-X	PAIR TRANSISTOR		C,D,E,F,G,J,N,P	D4201	or MA111-X	SI DIODE		
Q1008	or KTC801U/G/-X	PAIR TRANSISTOR		C,D,E,F,G,J,N,P	D4201	or 1SS352-X	SI DIODE		
Q1008	or RT3CLLM/EF/-X	PAIR TRANSISTOR		C,D,E,F,G,J,N,P	D4201	or SDS511-X	SI DIODE		
Q1008	or UMX1N-W	PAIR TRANSISTOR		C,D,E,F,G,J,N,P	△ D6002	RB551V-30-X	SB DIODE		
Q1601	SUR551H-W	DIGI TRANSISTOR			D6101	RB521S-30-X	SB DIODE		
Q1601	or UMC3N-W	DIGI TRANSISTOR			D6101	or KDR720E-X	SB DIODE		
Q1601	or XP03311-W	DIGI TRANSISTOR			D6101	or MA2SD31-X	SB DIODE		
Q2403	2SC4617/QR/-X	TRANSISTOR			D6201	RB521S-30-X	SB DIODE		
Q2403	or BC847BT-X	TRANSISTOR			D6201	or KDR720E-X	SB DIODE		
Q2403	or 2SD2216J/QR/-X	TRANSISTOR			D6201	or MA2SD31-X	SB DIODE		
Q2403	or 2SC5383/E/-X	TRANSISTOR			D6503	1SS355-X	SI DIODE		
Q2403	or 2SC4738/YG/-X	TRANSISTOR			D6503	or MA111-X	SI DIODE		
Q3702	UMZ1N-W	PAIR TRANSISTOR		H,J,K,M,N,P	D6503	or 1SS352-X	SI DIODE		
Q3702	or PUMZ1-W	PAIR TRANSISTOR		H,J,K,M,N,P	D6503	or SDS511-X	SI DIODE		
Q3702	or XP4601-W	TRANSISTOR		H,J,K,M,N,P	D6504	1SS355-X	SI DIODE		
Q4901	RPM-22PB	PHOTO TRANSISTOR WB SENSOR			D6504	or MA111-X	SI DIODE		
Q6301	US5U29-W	MOS FET			D6504	or 1SS352-X	SI DIODE		
Q6401	US5U29-W	MOS FET			D6504	or SDS511-X	SI DIODE		
Q6505	2SA1774/QR/-X	TRANSISTOR	-VE		D6505	1SS355-X	SI DIODE		
Q6505	or BC857BT-X	TRANSISTOR	-VE		D6505	or MA111-X	SI DIODE		
Q6505	or 2SA1989/QR/-X	TRANSISTOR	-VE		D6505	or 1SS352-X	SI DIODE		
Q6701	RSR025P03-X	MOS FET			D6505	or SDS511-X	SI DIODE		
Q7701	PUMX1-W	PAIR TRANSISTOR			D6506	1SS355-X	SI DIODE		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GR-D721EX	A	GR-D727EY	D	GR-D728EZ	G	GR-D750AC	K	GR-D770AS	P
GR-D726EX	B	GR-D728EK	E	GR-D740AC	H	GR-D750AS	M		
GR-D727EX	C	GR-D728EY	F	GR-D747EY	J	GR-D770AC	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
D6506	or MA111-X	SI DIODE			C2603	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K	
D6506	or 1SS352-X	SI DIODE			C2604	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K	
D6506	or SDS511-X	SI DIODE			C2605	NCBA1EK-472W	C CAPACITOR	4700pF 25V K	
D6507	UDZS8.2B-X	Z DIODE			C2606	NCBA1EK-472W	C CAPACITOR	4700pF 25V K	
D6507	or MA8082/M-X	Z DIODE			C2611	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
D6701	RB160M-30-X	SB DIODE			C2612	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
D6701	or MA22D23-X	SB DIODE			C2613	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
D6703	RB160M-30-X	SB DIODE			C2623	NDCA1HJ-100W	C CAPACITOR	10pF 50V J	
D6703	or MA22D23-X	SB DIODE			C2624	NDCA1HJ-100W	C CAPACITOR	10pF 50V J	
D6801	RB551V-30-X	SB DIODE			C2655	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
D6801	or KDR412-X	SB DIODE			C2656	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C1001	NDCA1HJ-7R0W	C CAPACITOR	7pF 50V J		C3001	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K	
C1002	NDCA1HJ-7R0W	C CAPACITOR	7pF 50V J		C3003	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K	
C1004	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M		C3005	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K	
C1005	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3007	NCB10JK-106X	C CAPACITOR	10uF 6.3V K	
C1006	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3008	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C1008	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M		C3009	NCB10JK-106X	C CAPACITOR	10uF 6.3V K	
C1010	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K	N,P	C3010	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C1013	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C3011	NCB10JK-106X	C CAPACITOR	10uF 6.3V K	
C1018	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3012	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C1023	NCBA1EK-682W	C CAPACITOR	6800pF 25V K		C3013	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	AB,C,D,E,F,G,H,J,M,N
C1024	NCBA1EK-682W	C CAPACITOR	6800pF 25V K		C3019	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	AB,C,D,E,F,G,H,J
C1025	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C3024	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	
C1029	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3027	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1031	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3028	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1032	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3029	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1033	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3032	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1035	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3034	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C1036	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3035	NCJA0JK-105W-A	C CAPACITOR	1uF 6.3V K	
C1038	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3036	NDCA1HJ-560W	C CAPACITOR	56pF 50V J	
C1039	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3037	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1040	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3039	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	
C1051	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		C3040	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	K,M,N,P
C1052	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		C3042	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	AB,C,D,E,F,G,H,J
C1053	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		C3042	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	K,M,N,P
C1054	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		C3043	NDCA1HJ-560W	C CAPACITOR	56pF 50V J	K,M,N,P
C1055	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3044	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C1601	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C3045	NCBA1HK-471W	C CAPACITOR	470pF 50V K	
C1602	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		C3046	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1603	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C3048	NCJA0JK-105W-A	C CAPACITOR	1uF 6.3V K	
C1605	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3050	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1606	NCBA1HK-152W	C CAPACITOR	1500pF 50V K		C3055	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1607	NCBA1CK-473W	C CAPACITOR	0.047uF 16V K		C3056	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1614	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		C3057	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1618	NCBA1HK-222W	C CAPACITOR	2200pF 50V K		C3059	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1619	NCBA1HK-222W	C CAPACITOR	2200pF 50V K		C3060	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1620	NCBA1HK-222W	C CAPACITOR	2200pF 50V K		C3061	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1621	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3067	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1622	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		C3070	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1623	NCBA1CK-473W	C CAPACITOR	0.047uF 16V K		C3079	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C1624	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C3080	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C1625	NDCA1HJ-101W	C CAPACITOR	100pF 50V J		C3083	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1626	NCBA1EK-472W	C CAPACITOR	4700pF 25V K		C3085	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1627	NCBA1EK-472W	C CAPACITOR	4700pF 25V K		C3088	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1628	NCB31CK-224X	C CAPACITOR	0.22uF 16V K		C3090	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1629	NCB21EK-224X	C CAPACITOR	0.22uF 25V K		C3099	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1630	NCB21EK-224X	C CAPACITOR	0.22uF 25V K		C3101	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1631	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		C3102	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1632	NCB21CK-474X	C CAPACITOR	0.47uF 16V K		C3127	NDCA1HJ-470W	C CAPACITOR	47pF 50V J	
C1633	NCB30JK-474X	C CAPACITOR	0.47uF 6.3V K		C3128	NDCA1HJ-470W	C CAPACITOR	47pF 50V J	
C1637	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3129	NCJ30JK-475X-A	C CAPACITOR	4.7uF 6.3V K	
C1702	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3130	NCB10JK-106X	C CAPACITOR	10uF 6.3V K	AB,C,D,E,F,G
C2202	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3130	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	H,J,K,M,N,P
C2203	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C3501	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2204	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3502	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K	
C2209	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3503	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2210	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3504	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2213	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3505	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2214	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3506	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K	
C2223	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3507	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C2224	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3508	NCBA1HK-471W	C CAPACITOR	470pF 50V K	
C2402	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K		C3509	NCBA1HK-471W	C CAPACITOR	470pF 50V K	
C2403	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K		C3510	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2404	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K		C3511	NDCA1HJ-680W	C CAPACITOR	68pF 50V J	
C2405	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3512	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2406	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K		C3513	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2407	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K		C3516	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
					C3517	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GR-D721EX	A	GR-D727EY	D	GR-D728EZ	G	GR-D750AC	K	GR-D770AS	P
GR-D726EX	B	GR-D728EK	E	GR-D740AC	H	GR-D750AS	M		
GR-D727EX	C	GR-D728EY	F	GR-D747EY	J	GR-D770AC	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C3518	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C6301	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3519	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6302	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3701	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K	H,J,K,M,N,P	C6303	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3702	NCB20JK-225X	C CAPACITOR	2.2uF 6.3V K	H,J,K,M,N,P	C6304	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3703	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	H,J,K,M,N,P	C6402	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3707	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	H,J,K,M,N,P	C6403	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C3709	NCJ30JK-475X-A	C CAPACITOR	4.7uF 6.3V K	A,B,C,D,E,F,G	C6404	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3710	NCJ30JK-475X-A	C CAPACITOR	4.7uF 6.3V K	A,B,C,D,E,F,G	C6501	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3712	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	H,J,K,M,N,P	C6502	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3713	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	H,J,K,M,N,P	C6503	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3714	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C6504	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C3715	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	A,B,C,D,E,F,G	C6505	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3716	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6506	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3717	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6509	NCBA1AK-333W	C CAPACITOR	0.033uF 10V K	
C3718	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6510	NCBA1CK-473W	C CAPACITOR	0.047uF 16V K	
C3719	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6511	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3720	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6512	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3721	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6514	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3722	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6701	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3723	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6702	NCB41CK-106X	C CAPACITOR	10uF 16V K	
C4201	NCB11EK-105X	C CAPACITOR	1uF 25V K		C6704	NCBA1EK-472W	C CAPACITOR	4700pF 25V K	
C4202	NCB11CK-475X	C CAPACITOR	4.7uF 16V K		C6705	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C4203	NCB11CK-475X	C CAPACITOR	4.7uF 16V K		C6706	NCBA1HK-221W	C CAPACITOR	220pF 50V K	
C4204	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M		C6707	NCBA1HK-821W	C CAPACITOR	820pF 50V K	
C4205	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K		C6708	NCB21CK-105X	C CAPACITOR	1uF 16V K	N,P
C4206	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K		C6709	NCB21CK-105X	C CAPACITOR	1uF 16V K	N,P
C4207	NDCA1HJ-9R0W	C CAPACITOR	9pF 50V J		C6711	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4208	NDCA1HJ-120W	C CAPACITOR	12pF 50V J		C6712	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C4209	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6801	NCBA1HK-471W	C CAPACITOR	470pF 50V K	
C4210	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6802	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K	
C4211	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6803	NCBA1HK-101W	C CAPACITOR	100pF 50V K	
C4212	NDCA1HJ-150W	C CAPACITOR	15pF 50V J		C7701	NCB11CK-225X-A	C CAPACITOR	2.2uF 16V K	
C4213	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C7703	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C4214	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C7801	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C4215	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C7802	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C4216	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C7803	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C4217	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C7804	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C4218	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C7805	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4220	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C7806	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C4221	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C7807	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C4222	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8001	NCB21CK-105X	C CAPACITOR	1uF 16V K	N,P
C4223	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8002	NCB21CK-105X	C CAPACITOR	1uF 16V K	N,P
C4224	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8011	NCB21CK-105X	C CAPACITOR	1uF 16V K	N,P
C4226	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8012	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	N,P
C4227	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8013	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	N,P
C4901	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8018	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	N,P
C4902	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K		C8025	NCB21CK-105X	C CAPACITOR	1uF 16V K	N,P
C4903	NBE90JM-106X	TA E CAPACITOR	10uF 6.3V M		C8029	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	N,P
C4904	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K		C8030	NCB21CK-105X	C CAPACITOR	1uF 16V K	N,P
C4905	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8801	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M	
C4907	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8802	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K	
C4908	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8803	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C4909	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C8804	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C4911	NDCA1HJ-101W	C CAPACITOR	100pF 50V J		C8805	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C4912	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8806	NDCA1EJ-221W	C CAPACITOR	220pF 25V J	
C4913	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8807	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C4914	NDCA1HJ-101W	C CAPACITOR	100pF 50V J		C8809	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C4915	NDCA1HJ-121W	C CAPACITOR	120pF 50V J		C8811	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C4916	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K						
C4921	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		R1001	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	
C4922	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1002	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	
C4932	NBE21AM-106X	TA E CAPACITOR	10uF 10V M		R1003	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C4935	NBE90JM-106X	TA E CAPACITOR	10uF 6.3V M		R1006	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C4941	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1007	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C4942	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1008	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C6001	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1015	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6002	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1016	NRSA6AJ-753W	MG RESISTOR	75kΩ 1/16W J	
C6004	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1017	NRSA6AJ-334W	MG RESISTOR	330kΩ 1/16W J	
C6005	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1018	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
C6006	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1019	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
C6007	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1020	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
C6008	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1021	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C6101	NCB21CK-104X	C CAPACITOR	0.1uF 16V K		R1023	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C6102	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K		R1024	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6103	NCBA1HK-221W	C CAPACITOR	220pF 50V K		R1027	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6201	NCB21CK-104X	C CAPACITOR	0.1uF 16V K		R1028	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6202	NCJ20JK-106X-D	C CAPACITOR	10uF 6.3V K		R1029	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6204	NCBA1HK-221W	C CAPACITOR	220pF 50V K		R1030	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GR-D721EX	A	GR-D727EY	D	GR-D728EZ	G	GR-D750AC	K	GR-D770AS	P
GR-D726EX	B	GR-D728EK	E	GR-D740AC	H	GR-D750AS	M		
GR-D727EX	C	GR-D728EY	F	GR-D747EY	J	GR-D770AC	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R1031	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R2202	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J	
R1033	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R2203	NRSA6AJ-393W	MG RESISTOR	39kΩ 1/16W J	
R1036	NRSA6AJ-561W	MG RESISTOR	560Ω 1/16W J		R2204	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J	
R1037	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	AB,C,D,E,F,G,H,J,K,M	R2206	NRSA6AJ-563W	MG RESISTOR	56kΩ 1/16W J	
R1038	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R2207	NRSA6AJ-563W	MG RESISTOR	56kΩ 1/16W J	
R1039	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	AB,C,D,E,F,G,H,J,K,M	R2208	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	
R1040	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R2209	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	
R1041	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J		R2210	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J	
R1042	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R2211	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J	
R1043	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R2217	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	
R1044	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R2402	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	
R1045	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R2403	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J	
R1046	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R2407	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	
R1047	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J		R2601	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	
R1048	NRSA6AJ-272W	MG RESISTOR	2.7kΩ 1/16W J		R2602	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	
R1049	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J		R2607	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	
R1050	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R2608	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	
R1051	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R2609	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	
R1052	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J		R2610	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	
R1053	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R3005	NRSA6AJ-224W	MG RESISTOR	220kΩ 1/16W J	
R1054	NRSA6AJ-393W	MG RESISTOR	39kΩ 1/16W J		R3006	NRSA6AJ-224W	MG RESISTOR	220kΩ 1/16W J	K,M,N,P
R1055	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3007	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
R1056	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J		R3009	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
R1057	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3011	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	
R1058	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3014	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	
R1059	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3016	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	
R1060	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3017	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	
R1061	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3018	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	
R1066	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3022	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1067	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	N,P	R3028	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	
R1070	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3029	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
R1074	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3031	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1075	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3041	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	K,M,N,P
R1077	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3043	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	
R1078	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3044	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
R1079	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3060	NRSA6AD-911W	MG RESISTOR	910Ω 1/16W D	
R1080	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3061	NRSA6AD-911W	MG RESISTOR	910Ω 1/16W D	
R1082	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3062	NRSA6AD-911W	MG RESISTOR	910Ω 1/16W D	
R1083	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	N,P	R3063	NRSA6AD-822W	MG RESISTOR	8.2kΩ 1/16W D	
R1084	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3064	NRSA6AD-183W	MG RESISTOR	18kΩ 1/16W D	
R1086	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	N,P	R3065	NRSA6AD-273W	MG RESISTOR	27kΩ 1/16W D	
R1091	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	C,D,E,F,G,J,N,P	R3066	NRSA6AD-911W	MG RESISTOR	910Ω 1/16W D	
R1092	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	C,D,E,F,G,J,N,P	R3067	NRSA6AD-822W	MG RESISTOR	8.2kΩ 1/16W D	
R1093	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	C,D,E,F,G,J,N,P	R3068	NRSA6AD-911W	MG RESISTOR	910Ω 1/16W D	
R1095	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	K,M,N,P	R3069	NRSA6AD-911W	MG RESISTOR	910Ω 1/16W D	
R1096	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	AB,C,D,E,F,G,H,J	R3071	NRSA6AD-681W	MG RESISTOR	680Ω 1/16W D	H,J,K,M,N,P
R1601	NRSA6AJ-681W	MG RESISTOR	680Ω 1/16W J		R3072	NRSA6AD-822W	MG RESISTOR	8.2kΩ 1/16W D	
R1602	NRSA6AJ-124W	MG RESISTOR	120kΩ 1/16W J		R3073	NRSA6AD-751W	MG RESISTOR	750Ω 1/16W D	AB,C,D,E,F,G
R1603	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R3073	NRSA6AD-681W	MG RESISTOR	680Ω 1/16W D	H,J,K,M,N,P
R1604	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3083	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1610	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J		R3115	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	N,P
R1611	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J		R3121	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1612	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J		R3126	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1613	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3128	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1614	NRZ0072-R330X	MG RESISTOR	0.33Ω 1/4W F		R3156	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	N,P
R1616	NRVA6AD-392W	CMF RESISTOR	3.9kΩ 1/16W D		R3157	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	N,P
R1617	NRZ0072-R330X	MG RESISTOR	0.33Ω 1/4W F		R3158	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	N,P
R1620	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J		R3159	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	N,P
R1621	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3161	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1622	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3168	NRSA6AJ-681W	MG RESISTOR	680Ω 1/16W J	
R1624	NRVA6AD-183W	CMF RESISTOR	18kΩ 1/16W D		R3169	NRSA6AJ-681W	MG RESISTOR	680Ω 1/16W J	
R1625	NRVA6AD-681W	CMF RESISTOR	680Ω 1/16W D		R3172	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	N,P
R1629	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J		R3506	NRSA6AD-151W	MG RESISTOR	150Ω 1/16W D	
R1635	NRSA6AJ-272W	MG RESISTOR	2.7kΩ 1/16W J		R3507	NRSA6AD-151W	MG RESISTOR	150Ω 1/16W D	
R1636	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J		R3508	NRSA6AD-151W	MG RESISTOR	150Ω 1/16W D	
R1637	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J		R3509	NRSA6AD-151W	MG RESISTOR	150Ω 1/16W D	
R1701	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J		R3530	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1702	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R3536	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1703	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R3705	NRSA6AD-680W	MG RESISTOR	68Ω 1/16W D	H,J,K,M,N,P
R1704	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R3706	NRSA6AD-680W	MG RESISTOR	68Ω 1/16W D	
R1705	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R3707	NRSA6AD-680W	MG RESISTOR	68Ω 1/16W D	H,J,K,M,N,P
R1706	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J		R3709	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	H,J,K,M,N,P
R1707	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3710	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	H,J,K,M,N,P
R1708	NRSA6AJ-124W	MG RESISTOR	120kΩ 1/16W J		R3711	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J	H,J,K,M,N,P
R1709	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3712	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	H,J,K,M,N,P
R1710	NRSA6AJ-124W	MG RESISTOR	120kΩ 1/16W J		R3716	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1711	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3717	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1712	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3718	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GR-D721EX	A	GR-D727EY	D	GR-D728EZ	G	GR-D750AC	K	GR-D770AS	P
GR-D726EX	B	GR-D728EK	E	GR-D740AC	H	GR-D750AS	M		
GR-D727EX	C	GR-D728EY	F	GR-D747EY	J	GR-D770AC	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R3719	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R6709	NRSA6AJ-114W	MG RESISTOR	110kΩ 1/16W J	
R3720	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R6712	NRSA6AJ-561W	MG RESISTOR	560Ω 1/16W J	
R3721	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R6713	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R3722	NRSA6AJ-124W	MG RESISTOR	120kΩ 1/16W J		R6714	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	
R3723	NRSA6AJ-124W	MG RESISTOR	120kΩ 1/16W J		R6715	NRSA6AJ-512W	MG RESISTOR	5.1kΩ 1/16W J	
R4201	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R6716	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	
R4204	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D		R6717	NRSA6AJ-203W	MG RESISTOR	20kΩ 1/16W J	
R4224	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D		R6718	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R4226	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J		R6719	NRSA6AJ-304W	MG RESISTOR	300kΩ 1/16W J	
R4227	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J		R6721	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R4228	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J		R6801	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R4229	NQR0286-009X	FERRITE BEADS			R6802	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J	
R4230	NQR0286-009X	FERRITE BEADS			R7701	NRSA6AD-393W	MG RESISTOR	39kΩ 1/16W D	
R4231	NQR0286-009X	FERRITE BEADS			R7702	NRSA6AD-682W	MG RESISTOR	6.8kΩ 1/16W D	
R4234	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R7703	NRSA6AD-123W	MG RESISTOR	12kΩ 1/16W D	
R4901	NRSA6AJ-202W	MG RESISTOR	2kΩ 1/16W J		R7704	NRSA6AD-123W	MG RESISTOR	12kΩ 1/16W D	
R4902	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R7705	NRSA6AD-123W	MG RESISTOR	12kΩ 1/16W D	
R4903	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J		R7706	NRSA6AD-392W	MG RESISTOR	3.9kΩ 1/16W D	
R4904	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R7707	NRSA6AD-392W	MG RESISTOR	3.9kΩ 1/16W D	
R4905	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J		R7708	NRSA6AD-392W	MG RESISTOR	3.9kΩ 1/16W D	
R4906	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J		R7709	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J	
R4907	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J		R7710	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J	
R4909	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J		R7711	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J	
R4910	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R7801	NRSA6AD-393W	MG RESISTOR	39kΩ 1/16W D	
R4911	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R7802	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	
R4912	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R7803	NRSA6AD-273W	MG RESISTOR	27kΩ 1/16W D	
R4916	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R7804	NRSA6AD-273W	MG RESISTOR	27kΩ 1/16W D	
R4917	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R7805	NRSA6AD-273W	MG RESISTOR	27kΩ 1/16W D	
R4919	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R7806	NRSA6AD-392W	MG RESISTOR	3.9kΩ 1/16W D	
R4920	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J		R7807	NRSA6AD-392W	MG RESISTOR	3.9kΩ 1/16W D	
R4924	NRSA6AJ-124W	MG RESISTOR	120kΩ 1/16W J		R7808	NRSA6AD-392W	MG RESISTOR	3.9kΩ 1/16W D	
R4925	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R7809	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R4931	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J		R7810	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R4949	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R7811	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R4950	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J		R7812	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	
R4951	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R7813	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	
R4953	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J		R7814	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	
R4954	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R7815	NRSA6AD-334W	MG RESISTOR	330kΩ 1/16W D	
R4955	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R7816	NRSA6AD-334W	MG RESISTOR	330kΩ 1/16W D	
R4962	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R7817	NRSA6AD-334W	MG RESISTOR	330kΩ 1/16W D	
R4964	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R7818	NRSA6AD-123W	MG RESISTOR	12kΩ 1/16W D	
R6001	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R7820	NRSA6AD-273W	MG RESISTOR	27kΩ 1/16W D	
R6004	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R7821	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	
R6005	NRVA6AD-393W	CMF RESISTOR	39kΩ 1/16W D		R7822	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	
R6006	NRSA6AJ-124W	MG RESISTOR	120kΩ 1/16W J		R8002	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	N,P
R6007	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R8008	NRSA6AJ-561W	MG RESISTOR	560Ω 1/16W J	N,P
R6008	NRVA6AD-823W	CMF RESISTOR	82kΩ 1/16W D		R8009	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	N,P
R6009	NRVA6AD-333W	CMF RESISTOR	33kΩ 1/16W D		R8011	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	N,P
△ R6010	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R8012	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	N,P
R6013	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R8015	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	N,P
R6014	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R8016	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	N,P
R6015	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8017	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	N,P
R6016	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8019	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	N,P
R6017	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8021	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	N,P
R6101	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R8022	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	N,P
R6105	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R8023	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	N,P
R6106	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J		R8025	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	N,P
R6204	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R8031	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	N,P
R6205	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R8041	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	N,P
R6301	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8042	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	N,P
R6303	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R8046	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	N,P
R6304	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J		R8050	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	N,P
R6305	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R8051	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	N,P
R6307	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R8054	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	N,P
R6308	NRSA6AJ-562W	MG RESISTOR	5.6kΩ 1/16W J		R8056	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	N,P
R6401	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8058	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	N,P
R6403	NRSA6AJ-273W	MG RESISTOR	27kΩ 1/16W J		R8059	NRSA6AJ-134W	MG RESISTOR	130kΩ 1/16W J	N,P
R6404	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R8060	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	N,P
R6407	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R8062	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	N,P
R6408	NRSA6AJ-562W	MG RESISTOR	5.6kΩ 1/16W J		R8063	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	N,P
R6502	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R8064	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	N,P
R6512	NRSA6AJ-392W	MG RESISTOR	3.9kΩ 1/16W J		R8065	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	N,P
R6514	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J		R8066	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	N,P
R6515	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8067	NRSA6AJ-182W	MG RESISTOR	1.8kΩ 1/16W J	N,P
R6519	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J		R8068	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	N,P
R6701	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8069	NRSA6AJ-182W	MG RESISTOR	1.8kΩ 1/16W J	N,P
R6702	NRV142F-R20X	CMF RESISTOR	0.2Ω 1/4W F		R8070	NRSA6AJ-182W	MG RESISTOR	1.8kΩ 1/16W J	N,P
R6708	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J		R8071	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	N,P

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GR-D721EX	A	GR-D727EY	D	GR-D728EZ	G	GR-D750AC	K	GR-D770AS	P
GR-D726EX	B	GR-D728EK	E	GR-D740AC	H	GR-D750AS	M		
GR-D727EX	C	GR-D728EY	F	GR-D747EY	J	GR-D770AC	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R8072	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	N,P	L6401	NQLZ015-470X	COIL	47uH	
R8073	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	N,P	L6501	NQL52EM-221X	COIL	220uH M	
R8074	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	N,P	L6502	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R8801	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J		L6701	NQL52EM-390X	COIL	39uH M	
R8802	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		L6801	NQL79GM-470X	COIL	47uH M	
R8803	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		L7701	NQLC32M-100X	COIL	10uH M	
R8804	NRSA6AJ-394W	MG RESISTOR	390kΩ 1/16W J		L7801	NQR0602-001X	FERRITE BEADS		
R8805	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		L8001	NQR0602-001X	FERRITE BEADS		N,P
R8806	NRSA6AD-560W	MG RESISTOR	56Ω 1/16W D		L8002	NQR0602-001X	FERRITE BEADS		N,P
R8807	NRSA6AD-560W	MG RESISTOR	56Ω 1/16W D		L8003	NQR0602-001X	FERRITE BEADS		N,P
R8808	NRSA6AD-560W	MG RESISTOR	56Ω 1/16W D		L8006	NQR0006-001X	FERRITE BEADS		N,P
R8809	NRSA6AD-560W	MG RESISTOR	56Ω 1/16W D		L8008	NQL402M-100X	COIL	10uH M	N,P
R8810	NRSA6AD-512W	MG RESISTOR	5.1kΩ 1/16W D		L8010	NQR0536-001X	CHOKE COIL		N,P
R8811	NRSA6AD-751W	MG RESISTOR	750Ω 1/16W D		L8011	NQR0602-001X	FERRITE BEADS		N,P
R8812	NRSA6AD-562W	MG RESISTOR	5.6kΩ 1/16W D		L8801	NQR0602-001X	FERRITE BEADS		
R8821	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		L8802	NQR0602-001X	FERRITE BEADS		
RA1001	NRZ0034-473W	NET RESISTOR	47kΩ 1/32W J x4		L8803	NQR0635-001X	CHOKE COIL		
RA1002	NRZ0034-104W	NET RESISTOR	100kΩ 1/32W J x4		L8804	NQR0635-001X	CHOKE COIL		
RA1003	NRZ0034-104W	NET RESISTOR	100kΩ 1/32W J x4		CN101	QGF0528F4-40X	CONNECTOR	REAR(W DSC) FFC/FPC (1-40)	N,P
RA1004	NRZ0034-104W	NET RESISTOR	100kΩ 1/32W J x4		CN102	QGB0519J1-20X	CONNECTOR	JIG CN B-B (1-20)	
RA1008	NRZ0034-102W	NET RESISTOR	1kΩ 1/32W J x4		CN103	QGF0549C2-26W	CONNECTOR	OPE FFC/FPC (1-26)	
RA1009	NRZ0034-332W	NET RESISTOR	3.3kΩ 1/32W J x4		CN105	QGF0549C2-12W	CONNECTOR	Z/P FFC/FPC (1-12)	
RA3001	NRZ0034-221W	NET RESISTOR	220Ω 1/32W J x4 N,P		CN106	QGF0528F4-34X	CONNECTOR	REAR(W DSC) FFC/FPC (1-34)	AB,C,D,E,F,G,H,J,K,M
RA3002	NRZ0034-221W	NET RESISTOR	220Ω 1/32W J x4 N,P		CN1601	QGF0543F3-08X	CONNECTOR	LM/E FFC/FPC (1-8)	
RA3003	NRZ0034-221W	NET RESISTOR	220Ω 1/32W J x4 N,P		CN1602	QGF0543F3-11X	CONNECTOR	DRUM FFC/FPC (1-11)	
RA3004	NRZ0034-221W	NET RESISTOR	220Ω 1/32W J x4 N,P		CN1603	QGF0543F3-18X	CONNECTOR	CAPS FFC/FPC (1-18)	
RA3005	NRZ0034-470W	NET RESISTOR	47Ω 1/32W J x4		CN1604	QGF0543F3-16X	CONNECTOR	SENS FFC/FPC (1-16)	
RA3006	NRZ0034-470W	NET RESISTOR	47Ω 1/32W J x4		CN2601	QGA1001F1-04X	CONNECTOR	MIC W-B (1-4)	
RA4201	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4		CN3501	QGF0543F3-08X	CONNECTOR	HEAD FFC/FPC (1-8)	
RA4202	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4		CN4201	QGF0549C2-20W	CONNECTOR	CCD FFC/FPC (1-20)	
RA4203	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4		CN4901	QGF0549C2-26W	CONNECTOR	OP FFC/FPC (1-26)	
RA8001	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4 N,P		CN7801	QGF0549C2-18W	CONNECTOR	VF FFC/FPC (1-18)	
RA8002	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4 N,P		△ F1601	NMFZ024-R25X-A	FUSE	0.25A	
RA8003	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4 N,P		△ F1602	NMFZ024-R50X-A	FUSE	0.5A	
RA8004	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J x4 N,P		△ F6001	NMFZ024-2R5X-A	FUSE	2.5A	
RA8005	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J x4 N,P		J102	QNZ0822-001	D CONNECTOR	DVJACK	
RA8006	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J x4 N,P		J103	QNZ0617-001	USB CONNECTOR	USB	N,P
RA8007	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J x4 N,P		TL101	NNZ0084-002X	EARTH TERMINAL		
RA8008	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J x4 N,P		TL102	NNZ0084-002X	EARTH TERMINAL		
RA8009	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J x4 N,P		TL104	NNZ0138-001X	EARTH TERMINAL		
L1001	NQLC32M-100X	COIL	10uH M		X1001	NAX0645-001X	CRYSTAL	20.000MHz	
L1002	NQLC32M-100X	COIL	10uH M		X1002	NAX0564-001X	CRYSTAL	32.768kHz	
L1601	NQLC32M-100X	COIL	10uH M		X4201	NAX0879-001X	CRYSTAL		
L1602	NQLC32M-100X	COIL	10uH M		OT1	LY35452-001A	LED BASE	LEDBASE	C,D,E,F,G,J,N,P
L2401	NQR0602-001X	FERRITE BEADS			CCD BOARD ASSEMBLY <02>				
L2402	NQR0602-001X	FERRITE BEADS			△ Symbol No.	Part No.	Part Name	Description	Local
L2403	NQR0602-001X	FERRITE BEADS			PW1	LYA20034-01A	CCD BOARD ASSY	CCD PWB	
L2601	NQR0602-001X	FERRITE BEADS			Q5001	2SC3931/CD/-X	TRANSISTOR		
L2602	NQR0602-001X	FERRITE BEADS			Q5001	or 2SC4265JC07-X	TRANSISTOR		
L2603	NQR0602-001X	FERRITE BEADS			Q5001	or 2SC5345U/Y/-X	TRANSISTOR		
L3001	NQLC32M-100X	COIL	10uH M		C5001	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
L3002	NQLC32M-100X	COIL	10uH M		C5002	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
L3004	NQLC32M-100X	COIL	10uH M		C5004	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
L3005	NQLC32M-100X	COIL	10uH M		C5005	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
L3007	NQLC32M-100X	COIL	10uH M		C5006	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
L3009	NQLC32M-100X	COIL	10uH M		C5007	NCB31EK-222X	C CAPACITOR	2200pF 25V K	
L3014	NQLD8DJ-2R2X	COIL	2.2uH J	K,M,N,P	R5001	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
L3015	NQLD8DJ-120X	COIL	12uH J		R5007	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L3017	NQLC32M-100X	COIL	10uH M		R5008	NRSA63D-220X	MG RESISTOR	22Ω 1/16W D	
L3018	NQL315K-100X	COIL	10uH K	AB,C,D,E,F,G	R5009	NRSA63D-220X	MG RESISTOR	22Ω 1/16W D	
L3018	NQL315K-220X	COIL	22uH K	H,J,K,M,N,P	L5001	NQL315K-470X	COIL	47uH K	
L3501	NQR0602-001X	FERRITE BEADS			L5002	NQL315K-470X	COIL	47uH K	
L3505	NQR0602-001X	FERRITE BEADS							
L3702	NQR0602-001X	FERRITE BEADS		H,J,K,M,N,P					
L4201	NQL315K-100X	COIL	10uH K						
L4202	NQL315K-100X	COIL	10uH K						
L4203	NQL315K-220X	COIL	22uH K						
L4204	NQL315K-100X	COIL	10uH K						
L4205	NQL315K-100X	COIL	10uH K						
L4901	NQR0602-001X	FERRITE BEADS							
L4902	NQLC32M-100X	COIL	10uH M						
L4903	NQL38DK-100X	P COIL	10uH K						
L4904	NQL38DK-100X	P COIL	10uH K						
L6001	NQL382M-100X	COIL	10uH M						
L6101	NQLZ015-390X	COIL	39uH						
L6201	NQLZ015-390X	COIL	39uH						
L6301	NQLZ015-470X	COIL	47uH						

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GR-D721EX	A	GR-D727EY	D	GR-D728EZ	G	GR-D750AC	K	GR-D770AS	P
GR-D726EX	B	GR-D728EK	E	GR-D740AC	H	GR-D750AS	M		
GR-D727EX	C	GR-D728EY	F	GR-D747EY	J	GR-D770AC	N		

REAR BOARD ASSEMBLY <03>

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
					IC7601	MRSS23E-X	IC		
PW1	LYA20032-03A	REAR BOARD ASSY		N,P	Q7601	PUMX1-W	PAIR TRANSISTOR		
PW1	LYA20032-04A	REAR BOARD ASSY		A,B,C,D,E,F,G	Q7601	or BC847S-X	PAIR TRANSISTOR		
PW1	LYA20032-05A	REAR BOARD ASSY		H,J,K,M	Q7601	or KTC801U/G/-X	PAIR TRANSISTOR		
					Q7601	or RT3CLLM/EF/-X	PAIR TRANSISTOR		
D501	EMZ6.8N-X	Z DIODE	EMZ6.8N-X		Q7601	or UMX1N-W	PAIR TRANSISTOR		
D504	EMZ6.8N-X	Z DIODE	EMZ6.8N SD	N,P	Q7602	PUMX1-W	PAIR TRANSISTOR		
					Q7602	or BC847S-X	PAIR TRANSISTOR		
C503	NCB31CK-103X	C CAPACITOR	0.01uF 16V K		Q7602	or KTC801U/G/-X	PAIR TRANSISTOR		
C504	NCB31CK-103X	C CAPACITOR	0.01uF 16V K		Q7602	or RT3CLLM/EF/-X	PAIR TRANSISTOR		
C505	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	N,P	Q7602	or UMX1N-W	PAIR TRANSISTOR		
C506	NCB10JK-106X	C CAPACITOR	10uF 6.3V K	N,P					
C508	NCB31CK-105X	C CAPACITOR	1uF 16V K		D7601	NSSW008P/T117-X	LED		LED
C510	NDC31HG-151X	C CAPACITOR	150pF 50V G		D7602	NSSW008P/T117-X	LED		LED
C513	NCB31CK-104X	C CAPACITOR	0.1uF 16V K H,J,K,M,N,P		D7603	NSSW008P/T117-X	LED		LED
					D7604	UDZS20B-X	Z DIODE		ESD C/M
R501	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		D7605	UDZS20B-X	Z DIODE		ESD C/M
R502	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		D7606	UDZS20B-X	Z DIODE		ESD C/M
R503	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	N,P	D7607	UDZS20B-X	Z DIODE		ESD C/M
R504	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	N,P					
R505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	N,P	C7501	NCB31CK-105X	C CAPACITOR	1uF 16V K	
R506	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	N,P	C7502	NCB31CK-105X	C CAPACITOR	1uF 16V K	
R507	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	N,P	C7601	NBE21AM-106X	TA E CAPACITOR	10uF 10V M	
R508	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	N,P	C7602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
R509	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	N,P	C7605	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
R510	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	N,P	C7606	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
					C7607	NBE21AM-106X	TA E CAPACITOR	10uF 10V M	
L501	NQR0251-004X	FERRITE BEADS			C7608	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
L502	NQR0251-004X	FERRITE BEADS			C7609	NCB21CK-105X	C CAPACITOR	1uF 16V K	
L503	NQR0602-001X	FERRITE BEADS		N,P	C7610	NCB21CK-105X	C CAPACITOR	1uF 16V K	
L504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C7611	NCB21CK-105X	C CAPACITOR	1uF 16V K	
L505	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J H,J,K,M,N,P		C7612	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
L506	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J H,J,K,M,N,P		C7613	NCB31HK-471X	C CAPACITOR	470pF 50V K	
L507	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J		C7614	NBE90JM-106X	TA E CAPACITOR	10uF 6.3V M	
△ BT501	QAB0025-001	LITHIUM BATTERY	CR2032/1F4 3V 220mAh		C7615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
BT502	LY35422-001A	BATT.TERM.UNIT			C7617	NCB31CK-105X	C CAPACITOR	1uF 16V K	
CN501	QGF0508F3-40X	CONNECTOR	WITH SD FFC/FPC (1-40)	N,P	C7618	NCB31CK-105X	C CAPACITOR	1uF 16V K	
CN503	NNZ0151-001X	SD CARD CONNE	NNZ151(SD)	N,P	C7619	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
CN504	QGF0508F3-34X	CONNECTOR	W/O SD-34P FFC/FPC (1-34)	A,B,C,D,E,F,G,H,J,K,M	C7620	NCB31CK-105X	C CAPACITOR	1uF 16V K	
J501	QNS0078-001	3.5 JACK	AVJACK		C7621	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
J502	QND0068-001	S JACK	S JACK H,J,K,M,N,P		C7622	NBE21AM-226X	TA E CAPACITOR	22uF 10V M	
J503	QNA0039-001	DC JACK	DCJACK		C7623	NCB21CK-105X	C CAPACITOR	1uF 16V K	
S501	NSW0181-001X	DETECT SWITCH	EJECT		C7624	NCB21CK-105X	C CAPACITOR	1uF 16V K	
OT1	LY30034-038A	SPACER(A)	SD SPACER	N,P	C7625	NCB31CK-105X	C CAPACITOR	1uF 16V K	
WR1	WJT0207-002A-E	E-CARD WIRE	FFC(S5=01)	A,B,C,D,E,F,G,H,J,K,M	C7626	NCB31CK-105X	C CAPACITOR	1uF 16V K	
WR1	WJT0207-001A-E	E-CARD WIRE	FFC(S5=01)	N,P					

JUNCTION BOARD ASSEMBLY <04>

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LYA20035-03E1	JUNCTION BOARD ASSY		N,P
PW1	LYA20035-04E1	JUNCTION BOARD ASSY		A,B,C,D,E,F,G,H,J,K,M
R401	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	
CN401	QGF0543F3-26X	CONNECTOR	MAIN FFC/FPC (1-26)	
CN402	QGF0534F2-22X	CONNECTOR	MONI FFC/FPC (1-22)	
CN403	QGF0534F3-06X	CONNECTOR	SW FFC/FPC (1-6)	
CN404	QGA1001F1-02X	CONNECTOR	TO SPK W-B (1-2)	
S401	NSW0302-001X	DETECT SWITCH	MONISW	
S402	NSW0099-001X	SLIDE SWITCH	VID/MEM SW	N,P
OT1	QAL0933-001	FPC		

MONITOR BOARD ASSEMBLY <05>

△ Symbol No.	Part No.	Part Name	Description	Local
PW2	LYA20035-03E2	MONITOR BOARD ASSY		N,P
PW2	LYA20035-04E2	MONITOR BOARD ASSY		A,B,C,D,E,F,G,H,J,K,M

L7601	NQLC32M-100X	COIL	10uH M
L7602	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
L7603	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
L7604	NQLC32M-100X	COIL	10uH M
CN7601	QGF0560F1-22X	CONNECTOR	OPE FFC/FPC (1-22)
CN7602	QGF0534F2-36X	CONNECTOR	LCD FFC/FPC (1-36)
S7501	NSW0297-002X	TACT SWITCH	JOYST
S7502	NSW0198-001X	TACT SWITCH	MENU

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GR-D721EX	A	GR-D727EY	D	GR-D728EZ	G	GR-D750AC	K	GR-D770AS	P
GR-D726EX	B	GR-D728EK	E	GR-D740AC	H	GR-D750AS	M		
GR-D727EX	C	GR-D728EY	F	GR-D747EY	J	GR-D770AC	N		

 Symbol No. Part No. Part Name Description Local

S7503 NSW0198-001X TACT SWITCH TELE/INDEX

VF BOARD ASSEMBLY <06>

 Symbol No. Part No. Part Name Description Local

PW1 LYA20033-01B VF BOARD ASSY

Q7001 PUMX1-W PAIR TRANSISTOR
 Q7001 or BC847S-X PAIR TRANSISTOR
 Q7001 or KTC801U/G/-X PAIR TRANSISTOR
 Q7001 or RT3CLLM/EF/-X PAIR TRANSISTOR
 Q7001 or UMX1N-W PAIR TRANSISTOR

D7001 NESW007/A12QR-X E CAPACITOR
 D7002 UDZS5.1B-X Z DIODE
 D7002 or MA8051/M/-X Z DIODE

C7001 NCB21CK-105X C CAPACITOR 1uF 16V K
 C7002 NCB21CK-474X C CAPACITOR 0.47uF 16V K

R7001 NRSA63J-332X MG RESISTOR 3.3k Ω 1/16W J
 R7002 NRSA63J-561X MG RESISTOR 560 Ω 1/16W J
 R7003 NRSA63J-470X MG RESISTOR 47 Ω 1/16W J

CN7001 QGF0543F3-18X CONNECTOR FFC/FPC (1-18)
 CN7002 QGF0543F3-18X CONNECTOR FFC/FPC (1-18)
 S7001 NSW0271-001X DETECT SWITCH VF SW