

SECTION 5 PARTS LIST

5.1 EXPLODED VIEW

SAFETY PRECAUTION


Parts identified by the ⚠ symbol are critical for safety. Replace only with specified part numbers.

BEWARE OF BOGUS PARTS

Parts that do not meet specifications may cause trouble in regard to safety and performance. We recommend that genuine JVC parts be used.

5.1.1 PACKING AND ACCESSORY ASSEMBLY <M1>

The instruction manual to be provided with this product will differ according to the destination.

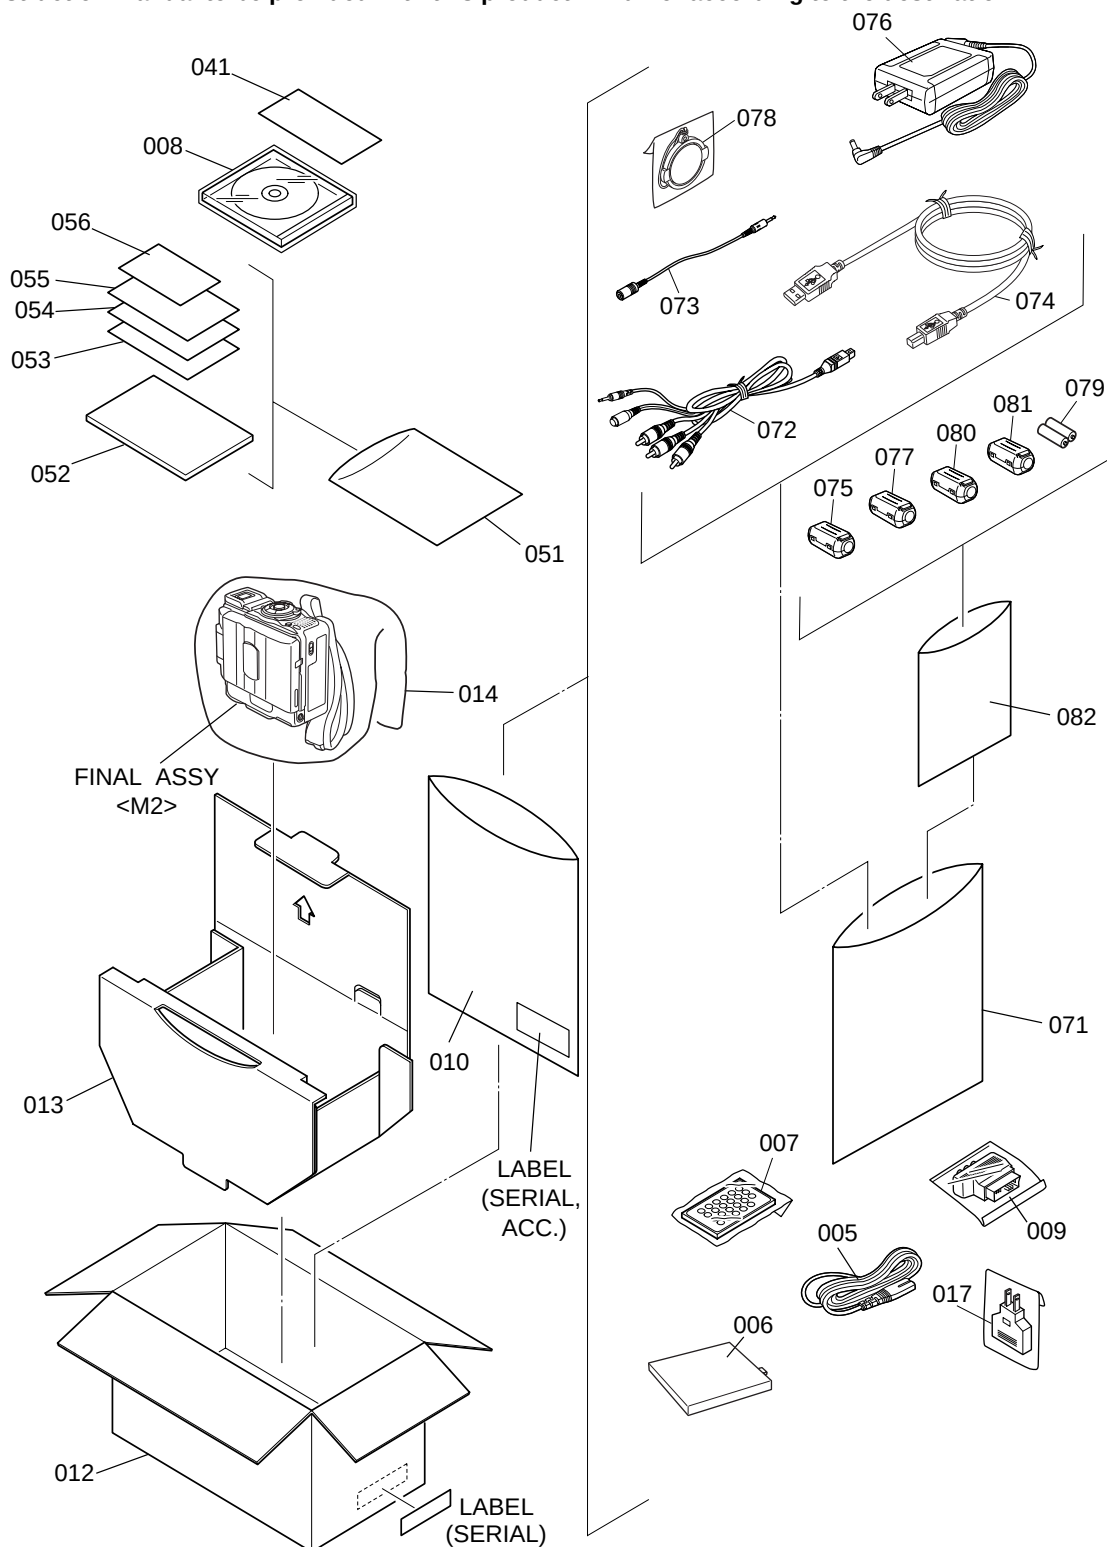

5.1.2 FINAL ASSEMBLY<M2>




<M2> FINAL ASS'Y

TABLE OF SETTING TORQUE FOR SCREW DRIVER

PART NO.	SETTING TORQUE
(115) (116) (117)	0.07 ±0.01 N·m
OTHER SCREW	0.09 ±0.01 N·m

Table 1 WIRE(FPC) CONNECTION TABLE

PWB NAME	CN No.	ASSY NAME	WIRE(FPC)NAME
MAIN PWB ASSY	CN101	LOWER ASSY(F)	BATT TERM
MAIN PWB ASSY	CN102	LOWER ASSY(F)	CCD
MAIN PWB ASSY	CN103	MECHA(A) ASSY	LOAD MOTOR
MAIN PWB ASSY	CN104	MECHA(A) ASSY	DRUM MOTOR
MAIN PWB ASSY	CN106	MECHA(A) ASSY	SENSOR
MAIN PWB ASSY	CN107	MECHA(A) ASSY	R.ENC
MAIN PWB ASSY	CN108	MECHA(A) ASSY	CAPSTAN
MAIN PWB ASSY	CN109	LOWER ASSY(F)	SD PWB ASSY (CN301)
MAIN PWB ASSY	CN110	MECHA(A) ASSY	HEAD
MAIN PWB ASSY	CN111	LOWER ASSY(F)	CAMERA OPE
MAIN PWB ASSY	CN112	UPPER ASSY(G)	SUB OPE
MAIN PWB ASSY	CN113	UPPER ASSY(G)	MON PWB
MAIN PWB ASSY	CN114	MIC ASSY	MIC WIRE
MAIN PWB ASSY	CN115	FRONT ASSY(G)	STROBE PWB

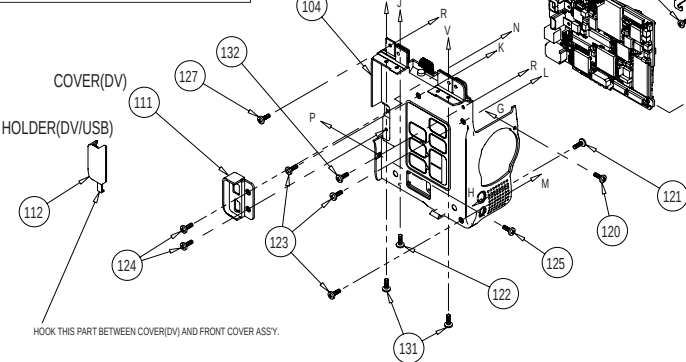




- NOTES
- While assembling the SET, don't touch CLEANER ROLLER portion of MECHA ASSY.
 - PREVENT THE MOTOR FPC FROM ENTERING IN FERNALLY IN THE DRUM UPPER BASE.
 - OPEN CASSETTE CAVER AND ASSEMBLE UPPER ASSY(G) AND FRONT ASSY(G).

FINAL ASS'Y LYH20619
CLEANER ASSY LYH20615


TABLE OF SETTING TORQUE FOR SCREW DRIVER

PART NO.	SETTING TORQUE
(188) (189)	0.069 ±0.007 N·m

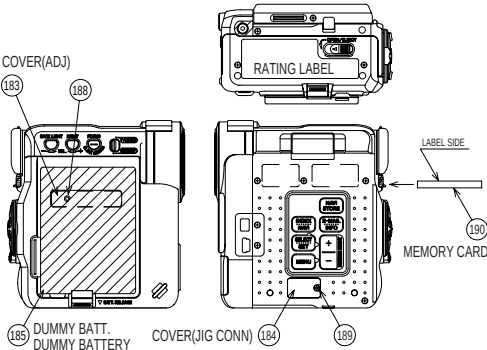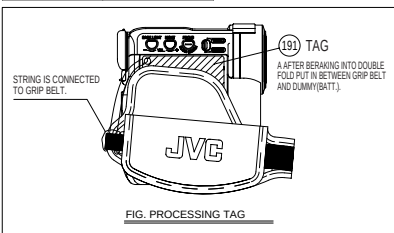

5.1.3 LOWER ASSEMBLY(F) AND LOWER ASSEMBLY(G)<M2>

<M2> LOWER ASS'Y(F)

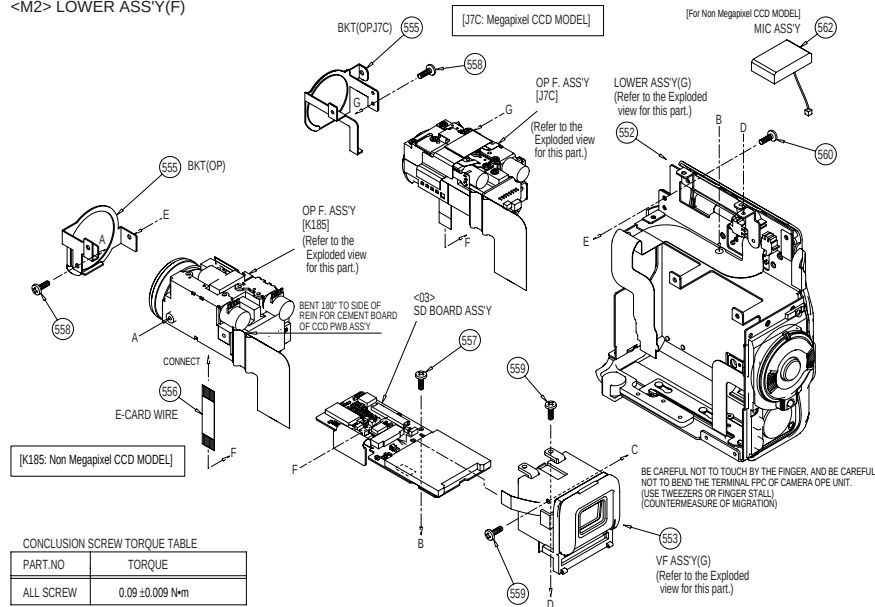

CONCLUSION SCREW TORQUE TABLE



PART.NO	TORQUE
ALL SCREW	0.09 ±0.009 N·m

LOWER ASS'Y(F) LYH20622



<M2> LOWER ASS'Y(G)

CONCLUSION SCREW TORQUE TABLE


PART.NO	TORQUE
514	0.07 ±0.009 N·m
ANOTHER SCREW	0.12 ±0.01 N·m

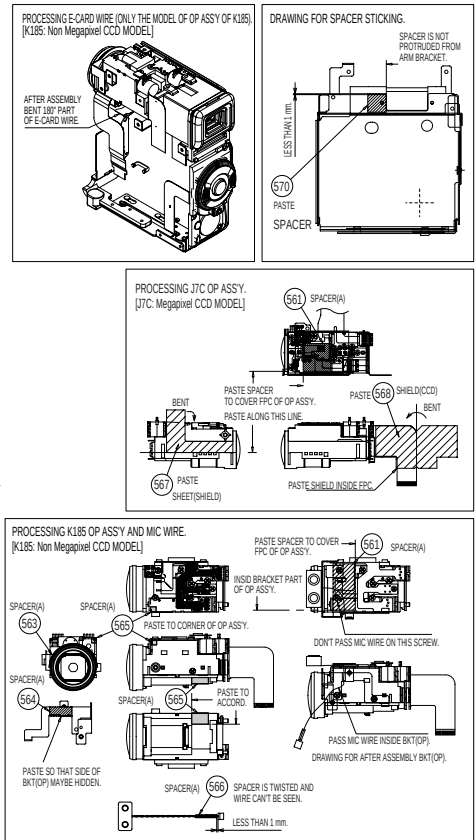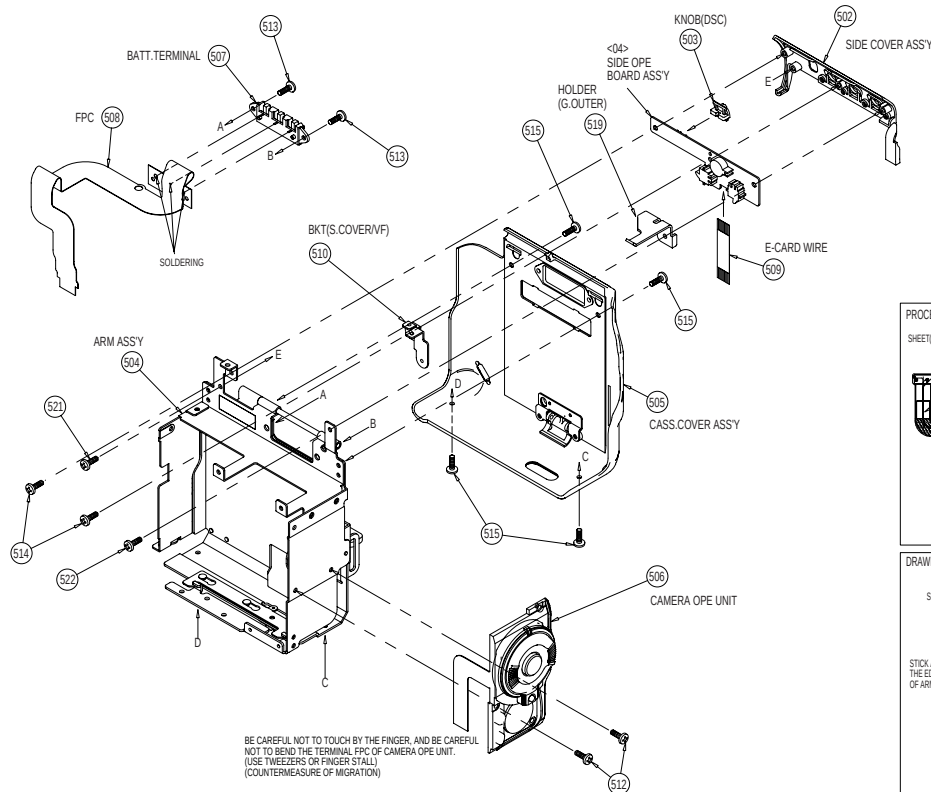

LOWER ASS'Y(G) LYH20620

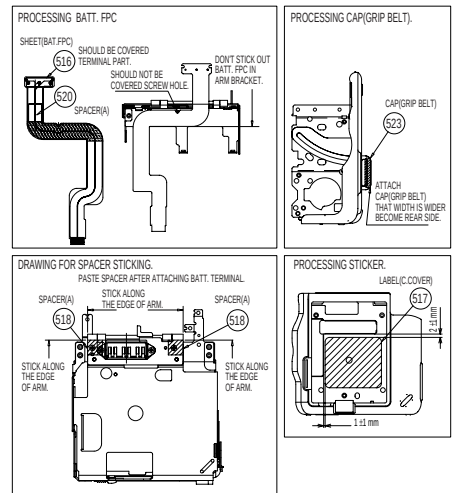



5.1.4 UPPER ASSEMBLY(G)<M2>

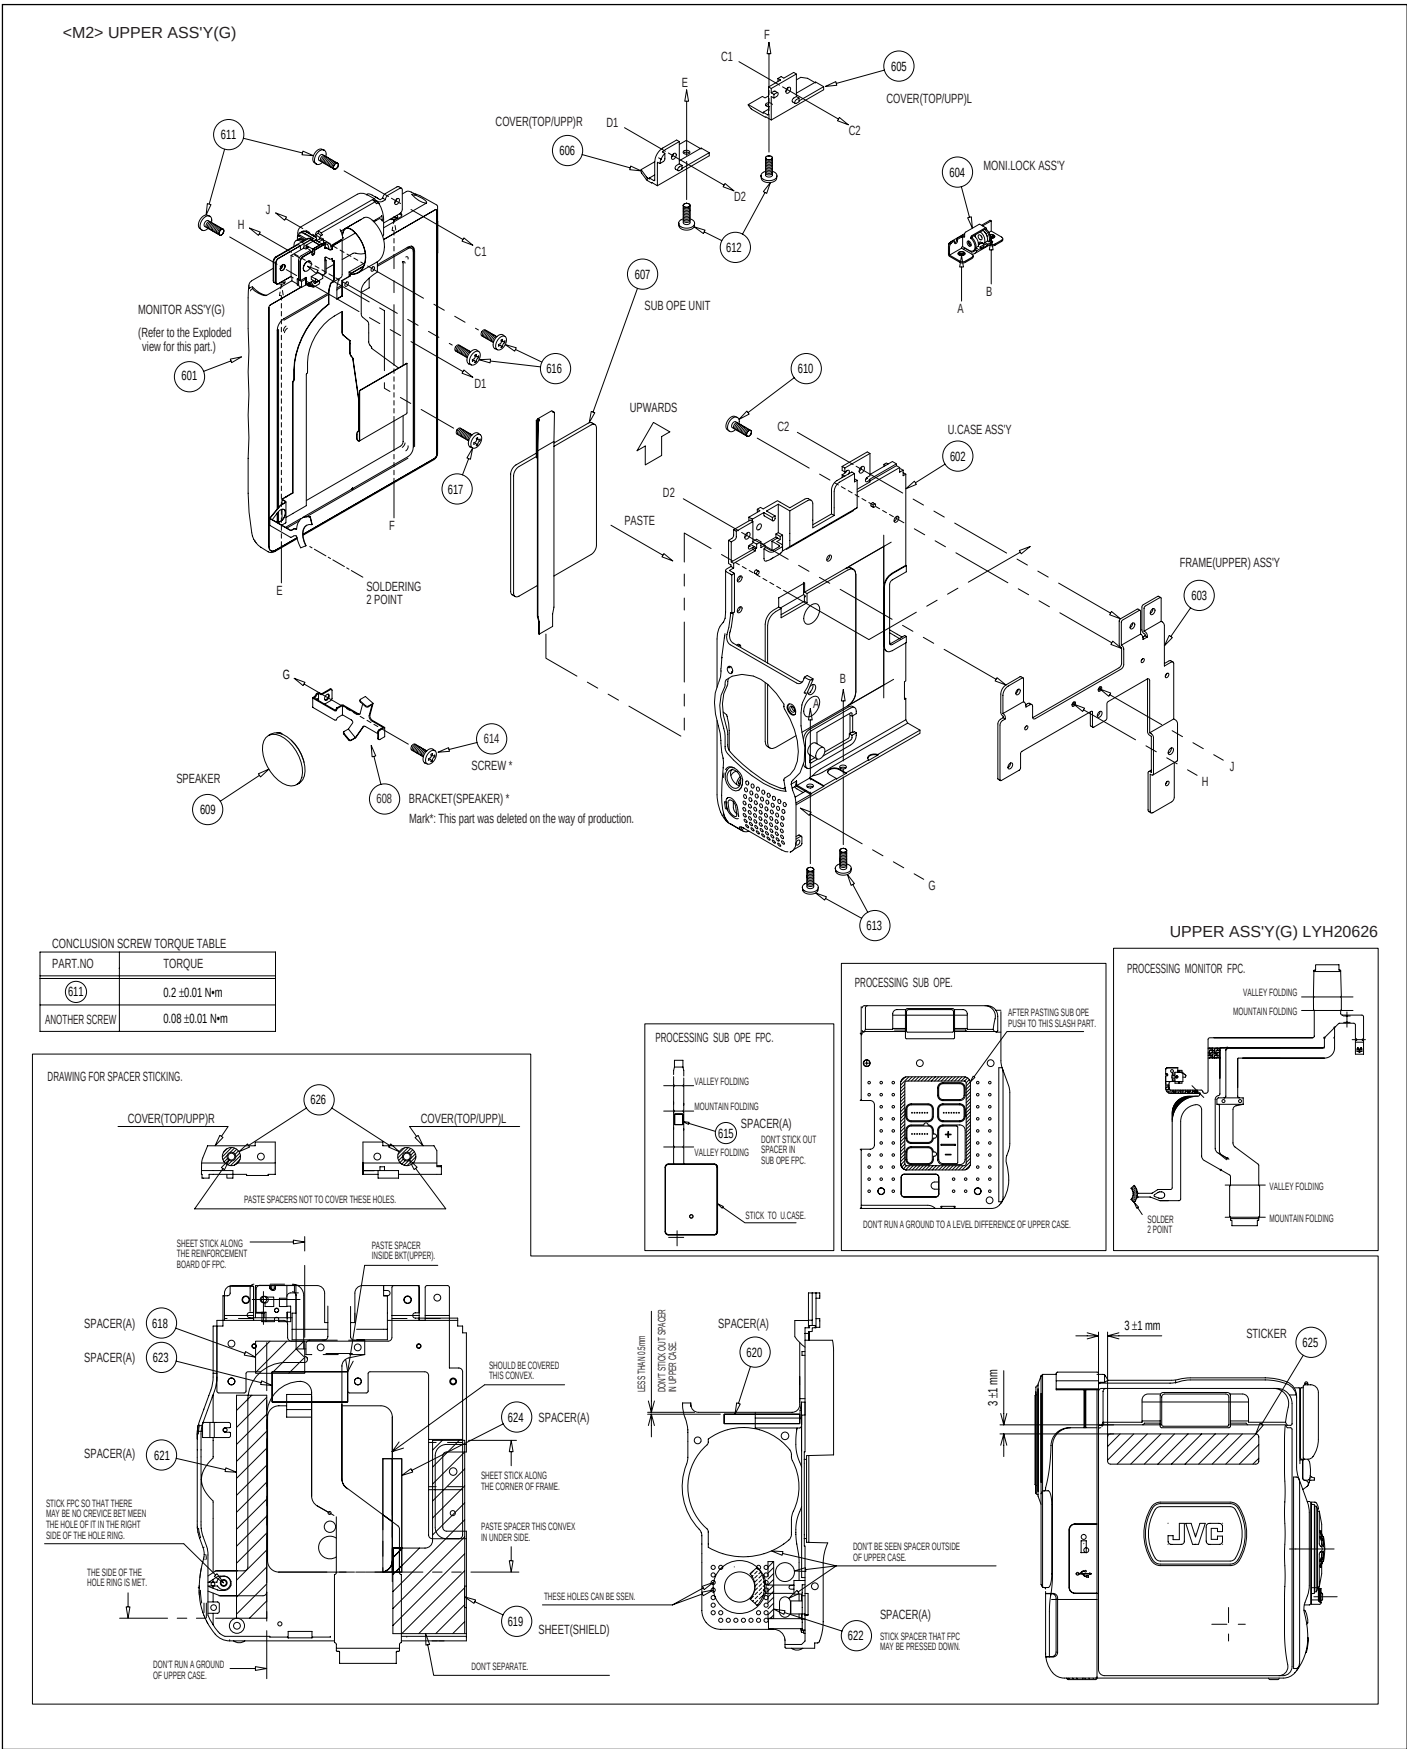


5.1.5 MONITOR ASSEMBLY(G)<M2>

<M2> MONITOR ASS'Y(G)

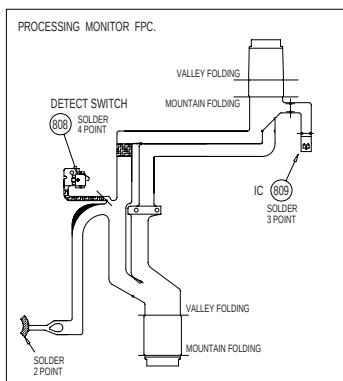

CONCLUSION SCREW TORQUE TABLE

PART NO.	SETTING TORQUE
(814)	0.2 ±0.02 N·m
(815)	0.055 ±0.01 N·m
OTHER SCREW	0.07 ±0.01 N·m

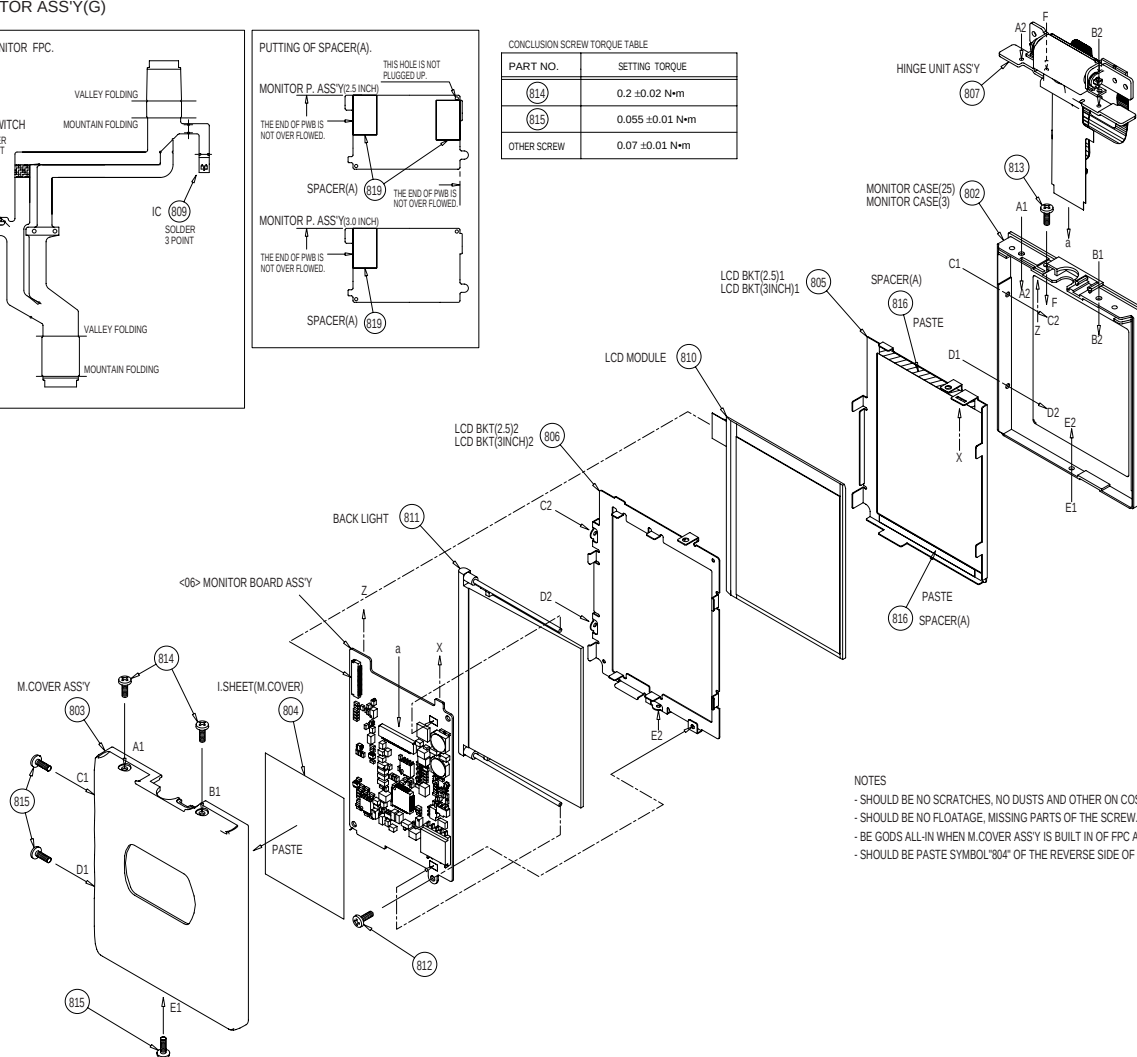


NOTES

- SHOULD BE NO SCRATCHES, NO DUSTS AND OTHER ON COSMETIC COMPONENTS.
- SHOULD BE NO FLOATAGE, MISSING PARTS OF THE SCREW.
- BE GOODS ALL-IN WHEN M. COVER ASS'Y IS BUILT IN OF FPC AND WIRE, ETC.
- SHOULD BE PASTE SYMBOL '804' OF THE REVERSE SIDE OF M. COVER.

MONITOR ASS'Y(G) LYH20625


LCD MODULE S.A.

1. PUTTING OF SPACER(A)

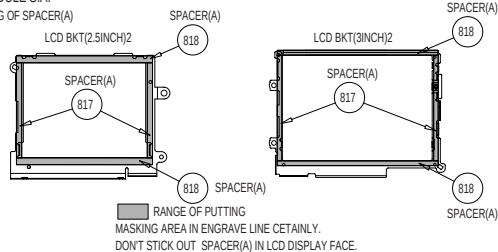


2. PUTTING OF LCD MODULE (2.5 & 3.0 INCH)

- PEEL OFF PROTECTION SHEET OF SPACER(A) ON LCD BKT2.
- CONFORM THAT LCD MODULE IS SUITABLE FOR POSITION OF LCD BKT2 AND PUT TWO PARTS.

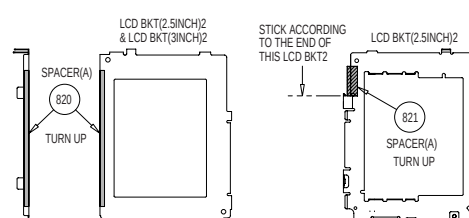

5.1.6 VF ASSEMBLY(G)<M2>

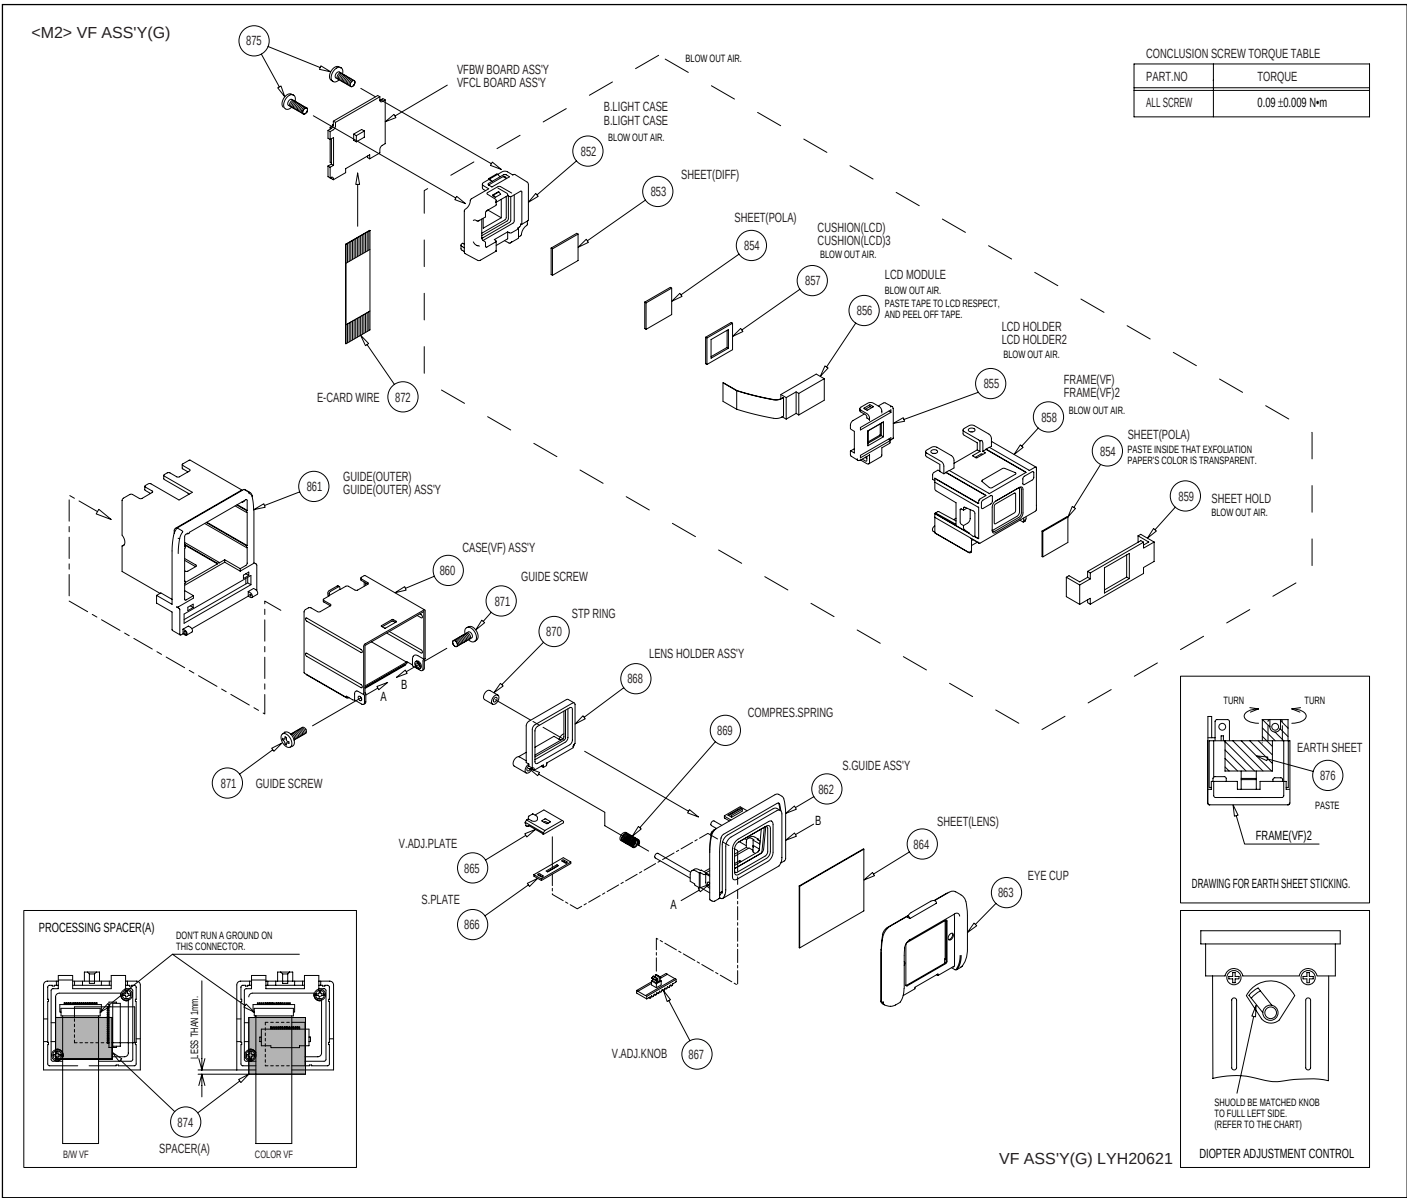

5.1.7 FRONT ASSEMBLY<M2>

<M2> FRONT ASS'Y

TABLE OF SETTING TORQUE FOR SCREW DRIVER	
PART NO.	SETTING TORQUE
ALL SCREW	0.09 ±0.009 N·m

FRONT ASS'Y(G) LYH20627

PROCESSING WIRE.

DRAWING(1) FOR SPACER STICKING.

DRAWING(2) FOR SPACER STICKING.

5.1.8 OP F. ASSEMBLY, OP ASSEMBLY AND OP BLOCK ASSEMBLY<M2>

<M2> OP F.ASS'Y
<M2> OP ASS'Y

[K185: Non Megapixel CCD MODEL]

DIRECTION OF SYMBOL "25" SHOULD BE ASSEMBLED BLUE COLOR PLATE SIDE TOWARD TO OP BLOCK ASSY.

SHOULD BE PUT "CCD PWB" IN THE DIRECTION OF FIG.

<M2> OP F.ASS'Y
<M2> OP BLOCK ASS'Y

[J7C: Megapixel CCD MODEL]

OP ASS'Y LYH20647
OP F.ASS'Y LYH20648


(fig1)

(fig2)

(fig3)

SHOULD BE PUT "CCD PWB" IN THE DIRECTION OF FIG.

5.1.9 MECHANISM ASSEMBLY <M3>

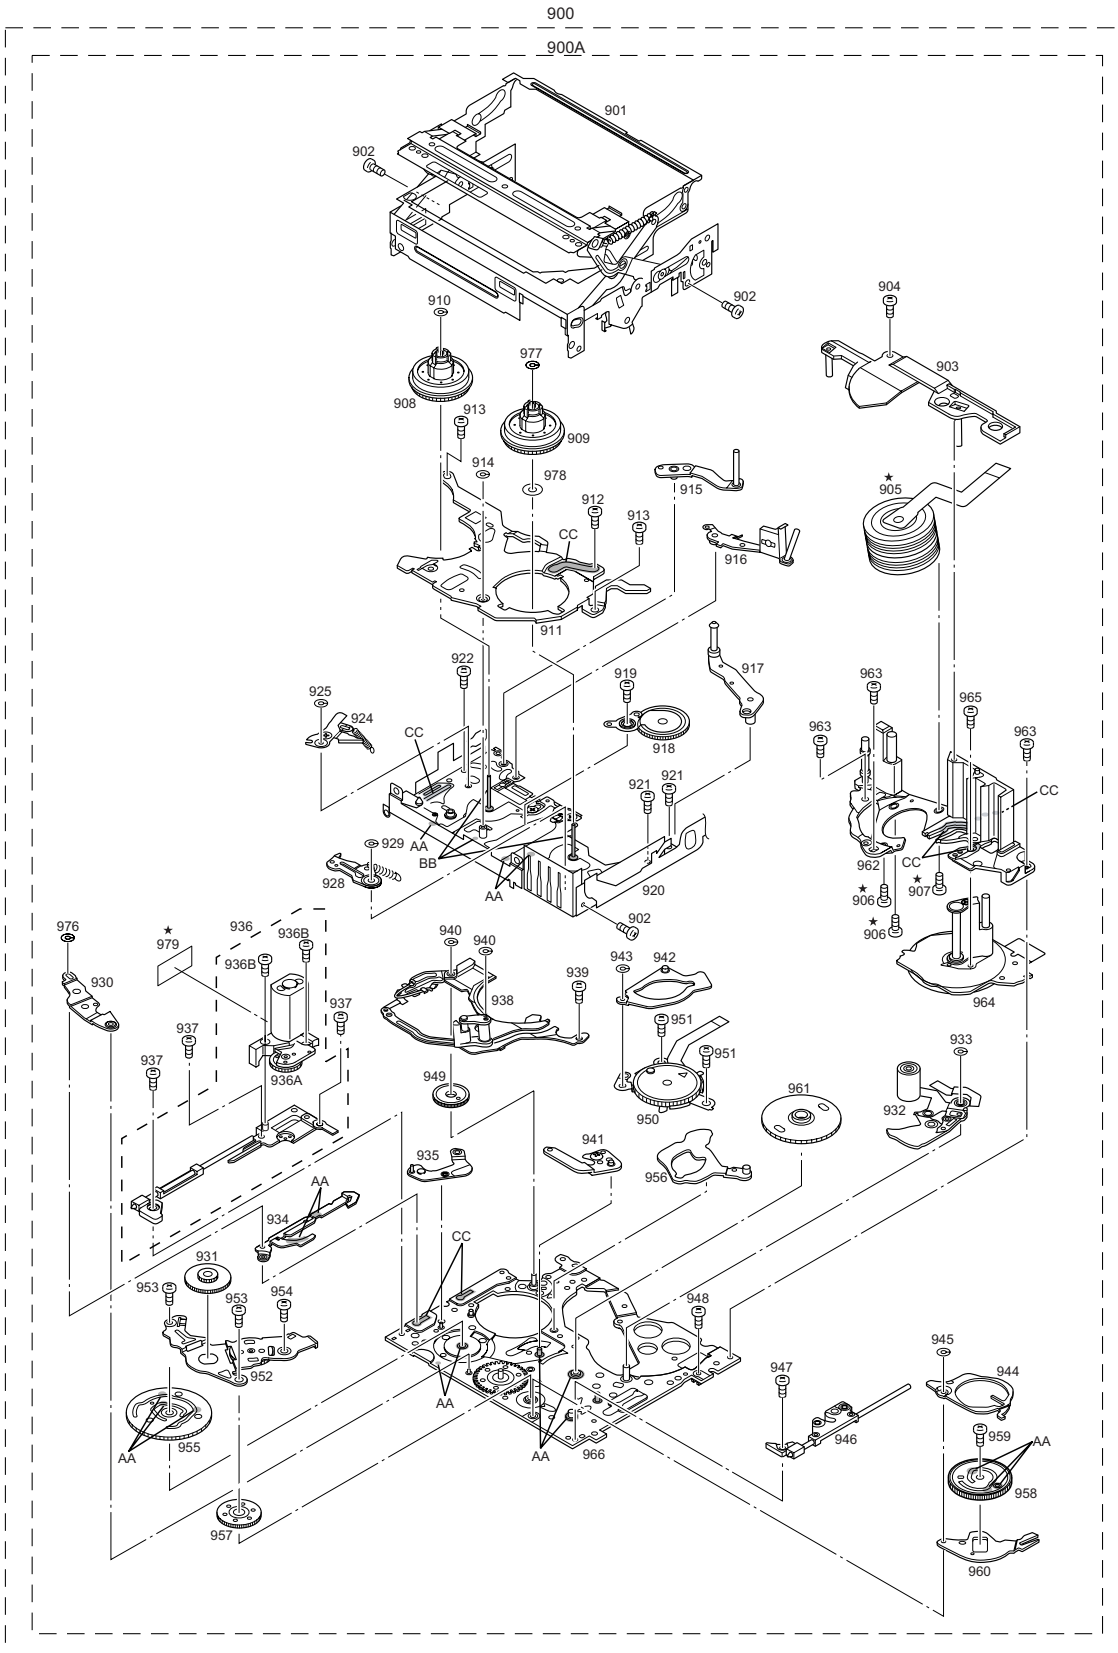

Classification	Part No.	Symbol in drawing
Grease	KYODO-SH-JB	AA
Oil	YTU94027	BB
Grease (HANARL)	RX-410R	CC

NOTE1: The section marked in **AA** and **BB**, **CC** indicate lubrication and greasing areas.

NOTE2: Mark ***** is not contained in 900A.

5.2 PARTS LIST

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

△ REF No. PART No. PART NAME, DESCRIPTION

PACKING AND ACCESSORY ASSEMBLY<M1>

△ 005	QMPP110-190-JR	POWER CORD,A,E
△ 005	QMPL120-190-JR	POWER CORD,B,C,D,F,G,H
△ 006	LY32203-003A	B.PACK ASSY,BN-V107-S,A,E
△ 006	LY32203-001A	B.PACK ASSY,BN-V107U,B,C,D,F,G,H
007	LY20750-001A	REMOTE CTL UNIT,RM-V717U
008	LY32210-051A	CD ROM ASSY
009	QAM0302-001	ADAPTOR PLUG,PERI-RCAS
010	QPA02503505P	POLY BAG,ACC.
012	LY33433-014B	PACKING CASE,A
012	LY33433-008A	PACKING CASE,B,C,D
012	LY33433-015B	PACKING CASE,E
012	LY33433-009A	PACKING CASE,F,G,H
013	LY21053-001B	CUSHION,A,B,C,D
013	LY21053-001A	CUSHION,E,F,G,H
014	LY30023-003A	POLY BAG
041	BT-54008-5	GUARANTY CARD,A,E
041	BT-54013-5	WARRANTY CARD,B,C,D,F,G,H
051	YQM30061-3	POLY BAG,DOCUMENT,A,E
051	QPA02003506	POLY BAG,DOCUMENT,B,C,D,F,G,H
△ 052	LYT1119-001B	IB(EN),A,E
△ 052	LYT1119-002B	IB(GE),B,C,F,G
△ 052	LYT1119-003B	IB(FR),B,F
△ 052	LYT1119-004B	IB(DU),B,F
△ 052	LYT1119-005B	IB(SP),B,F
△ 052	LYT1119-006B	IB(IT),B,F
△ 052	LYT1119-007B	IB(DA),C,G
△ 052	LYT1119-008B	IB(FI),C,G
△ 052	LYT1119-009B	IB(SW),C,G
△ 052	LYT1119-010B	IB(NO),C,G
△ 052	LYT1119-011B	IB(RU),D,H
△ 052	LYT1119-012B	IB(CZ),D,H
△ 052	LYT1119-013B	IB(PO),D,H
△ 052	LYT1119-014B	IB(HU),D,H
053	LYT1085-001A	IB(SOFT.EN),A,E
053	LYT1085-002A	IB(SOFT.GE),B,C,F,G
053	LYT1085-003A	IB(SOFT.FR),B,F
053	LYT1085-004A	IB(SOFT.DU),B,F
053	LYT1085-005A	IB(SOFT.SP),B,F
053	LYT1085-006A	IB(SOFT.IT),B,F
053	LYT1085-007A	IB(SOFT.DA),C,G
053	LYT1085-008A	IB(SOFT.FI),C,G
053	LYT1085-009A	IB(SOFT.SW),C,G
053	LYT1085-010A	IB(SOFT.NO),C,G
053	LYT1085-011A	IB(SOFT.RU),D,H
054	LYT0194-001B	Q.CARD(JUK),A,E
055	YU30878	REGIST. CARD,B,E
056	LYT1119-015A	SHEET(ATT.VF.1),A,B,E,F
056	LYT1119-016A	SHEET(ATT.VF.2),C,D,G,H
071	QPA01703005	POLY BAG,CABLE ASSY
072	QAM0415-001	MULTI CABLE,MULTI
073	QAM0402-001	RM CABLE,EDIT EXT
074	QAM0451-001	USB CABLE,USB
075	QQR0491-002	CORE FILTER,USB 1T
△ 076	LY20955-001C	AC ADAPTER,AP-V13E
△ 076	or LY20956-001B	AC ADAPTER,AP-V11E
077	QQR0917-002	CORE FILTER
078	LY33346-001A	HOOD CAP ASSY
079	———	BATTERY,X2,FOR RCU
080	QQR0917-002	CORE FILTER,MULTI
082	LY30023-014A	POLY BAG,CORE FILT.

△ REF No. PART No. PART NAME, DESCRIPTION

FINAL ASSEMBLY<M2>

102	LYH20627-010C	FRONT ASSY(G),A,E
102	LYH20627-009C	FRONT ASSY(G),B,C,D
102	LYH20627-011B	FRONT ASSY(G),F,G,H
103	LYH20622-010F	LOWER ASSY(F),A,E
103	LYH20622-009E	LOWER ASSY(F),B,C,D
103	LYH20622-011D	LOWER ASSY(F),F,G,H
104	LYH20626-010D	UPPER ASSY(G),A
104	LYH20626-009C	UPPER ASSY(G),B,C,D
104	LYH20626-012D	UPPER ASSY(G),E
104	LYH20626-011B	UPPER ASSY(G),F,G,H
106	LY33332-001A	MIC COVER
108	LY44087-001A	MECHA BKT ASSY
109	LY33354-001A	SHIELD PLATE
110	LY43083-001A	BKT(PRE-REC)
111	LY33333-001A	COVER(DV)
112	LY33386-001C	HOLDER(DV/USB),A,E
112	LY33386-002A	HOLDER(DV/USB),B,C,D,F,G,H
113	LY21032-001E	TOP COVER,A,E
113	LY21032-002E	TOP COVER,B,C,D,F,G,H
114	LY33318-001A	BRACKET(TOP)
115	LY30019-028A	SPECIAL SCREW,X3,MECHA-BKT
116	QYSPSPT1414M	SCREW,BKTP/R-MEC
117	LY30018-032A	SPECIAL SCREW,X2,SH.P/R-M.B
118	LY30018-032A	SPECIAL SCREW,X3,BKT(M)-ARM
119	LY30018-0K2A	SPECIAL SCREW,BKT(M)-BAS
120	LY30018-0D8A	SPECIAL SCREW,UP-C.OPE(U,A,E
120	LY30018-0D5A	SPECIAL SCREW,UP-C.OPE(U,B,C,D,F,G,H
121	LY30018-048A	SPECIAL SCREW,UP-C.OPE(L
122	LY30018-043B	SPECIAL SCREW,UP-BASE,A,E
122	LY30018-055A	SPECIAL SCREW,UP-BASE,B,C,D,F,G,H
123	LY30018-006B	SPECIAL SCREW,X3,UP-ARM,A,E
123	LY30018-0E3A	SPECIAL SCREW,X3,B,C,D,F,G,H
124	LY30018-0E4A	SPECIAL SCREW,X2,COV(D/U)-F,A,E
124	LY30018-0C3A	SPECIAL SCREW,X2,COV(D/U)-F,B,C,D,F,G,H
125	LY30018-0B7A	SPECIAL SCREW,UP-FR,A,E
125	LY30018-063A	SPECIAL SCREW,UP-FR,B,C,D,F,G,H
126	LY30018-043B	SPECIAL SCREW,FR-ARM,A,E
126	LY30018-055A	SPECIAL SCREW,FR-ARM,B,C,D,F,G,H
127	LY30018-0E4A	SPECIAL SCREW,BKT(T)-ARM,A,E
127	LY30018-0C3A	SPECIAL SCREW,BKT(T)-ARM,B,C,D,F,G,H
128	LY30018-043B	SPECIAL SCREW,BKT(T-FR(U,A,E
128	LY30018-055A	SPECIAL SCREW,BKT(T-FR(U,B,C,D,F,G,H
129	LY30018-043B	SPECIAL SCREW,X2,BKT(T-BK(F,A,E
129	LY30018-055A	SPECIAL SCREW,X2,BKT(T-BK(F,B,C,D,F,G,H
130	LY30018-006B	SPECIAL SCREW,TOP-BKT(T),A,E
130	LY30018-0E3A	SPECIAL SCREW,TOP-BKT(T),B,C,D,F,G,H
131	LY30018-0B7A	SPECIAL SCREW,X2,TOP-CO(T/U,A,E
131	LY30018-063A	SPECIAL SCREW,X2,TOP-CO(T/U,B,C,D,F,G,H
132	LY30018-0B7A	SPECIAL SCREW,UP-VF,A,E
132	LY30018-063A	SPECIAL SCREW,UP-VF,B,C,D,F,G,H
133	LY30018-0B7A	SPECIAL SCREW,TOP-VF,A,E
133	LY30018-063A	SPECIAL SCREW,TOP-VF,B,C,D,F,G,H
134	QYSPSPT1730R	SCREW,FR-ARM,A,E
134	QYSPSPT1730D	SCREW,FR-ARM,B,C,D,F,G,H
135	LY33392-001A	MIC ASSY
183	LY33383-001A	COVER(ADJ),A,E
183	LY33383-002A	COVER(ADJ),B,C,D,F,G,H
184	LY41393-005A	COVER(JIG CONN),A,E
184	LY41393-009A	COVER(JIG CONN),B,C,D,F,G,H

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION
185	LY32884-002A	DUMMY BATTERY,A,E
185	LY32884-003A	DUMMY BATTERY,B,C,D,F,G,H
186	LY32001-002A	LABEL(HOUSING)
187	LY40699-002A	LABEL(PUSH)
188	LY30018-043B	SPECIAL SCREW,X2,COV(ADJ-AR,A,E
188	LY30018-055A	SPECIAL SCREW,X2,COV(ADJ-AR,B,C,D,F,G,H
189	LY30018-026A	SPECIAL SCREW,COV(JIG-UP,A,E
189	LY30018-019A	SPECIAL SCREW,COV(JIG-UP,B,C,D,F,G,H
190	QAM0342-002	MEMORY CARD,SD 8MB*
191	——	TAG,A,B,C,D
191	——	TAG,E,F,G,H

*NOTE :

DATA FILE is not contained in MEMORY CARD of the service part.

OP BLOCK ASSEMBLY<M2>

208	LY30727-001A	TAP SCREW,X2
209	LY30727-002A	TAP SCREW,X8
210	QYSPSGU1750Z	TAP SCREW,X2
223	LY43384-001A	OP LPF
224	LY43494-001A	SHEET
234	LY31571-001A	FOCUS MOTOR
235	LY31572-001A	ZOOM MOTOR
243	LYH30375-009A	CCD BASE ASS'Y
244	LY33431-001A	IRIS MOTOR UNIT
245	LYH20156-010A	OP BLOCK ASSY

LOWER ASSEMBLY(G)<M2>

502	LY33305-001C	SIDE COVER ASSY,A,E
502	LY33305-002C	SIDE COVER ASSY,B,C,D,F,G,H
503	LY33306-001A	KNOB(DSC),A,E
503	LY33306-002A	KNOB(DSC),B,C,D,F,G,H
504	LY21028-001C	ARM ASSY
505	LY33316-001E	CASS.COVER ASSY,A,E
505	LY33316-002B	CASS.COVER ASSY,B,C,D,F,G,H
506	LY21031-001C	CAMERA OPE UNIT
507	LY32575-002A	BATT.TERNIMAL
508	QAL0467-001	FPC,BATT.FPC
509	WJT0104-001A	E-CARD WIRE,SIDE-SD
510	LY44140-001A	BKT(S.COVER/VF)
511	LY33439-001A	GRIP BELT
512	LY30018-0A2A	SPECIAL SCREW,X2,C.OPE-ARM
513	LY30018-0A2A	SPECIAL SCREW,X2,BATT-ARM
514	LY30018-063A	SPECIAL SCREW,X2,S.COV-S.PW
515	LY30018-0A2A	SPECIAL SCREW,X4,COVER-ARM,A,E
515	LY30018-065A	SPECIAL SCREW,X4,COVER-ARM,B,C,D,F,G,H
516	LY44213-001A	SHEET(BAT.FPC)
517	LY44216-001A	LABEL(C.COVER)
518	LY30030-059B	SPACER(A),X2
519	LY33587-001A	HOLDER(G.OUTER)
520	LY30030-0P8A	SPACER(A)
521	LY30018-021A	SPECIAL SCREW,SCOV-SPWBL
522	LY30018-060A	SPECIAL SCREW,HLDR-S.COV

LOWER ASSEMBLY(F)<M2>

552	LYH20620-001C	LOWER ASSY(G),A,E
-----	---------------	-------------------

# △ REF No.	PART No.	PART NAME, DESCRIPTION
552	LYH20620-009B	LOWER ASSY(G),B,C,D
552	LYH20620-011B	LOWER ASSY(G),F,G,H
553	LYH20621-001D	VF ASSY(G),A,E
553	LYH20621-009D	VF ASSY(G),B,C,D
553	LYH20621-011C	VF ASSY(G),F,G,H
555	LY33343-001B	BRACKET(OPJ7C)
557	LY30018-032A	SPECIAL SCREW,SD-ARM
558	LY30018-019A	SPECIAL SCREW,OP-BKT(OP)
559	LY30018-006B	SPECIAL SCREW,X2,VF-BKT(VF)
560	LY30018-006B	SPECIAL SCREW,BKT(OP)-AR
561	LY30029-0P8A	SPACER(A),FOR OP
566	LY30030-0N4A	SPACER(A),FOR MICWIR
567	LY44334-001A	SHEET(SHIELD),OP SHIELD
568	LY44318-001A	SHIELD(CCD),CCD FPC
570	LY44361-001A	SPACER,FOR OP,A,B,C,D

UPPER ASSEMBLY(G)<M2>

601	LYH20625-010B	MONITOR ASSY(G),A
601	LYH20625-009B	MONITOR ASSY(G),B,C,D
601	LYH20625-012B	MONITOR ASSY(G),E
601	LYH20625-011B	MONITOR ASSY(G),F,G,H
602	LY33319-001D	U.CASE ASSY,A,E
602	LY33319-002B	U.CASE ASSY,B,C,D,F,G,H
603	LY33580-001A	FRAME(UPPER)AY
604	LY33320-001B	MONI.LOCK ASSY
605	LY44136-001C	COVER(TOP/UPP)L,A,E
605	LY44136-002A	COVER(TOP/UPP)L,B,C,D,F,G,H
606	LY44137-001C	COVER(TOP/UPP)R,A,E
606	LY44137-002A	COVER(TOP/UPP)R,B,C,D,F,G,H
607	LY33322-001B	SUB OPE UNIT,A,E
607	LY33322-005B	SUB OPE UNIT,B,C,D,F,G,H
609	QAS0132-002	SPEAKER
610	LY30018-043B	SPECIAL SCREW,UPPER-FRM,A,E
610	LY30018-055A	SPECIAL SCREW,UPPER-FRM,B,C,D,F,G,H
611	LY30018-068A	SPECIAL SCREW,X2,UPPER-HING
612	LY30018-043B	SPECIAL SCREW,X2,C(T/U)-HIN,A,E
612	LY30018-055A	SPECIAL SCREW,X2,C(T/U)-HIN,B,C,D,F,G,H
613	LY30018-043B	SPECIAL SCREW,X2,UPPER-M.LO,A,E
613	LY30018-055A	SPECIAL SCREW,X2,UPPER-M.LO,B,C,D,F,G,H
615	LY30030-0A9A	SPACER(A),SUB OP FPC
616	LY30018-032A	SPECIAL SCREW,X2,MFPC-UFRM
617	LY30018-0D8A	SPECIAL SCREW,X2,MONSW-UPPR
618	LY30030-0F4A	SPACER(A)
619	LY44237-001B	SHEET(SHIELD),A,B,C,D
619	LY44237-001A	SHEET(SHIELD),E,F,G,H
620	LY30030-0K9B	SPACER(A),UPP BSIDE,A,B,C,D
620	LY30030-0K9A	SPACER(A),UPP BSIDE,E,F,G,H
621	LY30030-0M9A	SPACER(A),UP-SPK1
622	LY30030-0N1A	SPACER(A),UP-SPK2
623	LY30030-0N2A	SPACER(A),FOR MONIFF
624	LY30030-0N3A	SPACER(A),FOR MONIFF
625	LY44295-007A	STICKER,A,B,C,D
625	LY44295-008A	STICKER,E,F,G,H
626	LY30017-022A	SPACER-B,X2,COVER T/U,A,B,C,D

FRONT ASSEMBLY(G)<M2>

702	LY21036-011D	F.COVER ASSY,A,E
-----	--------------	------------------

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION
702	LY21036-008C	F.COVER ASSY,B,C,D,F,G,H
703	LY33352-001A	COVER(C)
705	WJT0110-001A	E-CARD WIRE,STROBE-MAI
706	LY30018-063A	SPECIAL SCREW,COV(C)-FR
707	LY30018-021A	SPECIAL SCREW,STB-FR
708	LY30018-021A	SPECIAL SCREW,X2,STB.PWB-FR
709	LY30030-0U9A	SPACER(A),COVER(C),A,B,C,D
710	LY30030-0M8A	SPACER(A),STB WIRE
711	LY30030-0Q8A	SPACER(A),FRONT-HOOD

MONITOR ASSEMBLY(G)<M2>

802	LY21052-001D	MONITOR CASE(25,A
802	LY21052-002A	MONITOR CASE(25,B,C,D
802	LY21034-001D	MONITOR CASE(3),E
802	LY21034-002A	MONITOR CASE(3),F,G,H
803	LY33324-007A	M.COVER ASSY,A,E
803	LY33324-005A	M.COVER ASSY,B,C,D,F,G,H
804	LY43438-001A	I.SHEET(M.COVER,M.COV B.S
805	LY33422-001A	LCD BKT(2.5)1,A,B,C,D
805	LY33325-001A	LCD BKT(3INCH)1,E,F,G,H
806	LY33423-001A	LCD BKT(2.5)2,A,B,C,D
806	LY33326-001A	LCD BKT(3INCH)2,E,F,G,H
807	LY33327-001D	HINGE UNIT ASSY,A,E
807	LY33327-002C	HINGE UNIT ASSY,B,C,D
807	LY33327-002B	HINGE UNIT ASSY,F,G,H
808	NSW0122-001X	DETECT SWITCH
809	DN8797MS-X	IC
810	QLD0272-001	LCD MODULE,A,B,C,D
810	QLD0274-001	LCD MODULE,E,F,G,H
811	QLL0153-001	BACK LIGHT,A,B,C,D
811	QLL0154-001	BACK LIGHT,E,F,G,H
812	LY30018-070A	SPECIAL SCREW,BK(LCD-M.P
813	LY30018-070A	SPECIAL SCREW,M.CAS-HIN
814	LY30018-028A	SPECIAL SCREW,X2,HIN-M.COV,A,E
814	LY30018-0F2A	SPECIAL SCREW,X2,HIN-M.COV,B,C,D,F,G,H
815	LY30018-0A2A	SPECIAL SCREW,X3,M.COV-BK(2,A,E
815	LY30018-065A	SPECIAL SCREW,X3,M.COV-BK(2,B,C,D,F,G,H
816	LY30030-0F8A	SPACER(A),X2,LCD-BKT1-V,A,B,C,D
816	LY30030-0G1A	SPACER(A),X2,LCD-BKT1-V,E,F,G,H
817	LY30030-0F8A	SPACER(A),X2,LCD-BKT2,A,B,C,D
817	LY30030-0G1A	SPACER(A),X2,LCD-BKT2,E,F,G,H
818	LY30030-0F9A	SPACER(A),X2,LCD-BKT1-H,A,B,C,D
818	LY30030-0G2A	SPACER(A),X2,LCD-BKT1-H,E,F,G,H
819	LY30030-0M6A	SPACER(A),MONI PWB,A,B,C,D
819	LY30030-0M6A	SPACER(A),X2,MONI PWB,E,F,G,H
820	LY30030-0K7A	SPACER(A),BKT1-MCASE
821	LY30030-0P3A	SPACER(A),BKT2(FPC,A,B,C,D

VF ASSEMBLY(G)<M2>

852	LY33384-001A	B.LIGHT CASE2
853	LY44100-001A	SHEET(DIFF)
854	LY44098-001A	SHEET(POLA),X2
855	LY33335-001B	LCD HOLDER2
856	QLD0193-002	LCD MODULE
857	LY44319-001A	CUSHION(LCD)3
858	LY21047-001C	FRAME(VF)2
859	LY33341-001A	SHEET HOLD

# △ REF No.	PART No.	PART NAME, DESCRIPTION
860	LY33382-002A	CASE(VF)ASSY
861	LY33403-001C	GUIDE(OUTER)AY,A,E
861	LY33403-005A	GUIDE(OUTER)AY,B,C,D,F,G,H
862	LY33345-001C	S.GUIDE ASSY
863	LY33432-001A	EYE CUP
864	LY44097-001A	SHEET(LENS)
865	LY33379-001B	V.ADJ.PLATE
866	LY44102-001A	S.PLATE
867	LY33378-001A	V.ADJ.KNOB
868	LY44103-001B	LENS HOLDER AY,A,B,C,D
868	LY44103-001A	LENS HOLDER AY,E,F,G,H
869	LY30002-055A	COMPRES. SPRING
870	LY44095-001B	STP RING
871	LY44096-001A	GUIDE SCREW,X2
872	WJT0111-001A	E-CARD WIRE
874	LY30030-0A8A	SPACER(A)
875	LY30018-0B7A	SPECIAL SCREW,X2
876	LY44287-001A	EARTH SHEET

MECHANISM ASSEMBLY<M3>

900	YMA0029H	MECHA(A)ASSY
900A	YMA0029D	MECHA(A)ASSY
901	LY32870-001G	CASSETTEHOUSING ASSY
902	YQ43893-8	MINI SCREW (x3)
903	LYH30420-001A	UPPER BASE ASSY
904	QYSPSPU1425M	SCREW
905	YDV2102B	DRUM ASSY
906	LY42820-001A	DAMP.SCREW ASSY (x2)
907	LY42820-002A	DAMP.SCREW ASSY
908	LY31538-001F	REEL DISK ASSY
909	LY31538-002H	REEL DISK ASSY
910	YQ44246	SLIT WASHER
911	LY10372-001D	REEL COVER ASSY
912	LY42120-002A	MINI SCREW
913	LY41945-003A	MINI SCREW (x2)
914	YQ44246	SLIT WASHER
915	LY43725-001D	TENSION ARM ASSY
916	LYH40269-001A	SLANT POLE ARM ASSY
917	LY43731-001F	TU ARM ASSY
918	LY31531-001D	SWING ARM ASSY
919	YQ43893	MINI SCREW
920	LYH30424-001A	SLIDE DECK FINAL ASSY
921	YQ43893	MINI SCREW (x2)
922	LY43023-001A	MINI SCREW
924	LYH30419-001A	PAD ARM ASSY
925	YQ44246	SLIT WASHER
928	LYH40270-001A	TU BRAKE ASSY
929	YQ44246	SLIT WASHER
930	LY43684-001A	TENSION CONTROL LEVER ASSY
931	LY32861-001A	CENTER GEAR
932	LY31516-001F	PINCH ROLLER ARM FINAL ASSY
933	YQ44246	SLIT WASHER
934	LY43681-001A	TENSION CONTROL PLATE ASSY
935	LY43687-001A	BRAKE CONTROL LEVER ASSY
936	LYH30421-001A	MOTOR BRACKET ASSY
936A	QAR0138-001	LOADING MOTOR
936B	LY41940-001A	TAPPING SCREW (x2)
937	YQ43893	MINI SCREW (x3)
938	LYH30422-001A	GUIDE RAIL ASSY
939	YQ43893	MINI SCREW

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION	
940	YQ44246	SLIT WASHER	(x2)
941	LY32843-001A	SLIDE LEVER2 ASSY	
942	LY43690-001A	LOADING PLATE ASSY	
943	YQ44246	SLIT WASHER	
944	LY32858-001A	EJECT LEVER	
945	YQ44246	SLIT WASHER	
946	LYH40271-001A	BASE R ASSY	
947	YQ43893	MINI SCREW	
948	LY41945-001B	MINI SCREW	
949	LY43665-001A	MODE GEAR	
950	QSW0876-003	ROTARY ENCODER	
951	YQ43893	MINI SCREW	(x2)
952	LY32860-001A	GEAR COVER ASSY	
953	YQ43893	MINI SCREW	(x2)
954	YQ43893-4	MINI SCREW	
955	LY43676-001A	MAIN CAM ASSY	
956	LY41941-001B	SLIDE ARM ASSY	
957	LY43678-001A	CONNECT GEAR 2	
958	LY41954-001C	SUB CAM ASSY	
959	LY42120-001A	MINI SCREW	
960	LY43692-001A	CONTROL ARM ASSY	
961	LY32859-001A	REEL GEAR 1	
962	LY31508-002B	DRUM BASE ASSY	
963	QYSPSPU1425M	SCREW 1.4mm x 2.5mm(x3)	
964	QAR0142-001	CAPSTAN MOTOR	
965	YQ43893	MINI SCREW	
966	LY10367-001D	MAIN DECK ASSY	
976	YQ44246	SLIT WASHER	
977	YQ44246-6	SLIT WASHER	
978	LY42047-005A	WASHER	
979	LY43987-001B	SPACER	

# △ REF No.	PART No.	PART NAME, DESCRIPTION

MAIN BOARD ASSEMBLY <01>		
PW1	YB10428A-07	MAIN PWB ASS'Y,01,A,B,C,D
PW1	YB10428A-06	MAIN PWB ASS'Y,01,E,F,G,H
IC1001	UPD703038F1-A17	IC(MICRO C ROM),CAM CPU
IC1001	or UPD70F3038F1A17	IC(MICRO C ROM),CAM CPU
IC1001	or UPD70F3038FA17A	IC(MICRO C ROM),CAM CPU
IC1002	RS5C314-X	IC
IC1003	X25330S8I-2.5-X	IC
IC1003	or 25LC320-I/SN-X	IC
IC1003	or AT25320N-10SI-X	IC
IC1003	or M95320-WMN6-X	IC
IC1003	or CAT25C32SI-X	IC
IC1004	NJU7108F3-X	IC
IC1005	74HC1G00GW-X	IC
IC1005	or MC74HC1G00DF-X	IC
IC1005	or SN74AHC1G00K-X	IC
IC1006	MB90097PFV149-X	IC(MICRO C ROM),MB90099
IC1007	SN74AHC1G08K-X	IC
IC1008	74HC2G08DP-X	IC
IC1009	IC-PST3423U-X	IC
IC1009	or S-80823CNNB-X	IC
IC1401	UPD703040YF-M20	IC(MICRO C ROM),DECK MASK
IC1401	or UPD70F3040YFM20	IC(MICRO C ROM),DECK FLASH
IC1401	or UPD703040YFM20B	IC(MICRO C ROM),PP ONLY
IC1601	BD6637KS	IC,MDA BD6637
IC1701	LM358DR2-X	IC,REELAMP5V
IC1702	BA10393F-XE	IC,REELSMT
IC1801	BA10358FVM-W	IC,IR AMP
IC1851	RPM7138	IR DETECT UNIT,IR
IC2101	AK4550VT-X	IC
IC2201	AK4564VQ	IC
IC3001	JCY0152	IC,JCY0152
IC3002	BU2501FV-X	IC
IC3005	JCY0136-X	IC,JCY0136-X
IC3501	JCY0132	IC
IC3502	SN74AHC1G04K-X	IC
IC3701	BA7665FS-X	IC
IC3701	or BA7665AFS-X	IC,A,B,C,D
IC3731	MM1504XN-X	IC
IC3801	JCP8045	IC(DIGITAL)
IC3802	SN74AHC1G04K-X	IC,SN74AHC1G
IC4201	HD49340HNP-X	IC,CDS/AD QFN
IC4202	MM1613BN-X	IC,REG 3.1V
IC4301	JCY0183	IC,CAMERA DSP
IC4302	R1160N121B-X	IC,REG1.2V
IC5001	CXD3602AR	IC,TG/VDR
IC5002	W194-70G-X	IC,CLK72
IC5003	MM1613DN-X	IC,REG 3.3V
IC5004	MM1613BN-X	IC,REG 3.1V
IC6001	S-80842CNNB-W	IC
IC6002	S-817A33ANB-W	IC
IC6003	R1224N102G-X	IC
IC6101	FA3698F	IC,SW_REG IC
IC6201	BD3987FV-X	IC,SSOP 8PIN
IC6601	TC7W74FU-X	IC(DIGITAL)
IC6601	or TC7WH74FU-X	IC(DIGITAL)
IC6602	BA10358FVM-W	IC
IC8001	TMS320DSC24GHKL	IC,DSC24
IC8002	K4S643232F-TC60	IC,64MSDRAM
IC8002	or HY57643220CT55	IC,64MSDRAM

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

#	△	REF No.	PART No.	PART NAME, DESCRIPTION	#	△	REF No.	PART No.	PART NAME, DESCRIPTION	
			IC8002 or HY57643220CT7	IC,64MSDRAM				Q6601	DTC144EE-X	DIGI TRANSISTOR
			IC8003 MBV160TE90PBA14	IC(MICRO C ROM),16MFLASH,A,B,C,D				Q6601 or RN1104-X	DIGI TRANSISTOR	
			IC8003 MBV160TE90PBA10	IC(MICRO C ROM),16MFLASH,E,F,G,H				Q6601 or UN9213J-X	DIGI TRANSISTOR	
			IC8003 or MR27T1602F1G1LA	IC(MICRO C ROM),OTP,A,B,C,D				Q6601 or PDTC144EE-X	DIGI TRANSISTOR	
			IC8004 BU2288FV-X	IC,FS PLL				Q6602	UMS1N-W	PAIR TRANSISTOR
			IC8301 ISP1181ABS	IC,USBQNFμ2.6				Q6611	2SA1774/RS/-X	TRANSISTOR
			IC8302 S-80842CNNB-W	IC				Q6612	UMS1N-W	PAIR TRANSISTOR
			Q1001 DTC124EE-X	DIGI TRANSISTOR				Q6613	2SC4617/RS/-X	TRANSISTOR
			Q1002 2SC4617/QR/-X	TRANSISTOR				Q6614	RN1702-X	DIGI TRANSISTOR
			Q1003 DTC143EE-X	DIGI TRANSISTOR				Q6615	UMC4N-W	DIGI TRANSISTOR
			Q1004 DTC143XE-X	DIGI TRANSISTOR				Q6701	CPH3314-X	MOS FET
			Q1005 2SJ347-X	MOS FET				Q8001	2SA1774/RS/-X	TRANSISTOR,2SA1774
			Q1006 DTC143XE-X	DIGI TRANSISTOR				D1001	DA221-X	SI DIODE
			Q1007 UMC3N-W	DIGI TRANSISTOR,A,B,C,D				D1002	1SS376-X	SI DIODE
			Q1007 DTC143XE-X	DIGI TRANSISTOR,E,F,G,H				D1602	DAP222-X	SI DIODE,LD OUT
			Q1401 DTA114EE-X	DIGI TRANSISTOR,MIC CTL				D1602 or MA132WA-X	SI DIODE	
			Q1401 or RN2102-X	DIGI TRANSISTOR				D1603	DAP222-X	SI DIODE,LD ON
			Q1401 or PDTA114EE-X	DIGI TRANSISTOR				D1603 or MA132WA-X	SI DIODE	
			Q1401 or UN9111J-X	DIGI TRANSISTOR				D1604	DAP222-X	SI DIODE,C.ERR-3V
			Q1402 UMC3N-W	DIGI TRANSISTOR,REEL LED				D1604 or MA132WA-X	SI DIODE	
			Q1403 UMC3N-W	DIGI TRANSISTOR,TAPE LED				D1801	SML-711UW-X	LED,TALLY
			Q1601 UMC3N-W	DIGI TRANSISTOR,LD ON				D2807	RSA6.1J4-W	SI DIODE
			Q1801 RPM-22PB	PHOTO TRANSISTO				D3001	EC2C01C-X	VARI CAP DIODE
			Q2401 2SC4617/QR/-X	TRANSISTOR				D3002	EC2C01C-X	VARI CAP DIODE
			Q2403 2SC4617/QR/-X	TRANSISTOR				D3003	EC2C01C-X	VARI CAP DIODE
			Q2801 UMX1N-W	PAIR TRANSISTOR				D3004	MA2Z720-X	SB DIODE
			Q3001 2SC4617/RS/-X	TRANSISTOR				D5001	1SS355-X	SI DIODE
			Q3002 2SC4617/RS/-X	TRANSISTOR				D5001 or MA111-X	SI DIODE	
			Q3701 UMT1N-W	PAIR TRANSISTOR				D5002	1SS355-X	SI DIODE
			Q3701 or XP4401-W	TRANSISTOR				D5002 or MA111-X	SI DIODE	
			Q3702 UMZ1N-W	PAIR TRANSISTOR		△		D6001	RB706D-40-X	SB DIODE
			Q3702 or XP4601-W	TRANSISTOR		△		D6002	RB715F-X	SB DIODE
			Q3704 2SA1774/RS/-X	TRANSISTOR				D6201	RB480Y-W	SB DIODE
			Q3705 UMT1N-W	PAIR TRANSISTOR				D6203	RB480Y-W	SB DIODE
			Q3705 or XP4401-W	TRANSISTOR				D6701	EP10HY03-X	SB DIODE
			Q3731 2SC4617/RS/-X	TRANSISTOR				D6702	EP10HY03-X	SB DIODE
			Q3731 or 2SD2216J/RS/-X	TRANSISTOR				D8301	1SS355-X	SI DIODE
			Q3732 DTC144EE-X	DIGI TRANSISTOR				D8301 or MA111-X	SI DIODE	
			Q3732 or UN9213J-X	DIGI TRANSISTOR				R1001	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W
			Q3732 or RN1104-X	DIGI TRANSISTOR				R1002	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
			Q3732 or PDTC144EE-X	DIGI TRANSISTOR				R1003	NRSA6AJ-472W	MG RESISTOR 4.7kΩ,1/16W
			Q3733 UMZ1N-W	PAIR TRANSISTOR				R1004	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			Q3733 or XP4601-W	TRANSISTOR				R1005	NRSA6AJ-153W	MG RESISTOR 15kΩ,1/16W
			Q3734 2SC4617/RS/-X	TRANSISTOR				R1006	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			Q3734 or 2SD2216J/RS/-X	TRANSISTOR				R1007	NRSA6AJ-333W	MG RESISTOR 33kΩ,1/16W
			Q3735 UMZ1N-W	PAIR TRANSISTOR				R1009	NRSA6AJ-471W	MG RESISTOR 470Ω,1/16W
			Q3735 or XP4601-W	TRANSISTOR				R1010	NRSA6AJ-561W	MG RESISTOR,A,B,C,D 560Ω,1/16W
			Q6001 DTC144EE-X	DIGI TRANSISTOR				R1010	NRSA6AJ-471W	MG RESISTOR,E,F,G,H 470Ω,1/16W
			Q6001 or RN1104-X	DIGI TRANSISTOR				R1015	NRSA6AJ-474W	MG RESISTOR 470kΩ,1/16W
			Q6001 or PDTC144EE-X	DIGI TRANSISTOR				R1017	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
			Q6001 or UN9213J-X	DIGI TRANSISTOR				R1018	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			Q6002 MCH6613-W	MOS FET				R1019	NRSA6AJ-623W	MG RESISTOR 62kΩ,1/16W
			Q6003 FML9-W	TRANSISTOR				R1020	NRSA6AJ-331W	MG RESISTOR 330Ω,1/16W
			Q6201 QS6U24-W	MOS FET				R1021	NRSA6AJ-331W	MG RESISTOR 330Ω,1/16W
			Q6202 2SA1577/RS/-X	TRANSISTOR				R1022	NRSA6AJ-331W	MG RESISTOR 330Ω,1/16W
			Q6203 QS6U24-W	MOS FET				R1023	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			Q6204 QS6U24-W	MOS FET				R1024	NRSA6AJ-823W	MG RESISTOR 82kΩ,1/16W
			Q6205 CPH3101-X	TRANSISTOR				R1025	NRSA6AJ-473W	MG RESISTOR 47kΩ,1/16W
			Q6206 DTC124TE-X	DIGI TRANSISTOR				R1026	NRSA6AJ-472W	MG RESISTOR 4.7kΩ,1/16W
			Q6206 or UN9210J-X	DIGI TRANSISTOR				R1027	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W
			Q6207 QS6U24-W	MOS FET				R1028	NRSA6AJ-185W	MG RESISTOR 1.8MΩ,1/16W
			Q6208 QS6U24-W	MOS FET				R1029	NRSA6AJ-473W	MG RESISTOR 47kΩ,1/16W
			Q6209 CPH3314-X	MOS FET				R1030	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
R1031	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R1604	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R1032	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R1610	NRSA6AJ-471W	MG RESISTOR	470Ω,1/16W
R1033	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R1611	NRSA6AJ-471W	MG RESISTOR	470Ω,1/16W
R1036	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R1612	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R1037	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R1613	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R1038	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R1614	NRZ0072-R330X	MG RESISTOR	0.33Ω,1/4WF
R1039	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R1616	NRSA6AD-332W	MG RESISTOR	3.3kΩ,1/16W
R1041	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R1617	NRZ0072-R330X	MG RESISTOR	0.33Ω,1/4WF
R1042	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R1620	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1044	NRSA6AJ-123W	MG RESISTOR	12kΩ,1/16W	R1621	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1045	NRSA6AJ-822W	MG RESISTOR	8.2kΩ,1/16W	R1622	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1046	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R1624	NRSA6AD-183W	MG RESISTOR	18kΩ,1/16W
R1047	NRSA6AJ-473W	MG RESISTOR	47kΩ,1/16W	R1625	NRSA6AD-361W	MG RESISTOR	360Ω,1/16W
R1048	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R1629	NRSA6AJ-564W	MG RESISTOR	560kΩ,1/16W
R1049	NRSA6AJ-393W	MG RESISTOR	39kΩ,1/16W	R1630	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1050	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W	R1631	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1051	NRSA6AJ-272W	MG RESISTOR	2.7kΩ,1/16W	R1635	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W
R1052	NRSA6AJ-183W	MG RESISTOR	18kΩ,1/16W	R1636	NRSA6AJ-123W	MG RESISTOR	12kΩ,1/16W
R1053	NRSA6AJ-154W	MG RESISTOR	150kΩ,1/16W	R1637	NRSA6AJ-154W	MG RESISTOR	150kΩ,1/16W
R1054	NRSA6AJ-473W	MG RESISTOR	47kΩ,1/16W	R1638	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1055	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R1639	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1056	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R1640	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1058	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R1641	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1060	NRSA6AJ-473W	MG RESISTOR	47kΩ,1/16W	R1642	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1063	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R1648	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1064	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R1701	NRSA6AJ-823W	MG RESISTOR	82kΩ,1/16W
R1065	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R1702	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W
R1066	NRSA6AJ-473W	MG RESISTOR	47kΩ,1/16W	R1703	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W
R1071	NRSA6AJ-474W	MG RESISTOR	470kΩ,1/16W	R1704	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W
R1072	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R1705	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W
R1076	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R1706	NRSA6AJ-823W	MG RESISTOR	82kΩ,1/16W
R1077	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R1707	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1081	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R1708	NRSA6AJ-124W	MG RESISTOR	120kΩ,1/16W
R1084	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R1709	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1085	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R1710	NRSA6AJ-124W	MG RESISTOR	120kΩ,1/16W
R1088	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R1711	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R1090	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R1712	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R1111	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R1801	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W
R1401	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W	R1802	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R1402	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R1803	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W
R1403	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R1804	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W
R1404	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R1805	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R1405	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R1806	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1406	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R1807	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1407	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R1808	NRSA6AJ-302W	MG RESISTOR	3kΩ,1/16W
R1408	NRSA6AD-753W	MG RESISTOR	75kΩ,1/16W	R1851	NRSA6AJ-470W	MG RESISTOR	47Ω,1/16W
R1409	NRSA6AJ-334W	MG RESISTOR	330kΩ,1/16W	R2101	NRSA6AJ-471W	MG RESISTOR	470Ω,1/16W
R1411	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R2102	NRSA6AJ-471W	MG RESISTOR	470Ω,1/16W
R1412	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R2103	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1413	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R2201	NRSA6AJ-684W	MG RESISTOR	680kΩ,1/16W
R1414	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R2202	NRSA6AJ-564W	MG RESISTOR	560kΩ,1/16W
R1415	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R2203	NRSA6AJ-393W	MG RESISTOR	39kΩ,1/16W
R1416	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R2204	NRSA6AJ-154W	MG RESISTOR	150kΩ,1/16W
R1417	NRSA6AJ-101W	MG RESISTOR	100Ω,1/16W	R2206	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W
R1427	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R2207	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W
R1428	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R2208	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W
R1429	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R2209	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W
R1430	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R2212	NRSA6AJ-2R7W	MG RESISTOR	2.7Ω,1/16W
R1431	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R2213	NRSA6AJ-2R7W	MG RESISTOR	2.7Ω,1/16W
R1432	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R2217	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W
R1601	NRSA6AJ-681W	MG RESISTOR	680Ω,1/16W	R2225	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1602	NRSA6AJ-124W	MG RESISTOR	120kΩ,1/16W	R2226	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1603	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R2227	NRSA6AJ-822W	MG RESISTOR	8.2kΩ,1/16W

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
R2228	NRSA6AJ-822W	MG RESISTOR	8.2kΩ,1/16W	R3071	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2229	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W	R3074	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R2230	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W	R3501	NRSA6AJ-471W	MG RESISTOR	470Ω,1/16W
R2401	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3502	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R2402	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3503	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R2403	NRSA6AJ-183W	MG RESISTOR	18kΩ,1/16W	R3504	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2407	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W	R3505	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2601	NRSA6AJ-272W	MG RESISTOR	2.7kΩ,1/16W	R3506	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2602	NRSA6AJ-272W	MG RESISTOR	2.7kΩ,1/16W	R3507	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2607	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W	R3508	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W
R2608	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W	R3511	NRSA6AJ-101W	MG RESISTOR	100Ω,1/16W
R2609	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W	R3521	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2610	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W	R3522	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2613	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3523	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2614	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3524	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2801	NRSA6AJ-821W	MG RESISTOR	820Ω,1/16W	R3525	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2802	NRSA6AJ-821W	MG RESISTOR	820Ω,1/16W	R3526	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2803	NRSA6AJ-564W	MG RESISTOR	560kΩ,1/16W	R3527	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2804	NRSA6AJ-564W	MG RESISTOR	560kΩ,1/16W	R3701	NRSA6AD-271W	MG RESISTOR	270Ω,1/16W
R2805	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R3702	NRSA6AD-271W	MG RESISTOR	270Ω,1/16W
R2806	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R3703	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W
R2807	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R3704	NRSA6AD-301W	MG RESISTOR	300Ω,1/16W
R2808	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R3705	NRSA6AD-301W	MG RESISTOR	300Ω,1/16W
R2809	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R3706	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W
R2810	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R3707	NRSA6AD-680W	MG RESISTOR	68Ω,1/16W
R2812	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R3708	NRSA6AD-680W	MG RESISTOR	68Ω,1/16W
R2813	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	R3709	NRSA6AD-680W	MG RESISTOR	68Ω,1/16W
R2901	NRSA6AJ-682W	MG RESISTOR	6.8kΩ,1/16W	R3710	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R2902	NRSA6AJ-392W	MG RESISTOR	3.9kΩ,1/16W	R3711	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R2903	NRSA6AJ-272W	MG RESISTOR	2.7kΩ,1/16W	R3712	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W
R2904	NRSA6AJ-182W	MG RESISTOR	1.8kΩ,1/16W	R3713	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R2905	NRSA6AJ-152W	MG RESISTOR	1.5kΩ,1/16W	R3714	NRSA6AJ-823W	MG RESISTOR	82kΩ,1/16W
R3002	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3715	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R3004	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3722	NRSA6AD-131W	MG RESISTOR	130Ω,1/16W
R3005	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W	R3724	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W
R3006	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W	R3725	NRSA6AD-131W	MG RESISTOR	130Ω,1/16W
R3007	NRSA6AJ-562W	MG RESISTOR	5.6kΩ,1/16W	R3726	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R3008	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R3727	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R3009	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3728	NRSA6AD-131W	MG RESISTOR	130Ω,1/16W
R3010	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3730	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R3011	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W	R3731	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R3013	NRSA6AJ-242W	MG RESISTOR	2.4kΩ,1/16W	R3732	NRSA6AJ-101W	MG RESISTOR	100Ω,1/16W
R3014	NRSA6AJ-392W	MG RESISTOR	3.9kΩ,1/16W	R3733	NRSA6AD-561W	MG RESISTOR	560Ω,1/16W
R3015	NRSA6AJ-392W	MG RESISTOR	3.9kΩ,1/16W	R3734	NRSA6AJ-822W	MG RESISTOR	8.2kΩ,1/16W
R3016	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W	R3735	NRSA6AD-182W	MG RESISTOR	1.8kΩ,1/16W
R3017	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W	R3736	NRSA6AJ-183W	MG RESISTOR	18kΩ,1/16W
R3018	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W	R3737	NRSA6AJ-183W	MG RESISTOR	18kΩ,1/16W
R3019	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W	R3738	NRSA6AJ-681W	MG RESISTOR	680Ω,1/16W
R3020	NRVA6AD-512W	CMF RESISTOR	5.1kΩ,1/16W	R3739	NRSA6AJ-821W	MG RESISTOR	820Ω,1/16W
R3025	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R3740	NRSA6AJ-821W	MG RESISTOR	820Ω,1/16W
R3027	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3741	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R3029	NRSA6AJ-822W	MG RESISTOR	8.2kΩ,1/16W	R3742	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R3030	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W	R3743	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R3031	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W	R3744	NRSA6AD-561W	MG RESISTOR	560Ω,1/16W
R3032	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W	R3745	NRSA6AD-152W	MG RESISTOR	1.5kΩ,1/16W
R3034	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R3746	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W
R3036	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3747	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R3037	NRSA6AJ-681W	MG RESISTOR	680Ω,1/16W	R3748	NRSA6AJ-474W	MG RESISTOR	470kΩ,1/16W
R3057	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W	R3801	NRSA6AJ-101W	MG RESISTOR	100Ω,1/16W
R3066	NRSA6AJ-561W	MG RESISTOR	560Ω,1/16W	R3802	NRSA6AD-821W	MG RESISTOR	820Ω,1/16W
R3067	NRSA6AJ-561W	MG RESISTOR	560Ω,1/16W	R3803	NRSA6AD-273W	MG RESISTOR	27kΩ,1/16W
R3068	NRSA6AJ-181W	MG RESISTOR	180Ω,1/16W	R3804	NRSA6AD-153W	MG RESISTOR	15kΩ,1/16W
R3069	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3805	NRSA6AD-821W	MG RESISTOR	820Ω,1/16W

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION	# △ REF No.	PART No.	PART NAME, DESCRIPTION
R3809	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6112	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4201	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6113	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
R4202	NRSA6AJ-510W	MG RESISTOR 51Ω,1/16W	R6201	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4203	NRSA6AJ-333W	MG RESISTOR 33kΩ,1/16W	R6202	NRSA6AD-223W	MG RESISTOR 22kΩ,1/16W
R4204	NRSA6AJ-101W	MG RESISTOR 100Ω,1/16W	R6203	NRSA6AJ-474W	MG RESISTOR 470kΩ,1/16W
R4205	NRSA6AJ-101W	MG RESISTOR 100Ω,1/16W	R6204	NRSA6AD-103W	MG RESISTOR 10kΩ,1/16W
R4302	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6205	NRSA6AJ-473W	MG RESISTOR 47kΩ,1/16W
R4303	NRSA6AJ-220W	MG RESISTOR 22Ω,1/16W	R6206	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
R4304	NRSA6AJ-220W	MG RESISTOR 22Ω,1/16W	R6207	NRSA6AD-183W	MG RESISTOR 18kΩ,1/16W
R4306	NRSA6AJ-220W	MG RESISTOR 22Ω,1/16W	R6208	NRSA6AD-123W	MG RESISTOR 12kΩ,1/16W
R4307	NRSA6AJ-220W	MG RESISTOR 22Ω,1/16W	R6209	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4308	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6210	NRSA6AD-123W	MG RESISTOR 12kΩ,1/16W
R4310	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6211	NRSA6AD-153W	MG RESISTOR 15kΩ,1/16W
R4311	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6212	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4312	NRSA6AJ-220W	MG RESISTOR 22Ω,1/16W	R6213	NRSA6AD-183W	MG RESISTOR 18kΩ,1/16W
R4313	NRSA6AJ-220W	MG RESISTOR 22Ω,1/16W	R6215	NRSA6AD-472W	MG RESISTOR 4.7kΩ,1/16W
R4314	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W	R6216	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R4315	NRSA6AJ-101W	MG RESISTOR 100Ω,1/16W	R6217	NRSA6AJ-152W	MG RESISTOR 1.5kΩ,1/16W
R4316	NRSA6AJ-101W	MG RESISTOR 100Ω,1/16W	R6218	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4317	NRSA6AJ-101W	MG RESISTOR 100Ω,1/16W	R6219	NRSA6AD-243W	MG RESISTOR 24kΩ,1/16W
R4318	NRSA6AJ-101W	MG RESISTOR 100Ω,1/16W	R6220	NRSA6AD-302W	MG RESISTOR 3kΩ,1/16W
R4319	NRSA6AJ-101W	MG RESISTOR 100Ω,1/16W	R6221	NRSA6AD-104W	MG RESISTOR 100kΩ,1/16W
R4320	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6222	NRSA6AD-123W	MG RESISTOR 12kΩ,1/16W
R4321	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6223	NRSA6AD-103W	MG RESISTOR 10kΩ,1/16W
R4322	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6224	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4323	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6225	NRSA6AD-473W	MG RESISTOR 47kΩ,1/16W
R4324	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6226	NRSA6AD-562W	MG RESISTOR 5.6kΩ,1/16W
R4325	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6227	NRSA6AD-273W	MG RESISTOR 27kΩ,1/16W
R4326	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6228	NRSA6AD-473W	MG RESISTOR 47kΩ,1/16W
R4327	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6229	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4328	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6230	NRSA6AJ-272W	MG RESISTOR 2.7kΩ,1/16W
R5001	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W	R6231	NRSA6AD-473W	MG RESISTOR 47kΩ,1/16W
R5002	NRSA6AJ-100W	MG RESISTOR 10Ω,1/16W	R6232	NRSA6AD-332W	MG RESISTOR 3.3kΩ,1/16W
R5003	NRSA6AJ-100W	MG RESISTOR 10Ω,1/16W	R6234	NRSA6AD-822W	MG RESISTOR 8.2kΩ,1/16W
R5004	NRSA6AJ-100W	MG RESISTOR 10Ω,1/16W	R6235	NRSA6AD-623W	MG RESISTOR 62kΩ,1/16W
R5005	NRSA6AJ-100W	MG RESISTOR 10Ω,1/16W	R6240	NRSA6AD-473W	MG RESISTOR 47kΩ,1/16W
R5006	NRSA6AJ-100W	MG RESISTOR 10Ω,1/16W	R6241	NRSA6AD-103W	MG RESISTOR 10kΩ,1/16W
R5009	NRSA6AJ-100W	MG RESISTOR 10Ω,1/16W	R6242	NRSA6AD-683W	MG RESISTOR 68kΩ,1/16W
R5010	NRSA6AJ-100W	MG RESISTOR 10Ω,1/16W	R6601	NRSA6AJ-822W	MG RESISTOR 8.2kΩ,1/16W
R5017	NRSA6AJ-101W	MG RESISTOR 100Ω,1/16W	R6603	NRVA6AD-683W	CMF RESISTOR 68kΩ,1/16W
R5020	NRSA6AJ-100W	MG RESISTOR 10Ω,1/16W	R6604	NRVA6AD-104W	CMF RESISTOR 100kΩ,1/16W
R6001	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W	R6605	NRSA6AJ-184W	MG RESISTOR 180kΩ,1/16W
R6002	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W	R6606	NRSA6AJ-823W	MG RESISTOR 82kΩ,1/16W
R6003	NRSA6AJ-224W	MG RESISTOR 220kΩ,1/16W	R6611	NRSA6AJ-335W	MG RESISTOR 3.3MΩ,1/16W
R6004	NRSA6AJ-183W	MG RESISTOR 18kΩ,1/16W	R6612	NRSA6AJ-474W	MG RESISTOR 470kΩ,1/16W
R6005	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W	R6613	NRSA6AJ-473W	MG RESISTOR 47kΩ,1/16W
△ R6006	NRSA63J-471X	MG RESISTOR 470Ω,1/16W	R6614	NRSA6AJ-473W	MG RESISTOR 47kΩ,1/16W
△ R6007	NRSA63J-102X	MG RESISTOR 1kΩ,1/16W	R6615	NRSA6AJ-684W	MG RESISTOR 680kΩ,1/16W
R6008	NRSA6AJ-681W	MG RESISTOR 680Ω,1/16W	R6618	NRSA6AJ-154W	MG RESISTOR 150kΩ,1/16W
R6009	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R6619	NRSA6AJ-333W	MG RESISTOR 33kΩ,1/16W
R6010	NRSA6AD-513W	MG RESISTOR 51kΩ,1/16W	R6620	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W
R6012	NRSA6AD-243W	MG RESISTOR 24kΩ,1/16W	R6621	NRSA6AJ-563W	MG RESISTOR 56kΩ,1/16W
R6101	NRSA6AD-103W	MG RESISTOR 10kΩ,1/16W	R6623	NRSA6AJ-105W	MG RESISTOR 1MΩ,1/16W
R6102	NRSA6AJ-751W	MG RESISTOR 750Ω,1/16W	R6701	NRZ0058-R20X	MG RESISTOR 0.2Ω,1/2W
R6103	NRSA6AD-622W	MG RESISTOR 6.2kΩ,1/16W	R6702	NRSA6AD-104W	MG RESISTOR 100kΩ,1/16W
R6104	NRSA6AJ-333W	MG RESISTOR 33kΩ,1/16W	R6703	NRSA6AD-123W	MG RESISTOR 12kΩ,1/16W
R6105	NRSA6AJ-562W	MG RESISTOR 5.6kΩ,1/16W	R6704	NRSA6AD-823W	MG RESISTOR 82kΩ,1/16W
R6106	NRSA6AJ-223W	MG RESISTOR 22kΩ,1/16W	R6705	NRSA6AD-333W	MG RESISTOR 33kΩ,1/16W
R6107	NRSA6AJ-472W	MG RESISTOR 4.7kΩ,1/16W	R8001	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R6108	NRSA6AJ-823W	MG RESISTOR 82kΩ,1/16W	R8002	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R6109	NRSA6AJ-823W	MG RESISTOR 82kΩ,1/16W	R8003	NRSA6AJ-220W	MG RESISTOR 22Ω,1/16W
R6110	NRSA6AD-153W	MG RESISTOR 15kΩ,1/16W	R8004	NRSA6AJ-220W	MG RESISTOR 22Ω,1/16W
R6111	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W	R8005	NRSA6AJ-220W	MG RESISTOR 22Ω,1/16W

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
R8007	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	C1013	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8008	NRSA6AJ-561W	MG RESISTOR	560Ω,1/16W	C1015	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8009	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W	C1016	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8011	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	C1017	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8012	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	C1018	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8013	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	C1019	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8014	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	C1020	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8016	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	C1021	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8017	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	C1023	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V
R8019	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	C1026	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V
R8021	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	C1027	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8022	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	C1028	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8023	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	C1029	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8025	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	C1030	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8027	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	C1031	NCFA1AZ-105X	C CAPACITOR	1μF,10V
R8028	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	C1034	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8029	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	C1036	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8030	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	C1037	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8031	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W	C1038	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8032	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	C1041	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V
R8033	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	C1401	NDCA1HJ-100W	C CAPACITOR	10pF,50V
R8036	NRSA6AJ-220W	MG RESISTOR	22Ω,1/16W	C1402	NDCA1HJ-220W	C CAPACITOR	22pF,50V
R8302	NRS181J-220X	MG RESISTOR	22Ω,1/8W	C1403	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
R8303	NRS181J-220X	MG RESISTOR	22Ω,1/8W	C1404	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
R8305	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W	C1405	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
R8306	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	C1406	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
R8307	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	C1407	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
R8308	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	C1409	NCBA1EK-682W	C CAPACITOR	0.0068μF,25V
R8309	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	C1410	NCBA1EK-682W	C CAPACITOR	0.0068μF,25V
R8310	NRSA6AJ-153W	MG RESISTOR	15kΩ,1/16W	C1411	NCBA1CK-103W	C CAPACITOR	0.01μF,16V
R8313	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	C1412	NCBA1CK-223W	C CAPACITOR	0.022μF,16V
R8314	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W	C1413	NCBA1CK-223W	C CAPACITOR	0.022μF,16V
R8315	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W	C1414	NCBA1CK-223W	C CAPACITOR	0.022μF,16V
RA1008	NRZ0034-104W	NET RESISTOR	100kW	C1415	NCBA1CK-223W	C CAPACITOR	0.022μF,16V
RA1009	NRZ0034-104W	NET RESISTOR	100kW	C1416	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
RA1010	NRZ0034-104W	NET RESISTOR	100kW	C1601	NCBA1CK-103W	C CAPACITOR	0.01μF,16V
RA1401	NRZ0034-473W	NET RESISTOR,CAM		C1602	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
RA3001	NRZ0034-560W	NET RESISTOR		C1603	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
RA3002	NRZ0034-560W	NET RESISTOR		C1605	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
RA3003	NRZ0034-100W	NET RESISTOR	10Ω	C1606	NCBA1HK-152W	C CAPACITOR	0.0015μF,50V
RA3004	NRZ0034-103W	NET RESISTOR	10kΩ,1/32W	C1607	NCBA1CK-473W	C CAPACITOR	0.047μF,16V
RA3005	NRZ0040-0R0X	NET RESISTOR,3216		C1614	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
RA4201	NRZ0034-101W	NET RESISTOR,(1005X4)		C1618	NCBA1HK-222W	C CAPACITOR	0.0022μF,50V
RA4202	NRZ0034-101W	NET RESISTOR,(1005X4)		C1619	NCBA1HK-222W	C CAPACITOR	0.0022μF,50V
RA4301	NRZ0034-101W	NET RESISTOR,(1005X4)		C1620	NCBA1HK-222W	C CAPACITOR	0.0022μF,50V
RA4302	NRZ0034-101W	NET RESISTOR,(1005X4)		C1621	NCB30JK-105X	C CAPACITOR	1μF,6.3V
RA4303	NRZ0034-101W	NET RESISTOR,(1005X4)		C1622	NCBA1CK-223W	C CAPACITOR	0.022μF,16V
RA4304	NRZ0034-101W	NET RESISTOR,(1005X4)		C1623	NCBA1AK-473W	C CAPACITOR	0.047μF,10V
RA4305	NRZ0034-100W	NET RESISTOR,(1005X4)	10Ω	C1624	NCBA1CK-103W	C CAPACITOR	0.01μF,16V
RA4306	NRZ0034-100W	NET RESISTOR,(1005X4)	10Ω	C1625	NCSA1HJ-101W	C CAPACITOR	100pF,50V
RA4307	NRZ0034-100W	NET RESISTOR,(1005X4)	10Ω	C1626	NCBA1CK-822W	C CAPACITOR	0.0082μF,16V
RA4308	NRZ0034-100W	NET RESISTOR,(1005X4)	10Ω	C1627	NCBA1CK-822W	C CAPACITOR	0.0082μF,16V
RA8001	NRZ0034-101W	NET RESISTOR,(1005X4)		C1628	NCB21CK-224X	C CAPACITOR	0.22μF,16V
RA8002	NRZ0034-101W	NET RESISTOR,(1005X4)		C1629	NBP41DM-106X	TA E CAPACITOR	10μF,20V
RA8003	NRZ0034-101W	NET RESISTOR,(1005X4)		C1630	NCB21CK-334X	C CAPACITOR	0.33μF,16V
RA8004	NRZ0034-101W	NET RESISTOR,(1005X4)		C1632	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C1004	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1633	NCB21CK-474X	C CAPACITOR	0.47μF,16V
C1005	NBE90JM-106X	TA E CAPACITOR	10μF,6.3V	C1641	NCB21CK-474X	C CAPACITOR	0.47μF,16V
C1006	NDCA1HJ-120W	C CAPACITOR	12pF,50V	C1701	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1007	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C1702	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1009	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C1801	NCBA1CK-103W	C CAPACITOR	0.01μF,16V
C1010	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C1802	NBE20JM-226X	TA E CAPACITOR	22μF,6.3V
C1011	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C1803	NCBA1CK-223W	C CAPACITOR	0.022μF,16V

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION	# △ REF No.	PART No.	PART NAME, DESCRIPTION
C1804	NCBA1CK-223W	C CAPACITOR 0.022μF,16V	C3013	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C1805	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V	C3015	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C1806	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3016	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C1807	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3017	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2101	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3020	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2102	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3021	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2103	NCBA1HK-222W	C CAPACITOR 0.0022μF,50V	C3022	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2104	NCBA1HK-222W	C CAPACITOR 0.0022μF,50V	C3023	NDCA1HJ-330W	C CAPACITOR 33pF,50V
C2105	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V	C3024	NCBA1HK-102W	C CAPACITOR 0.001μF,50V
C2106	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3025	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2107	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3026	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C2108	NBE20JM-475X	TA E CAPACITOR 4.7μF,6.3V	C3027	NCBA1EK-472W	C CAPACITOR 0.0047μF,25V
C2112	NCB30JK-105X	C CAPACITOR,A,B,C,D 1μF,6.3V	C3028	NDCA1EJ-271W	C CAPACITOR 270pF,25V
C2113	NCB30JK-105X	C CAPACITOR,A,B,C,D 1μF,6.3V	C3029	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C2201	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3030	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2202	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3031	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2203	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3032	NCBA1HK-102W	C CAPACITOR 0.001μF,50V
C2204	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3033	NDCA1HJ-220W	C CAPACITOR 22pF,50V
C2205	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3036	NDCA1HJ-8R0W	C CAPACITOR 8pF,50V
C2209	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3037	NDCA1HJ-8R0W	C CAPACITOR 8pF,50V
C2210	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3038	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2211	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3039	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2212	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3042	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C2213	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3043	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C2214	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3044	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2215	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3045	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2216	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3046	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C2217	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3047	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2218	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3048	NCB31CK-473X	C CAPACITOR 0.047μF,16V
C2223	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3049	NCBA1HK-222W	C CAPACITOR 0.0022μF,50V
C2224	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3050	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C2401	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V	C3055	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C2402	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V	C3059	NBE20GM-226X	TA E CAPACITOR 22μF,4V
C2403	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V	C3060	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C2404	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V	C3064	NCBA1HK-102W	C CAPACITOR 0.001μF,50V
C2405	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3066	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C2406	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V	C3067	NCBA1HK-102W	C CAPACITOR 0.001μF,50V
C2603	NCBA1CK-153W	C CAPACITOR 0.015μF,16V	C3069	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2604	NCBA1CK-153W	C CAPACITOR 0.015μF,16V	C3501	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V
C2605	NCBA1EK-472W	C CAPACITOR 0.0047μF,25V	C3502	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V
C2606	NCBA1EK-472W	C CAPACITOR 0.0047μF,25V	C3503	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V
C2607	NCBA1HK-102W	C CAPACITOR 0.001μF,50V	C3504	NCBA1AK-473W	C CAPACITOR 0.047μF,10V
C2608	NCBA1HK-102W	C CAPACITOR 0.001μF,50V	C3505	NCBA1CK-223W	C CAPACITOR 0.022μF,16V
C2609	NCBA1HK-102W	C CAPACITOR 0.001μF,50V	C3506	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C2610	NCBA1HK-102W	C CAPACITOR 0.001μF,50V	C3507	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C2611	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3508	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C2612	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3509	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C2613	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3510	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2614	NDCA1HJ-101W	C CAPACITOR 100pF,50V	C3511	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C2615	NDCA1HJ-101W	C CAPACITOR 100pF,50V	C3512	NCB31CK-104X	C CAPACITOR 0.1μF,16V
C2617	NCBA1CK-223W	C CAPACITOR 0.022μF,16V	C3513	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C2618	NCBA1CK-223W	C CAPACITOR 0.022μF,16V	C3514	NCBA1AK-473W	C CAPACITOR 0.047μF,10V
C2801	NCB31HK-472X	C CAPACITOR 0.0047μF,50V	C3515	NCBA1AK-473W	C CAPACITOR 0.047μF,10V
C2802	NCB31HK-472X	C CAPACITOR 0.0047μF,50V	C3516	NCBA1AK-473W	C CAPACITOR 0.047μF,10V
C3001	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V	C3517	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3003	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3518	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3005	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V	C3519	NCBA1HK-102W	C CAPACITOR 0.001μF,50V
C3006	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3520	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3007	NBE20GM-476X	TA E CAPACITOR 47μF,4V	C3521	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3008	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V	C3522	NCB20JM-475X	C CAPACITOR 4.7μF,6.3V
C3009	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3523	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3011	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3524	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3012	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3525	NCB20JM-475X	C CAPACITOR 4.7μF,6.3V

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION	# △ REF No.	PART No.	PART NAME, DESCRIPTION
C3526	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C4214	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3527	NDCA1EJ-221W	C CAPACITOR 220pF,25V	C4215	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3528	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C4216	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3701	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V	C4219	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3702	NDCA1HJ-560W	C CAPACITOR 56pF,50V	C4220	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3703	NDCA1HJ-270W	C CAPACITOR 27pF,50V	C4221	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3704	NDCA1HJ-680W	C CAPACITOR 68pF,50V	C4222	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3705	NDCA1HJ-270W	C CAPACITOR 27pF,50V	C4301	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V
C3706	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C4302	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V
C3707	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C4303	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V
C3708	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C4304	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3709	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C4305	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3710	NBE90GM-226X	TA E CAPACITOR 22μF,4V	C4306	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V
C3711	NBE90GM-226X	TA E CAPACITOR 22μF,4V	C4307	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V
C3712	NBE20GM-107X	TA E CAPACITOR 100μF,4V	C4308	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V
C3713	NBE20GM-107X	TA E CAPACITOR 100μF,4V	C4309	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3715	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C4310	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3731	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C4311	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3732	NCBA1HK-102W	C CAPACITOR 0.001μF,50V	C4312	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3733	NDCA1HJ-3R0W	C CAPACITOR 3pF,50V	C5001	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3734	NDCA1HJ-5R0W	C CAPACITOR 5pF,50V	C5002	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3735	NDCA1HJ-330W	C CAPACITOR 33pF,50V	C5003	NBE20JM-226X	TA E CAPACITOR 22μF,6.3V
C3736	NCBA1HK-102W	C CAPACITOR 0.001μF,50V	C5004	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3738	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C5005	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3739	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C5006	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3740	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C5008	NBE20GM-476X	TA E CAPACITOR 47μF,4V
C3741	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C5009	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V
C3742	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C5010	NBP21DM-475X	TA E CAPACITOR 4.7μF,20V
C3743	NDCA1HJ-3R0W	C CAPACITOR 3pF,50V	C5011	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3744	NDCA1HJ-5R0W	C CAPACITOR 5pF,50V	C5012	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3745	NDCA1HJ-330W	C CAPACITOR 33pF,50V	C5013	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3746	NCB20JM-475X	C CAPACITOR 4.7μF,6.3V	C5014	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3747	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C5015	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3801	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C5017	NBE41AM-476X	TA E CAPACITOR 47μF,10V
C3802	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C5018	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3803	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V	C5019	NCF31EZ-104X	C CAPACITOR 0.1μF,25V
C3804	NBE20GM-476X	TA E CAPACITOR 47μF,4V	C5021	NBP21DM-475X	TA E CAPACITOR 4.7μF,20V
C3805	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C5022	NCF31EZ-104X	C CAPACITOR 0.1μF,25V
C3806	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C5023	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3807	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C5025	NBP21VM-105X	TA E CAPACITOR 1μF,35V
C3808	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C5027	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3809	NCB31CK-104X	C CAPACITOR 0.1μF,16V	C5029	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3810	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C5030	NCB31CK-104X	C CAPACITOR 0.1μF,16V
C3811	NCB31CK-104X	C CAPACITOR 0.1μF,16V	C5031	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3812	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C5032	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3813	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C5033	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3814	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C6001	NCB31EK-103X	C CAPACITOR 0.01μF,25V
C3815	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6002	NCB31CK-104X	C CAPACITOR 0.1μF,16V
C3816	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6003	NBE80JM-106X	TA E CAPACITOR 10μF,6.3V
C3817	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6004	NCB21CK-105X	C CAPACITOR 1μF,16V
C3818	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6005	NBE20JM-226X	TA E CAPACITOR 22μF,6.3V
C3819	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C6008	NDCA1HJ-151W	C CAPACITOR 150pF,50V
C4201	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C6101	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C4203	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6103	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C4204	NBE20GM-107X	TA E CAPACITOR 100μF,4V	C6105	NCB21CK-105X	C CAPACITOR 1μF,16V
C4205	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6106	NBP41DM-106X	TA E CAPACITOR 10μF,20V
C4206	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6107	NCB21CK-105X	C CAPACITOR 1μF,16V
C4207	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6108	NCB21CK-105X	C CAPACITOR 1μF,16V
C4208	NCBA1CK-123W	C CAPACITOR 0.012μF,16V	C6109	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C4209	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6110	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C4210	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C6111	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C4211	NCB21CK-105X	C CAPACITOR 1μF,16V	C6112	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C4213	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6113	NCB30JK-105X	C CAPACITOR 1μF,6.3V

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
C6114	NCB30JK-105X	C CAPACITOR	1μF,6.3V	C8009	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6115	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	C8010	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6116	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	C8011	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C6117	NCBA1AK-333W	C CAPACITOR	0.033μF,10V	C8012	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6118	NCBA1HK-561W	C CAPACITOR	560pF,50V	C8013	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6119	NCBA1HK-272W	C CAPACITOR	0.0027μF,50V	C8014	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6120	NCBA1HK-561W	C CAPACITOR	560pF,50V	C8015	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6121	NCBA1CK-223W	C CAPACITOR	0.022μF,16V	C8016	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C6123	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	C8017	NCBA1CK-103W	C CAPACITOR	0.01μF,16V
C6124	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	C8018	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6125	NDCA1HJ-101W	C CAPACITOR	100pF,50V	C8021	NCBA1CK-103W	C CAPACITOR	0.01μF,16V
C6126	NCB31CK-473X	C CAPACITOR	0.047μF,16V	C8022	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C6127	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	C8023	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6128	NCBA1AK-473W	C CAPACITOR	0.047μF,10V	C8024	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6129	NCBA1CK-103W	C CAPACITOR	0.01μF,16V	C8025	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C6130	NCBA1CK-103W	C CAPACITOR	0.01μF,16V	C8026	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6131	NCBA1CK-103W	C CAPACITOR	0.01μF,16V	C8027	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6132	NCBA1CK-103W	C CAPACITOR	0.01μF,16V	C8301	NBZ0015-106X	TA E CAPACITOR	10μF,6.3V
C6133	NCBA1HK-102W	C CAPACITOR	0.001μF,50V	C8305	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6134	NCB21CK-105X	C CAPACITOR	1μF,16V	C8306	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6201	NCB21CK-105X	C CAPACITOR	1μF,16V	C8307	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6202	NCB10JK-106X	C CAPACITOR	10μF,6.3V	C8310	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6203	NCBA1HK-102W	C CAPACITOR	0.001μF,50V	C8311	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C6204	NCBA1HK-561W	C CAPACITOR	560pF,50V	L1002	NQL402M-100X	INDUCTOR	10μH
C6205	NCB30JK-105X	C CAPACITOR	1μF,6.3V	L1401	NQR0006-001X	FERRITE BEADS	
C6206	NCB21CK-105X	C CAPACITOR	1μF,16V	L1801	NQL402M-100X	INDUCTOR	10μH
C6207	NCB10JK-106X	C CAPACITOR	10μF,6.3V	L2101	NQL402M-100X	INDUCTOR	10μH
C6208	NCBA1EK-472W	C CAPACITOR	0.0047μF,25V	L2401	NQL402M-100X	INDUCTOR	10μH
C6209	NCB21CK-105X	C CAPACITOR	1μF,16V	L2402	NQL402M-100X	INDUCTOR	10μH
C6210	NCB10JK-106X	C CAPACITOR	10μF,6.3V	L2601	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C6211	NCBA1HK-102W	C CAPACITOR	0.001μF,50V	L2602	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C6212	NCB21CK-105X	C CAPACITOR	1μF,16V	L2603	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C6213	NCB30JK-105X	C CAPACITOR	1μF,6.3V	L2801	NQR0251-004X	FERRITE BEADS	
C6214	NCBA1AK-683W	C CAPACITOR	0.068μF,10V	L2802	NQR0251-004X	FERRITE BEADS	
C6215	NCB21CK-105X	C CAPACITOR	1μF,16V	L2803	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C6216	NCB30JK-105X	C CAPACITOR	1μF,6.3V	L2804	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C6217	NCB21CK-105X	C CAPACITOR	1μF,16V	L2805	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C6218	NCB21CK-105X	C CAPACITOR	1μF,16V	L3001	NQR0129-002X	FERRITE BEADS	
C6219	NCB11EK-105X	C CAPACITOR	1μF,25V	L3002	NQR0129-002X	FERRITE BEADS	
C6220	NCB21CK-105X	C CAPACITOR	1μF,16V	L3004	NQR0006-001X	FERRITE BEADS	
C6221	NCBA1HK-102W	C CAPACITOR	0.001μF,50V	L3005	NQR0006-001X	FERRITE BEADS	
C6223	NCB21CK-105X	C CAPACITOR	1μF,16V	L3007	NQL085J-2R2X	INDUCTOR	2.2μH
C6224	NCB11EK-105X	C CAPACITOR	1μF,25V	L3008	NQL085J-120X	INDUCTOR	12μH
C6225	NCB21CK-105X	C CAPACITOR	1μF,16V	L3012	NQR0129-002X	FERRITE BEADS	
C6226	NCB21CK-105X	C CAPACITOR	1μF,16V	L3014	NQL38DK-100X	P COIL	10μH
C6601	NCBA1CK-103W	C CAPACITOR	0.01μF,16V	L3015	NQR0006-001X	FERRITE BEADS	
C6602	NCB21CK-105X	C CAPACITOR	1μF,16V	L3501	NQR0129-002X	FERRITE BEADS	
C6603	NCBA1HK-102W	C CAPACITOR	0.001μF,50V	L3502	NQL402M-100X	INDUCTOR	10μH
C6604	NCBA1AK-473W	C CAPACITOR	0.047μF,10V	L3503	NQR0006-001X	FERRITE BEADS	
C6611	NCBA1HK-332W	C CAPACITOR	0.0033μF,50V	L3504	NQR0006-001X	FERRITE BEADS	
C6612	NDCA1EJ-221W	C CAPACITOR	220pF,25V	L3505	NQR0006-001X	FERRITE BEADS	
C6613	NDCA1EJ-121W	C CAPACITOR	120pF,25V	L3701	NQL38DK-100X	P COIL	10μH
C6614	NCBA1CK-103W	C CAPACITOR	0.01μF,16V	L3731	NQL085J-6R8X	INDUCTOR	6.8μH
C6701	NCB21CK-105X	C CAPACITOR	1μF,16V	L3732	NQL085J-6R8X	INDUCTOR	6.8μH
C6702	NCB21CK-105X	C CAPACITOR	1μF,16V	L3801	NQR0129-002X	FERRITE BEADS	
C8001	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V	L3802	NQR0129-002X	FERRITE BEADS	
C8002	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V	L3803	NQR0006-001X	FERRITE BEADS	
C8003	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L3804	NQL38DK-100X	P COIL	10μH
C8004	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L4201	NQL38DK-100X	P COIL	10μH
C8005	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L4301	NQR0129-002X	FERRITE BEADS	
C8006	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L4302	NQR0129-002X	FERRITE BEADS	
C8007	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L4303	NQR0129-002X	FERRITE BEADS	
C8008	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L4304	NQR0129-002X	FERRITE BEADS	

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
L4305	NQR0129-002X	FERRITE BEADS	
L5001	NQR0129-002X	FERRITE BEADS	
L5002	NQL38DK-100X	P COIL	10μH
L5003	NQL38DK-100X	P COIL	10μH
L5004	NQL38DK-100X	P COIL	10μH
L5005	NQR0129-002X	FERRITE BEADS	
L5006	NQL38DK-100X	P COIL	10μH
L5007	NQR0129-002X	FERRITE BEADS	
L6001	NQL62EM-470X	INDUCTOR	47μH
L6101	NQLZ011-4R7X	INDUCTOR	4.7μH
L6102	NQLZ011-4R7X	INDUCTOR	4.7μH
L6201	NQLZ010-390X	INDUCTOR	39μH
L6202	NQLZ011-390X	INDUCTOR	39μH
L6203	NQLZ011-390X	INDUCTOR	39μH
L6204	NQL144K-220X	P COIL	22μH
L6205	NQL62EM-470X	INDUCTOR	47μH
L6206	NQL62EM-470X	INDUCTOR	47μH
L6207	NQLZ011-221X	INDUCTOR	220μH
L6601	NQR0006-001X	FERRITE BEADS	
L6602	NQR0129-002X	FERRITE BEADS	
L6701	NQL52EM-100X	INDUCTOR	10μH
L8001	NQR0129-002X	FERRITE BEADS	
L8002	NQR0129-002X	FERRITE BEADS	
L8003	NQR0129-002X	FERRITE BEADS	
L8004	NQR0006-001X	FERRITE BEADS	
L8005	NQR0129-002X	FERRITE BEADS	
L8006	NQR0006-001X	FERRITE BEADS	
L8301	NQR0129-002X	FERRITE BEADS	
J101	QNZ0518-002	D CONNECTOR,DV	
J102	QNZ0617-001	USB CONNECTOR,USB	
J103	NNZ0088-001X	M CONNECTOR,MULTI	
J104	QNA0035-001	DC JACK,DC JACK	
TH6601	NRSA63J-0R0X	MG RESISTOR,1608	0Ω,1/16W
X1001	NAX0474-001X	C OSCILLATOR,NAX0424	16MHz
X1002	NAX0564-001X	CRYSTAL	
X1401	NAX0204-001X	CRYSTAL	16MHz
X3002	NAX0480-001X	CRYSTAL	24.576MHz
X4301	NAX0587-001X	CXO,54MHZ 5*3	
X8301	NAX0612-001X	C RESONATOR	6MHz
SD1	LY33355-001A	SHIELD CASE(PR),PRE/REC	
BK1	LY44288-001A	BRACKET(MULTI),FOR J103	
OT1	LY30030-099A	SPACER(A)	
OT2	LY30030-0C1A	SPACER(A)	
OT3	LY30030-0A3A	SPACER(A)	
OT4	LY30030-0A4A	SPACER(A)	
OT5	LY30030-0A5A	SPACER(A)	
OT6	LY44243-001A	SHEET(PWB),B TO B	
OT7	LY30030-0F6A	SPACER(A)	
OT8	LY44158-001A	SHEET(SHIELD),DVMAIN	
OT9	LY30030-0M3A	SPACER(A),FOR J103	
CN101	QGF0530F1-17W	FPC CONNE,BATT.TERM.	
CN102	QGF0532F1-20X	FFC/FPC CONNE,CCD	
CN103	QGF0517F1-06X	FPC CONNE,LOAD.MOTOR	
CN104	QGF0517F2-11X	FPC CONNE,DRUM MOTOR	
CN105	QGB0509M3-30X	B TO B CONNE,JIG CN	
CN106	QGF0517F2-16X	FPC CONNE,SENSOR	FPC(1-16)
CN107	QGF0517F2-06X	FPC CONNE,R.ENC	
CN108	QGF0517F2-18X	FPC CONNE,CAPSTAN	
CN109	QGB0405L1-60X	B TO B CONNE,SD PWB	
CN110	QGF0517F1-08X	FPC CONNE,HEAD	FFC/FPC(1-8)
CN111	QGF0517F2-11X	FPC CONNE,CAMERA OPE	
CN112	QGF0517F1-09X	FPC CONNE,SUB OPE	
CN113	QGF0306F2-49X	FFC/FPC CONNE,MONI PWB	

# ▲ REF No.	PART No.	PART NAME, DESCRIPTION	
CN114	QGA1001F1-04X	W TO B CONNE,MIC	
CN115	QGF0532F1-12X	FFC/FPC CONNE,STROBE PWB	
▲ F1601	NMFZ007-R20X-K	FUSE,UNREG	0.2A,50V
▲ F1602	NMFZ007-R50X-K	FUSE,REG_3V	0.5A,50V
▲ F6001	NMFZ007-R50X-K	FUSE	0.5A,50V
▲ F6101	NMFZ007-2R0X-K	FUSE	2A,32V
▲ F6201	NMFZ007-1R25X-K	FUSE	1.25A,32V
▲ F6701	NMFZ007-1R25X-K	FUSE	1.25A,32V

CCD BOARD ASSEMBLY <02>

PW1	YB10430A-01	CCD PWB ASS'Y,02	
Q5201	2SC3931/CD/-X	TRANSISTOR	
R5201	NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W
R5202	NRSA63J-101X	MG RESISTOR	100Ω,1/16W
R5203	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W
R5204	NRSA63J-105X	MG RESISTOR	1MΩ,1/16W
R5205	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R5206	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R5207	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C5201	NCB31EK-103X	C CAPACITOR	0.01μF,25V
C5202	NBP41DM-106X	TA E CAPACITOR	10μF,20V
C5203	NCF31EZ-104X	C CAPACITOR	0.1μF,25V
C5204	NBE21AM-106X	TA E CAPACITOR	10μF,10V
C5205	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C5206	NCB31HK-102X	C CAPACITOR	0.001μF,50V
L5201	NQL315K-100X	INDUCTOR	10μH
L5202	NQL315K-100X	INDUCTOR	10μH

SD BOARD ASSEMBLY <03>

PW1	YB10432A-02	SD PWB ASS'Y,A,B,C,D	
PW1	YB10432A-01	SD PWB ASS'Y,E,F,G,H	
IC4802	NJM2143R-X	IC,HALL AMP+	
IC4803	NJM2143R-X	IC,HALL AMP-	
IC4804	NJM3414AV-X	IC,DRIVE AMP	
IC4805	MM6564XFBE-X	IC,DAMPER	
IC4851	UPD16879GS-X	IC,F/Z_MDA	
Q4801	2SC4655/BC/-X	TRANSISTOR,HALL DRIVE	
Q4802	2SC4617/RS/-X	TRANSISTOR,DRIVE-	
Q4803	DTC144EE-X	DIGI TRANSISTOR,SS MINI	
Q4803	or RN1104-X	DIGI TRANSISTOR,SS MINI	
Q4803	or PDT144EE-X	DIGI TRANSISTOR,SS MINI	
Q4803	or UN9213J-X	DIGI TRANSISTOR,SS MINI	
Q4804	DTA144EE-X	DIGI TRANSISTOR,SS MINI	
Q4804	or RN2104-X	DIGI TRANSISTOR,SS MINI	
Q4804	or PDTA144EE-X	DIGI TRANSISTOR,SS MINI	
Q4804	or UN9113J-X	DIGI TRANSISTOR,SS MINI	
Q4805	2SC4617/RS/-X	TRANSISTOR,SS MINI	
Q4806	2SA1774/QRI-X	TRANSISTOR	
Q4851	2SC4617/RS/-X	TRANSISTOR	
D8501	EMZ6.8N-X	Z DIODE	
D8502	UMZ6.8EN-W	Z DIODE	
R4804	NRSA6AJ-564W	MG RESISTOR	560kΩ,1/16W
R4805	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R4806	NRSA6AJ-683W	MG RESISTOR	68kΩ,1/16W
R4807	NRSA6AJ-683W	MG RESISTOR	68kΩ,1/16W
R4808	NRSA6AJ-243W	MG RESISTOR	24kΩ,1/16W
R4809	NRSA6AJ-331W	MG RESISTOR	330Ω,1/16W

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

#	△ REF No.	PART No.	PART NAME, DESCRIPTION
R4810		NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R4811		NRSA6AJ-564W	MG RESISTOR 560kΩ,1/16W
R4812		NRSA6AJ-153W	MG RESISTOR 15kΩ,1/16W
R4814		NRSA6AJ-105W	MG RESISTOR 1MΩ,1/16W
R4815		NRSA6AJ-472W	MG RESISTOR 4.7kΩ,1/16W
R4816		NRSA6AJ-105W	MG RESISTOR 1MΩ,1/16W
R4817		NRSA6AJ-472W	MG RESISTOR 4.7kΩ,1/16W
R4818		NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R4819		NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R4820		NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W
R4821		NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W
R4822		NRSA6AJ-473W	MG RESISTOR 47kΩ,1/16W
R4823		NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
R4824		NRSA6AJ-472W	MG RESISTOR 4.7kΩ,1/16W
R4825		NRSA6AJ-222W	MG RESISTOR 2.2kΩ,1/16W
R4826		NRSA6AJ-473W	MG RESISTOR 47kΩ,1/16W
R4828		NRSA6AJ-183W	MG RESISTOR 18kΩ,1/16W
R4829		NRSA6AJ-302W	MG RESISTOR,A,B,C,D 3kΩ,1/16W
R4829		NRSA6AJ-122W	MG RESISTOR,E,F,G,H 1.2kΩ,1/16W
R4830		NRSA6AJ-222W	MG RESISTOR 2.2kΩ,1/16W
R4831		NRSA6AJ-473W	MG RESISTOR 47kΩ,1/16W
R4832		NRSA6AJ-333W	MG RESISTOR 33kΩ,1/16W
R4833		NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W
R4834		NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W
R4836		NRSA6AJ-561W	MG RESISTOR 560Ω,1/16W
R4841		NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R4842		NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R4854		NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4856		NRSA6AJ-6R8W	MG RESISTOR 6.8Ω,1/16W
R4857		NRSA6AJ-6R8W	MG RESISTOR 6.8Ω,1/16W
R4858		NRSA6AJ-333W	MG RESISTOR 33kΩ,1/16W
R4859		NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4860		NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4862		NRSA6AJ-6R8W	MG RESISTOR 6.8Ω,1/16W
R4863		NRSA6AJ-6R8W	MG RESISTOR 6.8Ω,1/16W
R4864		NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
R4865		NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
R4866		NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
R4867		NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
R4868		NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4870		NRSA6AJ-271W	MG RESISTOR 270Ω,1/16W
R4871		NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R4874		NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R8501		NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R8502		NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R8503		NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R8504		NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R8505		NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R8506		NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
R8507		NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R8508		NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
R8509		NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
C4803		NBZ0015-106X	TA E CAPACITOR 10μF,6.3V
C4804		NCFA1AZ-104W	C CAPACITOR 0.1μF,10V
C4806		NCFA1AZ-104W	C CAPACITOR 0.1μF,10V
C4808		NCB30JK-105X	C CAPACITOR 1μF,6.3V
C4809		NCFA1AZ-104W	C CAPACITOR 0.1μF,10V
C4810		NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C4811		NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C4812		NCFA1AZ-104W	C CAPACITOR 0.1μF,10V
C4813		NCFA1AZ-104W	C CAPACITOR 0.1μF,10V
C4814		NCFA1AZ-104W	C CAPACITOR 0.1μF,10V
C4815		NCBA1EK-152W	C CAPACITOR 1500pF,25V

#	△ REF No.	PART No.	PART NAME, DESCRIPTION
C4816		NCFA1AZ-104W	C CAPACITOR 0.1μF,10V
C4819		NCFA1AZ-104W	C CAPACITOR 0.1μF,10V
C4851		NBE20JM-106X	TA E CAPACITOR 10μF,6.3V
C4852		NCFA1AZ-104W	C CAPACITOR 0.1μF,10V
C4853		NBE21AM-335X	TA E CAPACITOR 3.3μF,10V
C4854		NBE21AM-106X	TA E CAPACITOR 10μF,10V
C4855		NCB31CK-104X	C CAPACITOR 0.1μF,16V
C4858		NDCA1HJ-680W	C CAPACITOR 68pF,50V
C4859		NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C4860		NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C4861		NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C4862		NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C4864		NBE20JM-106X	TA E CAPACITOR 10μF,6.3V
C4865		NCFA1AZ-104W	C CAPACITOR 0.1μF,10V
C8501		NBE20JM-106X	TA E CAPACITOR 10μF,6.3V
C8502		NCBA1AK-104W	C CAPACITOR 0.1μF,10V
L4802		NQL38DK-100X	P COIL 10μH
L4851		NQR0129-002X	FERRITE BEADS
L4852		NQL315K-100X	INDUCTOR 10μH
L4853		NQL315K-100X	INDUCTOR 10μH
L8501		NQR0006-001X	FERRITE BEADS
OT1		LY30029-0K7A	SPACER(A)
OT2		LY30030-0Q7A	SPACER(A),SD FPC
CN301		QGB0405M1-60X	B TO B CONNE,60P B/B
CN302		QGF0517F2-24X	FPC CONNE,OP FPC(1-24)
CN303		QGF0517F1-07X	FPC CONNE,SIDE OPE
CN304		QGF0530F1-18W	FPC CONNE,VF
CN305		NNZ0067-001X	SD CARD CONNE,SD CN

SIDE OPE BOARD ASSEMBLY <04>

PW1	YB20950A-01	SIDE OPE PASSY,04
R401	NRSA6AJ-223W	MG RESISTOR 22kΩ,1/16W
R402	NRSA6AJ-682W	MG RESISTOR 6.8kΩ,1/16W
R403	NRSA6AJ-332W	MG RESISTOR 3.3kΩ,1/16W
S401	NSW0198-001X	TACT SWITCH
S402	NSW0198-001X	TACT SWITCH
S403	NSW0198-001X	TACT SWITCH
S405	NSW0099-001X	SLIDE SWITCH
S406	NSW0120-002X	PUSH SWITCH,EJECT SW
S407	NSW0201-001X	PUSH SWITCH,VF SW
△ BT401	QAB0040-001	LI BATTERY
SD1	LY44286-001A	SHIELD(SIDE OPE
CN401	QGF0517F1-07X	FPC CONNE,SD PWB

MONITOR BOARD ASSEMBLY <06>

PW1	YB20952A-03	MONITOR P ASS'Y,06,A,B,C,D
PW1	YB20952B-02	MONITOR P.ASS'Y,06,E,F,G,H
IC7601	AN12550A	IC
IC7602	LM358DR2-X	IC
IC7603	——	IC
IC7604	MM1385GN-X	IC
IC7605	TA75S393F-X	IC
IC7606	SN74AHC1G08K-X	IC
Q7501	2SD1664/QR/-W	TRANSISTOR
Q7502	2SD1664/QR/-W	TRANSISTOR
Q7503	DTA144EE-X	DIGI TRANSISTOR
Q7503	or RN2104-X	DIGI TRANSISTOR

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

#	△	REF No.	PART No.	PART NAME, DESCRIPTION	#	△	REF No.	PART No.	PART NAME, DESCRIPTION	
			Q7503	or UN9113J-X				C7505	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V
			Q7504	2SC4617/QR/-X				C7510	NCB10JK-106X	C CAPACITOR 10μF,6.3V
			Q7504	or 2SC4738/YG/-X				C7601	NBE90JM-106X	TA E CAPACITOR 10μF,6.3V
			Q7601	2SC4617/QR/-X				C7602	NCB30JK-105X	C CAPACITOR 1μF,6.3V
			Q7601	or 2SC4738/YG/-X				C7603	NCB30JK-105X	C CAPACITOR 1μF,6.3V
			Q7602	2SA1774/QR/-X				C7604	NBE21AM-106X	TA E CAPACITOR 10μF,10V
			Q7602	or 2SA1832/YG/-X				C7605	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			Q7603	2SC4617/QR/-X				C7606	NCB11CK-225X-A	C CAPACITOR 2.2μF,16V
			Q7603	or 2SC4738/YG/-X				C7607	NCB11CK-225X-A	C CAPACITOR 2.2μF,16V
			Q7604	2SA1774/QR/-X				C7608	NCB11CK-225X-A	C CAPACITOR 2.2μF,16V
			Q7604	or 2SA1832/YG/-X				C7609	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			Q7605	UMD3N-W				C7610	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			Q7605	or XP4311-W				C7611	NCB11CK-225X	C CAPACITOR 2.2μF,16V
			Q7606	UMD3N-W				C7612	NCB21CK-105X	C CAPACITOR 1μF,16V
			Q7607	DTA124EE-X				C7613	NBP41DM-106X	TA E CAPACITOR 10μF,20V
			Q7608	DTC124EE-X				C7614	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			Q7609	2SD2654/VW/-X				C7615	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			Q7610	2SC4617/QR/-X				C7616	NRSA02J-274X	MG RESISTOR 270kΩ,1/10W
			D7601	RB480Y-W				C7617	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			D7602	MA111-X				C7618	NCB30JK-105X	C CAPACITOR 1μF,6.3V
			R7501	NRSA63J-102X				C7619	NCB30JK-105X	C CAPACITOR 1μF,6.3V
			R7502	NRSA63J-102X				C7620	NCB31EK-103X	C CAPACITOR 0.01μF,25V
			R7503	NRSA63J-102X				C7621	NCB31HK-152X	C CAPACITOR 0.0015μF,50V
			R7506	NRSA63J-473X				C7622	NBE20JM-225X	TA E CAPACITOR 2.2μF,6.3V
			R7507	NRSA63J-473X				C7623	NCB30JK-105X	C CAPACITOR 1μF,6.3V
			R7601	NRVA63D-622X				C7624	NBE90JM-106X	TA E CAPACITOR 10μF,6.3V
			R7602	NRSA63J-153X				C7625	NCB31HK-102X	C CAPACITOR 0.001μF,50V
			R7604	NRVA63D-223X				C7626	NCB30JK-105X	C CAPACITOR 1μF,6.3V
			R7604	NRVA63D-682X				C7627	NCB30JK-105X	C CAPACITOR 1μF,6.3V
			R7605	NRVA63D-223X				C7628	NCB30JK-105X	C CAPACITOR 1μF,6.3V
			R7606	NRVA63D-223X				C7629	NBP41EM-475X	TA E CAPACITOR 4.7μF,25V
			R7607	NRSA63J-223X				C7631	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			R7608	NRSA63J-223X				C7632	NBP41EM-475X	TA E CAPACITOR 4.7μF,25V
			R7609	NRSA02J-330X				C7633	NCB21CK-105X	C CAPACITOR 1μF,16V
			R7610	NRSA02J-330X				C7634	NBE90JM-106X	TA E CAPACITOR 10μF,6.3V
			R7611	NRSA63J-333X				C7635	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			R7612	NRSA63J-335X				C7636	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			R7614	NRVA63D-223X				C7637	NCB11CK-105X	C CAPACITOR 1μF,16V
			R7615	NRVA63D-433X				C7638	NCB31EK-103X	C CAPACITOR 0.01μF,25V
			R7616	NRVA63D-821X				C7639	NBE90JM-106X	TA E CAPACITOR 10μF,6.3V
			R7617	NRSA63J-153X				C7640	NCB31EK-103X	C CAPACITOR 0.01μF,25V
			R7619	NRSA63J-473X				C7642	NCB30JK-105X	C CAPACITOR 1μF,6.3V
			R7621	NRSA63J-332X				C7643	NBP21CM-335X	TA E CAPACITOR 3.3μF,16V
			R7622	NRSA63J-0R0X				C7645	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			R7623	NRSA63J-223X				C7646	NCB31EK-103X	C CAPACITOR 0.01μF,25V
			R7624	NRSA63J-0R0X				C7647	NBE90JM-106X	TA E CAPACITOR 10μF,6.3V
			R7625	NRSA63J-223X				C7648	NCB31CK-104X	C CAPACITOR,E,F,G,H 0.1μF,16V
			R7626	NRSA63J-223X				C7649	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			R7628	NRVA63D-333X				C7651	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			R7629	NRVA63D-153X				C7652	NCB31CK-104X	C CAPACITOR 0.1μF,16V
			R7630	NRVA63D-222X				L7501	NQL76EM-680X	INDUCTOR 68μH
			R7631	NRSA63J-153X				L7502	NQL76EM-220X	INDUCTOR 22μH
			R7632	NRSA63J-394X				L7601	NQL04DK-100X	INDUCTOR 10μH
			R7633	NRSA63J-103X				L7602	NQL04DK-100X	INDUCTOR 10μH
			R7634	NRSA63J-153X				L7603	NQL04DK-100X	INDUCTOR 10μH
			R7635	NRSA63J-393X				L7604	NQL04DK-100X	INDUCTOR 10μH
			R7636	NRSA63J-562X				L7605	NQL04DK-100X	INDUCTOR 10μH
			R7639	NRSA63J-473X				L7606	NQL04DK-100X	INDUCTOR,A,B,C,D 10μH
			R7640	NRSA63J-473X				L7607	NQL04DK-100X	INDUCTOR 10μH
			R7642	NRSA63J-0R0X				L7608	NQL04DK-100X	INDUCTOR,E,F,G,H 10μH
			C7501	NCZ1016-100X				△ T7501	NQS0059-001X	SIGNAL SW TRANS
			C7503	NFV41HJ-183X				WR1	YU40017-015-1	THIN WIRE,GND,E,F,G,H
			C7504	NCB31EK-103X				CN7601	QGF0306F2-45X	FFC/FPC CONNE,MAIN

MODEL	MARK	MODEL	MARK
GR-DX100EK	A	GR-DX300EK	E
GR-DX100EX	B	GR-DX300EX	F
GR-DX100EY	C	GR-DX300EY	G
GR-DX100EZ	D	GR-DX300EZ	H

#	△ REF No.	PART No.	PART NAME, DESCRIPTION
	CN7602	QGF0530F1-24W	FPC CONNE,LCD
△	F7501	NMFZ007-R40X-K	FUSE 0.4A,50V

STROBE BOARD ASSEMBLY <07>

	PW1	YB20951A-01	STROBE P.ASS'Y,07
	IC6502	TC7SET08FU-X	IC(DIGITAL)
	Q6501	2SB1462J/RS/-X	TRANSISTOR
	Q6502	UN9211J-X	DIGI TRANSISTOR
	Q6502	or DTC114EE-X	DIGI TRANSISTOR
△	Q6503	2SB1124/ST/-X	CHIP TRANSISTOR
	Q6504	2SD1628/FG/-X	TRANSISTOR
	Q6506	CT25ASJ-8-X	POW TRANSISTOR
	D6501	F1F16-X	SI DIODE
	D6502	DA121-X	DIODE
	D6503	F1SN4-X	SI DIODE
	D6504	CRG02-X	SI DIODE
	R6501	NRSA63J-3R9X	MG RESISTOR 3.9Ω,1/16W
	R6502	NRSA63J-4R7X	MG RESISTOR 4.7Ω,1/16W
	R6504	NRSA63J-471X	MG RESISTOR 470Ω,1/16W
	R6505	NRSA63J-222X	MG RESISTOR 2.2kΩ,1/16W
	R6506	NRSA63J-152X	MG RESISTOR 1.5kΩ,1/16W
	R6507	NRSA02J-106X	MG RESISTOR 10MΩ,1/10W
	R6508	NRVA63D-184X	CMF RESISTOR 180kΩ,1/16W
	R6511	NRSA63J-473X	MG RESISTOR 47kΩ,1/16W
	R6514	NRSA02J-105X	MG RESISTOR 1MΩ,1/10W
	R6515	NRS181J-220X	MG RESISTOR 22Ω,1/8W
	R6516	NRSA02J-104X	MG RESISTOR 100kΩ,1/10W
	R6519	NRSA02J-106X	MG RESISTOR 10MΩ,1/10W
	R6520	NRSA63J-330X	MG RESISTOR 33Ω,1/16W
	R6527	NRSA63J-391X	MG RESISTOR 390Ω,1/16W
	C6501	NBE41AM-336X	TA E CAPACITOR 33μF,10V
	C6502	NBE41AM-226X	TA E CAPACITOR 22μF,10V
	C6503	NCB31EK-103X	C CAPACITOR 0.01μF,25V
	C6506	NCZ1008-333X	C CAPACITOR 0.033μF
	C6508	NCB31EK-103X	C CAPACITOR 0.01μF,25V
	C6509	NCZ1024-103X	C CAPACITOR 0.01μF,250V
	C6510	NCZ1043-333X	C CAPACITOR 0.033μF,250V
	C6512	QEZ0450-326	E CAPACITOR,by hand 32μF,300V
	L6501	NQS0042-001X	SIGNAL SW TRANS
	L6502	NQL302N-100X	INDUCTOR 10μH
	L6503	NQL044K-470X	P COIL 47μH
	WR1	WJV0070-001A	E-PRIMARY WIRE
	WR2	WJV0071-001A	E-PRIMARY WIRE
	UN1	LY33438-001B	STROBE ASSY
	OT1	LY30030-098A	SPACER(A),WIRE HOLD
	OT2	LY30030-0K6A	SPACER(A),Q6503
	OT3	LY41409-002A	SPACER(STROBO),SENSOR
	CN6501	QGF0517F1-12X	FPC CONNE,SD PWB

VFBW BOARD ASSEMBLY <08>

	PW1	YB20954A-02	VFBW P.ASS'Y,07 (BW VF),A,B,C,D
	PW1	YB20954A-01	VFBW P.ASS'Y,07 (BW VF),E,F,G,H
	Q7001	PUMX1-W	PAIR TRANSISTOR
	D7001	E1S35AW0C501-X	LED
	R7001	NRVA63D-332X	CMF RESISTOR 3.3kΩ,1/16W
	R7002	NRVA63D-561X	CMF RESISTOR 560Ω,1/16W
	R7003	NRSA63J-820X	MG RESISTOR 82Ω,1/16W

#	△ REF No.	PART No.	PART NAME, DESCRIPTION
	R7004	NRSA63J-102X	MG RESISTOR 1kΩ,1/16W
	C7001	NCF31CZ-104X	C CAPACITOR 0.1μF,16V
	C7002	NCF31CZ-104X	C CAPACITOR 0.1μF,16V
	C7003	NCF31CZ-104X	C CAPACITOR 0.1μF,16V
	C7004	NCF31CZ-104X	C CAPACITOR 0.1μF,16V
	CN7001	QGF0532F1-18X	FFC/FPC CONNE,SD,A,B,C,D
	CN7001	QGF0530F1-18W	FPC CONNE,E,F,G,H
	CN7002	QGF0530F1-20W	FPC CONNE,LCD