

Home Theater Soundbar

HTB4152B/12 & HTB4150B/12/51/98/93/79

Service
Service
Service




Service Manual

TABLE OF CONTENTS

	Page
Location of PC Boards & Versions Variation	1
Specifications	2
Safety Instruction	3
Software Upgrade Instruction.....	4
Troubleshooting.....	5
Disassembly Instructions	6
Set Wiring & Block Diagram.....	7
Circuit Diagram & PCBA Layout.....	8
Set Mechanical Exploded View	9
Revision List.....	10

© Copyright 2014 WOOX Innovations Limited.
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise without the prior permission of WOOX Innovations. Philips and the Philips’ Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used by WOOX Innovations Limited under license from Koninklijke Philips N.V.

PCB Board Locations

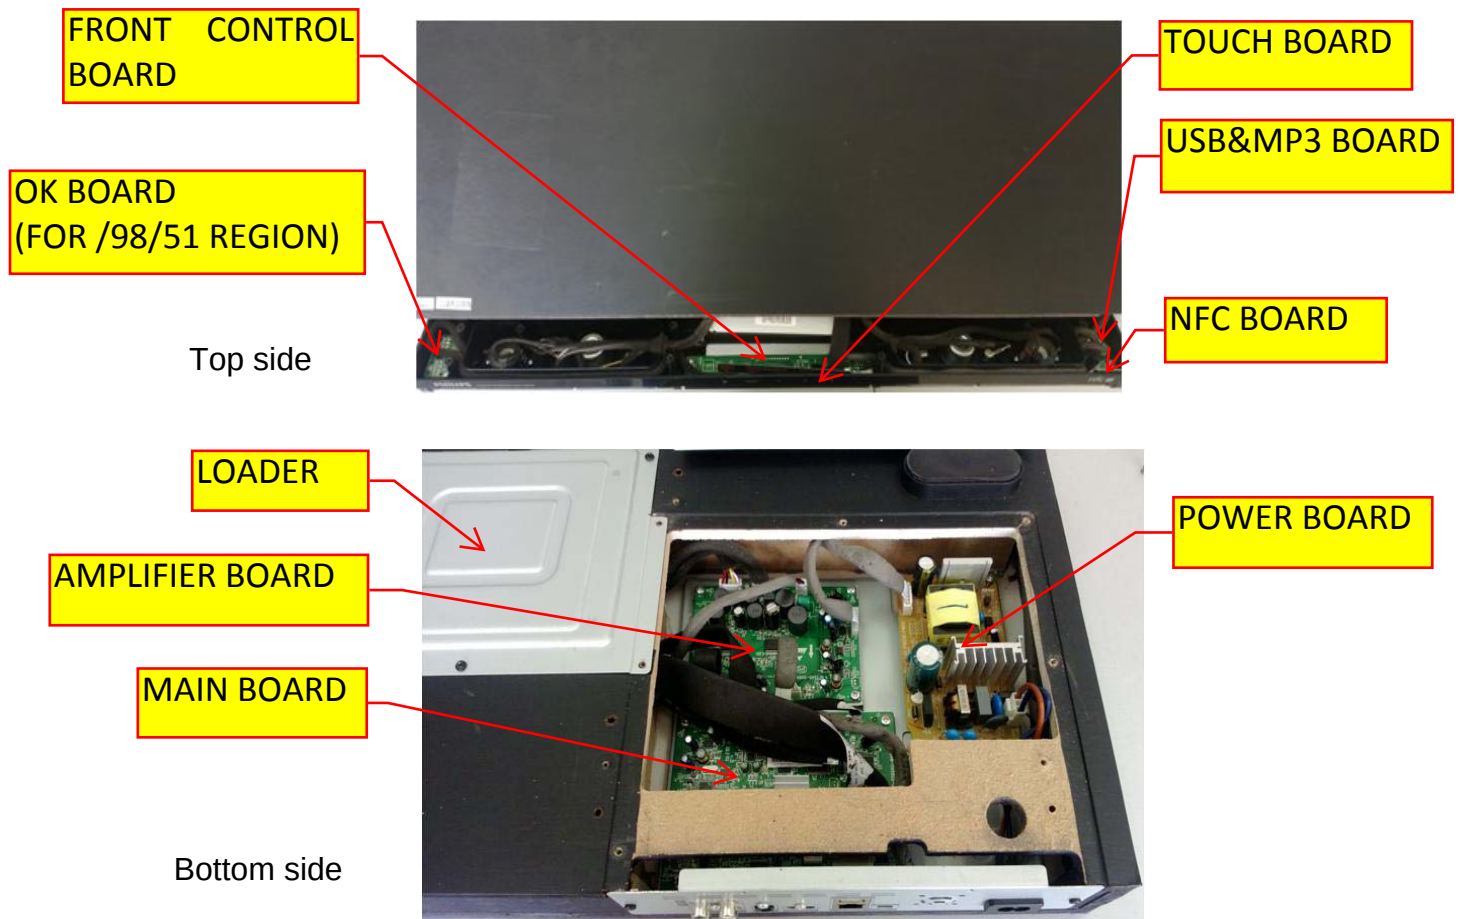

VERSION VARIATIONS

Board in used	Type / Versions	HTB4152							
	Service Policy	B/12	B/12	B/51	B/98	B/93	B/79		
MAIN BOARD		M	M	M	M	M	M		
POWER BOARD		C	C	C	C	C	C		
AMPLIFIER BOARD		C	C	C	C	C	C		
FRONT CONTROL BOARD		C	C	C	C	C	C		
USB&MP3 BOARD		C	C	C	C	C	C		
TOUCH BOARD		C	C	C	C	C	C		
NFC BOARD		C	C	C	C	C	C		
LOADER		C	C	C	C	C	C		
* Tips:	C -- Component Lever Repair M -- Module Lever Repair								

HTB4150B:

Product specifications

Note

- Specifications and design are subject to change without notice.

Region codes

The type plate on the back or bottom of the SoundStage shows which regions it supports.

Country	DVD	BD
Europe, United Kingdom	 	
Asia Pacific, Taiwan, Korea	 	
Latin America	 	
Australia, New Zealand	 	
Russia, India	 	
China	 	

Media formats

- AVCHD, BD, BD-R/ BD-RE, BD-Video, DVD-Video, DVD+R/+RW, DVD-R/-RW, DVD+R/-R DL, CD-R/CD-RW, Audio CD, Video CD/SVCD, Picture files, MP3 media, WMA media, DivX Plus HD media, USB storage device

File formats

- Audio:
 - .aac, .mka, .mp3, .wma, .wav, .mp4, .m4a, .flac, .ogg
 - .ra (Available only in Asia Pacific and China)
- Video:
 - .avi, .divx, .mp4, .m4v, .mkv, .asf, .wmv, .m2ts, .mpg, .mpeg, .flv, .3gp
 - .rmvb, .rm, .rv (Available only in Asia Pacific and China)
- Picture: .jpg, .jpeg, .jpe, .gif, .png

Bluetooth

- Bluetooth profiles: A2DP, AVRCP
- Bluetooth version: 2.1 + EDR

Audio formats

Your SoundStage supports the following audio files.

(.ra files are supported only in Asia Pacific and China)

Extension	Container	Audio codec	Bit rate
.mp3	MP3	MP3	Upto 320 kbps
.wma	ASF	WMA	Upto 192 kbps
.aac	AAC	AAC, HE-AAC	Upto 192 kbps
.wav	WAV	PCM	27.648 Mbps
.m4a	MKV	AAC	192 kbps
.mka	MKA	PCM	27.648 Mbps
		Dolby Digital	640 kbps

		DTS core	1.54 Mbps
		MPEG	912 kbps
		MP3	Upto 320 kbps
		WMA	Upto 192 kbps
		AAC, HE-AAC	Upto 192 kbps
.ra	RM	AAC, HE-AAC	Upto 192 kbps
		Cook	96469 bps
.flac	FLAC	FLAC	Upto 24 bps
.ogg	OGG	Vorbis	Variable bit rate, maximum block size 4096
		MP3	Upto 320 kbps

Video formats

If you have a high definition TV, your SoundStage allows you to play your video files with:

- Resolution: 1920 × 1080 pixels at
- Frame rate: 6 ~ 30 frames per second.

.avi files in AVI container

Audio codec	Video codec	Bit rate
PCM, Dolby Digital, DTS core, MP3, WMA	DivX 3.11, DivX 4.x, DivX 5.x, DivX 6.x	10 Mbps max
	MPEG 1, MPEG 2	40 Mbps

MPEG 4 SP / ASP	38.4 Mbps
H.264/AVC upto HiP@4.2	25 Mbps
WMV9	45 Mbps

.divx files in AVI container

Audio codec	Video codec	Bit rate
PCM, Dolby Digital, MP3, WMA	DivX 3.11, DivX 4.x, DivX 5.x, DivX 6.x	10 Mbps max

.mp4 or .m4v files in MP4 container

Audio codec	Video codec	Bit rate
Dolby Digital, MPEG, MP3, AAC, HE-AAC, Dolby Digital Plus	MPEG 1, MPEG 2	40 Mbps
	MPEG 4 ASP	38.4 Mbps
	H.264/AVC HiP@4.2	25 Mbps

.mkv files in MKV container

Audio codec	Video codec	Bit rate
PCM, Dolby Digital, DTS core, MPEG, MP3, WMA, AAC, HE-AAC, Dolby Digital Plus	DivX Plus HD	30 Mbps
	MPEG 1, MPEG 2	40 Mbps
	MPEG 4 ASP	38.4 Mbps
	H.264/AVC HiP@4.2	25 Mbps
	WMV9	45 Mbps

.m2ts files in MKV container

Audio codec	Video codec	Bit rate
PCM, Dolby Digital, DTS core, MPEG, MP3, WMA, AAC, HE-AAC, Dolby Digital Plus	MPEG 1, MPEG 2	40 Mbps
	MPEG 4 ASP	38.4 Mbps
	H.264/AVC upto HiP@4.2	25 Mbps
	WMV9	45 Mbps

.asf files in ASF container

Audio codec	Video codec	Bit rate
Dolby Digital, MP3, WMA, Dolby Digital Plus	MPEG 4 ASP	38.4 Mbps
	H.264/AVC upto HiP@4.2	25 Mbps
	WMV9	45 Mbps

.mpg and .mpeg files in PS container

Audio codec	Video codec	Bit rate
PCM, DTS core, MPEG, MP3	MPEG 1, MPEG 2	40 Mbps

.flv files in FLV container

Audio codec	Video codec	Bit rate
MP3, AAC	H.264/AVC upto HiP@4.2	25 Mbps
	H.263	38.4 Mbps

.3gp files in 3GP container

Audio codec	Video codec	Bit rate
AAC, HE-AAC	MPEG 4 ASP	38.4 Mbps
	H.264/AVC upto HiP@4.2	25 Mbps max

**.rm, .rv, and .rmvb files in RM container
(Available only in Asia Pacific and China)**

Audio codec	Video codec	Bit rate
AAC, COOK	RV30, RV40	40 Mbps

Amplifier

- Total output power: 80W RMS (10% THD)
- Frequency response: 20 Hz-20 kHz / ± 3 dB
- Signal-to-noise ratio: > 65 dB (CCIR) / (A-weighted)
- Input sensitivity:
 - AUX: 2 V rms
 - AUDIO IN: 1 V rms

Video

- Signal system: PAL / NTSC
- HDMI output: 480i/576i, 480p/576p, 720p, 1080i, 1080p, 1080p24

Audio

- S/PDIF Digital audio input:
 - Coaxial: IEC 60958-3
 - Optical: TOSLINK
- Sampling frequency:
 - MP3: 32 kHz, 44.1 kHz, 48 kHz
 - WMA: 44.1 kHz, 48 kHz
- Constant bit rate:
 - MP3: 32 kbps - 320 kbps
 - WMA: 48 kbps - 192 kbps

Radio

- Tuning range:
 - Europe/Russia/China: FM 87.5-108 MHz (50 kHz)

- Asia Pacific/Latin America: FM 87.5-108 MHz (50/100 kHz)
- Signal-to-noise ratio: FM 50 dB
- Frequency response: FM 180 Hz-12.5 kHz / ± 3 dB

USB

- Compatibility: Hi-Speed USB (2.0)
- Class support: USB Mass Storage Class (MSC)
- File system: FAT16, FAT32, NTFS
- USB port: 5V $\Rightarrow$, 1A

Main unit

- Power supply: 110-240 V~, 50/60 Hz
- Power consumption: 40 W
- Standby power consumption: ≤ 0.5 W
- Dimensions (WxHxD):
701 x 70 x 317 mm
- Weight: 6.8 kg
- Operating temperature and humidity:
0°C to 45°C, 5% to 90% humidity for all climates
- Storage temperature and humidity: -40°C to 70°C, 5% to 95%

Speakers

- Output power: 2 x 20 W RMS (10% THD)
- Speaker impedance: 4 ohm
- Speaker drivers: 2 x racetrack (1.5" x 5") + 2 x 1" tweeter

Subwoofer

- Output power: 40 W RMS (10% THD)
- Impedance: 4 ohm
- Speaker drivers: 105mm (4") woofer

Remote control batteries

- 2 x AAA-R03-1.5 V

Laser

- Laser Type (Diode): InGaN/AlGaIn (BD), AlGaInP (DVD/CD)
- Wave length: 405 ± 7 nm (BD), 660 ± 10 nm (DVD), 785 ± 10 nm (CD)
- Output power (Max. ratings): 20 mW (BD), 6 mW (DVD), 7 mW (CD)

HTB4152B:

Product specifications



Note

- Specifications and design are subject to change without notice.

Region codes

The type plate on the back or bottom of the SoundStage shows which regions it supports.

Country	DVD	BD
Europe, United Kingdom		
Asia Pacific, Taiwan, Korea		
Latin America		
Australia, New Zealand		
Russia, India		
China		

Media formats

- AVCHD, BD, BD-R/ BD-RE, BD-Video, DVD-Video, DVD+R/+RW, DVD-R/-RW, DVD+R/-R DL, CD-R/CD-RW, Audio CD, Video CD/SVCD, Picture files, MP3 media, WMA media, DivX Plus HD media, USB storage device

File formats

- Audio:
 - .aac, .mka, .mp3, .wma, .wav, .mp4, .m4a, .flac, .ogg
 - .ra (Available only in Asia Pacific and China)
- Video:
 - .avi, .divx, .mp4, .m4v, .mkv, .asf, .wmv, .m2ts, .mpg, .mpeg, .flv, .3gp
 - .rmvb, .rm, .rv (Available only in Asia Pacific and China)
- Picture: .jpg, .jpeg, .jpe, .gif, .png

Bluetooth

- Bluetooth profiles: A2DP, AVRCP
- Bluetooth version: 2.1 + EDR

Audio formats

Your SoundStage supports the following audio files.

(.ra files are supported only in Asia Pacific and China)

Extension	Container	Audio codec	Bit rate
.mp3	MP3	MP3	Upto 320 kbps
.wma	ASF	WMA	Upto 192 kbps
.aac	AAC	AAC, HE-AAC	Upto 192 kbps
.wav	WAV	PCM	27.648 Mbps
.m4a	MKV	AAC	192 kbps
.mka	MKA	PCM	27.648 Mbps
		Dolby Digital	640 kbps

		DTS core	1.54 Mbps
		MPEG	912 kbps
		MP3	Upto 320 kbps
		WMA	Upto 192 kbps
		AAC, HE-AAC	Upto 192 kbps
.ra	RM	AAC, HE-AAC	Upto 192 kbps
		Cook	96469 bps
.flac	FLAC	FLAC	Upto 24 bps
.ogg	OGG	Vorbis	Variable bit rate, maximum block size 4096
		MP3	Upto 320 kbps

Video formats

If you have a high definition TV, your SoundStage allows you to play your video files with:

- Resolution: 1920 × 1080 pixels at
- Frame rate: 6 ~ 30 frames per second.

.avi files in AVI container

Audio codec	Video codec	Bit rate
PCM, Dolby Digital, DTS core, MP3, WMA	DivX 3.11, DivX 4.x, DivX 5.x, DivX 6.x	10 Mbps max
	MPEG 1, MPEG 2	40 Mbps

MPEG 4 SP / ASP	38.4 Mbps
H.264/AVC upto HiP@4.2	25 Mbps
WMV9	45 Mbps

.divx files in AVI container

Audio codec	Video codec	Bit rate
PCM, Dolby Digital, MP3, WMA	DivX 3.11, DivX 4.x, DivX 5.x, DivX 6.x	10 Mbps max

.mp4 or .m4v files in MP4 container

Audio codec	Video codec	Bit rate
Dolby Digital, MPEG, MP3, AAC, HE-AAC, Dolby Digital Plus	MPEG 1, MPEG 2	40 Mbps
	MPEG 4 ASP	38.4 Mbps
	H.264/AVC HiP@4.2	25 Mbps

.mkv files in MKV container

Audio codec	Video codec	Bit rate
PCM, Dolby Digital, DTS core, MPEG, MP3, WMA, AAC, HE-AAC, Dolby Digital Plus	DivX Plus HD	30 Mbps
	MPEG 1, MPEG 2	40 Mbps
	MPEG 4 ASP	38.4 Mbps
	H.264/AVC HiP@4.2	25 Mbps
	WMV9	45 Mbps

.m2ts files in MKV container

Audio codec	Video codec	Bit rate
PCM, Dolby Digital, DTS core, MPEG, MP3, WMA, AAC, HE-AAC, Dolby Digital Plus	MPEG 1, MPEG 2	40 Mbps
	MPEG 4 ASP	38.4 Mbps
	H.264/AVC HiP@4.2	25 Mbps
	WMV9	45 Mbps

.asf files in ASF container

Audio codec	Video codec	Bit rate
Dolby Digital, MP3, WMA, Dolby Digital Plus	MPEG 4 ASP	38.4 Mbps
	H.264/AVC HiP@4.2	25 Mbps
	WMV9	45 Mbps

.mpg and .mpeg files in PS container

Audio codec	Video codec	Bit rate
PCM, DTS core, MPEG, MP3	MPEG 1, MPEG 2	40 Mbps

.flv files in FLV container

Audio codec	Video codec	Bit rate
MP3, AAC	H.264/AVC upto HiP@4.2	25 Mbps
	H.263	38.4 Mbps

.3gp files in 3GP container

Audio codec	Video codec	Bit rate
AAC, HE-AAC	MPEG 4 ASP	38.4 Mbps
	H.264/AVC upto HiP@4.2	25 Mbps max

.rm, .rv, and .rmvb files in RM container (Available only in Asia Pacific and China)

Audio codec	Video codec	Bit rate
AAC, COOK	RV30, RV40	40 Mbps

Amplifier

- Total output power: 80W RMS (10% THD)
- Frequency response: 20 Hz-20 kHz / ± 3 dB
- Signal-to-noise ratio: > 65 dB (CCIR) / (A-weighted)
- Input sensitivity:
 - AUX: 2 V rms
 - AUDIO IN: 1 V rms

Video

- Signal system: PAL / NTSC
- HDMI output: 480i/576i, 480p/576p, 720p, 1080i, 1080p, 1080p24

Audio

- S/PDIF Digital audio input:
 - Coaxial: IEC 60958-3
 - Optical: TOSLINK
- Sampling frequency:
 - MP3: 32 kHz, 44.1 kHz, 48 kHz
 - WMA: 44.1 kHz, 48 kHz
- Constant bit rate:
 - MP3: 32 kbps - 320 kbps
 - WMA: 48 kbps - 192 kbps

Radio

- Tuning range:
 - Europe/Russia/China: FM 87.5-108 MHz (50 kHz)

- Asia Pacific/Latin America: FM 87.5-108 MHz (50/100 kHz)
- Signal-to-noise ratio: FM 50 dB
- Frequency response: FM 180 Hz-12.5 kHz / ± 3 dB

USB

- Compatibility: Hi-Speed USB (2.0)
- Class support: USB Mass Storage Class (MSC)
- File system: FAT16, FAT32, NTFS
- USB port: 5V $\Rightarrow$, 1A

Main unit

- Power supply: 110-240 V~, 50/60 Hz
- Power consumption: 40 W
- Standby power consumption: ≤ 0.5 W
- Dimensions (WxHxD):
701 x 70 x 317 mm
- Weight: 6.8 kg
- Operating temperature and humidity:
0°C to 45°C, 5% to 90% humidity for all climates
- Storage temperature and humidity: -40°C to 70°C, 5% to 95%

Speakers

- Output power: 2 x 20 W RMS (10% THD)
- Speaker impedance: 4 ohm
- Speaker drivers: 2 x racetrack (1.5" x 5") + 2 x 1" tweeter

Subwoofer

- Output power: 40 W RMS (10% THD)
- Impedance: 4 ohm
- Speaker drivers: 105mm (4") woofer

Remote control batteries

- 2 x AAA-R03-1.5 V

Laser

- Laser Type (Diode): InGaN/AlGaIn (BD), AlGaInP (DVD/CD)
- Wave length: 405 ± 7 nm (BD), 660 ± 10 nm (DVD), 785 ± 10 nm (CD)
- Output power (Max. ratings): 20 mW (BD), 6 mW (DVD), 7 mW (CD)

Service Hints

CAUTION


CHARGED CAPACITORS ON THE SERVO BOARD MAY DAMAGE THE DRIVE ELECTRONICS WHEN CONNECTING A NEW DRIVE. THAT'S WHY, BESIDES THE SAFETY MEASURES LIKE

- **SWITCH OFF POWER SUPPLY**
- **ESD PROTECTION**


ADDITIONAL ACTIONS MUST BE TAKEN BY THE REPAIR TECHNICIAN.

The following steps have to be done when replacing the defective loader :

1. Dismantling of the loader to access the ESD protection point if necessary.
2. **Solder the ESD protection point*.**
3. Disconnect flexfoil cable from the defective loader.
4. Put a paper clip on the flexfoil to short-circuit the contacts (fig.1)
5. Replace the defective loader with a new loader.
6. Remove paperclip from the flexfoil and connect it to the new loader.
7. Remove solder joint on the ESD protection point.

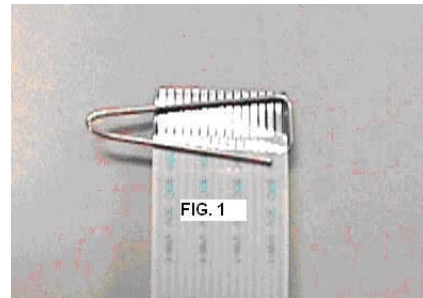

ATTENTION: The laser diode of this loader is protected against ESD by a solder joint which shortcircuits the laserdiode to ground. For proper functionality of the loader this solder joint must be remove **after** connection loader to the set.

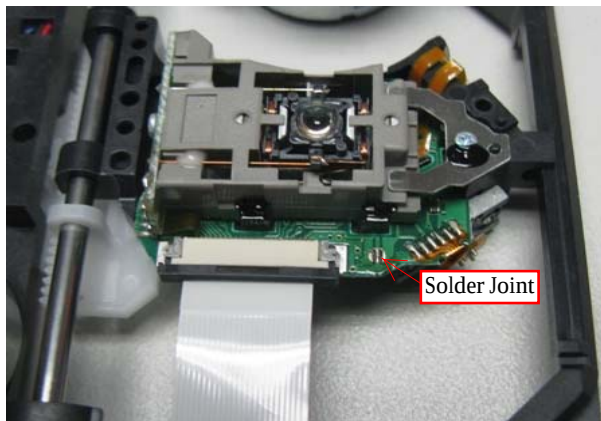

(ESD protection point is accessible from top of loader)

****Only applicable for defective loader needed to be sent back to supplier for failure analysis and to support backcharging evidence.***

This is also applicable for all partnership workshops.

Software Upgrade for HTB4150B

1. There are 2 ways to software upgrade:

First:

Upgrade from USB:

New a folder in root directory of USB and name it 'UPG'. Copy the upgrade file HTB4150.BIN to the UPG directory then press the HOME key on RC into HOME screen .Select 'Setup'->'Advanced'->'Software update'->'USB' in order and then press OK key .

When upgrade file detected, select "Start" to upgrade, select "Cancel" to cancel.

After upgrading begins, a message "Do not Switch off" will show, or the product will hang up and upgrading failed.

After you cancel, the product would restart and the software would not be upgraded.

Second:

Upgrade from Network:

Keep the product connect to internet. press the HOME key on RC into HOME screen .Select 'Setup'->'Advanced'->'Software update'->'Network' in order and then press OK key .

When upgrade file detected, select "OK" to download, select "Cancel" to cancel. After the software is downloaded, select to upgrade or cancel.

After upgrading begins, a message "Do not Switch off" will show, or the product will hang up and upgrading failed.

After you cancel, the product would restart and the software would not be upgraded.

2. Check the version information after upgraded.

Press the Home key on RC , select 'Setup'->'Advanced'->'Version information' in order, and then press OK Key you will see a interface like below:

Model:HTB4150/12

Version

SystemSW:x.xx.xx

Subsystem SW:xx-xx-xx-xx

Ethernet MAC:xx:xx:xx:xx:xx:xx

EUI64:xx xx xx xx xx xx xx xx

For information,frequently asked question and software updates, visit

www.philips.com/support.

Close

Software Upgrade for HTB4152B

1. There are 2 ways to software upgrade:

First:

Upgrade from USB:

New a folder in root directory of USB and name it 'UPG'. Copy the upgrade file HTB4152.BIN to the UPG directory then press the HOME key on RC into HOME screen .Select 'Setup'->'Advanced'->'Software update'->'USB' in order and then press OK key .

When upgrade file detected, select "Start" to upgrade, select "Cancel" to cancel.

After upgrading begins, a message "Do not Switch off" will show, or the product will hang up and upgrading failed.

After you cancel, the product would restart and the software would not be upgraded.

Second:

Upgrade from Network:

Keep the product connect to internet. press the HOME key on RC into HOME screen .Select 'Setup'->'Advanced'->'Software update'->'Network' in order and then press OK key .

When upgrade file detected, select "OK" to download, select "Cancel" to cancel. After the software is downloaded ,select to upgrade or cancel.

After upgrading begins, a message "Do not Switch off" will show, or the product will hang up and upgrading failed.

After you cancel, the product would restart and the software would not be upgraded.

2. Check the version information after upgraded.

Press the Home key on RC , select 'Setup'->'Advanced'->'Version information' in order, and then press OK Key you will see a interface like below:

Model:HTB4152/12

Version

SystemSW:x.xx.xx

Subsystem SW:xx-xx-xx-xx


Ethernet MAC:xx:xx:xx:xx:xx:xx


EUI64:xx xx xx xx xx xx xx xx


For information,frequently asked question and software updates, visit


www.philips.com/support.


Close

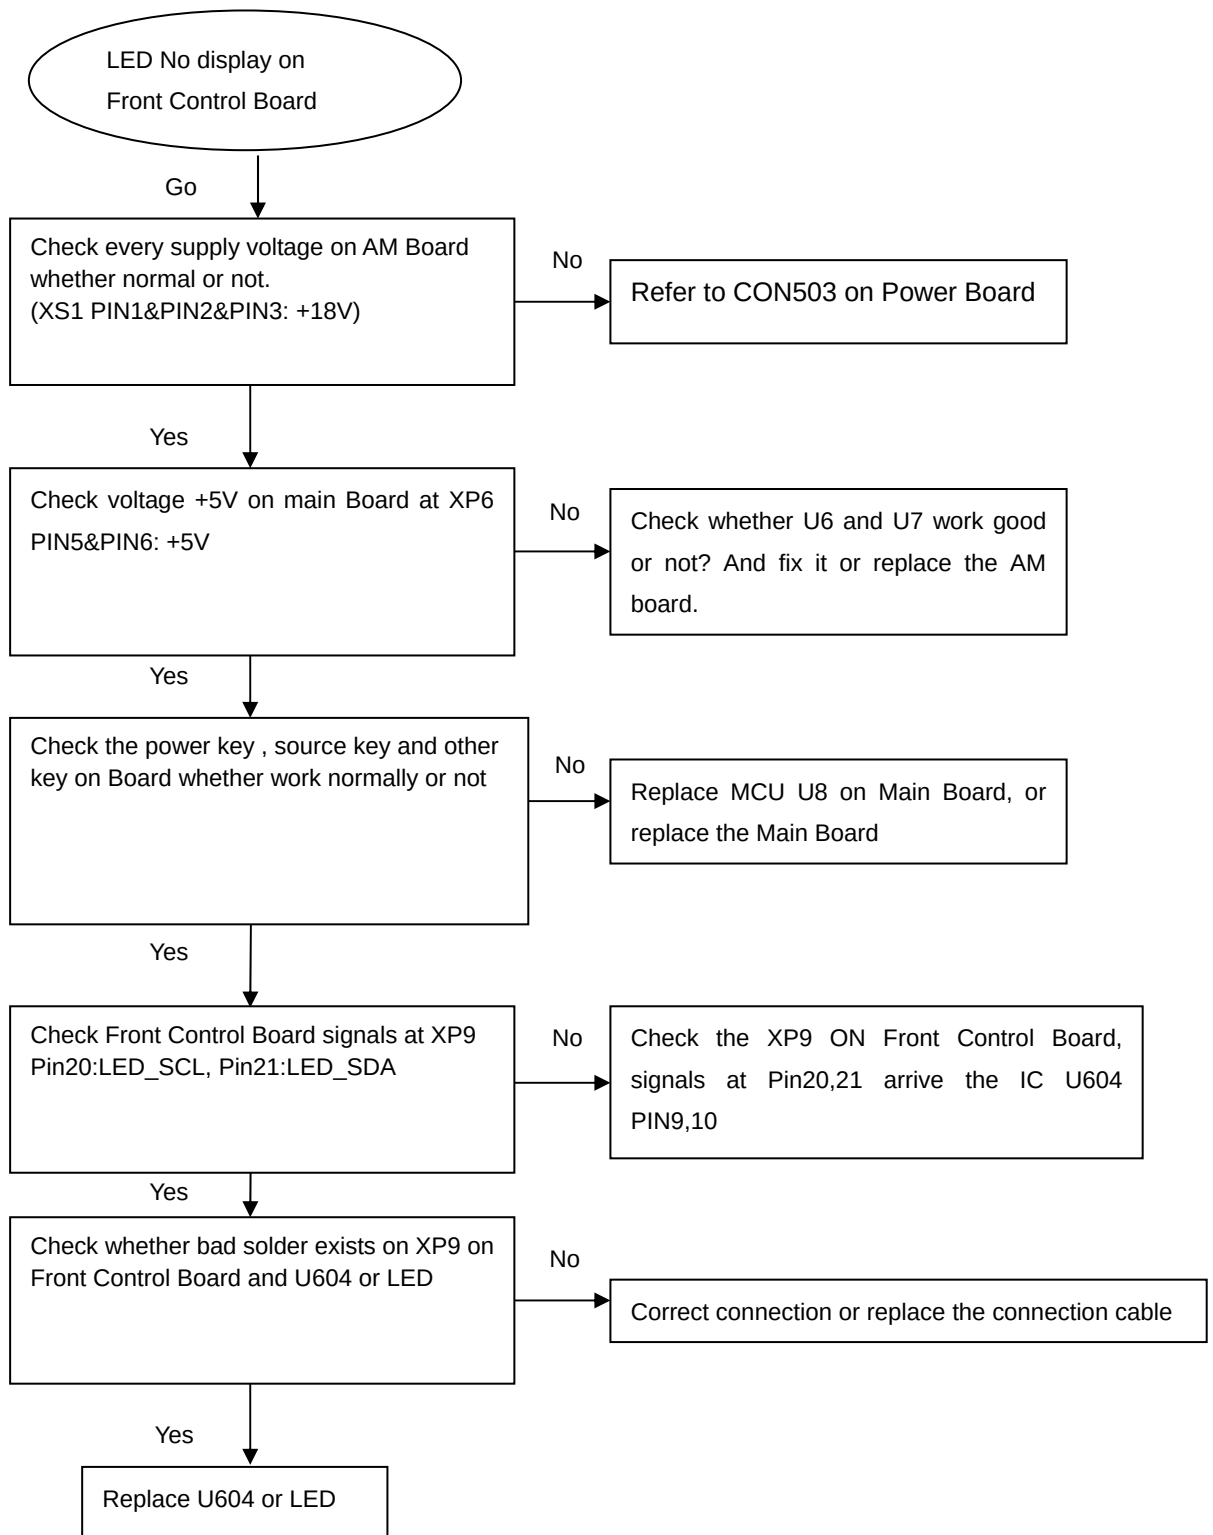
LED No display on Front Control Board

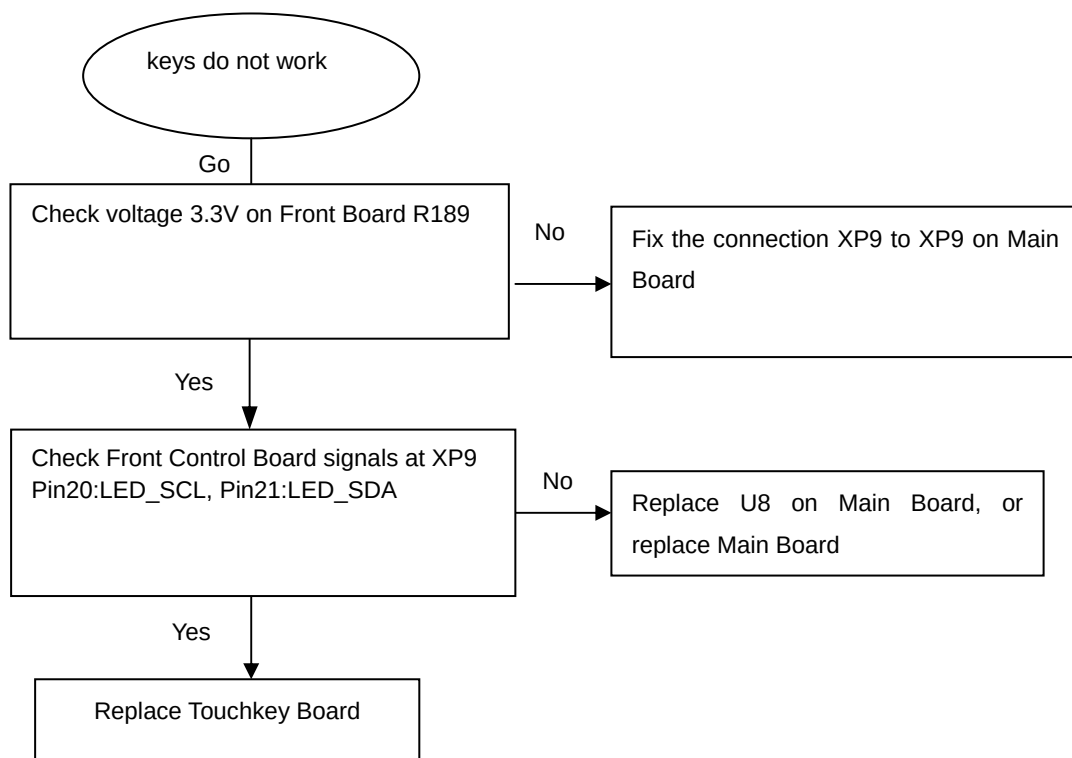
keys do not work

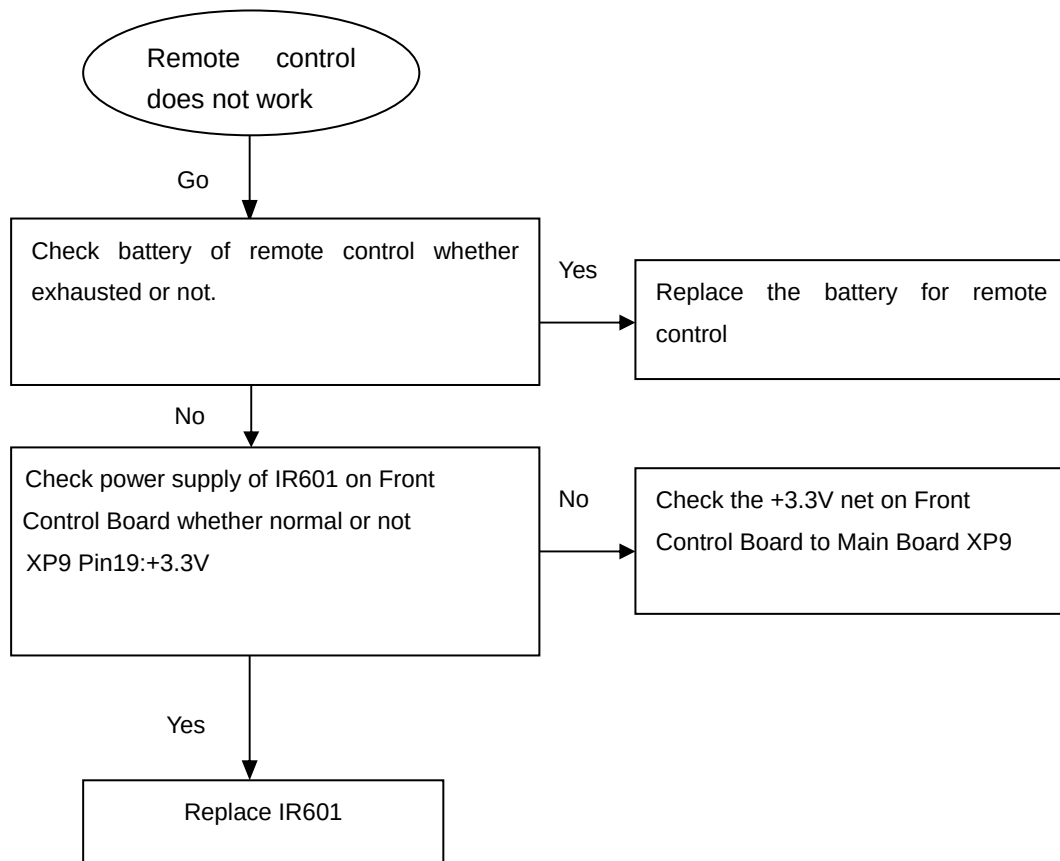
Remote control does not work

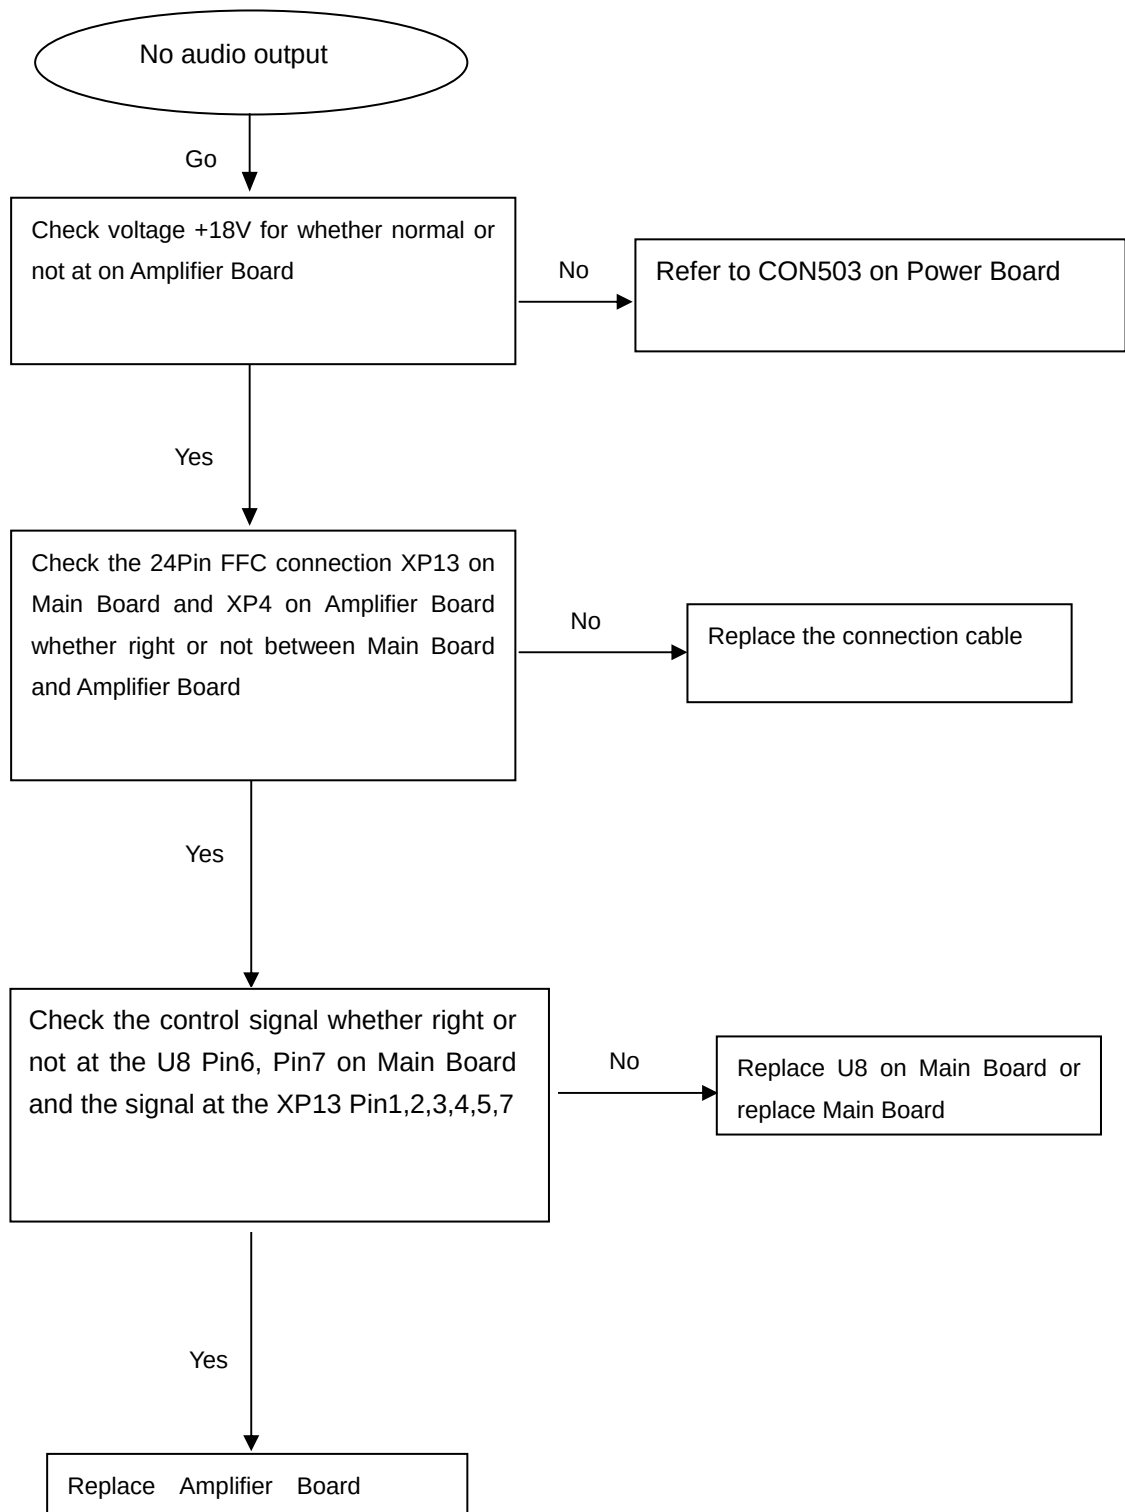
No audio output

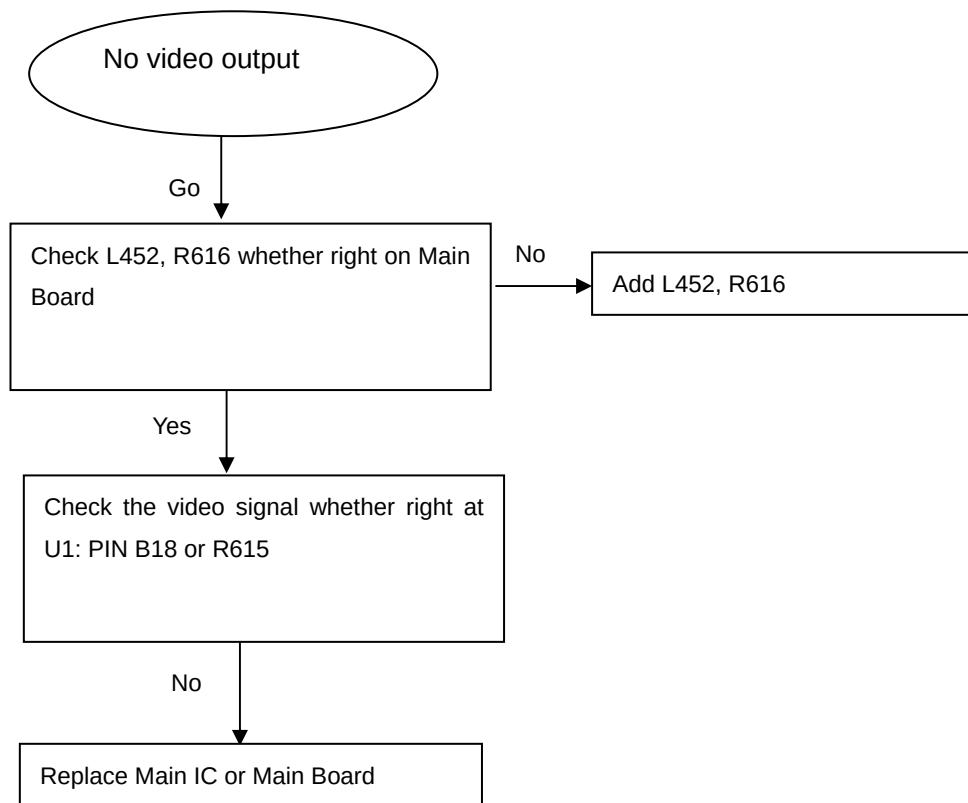
No video output

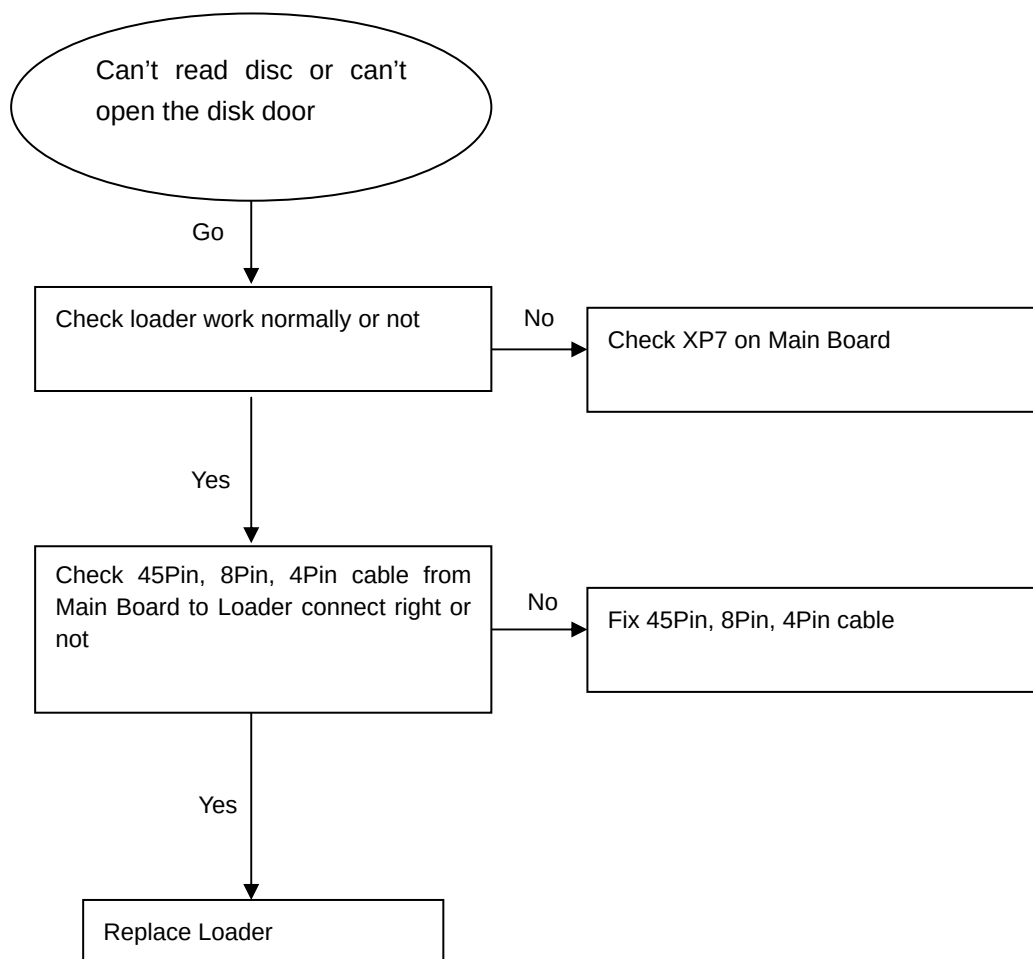
Can't read disc or can't open the disk door

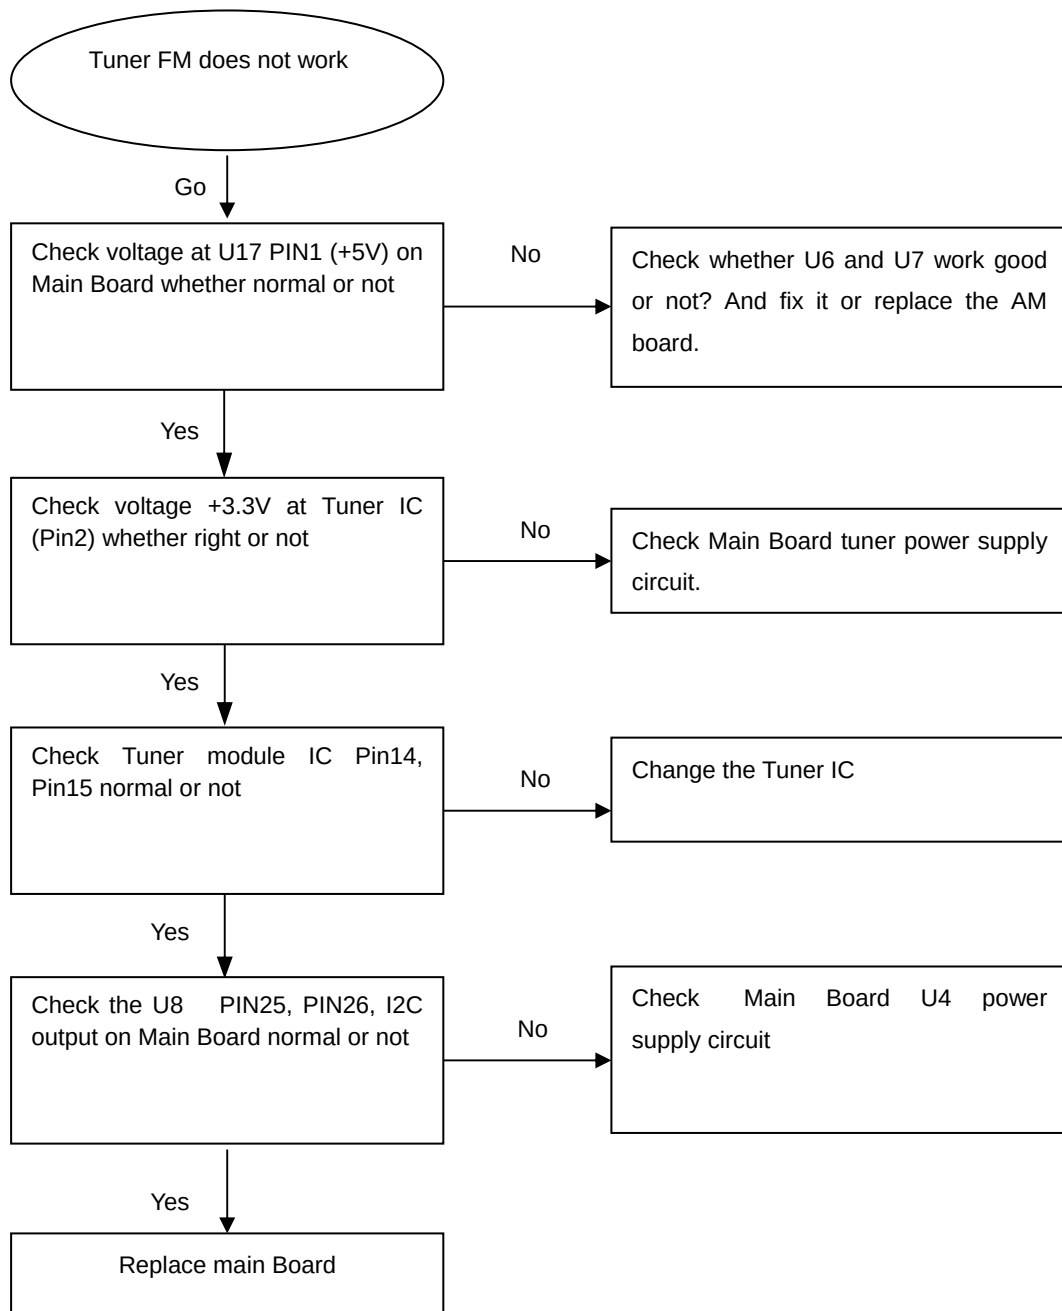
Tuner FM does not work

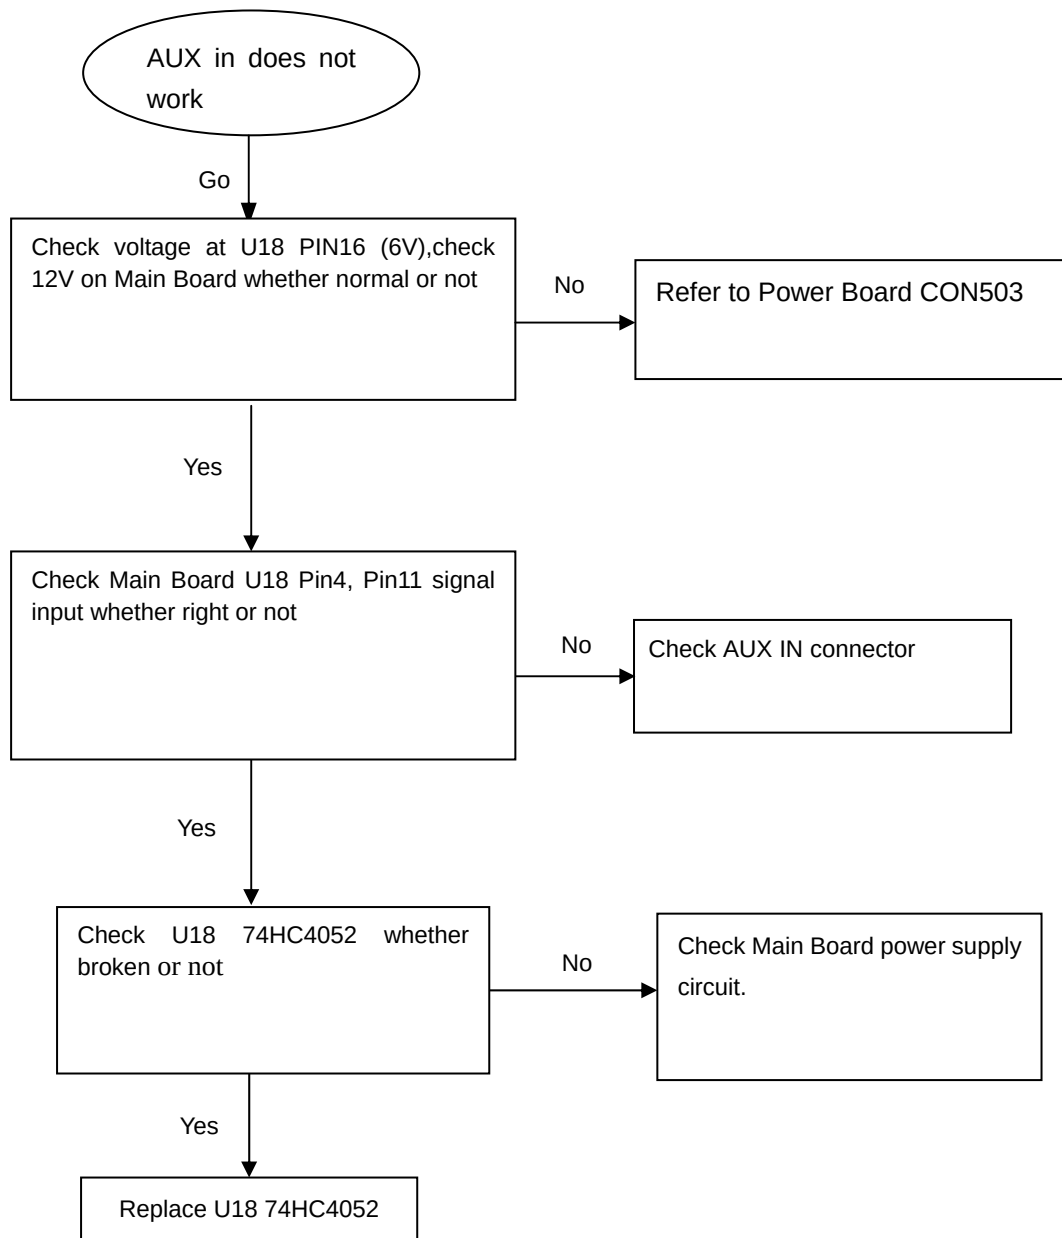AUX in does not work

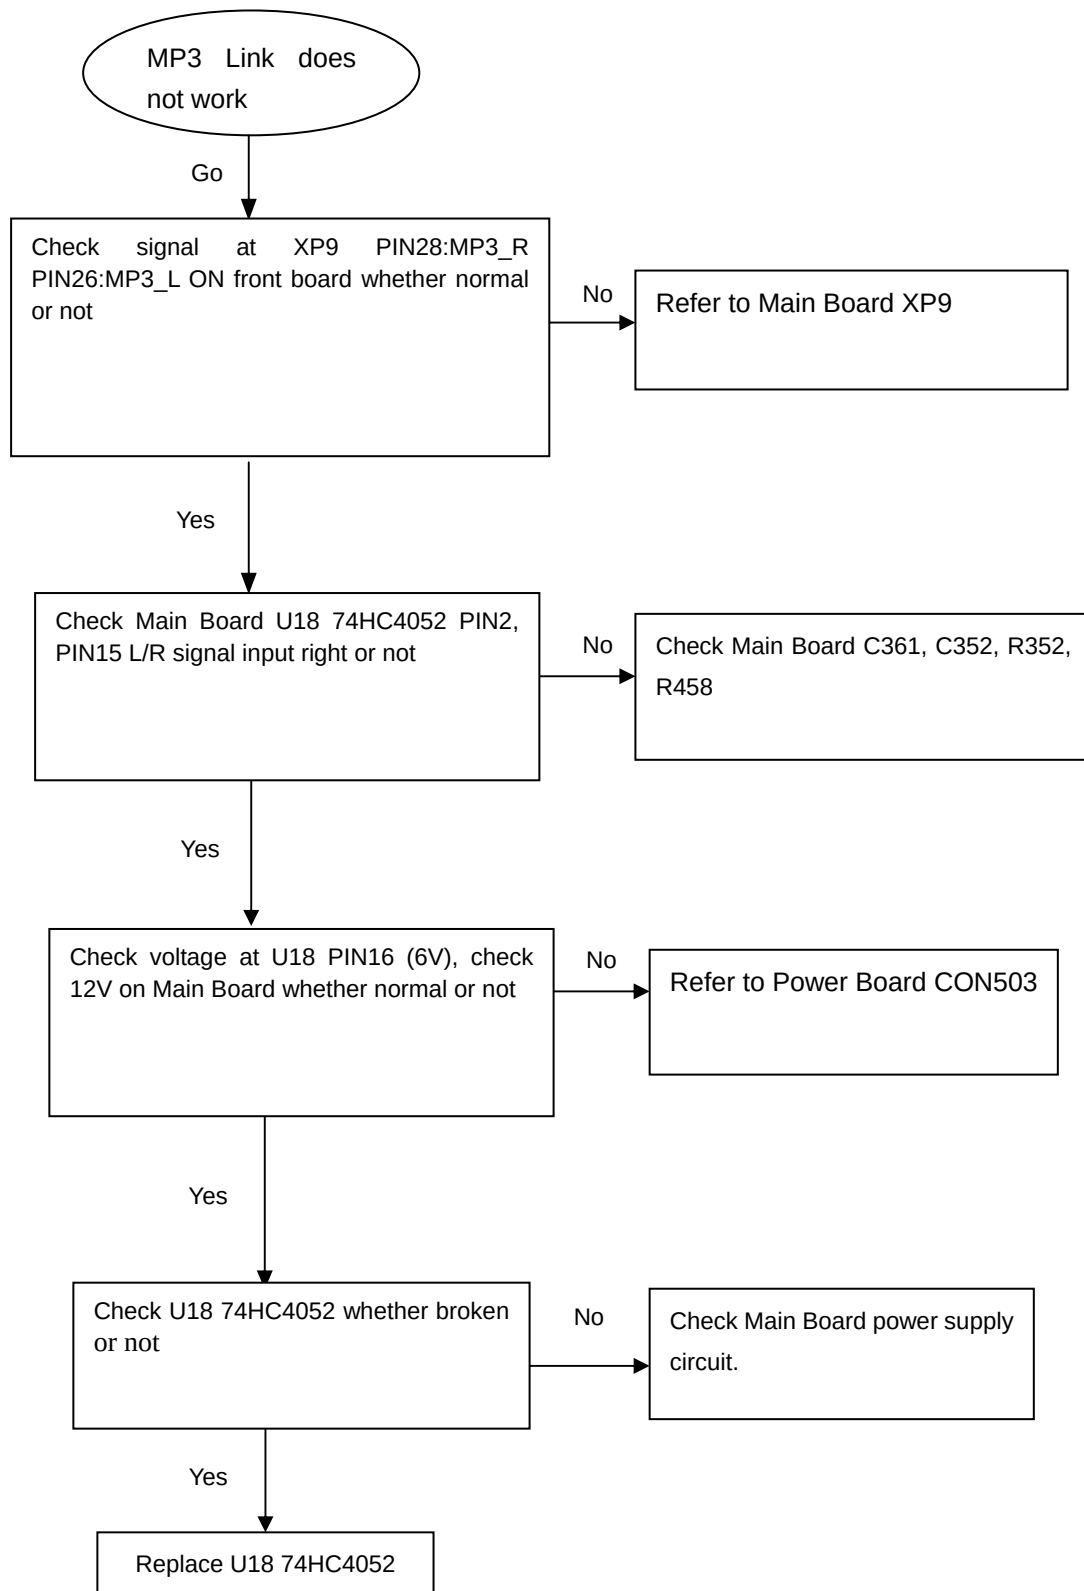MP3 Link does not work

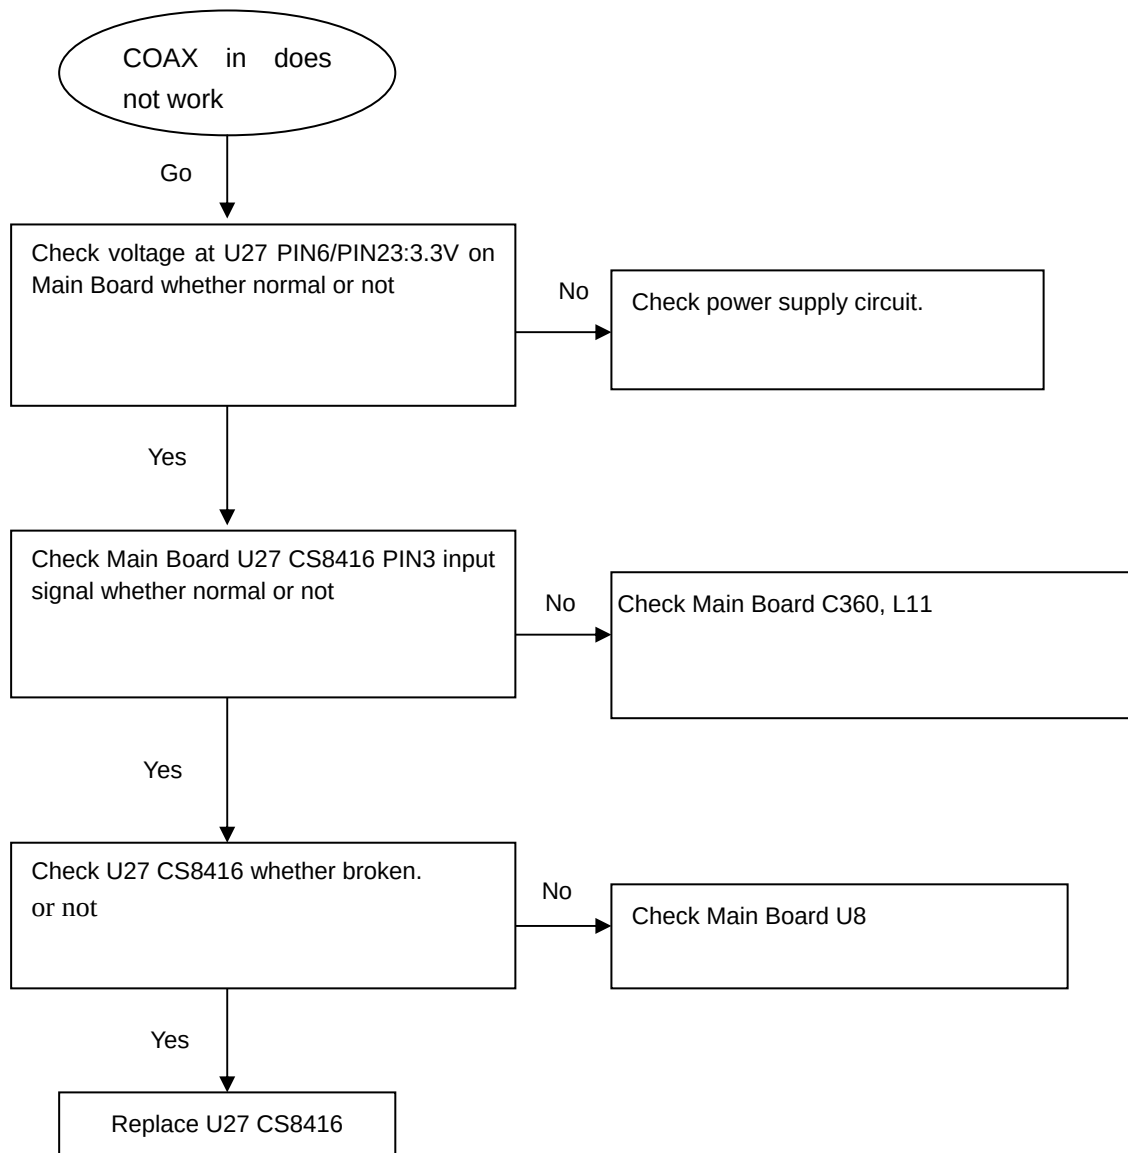COAX in does not work

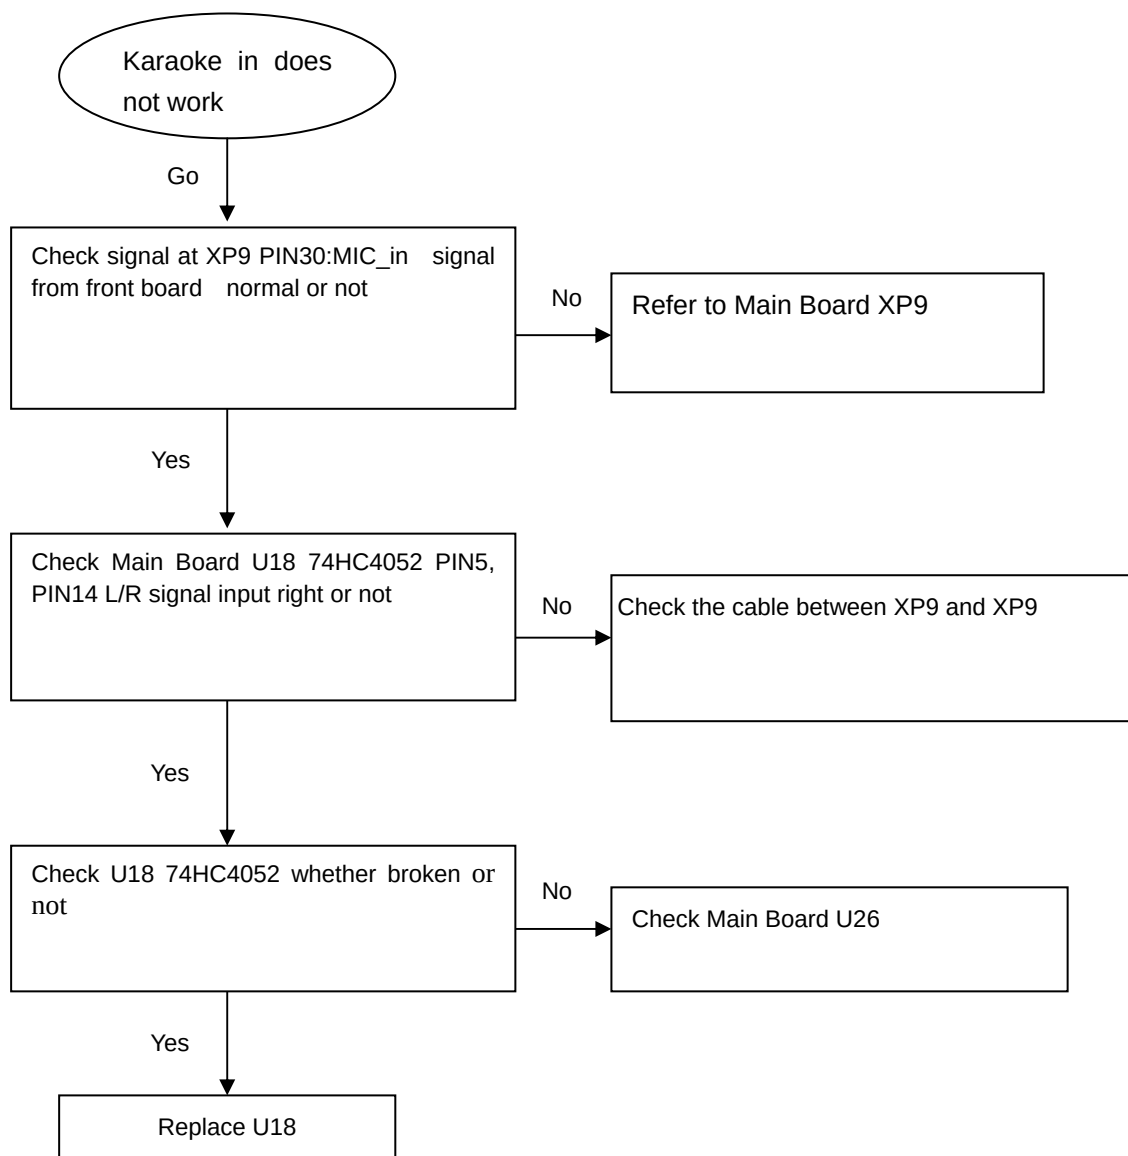Karaoke in does not work

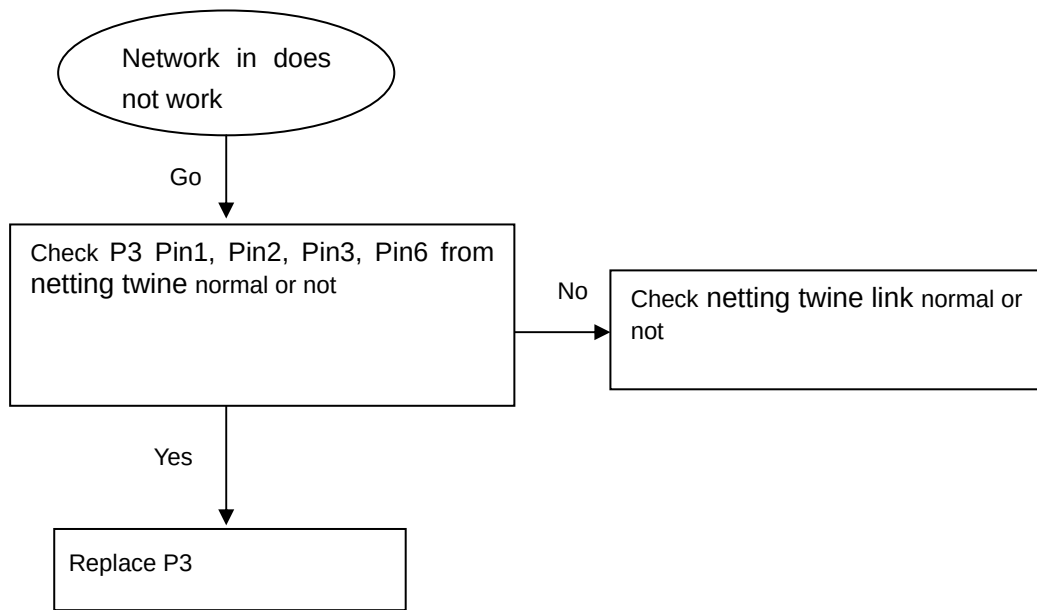Network in does not work

Mechanical and Dismantling Instructions

Dismantling Instruction

Detailed information please refer to the model set.

The following guidelines show how to dismantle the player.

Step 1: Open the front panel. Open the cloth network directly first, then remove 12 shock absorption cushions and 12 screws on the front cover. Open the front panel. (Figure 1)



(Figure 1)

Mechanical and Dismantling Instructions

Dismantling Instruction

Detailed information please refer to the model set.

The following guidelines show how to dismantle the player.

Step 2:Dismantle the NFC board and Touch board.Dismantle these two boards directly.(Figure 2)



(Figure 2)


Step 3:Dismantle the Front Control board.Remove 4 screws on the board,then disconnect connectors (XS1,XS2,XP9).(Figure 3)



(Figure 3)

Step 4:Dismantle the USB & MP3 board. Remove 2 screws on the board and disconnect connectors (XP2,XP3).(Figure 4)

Step 5:Dismantle the OK board(for /51,/98 region). Remove 2 screws on the board.(Figure 4)

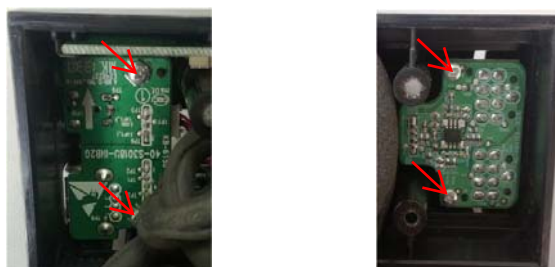

(Figure 4)

Mechanical and Dismantling Instructions

Dismantling Instruction

Detailed information please refer to the model set.



The following guidelines show how to dismantle the player.

Step 6:Dismantle the Loader.Rive off 4 rubber pads on the plastic feet and then remove 16 screws on the two matel bottom covers.Open the cover on right side.Disconnect connectors(XP7,J11,J12). Open the cover on middle.(Figure 5)

Step 7:Dismantle the Power board.Remove 4 screws on the board and disconnect connectors(CN501, CN503).Then pull up the board.(Figure 5)


Step 8:Dismantle the Amplifier board.Remove 4 screws on the board and disconnect connectors(XP8, XP5,XP6,XP4,XS2).Then pull up the board.(Figure 5)

Step 9:Dismantle the Main board.Remove 3 screws on the board and 3 screws on back panel.Disconnect connectors(XP9,XP6).Then pull up the board.(Figure 5)

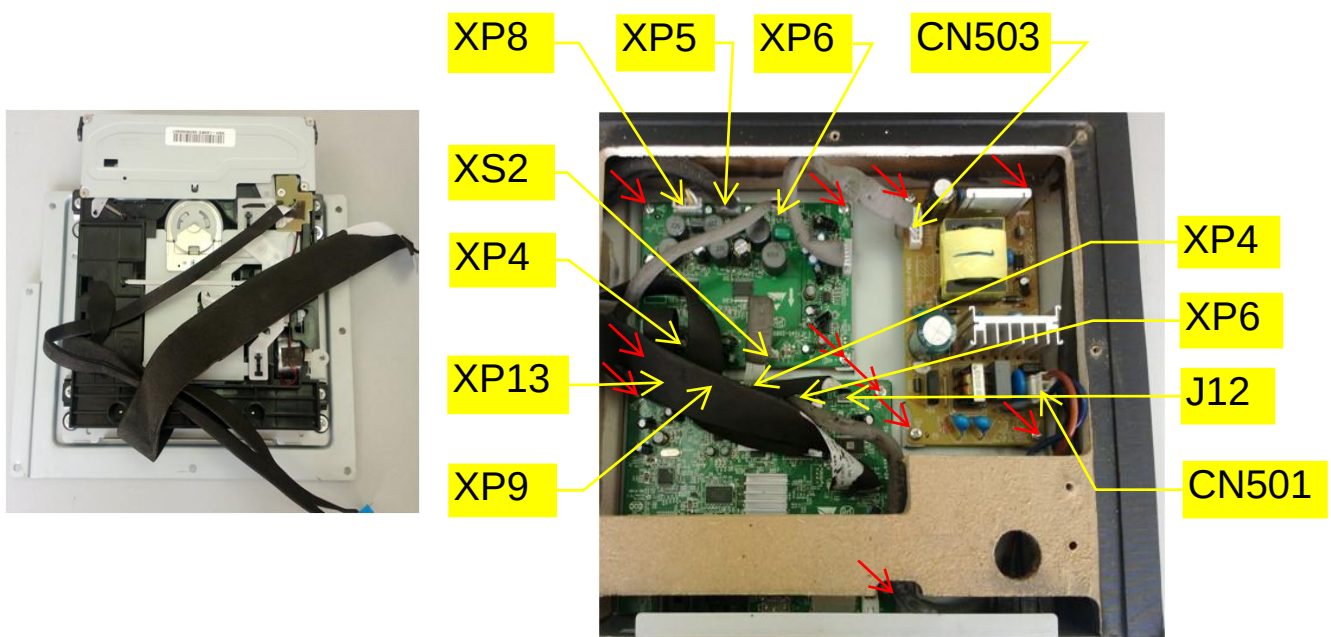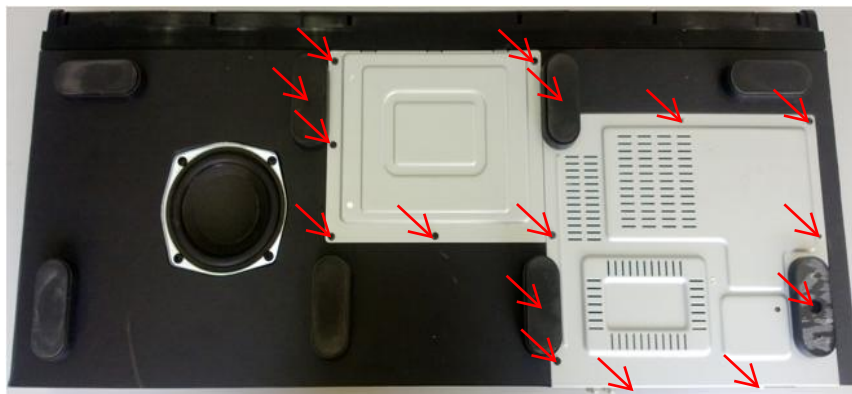


(Figure 5)


Wiring and Block Diagram for HTB4150B/HTB4152B

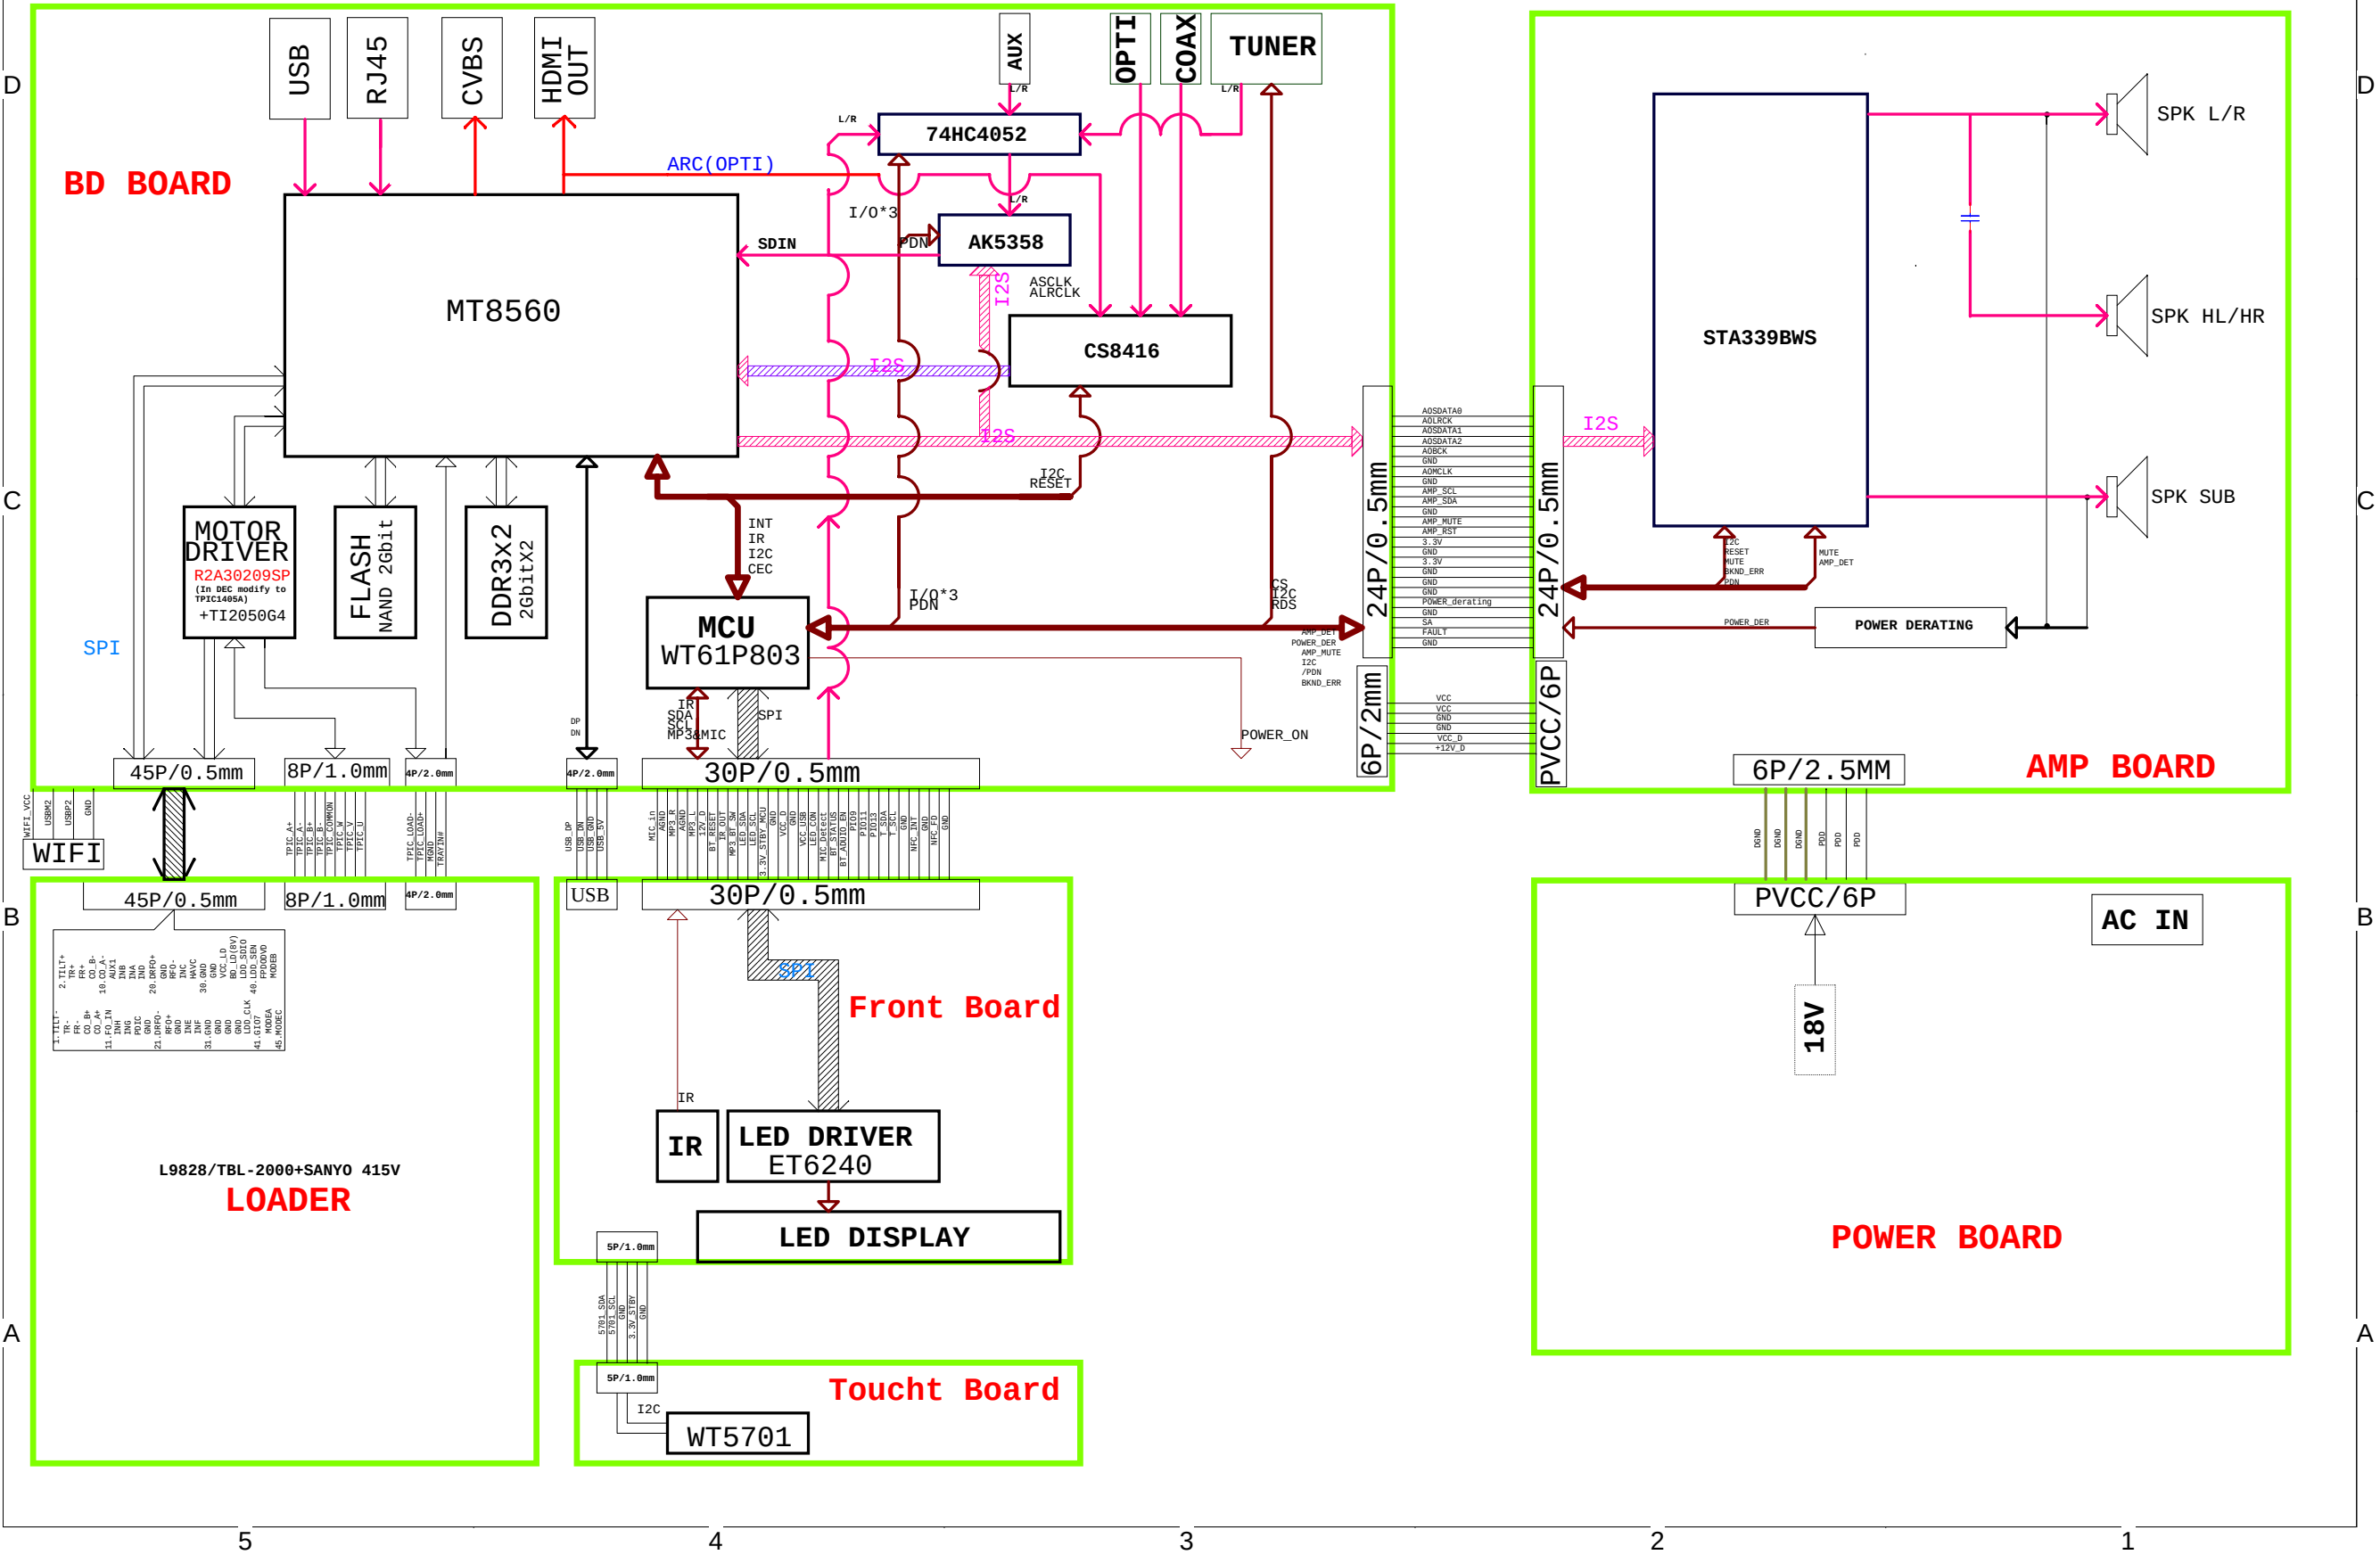


OK Board Circuit Diagram:

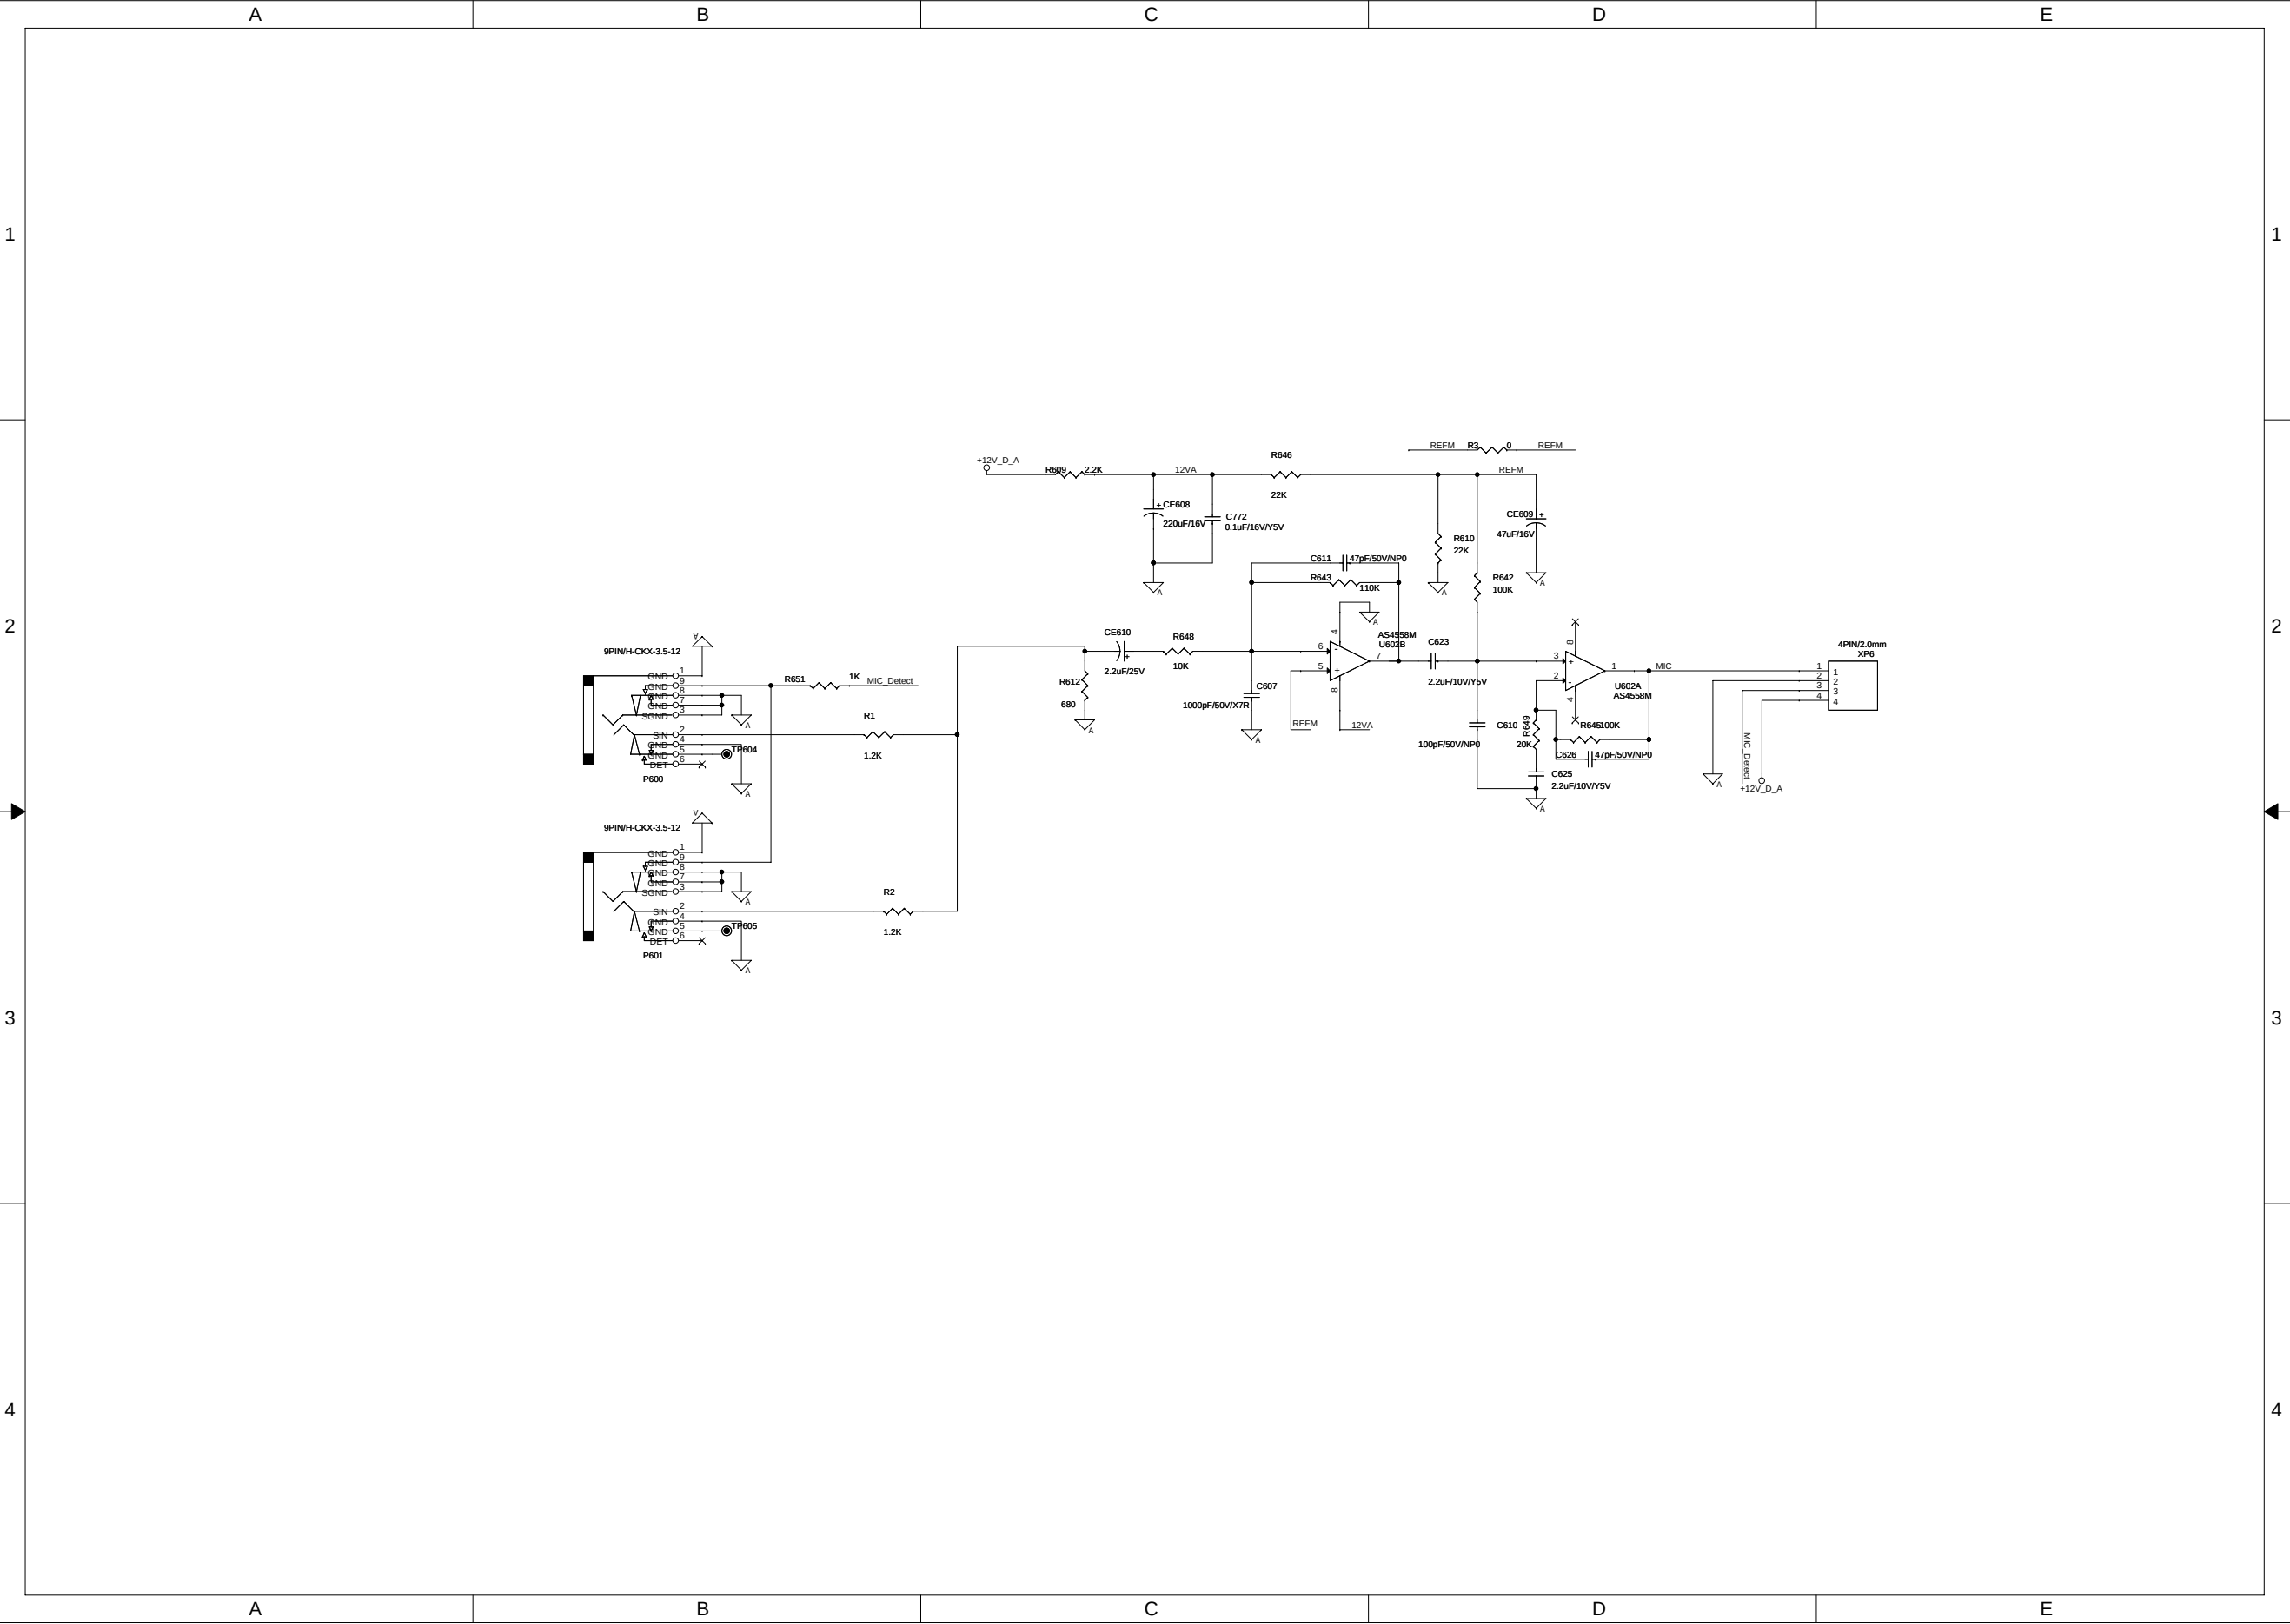


USB & MP3 Board Circuit Diagram:

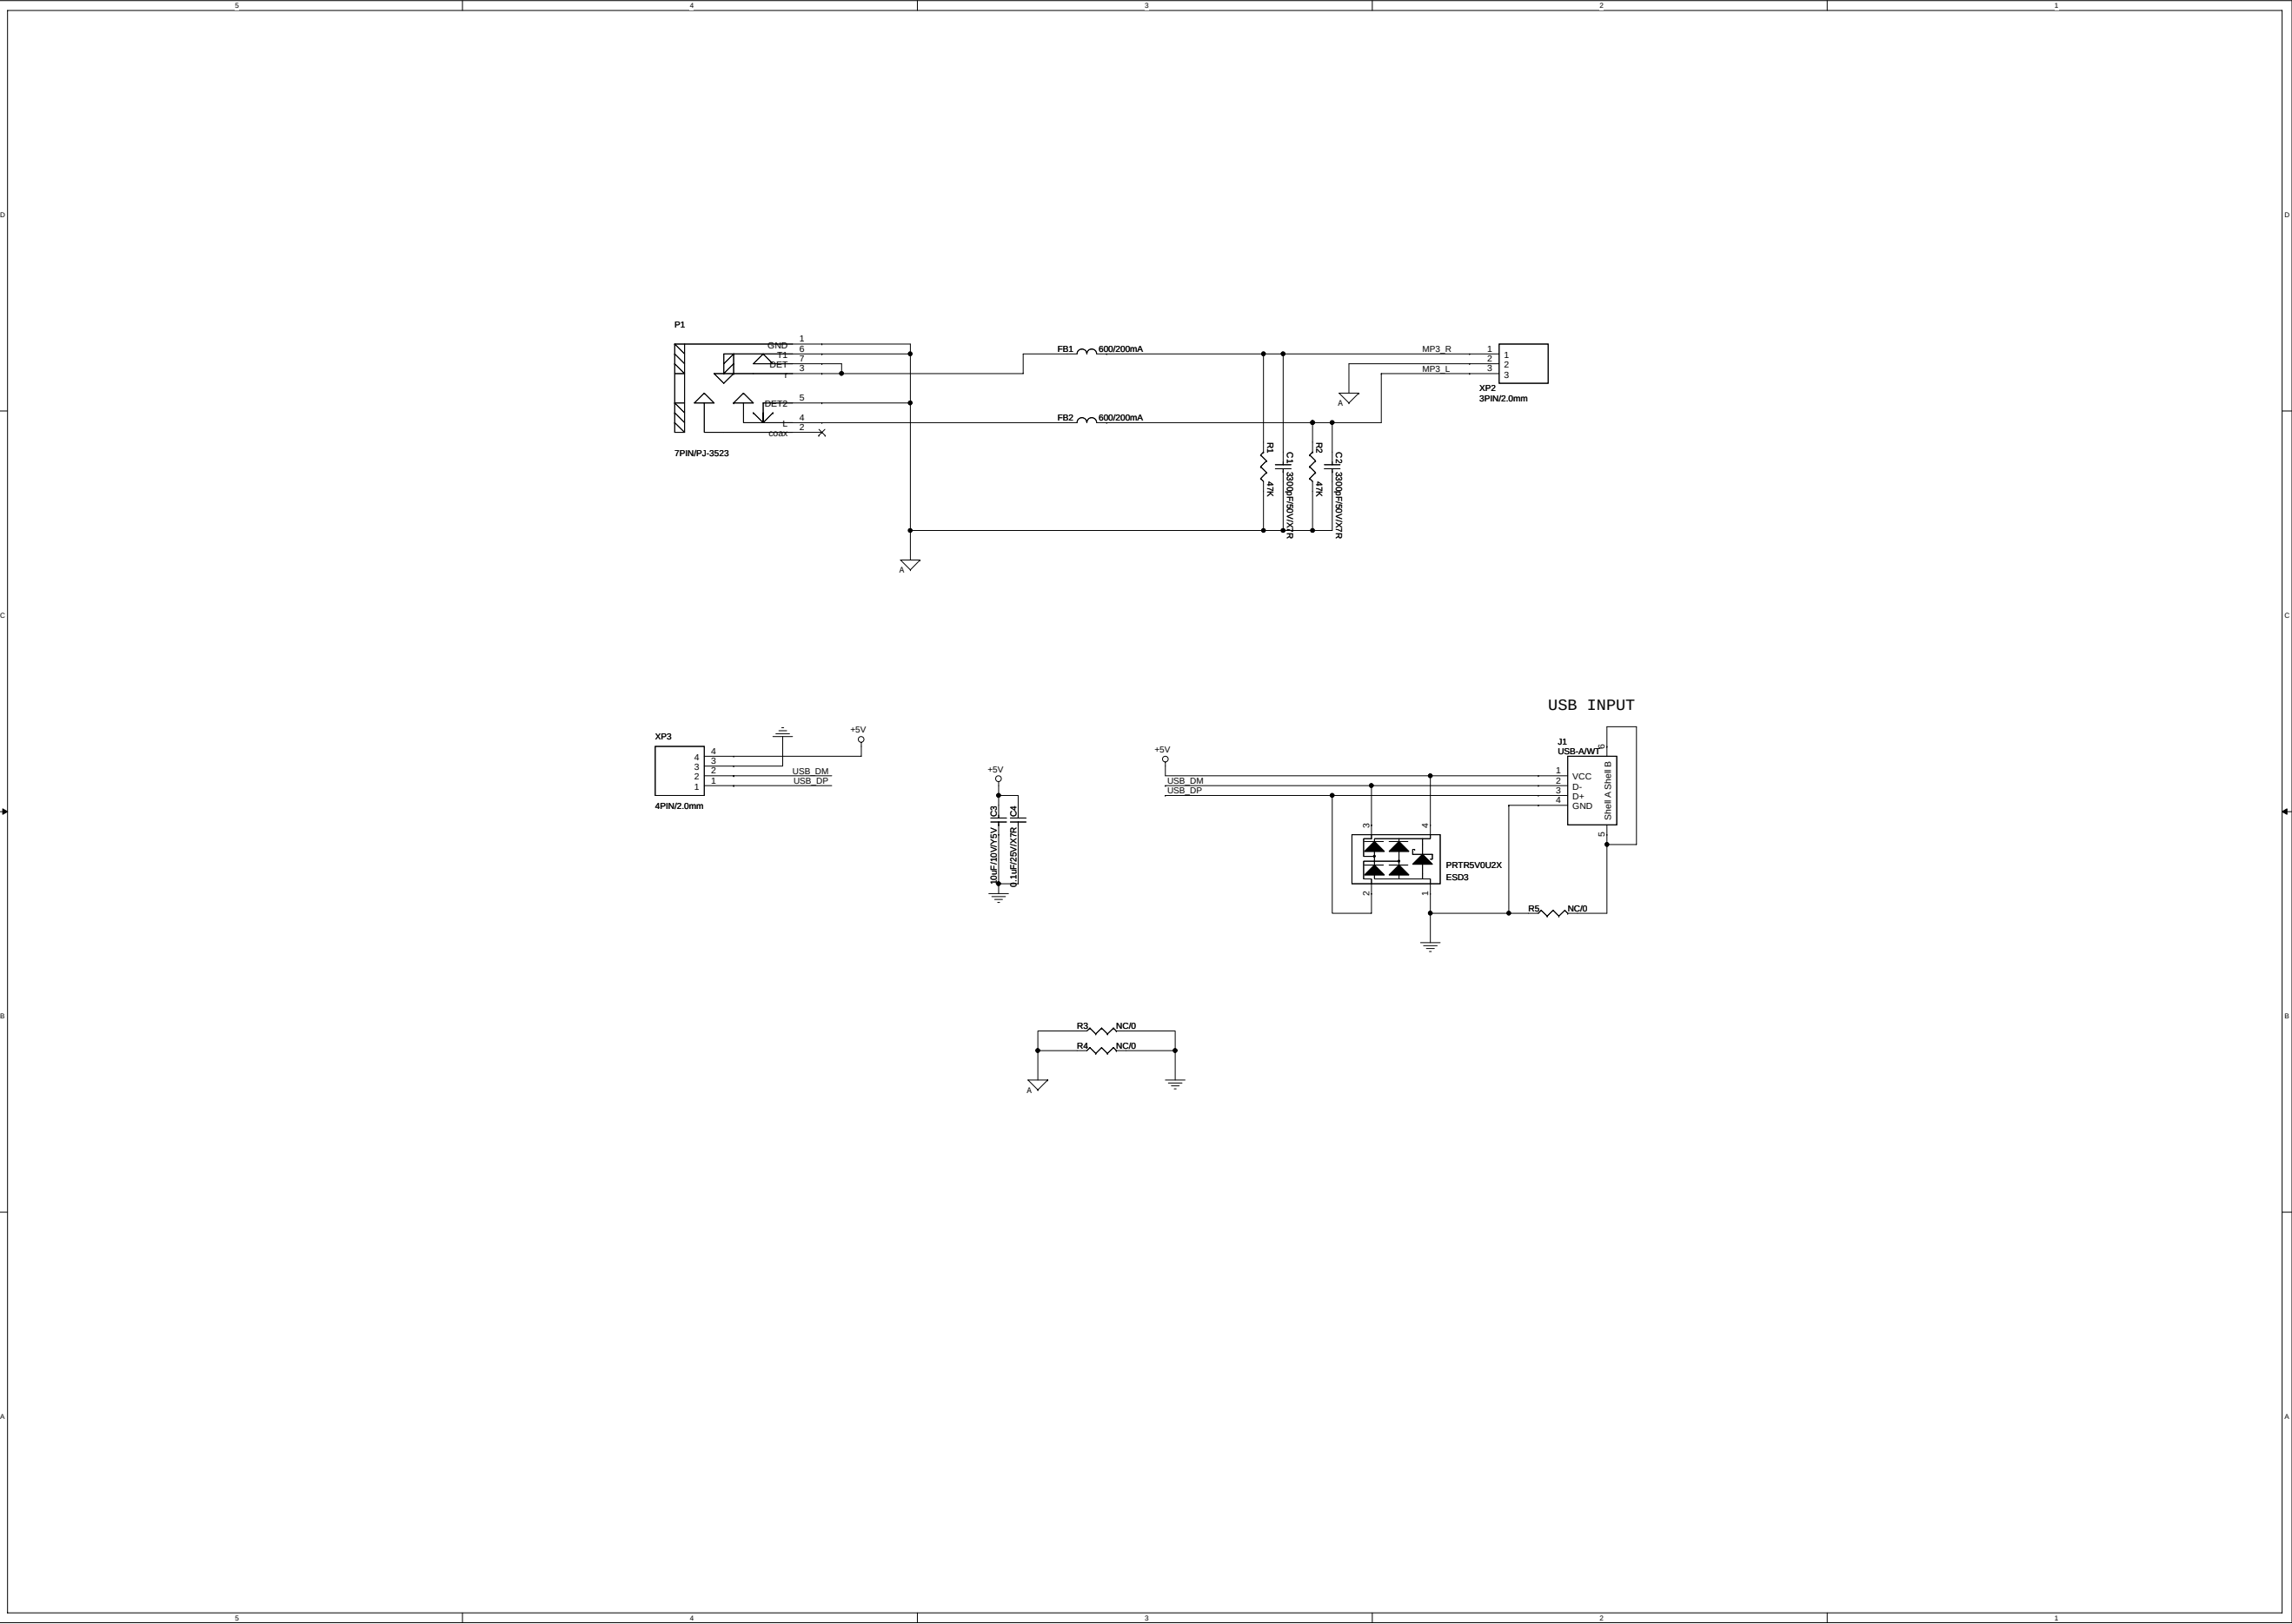


Touch Board Circuit Diagram:

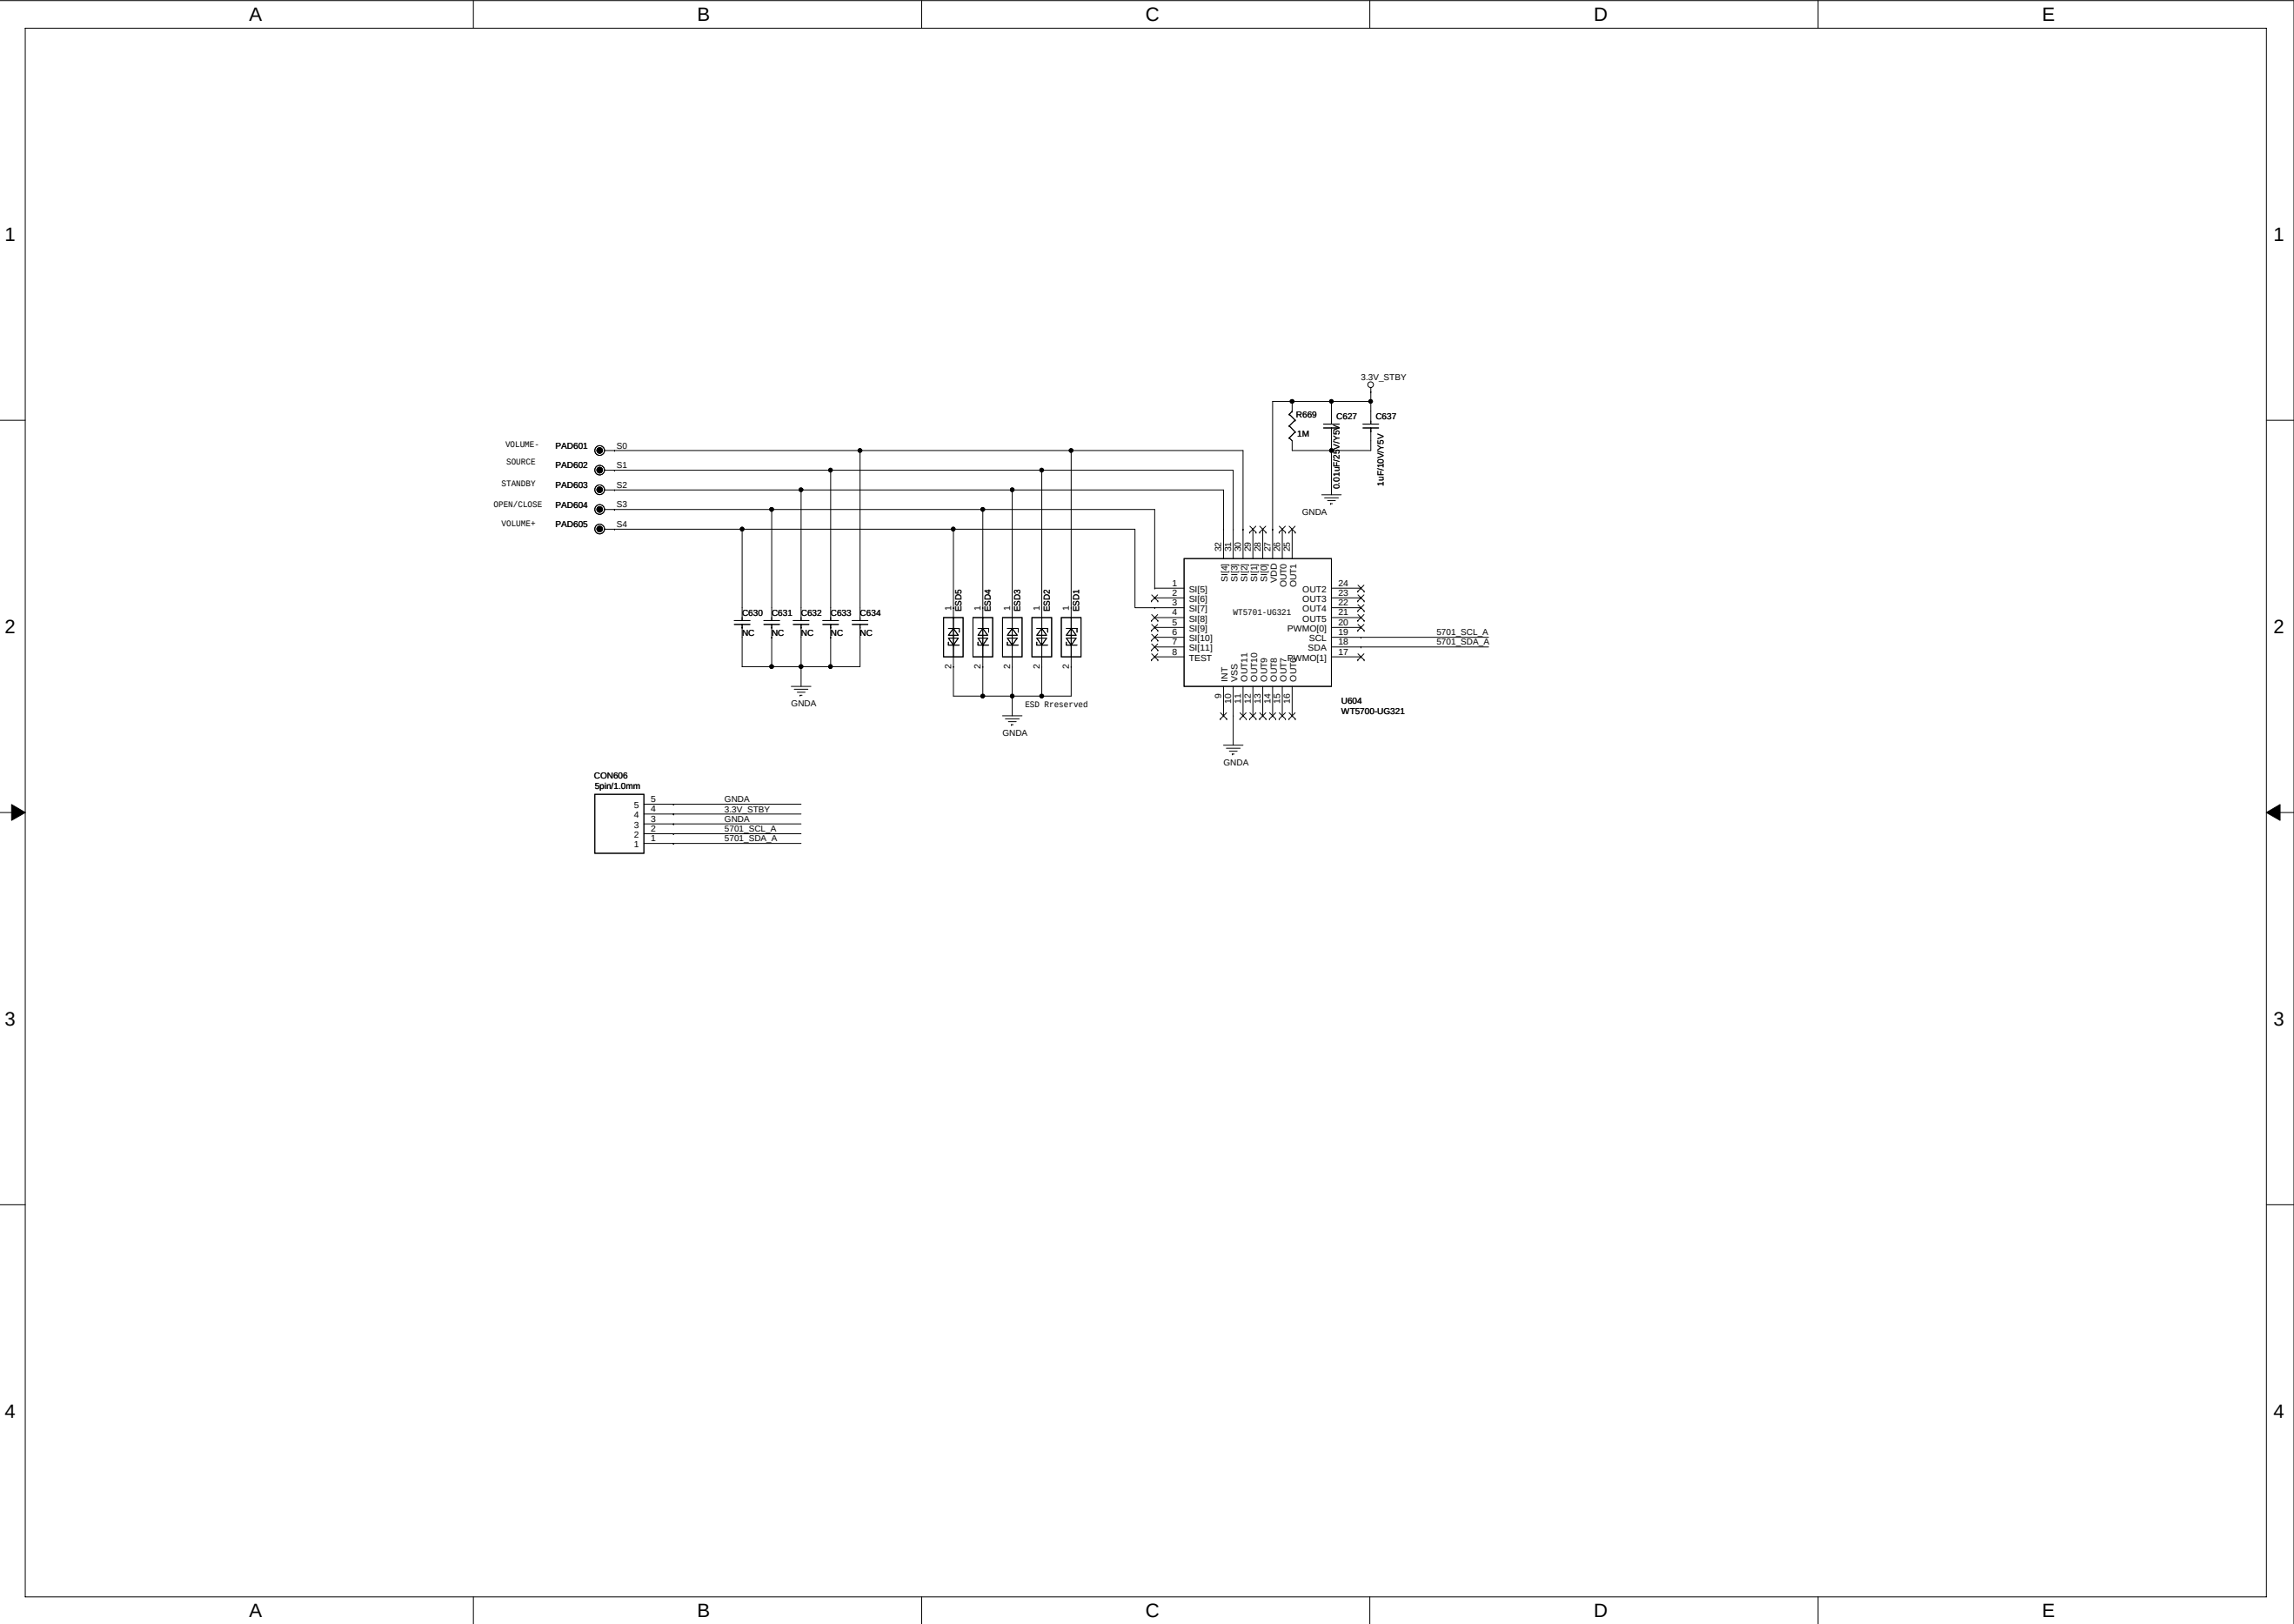


Front Control Board Circuit Diagram:VFD

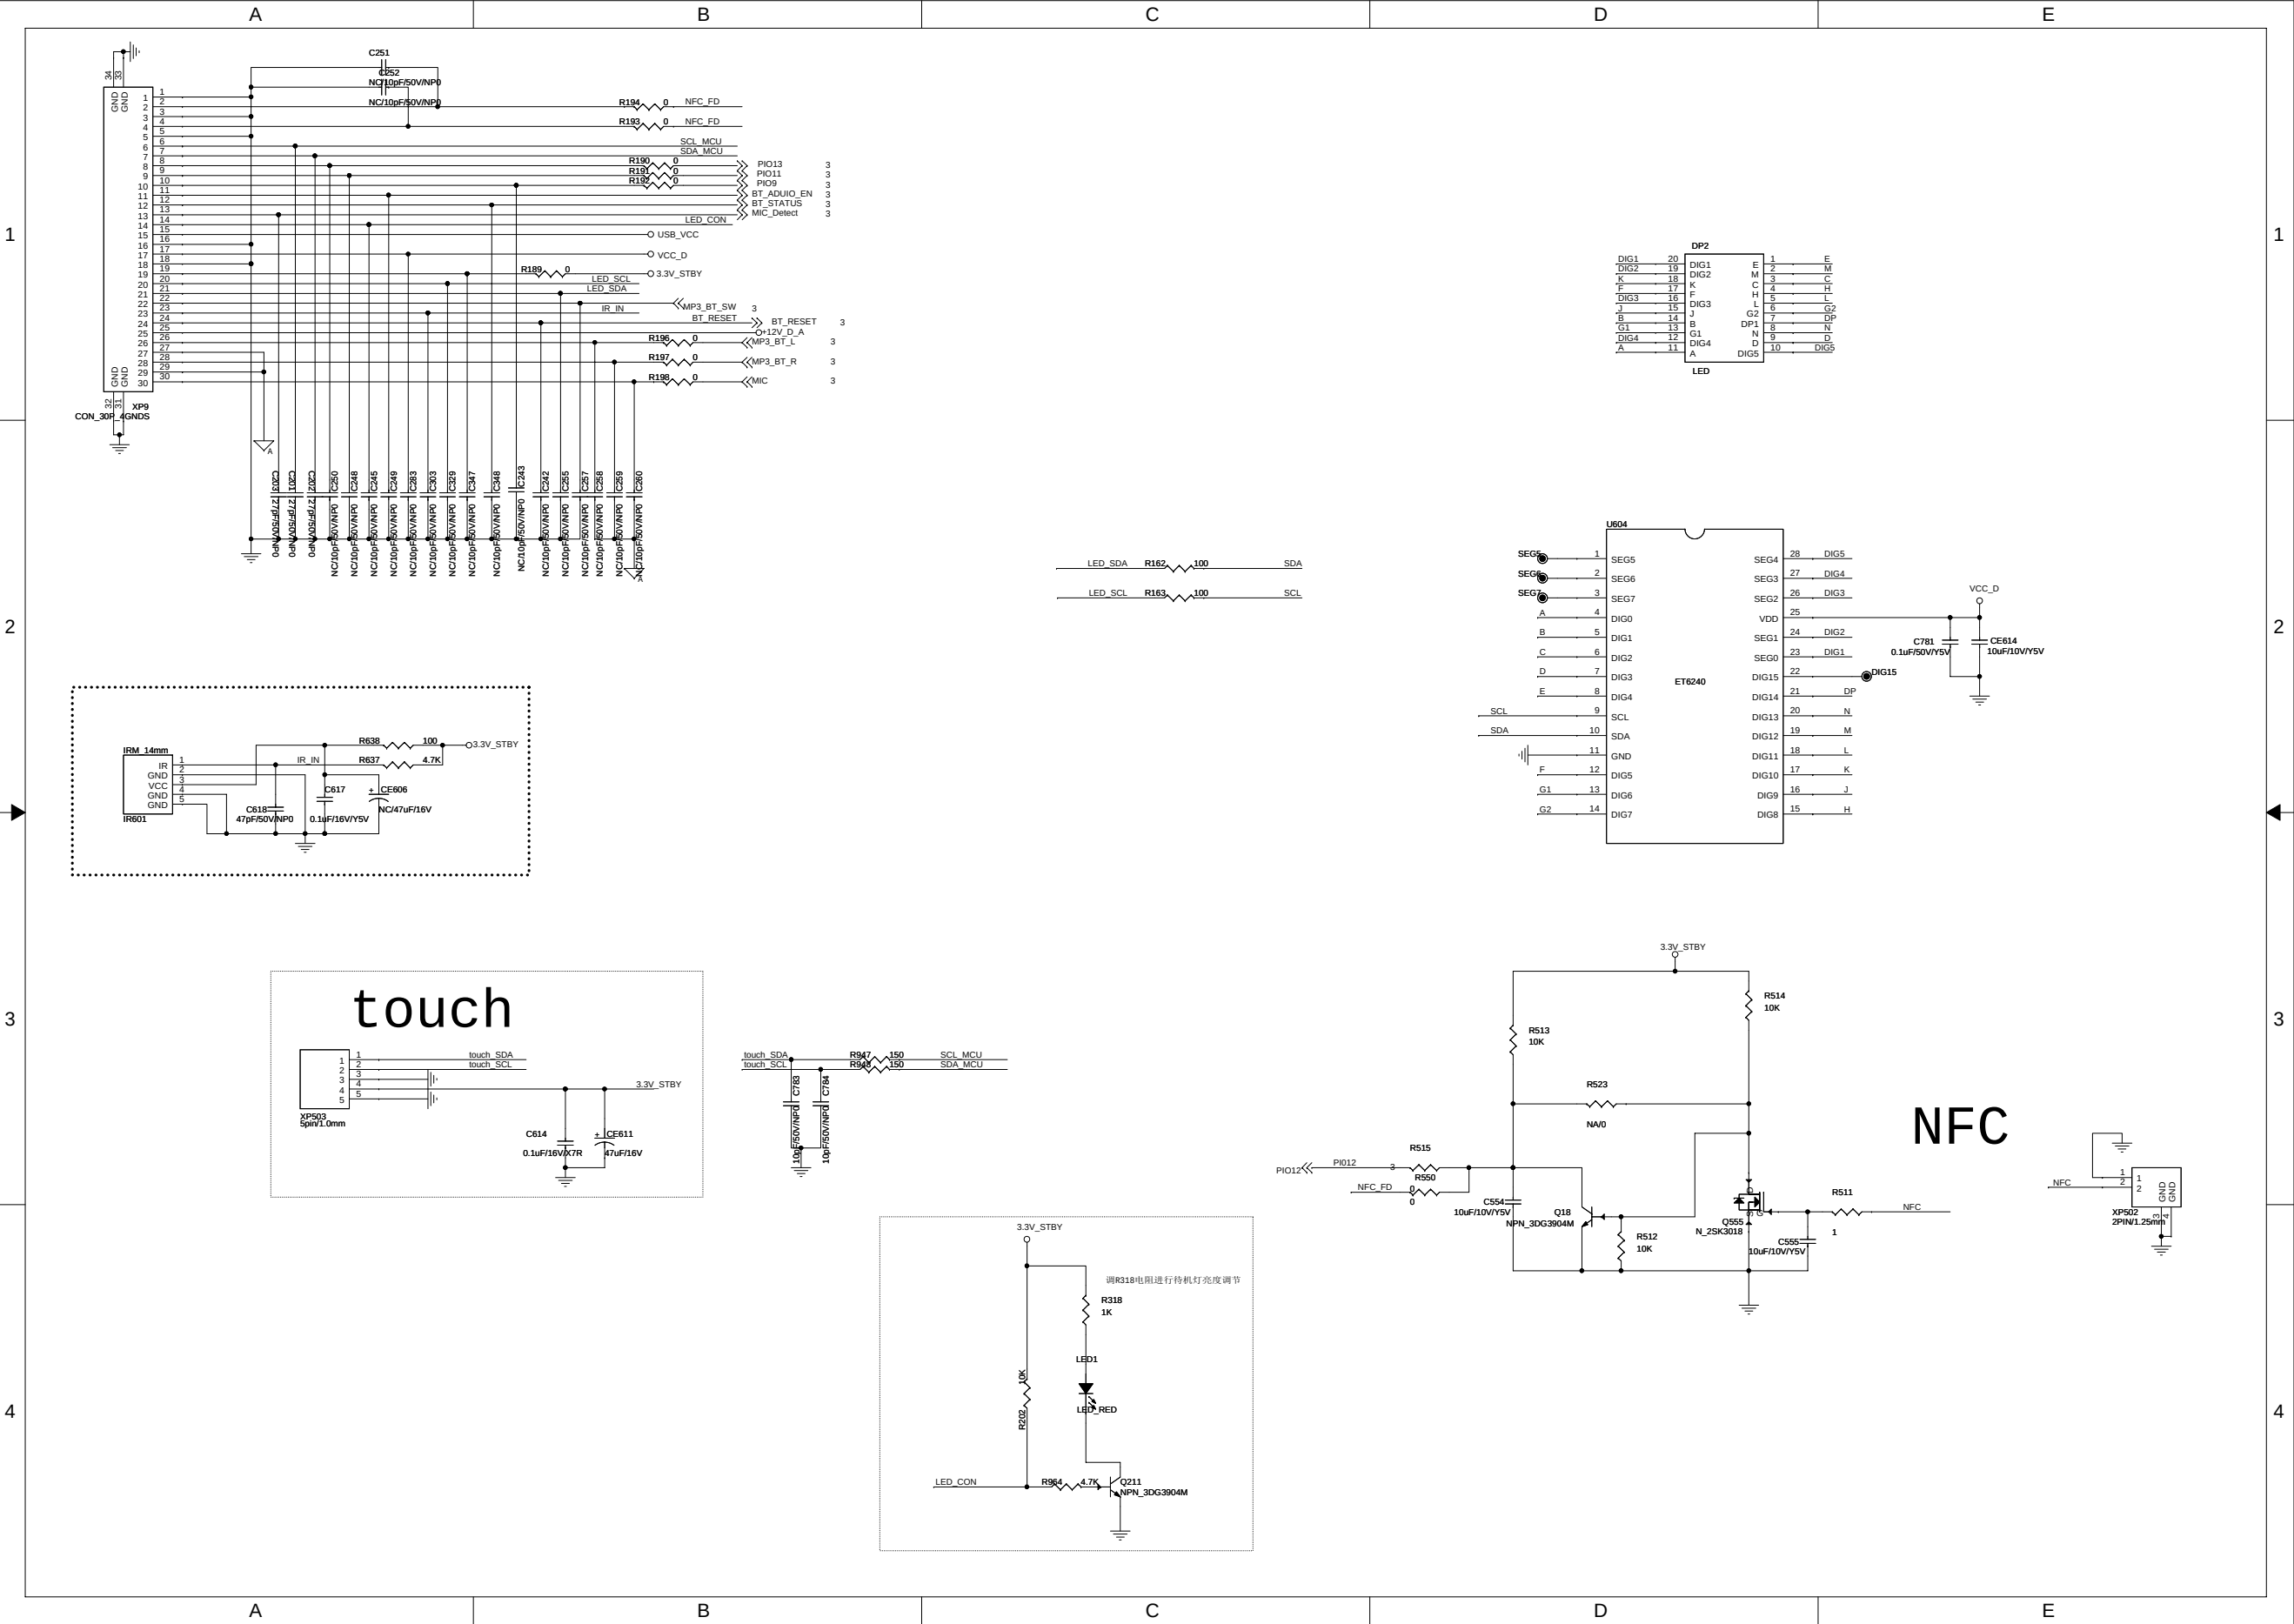


Front Control Board Circuit Diagram:NFC

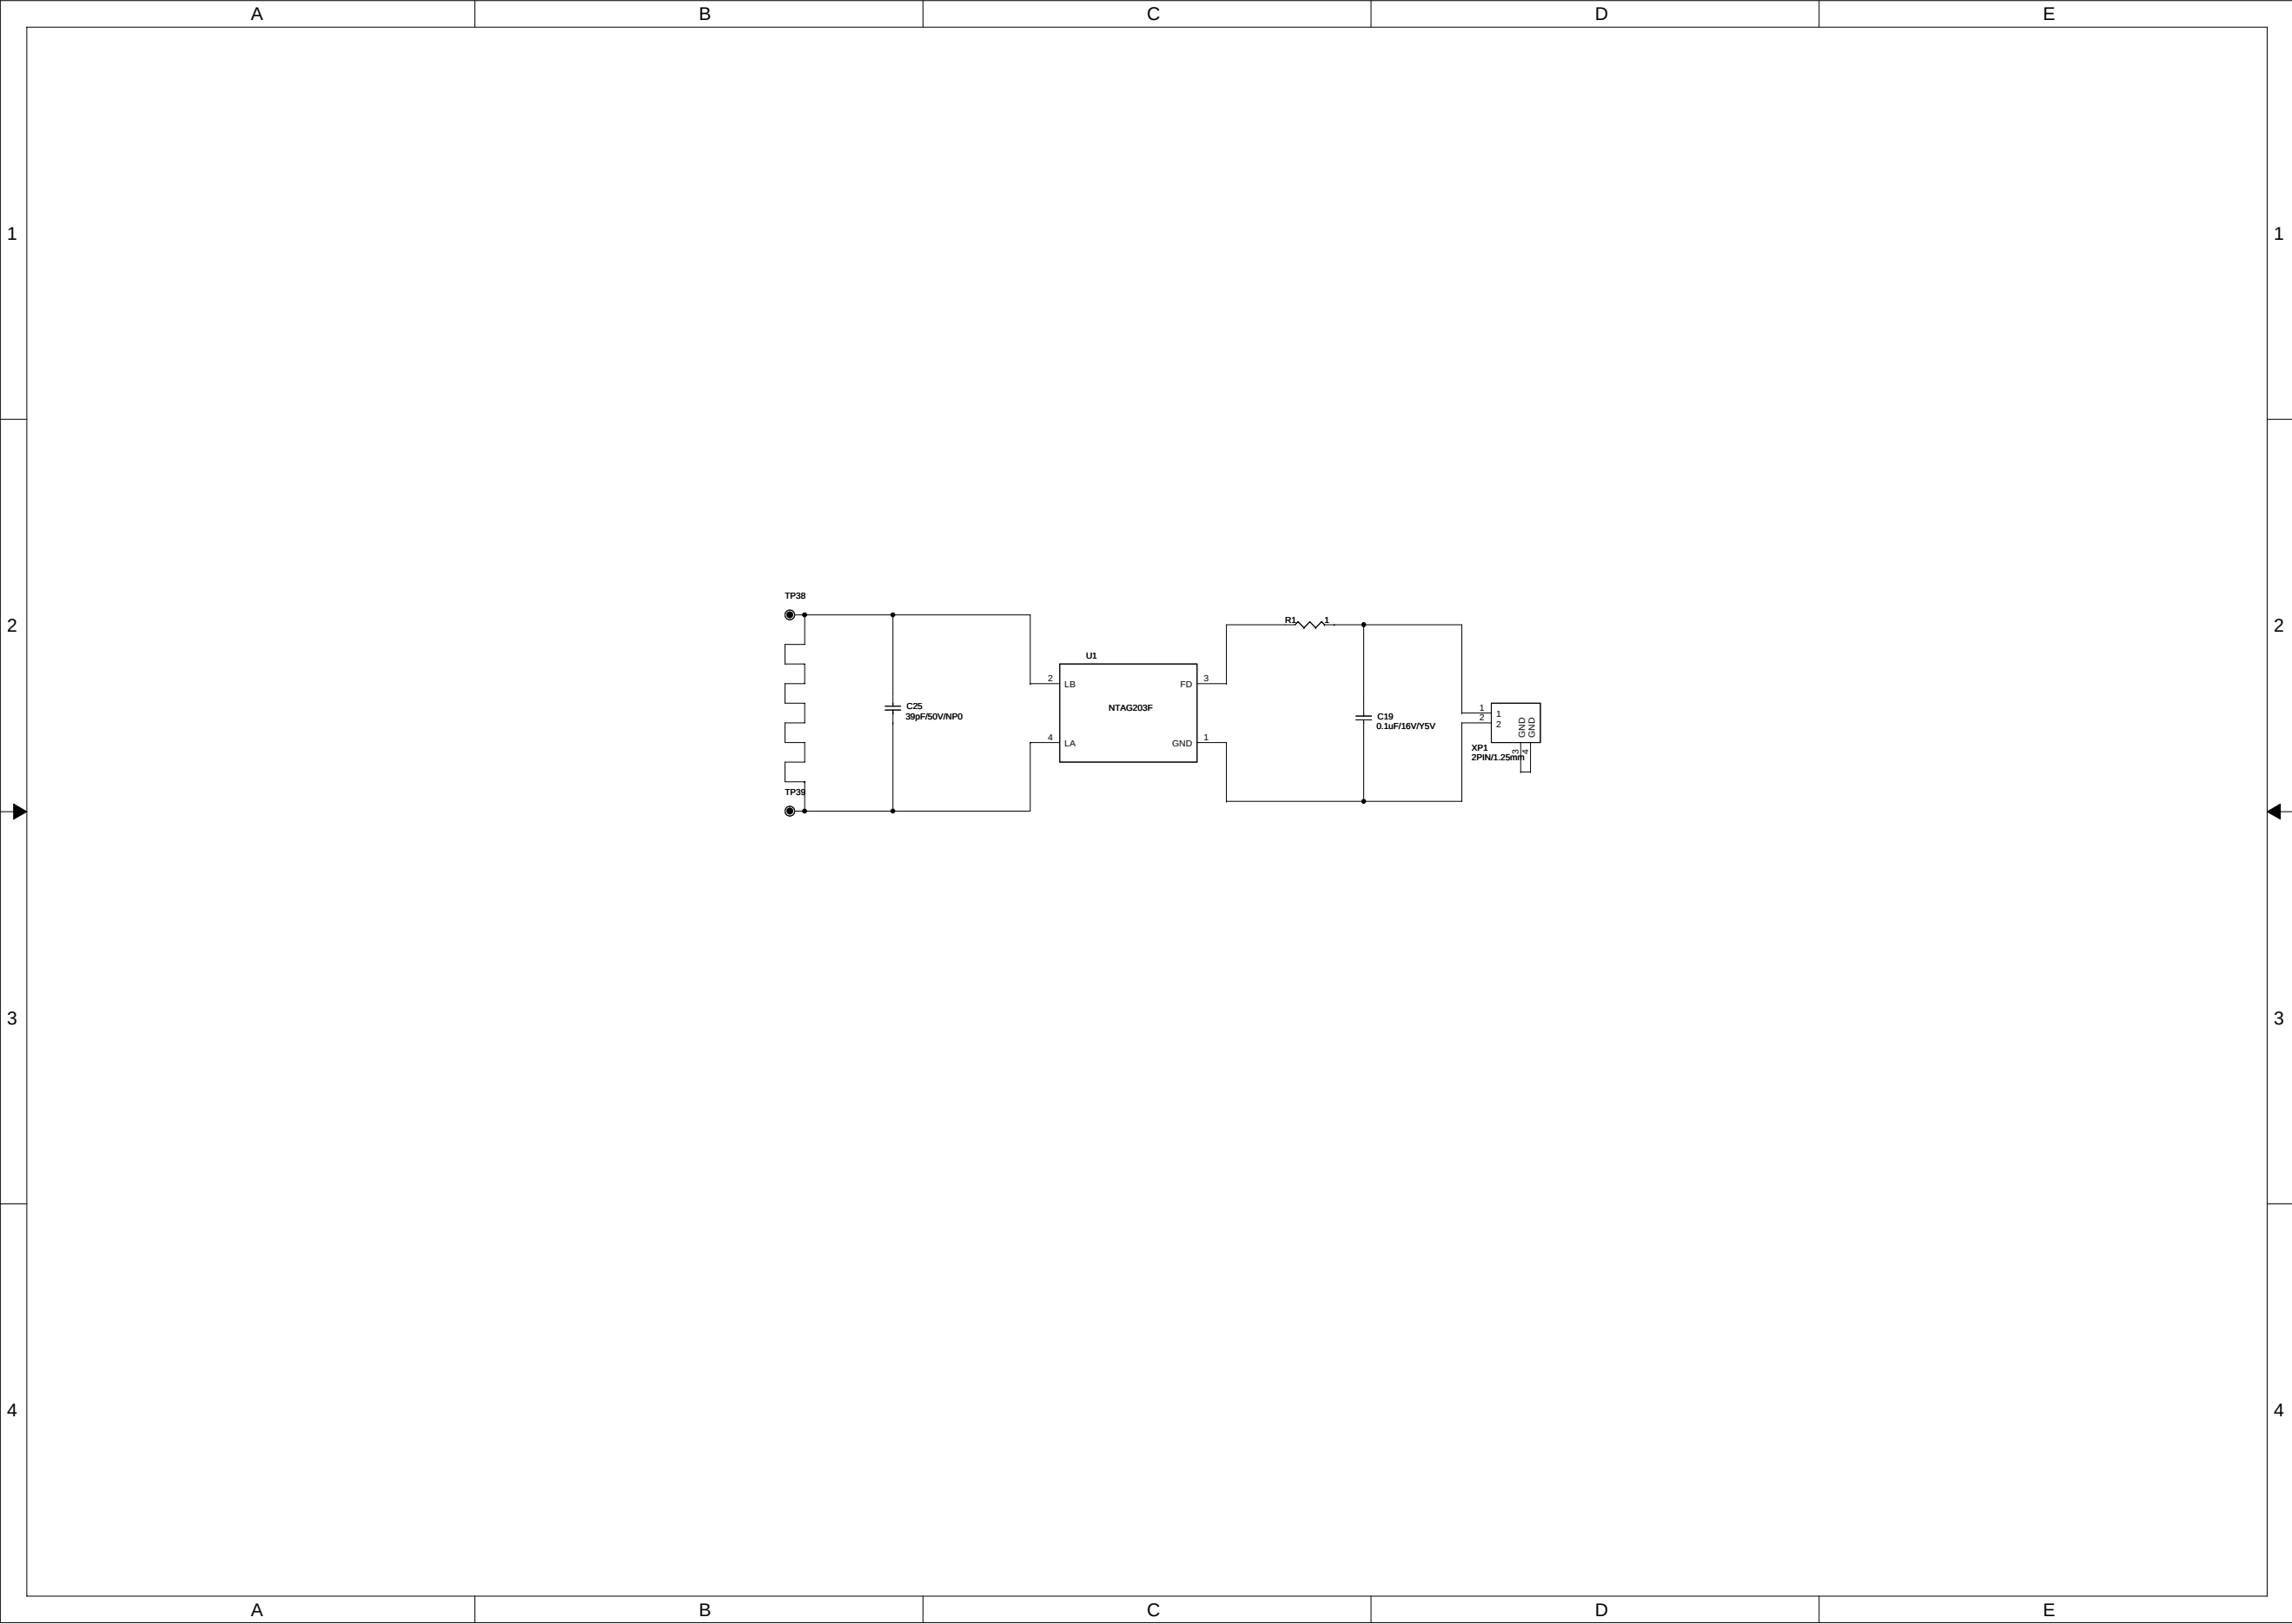


Power Board Circuit Diagram:

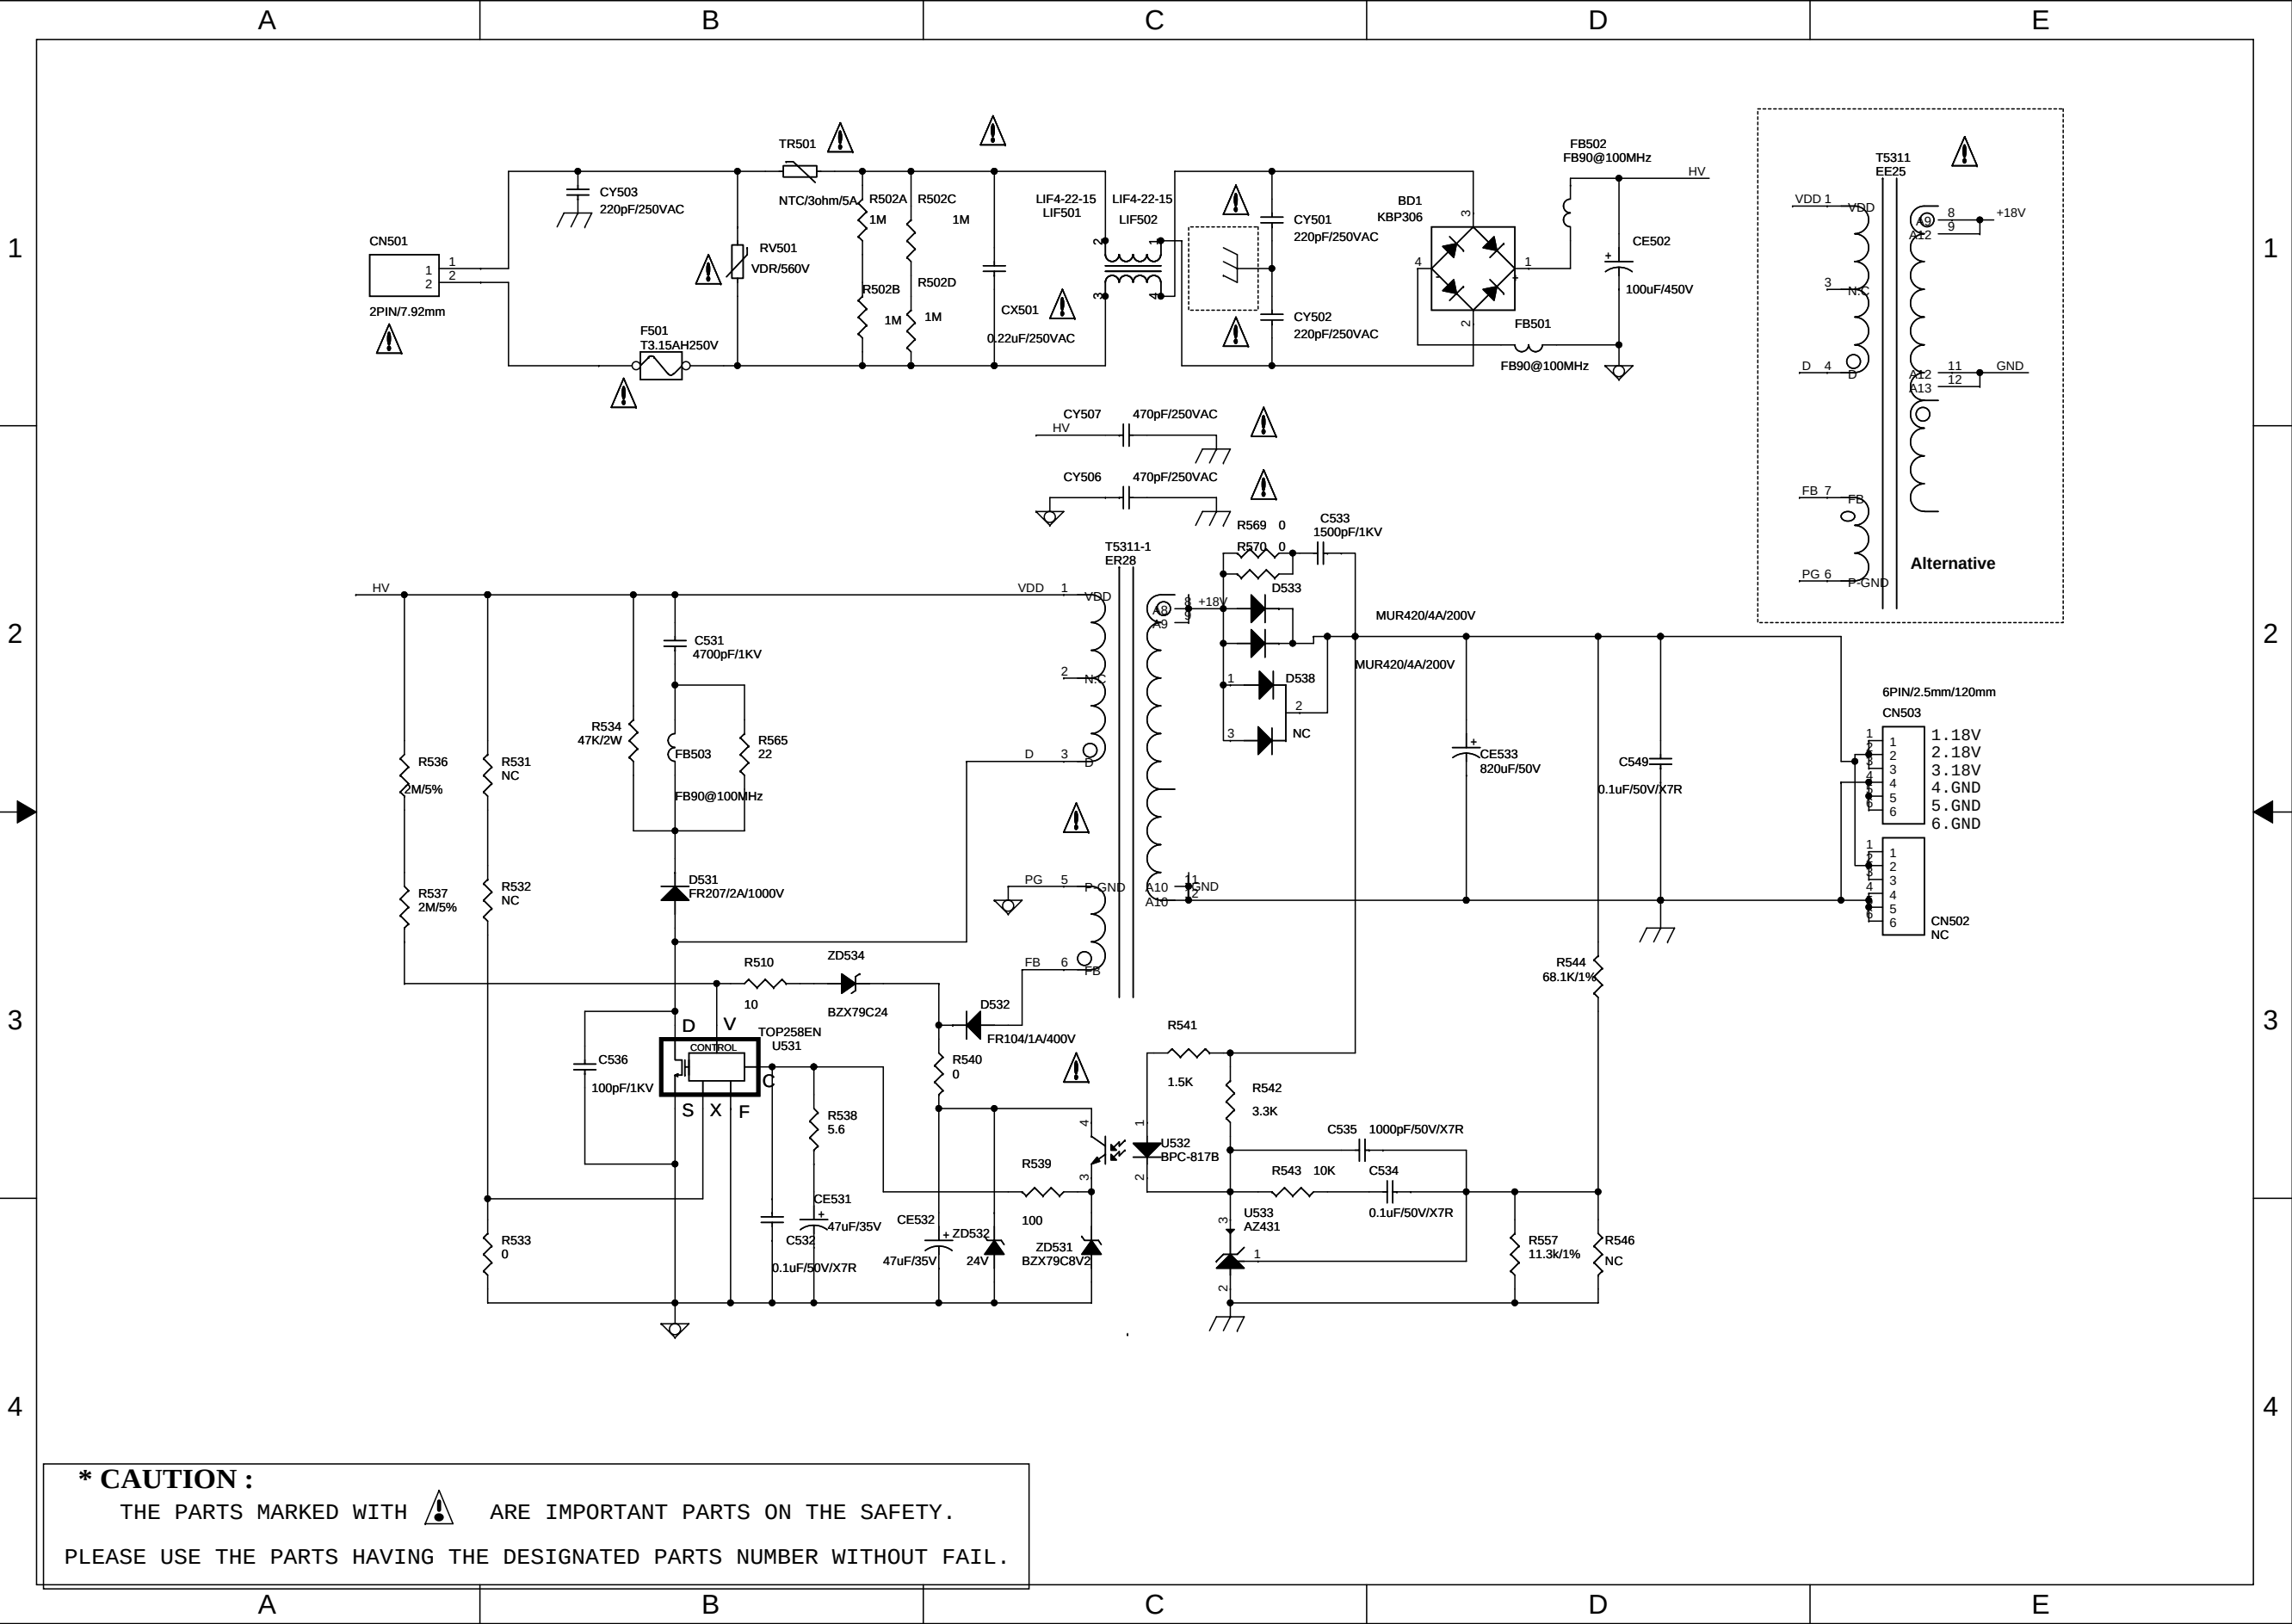


Amplifier Board Circuit Diagram:Power

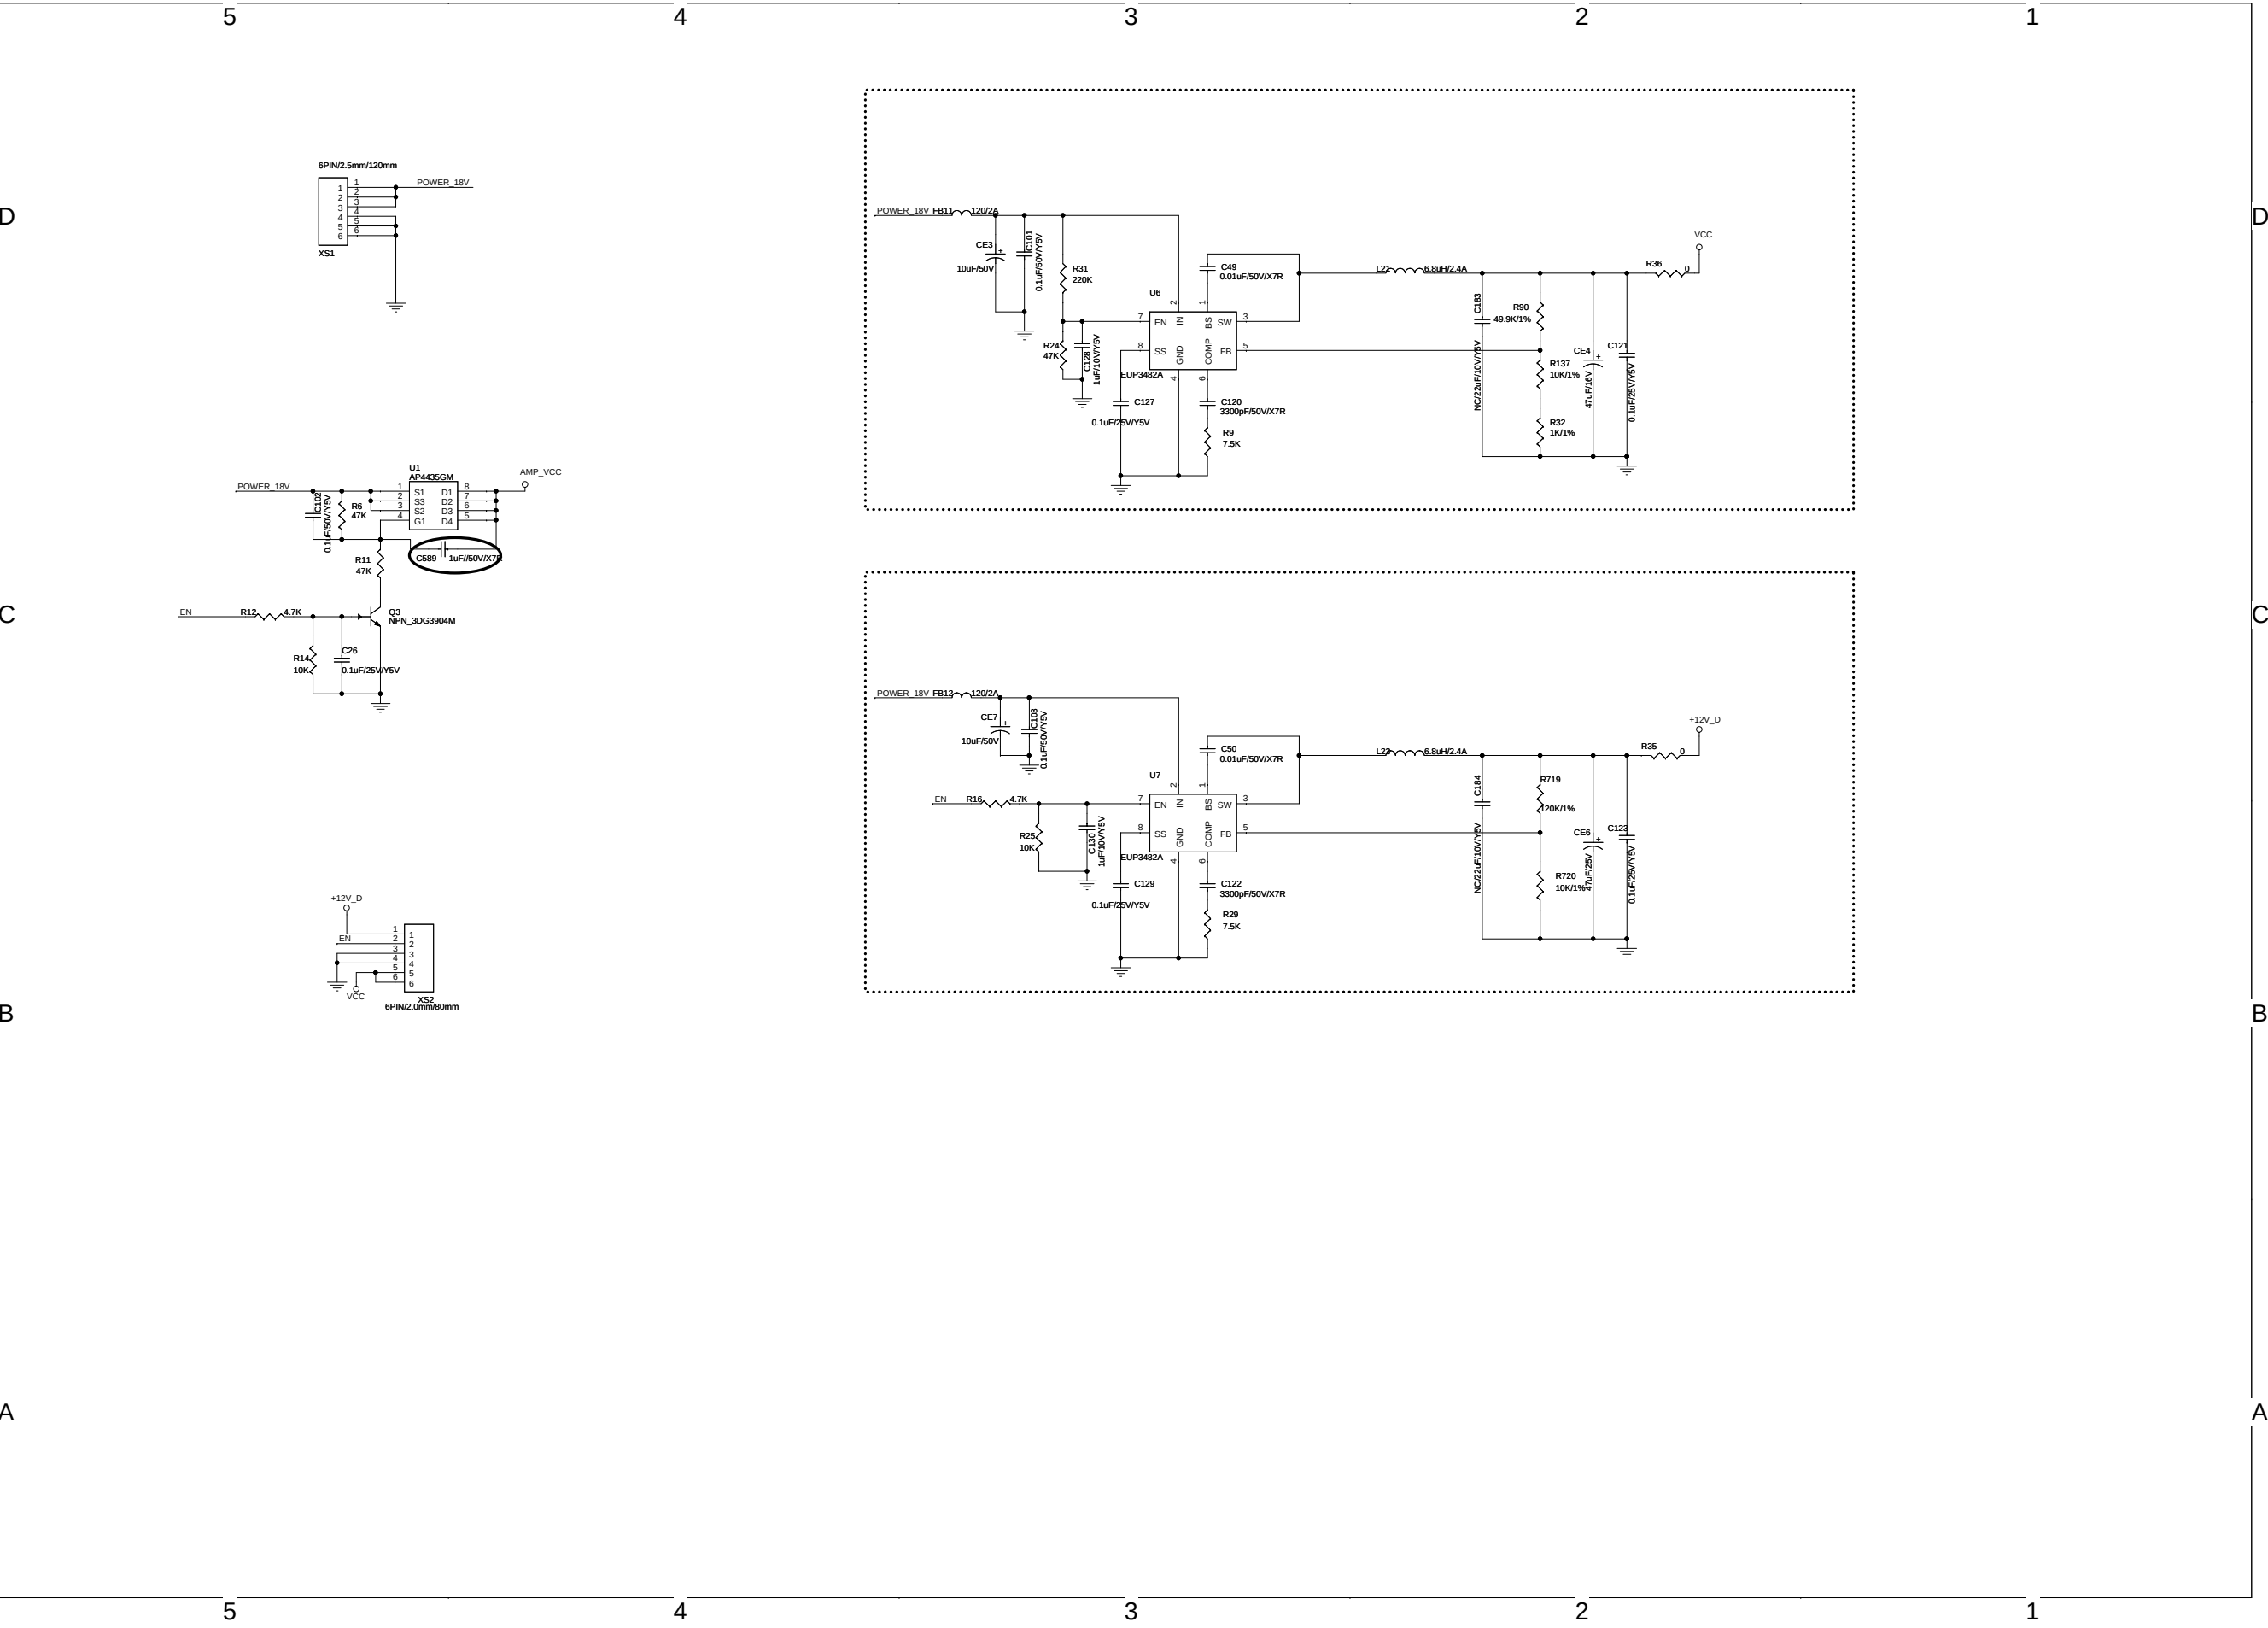



Amplifier Board Circuit Diagram:AMP

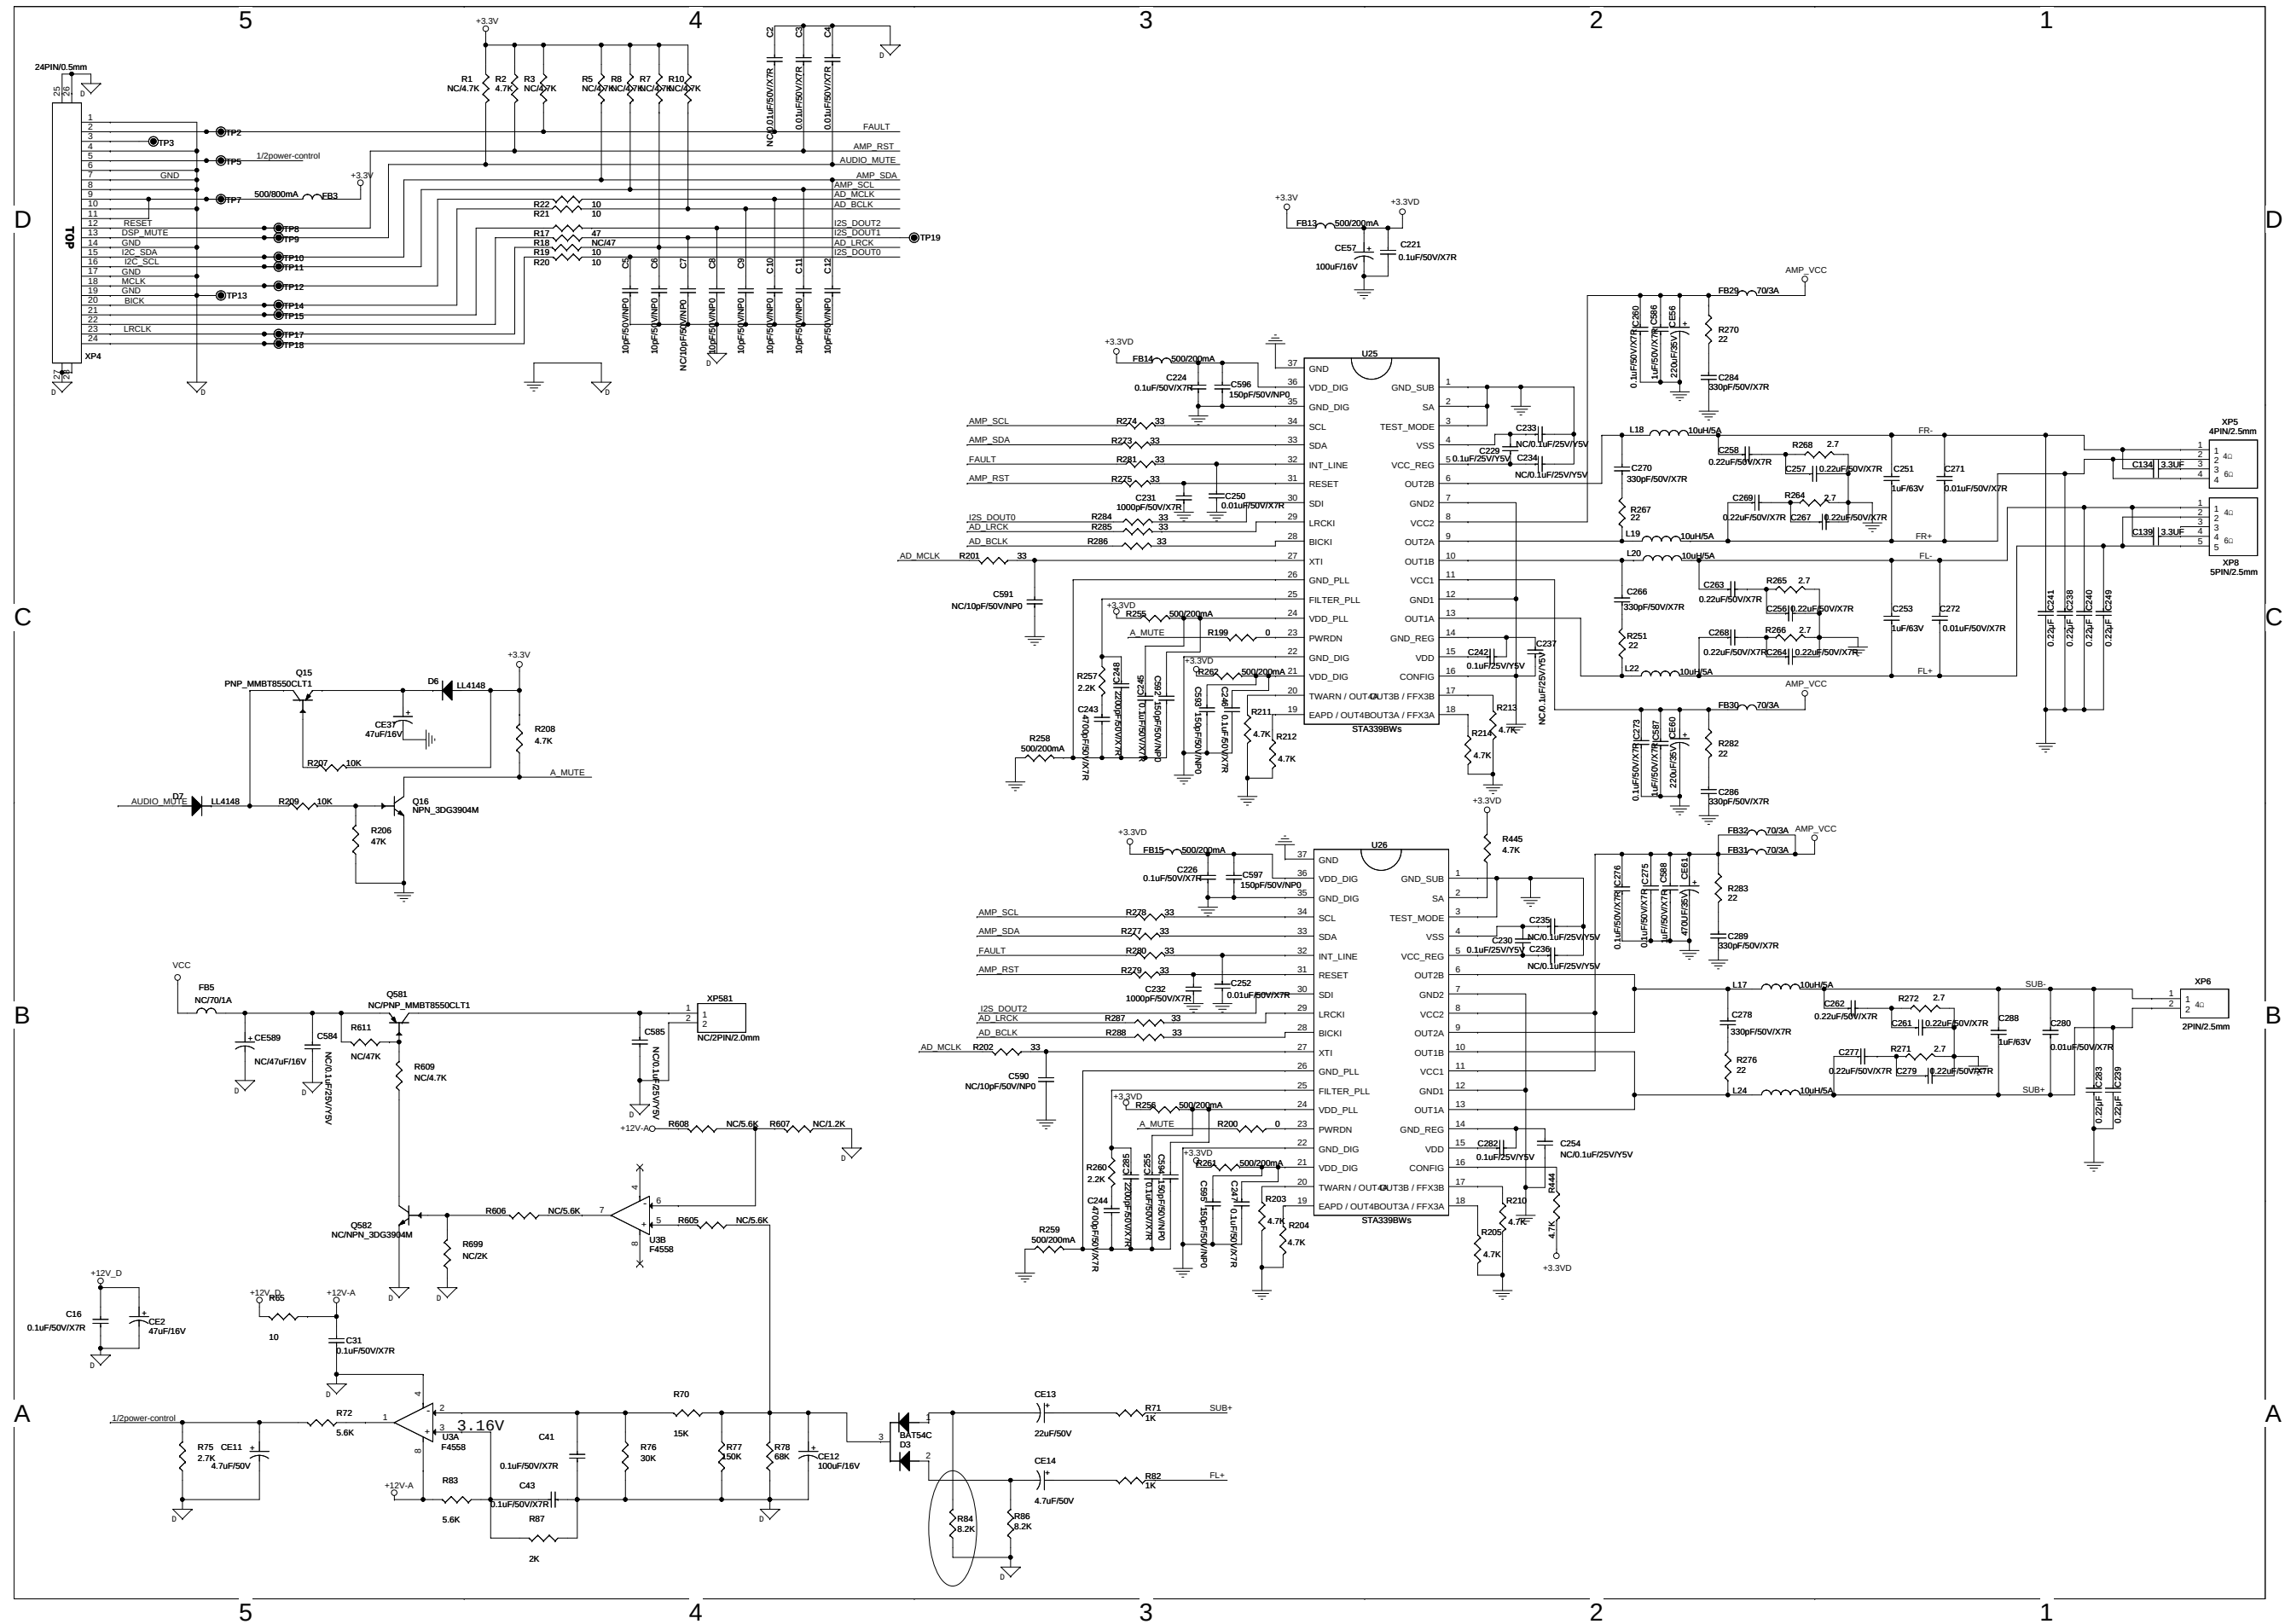


OK Board Print-layout (bottom side)

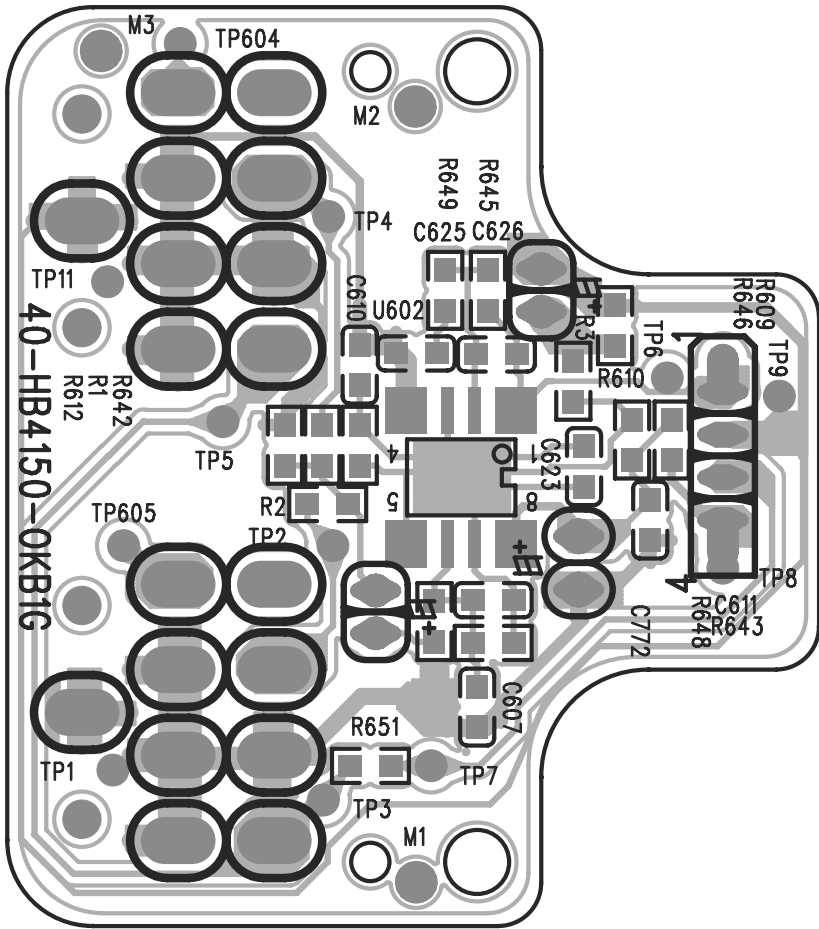


USB & MP3 Board Print-layout (bottom and top side)

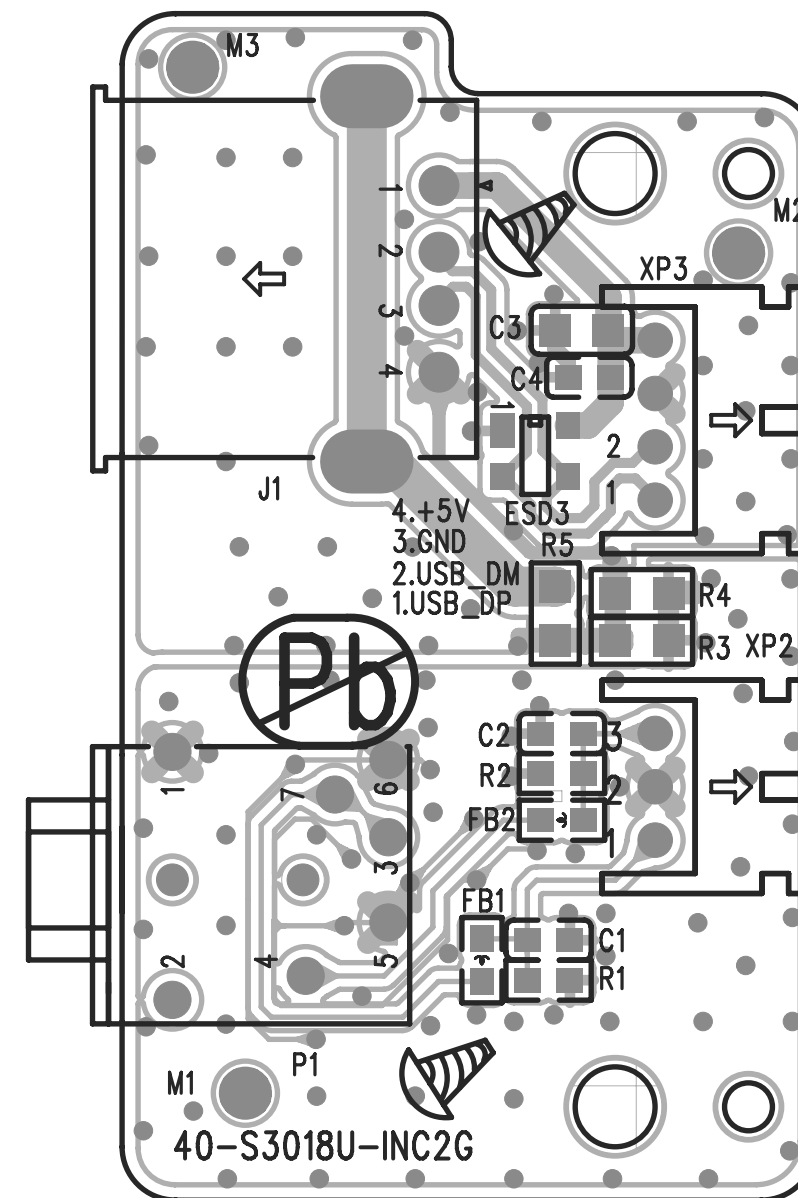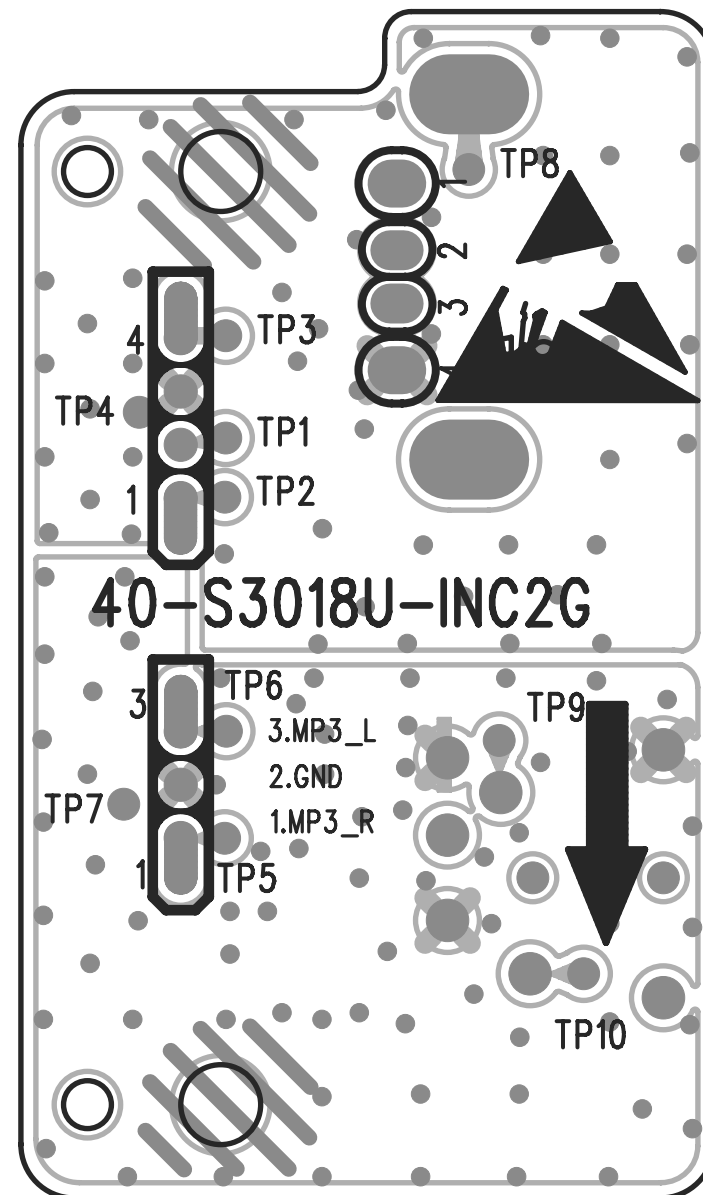


Touch Board Print-layout (bottom and top side)

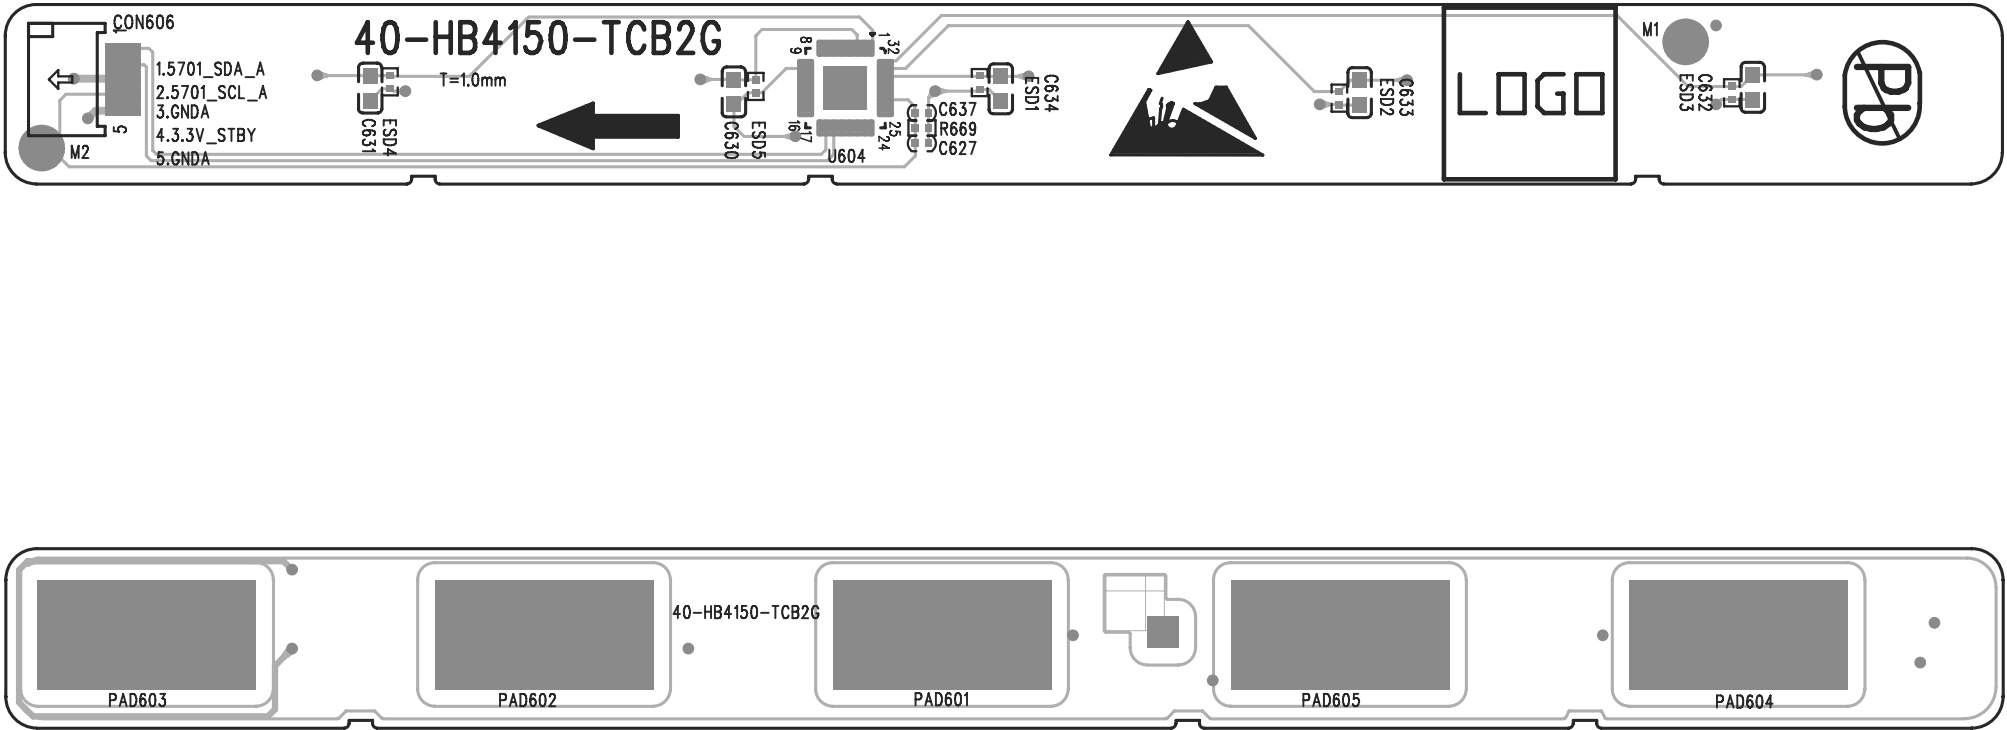


Front Control Board Print-layout (bottom and top side)

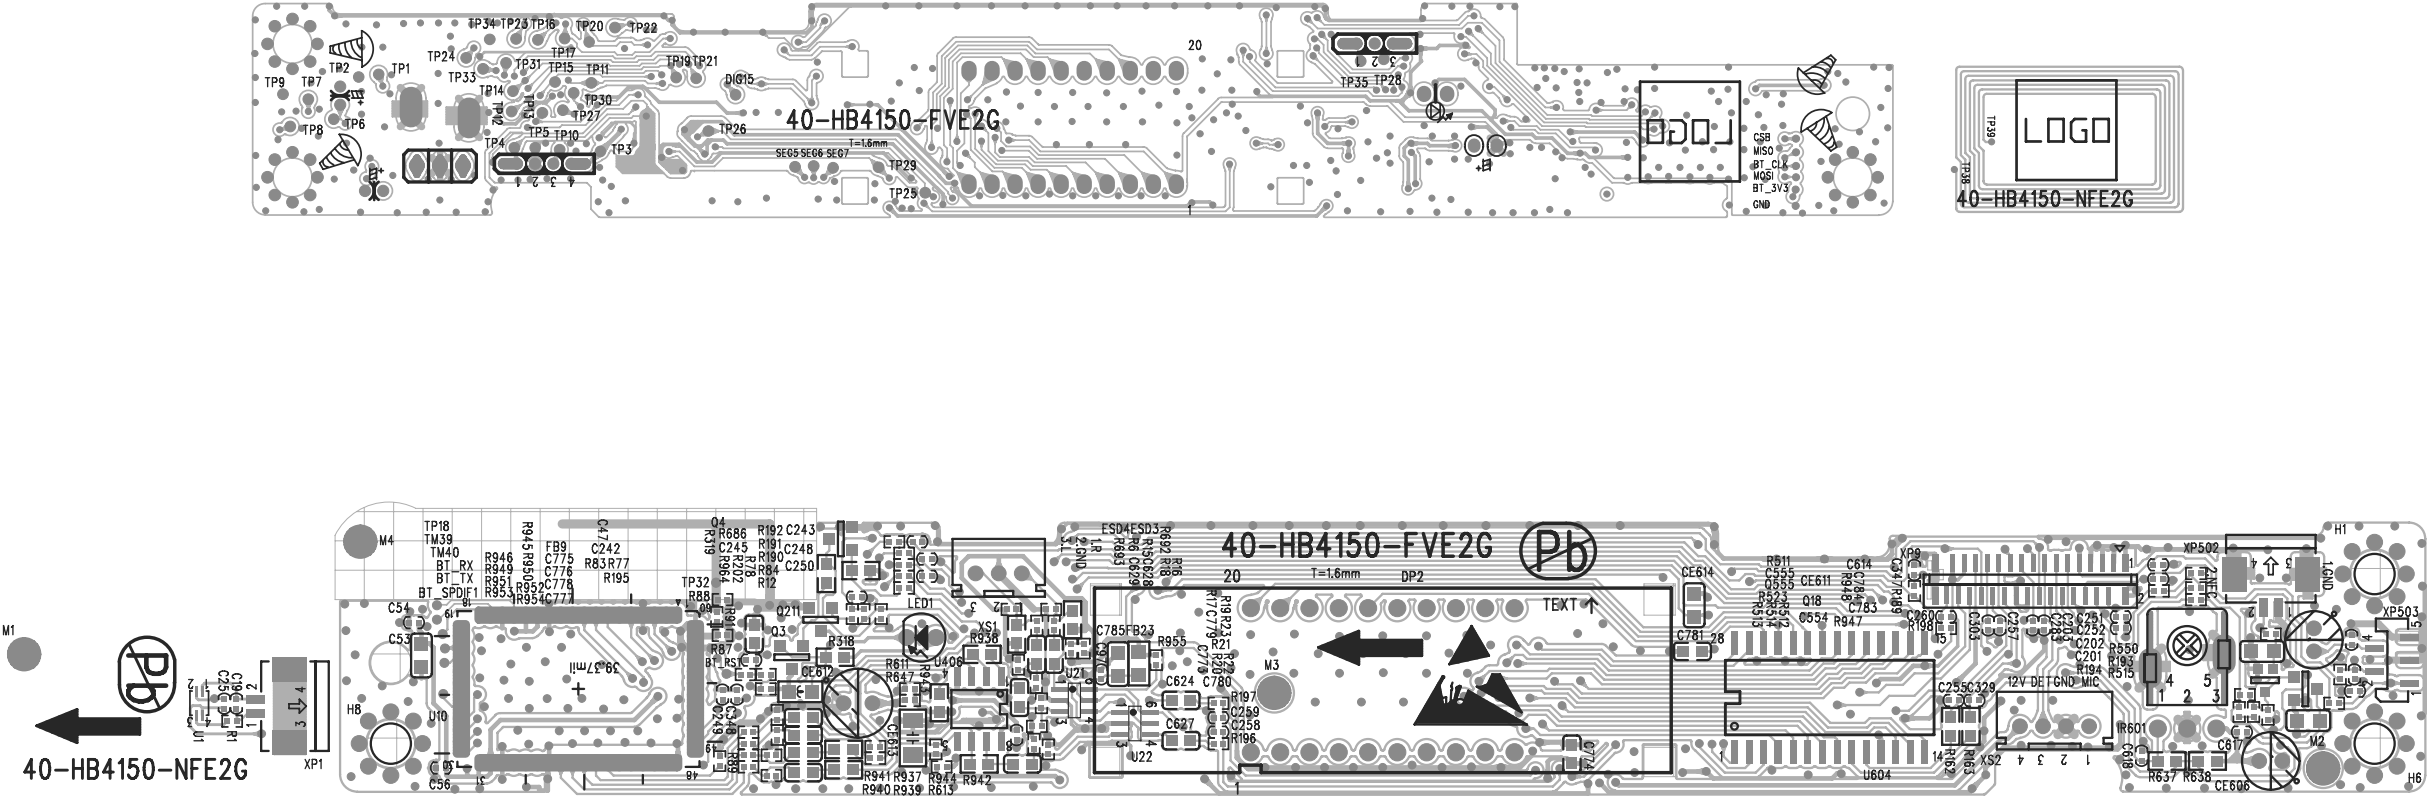


Power Board Print-layout (bottom side)

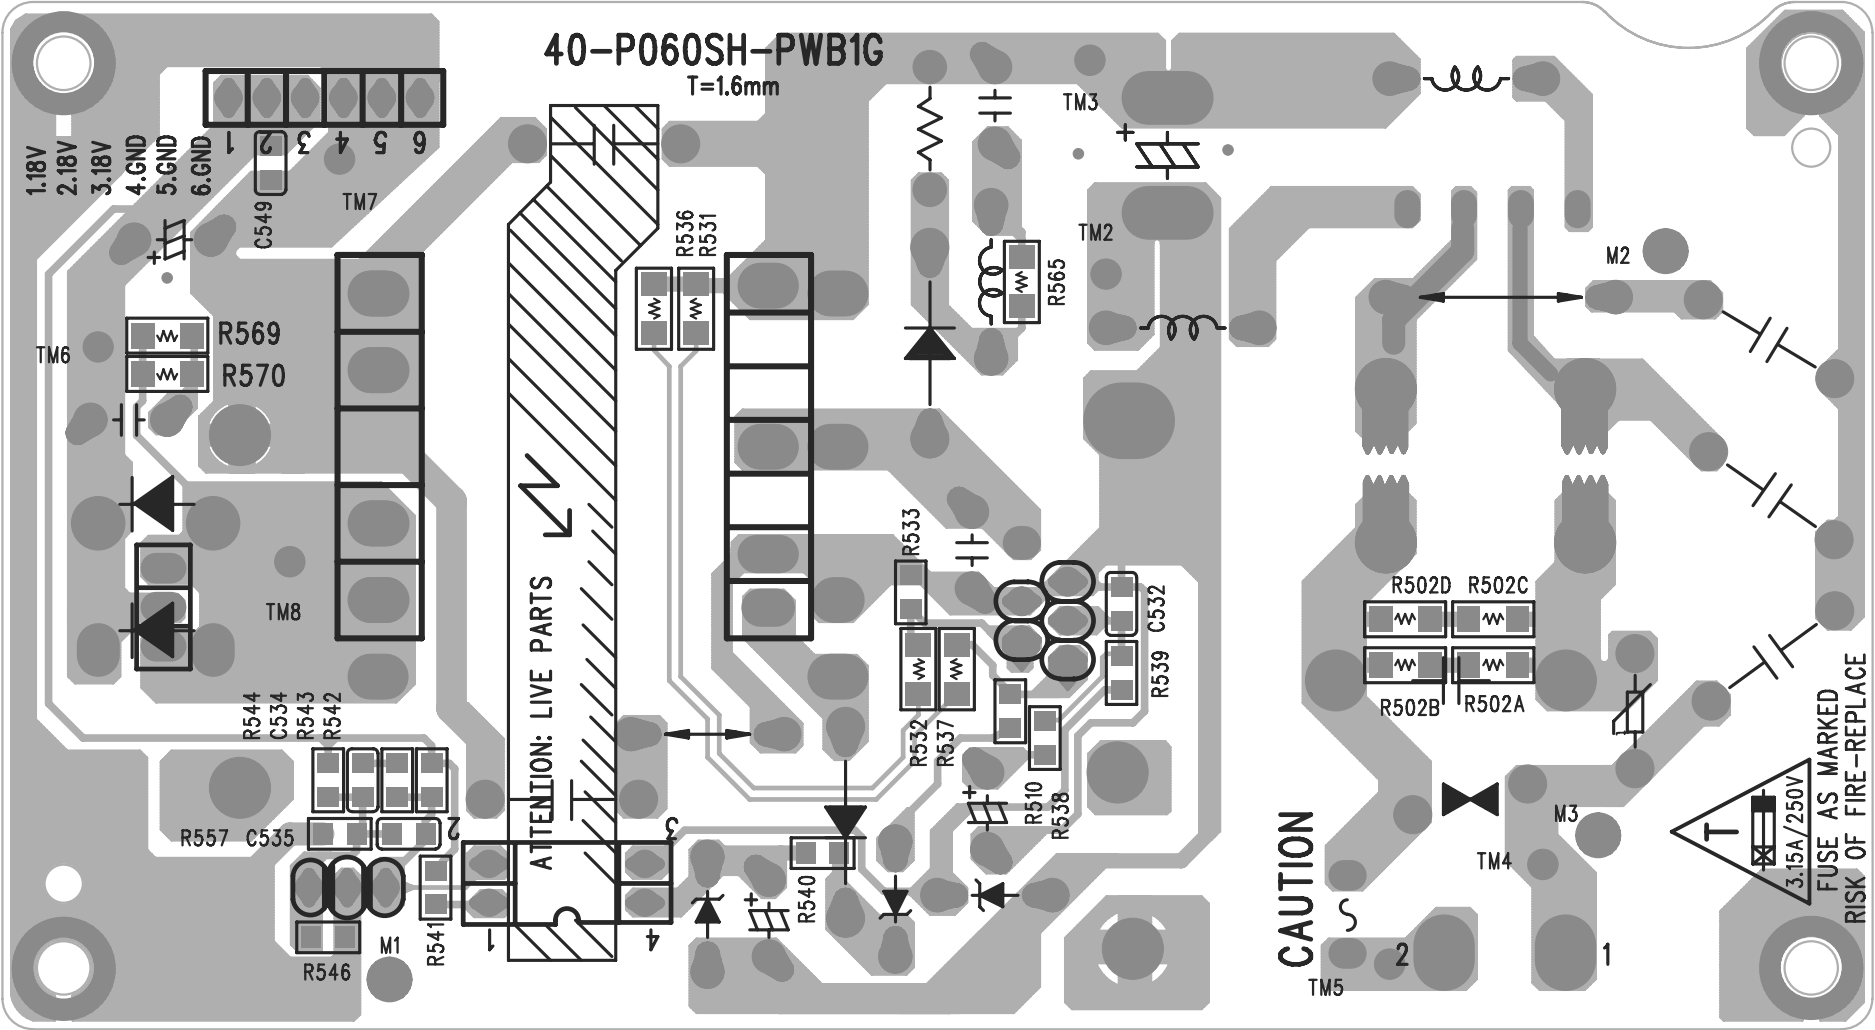


Amplifier Board Print-layout (bottom side)

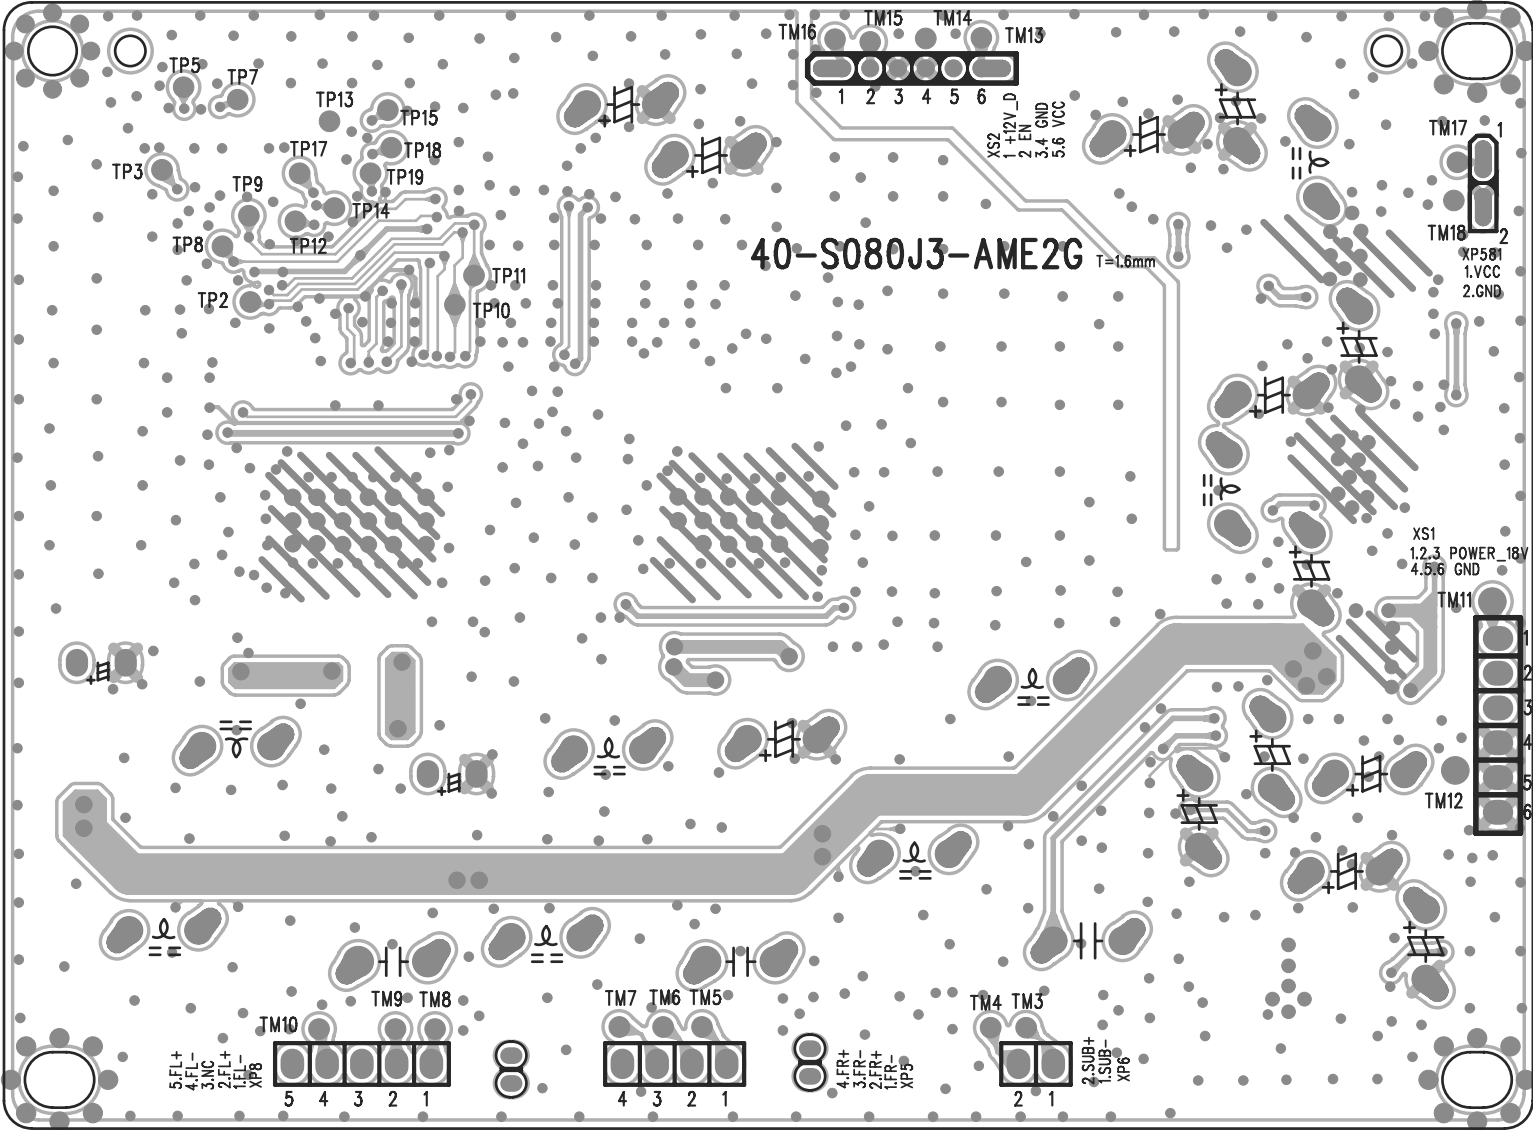

Amplifier Board Print-layout (top side)

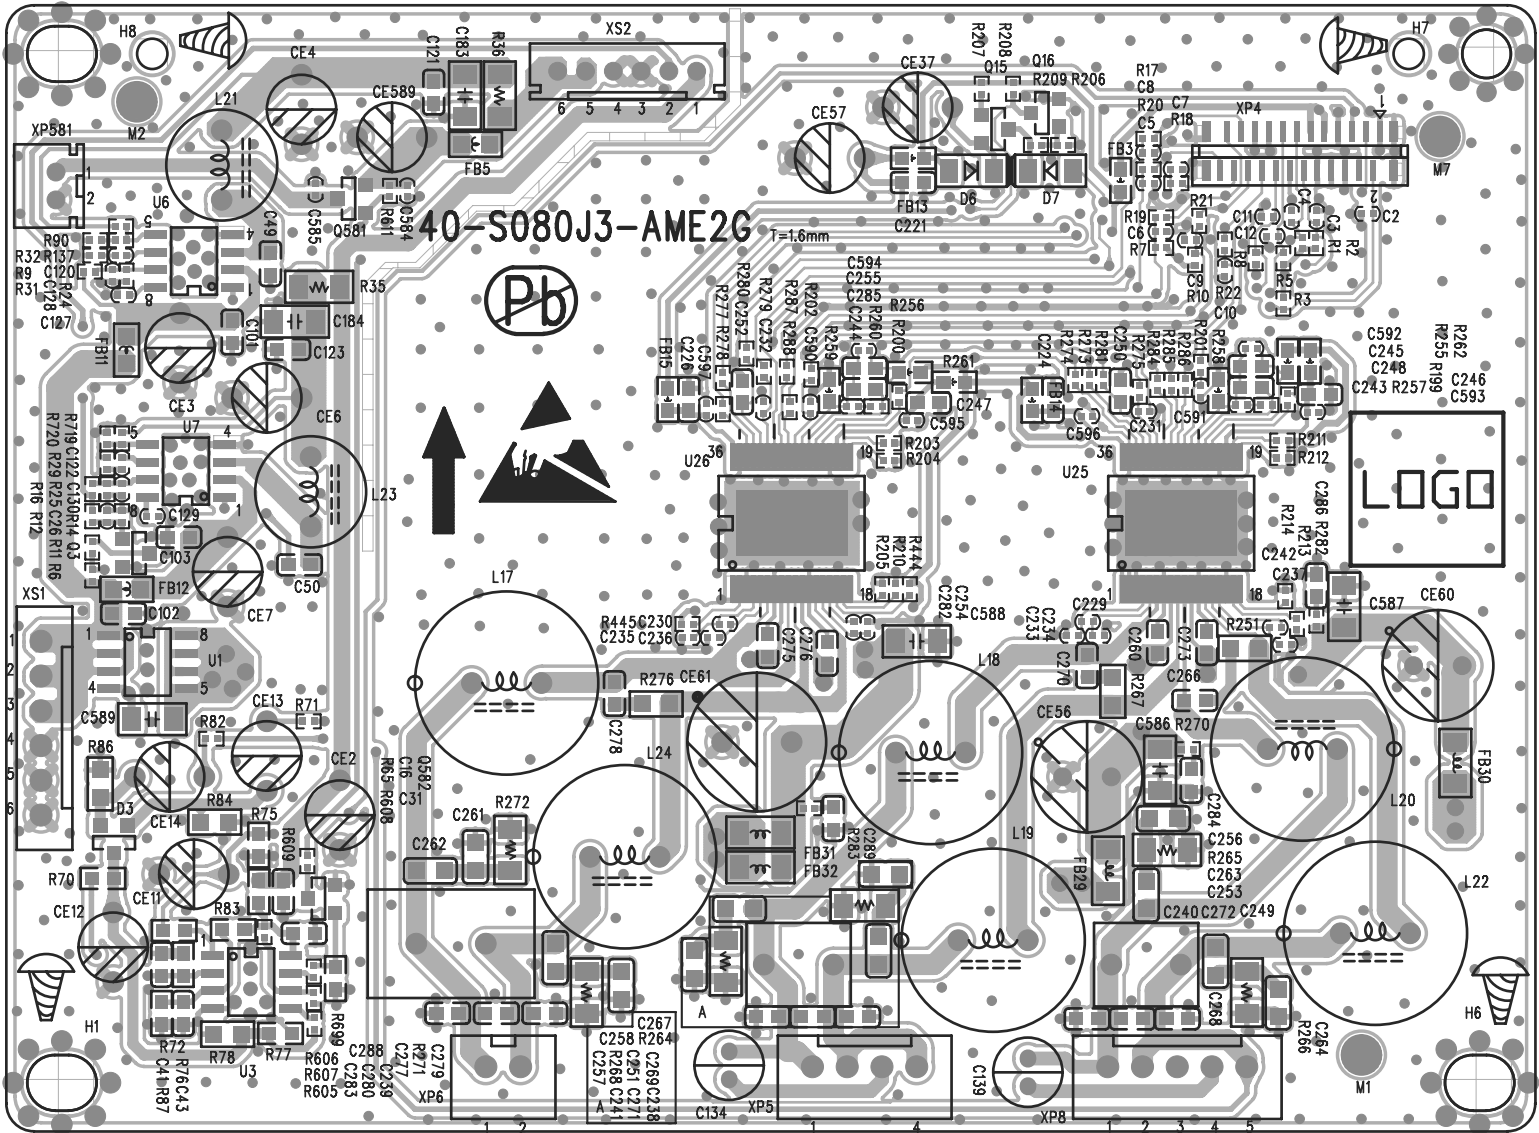


Exploded View for HTB4150B:

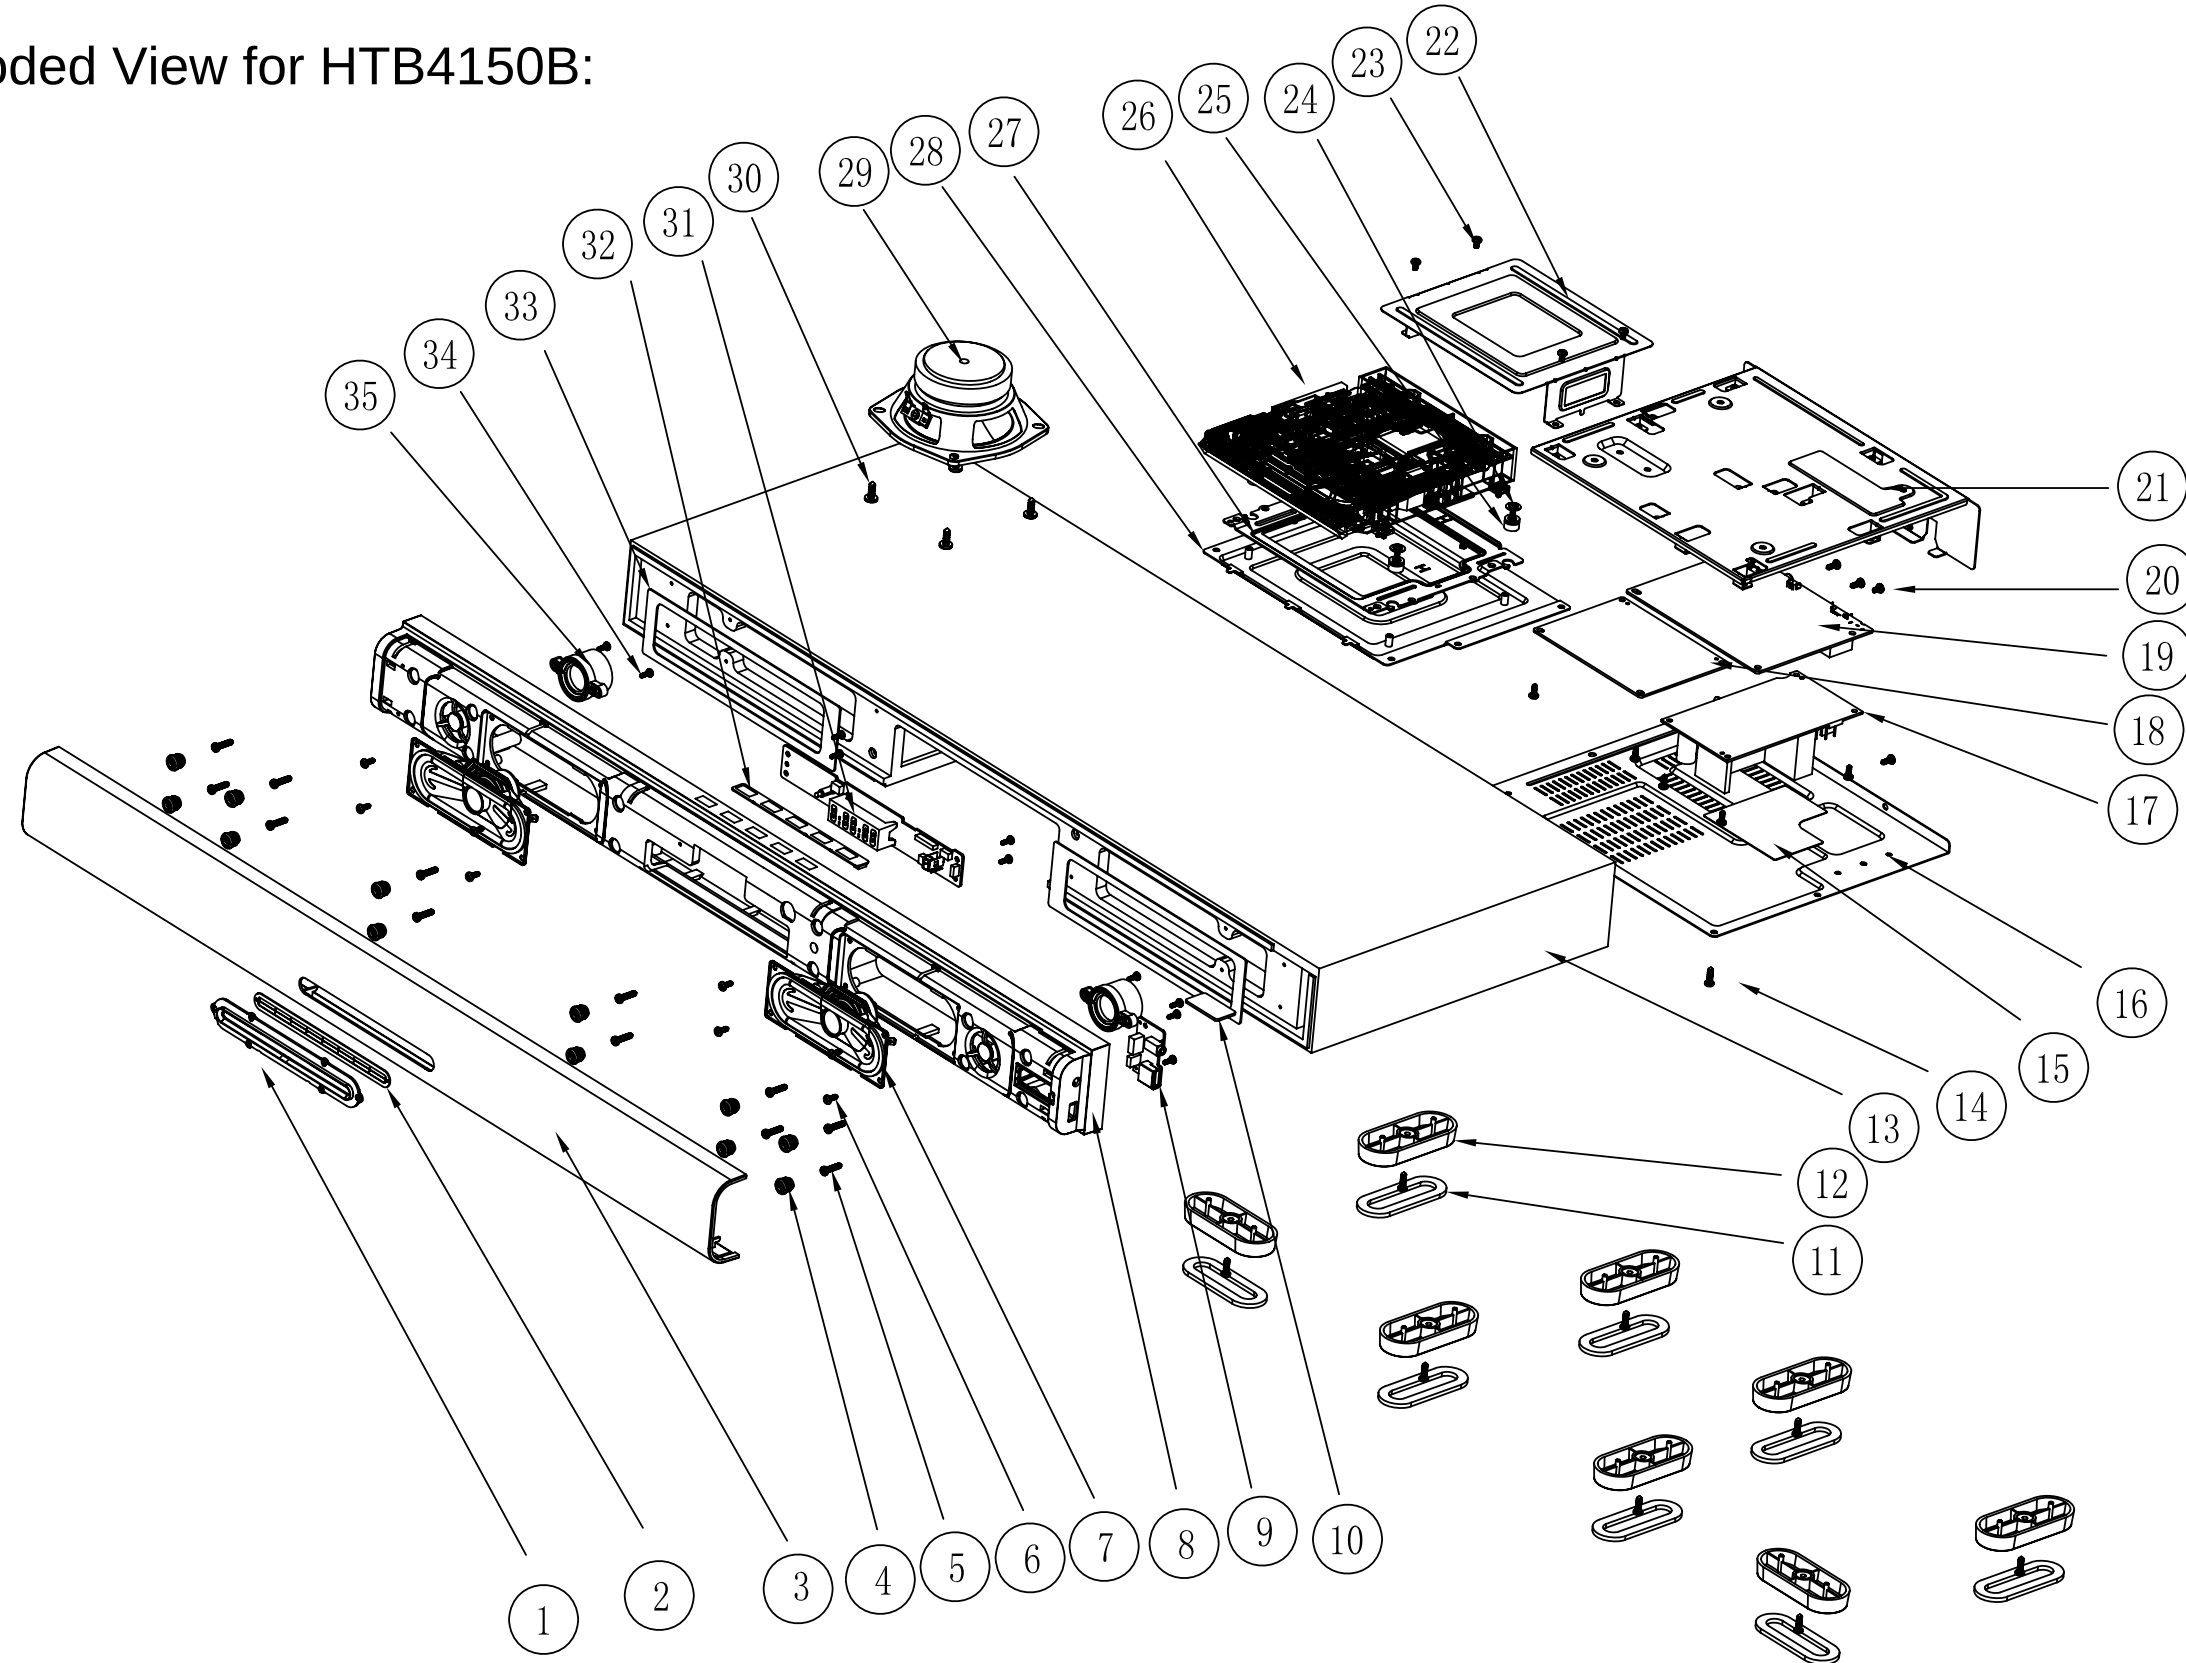

Partlist refer to a separated excel file on FYP

Exploded View for HTB4152B:

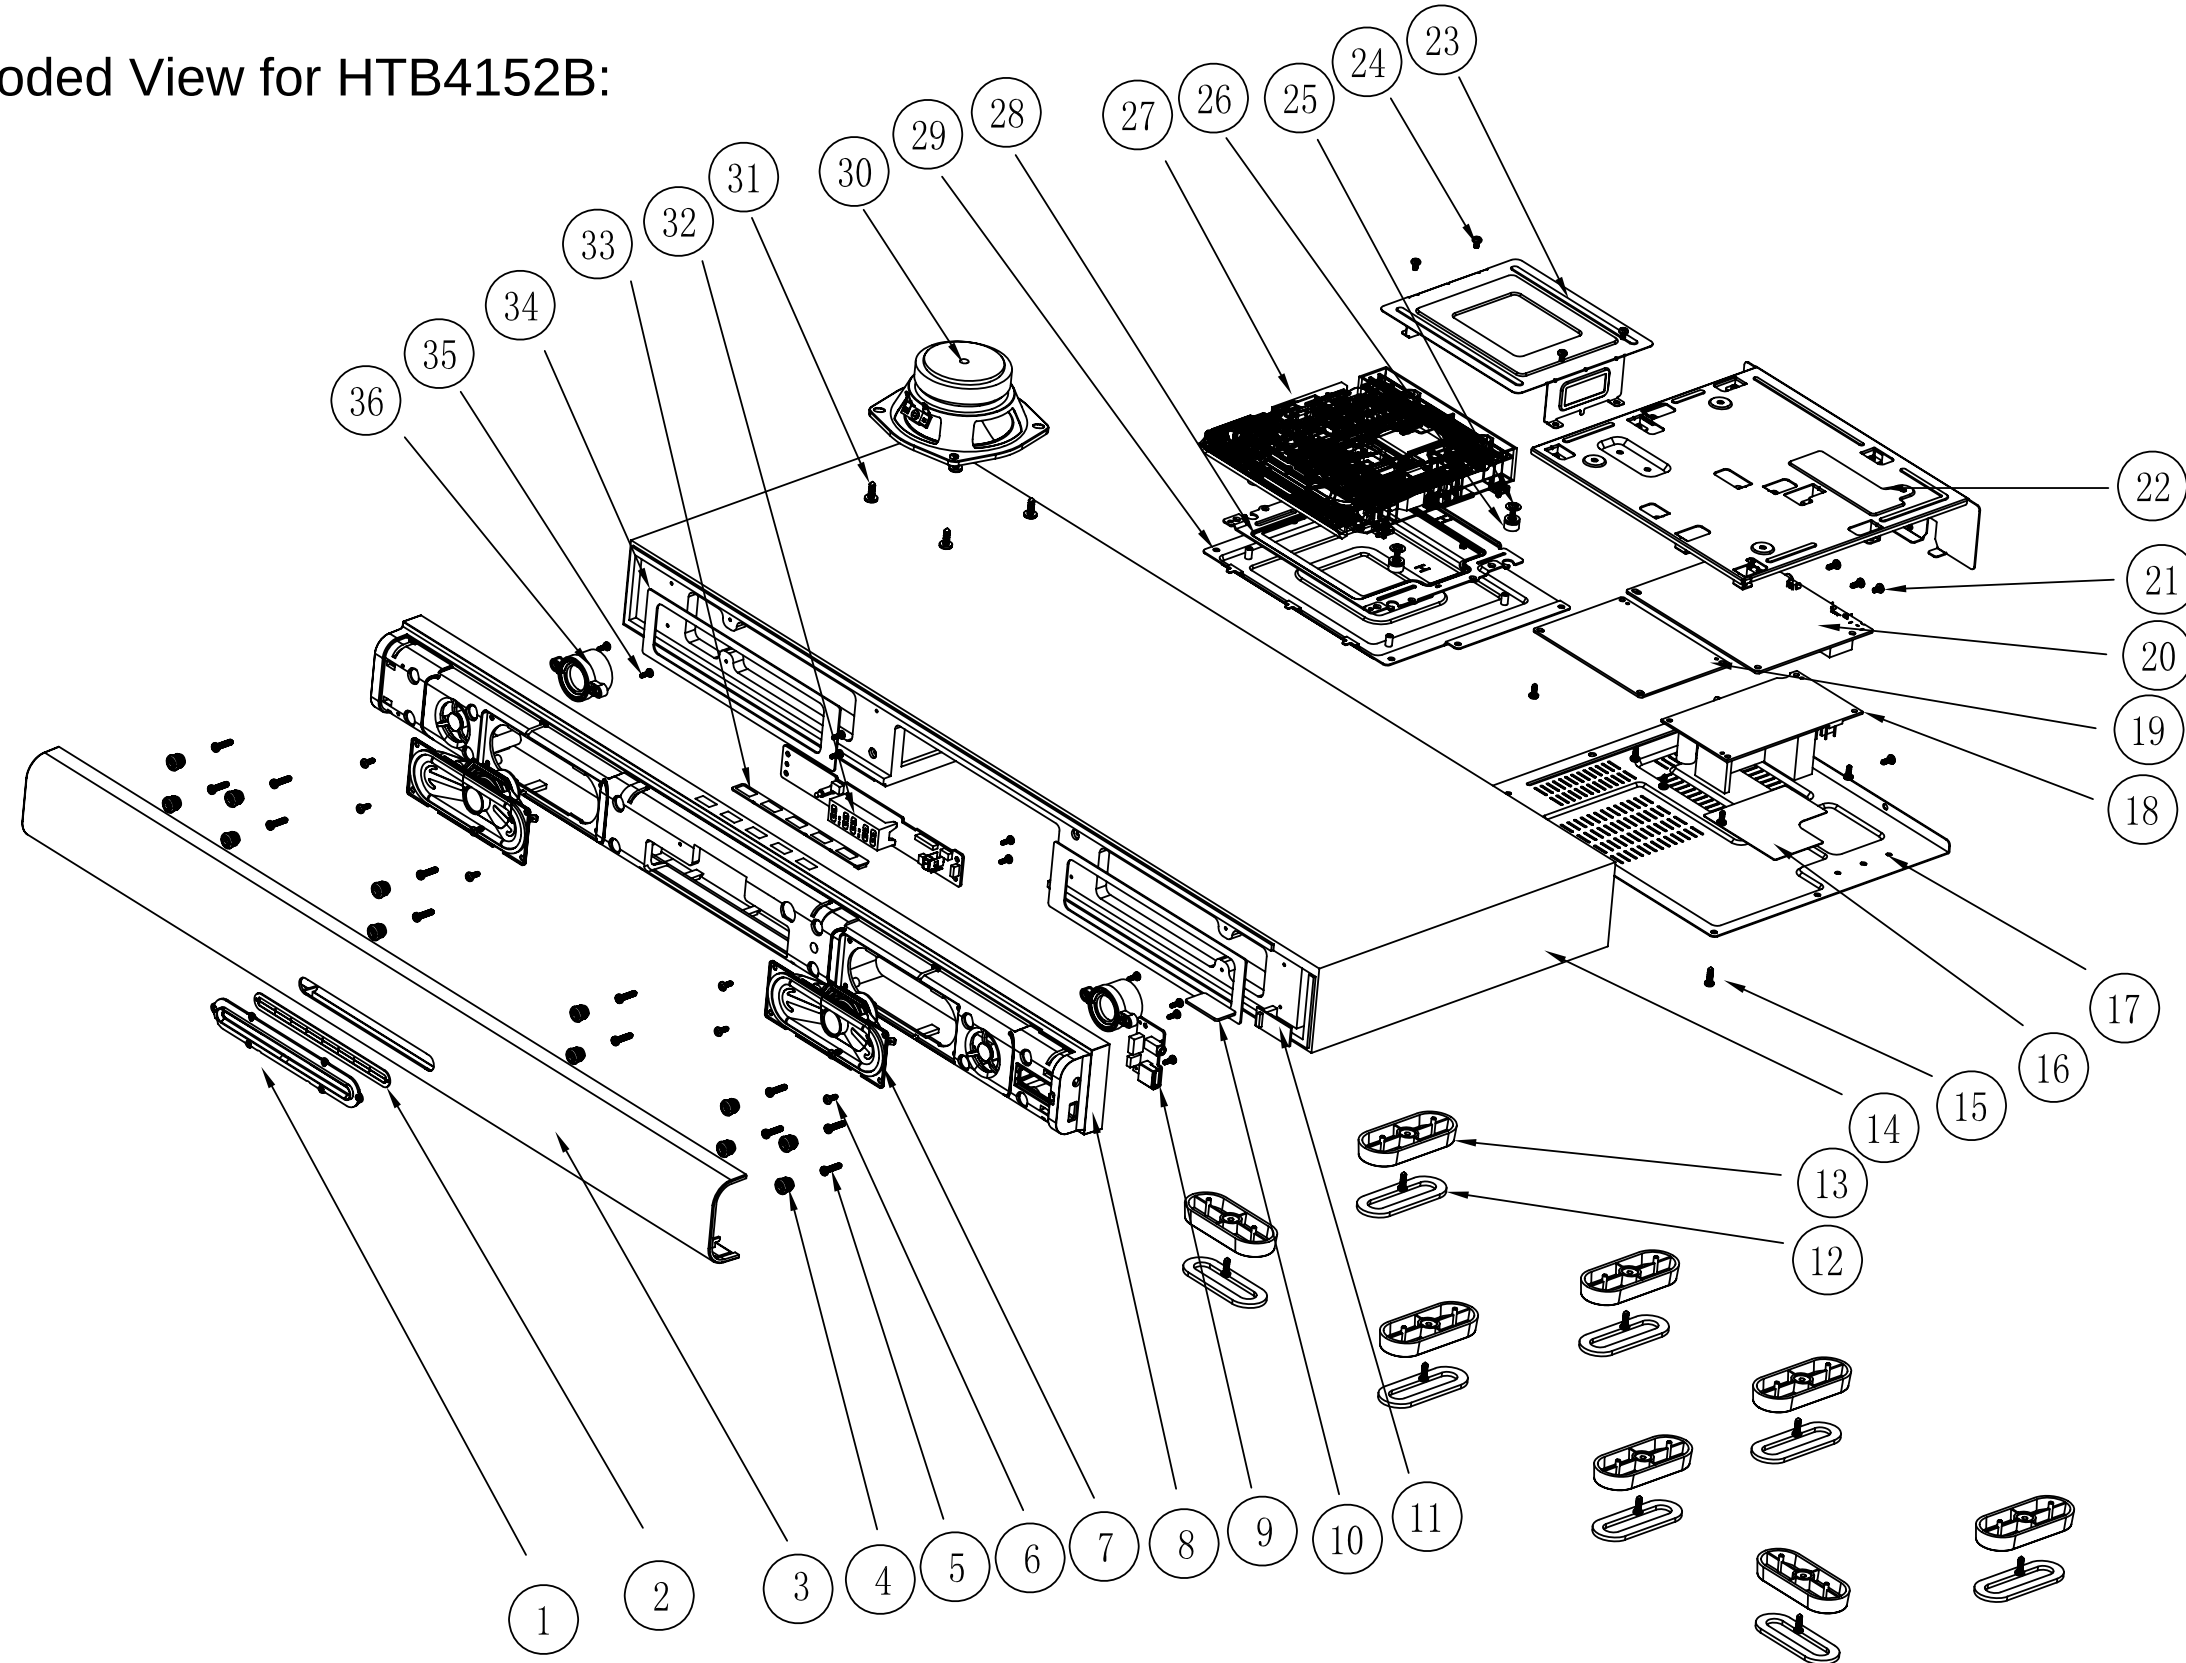

Partlist refer to a separated excel file on FYP

Revision List

Version 1.0

- * Initial Release for HTB4150B/12 and HTB4152B/12 by WK1345.

Version 1.1

- * Initial Release for HTB4150B/51 by WK1347.

Version 1.2

- * Initial Release for HTB4150B/98/93 by WK1413.

Version 1.3

- * Initial Release for HTB4150B/79 by WK1420.