

SECTION 5 PARTS LIST

5.1 EXPLODED VIEW


SAFETY PRECAUTION

Parts identified by the ⚠ symbol are critical for safety. Replace only with specified part numbers.
BEWARE OF BOGUS PARTS

Parts that do not meet specifications may cause trouble in regard to safety and performance. We recommend that genuine JVC parts be used.

5.1.1 PACKING AND ACCESSORY ASSEMBLY <M1>

The instruction manual to be provided with this product will differ according to the destination.

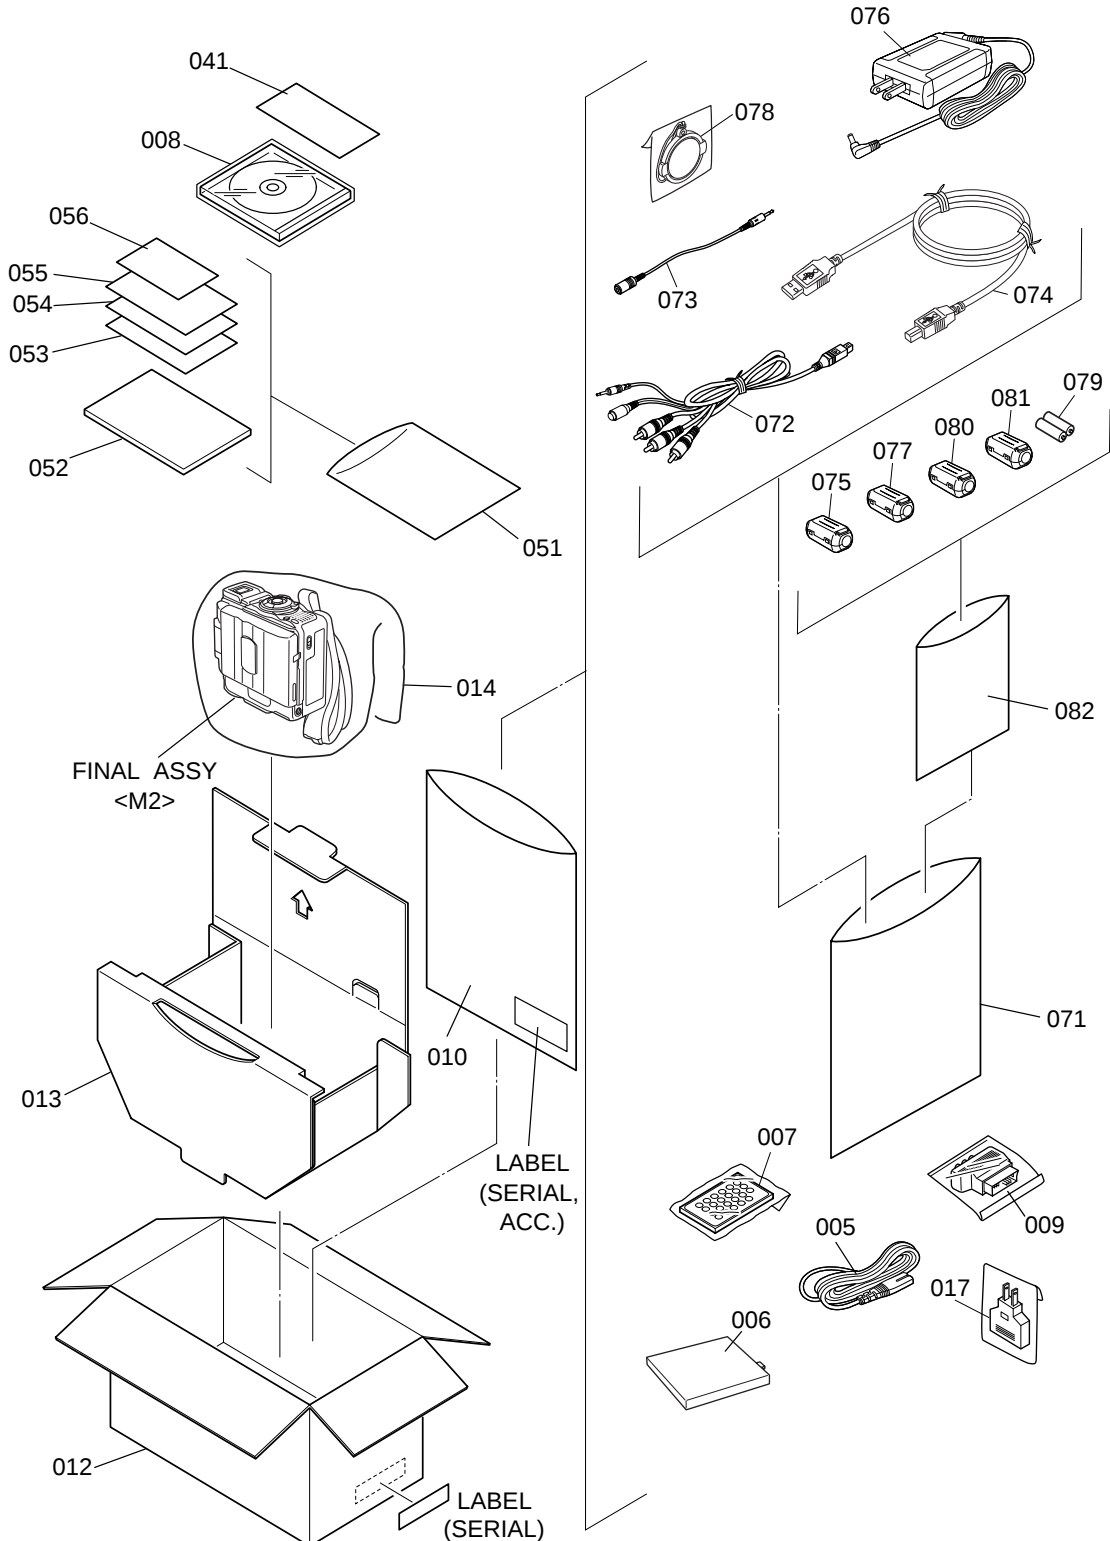

5.1.2 FINAL ASSEMBLY<M2>




<M2> FINAL ASS'Y

TABLE OF SETTING TORQUE FOR SCREW DRIVER

PART NO.	SETTING TORQUE
(115) (116) (117)	0.07 ±0.01 N·m
OTHER SCREW	0.09 ±0.01 N·m

Table 1 WIRE(FPC) CONNECTION TABLE

PWB NAME	CN No.	ASSY NAME	WIRE(FPC)NAME
MAIN PWB ASSY	CN101	LOWER ASSY(F)	BATT. TERM.
MAIN PWB ASSY	CN102	LOWER ASSY(F)	CCD
MAIN PWB ASSY	CN103	MECHA(A) ASSY	LOAD MOTOR
MAIN PWB ASSY	CN104	MECHA(A) ASSY	DRUM MOTOR
MAIN PWB ASSY	CN106	MECHA(A) ASSY	SENSOR
MAIN PWB ASSY	CN107	MECHA(A) ASSY	R. ENC.
MAIN PWB ASSY	CN108	MECHA(A) ASSY	CAPSTAN
MAIN PWB ASSY	CN109	LOWER ASSY(F)	SD PWB ASSY (CN301)
MAIN PWB ASSY	CN110	MECHA(A) ASSY	HEAD
MAIN PWB ASSY	CN111	LOWER ASSY(F)	CAMERA OPE.
MAIN PWB ASSY	CN112	UPPER ASSY(G)	SUB OPE.
MAIN PWB ASSY	CN113	UPPER ASSY(G)	MON. PWB
MAIN PWB ASSY	CN114	MIC ASSY	MIC WIRE
MAIN PWB ASSY	CN115	FRONT ASSY(G)	STROBE PWB

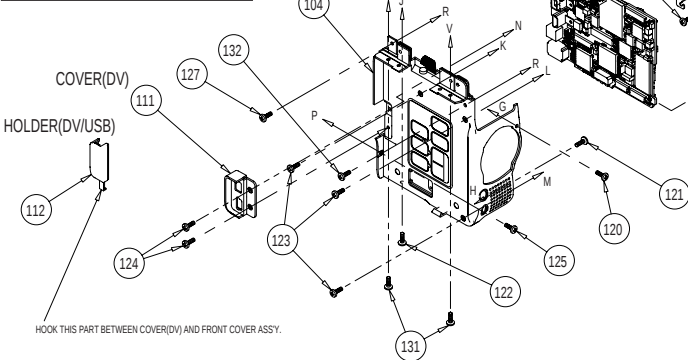




- NOTES
- While assembling the SET, don't touch CLEANER ROLLER portion of MECHA ASSY.
 - PREVENT THE MOTOR FPC FROM ENTERING IN FERNALLY IN THE DRUM UPPER BASE.
 - OPEN CASSETTE CAVER AND ASSEMBLE UPPER ASSY(G) AND FRONT ASSY(G).

FINAL ASS'Y LYH20619
CLEANER ASSY LYH20615


TABLE OF SETTING TORQUE FOR SCREW DRIVER

PART NO.	SETTING TORQUE
(188) (189)	0.069 ±0.007 N·m

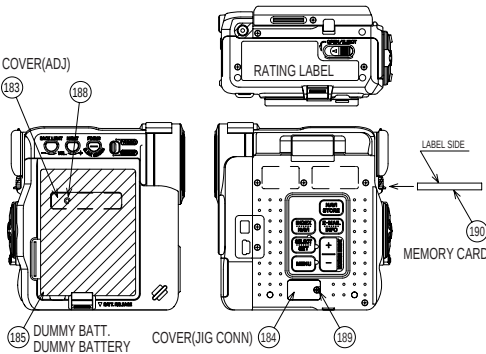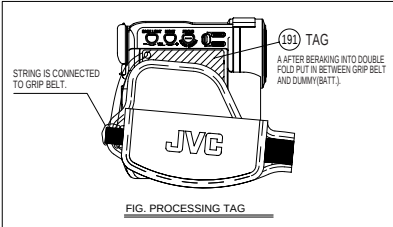

5.1.3 LOWER ASSEMBLY(F) AND LOWER ASSEMBLY(G)<M2>

<M2> LOWER ASS'Y(F)

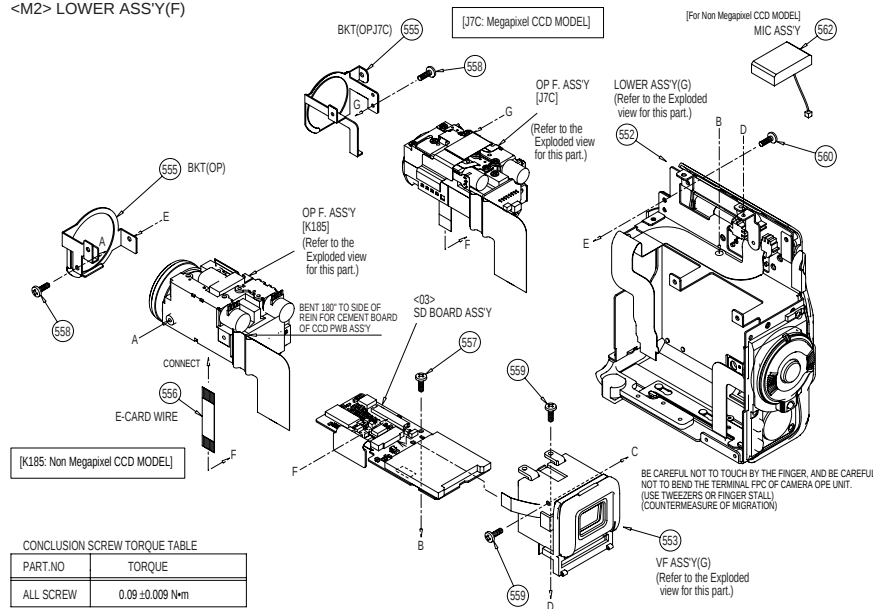

CONCLUSION SCREW TORQUE TABLE





PART.NO	TORQUE
ALL SCREW	0.09 ±0.009 N·m

LOWER ASS'Y(F) LYH20622






<M2> LOWER ASS'Y(G)

CONCLUSION SCREW TORQUE TABLE


PART.NO	TORQUE
514	0.07 ±0.009 N·m
ANOTHER SCREW	0.12 ±0.01 N·m

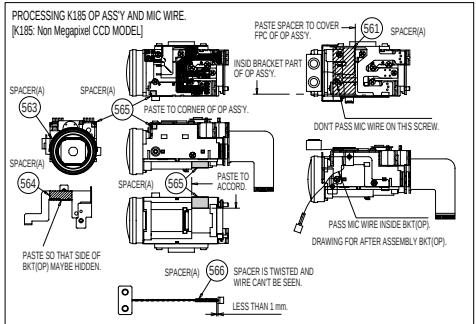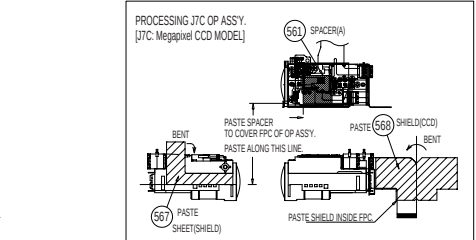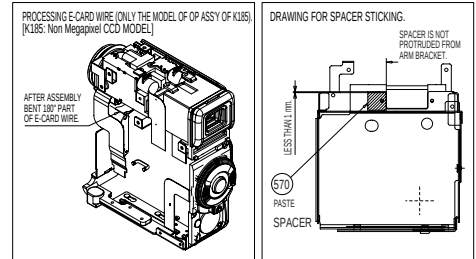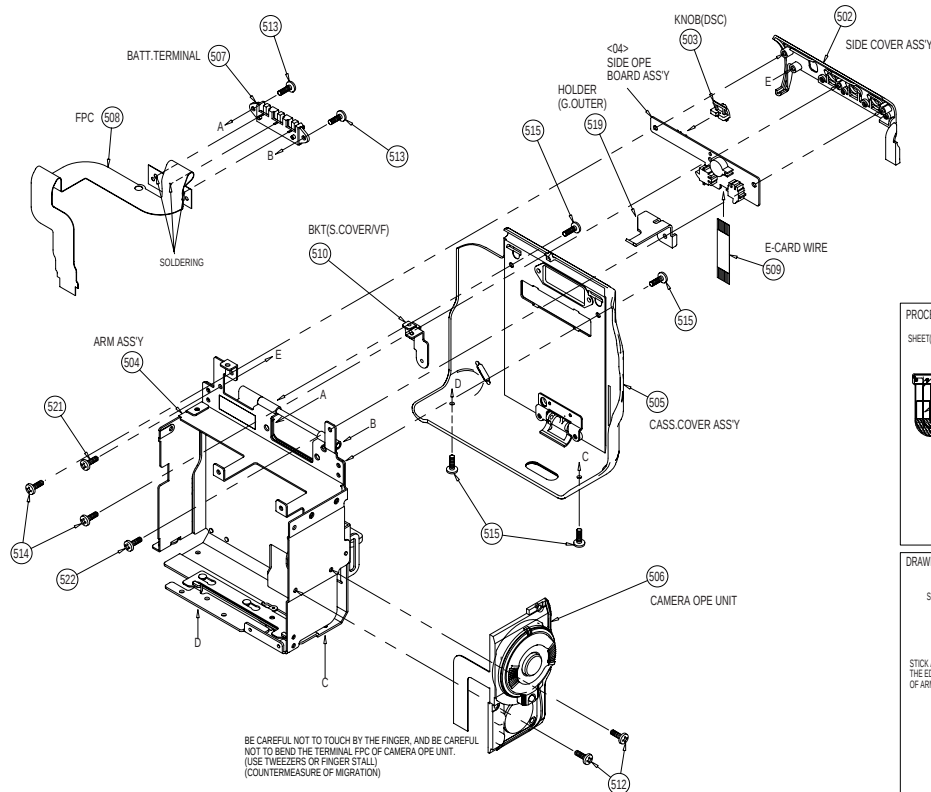

LOWER ASS'Y(G) LYH20620





5.1.4 UPPER ASSEMBLY(G)<M2>

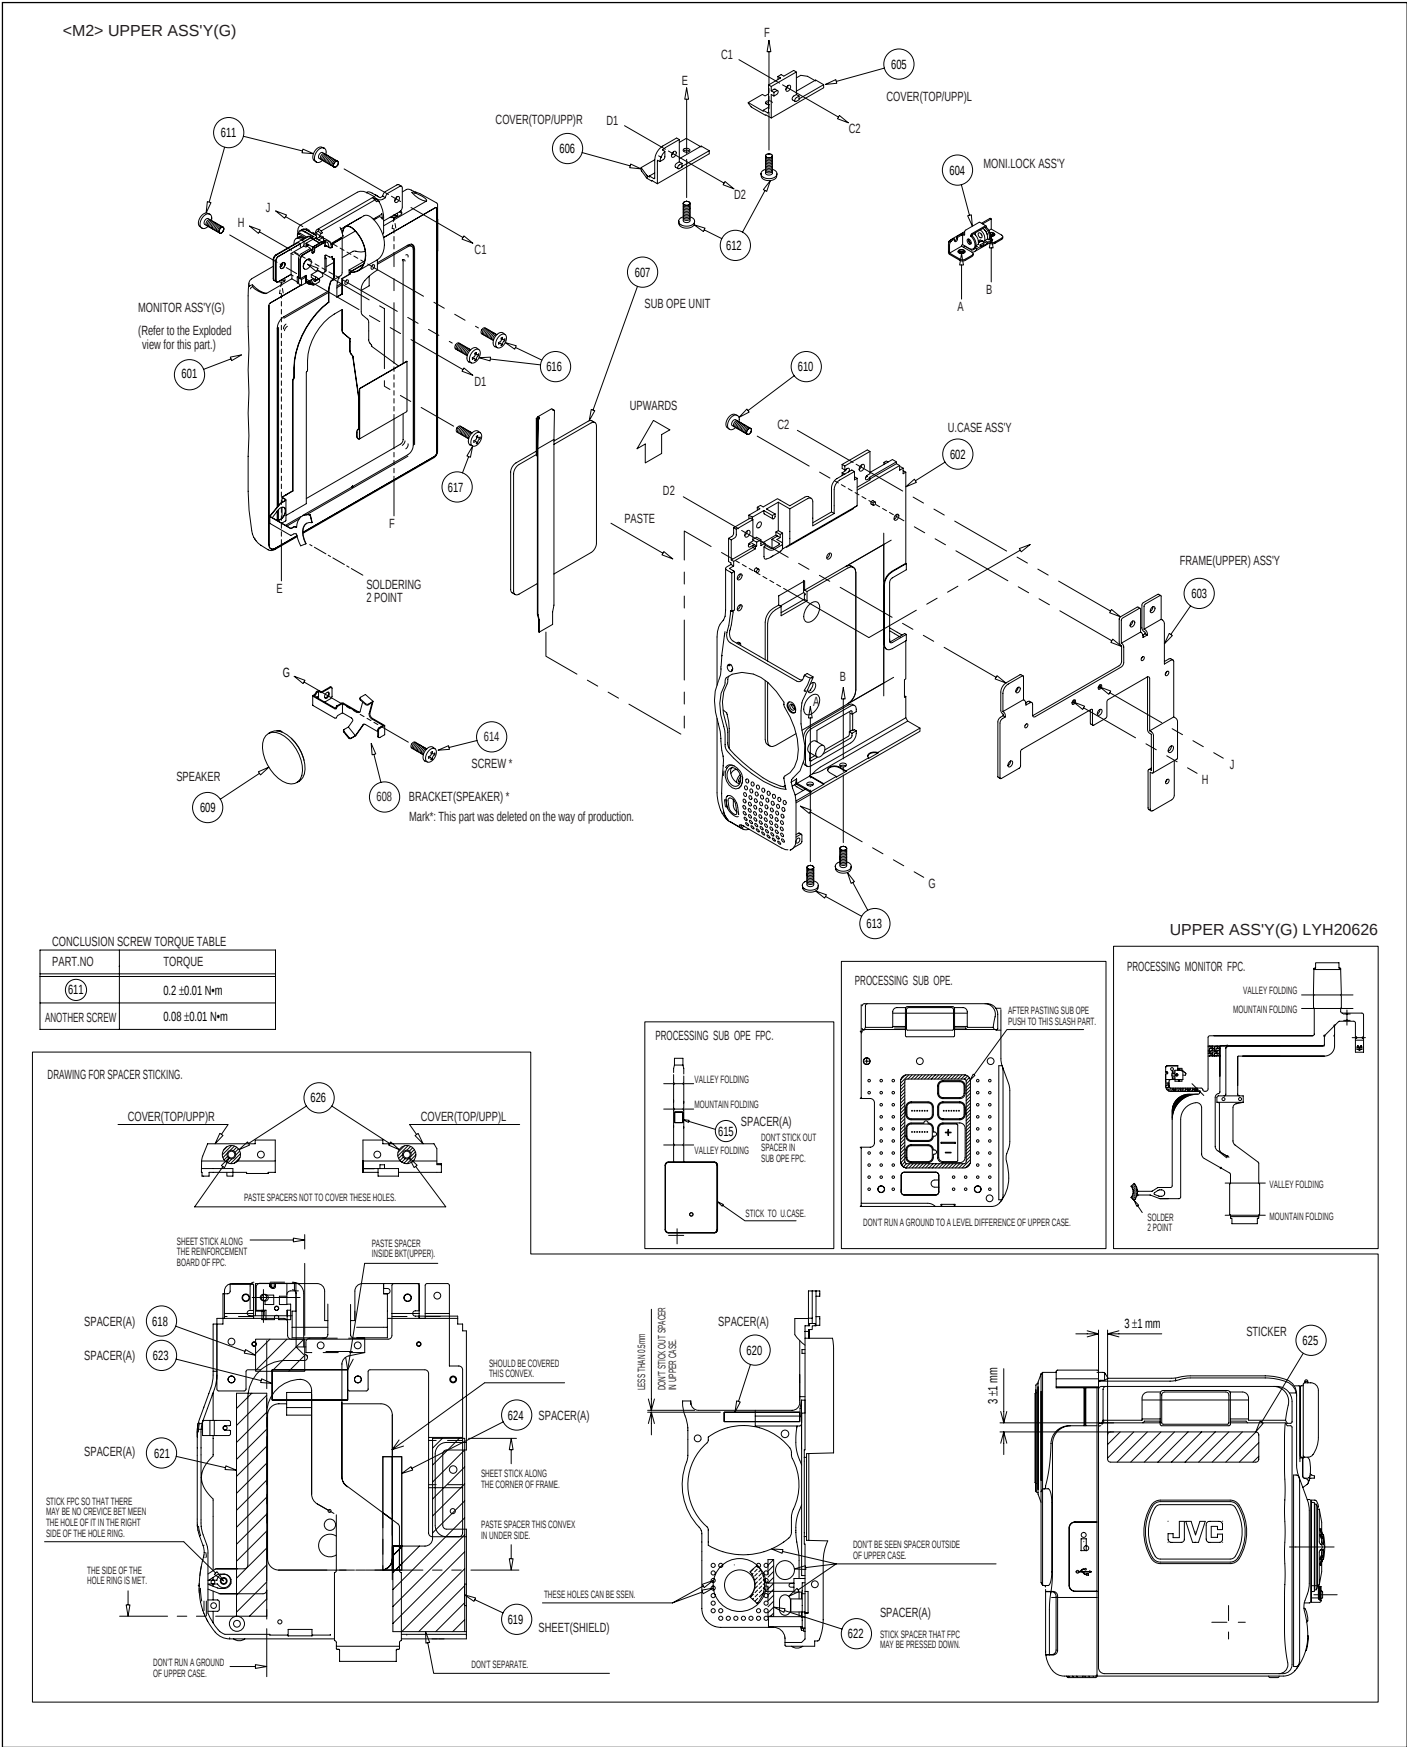


5.1.5 MONITOR ASSEMBLY(G)<M2>

<M2> MONITOR ASS'Y(G)

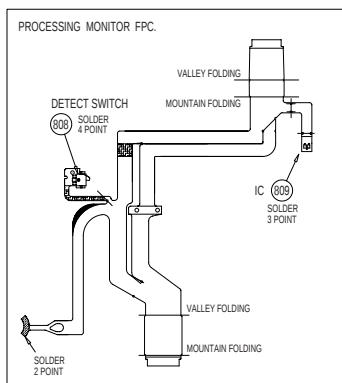


PART NO.	SETTING TORQUE
⑧14	0.2 ±0.02 N•m
⑧15	0.055 ±0.01 N•m
OTHER SCREW	0.07 ±0.01 N•m

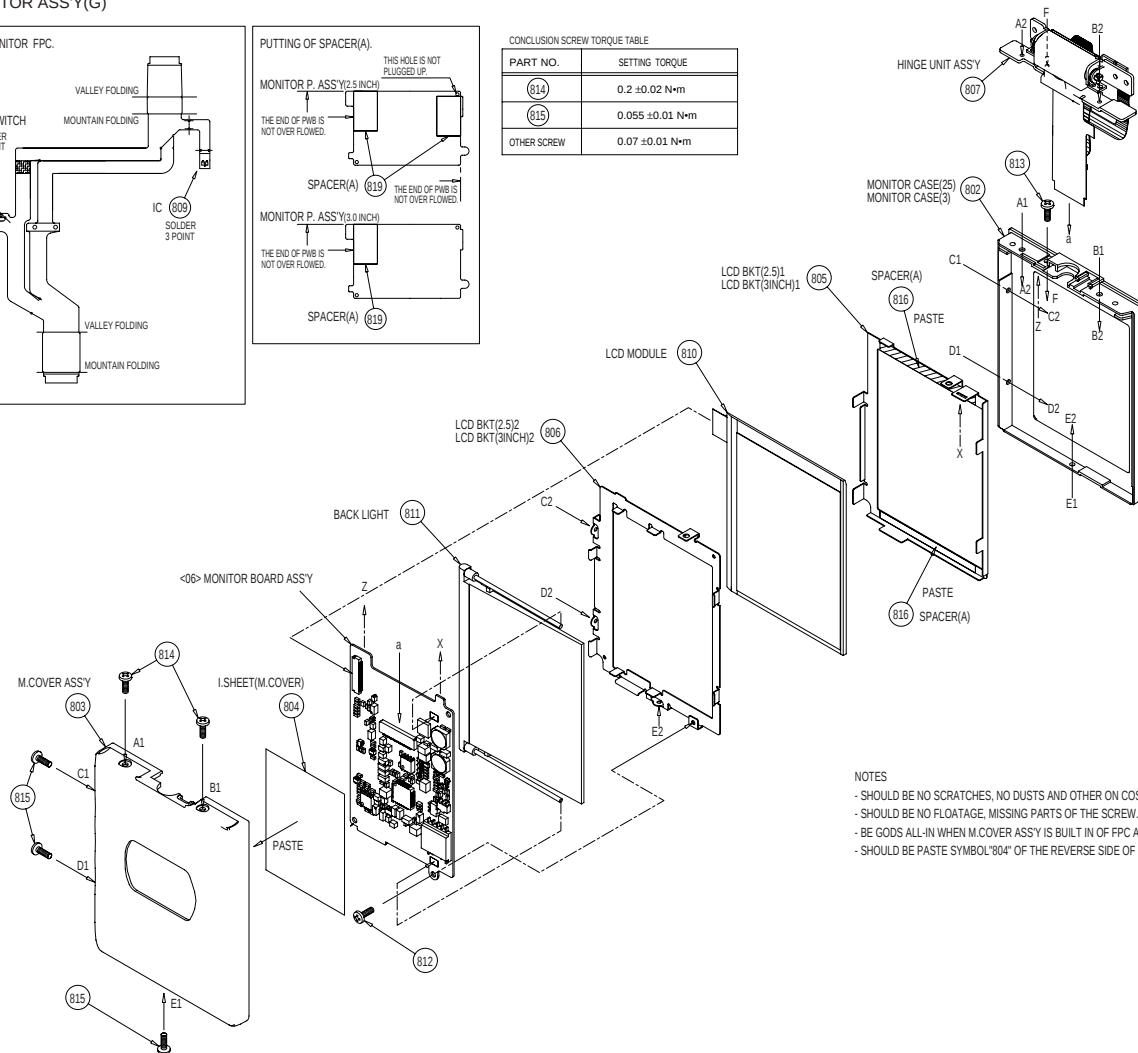

NOTES

- SHOULD BE NO SCRATCHES, NO DUSTS AND OTHER ON COSMETIC COMPONENTS.
- SHOULD BE NO FLOATAGE, MISSING PARTS OF THE SCREW.
- BE GODS ALL-IN WHEN M.COVER ASSY IS BUILT IN OF FPC AND WIRE, ETC.
- SHOULD BE PASTE SYMBOL "804" OF THE REVERSE SIDE OF M.COVER.


MONITOR ASS'Y(G) LYH20625

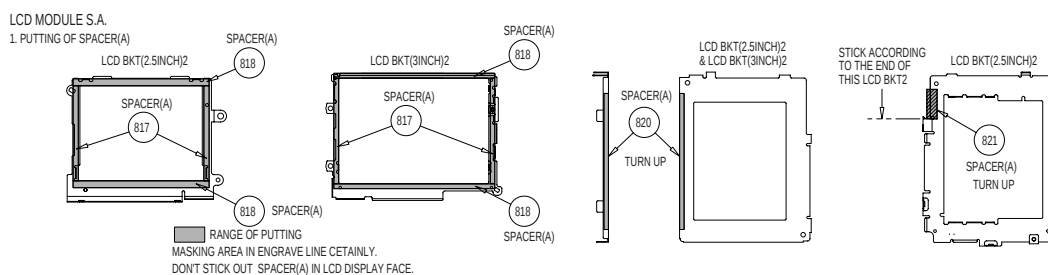

2. PUTTING OF LCD MODULE (2.5 & 3.0 INCH)

- PEEL OFF PROTECTION SHEET OF SPACER(A) ON LCD BKT2.
- CONFORM THAT LCD MODULE IS SUITABLE FOR POSITION OF LCD BKT2 AND PUT TWO PARTS.

5.1.6 VF ASSEMBLY(G)<M2>

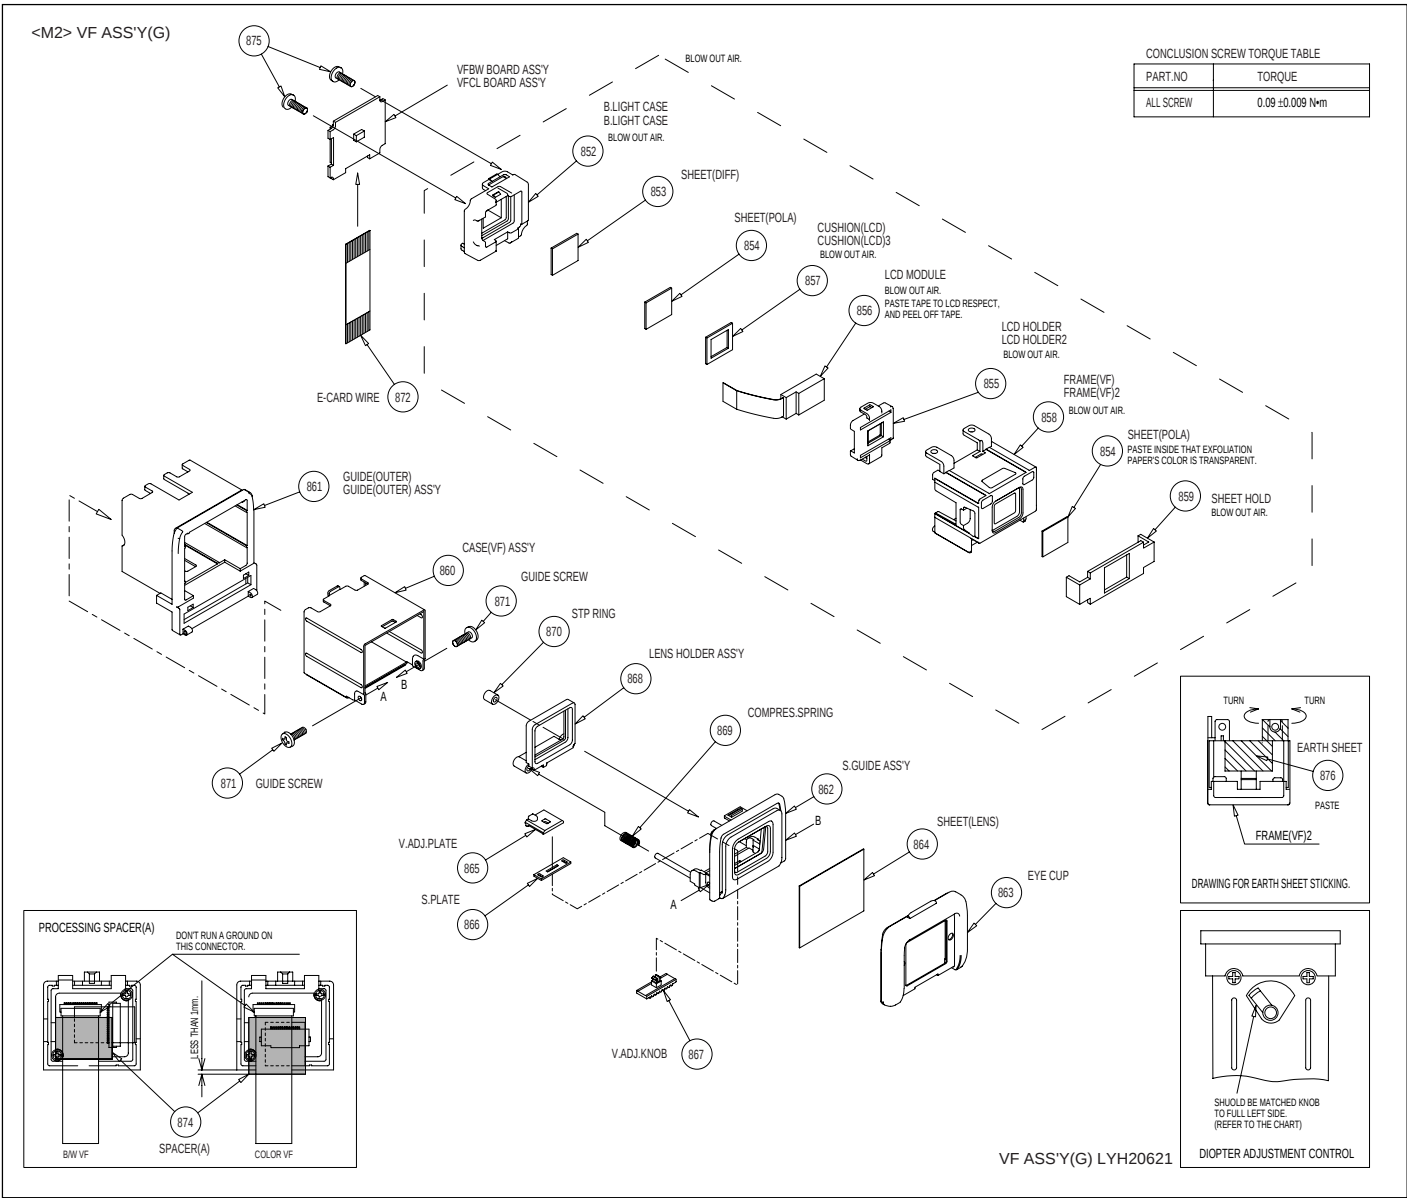

5.1.7 FRONT ASSEMBLY<M2>

<M2> FRONT ASS'Y

TABLE OF SETTING TORQUE FOR SCREW DRIVER	
PART NO.	SETTING TORQUE
ALL SCREW	0.09 ±0.009 N·m

FRONT ASS'Y(G) LYH20627

PROCESSING WIRE.

DRAWING(1) FOR SPACER STICKING.

DRAWING(2) FOR SPACER STICKING.

5.1.8 OP F. ASSEMBLY, OP ASSEMBLY AND OP BLOCK ASSEMBLY<M2>

<M2> OP F.ASS'Y
<M2> OP ASS'Y

[K185: Non Megapixel CCD MODEL]

DIRECTION OF SYMBOL 'SS' SHOULD BE ASSEMBLED BLUE COLOR PLATE SIDE TOWARD TO OP BLOCK ASSY.

SHOULD BE PUT "CCD PWB" IN THE DIRECTION OF FIG.

<M2> OP F.ASS'Y
<M2> OP BLOCK ASS'Y

[J7C: Megapixel CCD MODEL]

OP ASS'Y LYH20647
OP F.ASS'Y LYH20648


(fig1)

(fig2)

(fig3)

SHOULD BE PUT "CCD PWB" IN THE DIRECTION OF FIG.

5.1.9 MECHANISM ASSEMBLY <M3>

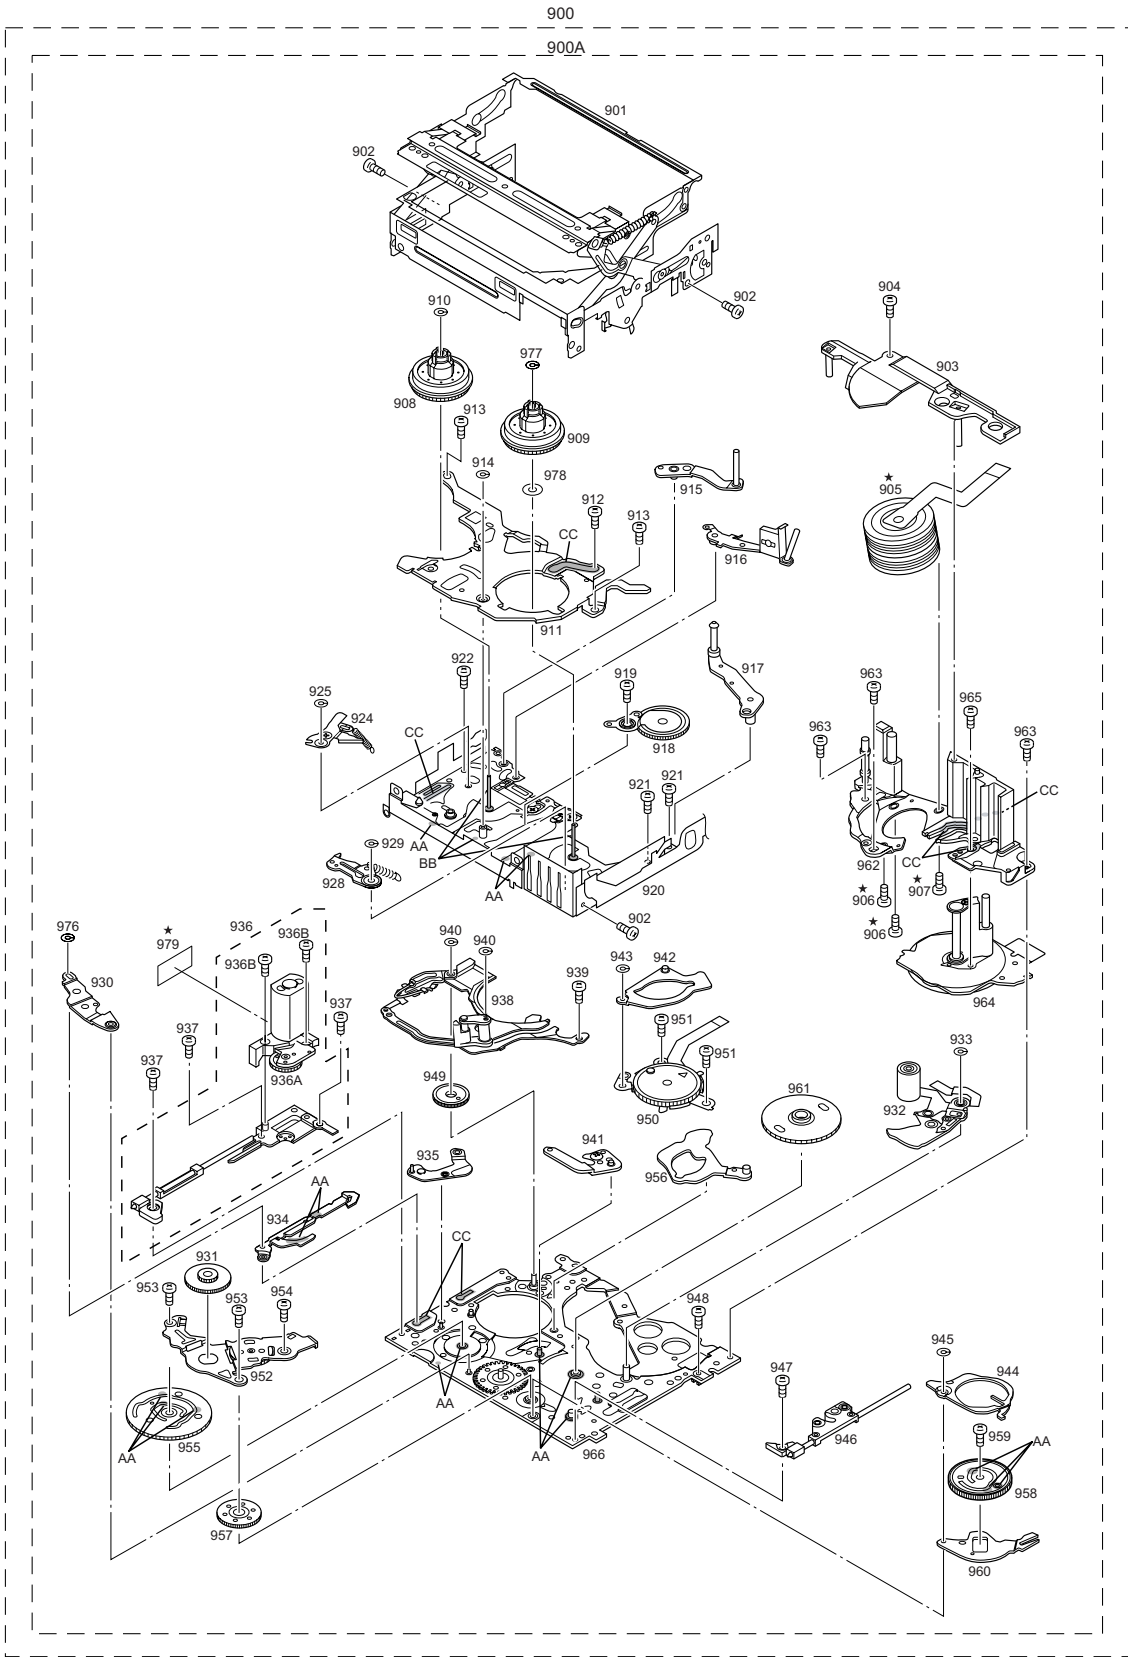

Classification	Part No.	Symbol in drawing
Grease	KYODO-SH-JB	AA
Oil	YTU94027	BB
Grease (HANARL)	RX-410R	CC

NOTE1: The section marked in AA and BB, CC indicate lubrication and greasing areas.

NOTE2: Mark * is not contained in 900A.

5.2 PARTS LIST

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

△ REF No. PART No. PART NAME, DESCRIPTION

PACKING AND ACCESSORY ASSEMBLY<M1>

△	005	QMP1120-190-JR	POWER CORD,B,C,D,F,G,H
△	005	QMP1110-190-JR	POWER CORD,A,E
△	006	LY32203-003A	B.PACK ASSY,BN-V107U-S
	007	LY20750-001A	REMOTE CTL UNIT,RM-V717U
	008	LY32210-051A	CD ROM ASSY
	009	QAM0302-001	ADAPTOR PLUG,PERI-RCAS
	010	QPA02503505P	POLY BAG,ACC.
	012	LY33433-001A	PACKING CASE,A,B,C,D
	012	LY33433-003A	PACKING CASE,E,F,G,H
	013	LY21053-001A	CUSHION
	014	LY30023-003A	POLY BAG
	041	BT-54013-5	WARRANTY CARD,B,C,D,F,G,H
	041	BT-54008-4	GUARANTY CARD,A,E
	051	QPA02003506	POLY BAG,DOCUMENT,B,C,D,F,G,H
	051	YQM30061-3	POLY BAG,DOCUMENT,A,E
△	052	LYT1119-001B	IB(EN),A,E
△	052	LYT1119-002A	IB(GE),B,C,F,G,H
△	052	LYT1119-003A	IB(FR),B,F
△	052	LYT1119-004A	IB(DU),B,F
△	052	LYT1119-005A	IB(SP),B,F
△	052	LYT1119-006A	IB(IT),B,F
△	052	LYT1119-007B	IB(DA),C,G
△	052	LYT1119-008B	IB(FI),C,G
△	052	LYT1119-009B	IB(SW),C,G
△	052	LYT1119-010B	IB(NO),C,G
△	052	LYT1119-011B	IB(RU),D,H
△	052	LYT1119-012B	IB(CZ),D,H
△	052	LYT1119-013B	IB(PO),D,H
△	052	LYT1119-014B	IB(HU),D,H
	053	LYT1085-001A	IB(SOFT.EN),A,E
	053	LYT1085-002A	IB(SOFT.GE),B,C,F,G
	053	LYT1085-003A	IB(SOFT.FR),B,F,H
	053	LYT1085-004A	IB(SOFT.DU),B,F,H
	053	LYT1085-005A	IB(SOFT.SP),B,F,H
	053	LYT1085-006A	IB(SOFT.IT),B,F,H
	053	LYT1085-007A	IB(SOFT.DA),C,G
	053	LYT1085-008A	IB(SOFT.FI),C,G
	053	LYT1085-009A	IB(SOFT.SW),C,G
	053	LYT1085-010A	IB(SOFT.NO),C,G
	053	LYT1085-011A	IB(SOFT.RU),D,H
	054	LYT0194-001B	Q.CARD(JUK),A,E
	055	YU30878	REGIST. CARD,A,E
	056	LYT1119-015A	SHEET(ATT.VF.1),A,B,E,F
	056	LYT1119-016A	SHEET(ATT.VF.2),C,D,G,H
	071	QPA01703005	POLY BAG,CABLE ASSY
	072	QAM0415-001	MULTI CABLE,MULTI
	073	QAM0402-001	RM CABLE,EDIT EXT
	074	QAM0451-001	USB CABLE,USB
	075	QQR0491-002	CORE FILTER,USB 1T
△	076	LY20955-001C	AC ADAPTER,AP-V13E
△	076	or LY20956-001B	AC ADAPTER,AP-V11E
	077	QQR0917-002	CORE FILTER
	078	LY33346-001A	HOOD CAP ASSY
	079	———	BATTERY,X2,FOR RCU
	080	QQR0917-002	CORE FILTER,MULTI
	082	LY30023-014A	POLY BAG,CORE FILT.

△ REF No. PART No. PART NAME, DESCRIPTION

FINAL ASSEMBLY<M2>

102	LYH20627-002A	FRONT ASSY(G),A,B,C,D
102	LYH20627-001A	FRONT ASSY(G),E,F,G,H
103	LYH20622-002A	LOWER ASSY(F),A,B,C,D
103	LYH20622-001A	LOWER ASSY(F),E,F,G,H
104	LYH20626-002A	UPPER ASSY(G),A,B,C,D
104	LYH20626-001A	UPPER ASSY(G),E,F,G,H
106	LY33332-001A	MIC COVER
108	LY44087-001A	MECHA BKT ASSY
109	LY33354-001A	SHIELD PLATE
110	LY43083-001A	BKT(PRE-REC)
111	LY33333-001A	COVER(DV)
112	LY33386-001C	HOLDER(DV/USB)
113	LY21032-001D	TOP COVER
114	LY33318-001A	BRACKET(TOP)
115	LY30019-028A	SPECIAL SCREW,X3,MECHA-BKT
116	QYSPSPT1414M	SCREW,BKTP/R-MEC 1.4mmx1.4mm
117	LY30018-032A	SPECIAL SCREW,X2,SH.P/R-M.B
118	LY30018-032A	SPECIAL SCREW,X3,BKT(M)-ARM
119	LY30018-0K2A	SPECIAL SCREW,BKT(M)-BAS
120	LY30018-0D8A	SPECIAL SCREW,UP-C.OPE(U
121	LY30018-048A	SPECIAL SCREW,UP-C.OPE(L
122	LY30018-043B	SPECIAL SCREW,UP-BASE
123	LY30018-006B	SPECIAL SCREW,X3,UP-ARM
124	LY30018-0E4A	SPECIAL SCREW,X2,COV(D/U)-F
125	LY30018-0B7A	SPECIAL SCREW,UP-FR
126	LY30018-043B	SPECIAL SCREW,FR-ARM
127	LY30018-0E4A	SPECIAL SCREW,BKT(T)-ARM
128	LY30018-043B	SPECIAL SCREW,BKT(T-FR(U
129	LY30018-043B	SPECIAL SCREW,X2,BKT(T-BK(F
130	LY30018-006B	SPECIAL SCREW,TOP-BKT(T)
131	LY30018-0B7A	SPECIAL SCREW,X2,TOP-CO(T/U
132	LY30018-0B7A	SPECIAL SCREW,UP-VF
133	LY30018-0B7A	SPECIAL SCREW,TOP-VF
134	QYSPSPT1730R	SCREW,FR-ARM
183	LY33383-001A	COVER(ADJ)
184	LY41393-005A	COVER(JIG CONN)
185	LY32884-002A	DUMMY BATTERY
186	LY32001-002A	LABEL(HOUSING)
187	LY40699-002A	LABEL(PUSH)
188	LY30018-043B	SPECIAL SCREW,X2,COV(ADJ-AR
189	LY30018-026A	SPECIAL SCREW,COV(JIG-UP
190	QAM0404-002	MEMORY CARD,MMC 8MB*
191	———	TAG

*NOTE :

DATA FILE is not contained in MEMORY CARD of the service part.

OP BLOCK ASSEMBLY<M2>

251	LYH20646-001A	CCD BASE ASS'Y
252	LY33085-002C	OP BLOCK ASSY
252A	PTY33085-006	AUTO IRIS UNIT
252B	LY30723-001B	ZOOM MOTOR UNIT
252C	LY30724-001B	FOCUS MOTOR UNIT
252D	PTY33085-001	SCREW,X7
252E	PTY31727-116	SCREW,X2

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION
253	LY30018-0E7A	SPECIAL SCREW,X2
254	LY44005-001A	SHEET
255	LY44120-001A	OPTICAL LPF
256	LY33288-001A	SPACER

LOWER ASSEMBLY(G)<M2>

502	LY33305-001C	SIDE COVER ASSY
503	LY33306-001A	KNOB(DSC)
504	LY21028-001B	ARM ASSY
505	LY33316-001C	CASS COVER ASSY
506	LY21031-001C	CAMERA OPE UNIT
507	LY32575-002A	BATT. TERNIMAL
508	QAL0467-001	FPC,BATT.FPC
509	WJT0104-001A	E-CARD WIRE, SIDE-SD
510	LY44140-001A	BKT(S.COVER/VF)
511	LY33439-001A	GRIP BELT
512	LY30018-0A2A	SPECIAL SCREW,X2,C.OPE-ARM
513	LY30018-0A2A	SPECIAL SCREW,X2,BATT-ARM
514	LY30018-063A	SPECIAL SCREW,X2,S.COV-S.PW
515	LY30018-0A2A	SPECIAL SCREW,X4,COVER-ARM
516	LY44213-001A	SHEET(BAT.FPC)
517	LY44216-001A	LABEL(C.COVER)
518	LY30030-059B	SPACER(A),X2
519	LY33587-001A	HOLDER(G.OUTER),E,F,G,H
520	LY30030-0P8A	SPACER(A)
521	LY30018-021A	SPECIAL SCREW,SCOV-SPWBL
522	LY30018-060A	SPECIAL SCREW,HLDR-S.COV

LOWER ASSEMBLY(F)<M2>

552	LYH20620-002A	LOWER ASSY(G),A,B,C,D
552	LYH20620-001A	LOWER ASSY(G),E,F,G,H
553	LYH20621-002A	VF ASSY(G),A,B,C,D
553	LYH20621-001A	VF ASSY(G),E,F,G,H
555	LY33342-001A	BKT(OP)
556	WJT0113-001A	E-CARD WIRE,K185-SD
557	LY30018-032A	SPECIAL SCREW,SD-ARM
558	LY30018-019A	SPECIAL SCREW,OP-BKT(OP)
559	LY30018-006B	SPECIAL SCREW,X2,VF-BKT(VF)
560	LY30018-006B	SPECIAL SCREW,BKT(OP)-AR
561	LY30030-0U2A	SPACER(A),FOR OP
562	LY33392-001A	MIC ASSY
563	LY30030-0L8A	SPACER(A),FOR OP
564	LY30030-0L9A	SPACER(A),FOR OP
565	LY30030-0M1A	SPACER(A),X2,FOR OP
566	LY30030-0N4A	SPACER(A),FOR MICWIR

UPPER ASSEMBLY(G)<M2>

601	LYH20625-002A	MONITOR ASSY(G),A,B,C,D
601	LYH20625-001A	MONITOR ASSY(G),E,F,G,H
602	LY33319-001D	U.CASE ASSY
603	LY33580-001A	FRAME(UPPER)AY
604	LY33320-001B	MONI.LOCK ASSY
605	LY44136-001B	COVER(TOP/UPP)L
606	LY44137-001B	COVER(TOP/UPP)R
607	LY33322-001B	SUB OPE UNIT
608	LY33425-001C	BRACKET(SPEAKER

# △ REF No.	PART No.	PART NAME, DESCRIPTION
609	QAS0132-002	SPEAKER
610	LY30018-043B	SPECIAL SCREW,UPPER-FRM
611	LY30018-068A	SPECIAL SCREW,X2,UPPER-HING
612	LY30018-043B	SPECIAL SCREW,X2,C(T/U)-HIN
613	LY30018-043B	SPECIAL SCREW,X2,UPPER-M.LO
614	LY30018-026A	SPECIAL SCREW,UPP-BKT(SP
615	LY30030-0A9A	SPACER(A),SUB OP FPC
616	LY30018-032A	SPECIAL SCREW,X2,MFPC-UFRM
617	LY30018-0D8A	SPECIAL SCREW,MONSW-UPPR
618	LY30030-0F4A	SPACER(A)
619	LY44237-001A	SHEET(SHIELD)
620	LY30030-0K9A	SPACER(A),UPP BSIDE
621	LY30030-0V1A	SPACER(A),UP-SPK1
622	LY30030-0N1A	SPACER(A),UP-SPK2
623	LY30030-0N2A	SPACER(A),FOR MONIFP
624	LY30030-0V2A	SPACER(A),FOR MONIFP
625	LY44295-001A	STICKER,A,B,C,D
625	LY44295-002A	STICKER,E,F,G,H
626	LY30017-022A	SPACER-B,X2,COVER T/U

FRONT ASSEMBLY(G)<M2>

702	LY21036-001C	F.COVER ASSY
703	LY33352-001A	COVER(C)
705	WJT0110-001A	E-CARD WIRE,STROBE-MAI
706	LY30018-063A	SPECIAL SCREW,COV(C)-FR
707	LY30018-021A	SPECIAL SCREW,STB-FR
708	LY30018-021A	SPECIAL SCREW,X2,STB.PWB-FR
709	LY30030-0U9A	SPACER(A),COVER(C)
710	LY30030-0M8A	SPACER(A),STB WIRE
711	LY30030-0Q8A	SPACER(A),FRONT-HOOD

MONITOR ASSEMBLY(G)<M2>

802	LY21052-001C	MONITOR CASE(25,A,B,C,D
802	LY21034-001C	MONITOR CASE(3),E,F,G,H
803	LY33324-001C	M.COVER ASSY
804	LY43438-001A	I.SHEET(M.COVER,M.COV B.S
805	LY33422-001A	LCD BKT(2.5)1,A,B,C,D
805	LY33325-001A	LCD BKT(3INCH)1,E,F,G,H
806	LY33423-001A	LCD BKT(2.5)2,A,B,C,D
806	LY33326-001A	LCD BKT(3INCH)2,E,F,G,H
807	LY33327-001B	HINGE UNIT ASSY
808	NSW0122-001X	DETECT SWITCH
809	DN8797MS-X	IC
810	QLD0272-001	LCD MODULE,A,B,C,D
810	QLD0274-001	LCD MODULE,E,F,G,H
811	QLL0153-001	BACK LIGHT,A,B,C,D
811	QLL0154-001	BACK LIGHT,E,F,G,H
812	LY30018-070A	SPECIAL SCREW,BK(LCD-M.P
813	LY30018-070A	SPECIAL SCREW,M.CAS-HIN
814	LY30018-028A	SPECIAL SCREW,X2,HIN-M.COV
815	LY30018-0A2A	SPECIAL SCREW,X3,M.COV-BK(2
816	LY30030-0F8A	SPACER(A),X2,LCD-BKT1-V,A,B,C,D
816	LY30030-0G1A	SPACER(A),X2,LCD-BKT1-V,E,F,G,H
817	LY30030-0F8A	SPACER(A),X2,LCD-BKT2,A,B,C,D
817	LY30030-0G1A	SPACER(A),X2,LCD-BKT2,E,F,G,H
818	LY30030-0F9A	SPACER(A),X2,LCD-BKT1-H,A,B,C,D
818	LY30030-0G2A	SPACER(A),X2,LCD-BKT1-H,E,F,G,H

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION
819	LY30030-0M6A	SPACER(A),X2,A,B,C,D
819	LY30030-0M6A	SPACER(A),E,F,G,H
820	LY30030-0K7A	SPACER(A),BKT1-MCASE
821	LY30030-0P3A	SPACER(A),BKT2(FPC,A,B,C,D

VF ASSEMBLY(G)<M2>

852	LY33384-001A	B.LIGHT CASE2
853	LY44100-001A	SHEET(DIFF)
854	LY44098-001A	SHEET(POLA),X2
855	LY33335-001B	LCD HOLDER2
856	QLD0193-002	LCD MODULE
857	LY44319-001A	CUSHION(LCD)3
858	LY21047-001C	FRAME(VF)2
859	LY33341-001A	SHEET HOLD
860	LY33382-002A	CASE(VF)ASSY
861	LY33403-001B	GUIDE(OUTER)AY
862	LY33345-001C	S.GUIDE ASSY
863	LY33432-001A	EYE CUP
864	LY44097-001A	SHEET(LENS)
865	LY33379-001B	V.ADJ.PLATE
866	LY44102-001A	S.PLATE
867	LY33378-001A	V.ADJ.KNOB
868	LY44103-001B	LENS HOLDER AY
869	LY30002-055A	COMPRES. SPRING
870	LY44095-001B	STP RING
871	LY44096-001A	GUIDE SCREW,X2
872	WJT0111-001A	E-CARD WIRE
874	LY30030-0A8A	SPACER(A)
875	LY30018-0B7A	SPECIAL SCREW,X2
876	LY44287-001A	EARTH SHEET

MECHANISM ASSEMBLY<M3>

900	YMA0029H	MECHA(A)ASSY	
900A	YMA0029D	MECHA(A)ASSY	
901	LY32870-001G	CASSETTEHOUSING ASSY	
902	YQ43893-8	MINI SCREW	(x3)
903	LYH30420-001A	UPPER BASE ASSY	
904	QYSPSPU1425M	SCREW	
905	YDV2102B	DRUM ASSY	
906	LY42820-001A	DAMP.SCREW ASSY	(x2)
907	LY42820-002A	DAMP.SCREW ASSY	
908	LY31538-001F	REEL DISK ASSY	
909	LY31538-002H	REEL DISK ASSY	
910	YQ44246	SLIT WASHER	
911	LY10372-001D	REEL COVER ASSY	
912	LY42120-002A	MINI SCREW	
913	LY41945-003A	MINI SCREW	(x2)
914	YQ44246	SLIT WASHER	
915	LY43725-001D	TENSION ARM ASSY	
916	LYH40269-001A	SLANT POLE ARM ASSY	
917	LY43731-001F	TU ARM ASSY	
918	LY31531-001D	SWING ARM ASSY	
919	YQ43893	MINI SCREW	
920	LYH30424-001A	SLIDE DECK FINAL ASSY	
921	YQ43893	MINI SCREW	(x2)
922	LY43023-001A	MINI SCREW	
924	LYH30419-001A	PAD ARM ASSY	

# △ REF No.	PART No.	PART NAME, DESCRIPTION	
925	YQ44246	SLIT WASHER	
928	LYH40270-001A	TU BRAKE ASSY	
929	YQ44246	SLIT WASHER	
930	LY43684-001A	TENSION CONTROL LEVER ASSY	
931	LY32861-001A	CENTER GEAR	
932	LY31516-001F	PINCH ROLLER ARM FINAL ASSY	
933	YQ44246	SLIT WASHER	
934	LY43681-001A	TENSION CONTROL PLATE ASSY	
935	LY43687-001A	BRAKE CONTROL LEVER ASSY	
936	LYH30421-001A	MOTOR BRACKET ASSY	
936A	QAR0138-001	LOADING MOTOR	
936B	LY41940-001A	TAPPING SCREW	(x2)
937	YQ43893	MINI SCREW	(x3)
938	LYH30422-001A	GUIDE RAIL ASSY	
939	YQ43893	MINI SCREW	
940	YQ44246	SLIT WASHER	(x2)
941	LY32843-001A	SLIDE LEVER2 ASSY	
942	LY43690-001A	LOADING PLATE ASSY	
943	YQ44246	SLIT WASHER	
944	LY32858-001A	EJECT LEVER	
945	YQ44246	SLIT WASHER	
946	LYH40271-001A	BASE R ASSY	
947	YQ43893	MINI SCREW	
948	LY41945-001B	MINI SCREW	
949	LY43665-001A	MODE GEAR	
950	QSW0876-003	ROTARY ENCODER	
951	YQ43893	MINI SCREW	(x2)
952	LY32860-001A	GEAR COVER ASSY	
953	YQ43893	MINI SCREW	(x2)
954	YQ43893-4	MINI SCREW	
955	LY43676-001A	MAIN CAM ASSY	
956	LY41941-001B	SLIDE ARM ASSY	
957	LY43678-001A	CONNECT GEAR 2	
958	LY41954-001C	SUB CAM ASSY	
959	LY42120-001A	MINI SCREW	
960	LY43692-001A	CONTROL ARM ASSY	
961	LY32859-001A	REEL GEAR 1	
962	LY31508-002B	DRUM BASE ASSY	
963	QYSPSPU1425M	SCREW	1.4mm x 2.5mm(x3)
964	QAR0142-001	CAPSTAN MOTOR	
965	YQ43893	MINI SCREW	
966	LY10367-001D	MAIN DECK ASSY	
976	YQ44246	SLIT WASHER	
977	YQ44246-6	SLIT WASHER	
978	LY42047-005A	WASHER	
979	LY43987-001B	SPACER	

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

#	△	REF No.	PART No.	PART NAME, DESCRIPTION

MAIN BOARD ASSEMBLY <01>				
PW1			YB10426A-02	MAIN BOARD ASSY
IC1001			MN103S33NJG	IC(MICRO C ROM),MASK
IC1001	or		MN103SF33NY4JG	IC(MICRO C ROM),FLASH
IC1002			MB90097PFV149-X	IC(MICRO C ROM),MB90099
IC1003			SN74AHC1G00K-X	IC
IC1004			NJU7108F3-X	IC
IC1005			25LC320X-I/ST-X	IC
IC1006			RS5C314-X	IC
IC1007			IC-PST3423U-X	IC
IC1007	or		S-80823CNNB-X	IC
IC1601			BD6637KS	IC,MDA BD6637
IC1701			LM358DR2-X	IC,REELAMP5V
IC1702			BA10393F-XE	IC,REELSMT
IC1801			BA10358FVM-W	IC,IR AMP
IC1851			RPM7138	IR DETECT UNIT,IR
IC2101			AK4550VT-X	IC
IC2201			AK4564VQ	IC
IC3001			JCY0152	IC,JCY0152
IC3002			BU2501FV-X	IC
IC3005			JCY0136-X	IC,JCY0136-X
IC3501			JCY0132	IC
IC3502			SN74AHC1G04K-X	IC
IC3701			BA7665FS-X	IC
IC3731			MM1504XN-X	IC
IC3801			JCP8045	IC(DIGITAL)
IC4201			HD49340NP-X	IC,CDS/AD QFN
IC4202			MM1613AN-X	IC,REG 3V
IC4301			JCY0200	IC,CAM DSP
IC4302			R1160N151B-X	IC,REG 1.5V
IC5501			JCY0185	IC,TG/VDR
IC6001			S-80842CNNB-W	IC
IC6002			S-817A33ANB-W	IC
IC6003			R1224N102G-X	IC
IC6101			FA3698F	IC,SW_REG IC
IC6601			TC7W74FU-X	IC(DIGITAL)
IC6601	or		TC7WH74FU-X	IC(DIGITAL)
IC6602			BA10358FVM-W	IC
IC8001			TMS320DSC24GHKL	IC,DSC24
IC8002			K4S643232F-TC60	IC,64MSDRAM
IC8002	or		HY57643220CT55	IC,64MSDRAM
IC8002	or		HY57643220CT7	IC,64MSDRAM
IC8003			MBV160TE90PBA08	IC(MICRO C ROM),16MFLASH
IC8004			BU2288FV-X	IC,FS PLL
IC8301			ISP1181ABS	IC,USBQNFμ2.6
IC8302			S-80842CNNB-W	IC
Q1001			DTA114EE-X	DIGI TRANSISTOR
Q1001	or		PDTA114EE-X	DIGI TRANSISTOR
Q1001	or		RN2102-X	DIGI TRANSISTOR
Q1002			UMC3N-W	DIGI TRANSISTOR
Q1003			UMC3N-W	DIGI TRANSISTOR
Q1004			UMC3N-W	DIGI TRANSISTOR
Q1005			DTC143XE-X	DIGI TRANSISTOR
Q1006			UMC3N-W	DIGI TRANSISTOR
Q1007			2SC4617/QR/-X	TRANSISTOR
Q1008			DTC124EE-X	DIGI TRANSISTOR
Q1008	or		PDTC124EE-X	DIGI TRANSISTOR
Q1009			2SJ347-X	MOS FET
Q1010			DTC143EE-X	DIGI TRANSISTOR
Q1601			UMC3N-W	DIGI TRANSISTOR,LD ON

#	△	REF No.	PART No.	PART NAME, DESCRIPTION
Q1801			RPM-22PB	PHOTO TRANSISTO
Q2401			2SC4617/QR/-X	TRANSISTOR
Q2403			2SC4617/QR/-X	TRANSISTOR
Q2801			UMX1N-W	PAIR TRANSISTOR
Q3001			2SC4617/RS/-X	TRANSISTOR
Q3002			2SC4617/RS/-X	TRANSISTOR
Q3701			UMT1N-W	PAIR TRANSISTOR
Q3701	or		XP4401-W	TRANSISTOR
Q3702			UMZ1N-W	PAIR TRANSISTOR
Q3702	or		XP4601-W	TRANSISTOR
Q3704			2SA1774/RS/-X	TRANSISTOR
Q3705			UMT1N-W	PAIR TRANSISTOR
Q3705	or		XP4401-W	TRANSISTOR
Q3731			2SC4617/RS/-X	TRANSISTOR
Q3731	or		2SD2216J/RS/-X	TRANSISTOR
Q3732			DTC144EE-X	DIGI TRANSISTOR
Q3732	or		UN9213J-X	DIGI TRANSISTOR
Q3732	or		RN1104-X	DIGI TRANSISTOR
Q3732	or		PDTC144EE-X	DIGI TRANSISTOR
Q3733			UMZ1N-W	PAIR TRANSISTOR
Q3733	or		XP4601-W	TRANSISTOR
Q3734			2SC4617/RS/-X	TRANSISTOR
Q3734	or		2SD2216J/RS/-X	TRANSISTOR
Q3735			UMZ1N-W	PAIR TRANSISTOR
Q3735	or		XP4601-W	TRANSISTOR
Q6001			DTC144EE-X	DIGI TRANSISTOR
Q6001	or		RN1104-X	DIGI TRANSISTOR
Q6001	or		PDTC144EE-X	DIGI TRANSISTOR
Q6001	or		UN9213J-X	DIGI TRANSISTOR
Q6002			MCH6613-W	MOS FET
Q6003			FML9-W	TRANSISTOR
Q6201			QS6U24-W	MOS FET
Q6202			2SA1577/RS/-X	TRANSISTOR
Q6203			QS6U24-W	MOS FET
Q6204			QS6U24-W	MOS FET
Q6205			CPH3101-X	TRANSISTOR
Q6206			DTC124TE-X	DIGI TRANSISTOR
Q6206	or		UN9210J-X	DIGI TRANSISTOR
Q6207			QS6U24-W	MOS FET
Q6208			QS6U24-W	MOS FET
Q6209			CPH3314-X	MOS FET
Q6210			HN1C01FU/G/-X	PAIR TRANSISTOR
Q6210	or		PUMX1-W	PAIR TRANSISTOR
Q6210	or		UMX1N-W	PAIR TRANSISTOR
Q6211			2SA1577/RS/-X	TRANSISTOR
Q6213			HN1A01FU/G/-X	PAIR TRANSISTOR
Q6213	or		PUMT1-W	PAIR TRANSISTOR
Q6213	or		UMT1N-W	PAIR TRANSISTOR
Q6214			2SC4617/RS/-X	TRANSISTOR
Q6601			DTC144EE-X	DIGI TRANSISTOR
Q6601	or		RN1104-X	DIGI TRANSISTOR
Q6601	or		UN9213J-X	DIGI TRANSISTOR
Q6601	or		PDTC144EE-X	DIGI TRANSISTOR
Q6602			UMS1N-W	PAIR TRANSISTOR
Q6611			2SA1774/RS/-X	TRANSISTOR
Q6612			UMS1N-W	PAIR TRANSISTOR
Q6613			2SC4617/RS/-X	TRANSISTOR
Q6614			RN1702-X	DIGI TRANSISTOR
Q6615			UMC4N-W	DIGI TRANSISTOR
Q6701			CPH3314-X	MOS FET
Q8001			2SA1774/RS/-X	TRANSISTOR,2SA1774
D1001			DA221-X	SI DIODE
D1602			DAP222-X	SI DIODE,LD OUT

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

#	△	REF No.	PART No.	PART NAME, DESCRIPTION	#	△	REF No.	PART No.	PART NAME, DESCRIPTION
			D1602	or MA132WA-X			R1055	NRSA6AJ-334W	MG RESISTOR 330kΩ,1/16W
			D1603	DAP222-X			R1056	NRSA6AJ-334W	MG RESISTOR 330kΩ,1/16W
			D1603	or MA132WA-X			R1057	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
			D1604	DAP222-X			R1058	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
			D1604	or MA132WA-X			R1059	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
			D1801	SML-711UW-X			R1060	NRSA6AJ-561W	MG RESISTOR 560Ω,1/16W
			D2807	RSA6.1J4-W			R1061	NRSA6AJ-561W	MG RESISTOR 560Ω,1/16W
			D3001	EC2C01C-X			R1062	NRSA6AJ-224W	MG RESISTOR 220kΩ,1/16W
			D3002	EC2C01C-X			R1063	NRSA6AJ-472W	MG RESISTOR 4.7kΩ,1/16W
			D3003	EC2C01C-X			R1064	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			D3004	MA2Z720-X			R1065	NRSA6AJ-153W	MG RESISTOR 15kΩ,1/16W
			D5501	1SS355-X			R1066	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
△			D6001	RB706D-40-X			R1067	NRSA6AJ-334W	MG RESISTOR 330kΩ,1/16W
△			D6002	RB715F-X			R1068	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
			D6201	RB480Y-W			R1069	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W
			D6203	RB480Y-W			R1070	NRSA6AJ-154W	MG RESISTOR 150kΩ,1/16W
			D6701	EP10HY03-X			R1071	NRSA6AJ-272W	MG RESISTOR 2.7kΩ,1/16W
			D6702	EP10HY03-X			R1072	NRSA6AJ-183W	MG RESISTOR 18kΩ,1/16W
			D8301	1SS355-X			R1073	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			D8301	or MA111-X			R1074	NRSA6AJ-472W	MG RESISTOR 4.7kΩ,1/16W
			R1001	NRSA6AJ-105W	MG RESISTOR		R1075	NRSA6AJ-473W	MG RESISTOR 47kΩ,1/16W
			R1002	NRSA6AJ-104W	MG RESISTOR		R1076	NRSA6AJ-473W	MG RESISTOR 47kΩ,1/16W
			R1003	NRSA6AJ-104W	MG RESISTOR		R1077	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W
			R1006	NRSA6AJ-102W	MG RESISTOR		R1078	NRSA6AJ-393W	MG RESISTOR 39kΩ,1/16W
			R1007	NRSA6AJ-0R0W	MG RESISTOR		R1079	NRSA6AJ-223W	MG RESISTOR 22kΩ,1/16W
			R1008	NRSA6AJ-103W	MG RESISTOR		R1080	NRSA6AJ-822W	MG RESISTOR 8.2kΩ,1/16W
			R1009	NRSA6AJ-103W	MG RESISTOR		R1081	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			R1010	NRSA6AJ-0R0W	MG RESISTOR		R1082	NRSA6AJ-123W	MG RESISTOR 12kΩ,1/16W
			R1012	NRSA6AJ-102W	MG RESISTOR		R1083	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
			R1013	NRSA6AJ-102W	MG RESISTOR		R1084	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
			R1014	NRSA6AJ-102W	MG RESISTOR		R1085	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
			R1015	NRSA6AJ-102W	MG RESISTOR		R1086	NRSA6AJ-332W	MG RESISTOR 3.3kΩ,1/16W
			R1016	NRSA6AJ-103W	MG RESISTOR		R1087	NRSA6AJ-332W	MG RESISTOR 3.3kΩ,1/16W
			R1017	NRSA6AJ-474W	MG RESISTOR		R1088	NRSA6AJ-332W	MG RESISTOR 3.3kΩ,1/16W
			R1018	NRSA6AJ-474W	MG RESISTOR		R1089	NRSA6AJ-332W	MG RESISTOR 3.3kΩ,1/16W
			R1019	NRSA6AJ-102W	MG RESISTOR		R1090	NRSA6AJ-561W	MG RESISTOR 560Ω,1/16W
			R1020	NRSA6AJ-104W	MG RESISTOR		R1091	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			R1021	NRSA6AJ-104W	MG RESISTOR		R1092	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			R1022	NRSA6AJ-102W	MG RESISTOR		R1093	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			R1023	NRSA6AJ-102W	MG RESISTOR		R1094	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			R1024	NRSA6AJ-104W	MG RESISTOR		R1095	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
			R1025	NRSA6AJ-104W	MG RESISTOR		R1096	NRSA6AJ-332W	MG RESISTOR 3.3kΩ,1/16W
			R1027	NRSA6AJ-0R0W	MG RESISTOR		R1097	NRSA6AJ-682W	MG RESISTOR 6.8kΩ,1/16W
			R1030	NRSA6AJ-753W	MG RESISTOR		R1099	NRSA6AJ-223W	MG RESISTOR 22kΩ,1/16W
			R1031	NRSA6AJ-334W	MG RESISTOR		R1601	NRSA6AJ-681W	MG RESISTOR 680Ω,1/16W
			R1032	NRSA6AJ-332W	MG RESISTOR		R1602	NRSA6AJ-124W	MG RESISTOR 120kΩ,1/16W
			R1033	NRSA6AJ-332W	MG RESISTOR		R1603	NRSA6AJ-472W	MG RESISTOR 4.7kΩ,1/16W
			R1034	NRSA6AJ-332W	MG RESISTOR		R1604	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W
			R1035	NRSA6AJ-102W	MG RESISTOR		R1610	NRSA6AJ-471W	MG RESISTOR 470Ω,1/16W
			R1037	NRSA6AJ-103W	MG RESISTOR		R1611	NRSA6AJ-471W	MG RESISTOR 470Ω,1/16W
			R1039	NRSA6AJ-152W	MG RESISTOR		R1612	NRSA6AJ-104W	MG RESISTOR 100kΩ,1/16W
			R1043	NRSA6AJ-102W	MG RESISTOR		R1613	NRSA6AJ-102W	MG RESISTOR 1kΩ,1/16W
			R1044	NRSA6AJ-104W	MG RESISTOR		R1614	NRZ0072-R330X	MG RESISTOR 0.33Ω,1/4WF
			R1045	NRSA6AJ-105W	MG RESISTOR		R1616	NRSA6AD-332W	MG RESISTOR 3.3kΩ,1/16W
			R1046	NRSA6AJ-104W	MG RESISTOR		R1617	NRZ0072-R330X	MG RESISTOR 0.33Ω,1/4WF
			R1047	NRSA6AJ-104W	MG RESISTOR		R1620	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			R1048	NRSA6AJ-103W	MG RESISTOR		R1621	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			R1049	NRSA6AJ-623W	MG RESISTOR		R1622	NRSA6AJ-103W	MG RESISTOR 10kΩ,1/16W
			R1050	NRSA6AJ-823W	MG RESISTOR		R1624	NRSA6AD-183W	MG RESISTOR 18kΩ,1/16W
			R1051	NRSA6AJ-473W	MG RESISTOR		R1625	NRSA6AD-361W	MG RESISTOR 360Ω,1/16W
			R1052	NRSA6AJ-104W	MG RESISTOR		R1629	NRSA6AJ-564W	MG RESISTOR 560kΩ,1/16W
			R1053	NRSA6AJ-222W	MG RESISTOR		R1630	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W
			R1054	NRSA6AJ-104W	MG RESISTOR		R1631	NRSA6AJ-0R0W	MG RESISTOR 0Ω,1/16W

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
R1635	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R2802	NRSA6AJ-821W	MG RESISTOR	820Ω,1/16W
R1636	NRSA6AJ-123W	MG RESISTOR	12kΩ,1/16W	R2803	NRSA6AJ-564W	MG RESISTOR	560kΩ,1/16W
R1637	NRSA6AJ-154W	MG RESISTOR	150kΩ,1/16W	R2804	NRSA6AJ-564W	MG RESISTOR	560kΩ,1/16W
R1638	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R2805	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W
R1639	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R2806	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1640	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R2807	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1641	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R2808	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1642	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R2809	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1648	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R2810	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R1701	NRSA6AJ-823W	MG RESISTOR	82kΩ,1/16W	R2812	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R1702	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R2813	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R1703	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R2814	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1704	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R3002	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1705	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R3004	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1706	NRSA6AJ-823W	MG RESISTOR	82kΩ,1/16W	R3005	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W
R1707	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3006	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W
R1708	NRSA6AJ-124W	MG RESISTOR	120kΩ,1/16W	R3007	NRSA6AJ-562W	MG RESISTOR	5.6kΩ,1/16W
R1709	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3008	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W
R1710	NRSA6AJ-124W	MG RESISTOR	120kΩ,1/16W	R3009	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1711	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R3010	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R1712	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R3011	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W
R1801	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W	R3013	NRSA6AJ-242W	MG RESISTOR	2.4kΩ,1/16W
R1802	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3014	NRSA6AJ-392W	MG RESISTOR	3.9kΩ,1/16W
R1803	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W	R3015	NRSA6AJ-392W	MG RESISTOR	3.9kΩ,1/16W
R1804	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W	R3016	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W
R1805	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3017	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W
R1806	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3018	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W
R1807	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3019	NRVA6AD-560W	CMF RESISTOR	56Ω,1/16W
R1808	NRSA6AJ-302W	MG RESISTOR	3kΩ,1/16W	R3020	NRVA6AD-512W	CMF RESISTOR	5.1kΩ,1/16W
R1851	NRSA6AJ-470W	MG RESISTOR	47Ω,1/16W	R3021	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2101	NRSA6AJ-471W	MG RESISTOR	470Ω,1/16W	R3025	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R2102	NRSA6AJ-471W	MG RESISTOR	470Ω,1/16W	R3027	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R2103	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R3029	NRSA6AJ-822W	MG RESISTOR	8.2kΩ,1/16W
R2201	NRSA6AJ-684W	MG RESISTOR	680kΩ,1/16W	R3030	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W
R2202	NRSA6AJ-564W	MG RESISTOR	560kΩ,1/16W	R3031	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W
R2203	NRSA6AJ-393W	MG RESISTOR	39kΩ,1/16W	R3032	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W
R2204	NRSA6AJ-154W	MG RESISTOR	150kΩ,1/16W	R3034	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W
R2206	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W	R3036	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R2207	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W	R3037	NRSA6AJ-681W	MG RESISTOR	680Ω,1/16W
R2208	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W	R3057	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W
R2209	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W	R3066	NRSA6AJ-561W	MG RESISTOR	560Ω,1/16W
R2212	NRSA6AJ-2R7W	MG RESISTOR	2.7Ω,1/16W	R3067	NRSA6AJ-561W	MG RESISTOR	560Ω,1/16W
R2213	NRSA6AJ-2R7W	MG RESISTOR	2.7Ω,1/16W	R3068	NRSA6AJ-181W	MG RESISTOR	180Ω,1/16W
R2217	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W	R3069	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R2225	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R3071	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2226	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R3074	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R2227	NRSA6AJ-821W	MG RESISTOR	820Ω,1/16W	R3501	NRSA6AJ-471W	MG RESISTOR	470Ω,1/16W
R2228	NRSA6AJ-821W	MG RESISTOR	820Ω,1/16W	R3502	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R2229	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R3503	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R2230	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R3504	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2401	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3505	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2402	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R3506	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2403	NRSA6AJ-183W	MG RESISTOR	18kΩ,1/16W	R3507	NRSA6AD-241W	MG RESISTOR	240Ω,1/16W
R2407	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W	R3508	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W
R2601	NRSA6AJ-272W	MG RESISTOR	2.7kΩ,1/16W	R3511	NRSA6AJ-101W	MG RESISTOR	100Ω,1/16W
R2602	NRSA6AJ-272W	MG RESISTOR	2.7kΩ,1/16W	R3521	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2607	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W	R3522	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2608	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W	R3523	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2609	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W	R3524	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2610	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W	R3525	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2613	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3526	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2614	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R3527	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R2801	NRSA6AJ-821W	MG RESISTOR	820Ω,1/16W	R3701	NRSA6AD-271W	MG RESISTOR	270Ω,1/16W

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

#  REF No.	PART No.	PART NAME, DESCRIPTION		#  REF No.	PART No.	PART NAME, DESCRIPTION	
R3702	NRSA6AD-271W	MG RESISTOR	270Ω,1/16W	R4329	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3703	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R4330	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3704	NRSA6AD-301W	MG RESISTOR	300Ω,1/16W	R4331	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3705	NRSA6AD-301W	MG RESISTOR	300Ω,1/16W	R4332	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3706	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R4333	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3707	NRSA6AD-680W	MG RESISTOR	68Ω,1/16W	R4334	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3708	NRSA6AD-680W	MG RESISTOR	68Ω,1/16W	R4335	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3709	NRSA6AD-680W	MG RESISTOR	68Ω,1/16W	R4336	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3710	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R4337	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3711	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R4338	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3712	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W	R4339	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3713	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R4341	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3714	NRSA6AJ-823W	MG RESISTOR	82kΩ,1/16W	R4342	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3715	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R4343	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3722	NRSA6AD-131W	MG RESISTOR	130Ω,1/16W	R4345	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3724	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W	R4346	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3725	NRSA6AD-131W	MG RESISTOR	130Ω,1/16W	R4348	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3726	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R4349	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3727	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R4350	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3728	NRVA6AD-131W	CMF RESISTOR	130Ω,1/16W	R4351	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3730	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R4352	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3731	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W	R4353	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3732	NRSA6AJ-101W	MG RESISTOR	100Ω,1/16W	R4354	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3733	NRSA6AD-561W	MG RESISTOR	560Ω,1/16W	R4355	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3734	NRSA6AJ-822W	MG RESISTOR	8.2kΩ,1/16W	R4356	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3735	NRSA6AD-182W	MG RESISTOR	1.8kΩ,1/16W	R5503	NRSA6AJ-220W	MG RESISTOR	22Ω,1/16W
R3736	NRSA6AJ-183W	MG RESISTOR	18kΩ,1/16W	R5504	NRSA6AJ-220W	MG RESISTOR	22Ω,1/16W
R3737	NRSA6AJ-183W	MG RESISTOR	18kΩ,1/16W	R5505	NRSA6AJ-220W	MG RESISTOR	22Ω,1/16W
R3738	NRSA6AJ-681W	MG RESISTOR	680Ω,1/16W	R5506	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W
R3739	NRSA6AJ-821W	MG RESISTOR	820Ω,1/16W	R5507	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W
R3740	NRSA6AJ-821W	MG RESISTOR	820Ω,1/16W	R5509	NRSA6AJ-470W	MG RESISTOR	47Ω,1/16W
R3741	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R5511	NRSA6AJ-470W	MG RESISTOR	47Ω,1/16W
R3742	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R5512	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R3743	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	R5513	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R3744	NRSA6AD-561W	MG RESISTOR	560Ω,1/16W	R5514	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R3745	NRSA6AD-152W	MG RESISTOR	1.5kΩ,1/16W	R6001	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R3746	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W	R6002	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R3747	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R6003	NRSA6AJ-224W	MG RESISTOR	220kΩ,1/16W
R3748	NRSA6AJ-474W	MG RESISTOR	470kΩ,1/16W	R6004	NRSA6AJ-183W	MG RESISTOR	18kΩ,1/16W
R3801	NRSA6AJ-101W	MG RESISTOR	100Ω,1/16W	R6005	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R3802	NRSA6AD-821W	MG RESISTOR	820Ω,1/16W	 R6006	NRSA63J-471X	MG RESISTOR	470Ω,1/16W
R3803	NRSA6AD-273W	MG RESISTOR	27kΩ,1/16W	 R6007	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R3804	NRSA6AD-153W	MG RESISTOR	15kΩ,1/16W	R6008	NRSA6AJ-681W	MG RESISTOR	680Ω,1/16W
R3805	NRSA6AD-821W	MG RESISTOR	820Ω,1/16W	R6009	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R3807	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R6010	NRSA6AD-513W	MG RESISTOR	51kΩ,1/16W
R4201	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W	R6012	NRSA6AD-243W	MG RESISTOR	24kΩ,1/16W
R4202	NRSA6AJ-470W	MG RESISTOR	47Ω,1/16W	R6101	NRSA6AD-103W	MG RESISTOR	10kΩ,1/16W
R4206	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W	R6102	NRSA6AJ-751W	MG RESISTOR	750Ω,1/16W
R4207	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W	R6103	NRSA6AD-622W	MG RESISTOR	6.2kΩ,1/16W
R4301	NRSA6AJ-220W	MG RESISTOR	22Ω,1/16W	R6104	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W
R4303	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R6105	NRSA6AJ-562W	MG RESISTOR	5.6kΩ,1/16W
R4304	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R6106	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W
R4306	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R6107	NRSA6AJ-153W	MG RESISTOR	15kΩ,1/16W
R4307	NRSA6AJ-470W	MG RESISTOR	47Ω,1/16W	R6108	NRSA6AJ-823W	MG RESISTOR	82kΩ,1/16W
R4308	NRSA6AJ-470W	MG RESISTOR	47Ω,1/16W	R6109	NRSA6AJ-823W	MG RESISTOR	82kΩ,1/16W
R4309	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R6110	NRSA6AD-153W	MG RESISTOR	15kΩ,1/16W
R4310	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R6111	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4315	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R6112	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4317	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R6113	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R4319	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R6201	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4321	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R6202	NRSA6AD-223W	MG RESISTOR	22kΩ,1/16W
R4326	NRSA6AJ-470W	MG RESISTOR	47Ω,1/16W	R6203	NRSA6AJ-474W	MG RESISTOR	470kΩ,1/16W
R4328	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R6204	NRSA6AD-103W	MG RESISTOR	10kΩ,1/16W

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
R6205	NRSA6AJ-473W	MG RESISTOR	47kΩ,1/16W	R8007	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R6206	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	R8008	NRSA6AJ-561W	MG RESISTOR	560Ω,1/16W
R6207	NRSA6AD-183W	MG RESISTOR	18kΩ,1/16W	R8009	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W
R6208	NRSA6AD-123W	MG RESISTOR	12kΩ,1/16W	R8011	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R6209	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R8012	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R6210	NRSA6AD-123W	MG RESISTOR	12kΩ,1/16W	R8013	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R6211	NRSA6AD-153W	MG RESISTOR	15kΩ,1/16W	R8014	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R6212	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R8016	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R6213	NRSA6AD-183W	MG RESISTOR	18kΩ,1/16W	R8017	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R6215	NRSA6AD-472W	MG RESISTOR	4.7kΩ,1/16W	R8019	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R6216	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	R8021	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R6217	NRSA6AJ-152W	MG RESISTOR	1.5kΩ,1/16W	R8022	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R6218	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R8023	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R6219	NRSA6AD-243W	MG RESISTOR	24kΩ,1/16W	R8025	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R6220	NRSA6AD-302W	MG RESISTOR	3kΩ,1/16W	R8027	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R6221	NRSA6AD-104W	MG RESISTOR	100kΩ,1/16W	R8028	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R6222	NRSA6AD-123W	MG RESISTOR	12kΩ,1/16W	R8029	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R6223	NRSA6AD-103W	MG RESISTOR	10kΩ,1/16W	R8030	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R6224	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R8031	NRSA6AJ-100W	MG RESISTOR	10Ω,1/16W
R6225	NRSA6AD-473W	MG RESISTOR	47kΩ,1/16W	R8032	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R6226	NRSA6AD-562W	MG RESISTOR	5.6kΩ,1/16W	R8033	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R6227	NRSA6AD-273W	MG RESISTOR	27kΩ,1/16W	R8036	NRSA6AJ-220W	MG RESISTOR	22Ω,1/16W
R6228	NRSA6AD-473W	MG RESISTOR	47kΩ,1/16W	R8302	NRS181J-220X	MG RESISTOR	22Ω,1/8W
R6229	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	R8303	NRS181J-220X	MG RESISTOR	22Ω,1/8W
R6230	NRSA6AJ-272W	MG RESISTOR	2.7kΩ,1/16W	R8305	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W
R6231	NRSA6AD-473W	MG RESISTOR	47kΩ,1/16W	R8306	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R6232	NRSA6AD-332W	MG RESISTOR	3.3kΩ,1/16W	R8307	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R6233	NRSA6AD-104W	MG RESISTOR	100kΩ,1/16W	R8308	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R6234	NRSA6AD-473W	MG RESISTOR	47kΩ,1/16W	R8309	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R6235	NRSA6AJ-273W	MG RESISTOR	27kΩ,1/16W	R8310	NRSA6AJ-153W	MG RESISTOR	15kΩ,1/16W
R6236	NRSA6AJ-822W	MG RESISTOR	8.2kΩ,1/16W	R8311	NRSA6AJ-473W	MG RESISTOR	47kΩ,1/16W
R6237	NRSA6AD-473W	MG RESISTOR	47kΩ,1/16W	R8313	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R6238	NRSA6AD-683W	MG RESISTOR	68kΩ,1/16W	R8314	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W
R6241	NRSA6AD-753W	MG RESISTOR	75kΩ,1/16W	R8315	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W
R6242	NRSA6AD-104W	MG RESISTOR	100kΩ,1/16W	RA1001	NRZ0034-473W	NET RESISTOR	
R6243	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W	RA1002	NRZ0034-104W	NET RESISTOR	100kΩ
R6244	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	RA1003	NRZ0034-104W	NET RESISTOR	100kΩ
R6245	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W	RA1004	NRZ0034-104W	NET RESISTOR	100kΩ
R6601	NRSA6AJ-822W	MG RESISTOR	8.2kΩ,1/16W	RA1005	NRZ0034-103W	NET RESISTOR	10kΩ,1/32W
R6603	NRVA6AD-683W	CMF RESISTOR	68kΩ,1/16W	RA1006	NRZ0034-102W	NET RESISTOR	
R6604	NRVA6AD-104W	CMF RESISTOR	100kΩ,1/16W	RA1007	NRZ0034-102W	NET RESISTOR	
R6605	NRSA6AJ-184W	MG RESISTOR	180kΩ,1/16W	RA1008	NRZ0034-104W	NET RESISTOR	100kΩ
R6606	NRSA6AJ-823W	MG RESISTOR	82kΩ,1/16W	RA3001	NRZ0034-560W	NET RESISTOR	
R6611	NRSA6AJ-335W	MG RESISTOR	3.3MΩ,1/16W	RA3002	NRZ0034-560W	NET RESISTOR	
R6612	NRSA6AJ-474W	MG RESISTOR	470kΩ,1/16W	RA3003	NRZ0034-100W	NET RESISTOR	10Ω
R6613	NRSA6AJ-473W	MG RESISTOR	47kΩ,1/16W	RA3004	NRZ0034-103W	NET RESISTOR	10kΩ,1/32W
R6614	NRSA6AJ-473W	MG RESISTOR	47kΩ,1/16W	RA3005	NRZ0040-0R0X	NET RESISTOR,3216	
R6615	NRSA6AJ-684W	MG RESISTOR	680kΩ,1/16W	RA4201	NRZ0034-100W	NET RESISTOR,(1005*4)	10Ω
R6618	NRSA6AJ-154W	MG RESISTOR	150kΩ,1/16W	RA4202	NRZ0034-100W	NET RESISTOR,(1005*4)	10Ω
R6619	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W	RA4301	NRZ0034-101W	NET RESISTOR,(1005*4)	
R6620	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W	RA4302	NRZ0034-101W	NET RESISTOR,(1005*4)	
R6621	NRSA6AJ-563W	MG RESISTOR	56kΩ,1/16W	RA4303	NRZ0034-101W	NET RESISTOR,(1005*4)	
R6623	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W	RA4304	NRZ0034-101W	NET RESISTOR,(1005*4)	
R6701	NRZ0058-R20X	MG RESISTOR	0.2Ω,1/2W	RA4305	NRZ0034-100W	NET RESISTOR,(1005*4)	10Ω
R6702	NRSA6AD-104W	MG RESISTOR	100kΩ,1/16W	RA4306	NRZ0034-100W	NET RESISTOR,(1005*4)	10Ω
R6703	NRSA6AD-123W	MG RESISTOR	12kΩ,1/16W	RA4307	NRZ0034-100W	NET RESISTOR,(1005*4)	10Ω
R6704	NRSA6AD-823W	MG RESISTOR	82kΩ,1/16W	RA4308	NRZ0034-100W	NET RESISTOR,(1005*4)	10Ω
R6705	NRSA6AD-333W	MG RESISTOR	33kΩ,1/16W	RA8001	NRZ0034-101W	NET RESISTOR,(1005X4)	
R8001	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W	RA8002	NRZ0034-101W	NET RESISTOR,(1005X4)	
R8002	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W	RA8003	NRZ0034-101W	NET RESISTOR,(1005X4)	
R8003	NRSA6AJ-220W	MG RESISTOR	22Ω,1/16W	RA8004	NRZ0034-101W	NET RESISTOR,(1005X4)	
R8004	NRSA6AJ-220W	MG RESISTOR	22Ω,1/16W	C1001	NDCA1HJ-8R0W	C CAPACITOR	8pF,50V
R8005	NRSA6AJ-220W	MG RESISTOR	22Ω,1/16W	C1002	NDCA1HJ-100W	C CAPACITOR	10pF,50V

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
C1004	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1633	NCB21CK-474X	C CAPACITOR	0.47μF,16V
C1005	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1641	NCB21CK-474X	C CAPACITOR	0.47μF,16V
C1007	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1701	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1008	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1702	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1009	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1801	NCBA1CK-103W	C CAPACITOR	0.01μF,16V
C1010	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1802	NBE20JM-226X	TA E CAPACITOR	22μF,6.3V
C1011	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1803	NCBA1CK-223W	C CAPACITOR	0.022μF,16V
C1012	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1804	NCBA1CK-223W	C CAPACITOR	0.022μF,16V
C1013	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1805	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C1014	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1806	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1015	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C1807	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1019	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2101	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1020	NCBA1EK-682W	C CAPACITOR	0.0068μF,25V	C2102	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1021	NCBA1EK-682W	C CAPACITOR	0.0068μF,25V	C2103	NCBA1HK-222W	C CAPACITOR	0.0022μF,50V
C1022	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2104	NCBA1HK-222W	C CAPACITOR	0.0022μF,50V
C1024	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2105	NBZ0015-106X	TA E CAPACITOR	10μF,6.3V
C1025	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2106	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1029	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2107	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1030	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V	C2108	NBE20JM-475X	TA E CAPACITOR	4.7μF,6.3V
C1032	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2201	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1035	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2202	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1036	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C2203	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1037	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2204	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1038	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2205	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1039	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2209	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1040	NDCA1HJ-100W	C CAPACITOR	10pF,50V	C2210	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1041	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C2211	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1042	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C2212	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1043	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C2213	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1044	NDCA1HJ-470W	C CAPACITOR	47pF,50V	C2214	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1045	NDCA1HJ-470W	C CAPACITOR	47pF,50V	C2215	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1046	NCF31AZ-105X	C CAPACITOR	1μF,10V	C2216	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1047	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2217	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1048	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2218	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1049	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2223	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1050	NCFA1HZ-103W	C CAPACITOR	0.01μF,50V	C2224	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1051	NCB31CK-223X	C CAPACITOR	0.022μF,16V	C2401	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C1052	NCB31CK-223X	C CAPACITOR	0.022μF,16V	C2402	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C1053	NCB31CK-223X	C CAPACITOR	0.022μF,16V	C2403	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C1054	NCB31CK-223X	C CAPACITOR	0.022μF,16V	C2404	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C1055	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V	C2405	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C1064	NBE20JM-226X	TA E CAPACITOR	22μF,6.3V	C2406	NBZ0015-106X	TA E CAPACITOR	10μF,6.3V
C1601	NCBA1CK-103W	C CAPACITOR	0.01μF,16V	C2603	NCBA1CK-153W	C CAPACITOR	0.015μF,16V
C1602	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V	C2604	NCBA1CK-153W	C CAPACITOR	0.015μF,16V
C1603	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V	C2605	NCBA1EK-472W	C CAPACITOR	0.0047μF,25V
C1605	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	C2606	NCBA1EK-472W	C CAPACITOR	0.0047μF,25V
C1606	NCBA1HK-152W	C CAPACITOR	0.0015μF,50V	C2607	NCBA1HK-102W	C CAPACITOR	0.001μF,50V
C1607	NCBA1CK-473W	C CAPACITOR	0.047μF,16V	C2608	NCBA1HK-102W	C CAPACITOR	0.001μF,50V
C1614	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V	C2609	NCBA1HK-102W	C CAPACITOR	0.001μF,50V
C1618	NCBA1HK-222W	C CAPACITOR	0.0022μF,50V	C2610	NCBA1HK-102W	C CAPACITOR	0.001μF,50V
C1619	NCBA1HK-222W	C CAPACITOR	0.0022μF,50V	C2611	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1620	NCBA1HK-222W	C CAPACITOR	0.0022μF,50V	C2612	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1621	NCB30JK-105X	C CAPACITOR	1μF,6.3V	C2613	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1622	NCBA1CK-223W	C CAPACITOR	0.022μF,16V	C2614	NDCA1HJ-101W	C CAPACITOR	100pF,50V
C1623	NCBA1AK-473W	C CAPACITOR	0.047μF,10V	C2615	NDCA1HJ-101W	C CAPACITOR	100pF,50V
C1624	NCBA1CK-103W	C CAPACITOR	0.01μF,16V	C2617	NCBA1CK-223W	C CAPACITOR	0.022μF,16V
C1625	NCSA1HJ-101W	C CAPACITOR	100pF,50V	C2618	NCBA1CK-223W	C CAPACITOR	0.022μF,16V
C1626	NCBA1CK-822W	C CAPACITOR	0.0082μF,16V	C2801	NCB31HK-472X	C CAPACITOR	0.0047μF,50V
C1627	NCBA1CK-822W	C CAPACITOR	0.0082μF,16V	C2802	NCB31HK-472X	C CAPACITOR	0.0047μF,50V
C1628	NCB21CK-224X	C CAPACITOR	0.22μF,16V	C3001	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C1629	NBP41DM-106X	TA E CAPACITOR	10μF,20V	C3003	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C1630	NCB21CK-334X	C CAPACITOR	0.33μF,16V	C3005	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C1632	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V	C3006	NCB30JK-105X	C CAPACITOR	1μF,6.3V

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION	# △ REF No.	PART No.	PART NAME, DESCRIPTION
C3007	NBE20GM-476X	TA E CAPACITOR 47μF,4V	C3521	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3008	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V	C3522	NCB20JM-475X	C CAPACITOR 4.7μF,6.3V
C3009	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3523	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3011	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3524	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3012	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3525	NCB20JM-475X	C CAPACITOR 4.7μF,6.3V
C3013	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3526	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3015	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3527	NDCA1EJ-221W	C CAPACITOR 220pF,25V
C3016	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3528	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3017	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3701	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V
C3020	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3702	NDCA1HJ-560W	C CAPACITOR 56pF,50V
C3021	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3703	NDCA1HJ-270W	C CAPACITOR 27pF,50V
C3022	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3704	NDCA1HJ-680W	C CAPACITOR 68pF,50V
C3023	NDCA1HJ-330W	C CAPACITOR 33pF,50V	C3705	NDCA1HJ-270W	C CAPACITOR 27pF,50V
C3024	NCBA1HK-102W	C CAPACITOR 0.001μF,50V	C3706	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3025	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3707	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3026	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3708	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3027	NCBA1EK-472W	C CAPACITOR 0.0047μF,25V	C3709	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3028	NDCA1EJ-271W	C CAPACITOR 270pF,25V	C3710	NBE20GM-226X	TA E CAPACITOR 22μF,4V
C3029	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3711	NBE20GM-226X	TA E CAPACITOR 22μF,4V
C3030	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3712	NBE40GM-107X	TA E CAPACITOR 100μF,4V
C3031	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3713	NBE20GM-107X	TA E CAPACITOR 100μF,4V
C3032	NCBA1HK-102W	C CAPACITOR 0.001μF,50V	C3715	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3033	NDCA1HJ-220W	C CAPACITOR 22pF,50V	C3731	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3036	NDCA1HJ-8R0W	C CAPACITOR 8pF,50V	C3732	NCBA1HK-102W	C CAPACITOR 0.001μF,50V
C3037	NDCA1HJ-8R0W	C CAPACITOR 8pF,50V	C3733	NDCA1HJ-3R0W	C CAPACITOR 3pF,50V
C3038	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3734	NDCA1HJ-5R0W	C CAPACITOR 5pF,50V
C3039	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3735	NDCA1HJ-330W	C CAPACITOR 33pF,50V
C3042	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3736	NCBA1HK-102W	C CAPACITOR 0.001μF,50V
C3043	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3738	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3044	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3739	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3045	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3740	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3046	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3741	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3047	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3742	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3048	NCB31CK-473X	C CAPACITOR 0.047μF,16V	C3743	NDCA1HJ-3R0W	C CAPACITOR 3pF,50V
C3049	NCBA1HK-222W	C CAPACITOR 0.0022μF,50V	C3744	NDCA1HJ-5R0W	C CAPACITOR 5pF,50V
C3050	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3745	NDCA1HJ-330W	C CAPACITOR 33pF,50V
C3055	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3746	NCB20JM-475X	C CAPACITOR 4.7μF,6.3V
C3059	NBE20GM-226X	TA E CAPACITOR 22μF,4V	C3747	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3060	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3801	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3064	NCBA1HK-102W	C CAPACITOR 0.001μF,50V	C3802	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C3066	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3803	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V
C3067	NCBA1HK-102W	C CAPACITOR 0.001μF,50V	C3804	NBE20GM-476X	TA E CAPACITOR 47μF,4V
C3069	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3805	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3501	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V	C3806	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3502	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V	C3807	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3503	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V	C3808	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3504	NCBA1AK-473W	C CAPACITOR 0.047μF,10V	C3809	NCB31CK-104X	C CAPACITOR 0.1μF,16V
C3505	NCBA1CK-223W	C CAPACITOR 0.022μF,16V	C3810	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3506	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C3811	NCB31CK-104X	C CAPACITOR 0.1μF,16V
C3507	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3812	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3508	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3813	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3509	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3814	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3510	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3815	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3511	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C3816	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3512	NCB31CK-104X	C CAPACITOR 0.1μF,16V	C3817	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3513	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C3818	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3514	NCBA1AK-473W	C CAPACITOR 0.047μF,10V	C3819	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C3515	NCBA1AK-473W	C CAPACITOR 0.047μF,10V	C4202	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3516	NCBA1AK-473W	C CAPACITOR 0.047μF,10V	C4203	NCB21AK-105X	C CAPACITOR 1μF,10V
C3517	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C4204	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3518	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C4205	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C3519	NCBA1HK-102W	C CAPACITOR 0.001μF,50V	C4206	NCB21CK-105X	C CAPACITOR 1μF,16V
C3520	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C4207	NCBA1AK-104W	C CAPACITOR 0.1μF,10V

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION	# △ REF No.	PART No.	PART NAME, DESCRIPTION
C4208	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C6116	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C4209	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6117	NCBA1AK-333W	C CAPACITOR 0.033μF,10V
C4210	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6118	NCBA1HK-561W	C CAPACITOR 560pF,50V
C4211	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6119	NCBA1HK-272W	C CAPACITOR 0.0027μF,50V
C4212	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6120	NCBA1HK-561W	C CAPACITOR 560pF,50V
C4213	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6121	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C4214	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6123	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C4216	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6124	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C4217	NCB21AK-105X	C CAPACITOR 1μF,10V	C6125	NDCA1HJ-101W	C CAPACITOR 100pF,50V
C4301	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6126	NCB31CK-473X	C CAPACITOR 0.047μF,16V
C4302	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6127	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C4303	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6128	NCBA1AK-473W	C CAPACITOR 0.047μF,10V
C4304	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6129	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C4305	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6130	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C4306	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6131	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C4307	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6132	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C4308	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6133	NCBA1HK-102W	C CAPACITOR 0.001μF,50V
C4309	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6134	NCB21CK-105X	C CAPACITOR 1μF,16V
C4310	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6201	NCB21CK-105X	C CAPACITOR 1μF,16V
C4311	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6202	NCB10JK-106X	C CAPACITOR 10μF,6.3V
C4312	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6203	NCBA1HK-102W	C CAPACITOR 0.001μF,50V
C4313	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V	C6204	NCBA1HK-561W	C CAPACITOR 560pF,50V
C4314	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6205	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C4315	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6206	NCB21CK-105X	C CAPACITOR 1μF,16V
C4316	NCBA1CK-103W	C CAPACITOR 0.01μF,16V	C6207	NCB10JK-106X	C CAPACITOR 10μF,6.3V
C4317	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6208	NCBA1EK-472W	C CAPACITOR 0.0047μF,25V
C5501	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6209	NCB21CK-105X	C CAPACITOR 1μF,16V
C5503	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6210	NCB10JK-106X	C CAPACITOR 10μF,6.3V
C5504	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6211	NCBA1HK-102W	C CAPACITOR 0.001μF,50V
C5506	NBE40GM-476X	TA E CAPACITOR 47μF,4.0V	C6212	NCB21CK-105X	C CAPACITOR 1μF,16V
C5507	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6213	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C5508	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6214	NCBA1AK-683W	C CAPACITOR 0.068μF,10V
C5509	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6215	NCB21CK-105X	C CAPACITOR 1μF,16V
C5510	NBP21VM-105X	TA E CAPACITOR 1μF,35V	C6216	NCB30JK-105X	C CAPACITOR 1μF,6.3V
C5511	NBP21DM-475X	TA E CAPACITOR 4.7μF,20V	C6217	NCB21CK-105X	C CAPACITOR 1μF,16V
C5512	NBE21AM-106X	TA E CAPACITOR 10μF,10V	C6218	NCB21CK-105X	C CAPACITOR 1μF,16V
C5513	NCB31CK-104X	C CAPACITOR 0.1μF,16V	C6219	NCB11EK-105X	C CAPACITOR 1μF,25V
C5514	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6220	NCB21CK-105X	C CAPACITOR 1μF,16V
C5515	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6222	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C5516	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6223	NCB21CK-105X	C CAPACITOR 1μF,16V
C5517	NCB31CK-104X	C CAPACITOR 0.1μF,16V	C6224	NCB11EK-105X	C CAPACITOR 1μF,25V
C5518	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6225	NCB21CK-105X	C CAPACITOR 1μF,16V
C5519	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6226	NCB21CK-105X	C CAPACITOR 1μF,16V
C6001	NCB31EK-103X	C CAPACITOR 0.01μF,25V	C6601	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C6002	NCB31CK-104X	C CAPACITOR 0.1μF,16V	C6602	NCB21CK-105X	C CAPACITOR 1μF,16V
C6003	NBZ0015-106X	TA E CAPACITOR 10μF,6.3V	C6603	NCBA1HK-102W	C CAPACITOR 0.001μF,50V
C6004	NCB21CK-105X	C CAPACITOR 1μF,16V	C6604	NCBA1AK-473W	C CAPACITOR 0.047μF,10V
C6005	NBE20JM-226X	TA E CAPACITOR 22μF,6.3V	C6611	NCBA1HK-332W	C CAPACITOR 0.0033μF,50V
C6008	NDCA1HJ-151W	C CAPACITOR 150pF,50V	C6612	NDCA1EJ-221W	C CAPACITOR 220pF,25V
C6101	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6613	NDCA1EJ-121W	C CAPACITOR 120pF,25V
C6103	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C6614	NCBA1CK-103W	C CAPACITOR 0.01μF,16V
C6104	NCBA1CK-223W	C CAPACITOR 0.022μF,16V	C6701	NCB21CK-105X	C CAPACITOR 1μF,16V
C6105	NCB21CK-105X	C CAPACITOR 1μF,16V	C6702	NCB21CK-105X	C CAPACITOR 1μF,16V
C6106	NBP41DM-106X	TA E CAPACITOR 10μF,20V	C8001	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V
C6107	NCB21CK-105X	C CAPACITOR 1μF,16V	C8002	NBE20JM-106X	TA E CAPACITOR 10μF,6.3V
C6108	NCB21CK-105X	C CAPACITOR 1μF,16V	C8003	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C6109	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C8004	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C6110	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C8005	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C6111	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C8006	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C6112	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C8007	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C6113	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C8008	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C6114	NCB30JK-105X	C CAPACITOR 1μF,6.3V	C8009	NCBA1AK-104W	C CAPACITOR 0.1μF,10V
C6115	NCBA1AK-104W	C CAPACITOR 0.1μF,10V	C8010	NCBA1AK-104W	C CAPACITOR 0.1μF,10V

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION		# △ REF No.	PART No.	PART NAME, DESCRIPTION	
C8011	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V	L5505	NQL315K-100X	INDUCTOR	10μH
C8012	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L5506	NQL315K-100X	INDUCTOR	10μH
C8013	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L6001	NQL62EM-470X	INDUCTOR	47μH
C8014	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L6101	NQLZ011-4R7X	INDUCTOR	4.7μH
C8015	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L6102	NQLZ011-4R7X	INDUCTOR	4.7μH
C8016	NCB30JK-105X	C CAPACITOR	1μF,6.3V	L6201	NQLZ010-390X	INDUCTOR	39μH
C8017	NCBA1CK-103W	C CAPACITOR	0.01μF,16V	L6202	NQLZ011-390X	INDUCTOR	39μH
C8018	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L6203	NQLZ011-390X	INDUCTOR	39μH
C8021	NCBA1CK-103W	C CAPACITOR	0.01μF,16V	L6204	NQL144K-220X	P COIL	22μH
C8022	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V	L6205	NQL62EM-470X	INDUCTOR	47μH
C8023	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L6206	NQL62EM-470X	INDUCTOR	47μH
C8024	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L6207	NQLZ011-221X	INDUCTOR	220μH
C8025	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V	L6601	NQR0006-001X	FERRITE BEADS	
C8026	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L6602	NQR0129-002X	FERRITE BEADS	
C8034	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L6701	NQL52EM-100X	INDUCTOR	10μH
C8301	NBZ0015-106X	TA E CAPACITOR	10μF,6.3V	L8001	NQR0129-002X	FERRITE BEADS	
C8305	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L8002	NQR0129-002X	FERRITE BEADS	
C8306	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L8003	NQR0129-002X	FERRITE BEADS	
C8307	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L8004	NQR0006-001X	FERRITE BEADS	
C8310	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L8005	NQR0129-002X	FERRITE BEADS	
C8311	NCBA1AK-104W	C CAPACITOR	0.1μF,10V	L8006	NQR0006-001X	FERRITE BEADS	
L1001	NQL402M-100X	INDUCTOR	10μH	L8301	NQR0129-002X	FERRITE BEADS	
L1002	NQL402M-100X	INDUCTOR	10μH	X1001	NAX0578-001X	CRYSTAL	20MHz
L1801	NQL402M-100X	INDUCTOR	10μH	X1002	NAX0564-001X	CRYSTAL	
L2101	NQL402M-100X	INDUCTOR	10μH	X3002	NAX0480-001X	CRYSTAL	24.576MHz
L2401	NQL402M-100X	INDUCTOR	10μH	X5501	NAX0587-001X	CXO,54MHZ 5*3	
L2402	NQL402M-100X	INDUCTOR	10μH	X8301	NAX0612-001X	C RESONATOR	6MHz
L2601	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	TH6601	NRSA63J-0R0X	MG RESISTOR,1608	0Ω,1/16W
L2602	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	J101	QNZ0518-002	D CONNECTOR,DV	
L2603	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	J102	QNZ0617-001	USB CONNECTOR,USB	
L2801	NQR0251-004X	FERRITE BEADS		J103	NNZ0088-001X	M CONNECTOR,MULTI	
L2802	NQR0251-004X	FERRITE BEADS		J104	QNA0035-001	DC JACK,DC JACK	
L2803	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	SD1	LY33355-001A	SHIELD CASE(PR),PRE/REC	
L2804	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	BK1	LY44288-001A	BRACKET(MULTI),FOR J103	
L2805	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W	OT1	LY30030-099A	SPACER(A)	
L3001	NQR0129-002X	FERRITE BEADS		OT2	LY30030-0A2A	SPACER(A)	
L3002	NQR0129-002X	FERRITE BEADS		OT3	LY30030-0A3A	SPACER(A)	
L3004	NQR0006-001X	FERRITE BEADS		OT4	LY30030-0A4A	SPACER(A)	
L3005	NQR0006-001X	FERRITE BEADS		OT5	LY30030-0A5A	SPACER(A)	
L3007	NQL085J-2R2X	INDUCTOR	2.2μH	OT6	LY44243-001A	SHEET(PWB),B TO B	
L3008	NQL085J-120X	INDUCTOR	12μH	OT7	LY30030-0F6A	SPACER(A)	
L3012	NQR0129-002X	FERRITE BEADS		OT8	LY30030-0M3A	SPACER(A),FOR J103	
L3014	NQL38DK-100X	P COIL	10μH	CN101	QGF0530F1-17W	FPC CONNE,BATT.TERM.	
L3015	NQR0006-001X	FERRITE BEADS		CN102	QGF0532F1-20X	FFC/FPC CONNE,CCD	
L3501	NQR0129-002X	FERRITE BEADS		CN103	QGF0517F1-06X	FPC CONNE,LOAD.MOTOR	
L3502	NQL402M-100X	INDUCTOR	10μH	CN104	QGF0517F2-11X	FPC CONNE,DRUM MOTOR	
L3503	NQR0006-001X	FERRITE BEADS		CN105	QGB0509M3-30X	B TO B CONNE,JIG CN	
L3504	NQR0006-001X	FERRITE BEADS		CN106	QGF0517F2-16X	FPC CONNE,SENSOR	FPC(1-16)
L3505	NQR0006-001X	FERRITE BEADS		CN107	QGF0517F2-06X	FPC CONNE,R.ENC	
L3701	NQL38DK-100X	P COIL	10μH	CN108	QGF0517F2-18X	FPC CONNE,CAPSTAN	
L3731	NQL085J-6R8X	INDUCTOR	6.8μH	CN109	QGB0405L1-60X	B TO B CONNE,SD PWB	
L3732	NQL085J-6R8X	INDUCTOR	6.8μH	CN110	QGF0517F1-08X	FPC CONNE,HEAD	FFC/FPC(1-8)
L3801	NQR0129-002X	FERRITE BEADS		CN111	QGF0517F2-11X	FPC CONNE,CAMERA OPE	
L3802	NQR0129-002X	FERRITE BEADS		CN112	QGF0517F1-09X	FPC CONNE,SUB OPE	
L3803	NQR0006-001X	FERRITE BEADS		CN113	QGF0306F2-49X	FFC/FPC CONNE,MONI PWB	
L3804	NQL38DK-100X	P COIL	10μH	CN114	QGA1001F1-04X	W TO B CONNE,MIC	
L4201	NQR0129-002X	FERRITE BEADS		CN115	QGF0532F1-12X	FFC/FPC CONNE,STROBE PWB	
L4301	NQR0129-002X	FERRITE BEADS		△ F1601	NMFZ007-R20X-K	FUSE,UNREG	0.2A,50V
L4302	NQR0129-002X	FERRITE BEADS		△ F1602	NMFZ007-R50X-K	FUSE,REG_3V	0.5A,50V
L5501	NQL315K-100X	INDUCTOR	10μH	△ F6001	NMFZ007-R50X-K	FUSE	0.5A,50V
L5502	NQR0129-002X	FERRITE BEADS		△ F6101	NMFZ007-2R0X-K	FUSE	2A,32V
L5503	NQR0129-002X	FERRITE BEADS		△ F6201	NMFZ007-1R25X-K	FUSE	1.25A,32V
L5504	NQR0129-002X	FERRITE BEADS		△ F6701	NMFZ007-1R25X-K	FUSE	1.25A,32V

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

△ REF No. PART No. PART NAME, DESCRIPTION

CCD BOARD ASSEMBLY<02>

PW1	YB10429A-01	CCD BOARD ASSY	
Q5001	2SC3931/CD/-X	TRANSISTOR	
R5001	NRSA63J-182X	MG RESISTOR	1.8kΩ,1/16W
R5002	NRSA63J-104X	MG RESISTOR	100kΩ,1/16W
R5006	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
C5001	NBP41DM-106X	TA E CAPACITOR	10μF,20V
C5002	NCF31EZ-104X	C CAPACITOR	0.1μF,25V
C5003	NBE21AM-106X	TA E CAPACITOR	10μF,10V
C5004	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C5005	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C5006	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C5007	NCB31HK-222X	C CAPACITOR	0.0022μF,50V
L5001	NQL315K-100X	INDUCTOR	10μH
L5002	NQL315K-100X	INDUCTOR	10μH

SD BOARD ASSEMBLY<03>

PW1	YB10431A-01	SD BOARD ASSY	
IC4802	BA10358FVM-W	IC,HALL AMP+	
IC4803	BA10358FVM-W	IC,HALL AMP-	
IC4804	LM358DR2-X	IC,DRIVE AMP	
IC4807	SN74AHC2G66U-X	IC,DUMP CUT	
IC4851	UPD16879GS-X	IC,F/Z_MDA	
Q4801	2SC4655/BC/-X	TRANSISTOR,HALL DRIVE	
Q4802	2SC4617/RS/-X	TRANSISTOR,2SC4617/RS	
Q4803	DTC144EE-X	DIGI TRANSISTOR,DTC144EE	
Q4804	DTA144EE-X	DIGI TRANSISTOR,DTA144EE	
Q4805	DTA143EE-X	DIGI TRANSISTOR,DTA143EE	
Q4806	2SC4617/QR/-X	TRANSISTOR,2SC4617/QR	
Q4851	2SC4617/RS/-X	TRANSISTOR	
D8501	EMZ6.8N-X	Z DIODE	
D8502	UMZ6.8EN-W	Z DIODE	
R4804	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R4805	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R4806	NRSA6AJ-683W	MG RESISTOR	68kΩ,1/16W
R4807	NRSA6AJ-823W	MG RESISTOR	82kΩ,1/16W
R4808	NRSA6AJ-243W	MG RESISTOR	24kΩ,1/16W
R4809	NRSA6AJ-681W	MG RESISTOR	680Ω,1/16W
R4810	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R4811	NRSA6AJ-824W	MG RESISTOR	820kΩ,1/16
R4812	NRSA6AJ-153W	MG RESISTOR	15kΩ,1/16W
R4814	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W
R4815	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R4816	NRSA6AJ-105W	MG RESISTOR	1MΩ,1/16W
R4817	NRSA6AJ-334W	MG RESISTOR	330kΩ,1/16W
R4818	NRSA6AJ-154W	MG RESISTOR	150kΩ,1/16W
R4819	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R4820	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R4821	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W
R4822	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W
R4823	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R4824	NRSA6AJ-472W	MG RESISTOR	4.7kΩ,1/16W
R4825	NRSA6AJ-222W	MG RESISTOR	2.2kΩ,1/16W
R4826	NRSA6AJ-473W	MG RESISTOR	47kΩ,1/16W
R4827	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4828	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4833	NRSA6AJ-104W	MG RESISTOR	100kΩ,1/16W

# △ REF No.	PART No.	PART NAME, DESCRIPTION	
R4836	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R4837	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4839	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4840	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4843	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4844	NRSA6AJ-151W	MG RESISTOR	150Ω,1/16W
R4846	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4849	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4854	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4856	NRSA6AJ-6R8W	MG RESISTOR	6.8Ω,1/16W
R4857	NRSA6AJ-6R8W	MG RESISTOR	6.8Ω,1/16W
R4858	NRSA6AJ-333W	MG RESISTOR	33kΩ,1/16W
R4859	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4860	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4862	NRSA6AJ-6R8W	MG RESISTOR	6.8Ω,1/16W
R4863	NRSA6AJ-6R8W	MG RESISTOR	6.8Ω,1/16W
R4864	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R4865	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R4866	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R4867	NRSA6AJ-102W	MG RESISTOR	1kΩ,1/16W
R4868	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4870	NRSA6AJ-271W	MG RESISTOR	270Ω,1/16W
R4871	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4874	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R4875	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R8501	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R8502	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R8503	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R8504	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R8505	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R8506	NRSA6AJ-103W	MG RESISTOR	10kΩ,1/16W
R8507	NRSA63J-0R0X	MG RESISTOR	0Ω,1/16W
R8508	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
R8509	NRSA6AJ-0R0W	MG RESISTOR	0Ω,1/16W
C4803	NBZ0015-106X	TA E CAPACITOR	10μF,6.3V
C4804	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V
C4806	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V
C4808	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C4809	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V
C4810	NCBA1CK-103W	C CAPACITOR	0.01μF,16V
C4811	NCBA1CK-103W	C CAPACITOR	0.01μF,16V
C4812	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V
C4813	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V
C4814	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V
C4815	NCB31HK-152X	C CAPACITOR	0.0015μF,50V
C4819	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C4851	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C4852	NCFA1AZ-104W	C CAPACITOR	0.1μF,10V
C4853	NBE21AM-335X	TA E CAPACITOR	3.3μF,10V
C4854	NBE21AM-106X	TA E CAPACITOR	10μF,10V
C4855	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C4858	NDCA1HJ-330W	C CAPACITOR	33pF,50V
C4859	NCBA1CK-223W	C CAPACITOR	0.022μF,16V
C4860	NCBA1CK-223W	C CAPACITOR	0.022μF,16V
C4861	NCBA1CK-103W	C CAPACITOR	0.01μF,16V
C4862	NCBA1CK-103W	C CAPACITOR	0.01μF,16V
C4864	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C4865	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
C8501	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C8502	NCBA1AK-104W	C CAPACITOR	0.1μF,10V
L4802	NQL302N-100X	INDUCTOR	10μH
L4851	NQR0129-002X	FERRITE BEADS	
L4852	NQL315K-100X	INDUCTOR	10μH
L4853	NQL315K-100X	INDUCTOR	10μH

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

# △ REF No.	PART No.	PART NAME, DESCRIPTION
L8501	NQR0006-001X	FERRITE BEADS
OT1	LY30029-0K7A	SPACER(A)
CN301	QGB0405M1-60X	B TO B CONNE,60P B/B
CN302	QGF0530F1-24W	FPC CONNE,OP
CN303	QGF0517F1-07X	FPC CONNE,SIDE OPE
CN304	QGF0532F1-18X	FFC/FPC CONNE,VF
CN305	NNZ0067-001X	SD CARD CONNE,SD CN

SIDE OPE BOARD ASSEMBLY<04>

PW1	YB20950A-01	SIDE OPE BOARD ASSY	
R401	NRSA6AJ-223W	MG RESISTOR	22kΩ,1/16W
R402	NRSA6AJ-682W	MG RESISTOR	6.8kΩ,1/16W
R403	NRSA6AJ-332W	MG RESISTOR	3.3kΩ,1/16W
S401	NSW0198-001X	TACT SWITCH	
S402	NSW0198-001X	TACT SWITCH	
S403	NSW0198-001X	TACT SWITCH	
S405	NSW0099-001X	SLIDE SWITCH	
S406	NSW0120-002X	PUSH SWITCH,EJECT SW	
S407	NSW0201-001X	PUSH SWITCH,VF SW	
△ BT401	QAB0040-001	LI BATTERY	
SD1	LY44286-001A	SHIELD(SIDE OPE	
CN401	QGF0517F1-07X	FPC CONNE,SD PWB	

MONITOR BOARD ASSEMBLY<06>

PW1	YB20952A-02	MONITOR BOARD ASSY,A,B,C,D	
PW1	YB20952B-02	MONITOR BOARD ASSY,E,F,G,H	
IC7601	AN12550A	IC	
IC7602	LM358DR2-X	IC	
IC7603	—	IC	
IC7604	MM1385GN-X	IC	
IC7605	TA75S393F-X	IC	
IC7606	SN74AHC1G08K-X	IC	
Q7501	2SD1664/QR/-W	TRANSISTOR	
Q7502	2SD1664/QR/-W	TRANSISTOR	
Q7503	DTA144EE-X	DIGI TRANSISTOR	
Q7503	or RN2104-X	DIGI TRANSISTOR	
Q7503	or UN9113J-X	DIGI TRANSISTOR	
Q7504	2SC4617/QR/-X	TRANSISTOR	
Q7504	or 2SC4738/YG/-X	TRANSISTOR	
Q7601	2SC4617/QR/-X	TRANSISTOR	
Q7601	or 2SC4738/YG/-X	TRANSISTOR	
Q7602	2SA1774/QR/-X	TRANSISTOR	
Q7602	or 2SA1832/YG/-X	TRANSISTOR	
Q7603	2SC4617/QR/-X	TRANSISTOR	
Q7603	or 2SC4738/YG/-X	TRANSISTOR	
Q7604	2SA1774/QR/-X	TRANSISTOR	
Q7604	or 2SA1832/YG/-X	TRANSISTOR	
Q7605	UMD3N-W	DIGI TRANSISTOR	
Q7605	or XP4311-W	DIGI TRANSISTOR	
Q7606	UMD3N-W	DIGI TRANSISTOR,E,F,G,H	
Q7607	DTA124EE-X	DIGI TRANSISTOR	
Q7608	DTC124EE-X	DIGI TRANSISTOR	
Q7609	2SD2654/VW/-X	TRANSISTOR	
Q7610	2SC4617/QR/-X	TRANSISTOR	
D7601	RB480Y-W	SB DIODE	
D7602	MA111-X	SI DIODE	
R7501	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W

# △ REF No.	PART No.	PART NAME, DESCRIPTION	
R7502	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R7503	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
R7506	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W
R7507	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W
R7601	NRVA63D-622X	CMF RESISTOR	6.2kΩ,1/16W
R7602	NRSA63J-153X	MG RESISTOR	15kΩ,1/16W
R7604	NRVA63D-223X	CMF RESISTOR,A,B,C,D	22kΩ,1/16W
R7604	NRVA63D-682X	CMF RESISTOR,E,F,G,H	6.8kΩ,1/16W
R7605	NRVA63D-223X	CMF RESISTOR	22kΩ,1/16W
R7606	NRVA63D-223X	CMF RESISTOR	22kΩ,1/16W
R7607	NRSA63J-223X	MG RESISTOR	22kΩ,1/16W
R7608	NRSA63J-223X	MG RESISTOR	22kΩ,1/16W
R7609	NRSA02J-330X	MG RESISTOR	33Ω,1/10W
R7610	NRSA02J-330X	MG RESISTOR	33Ω,1/10W
R7611	NRSA63J-333X	MG RESISTOR	33kΩ,1/16W
R7612	NRSA63J-335X	MG RESISTOR	3.3MΩ,1/16W
R7614	NRVA63D-223X	CMF RESISTOR	22kΩ,1/16W
R7615	NRVA63D-433X	CMF RESISTOR	43kΩ,1/16W
R7616	NRVA63D-821X	CMF RESISTOR	820Ω,1/16W
R7617	NRSA63J-153X	MG RESISTOR	15kΩ,1/16W
R7619	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W
R7621	NRSA63J-332X	MG RESISTOR	3.3kΩ,1/16W
R7622	NRSA63J-0R0X	MG RESISTOR,A,B,C,D	0Ω,1/16W
R7623	NRSA63J-223X	MG RESISTOR,E,F,G,H	22kΩ,1/16W
R7624	NRSA63J-0R0X	MG RESISTOR,E,F,G,H	0Ω,1/16W
R7625	NRSA63J-223X	MG RESISTOR,E,F,G,H	22kΩ,1/16W
R7626	NRSA63J-223X	MG RESISTOR,E,F,G,H	22kΩ,1/16W
R7628	NRVA63D-333X	CMF RESISTOR	33kΩ,1/16W
R7629	NRVA63D-153X	CMF RESISTOR	15kΩ,1/16W
R7630	NRVA63D-222X	CMF RESISTOR	2.2kΩ,1/16W
R7631	NRSA63J-153X	MG RESISTOR	15kΩ,1/16W
R7632	NRSA63J-394X	MG RESISTOR	390kΩ,1/16W
R7633	NRSA63J-103X	MG RESISTOR	10kΩ,1/16W
R7634	NRSA63J-153X	MG RESISTOR	15kΩ,1/16W
R7635	NRSA63J-393X	MG RESISTOR	39kΩ,1/16W
R7636	NRSA63J-562X	MG RESISTOR	5.6kΩ,1/16W
R7639	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W
R7640	NRSA63J-473X	MG RESISTOR	47kΩ,1/16W
C7501	NCZ1016-100X	C CAPACITOR	10pF,2kV
C7503	NFV41HJ-183X	MPPS CAPACITOR	0.018μF,50V
C7504	NCB31EK-103X	C CAPACITOR	0.01μF,25V
C7505	NBE20JM-106X	TA E CAPACITOR	10μF,6.3V
C7510	NCB10JK-106X	C CAPACITOR	10μF,6.3V
C7601	NBE90JM-106X	TA E CAPACITOR	10μF,6.3V
C7602	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C7603	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C7604	NBE21AM-106X	TA E CAPACITOR	10μF,10V
C7605	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7606	NCB11CK-225X-A	C CAPACITOR	2.2μF,16V
C7607	NCB11CK-225X-A	C CAPACITOR	2.2μF,16V
C7608	NCB11CK-225X-A	C CAPACITOR	2.2μF,16V
C7609	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7610	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7611	NCB11CK-225X	C CAPACITOR	2.2μF,16V
C7612	NCB21CK-105X	C CAPACITOR	1μF,16V
C7613	NBP41DM-106X	TA E CAPACITOR	10μF,20V
C7614	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7615	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7616	NRSA02J-274X	MG RESISTOR	270kΩ,1/10W
C7617	NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7618	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C7619	NCB30JK-105X	C CAPACITOR	1μF,6.3V
C7620	NCB31EK-103X	C CAPACITOR	0.01μF,25V

MODEL	MARK	MODEL	MARK
GR-DX75EK	A	GR-DX95EK	E
GR-DX75EX	B	GR-DX95EX	F
GR-DX75EY	C	GR-DX95EY	G
GR-DX75EZ	D	GR-DX95EZ	H

#	△	REF No.	PART No.	PART NAME, DESCRIPTION	
C7621			NCB31HK-152X	C CAPACITOR	0.0015μF,50V
C7622			NBE20JM-225X	TA E CAPACITOR	2.2μF,6.3V
C7623			NCB30JK-105X	C CAPACITOR	1μF,6.3V
C7624			NBE90JM-106X	TA E CAPACITOR	10μF,6.3V
C7625			NCB31HK-102X	C CAPACITOR	0.001μF,50V
C7626			NCB30JK-105X	C CAPACITOR	1μF,6.3V
C7627			NCB30JK-105X	C CAPACITOR	1μF,6.3V
C7628			NCB30JK-105X	C CAPACITOR	1μF,6.3V
C7629			NBP41EM-475X	TA E CAPACITOR	4.7μF,25V
C7631			NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7632			NBP41EM-475X	TA E CAPACITOR	4.7μF,25V
C7633			NCB21CK-105X	C CAPACITOR	1μF,16V
C7634			NBE90JM-106X	TA E CAPACITOR	10μF,6.3V
C7635			NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7636			NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7637			NCB11CK-105X	C CAPACITOR	1μF,16V
C7638			NCB31EK-103X	C CAPACITOR	0.01μF,25V
C7639			NBE90JM-106X	TA E CAPACITOR	10μF,6.3V
C7640			NCB31EK-103X	C CAPACITOR	0.01μF,25V
C7642			NCB30JK-105X	C CAPACITOR	1μF,6.3V
C7643			NBP21CM-335X	TA E CAPACITOR	3.3μF,16V
C7645			NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7646			NCB31EK-103X	C CAPACITOR	0.01μF,25V
C7647			NBE90JM-106X	TA E CAPACITOR	10μF,6.3V
C7648			NCB31CK-104X	C CAPACITOR,E,F,G,H	0.1μF,16V
C7649			NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7651			NCB31CK-104X	C CAPACITOR	0.1μF,16V
C7652			NCB31CK-104X	C CAPACITOR	0.1μF,16V
L7501			NQL76EM-680X	INDUCTOR	68μH
L7502			NQL76EM-220X	INDUCTOR	22μH
L7601			NQL04DK-100X	INDUCTOR	10μH
L7602			NQL04DK-100X	INDUCTOR	10μH
L7603			NQL04DK-100X	INDUCTOR	10μH
L7604			NQL04DK-100X	INDUCTOR	10μH
L7605			NQL04DK-100X	INDUCTOR	10μH
L7606			NQL04DK-100X	INDUCTOR,A,B,C,D	10μH
L7607			NQL04DK-100X	INDUCTOR	10μH
L7608			NQL04DK-100X	INDUCTOR,E,F,G,H	10μH
△ T7501			NQS0059-001X	SIGNAL SW TRANS	
WR1			YU40017-015-1	THIN WIRE,GND	
CN7601			QGF0306F2-45X	FFC/FPC CONNE,MAIN	
CN7602			QGF0530F1-24W	FPC CONNE,LCD	
△ F7501			NMFZ007-R40X-K	FUSE	0.4A,50V

STROBE BOARD ASSEMBLY<07>

PW1	YB20951A-01	STROBE P.ASS'Y,07	
IC6502	TC7SET08FU-X	IC(DIGITAL)	
Q6501	2SB1462J/RS/-X	TRANSISTOR	
Q6502	UN9211J-X	DIGI TRANSISTOR	
Q6502	or DTC114EE-X	DIGI TRANSISTOR	
△ Q6503	2SB1124/ST/-X	CHIP TRANSISTOR	
Q6504	2SD1628/FG/-X	TRANSISTOR	
Q6506	CT25ASJ-8-X	POW TRANSISTOR	
D6501	F1F16-X	SI DIODE	
D6502	DA121-X	DIODE	
D6503	F1SN4-X	SI DIODE	
D6504	CRG02-X	SI DIODE	
R6501	NRSA63J-3R9X	MG RESISTOR	3.9Ω,1/16W
R6502	NRSA63J-4R7X	MG RESISTOR	4.7Ω,1/16W
R6504	NRSA63J-471X	MG RESISTOR	470Ω,1/16W

#	△	REF No.	PART No.	PART NAME, DESCRIPTION	
R6505			NRSA63J-222X	MG RESISTOR	2.2kΩ,1/16W
R6506			NRSA63J-152X	MG RESISTOR	1.5kΩ,1/16W
R6507			NRSA02J-106X	MG RESISTOR	10MΩ,1/10W
R6508			NRVA63D-184X	CMF RESISTOR	180kΩ,1/16W
R6511			NRSA63J-473X	MG RESISTOR	47kΩ,1/16W
R6514			NRSA02J-105X	MG RESISTOR	1MΩ,1/10W
R6515			NRS181J-220X	MG RESISTOR	22Ω,1/8W
R6516			NRSA02J-104X	MG RESISTOR	100kΩ,1/10W
R6519			NRSA02J-106X	MG RESISTOR	10MΩ,1/10W
R6520			NRSA63J-330X	MG RESISTOR	33Ω,1/16W
R6527			NRSA63J-391X	MG RESISTOR	390Ω,1/16W
C6501			NBE41AM-336X	TA E CAPACITOR	33μF,10V
C6502			NBE41AM-226X	TA E CAPACITOR	22μF,10V
C6503			NCB31EK-103X	C CAPACITOR	0.01μF,25V
C6506			NCZ1008-333X	C CAPACITOR	0.033μF
C6508			NCB31EK-103X	C CAPACITOR	0.01μF,25V
C6509			NCZ1024-103X	C CAPACITOR	0.01μF,250V
C6510			NCZ1043-333X	C CAPACITOR	0.033μF,250V
C6512			QEZ0450-326	E CAPACITOR,BY HAND	32μF,300V
L6501			NQS0042-001X	SIGNAL SW TRANS	
L6502			NQL302N-100X	INDUCTOR	10μH
L6503			NQL044K-470X	P COIL	47μH
WR1			WJV0070-001A	E-PRIMARY WIRE	
WR2			WJV0071-001A	E-PRIMARY WIRE	
UN1			LY33438-001B	STROBE ASSY	
OT1			LY30030-098A	SPACER(A),WIRE HOLD	
OT2			LY30030-0K6A	SPACER(A),Q6503	
OT3			LY41409-002A	SPACER(STROBO),SENSOR	
CN6501			QGF0517F1-12X	FPC CONNE,SD PWB	

VFBW BOARD ASSEMBLY<08>

PW1	YB20954A	VFBW P.ASS'Y	
Q7001	PUMX1-W	PAIR TRANSISTOR	
D7001	E1S35AW0C501-X	LED	
R7001	NRVA63D-332X	CMF RESISTOR	3.3kΩ,1/16W
R7002	NRVA63D-561X	CMF RESISTOR	560Ω,1/16W
R7003	NRVA63D-470X	CMF RESISTOR	47Ω,1/16W
R7004	NRSA63J-102X	MG RESISTOR	1kΩ,1/16W
C7001	NCF31CZ-104X	C CAPACITOR	0.1μF,16V
C7002	NCF31CZ-104X	C CAPACITOR	0.1μF,16V
C7003	NCF31CZ-104X	C CAPACITOR	0.1μF,16V
C7004	NCF31CZ-104X	C CAPACITOR	0.1μF,16V
CN7001	QGF0532F1-18X	FFC/FPC CONNE,SD	
CN7002	QGF0530F1-20W	FPC CONNE,LCD	