


SECTION 7 EXPLODED VIEWS

NOTE:

- -XX and -X mean standardized parts, so they may have some difference from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.


- The mechanical parts with no reference number in the exploded views are not supplied.
- Abbreviation
AUS : Australian model
KR : Korean model

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

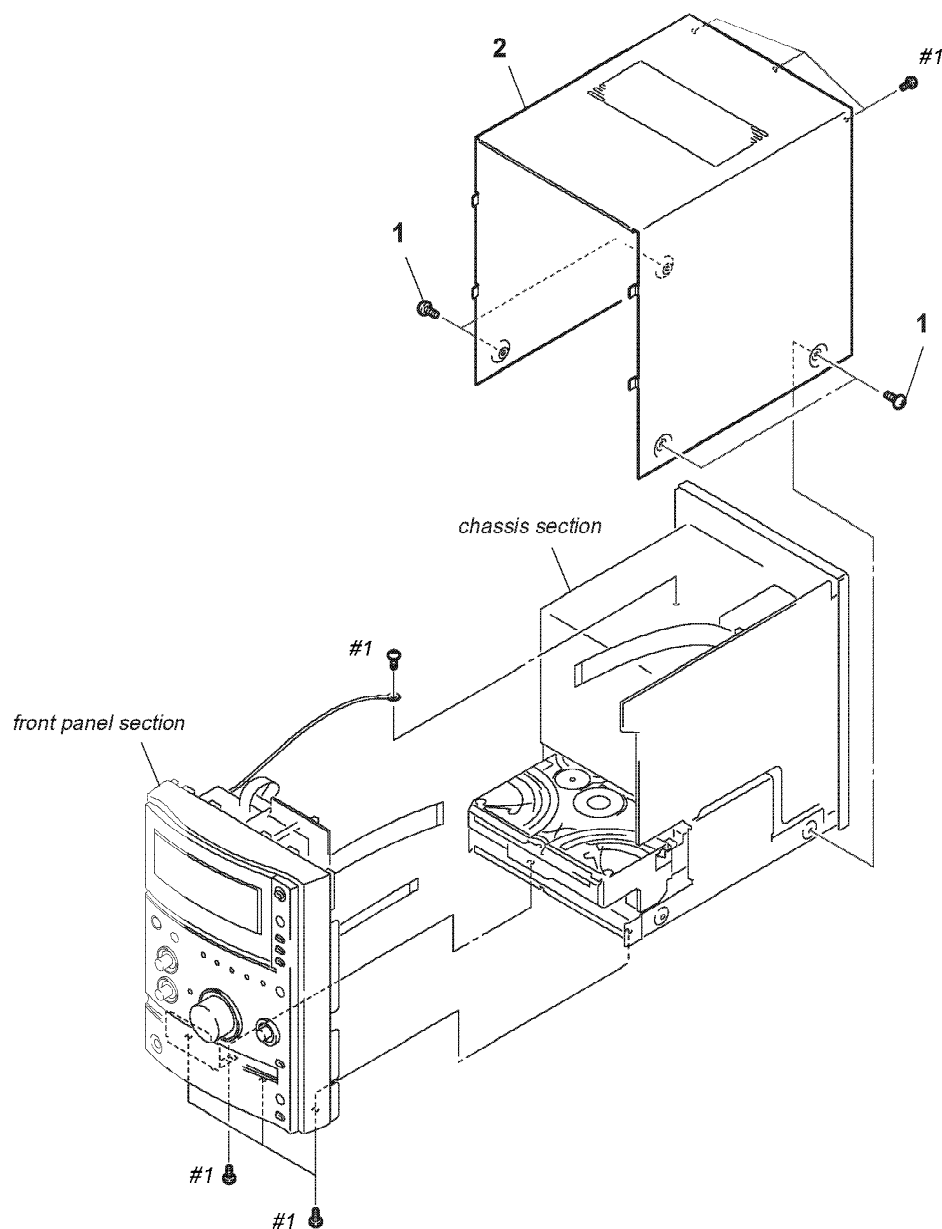7-1. MAIN SECTION


Ref. No.	Part No.	Description	Remark
1	4-235-099-11	SCREW (CASE 3 TP2)	
2	4-244-016-21	COVER	
#1	7-685-645-79	SCREW +BVTP 3X6 TYPE2 TT (B)	

7-2. FRONT PANEL SECTION

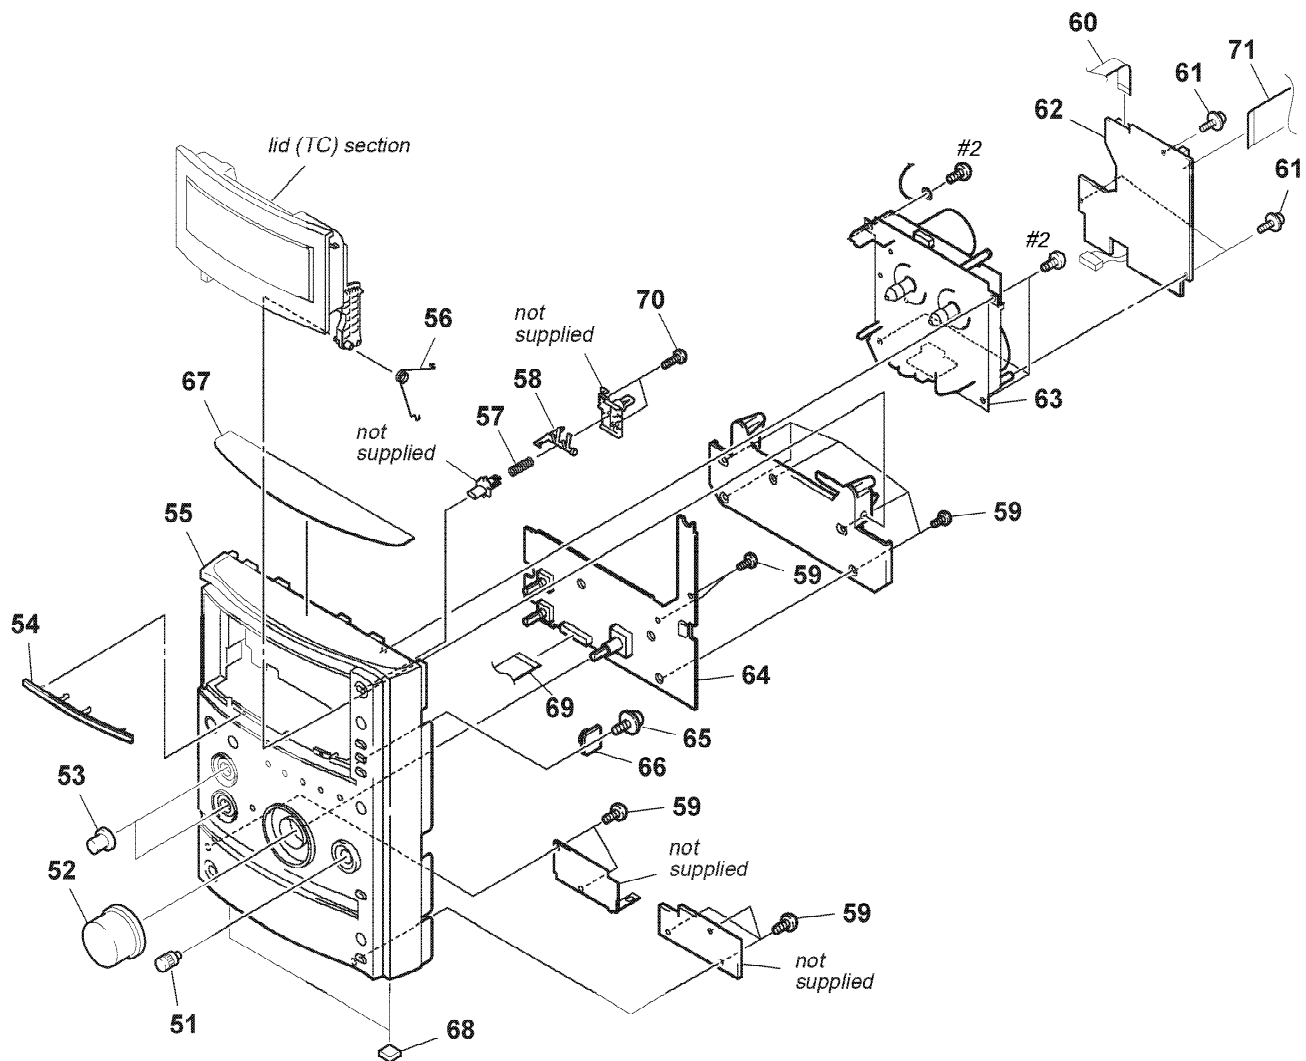


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	4-252-359-01	KNOB, TUNING		62	A-4750-369-A	TC BOARD, COMPLETE	
52	4-252-348-01	KNOB, VOLUME		63	1-796-456-31	DECK, MECHANICAL (CMAL1Z-236A)	
53	4-252-349-01	KNOB, BASS		64	A-4750-358-A	PANEL BOARD, COMPLETE	
54	4-252-352-01	BAND (UPPER), DIVISION		65	4-933-134-11	SCREW (+PTPWH M2.6X8)	
55	X-4956-171-1	PANEL ASSY, FRONT (AEP, UK)		66	4-244-530-01	DAMPER	
56	X-4956-181-1	PANEL ASSY, FRONT (KR, AUS)		67	4-252-396-01	PLATE (TOP), ORNAMENT	
57	4-244-021-01	SPRING (LID TC), TORSION		68	4-233-372-02	FOOT (FELT)	
58	4-244-023-01	SPRING (EJECT), COMPRESSION		69	1-773-120-11	WIRE (FLAT TYPE) (19 CORE)	
59	4-244-014-01	LEVER (EJECT)		70	4-951-620-31	SCREW (2.6), +BVTP	
	4-951-620-01	SCREW (2.6X8), +BVTP		71	1-773-110-11	WIRE (FLAT TYPE) (19 CORE)	
60	1-824-192-11	WIRE (FLAT TYPE) (8 CORE)		#2	7-685-646-79	SCREW +BVTP 3X8 TYPE2 TT (B)	
61	3-669-480-51	+ PTPWH 2					

7-3. LID (TC) SECTION

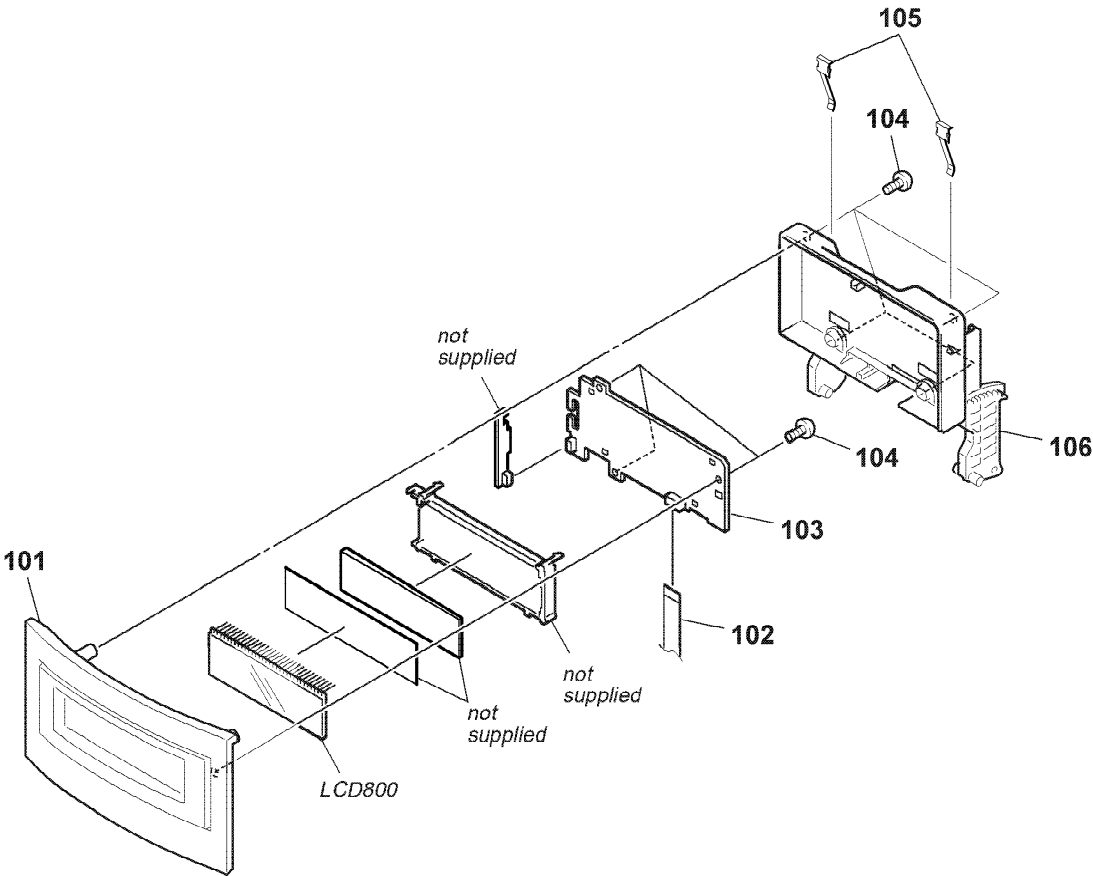

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	X-4956-169-1	LID (TC) ASSY		105	4-244-022-01	SPRING (TC), LEAF	
102	1-769-912-11	WIRE (FLAT TYPE) (9 CORE)		106	4-252-353-01	HOLDER (TC)	
103	1-861-335-11	LCD BOARD		LCD800	1-805-545-11	DISPLAY PANEL, LIQUID CRYSTAL	
104	4-951-620-01	SCREW (2.6X8), +BVTP					


7-4. CHASSIS SECTION

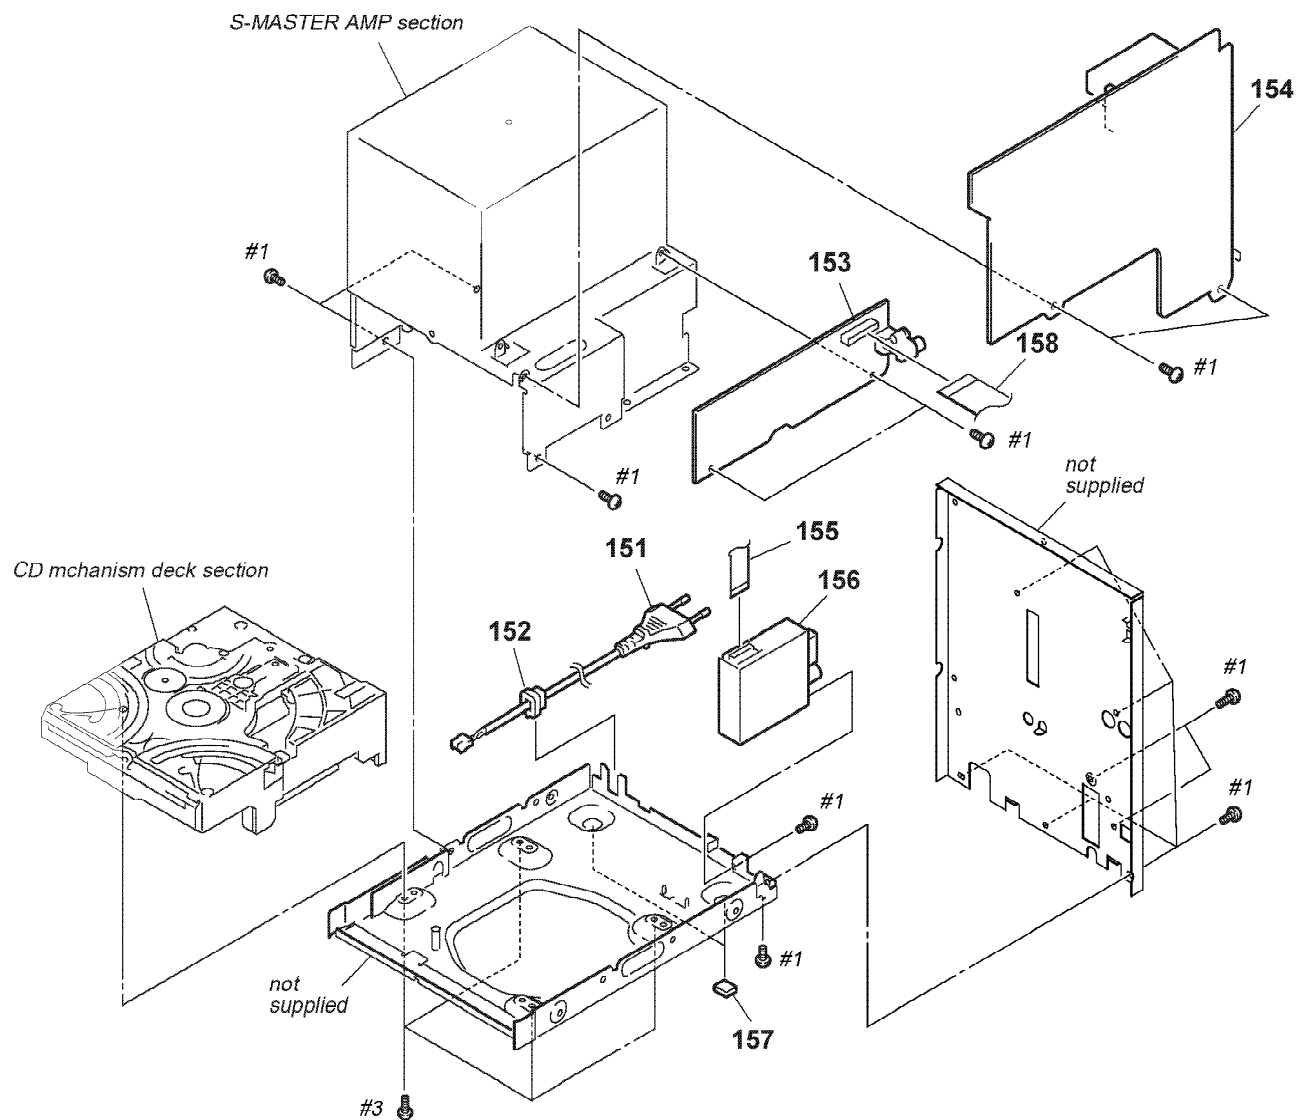

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
△ 151	1-769-079-23	CORD, POWER (KR)		155	1-824-486-11	WIRE (FLAT TYPE) (11 CORE) (KR, AUS)	
△ 151	1-777-071-83	CORD, POWER (AEP, UK)		156	1-693-603-31	TUNER (FM/AM) (AUS)	
△ 151	1-783-203-13	CORD, POWER (AUS)		156	1-693-604-11	TUNER (FM/AM) (AEP, UK)	
152	3-703-244-00	BUSHING (2104), CORD		156	1-693-605-11	TUNER (FM/AM) (KR)	
153	A-4750-356-A	PRE AMP BOARD, COMPLETE		157	4-233-372-02	FOOT (FELT)	
154	A-4750-353-A	MAIN BOARD, COMPLETE (AEP, UK)		158	1-773-105-11	WIRE (FLAT TYPE) (19 CORE)	
154	A-4750-940-A	MAIN BOARD, COMPLETE (KR, AUS)		#1	7-685-645-79	SCREW +BVTP 3X6 TYPE2 TT (B)	
155	1-777-353-11	FLAT CABLE (15 CORE) (AEP, UK)		#3	7-685-647-79	SCREW +BVTP 3X10 TYPE2 TT (B)	

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.


7-5. S-MASTER AMP SECTION

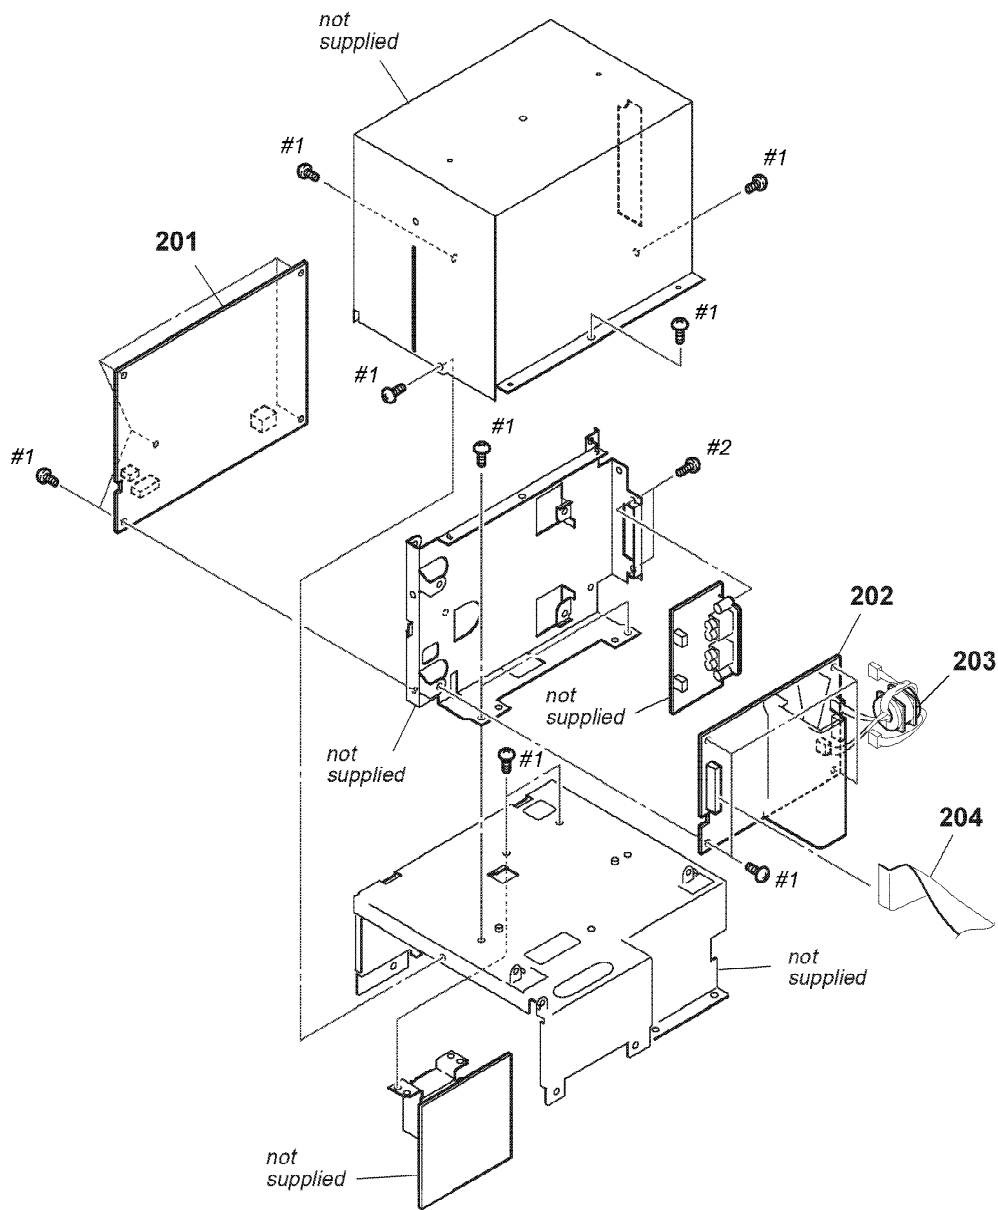

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
△ 201	1-468-730-11	REGULATOR, SWITCHING		204	1-773-158-11	WIRE (FLAT TYPE) (21 CORE)	
202	A-4750-366-A	S-MASTER AMP BOARD, COMPLETE		#1	7-685-645-79	SCREW +BVTP 3X6 TYPE2 TT (B)	
203	1-500-484-21	CLAMP, SLEEVE FERRITE		#2	7-685-646-79	SCREW +BVTP 3X8 TYPE2 TT (B)	


The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

7-6. CD MECHANISM DECK SECTION-1
(CDM80BH-F1BD81)

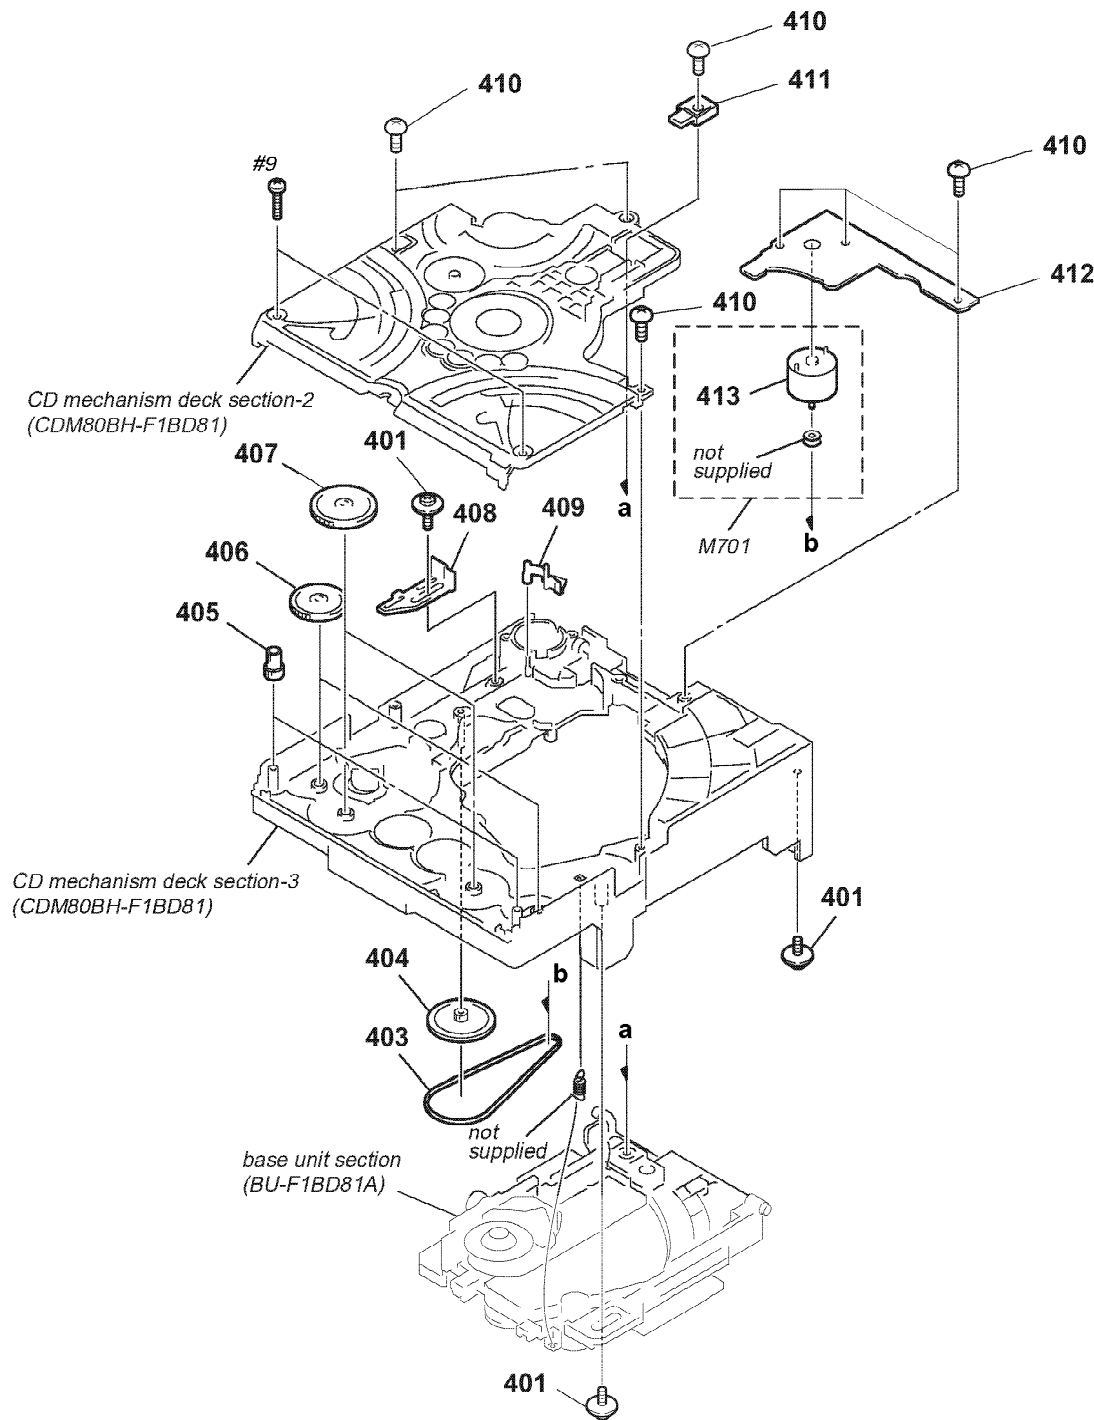


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
401	4-985-672-01	SCREW (+PTPWHM2.6), FLOATING		409	4-245-630-01	LEVER (SW)	
403	4-245-653-01	BELT (MOT)		410	4-951-620-01	SCREW (2.6X8), +BVTP	
404	4-245-662-02	PULLEY (GEAR)		411	4-245-639-01	LEVER (CL UP2)	
405	4-245-646-01	GEAR (IDL-F)		412	1-688-337-11	DRIVER BOARD	
406	4-245-644-01	GEAR (IDL-D)		413	1-763-967-11	MOTOR, DC	
407	4-245-645-01	GEAR (IDL-E)		M701	X-2021-530-1	MOTOR (PULLEY) ASSY (LOADING)	
408	4-246-203-01	LEVER (RELEASE)		#9	7-685-106-19	SCREW +P 2X10 TYPE2 NON-SLIT	

7-7. CD MECHANISM DECK SECTION-2 (CDM80BH-F1BD81)

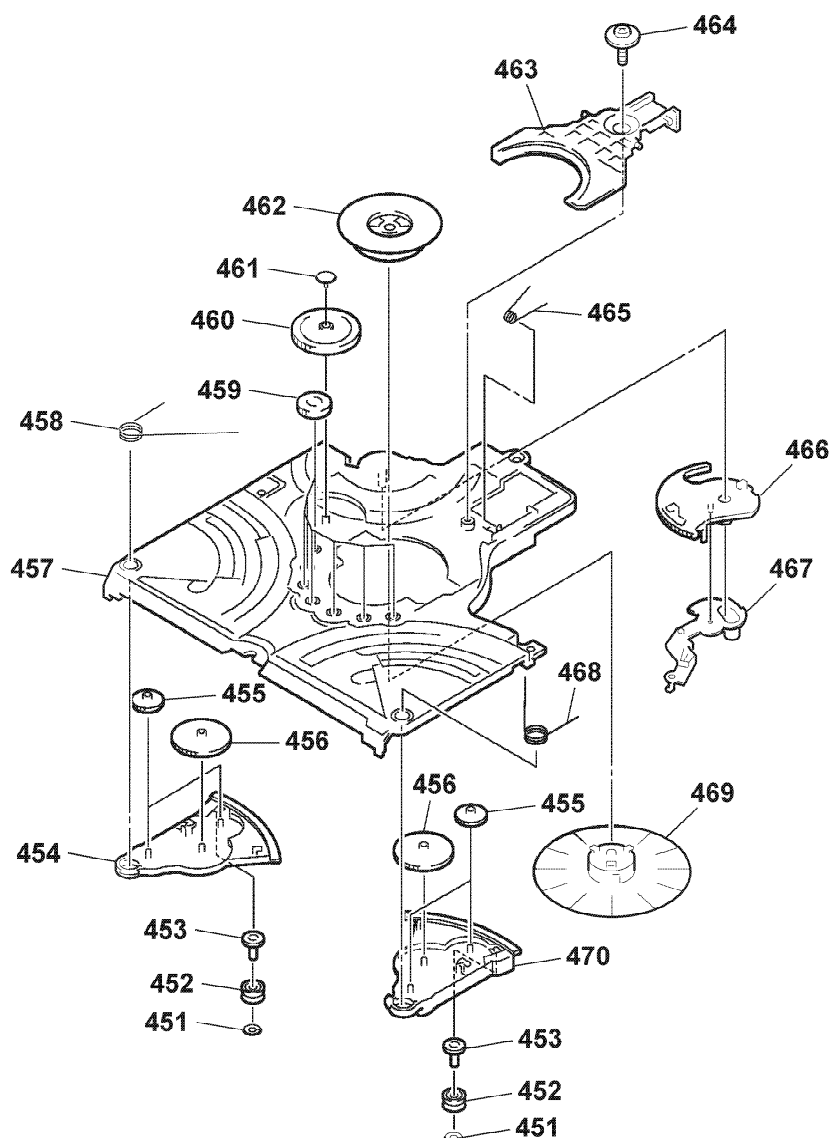


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
451	4-245-627-01	WASHER (6-2.7-0.4)		461	4-245-640-01	GEAR (CAP)	
452	4-245-637-01	ROLLER, RUBBER		462	1-452-925-21	MAGNET ASSY	
453	4-245-649-01	GEAR (IDL-I)		463	4-245-638-01	LEVER (CL UP1)	
454	4-245-657-01	LEVER (LOADING-R)		464	4-985-672-01	SCREW (+PTPWHM2.6), FLOATING	
455	4-245-647-01	GEAR (IDL-G)		465	4-245-636-01	SPR-T CL DOWN	
456	4-245-648-01	GEAR (IDL-H)		466	4-245-658-01	LEVER (DISC STOP)	
457	4-245-655-01	CHASSIS (TOP)		467	4-245-659-01	LEVER (DISC SENSOR)	
458	4-245-631-01	SPR-T (LOADING-R)		468	4-245-632-01	SPR-T (LOADING-L)	
459	4-245-650-01	GEAR (IDL-J)		469	X-2021-532-1	CLAMPER 213 ASSY	
460	4-245-651-01	GEAR (IDL-L)		470	4-245-656-01	LEVER (LOADING-L)	

7-8. CD MECHANISM DECK SECTION-3
(CDM80BH-F1BD81)

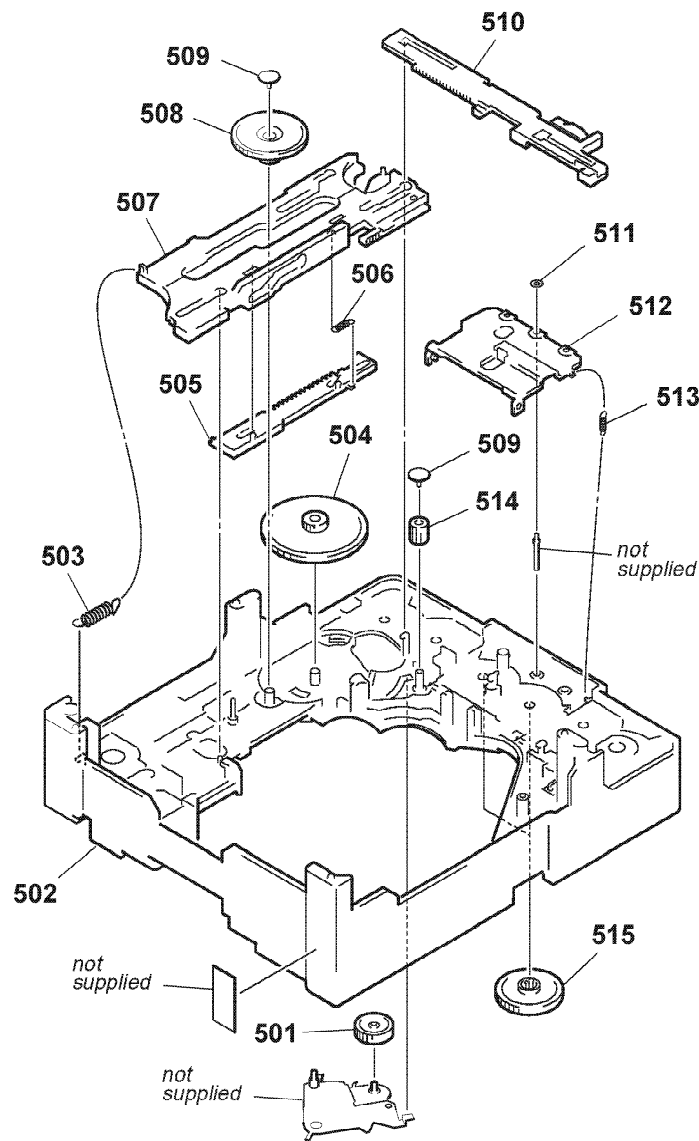

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
501	4-245-643-01	GEAR (IDL-C)		509	4-245-640-01	GEAR (CAP)	
502	X-4956-147-1	CHASSIS (BOTTOM) ASSY		510	4-245-628-01	LEVER (BU LOCK)	
503	4-248-722-01	SPR-E, DIR		511	4-248-206-01	WASHER (3-1-0.4)	
504	4-245-642-01	GEAR (IDL-B)		512	4-245-624-01	LEVER, CLOSE	
505	4-245-814-01	LEVER (DIR FIRST)		513	4-245-635-01	SPR-E LEVER CLOSE	
506	4-245-633-01	SPR-E DIR BACK		514	4-245-629-01	GEAR (BU LOCK)	
507	4-245-660-01	LEVER (DIR)		515	4-245-644-01	GEAR (IDL-D)	
508	4-245-641-01	GEAR (IDL-A)					

7-9. BASE UNIT SECTION (BU-F1BD81A)

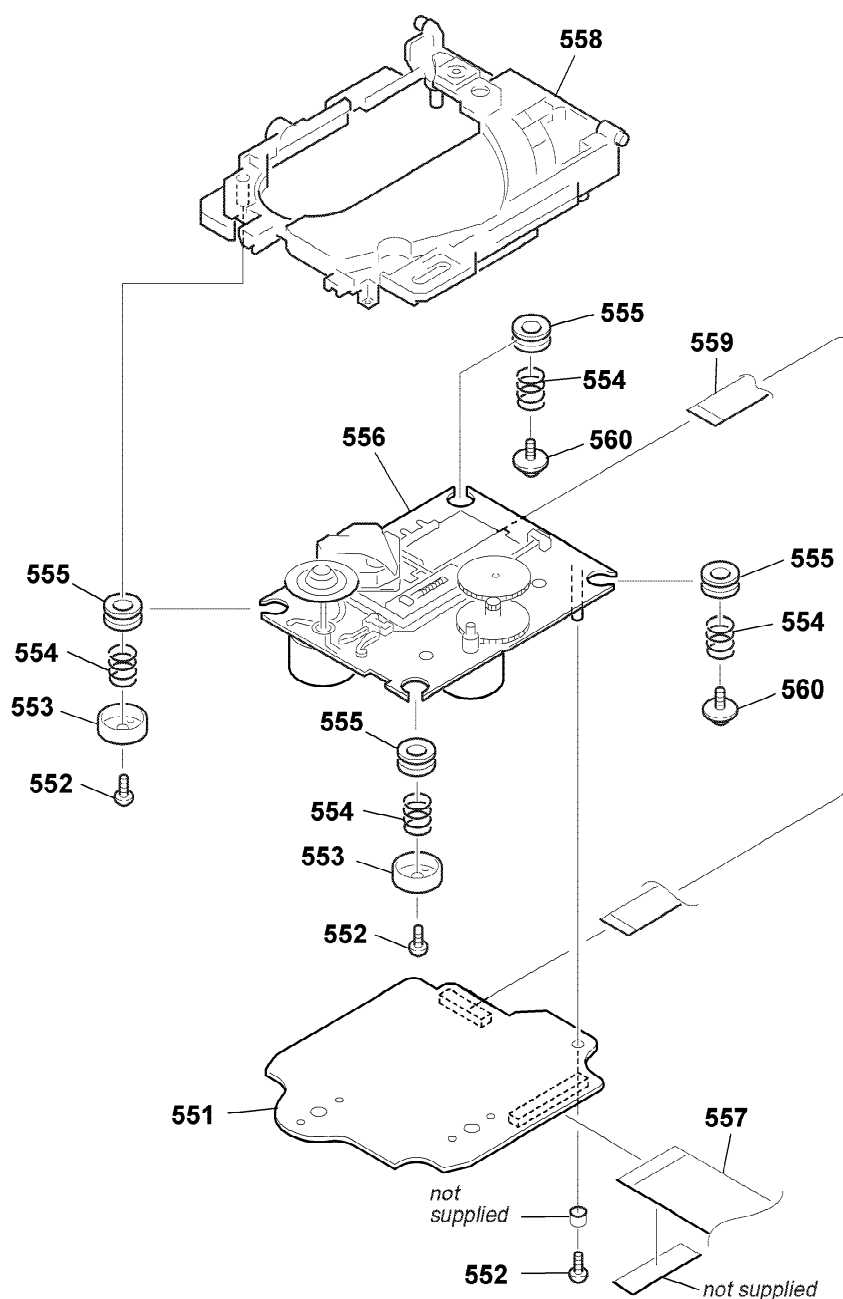

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
551	A-4751-431-A	BD81A BOARD, COMPLETE		△ 556	8-820-244-01	OPTICAL PICK-UP (KSM-215DCP/C2NP)	
552	4-951-620-01	SCREW (2.6X8), +BVTP		557	1-775-241-11	WIRE (FLAT TYPE) (27 CORE)	
553	4-231-151-01	STOPPER (BU)		558	X-4956-146-1	HOLDER (BU215) ASSY	
554	4-227-045-31	SPRING (INSULATOR), COIL		559	1-827-992-11	WIRE (FLAT TYPE) (16 CORE)	
555	4-227-549-11	INSULATOR		560	4-985-672-01	SCREW (+PTPWHM2.6), FLOATING	

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

SECTION 8

BACK LIGHT

BD81A

ELECTRICAL PARTS LIST

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable
- CAPACITORS
uF: μ F
- COILS
uH: μ H
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- SEMICONDUCTORS
In each case, u: μ , for example:
uA. . : μ A. . uPA. . : μ PA. .
uPB. . : μ PB. . uPC. . : μ PC. .
uPD. . : μ PD. .
- Accessories are given in the last of this parts list.
- Abbreviation
AUS : Australian model
KR : Korean model

When indicating parts by reference number, please include the board name.

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
		BACK LIGHT BOARD *****		C172	1-162-920-11	CERAMIC CHIP 27PF 5%	50V
		< CONNECTOR >		C174	1-164-360-11	CERAMIC CHIP 0.1uF	16V
CN807	1-770-011-41	CONNECTOR, BOARD TO BOARD 4P		C181	1-164-360-11	CERAMIC CHIP 0.1uF	16V
		< DIODE >		C182	1-164-360-11	CERAMIC CHIP 0.1uF	16V
D806	8-719-075-50	DIODE SELS6B14C-TP5 (LCD BACK LIGHT)		C183	1-124-778-00	ELECT CHIP 22uF 20%	6.3V
D807	8-719-075-50	DIODE SELS6B14C-TP5 (LCD BACK LIGHT)		C184	1-124-778-00	ELECT CHIP 22uF 20%	6.3V
*****				C185	1-164-315-11	CERAMIC CHIP 470PF 5%	50V
A-4751-431-A	BD81A BOARD, COMPLETE	*****		C186	1-164-315-11	CERAMIC CHIP 470PF 5%	50V
		< CAPACITOR >		C194	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C10	1-165-989-11	CERAMIC CHIP 10uF 10%	6.3V	C195	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C11	1-165-989-11	CERAMIC CHIP 10uF 10%	6.3V	C196	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C14	1-164-360-11	CERAMIC CHIP 0.1uF	16V	C201	1-128-995-21	ELECT CHIP 100uF 20%	10V
C15	1-164-360-11	CERAMIC CHIP 0.1uF	16V	C203	1-128-995-21	ELECT CHIP 100uF 20%	10V
C16	1-115-156-11	CERAMIC CHIP 1uF	10V	C209	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
C17	1-126-246-11	ELECT CHIP 220uF 20%	4V	C210	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C18	1-162-964-11	CERAMIC CHIP 0.001uF 10%	50V	C211	1-164-230-11	CERAMIC CHIP 220PF 5%	50V
C111	1-162-967-11	CERAMIC CHIP 0.0033uF 10%	50V	C212	1-162-919-11	CERAMIC CHIP 22PF 5%	50V
C112	1-164-315-11	CERAMIC CHIP 470PF 5%	50V	C213	1-162-919-11	CERAMIC CHIP 22PF 5%	50V
C113	1-162-967-11	CERAMIC CHIP 0.0033uF 10%	50V	C251	1-162-969-11	CERAMIC CHIP 0.0068uF 10%	25V
C114	1-164-315-11	CERAMIC CHIP 470PF 5%	50V	C252	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C115	1-164-360-11	CERAMIC CHIP 0.1uF	16V	C255	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C116	1-128-995-21	ELECT CHIP 100uF 20%	10V	C257	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C122	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	C258	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C123	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	C259	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C124	1-162-959-11	CERAMIC CHIP 330PF 5%	50V	C260	1-128-394-11	ELECT CHIP 220uF 20%	10V
C125	1-164-360-11	CERAMIC CHIP 0.1uF	16V	C302	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C131	1-162-927-11	CERAMIC CHIP 100PF 5%	50V	C303	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C132	1-117-863-11	CERAMIC CHIP 0.47uF 10%	6.3V	C305	1-126-246-11	ELECT CHIP 220uF 20%	4V
C133	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	C306	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C134	1-164-360-11	CERAMIC CHIP 0.1uF	16V	C307	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C141	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	C308	1-126-208-21	ELECT CHIP 47uF 20%	4V
C142	1-162-965-11	CERAMIC CHIP 0.0015uF 10%	50V	C309	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C143	1-164-360-11	CERAMIC CHIP 0.1uF	16V	C310	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C151	1-128-995-21	ELECT CHIP 100uF 20%	10V	C311	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C161	1-164-360-11	CERAMIC CHIP 0.1uF	16V	C312	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C162	1-164-360-11	CERAMIC CHIP 0.1uF	16V	C313	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C163	1-164-360-11	CERAMIC CHIP 0.1uF	16V	C314	1-126-208-21	ELECT CHIP 47uF 20%	4V
C171	1-162-919-11	CERAMIC CHIP 22PF 5%	50V	C315	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
				C316	1-162-966-11	CERAMIC CHIP 0.0022uF 10%	50V
				C317	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
				C318	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
				C320	1-216-864-11	SHORT CHIP 0	

BD81A

DRIVER

HP

Ref. No.	Part No.	Description	Remark				Ref. No.	Part No.	Description	Remark				
< CONNECTOR >														
CN101	1-770-425-11	CONNECTOR, FFC/FPC 16P					R351	1-216-809-11	METAL CHIP	100	5%	1/10W		
CN201	1-818-350-11	CONNECTOR (FFC) 27P					R352	1-216-809-11	METAL CHIP	100	5%	1/10W		
< FERRITE BEAD >														
FB301	1-500-445-21	FERRITE, EMI (SMD) (2012)					R353	1-216-809-11	METAL CHIP	100	5%	1/10W		
< IC >														
IC101	8-752-425-12	IC CXD3059AR					R354	1-216-809-11	METAL CHIP	100	5%	1/10W		
IC251	6-705-808-01	IC BA5947FM					R401	1-216-809-11	METAL CHIP	100	5%	1/10W		
IC301	6-705-365-01	IC TC94A34FG-002					R402	1-216-809-11	METAL CHIP	100	5%	1/10W		
IC303	6-705-807-01	IC BH15FB1WG					R403	1-216-809-11	METAL CHIP	100	5%	1/10W		
< TRANSISTOR >														
Q10	6-550-363-01	TRANSISTOR 2SB1690KT146					R404	1-216-809-11	METAL CHIP	100	5%	1/10W		
< RESISTOR >														
R10	1-216-791-11	METAL CHIP	3.3	5%	1/10W									
R11	1-216-864-11	SHORT CHIP	0			S101	1-771-853-11	SWITCH,DETECTION (LIMIT)						
R12	1-216-845-11	METAL CHIP	100K	5%	1/10W									
R13	1-218-446-11	METAL CHIP	1	5%	1/10W	< VIBRATOR >								
R111	1-216-821-11	METAL CHIP	1K	5%	1/10W	X171	1-767-408-21	VIBRATOR, CRYSTAL (16.9MHz)	*****					
R112	1-216-835-11	METAL CHIP	15K	5%	1/10W									
R113	1-216-821-11	METAL CHIP	1K	5%	1/10W									
R114	1-216-835-11	METAL CHIP	15K	5%	1/10W	1-688-337-11	DRIVER BOARD	*****						
R121	1-216-835-11	METAL CHIP	15K	5%	1/10W	< CAPACITOR >								
R131	1-216-857-11	METAL CHIP	1M	5%	1/10W	C705	1-162-306-11	CERAMIC	0.01uF	20%	16V			
R132	1-216-833-11	METAL CHIP	10K	5%	1/10W	C711	1-126-964-11	ELECT	10uF	20%	50V			
R133	1-216-848-11	METAL CHIP	180K	5%	1/10W	< CONNECTOR >								
R141	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	CN701	1-785-333-11	PIN, CONNECTOR (LIGHT ANGLE) 7P						
R142	1-216-821-11	METAL CHIP	1K	5%	1/10W	< DIODE >								
R143	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	D701	8-719-921-40	DIODE MTZJ-4.7C						
R151	1-216-864-11	SHORT CHIP	0			< IC >								
R161	1-216-809-11	METAL CHIP	100	5%	1/10W	IC701	8-759-598-69	IC BA6956AN						
R162	1-216-841-11	METAL CHIP	47K	5%	1/10W	< RESISTOR >								
R163	1-216-809-11	METAL CHIP	100	5%	1/10W	R701	1-249-415-11	CARBON	680	5%	1/4W			
R165	1-216-864-11	SHORT CHIP	0			R702	1-247-807-31	CARBON	100	5%	1/4W			
R171	1-216-817-11	METAL CHIP	470	5%	1/10W	< SWITCH >								
R172	1-216-857-11	METAL CHIP	1M	5%	1/10W	S701	1-762-951-13	SWITCH, PUSH (OUT)						
R173	1-216-295-91	SHORT CHIP	0			S702	1-762-951-13	SWITCH, PUSH (CHUCK)						
R181	1-216-809-11	METAL CHIP	100	5%	1/10W	S703	1-762-951-13	SWITCH, PUSH (TRIGGER)	*****					
R182	1-216-809-11	METAL CHIP	100	5%	1/10W	HP BOARD								
R191	1-216-864-11	SHORT CHIP	0			*****								
R201	1-500-445-21	FERRITE, EMI (SMD) (2012)					< CAPACITOR >							
R203	1-216-864-11	SHORT CHIP	0			C891	1-164-156-11	CERAMIC CHIP	0.1uF		25V			
R204	1-500-445-21	FERRITE, EMI (SMD) (2012)					C892	1-164-156-11	CERAMIC CHIP	0.1uF		25V		
R205	1-216-864-11	SHORT CHIP	0											
R251	1-216-833-11	METAL CHIP	10K	5%	1/10W									
R252	1-216-837-11	METAL CHIP	22K	5%	1/10W									
R253	1-216-833-11	METAL CHIP	10K	5%	1/10W									
R301	1-216-845-11	METAL CHIP	100K	5%	1/10W									
R302	1-216-833-11	METAL CHIP	10K	5%	1/10W									
R303	1-216-845-11	METAL CHIP	100K	5%	1/10W									
R305	1-216-845-11	METAL CHIP	100K	5%	1/10W									
R306	1-216-864-11	SHORT CHIP	0											
R307	1-216-833-11	METAL CHIP	10K	5%	1/10W									
R313	1-216-813-11	METAL CHIP	220	5%	1/10W									

HCD-CPX11

HP	LCD	MAIN
----	-----	------

Ref. No.	Part No.	Description	Remark
C894	1-164-156-11	CERAMIC CHIP 0.1uF	25V
< FERRITE BEAD >			
FB891	1-216-864-11	SHORT CHIP 0	
FB893	1-216-864-11	SHORT CHIP 0	
FB894	1-216-864-11	SHORT CHIP 0	
< JACK >			
J801	1-815-603-11	JACK (PHONES)	

	1-861-335-11	LCD BOARD	

< CAPACITOR >			
C854	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C856	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C857	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C858	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C859	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C860	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
< CONNECTOR >			
CN805	1-784-731-11	CONNECTOR, FFC 9P	
CN806	1-770-010-21	CONNECTOR, BOARD TO BOARD 4P	
< SHORT >			
JR801	1-216-296-11	SHORT CHIP 0	
JR802	1-216-296-11	SHORT CHIP 0	
JR803	1-216-296-11	SHORT CHIP 0	
JR804	1-216-296-11	SHORT CHIP 0	
JR805	1-216-296-11	SHORT CHIP 0	
JR806	1-216-296-11	SHORT CHIP 0	
< LIQUID CRYSTAL DISPLAY >			
LCD800	1-805-545-11	DISPLAY PANEL, LIQUID CRYSTAL	
< RESISTOR >			
R841	1-216-817-11	METAL CHIP 470 5%	1/10W
R842	1-216-817-11	METAL CHIP 470 5%	1/10W
R843	1-216-817-11	METAL CHIP 470 5%	1/10W
R844	1-216-817-11	METAL CHIP 470 5%	1/10W
R851	1-216-847-11	METAL CHIP 150K 5%	1/10W
R853	1-216-821-11	METAL CHIP 1K 5%	1/10W
R854	1-216-833-11	METAL CHIP 10K 5%	1/10W
R856	1-216-809-11	METAL CHIP 100 5%	1/10W
R857	1-216-809-11	METAL CHIP 100 5%	1/10W
R858	1-216-809-11	METAL CHIP 100 5%	1/10W
R859	1-216-809-11	METAL CHIP 100 5%	1/10W
R860	1-216-809-11	METAL CHIP 100 5%	1/10W

	A-4750-353-A	MAIN BOARD, COMPLETE (AEP, UK)	
	A-4750-940-A	MAIN BOARD, COMPLETE (KR, AUS)	

	7-685-645-79	SCREW +BVTP 3X6 TYPE2 TT (B)	

Ref. No.	Part No.	Description	Remark
< CAPACITOR >			
C213	1-162-923-11	CERAMIC CHIP 47PF 5%	50V
C218	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C219	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C221	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C222	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C223	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C224	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C228	1-104-658-91	ELECT 100uF 20%	10V
C229	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C230	1-104-658-91	ELECT 100uF 20%	10V
C231	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C232	1-104-658-91	ELECT 100uF 20%	10V
C233	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C234	1-104-658-91	ELECT 100uF 20%	10V
C235	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C236	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C237	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C238	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C239	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C240	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C241	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C251	1-126-961-11	ELECT 2.2uF 20%	50V
C252	1-126-961-11	ELECT 2.2uF 20%	50V
C267	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C268	1-104-658-91	ELECT 100uF 20%	10V
C301	1-126-916-11	ELECT 1000uF 20%	6.3V
C310	1-162-917-11	CERAMIC CHIP 15PF 5%	50V
C311	1-162-919-11	CERAMIC CHIP 22PF 5%	50V
C312	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C316	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C331	1-126-964-11	ELECT 10uF 20%	50V
C332	1-126-964-11	ELECT 10uF 20%	50V
C351	1-126-937-11	ELECT 4700uF 20%	16V
C352	1-126-956-91	ELECT 0.1uF 20%	50V
C353	1-126-925-91	ELECT 470uF 20%	10V
C354	1-126-956-91	ELECT 0.1uF 20%	50V
C355	1-126-925-91	ELECT 470uF 20%	10V
C356	1-126-956-91	ELECT 0.1uF 20%	50V
C357	1-126-925-91	ELECT 470uF 20%	10V
C358	1-126-956-91	ELECT 0.1uF 20%	50V
C359	1-104-658-91	ELECT 100uF 20%	10V
C360	1-126-925-91	ELECT 470uF 20%	10V
C364	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C401	1-126-964-11	ELECT 10uF 20%	50V
C450	1-104-658-91	ELECT 100uF 20%	10V
C451	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C502	1-130-495-00	MYLAR 0.1uF 5%	50V
C503	1-130-495-00	MYLAR 0.1uF 5%	50V
< CONNECTOR >			
CN201	1-779-295-11	CONNECTOR, FFC (LIF (NON-ZIF)) 27P	
CN202	1-785-319-11	PIN, CONNECTOR (STRAIGHT) 7P	
CN301	1-564-505-11	PLUG, CONNECTOR 2P	
CN302	1-785-315-11	PIN, CONNECTOR (STRAIGHT) 3P	
CN303	1-784-780-11	CONNECTOR, FFC 19P	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
CN304	1-568-828-11	CONNECTOR, FFC 9P		Q202	8-729-027-43	TRANSISTOR	DTC114EKA-T146
CN306	1-784-780-11	CONNECTOR, FFC 19P		Q331	8-729-027-23	TRANSISTOR	DTA114EKA-T146
CN307	1-568-830-11	CONNECTOR, FFC 11P (KR, AUS)		Q332	8-729-027-43	TRANSISTOR	DTC114EKA-T146
CN307	1-784-776-11	CONNECTOR, FFC 15P (AEP, UK)		Q333	8-729-027-30	TRANSISTOR	DTA123YKA-T146
CN308	1-784-780-11	CONNECTOR, FFC 19P					
CN309	1-568-838-11	CONNECTOR, FFC 21P		Q334	8-729-027-43	TRANSISTOR	DTC114EKA-T146
		< DIODE >		Q340	8-729-027-43	TRANSISTOR	DTC114EKA-T146
D201	8-719-988-61	DIODE 1SS355TE-17		Q341	8-729-027-23	TRANSISTOR	DTA114EKA-T146
D202	6-500-522-31	DIODE 10EDB40-TB5		Q342	8-729-107-43	TRANSISTOR	2SC3624-L18
D203	6-500-522-31	DIODE 10EDB40-TB5		Q343	8-729-107-43	TRANSISTOR	2SC3624-L18
D204	6-500-522-31	DIODE 10EDB40-TB5					
D205	6-500-522-31	DIODE 10EDB40-TB5				< RESISTOR >	
D301	8-719-988-61	DIODE 1SS355TE-17		R251	1-216-821-11	METAL CHIP	1K 5% 1/10W
D302	8-719-988-61	DIODE 1SS355TE-17		R252	1-216-821-11	METAL CHIP	1K 5% 1/10W
D303	8-719-988-61	DIODE 1SS355TE-17		R253	1-216-845-11	METAL CHIP	100K 5% 1/10W
D304	8-719-988-61	DIODE 1SS355TE-17		R254	1-216-845-11	METAL CHIP	100K 5% 1/10W
D350	6-500-522-31	DIODE 10EDB40-TB5		R301	1-216-809-11	METAL CHIP	100 5% 1/10W
D351	6-500-522-31	DIODE 10EDB40-TB5		R302	1-216-809-11	METAL CHIP	100 5% 1/10W
D352	6-500-522-31	DIODE 10EDB40-TB5		R303	1-216-809-11	METAL CHIP	100 5% 1/10W
D374	8-719-988-61	DIODE 1SS355TE-17		R304	1-216-809-11	METAL CHIP	100 5% 1/10W
D375	8-719-988-61	DIODE 1SS355TE-17		R305	1-216-809-11	METAL CHIP	100 5% 1/10W
D401	8-719-988-61	DIODE 1SS355TE-17		R306	1-216-809-11	METAL CHIP	100 5% 1/10W
D402	8-719-988-61	DIODE 1SS355TE-17		R307	1-216-809-11	METAL CHIP	100 5% 1/10W
D403	8-719-988-61	DIODE 1SS355TE-17		R309	1-216-833-11	METAL CHIP	10K 5% 1/10W
D404	8-719-988-61	DIODE 1SS355TE-17		R311	1-216-851-11	METAL CHIP	330K 5% 1/10W
D442	1-216-295-91	SHORT CHIP 0		R313	1-216-864-11	SHORT CHIP	0
D443	1-216-295-91	SHORT CHIP 0		R317	1-216-833-11	METAL CHIP	10K 5% 1/10W
		< EARTH TERMINAL >		R318	1-216-809-11	METAL CHIP	100 5% 1/10W (AEP, UK)
* EP301	1-537-738-21	TERMINAL, EARTH		R319	1-216-809-11	METAL CHIP	100 5% 1/10W
* EP302	1-537-738-21	TERMINAL, EARTH		R320	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
		< FERRITE BEAD >		R321	1-216-809-11	METAL CHIP	100 5% 1/10W
FB201	1-414-772-11	FERRITE. EMI (SMD) (2012)		R322	1-216-809-11	METAL CHIP	100 5% 1/10W
FB203	1-414-772-11	FERRITE. EMI (SMD) (2012)		R323	1-216-809-11	METAL CHIP	100 5% 1/10W
FB205	1-414-772-11	FERRITE. EMI (SMD) (2012)		R326	1-216-809-11	METAL CHIP	100 5% 1/10W
FB207	1-414-772-11	FERRITE. EMI (SMD) (2012)		R327	1-216-809-11	METAL CHIP	100 5% 1/10W
FB214	1-414-772-11	FERRITE. EMI (SMD) (2012)		R328	1-216-809-11	METAL CHIP	100 5% 1/10W
FB216	1-414-772-11	FERRITE. EMI (SMD) (2012)		R332	1-216-809-11	METAL CHIP	100 5% 1/10W
FB225	1-414-772-11	FERRITE. EMI (SMD) (2012)		R333	1-216-809-11	METAL CHIP	100 5% 1/10W
FB227	1-414-772-11	FERRITE. EMI (SMD) (2012)		R334	1-216-809-11	METAL CHIP	100 5% 1/10W
FB301	1-216-864-11	SHORT CHIP 0		R335	1-216-809-11	METAL CHIP	100 5% 1/10W
FB302	1-216-864-11	SHORT CHIP 0		R336	1-216-809-11	METAL CHIP	100 5% 1/10W
FB303	1-216-864-11	SHORT CHIP 0		R337	1-216-809-11	METAL CHIP	100 5% 1/10W
		< IC >		R339	1-216-809-11	METAL CHIP	100 5% 1/10W
IC201	8-759-701-59	IC NJM78M09FA		R340	1-216-809-11	METAL CHIP	100 5% 1/10W
IC202	8-759-071-48	IC TA7807S		R341	1-216-809-11	METAL CHIP	100 5% 1/10W
IC203	6-703-546-01	IC TA7804LS		R342	1-216-809-11	METAL CHIP	100 5% 1/10W
IC204	8-759-231-53	IC TA7805S		R343	1-216-809-11	METAL CHIP	100 5% 1/10W
IC300	6-804-485-01	IC M3062CMEN-A14FPU0		R344	1-216-809-11	METAL CHIP	100 5% 1/10W
IC401	8-759-532-64	IC M62703SL-TP		R345	1-216-809-11	METAL CHIP	100 5% 1/10W
IC450	8-749-019-25	IC TOTX141 (CD DIGITAL OUT (OPTICAL))		R346	1-216-809-11	METAL CHIP	100 5% 1/10W
		< TRANSISTOR >		R347	1-216-809-11	METAL CHIP	100 5% 1/10W
Q201	8-729-049-79	TRANSISTOR RT1P137S-TP		R348	1-216-809-11	METAL CHIP	100 5% 1/10W
				R349	1-216-809-11	METAL CHIP	100 5% 1/10W
				R350	1-216-809-11	METAL CHIP	100 5% 1/10W
				R351	1-216-809-11	METAL CHIP	100 5% 1/10W
				R352	1-216-809-11	METAL CHIP	100 5% 1/10W
				R353	1-216-809-11	METAL CHIP	100 5% 1/10W

HCD-CPX11

MAIN

PANEL

Ref. No.	Part No.	Description	Remark
R354	1-216-809-11	METAL CHIP	100 5% 1/10W (AEP, UK)
R355	1-216-809-11	METAL CHIP	100 5% 1/10W
R357	1-216-809-11	METAL CHIP	100 5% 1/10W
R361	1-216-809-11	METAL CHIP	100 5% 1/10W
R365	1-216-809-11	METAL CHIP	100 5% 1/10W
R366	1-216-809-11	METAL CHIP	100 5% 1/10W
R367	1-216-809-11	METAL CHIP	100 5% 1/10W
R368	1-216-809-11	METAL CHIP	100 5% 1/10W
R369	1-216-809-11	METAL CHIP	100 5% 1/10W
R370	1-216-809-11	METAL CHIP	100 5% 1/10W
R371	1-216-809-11	METAL CHIP	100 5% 1/10W
R372	1-216-809-11	METAL CHIP	100 5% 1/10W
R373	1-216-809-11	METAL CHIP	100 5% 1/10W
R375	1-216-809-11	METAL CHIP	100 5% 1/10W
R376	1-216-809-11	METAL CHIP	100 5% 1/10W
R377	1-216-809-11	METAL CHIP	100 5% 1/10W
R378	1-216-809-11	METAL CHIP	100 5% 1/10W
R379	1-216-809-11	METAL CHIP	100 5% 1/10W
R380	1-216-809-11	METAL CHIP	100 5% 1/10W
R381	1-216-809-11	METAL CHIP	100 5% 1/10W
R382	1-216-809-11	METAL CHIP	100 5% 1/10W
R383	1-216-809-11	METAL CHIP	100 5% 1/10W
R384	1-216-809-11	METAL CHIP	100 5% 1/10W
R385	1-216-809-11	METAL CHIP	100 5% 1/10W
R386	1-216-809-11	METAL CHIP	100 5% 1/10W
R387	1-216-809-11	METAL CHIP	100 5% 1/10W
R388	1-216-809-11	METAL CHIP	100 5% 1/10W
R389	1-216-809-11	METAL CHIP	100 5% 1/10W
R390	1-216-809-11	METAL CHIP	100 5% 1/10W
R391	1-216-809-11	METAL CHIP	100 5% 1/10W
R392	1-216-864-11	SHORT CHIP	0
R393	1-216-864-11	SHORT CHIP	0 (KR, AUS)
R394	1-216-797-11	METAL CHIP	10 5% 1/10W
R395	1-216-797-11	METAL CHIP	10 5% 1/10W
R397	1-216-797-11	METAL CHIP	10 5% 1/10W
R400	1-216-809-11	METAL CHIP	100 5% 1/10W
R401	1-216-813-11	METAL CHIP	220 5% 1/10W
R402	1-216-833-11	METAL CHIP	10K 5% 1/10W
R403	1-216-841-11	METAL CHIP	47K 5% 1/10W
R404	1-216-841-11	METAL CHIP	47K 5% 1/10W
R405	1-216-833-11	METAL CHIP	10K 5% 1/10W
R406	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R418	1-216-864-11	SHORT CHIP	0 (KR, AUS)
R420	1-216-833-11	METAL CHIP	10K 5% 1/10W
R426	1-216-833-11	METAL CHIP	10K 5% 1/10W
R427	1-216-833-11	METAL CHIP	10K 5% 1/10W
R428	1-216-833-11	METAL CHIP	10K 5% 1/10W
R429	1-216-833-11	METAL CHIP	10K 5% 1/10W
R430	1-216-833-11	METAL CHIP	10K 5% 1/10W
R440	1-216-833-11	METAL CHIP	10K 5% 1/10W
R442	1-216-833-11	METAL CHIP	10K 5% 1/10W
R443	1-216-833-11	METAL CHIP	10K 5% 1/10W
R450	1-216-809-11	METAL CHIP	100 5% 1/10W
R451	1-216-833-11	METAL CHIP	10K 5% 1/10W
R452	1-216-833-11	METAL CHIP	10K 5% 1/10W
R455	1-216-864-11	SHORT CHIP	0 (KR, AUS)
R474	1-216-857-11	METAL CHIP	1M 5% 1/10W

Ref. No.	Part No.	Description			Remark
R483	1-216-833-11	METAL CHIP	10K	5%	1/10W
R484	1-216-833-11	METAL CHIP	10K	5%	1/10W
R485	1-216-833-11	METAL CHIP	10K	5%	1/10W
R486	1-216-833-11	METAL CHIP	10K	5%	1/10W
R487	1-216-833-11	METAL CHIP	10K	5%	1/10W
R488	1-216-833-11	METAL CHIP	10K	5%	1/10W
R493	1-216-864-11	SHORT CHIP	0 (AEP, UK)		
R494	1-216-833-11	METAL CHIP	10K	5%	1/10W
R495	1-216-833-11	METAL CHIP	10K	5%	1/10W
R497	1-216-833-11	METAL CHIP	10K	5%	1/10W
R500	1-216-833-11	METAL CHIP	10K	5%	1/10W
< VIBRATOR >					
X401	1-795-482-11	VIBRATOR, CERAMIC (16MHz)			
X402	1-760-252-12	VIBRATOR, CRYSTAL (32.768kHz)			

A-4750-358-A		PANEL BOARD, COMPLETE			

< CAPACITOR >					
C803	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C804	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C805	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C806	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C807	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C808	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C817	1-126-947-11	ELECT	47uF	20%	35V
< CONNECTOR >					
CN801	1-784-780-11	CONNECTOR, FFC 19P			
CN802	1-785-330-11	PIN, CONNECTOR (LIGHT ANGLE) 4P			
< DIODE >					
D812	8-719-046-36	DIODE SEL5921A-TP15 (DSGX)			
D813	8-719-812-44	DIODE TLO124 (STAND BY)			
D816	8-719-046-36	DIODE SEL5921A-TP15 (TUNER/BAND)			
D818	8-719-046-36	DIODE SEL5921A-TP15 (TAPE ◀▶)			
< IC >					
IC802	6-600-349-31	IC NJL24H400A (国)			
< TRANSISTOR >					
Q812	8-729-027-43	TRANSISTOR	DTC114EKA-T146		
Q813	8-729-027-43	TRANSISTOR	DTC114EKA-T146		
Q816	8-729-027-43	TRANSISTOR	DTC114EKA-T146		
Q818	8-729-027-43	TRANSISTOR	DTC114EKA-T146		
< RESISTOR >					
R801	1-216-821-11	METAL CHIP	1K	5%	1/10W
R802	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R803	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R804	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R805	1-216-821-11	METAL CHIP	1K	5%	1/10W
R806	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R807	1-216-821-11	METAL CHIP	1K	5%	1/10W
R808	1-216-825-11	METAL CHIP	2.2K	5%	1/10W

PANEL

PRE AMP

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R809	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	C129	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
R810	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	C131	1-104-658-91	ELECT	100uF	20%	10V
						C132	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R811	1-216-833-11	METAL CHIP	10K	5%	1/10W	C133	1-104-658-91	ELECT	100uF	20%	10V
R812	1-216-837-11	METAL CHIP	22K	5%	1/10W	C141	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R813	1-216-809-11	METAL CHIP	100	5%	1/10W						
R814	1-216-809-11	METAL CHIP	100	5%	1/10W	C151	1-162-957-11	CERAMIC CHIP	220PF	5%	50V
R815	1-216-809-11	METAL CHIP	100	5%	1/10W	C152	1-126-960-11	ELECT	1uF	20%	50V
						C153	1-126-960-11	ELECT	1uF	20%	50V
R816	1-216-809-11	METAL CHIP	100	5%	1/10W	C154	1-126-960-11	ELECT	1uF	20%	50V
R821	1-216-817-11	METAL CHIP	470	5%	1/10W	C155	1-126-960-11	ELECT	1uF	20%	50V
R822	1-216-817-11	METAL CHIP	470	5%	1/10W						
R823	1-216-817-11	METAL CHIP	470	5%	1/10W	C156	1-126-960-11	ELECT	1uF	20%	50V
R825	1-216-805-11	METAL CHIP	47	5%	1/10W	C157	1-126-960-11	ELECT	1uF	20%	50V
						C158	1-130-476-00	MYLAR	0.0027uF	5%	50V
R826	1-216-817-11	METAL CHIP	470	5%	1/10W	C159	1-130-496-00	MYLAR	0.12uF	5%	50V
R828	1-216-817-11	METAL CHIP	470	5%	1/10W	C160	1-130-496-00	MYLAR	0.12uF	5%	50V
< VARIABLE RESISTOR >						C161	1-126-964-11	ELECT	10uF	20%	50V
RV803	1-476-730-11	ENCODER, ROTARY (VOLUME)				C171	1-126-964-11	ELECT	10uF	20%	50V
RV805	1-418-859-21	ENCODER, ROTARY (BASS)				C172	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V
RV807	1-418-859-21	ENCODER, ROTARY (TREBLE)				C173	1-126-964-11	ELECT	10uF	20%	50V
						C174	1-126-923-91	ELECT	220uF	20%	10V
< SWITCH >						C179	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
S801	1-762-875-21	SWITCH, KEYBOARD (I/C)				C180	1-126-923-91	ELECT	220uF	20%	10V
S802	1-762-875-21	SWITCH, KEYBOARD (DSGX)				C181	1-104-658-91	ELECT	100uF	20%	10V
S803	1-762-875-21	SWITCH, KEYBOARD (PLAY MODE/DIRECTION/TUNING MODE)				C182	1-126-960-11	ELECT	1uF	20%	50V
S804	1-762-875-21	SWITCH, KEYBOARD (REPEAT/FM MODE)				C183	1-104-658-91	ELECT	100uF	20%	10V
S805	1-762-875-21	SWITCH, KEYBOARD (CD SYNCHRO)				C185	1-126-960-11	ELECT	1uF	20%	50V
< CONNECTOR >											
S806	1-762-875-21	SWITCH, KEYBOARD (FUNCTION)				CN101	1-784-780-11	CONNECTOR, FFC 19P			
S807	1-771-574-21	SWITCH, TACTILE (TUNING + >>>)				CN102	1-785-330-11	PIN, CONNECTOR (LIGHT ANGLE) 4P			
S808	1-771-574-21	SWITCH, TACTILE (- TUNING <<<)									
S809	1-762-875-21	SWITCH, KEYBOARD (DISPLAY)				< IC >					
S810	1-762-875-21	SWITCH, KEYBOARD (TUNER/BAND)				IC101	8-759-669-03	IC LC75342			
						IC102	8-759-656-83	IC NJM4580MD-(TE2)			
S811	1-762-875-21	SWITCH, KEYBOARD ((CD) ▲)				< JACK >					
S812	1-762-875-21	SWITCH, KEYBOARD (● REC)				J101	1-817-877-11	JACK, PIN 2P (MD (VIDEO))			
S813	1-762-875-21	SWITCH, KEYBOARD ((TAPE) ■)				< TRANSISTOR >					
S814	1-762-875-21	SWITCH, KEYBOARD ((TAPE) ■)				Q101	8-729-107-43	TRANSISTOR	2SC3624-L18		
S815	1-762-875-21	SWITCH, KEYBOARD (TAPE ◀▶)				Q121	8-729-027-23	TRANSISTOR	DTA114EKA-T146		
*****						Q122	8-729-027-43	TRANSISTOR	DTC114EKA-T146		
A-4750-356-A	PRE AMP BOARD, COMPLETE					Q151	8-729-107-43	TRANSISTOR	2SC3624-L18		
	*****					Q180	8-729-107-43	TRANSISTOR	2SC3624-L18		
< CAPACITOR >						Q181	8-729-107-43	TRANSISTOR	2SC3624-L18		
C101	1-162-957-11	CERAMIC CHIP	220PF	5%	50V	Q182	8-729-107-43	TRANSISTOR	2SC3624-L18		
C102	1-126-960-11	ELECT	1uF	20%	50V	Q183	8-729-107-43	TRANSISTOR	2SC3624-L18		
C103	1-126-960-11	ELECT	1uF	20%	50V	Q184	8-729-027-23	TRANSISTOR	DTA114EKA-T146		
C104	1-126-960-11	ELECT	1uF	20%	50V	Q185	8-729-027-43	TRANSISTOR	DTC114EKA-T146		
C105	1-126-960-11	ELECT	1uF	20%	50V	< RESISTOR >					
C106	1-126-960-11	ELECT	1uF	20%	50V	R101	1-216-833-11	METAL CHIP	10K	5%	1/10W
C107	1-126-960-11	ELECT	1uF	20%	50V	R102	1-216-832-11	METAL CHIP	8.2K	5%	1/10W
C108	1-130-476-00	MYLAR	0.0027uF	5%	50V	R103	1-216-828-11	METAL CHIP	3.9K	5%	1/10W
C109	1-130-496-00	MYLAR	0.12uF	5%	50V	R104	1-216-821-11	METAL CHIP	1K	5%	1/10W
C110	1-130-496-00	MYLAR	0.12uF	5%	50V	R105	1-216-833-11	METAL CHIP	10K	5%	1/10W
C111	1-126-964-11	ELECT	10uF	20%	50V						
C121	1-126-964-11	ELECT	10uF	20%	50V						
C122	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V						
C123	1-126-964-11	ELECT	10uF	20%	50V						
C124	1-126-923-91	ELECT	220uF	20%	10V						

HCD-CPX11

PRE AMP

S-MASTER AMP

Ref. No.	Part No.	Description			Remark
R106	1-216-833-11	METAL CHIP	10K	5%	1/10W
R121	1-216-821-11	METAL CHIP	1K	5%	1/10W
R122	1-216-845-11	METAL CHIP	100K	5%	1/10W
R123	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R124	1-216-837-11	METAL CHIP	22K	5%	1/10W
R125	1-216-805-11	METAL CHIP	47	5%	1/10W
R126	1-216-845-11	METAL CHIP	100K	5%	1/10W
R131	1-216-809-11	METAL CHIP	100	5%	1/10W
R132	1-216-809-11	METAL CHIP	100	5%	1/10W
R133	1-216-809-11	METAL CHIP	100	5%	1/10W
R151	1-216-833-11	METAL CHIP	10K	5%	1/10W
R152	1-216-832-11	METAL CHIP	8.2K	5%	1/10W
R153	1-216-828-11	METAL CHIP	3.9K	5%	1/10W
R154	1-216-821-11	METAL CHIP	1K	5%	1/10W
R155	1-216-833-11	METAL CHIP	10K	5%	1/10W
R156	1-216-833-11	METAL CHIP	10K	5%	1/10W
R171	1-216-821-11	METAL CHIP	1K	5%	1/10W
R172	1-216-845-11	METAL CHIP	100K	5%	1/10W
R173	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R174	1-216-837-11	METAL CHIP	22K	5%	1/10W
R175	1-216-805-11	METAL CHIP	47	5%	1/10W
R176	1-216-845-11	METAL CHIP	100K	5%	1/10W
R180	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R181	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R182	1-216-826-11	METAL CHIP	2.7K	5%	1/10W
R183	1-216-833-11	METAL CHIP	10K	5%	1/10W
R184	1-216-821-11	METAL CHIP	1K	5%	1/10W
R185	1-216-821-11	METAL CHIP	1K	5%	1/10W

A-4750-366-A		S-MASTER AMP BOARD, COMPLETE			

7-685-645-79		SCREW +BVTP 3X6 TYPE2 TT (B)			
< CAPACITOR >					
C600	1-128-549-11	ELECT	3300uF	20%	35V
C601	1-104-658-91	ELECT	100uF	20%	10V
C602	1-126-964-11	ELECT	10uF	20%	50V
C603	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C604	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C605	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C606	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C607	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C608	1-126-964-11	ELECT	10uF	20%	50V
C609	1-162-971-11	CERAMIC CHIP	0.001uF	10%	50V
C610	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C611	1-126-960-11	ELECT	1uF	20%	50V
C612	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C613	1-216-864-11	SHORT CHIP	0		
C614	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V
C615	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V
C616	1-104-662-91	ELECT	22uF	20%	25V
C617	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C618	1-162-908-11	CERAMIC CHIP	3PF	0.25PF	50V
C619	1-162-908-11	CERAMIC CHIP	3PF	0.25PF	50V
C620	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C621	1-126-960-11	ELECT	1uF	20%	50V
C622	1-164-156-11	CERAMIC CHIP	0.1uF		25V

Ref. No.	Part No.	Description	Remark		
C623	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C625	1-126-963-11	ELECT	4.7uF	20%	50V
C628	1-126-963-11	ELECT	4.7uF	20%	50V
C629	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V
C630	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C631	1-126-963-11	ELECT	4.7uF	20%	50V
C632	1-104-658-91	ELECT	100uF	20%	10V
C633	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C634	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C635	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C636	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C637	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C638	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C639	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C640	1-104-658-91	ELECT	100uF	20%	10V
C648	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C649	1-104-658-91	ELECT	100uF	20%	10V
C650	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C651	1-137-372-11	MYLAR	0.022uF	5%	50V
C652	1-104-658-91	ELECT	100uF	20%	10V
C653	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C654	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C655	1-137-807-31	ELECT	100uF	20%	50V
C656	1-131-704-11	FILM	1uF	5%	50V
C659	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C660	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C661	1-137-372-11	MYLAR	0.022uF	5%	50V
C663	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C666	1-131-704-11	FILM	1uF	5%	50V
C668	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C669	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C670	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C671	1-137-372-11	MYLAR	0.022uF	5%	50V
C672	1-104-658-91	ELECT	100uF	20%	10V
C673	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C674	1-216-864-11	SHORT CHIP	0		
C675	1-137-807-31	ELECT	100uF	20%	50V
C676	1-131-704-11	FILM	1uF	5%	50V
C678	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C679	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C680	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C681	1-137-372-11	MYLAR	0.022uF	5%	50V
C682	1-104-658-91	ELECT	100uF	20%	10V
C683	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C686	1-131-704-11	FILM	1uF	5%	50V
C689	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C690	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C692	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C693	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C694	1-164-346-11	CERAMIC CHIP	1uF		16V
C697	1-216-864-11	SHORT CHIP	0		
C698	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C699	1-162-974-11	CERAMIC CHIP	0.01uF		50V
< CONNECTOR >					
* CN600	1-564-508-11	PLUG, CONNECTOR 5P			
CN601	1-568-838-11	CONNECTOR, FFC 21P			

S-MASTER AMP**SP**

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
		< DIODE >		L670	1-424-777-11	INDUCTOR 10uH	
D611	8-719-988-61	DIODE 1SS355TE-17				< TRANSISTOR >	
D621	8-719-988-61	DIODE 1SS355TE-17		Q691	8-729-602-36	TRANSISTOR 2SA1602-F	
D650	6-500-131-01	DIODE LI116		Q692	8-729-602-36	TRANSISTOR 2SA1602-F	
D651	6-500-248-01	DIODE SFPL-62V		Q693	8-729-602-36	TRANSISTOR 2SA1602-F	
D652	6-500-060-01	DIODE P6SMB36AT3		Q694	8-729-602-36	TRANSISTOR 2SA1602-F	
D660	6-500-131-01	DIODE LI116		Q696	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D661	6-500-248-01	DIODE SFPL-62V				< RESISTOR >	
D662	6-500-060-01	DIODE P6SMB36AT3		R601	1-216-809-11	METAL CHIP 100 5% 1/10W	
D670	6-500-131-01	DIODE LI116		R602	1-216-809-11	METAL CHIP 100 5% 1/10W	
D671	6-500-248-01	DIODE SFPL-62V		R603	1-216-809-11	METAL CHIP 100 5% 1/10W	
D672	6-500-060-01	DIODE P6SMB36AT3		R604	1-216-809-11	METAL CHIP 100 5% 1/10W	
D680	6-500-131-01	DIODE LI116		R605	1-216-821-11	METAL CHIP 1K 5% 1/10W	
D681	6-500-248-01	DIODE SFPL-62V		R606	1-216-809-11	METAL CHIP 100 5% 1/10W	
D682	6-500-060-01	DIODE P6SMB36AT3		R607	1-216-809-11	METAL CHIP 100 5% 1/10W	
		< EARTH TERMINAL >		R608	1-216-864-11	SHORT CHIP 0	
EP601	1-537-771-21	TERMINAL BOARD, GROUND		R609	1-216-809-11	METAL CHIP 100 5% 1/10W	
EP602	1-537-771-21	TERMINAL BOARD, GROUND		R610	1-216-809-11	METAL CHIP 100 5% 1/10W	
EP603	1-537-771-21	TERMINAL BOARD, GROUND		R612	1-216-809-11	METAL CHIP 100 5% 1/10W	
		< FERRITE BEAD >		R613	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB601	1-216-864-11	SHORT CHIP 0		R614	1-216-857-11	METAL CHIP 1M 5% 1/10W	
FB604	1-216-864-11	SHORT CHIP 0		R615	1-216-817-11	METAL CHIP 470 5% 1/10W	
FB605	1-469-324-21	FERRITE, EMI (SMD) (2012)		R618	1-216-864-11	SHORT CHIP 0	
FB606	1-216-864-11	SHORT CHIP 0		R619	1-216-857-11	METAL CHIP 1M 5% 1/10W	
FB607	1-216-864-11	SHORT CHIP 0		R620	1-218-484-11	METAL CHIP 750 5% 1/10W	
FB610	1-469-324-21	FERRITE, EMI (SMD) (2012)		R623	1-216-845-11	METAL CHIP 100K 5% 1/10W	
FB620	1-469-324-21	FERRITE, EMI (SMD) (2012)		R640	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB640	1-216-864-11	SHORT CHIP 0		R641	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB641	1-216-864-11	SHORT CHIP 0		R642	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB642	1-216-864-11	SHORT CHIP 0		R651	1-216-296-11	SHORT CHIP 0	
FB650	1-469-324-21	FERRITE, EMI (SMD) (2012)		R652	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB652	1-414-551-11	FERRITE, EMI (SMD) (2012)		R653	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB653	1-414-551-11	FERRITE, EMI (SMD) (2012)		R661	1-216-296-11	SHORT CHIP 0	
FB660	1-216-296-11	SHORT CHIP 0		R662	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB662	1-414-551-11	FERRITE, EMI (SMD) (2012)		R663	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB663	1-414-551-11	FERRITE, EMI (SMD) (2012)		R671	1-216-296-11	SHORT CHIP 0	
FB670	1-216-296-11	SHORT CHIP 0		R681	1-216-296-11	SHORT CHIP 0	
FB680	1-469-324-21	FERRITE, EMI (SMD) (2012)		R691	1-216-845-11	METAL CHIP 100K 5% 1/10W	
		< IC >		R692	1-216-845-11	METAL CHIP 100K 5% 1/10W	
IC600	6-703-287-01	IC CXD9743N		R693	1-216-845-11	METAL CHIP 100K 5% 1/10W	
IC603	6-701-834-01	IC PCM1802DBR		R694	1-216-845-11	METAL CHIP 100K 5% 1/10W	
IC604	8-759-387-77	IC TC7WU04F (TE12R)		R695	1-216-845-11	METAL CHIP 100K 5% 1/10W	
IC610	6-701-189-01	IC MC74VHC1GU04DFT1		R696	1-216-845-11	METAL CHIP 100K 5% 1/10W	
IC618	6-700-263-01	IC NJM2870F18 (TE2)		R697	1-216-845-11	METAL CHIP 100K 5% 1/10W	
IC650	6-703-288-01	IC CXD9750L				< VIBRATOR >	
IC680	6-703-288-01	IC CXD9750L		X601	1-795-843-11	VIBRATOR, CRYSTAL (12.288MHz)	
		< COIL >		X602	1-795-660-21	QUARTZ CRYSTAL UNIT (49.152MHz)	
L601	1-469-525-91	INDUCTOR 10uH		*****			
L602	1-469-525-91	INDUCTOR 10uH				SP BOARD	
L603	1-469-525-91	INDUCTOR 10uH				*****	
L604	1-412-939-11	INDUCTOR 1uH				< CAPACITOR >	
L621	1-469-525-91	INDUCTOR 10uH		C852	1-164-362-11	CERAMIC CHIP 470PF 5% 50V	
L650	1-424-777-11	INDUCTOR 10uH		C862	1-164-362-11	CERAMIC CHIP 470PF 5% 50V	

HCD-CPX11

SP	SUB PANEL	SUB POWER	TC
----	-----------	-----------	----

Ref. No.	Part No.	Description	Remark
C872	1-164-362-11	CERAMIC CHIP 470PF 5%	50V
C882	1-164-362-11	CERAMIC CHIP 470PF 5%	50V
< CONNECTOR >			
CN850	1-564-505-21	PLUG, CONNECTOR 2P	
CN870	1-564-505-11	PLUG, CONNECTOR 2P	
< JACK >			
J860	1-537-114-21	TERMINAL BOARD (SPEAKER)	
< COIL >			
L890	1-410-121-11	INDUCTOR 1.5mH	

SUB PANEL BOARD			

< DIODE >			
D870	8-719-046-36	DIODE SEL5921A-TP15 (CD ►■■)	
< TRANSISTOR >			
Q870	8-729-027-43	TRANSISTOR DTC114EKA-T146	
< RESISTOR >			
R870	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
R871	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R874	1-216-817-11	METAL CHIP 470 5%	1/10W
R875	1-216-817-11	METAL CHIP 470 5%	1/10W
R876	1-216-809-11	METAL CHIP 100 5%	1/10W
< SWITCH >			
S816	1-762-875-21	SWITCH, KEYBOARD (CD ►■■)	
S817	1-762-875-21	SWITCH, KEYBOARD ((CD) ■)	

SUB POWER BOARD			

< CAPACITOR >			
△ C991	1-113-925-11	CERAMIC 0.01uF 20%	250V
△ C992	1-113-925-11	CERAMIC 0.01uF 20%	250V
C993	1-126-768-11	ELECT 2200uF 20%	16V
C994	1-104-658-91	ELECT 100uF 20%	10V
< CONNECTOR >			
CN990	1-564-321-00	PIN, CONNECTOR (3.96mm PITCH) 2P	
< DIODE >			
D990	8-719-988-61	DIODE 1SS355TE-17	
D991	8-719-988-61	DIODE 1SS355TE-17	
D992	6-500-522-31	DIODE 10EDB40-TB5	
D993	6-500-522-31	DIODE 10EDB40-TB5	
D994	6-500-522-31	DIODE 10EDB40-TB5	
D995	6-500-522-31	DIODE 10EDB40-TB5	
< IC >			
IC991	6-703-627-01	IC NJU7201L40 (T3)	

Ref. No.	Part No.	Description	Remark
< TRANSISTOR >			
Q990	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16	
Q991	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16	
< RESISTOR >			
R991	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R992	1-216-845-11	METAL CHIP 100K 5%	1/10W
R993	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R994	1-216-845-11	METAL CHIP 100K 5%	1/10W
< RELAY >			
△ RY990	1-755-467-11	RELAY (POWER)	
△ RY991	1-755-467-11	RELAY (POWER)	
< TRANSFORMER >			
△ T991	1-437-676-11	TRANSFORMER, POWER (AEP, UK)	
△ T991	1-437-677-11	TRANSFORMER, POWER (KR, AUS)	

A-4750-369-A TC BOARD, COMPLETE			

< CAPACITOR >			
C601	1-126-947-11	ELECT 47uF 20%	35V
C602	1-130-483-00	MYLAR 0.01uF 5%	50V
C604	1-130-495-00	MYLAR 0.1uF 5%	50V
C605	1-126-964-11	ELECT 10uF 20%	50V
C606	1-126-960-11	ELECT 1uF 20%	50V
C607	1-162-962-11	CERAMIC CHIP 470PF 10%	50V
C608	1-126-961-11	ELECT 2.2uF 20%	50V
C610	1-162-961-11	CERAMIC CHIP 330PF 10%	50V
C611	1-162-928-11	CERAMIC CHIP 120PF 5%	50V
C612	1-162-946-11	CERAMIC CHIP 27PF 5%	50V
C613	1-164-392-11	CERAMIC CHIP 390PF 5%	50V
C614	1-130-483-00	MYLAR 0.01uF 5%	50V
C630	1-126-933-11	ELECT 100uF 20%	16V
C632	1-126-964-11	ELECT 10uF 20%	50V
C633	1-126-964-11	ELECT 10uF 20%	50V
C634	1-126-964-11	ELECT 10uF 20%	50V
C635	1-126-960-11	ELECT 1uF 20%	50V
C639	1-126-964-11	ELECT 10uF 20%	50V
C640	1-126-947-11	ELECT 47uF 20%	35V
C641	1-126-961-11	ELECT 2.2uF 20%	50V
C642	1-137-150-11	FILM 0.01uF 5%	100V
C643	1-130-485-00	MYLAR 0.015uF 5%	50V
C644	1-130-481-00	MYLAR 0.0068uF 5%	50V
C645	1-130-481-00	MYLAR 0.0068uF 5%	50V
C646	1-130-486-00	MYLAR 0.018uF 5%	50V
C647	1-126-964-11	ELECT 10uF 20%	50V
C651	1-126-947-11	ELECT 47uF 20%	35V
C652	1-130-483-00	MYLAR 0.01uF 5%	50V
C654	1-130-495-00	MYLAR 0.1uF 5%	50V
C655	1-126-964-11	ELECT 10uF 20%	50V
C656	1-126-960-11	ELECT 1uF 20%	50V
C657	1-162-962-11	CERAMIC CHIP 470PF 10%	50V
C658	1-126-961-11	ELECT 2.2uF 20%	50V
C660	1-162-961-11	CERAMIC CHIP 330PF 10%	50V
C661	1-162-928-11	CERAMIC CHIP 120PF 5%	50V

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C662	1-162-946-11	CERAMIC CHIP	27PF	5%	50V	R640	1-216-833-11	METAL CHIP	10K	5%	1/10W
C663	1-164-392-11	CERAMIC CHIP	390PF	5%	50V	R641	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
C664	1-130-483-00	MYLAR	0.01uF	5%	50V	R642	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
C681	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V	△ R643	1-219-787-17	FUSIBLE	5.6	5%	1/4W
< CONNECTOR >						△ R644	1-219-787-17	FUSIBLE	5.6	5%	1/4W
CN602	1-770-516-31	FFC/CONNECTOR, FPC (LIF (NON-ZIF)) 8P				R645	1-216-836-11	METAL CHIP	18K	5%	1/10W
CN603	1-784-780-11	CONNECTOR, FFC 19P				R646	1-216-836-11	METAL CHIP	18K	5%	1/10W
< DIODE >						R647	1-216-837-11	METAL CHIP	22K	5%	1/10W
D681	8-719-988-61	DIODE 1SS355TE-17				R648	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
< IC >						R651	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
IC601	6-702-130-01	IC HA12237F				R652	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
IC602	8-759-508-69	IC BA3126N				R653	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
< SHORT >						R654	1-216-833-11	METAL CHIP	10K	5%	1/10W
JR602	1-216-296-11	SHORT CHIP	0			R655	1-216-841-11	METAL CHIP	47K	5%	1/10W
< JUMPER RESISTOR >						R656	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
JW630	1-216-864-11	SHORT CHIP	0			R657	1-216-833-11	METAL CHIP	10K	5%	1/10W
< COIL >						R658	1-216-833-11	METAL CHIP	10K	5%	1/10W
L601	1-410-780-11	INDUCTOR	27mH			R659	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
L651	1-410-780-11	INDUCTOR	27mH			R660	1-216-832-11	METAL CHIP	8.2K	5%	1/10W
< TRANSISTOR >						R661	1-216-837-11	METAL CHIP	22K	5%	1/10W
Q639	8-729-119-77	TRANSISTOR	2SA1175-FEK			R680	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
Q640	8-729-029-66	TRANSISTOR	DTC114ESA			R681	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
Q641	8-729-801-93	TRANSISTOR	2SD1387-3			R682	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
Q642	8-729-142-46	TRANSISTOR	2SC2001-LK			R683	1-216-819-11	METAL CHIP	680	5%	1/10W
Q643	8-729-142-46	TRANSISTOR	2SC2001-LK			R684	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
Q680	8-729-029-66	TRANSISTOR	DTC114ESA			R685	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
Q681	8-729-029-40	TRANSISTOR	DTA124ESA			R686	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
Q691	8-729-027-43	TRANSISTOR	DTC114EKA-T146			R687	1-216-841-11	METAL CHIP	47K	5%	1/10W
Q692	8-729-027-43	TRANSISTOR	DTC114EKA-T146			R688	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
Q693	8-729-140-04	TRANSISTOR	2SB1116A-L			R689	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
Q694	8-729-116-57	TRANSISTOR	2SB1068-K			R690	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
< RESISTOR >						R691	1-216-833-11	METAL CHIP	10K	5%	1/10W
R601	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	< VARIABLE RESISTOR >					
R602	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	RV603	1-241-768-11	RES, ADJ CERMET	220K		
R603	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	RV653	1-241-768-11	RES, ADJ CERMET	220K		
R604	1-216-833-11	METAL CHIP	10K	5%	1/10W	< TRANSFORMER >					
R605	1-216-841-11	METAL CHIP	47K	5%	1/10W	T601	1-423-980-11	TRANSFORMER, BIAS OSCILLATION			

						MISCELLANEOUS					

R606	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	60	1-824-192-11	WIRE (FLAT TYPE) (8 CORE)			
R607	1-216-833-11	METAL CHIP	10K	5%	1/10W	63	1-796-456-31	DECK, MECHANICAL (CMAL1Z-236A)			
R608	1-216-833-11	METAL CHIP	10K	5%	1/10W	69	1-773-120-11	WIRE (FLAT TYPE) (19 CORE)			
R609	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	71	1-773-110-11	WIRE (FLAT TYPE) (19 CORE)			
R610	1-216-832-11	METAL CHIP	8.2K	5%	1/10W	102	1-769-912-11	WIRE (FLAT TYPE) (9 CORE)			
R611	1-216-837-11	METAL CHIP	22K	5%	1/10W						
R630	1-216-857-11	METAL CHIP	1M	5%	1/10W	△ 151	1-769-079-23	CORD, POWER (KR)			
R631	1-216-837-11	METAL CHIP	22K	5%	1/10W	△ 151	1-777-071-83	CORD, POWER (AEP, UK)			
R632	1-216-821-11	METAL CHIP	1K	5%	1/10W	△ 151	1-783-203-13	CORD, POWER (AUS)			
R633	1-216-833-11	METAL CHIP	10K	5%	1/10W	155	1-777-353-11	FLAT CABLE (15 CORE) (AEP, UK)			
R635	1-216-809-11	METAL CHIP	100	5%	1/10W	155	1-824-486-11	WIRE (FLAT TYPE) (11 CORE) (KR, AUS)			

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

HCD-CPX11

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Remark</u>
156	1-693-603-31	TUNER (FM/AM) (AUS)	
156	1-693-604-11	TUNER (FM/AM) (AEP, UK)	
156	1-693-605-11	TUNER (FM/AM) (KR)	
158	1-773-105-11	WIRE (FLAT TYPE) (19 CORE)	
△ 201	1-468-730-11	REGULATOR, SWITCHING	
203	1-500-484-21	CLAMP, SLEEVE FERRITE	
204	1-773-158-11	WIRE (FLAT TYPE) (21 CORE)	
413	1-763-967-11	MOTOR, DC	
462	1-452-925-21	MAGNET ASSY	
△ 556	8-820-244-01	OPTICAL PICK-UP (KSM-215DCP/C2NP)	
557	1-775-241-11	WIRE (FLAT TYPE) (27 CORE)	
559	1-827-992-11	WIRE (FLAT TYPE)(16 CORE)	
M701	X-2021-530-1	MOTOR (PULLEY) ASSY (LOADING)	

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.