

SECTION 8

EXPLODED VIEWS

NOTE:

- -XX and -X mean standardized parts, so they may have some difference from the original one.
- Color Indication of Appearance Parts
Example:
KNOB, BALANCE (WHITE) . . . (RED)

↑
Parts Color

↑
Cabinet's Color
- Abbreviation


AUS : Australian model
 EE : East European model

KR : Korean model
 SP : Singapore model

- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.
- Accessories are given in the last of the electrical parts list.


The components identified by mark  or dotted line with mark  are critical for safety.
Replace only with part number specified.

8-1. CASE SECTION

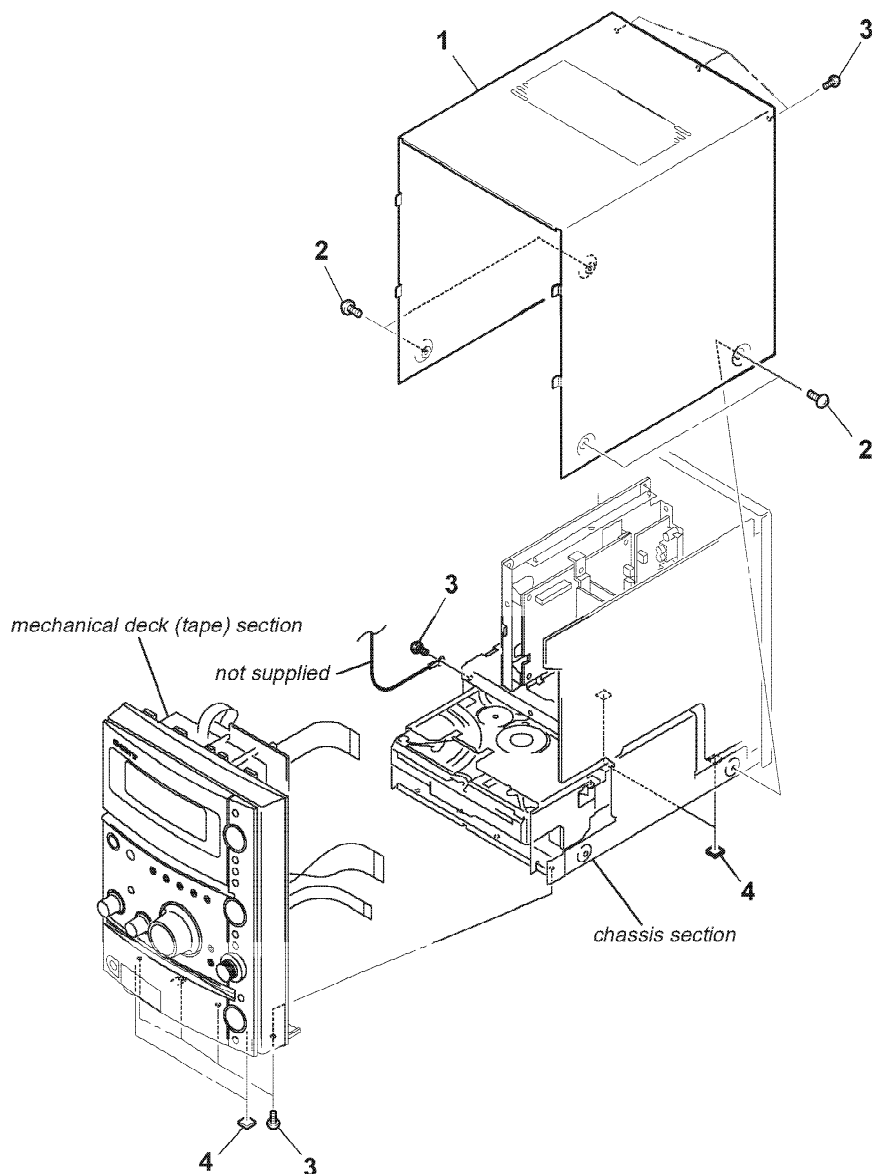


<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Remark</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Remark</u>
1	2-584-652-02	CASE		3	3-252-829-01	SCREW (B3), (+) BV TAPPING	
2	3-363-099-11	SCREW (CASE 3 TP2)		4	4-233-372-02	FOOT (FELT)	

8-2. MECHANICAL DECK (TAPE) SECTION

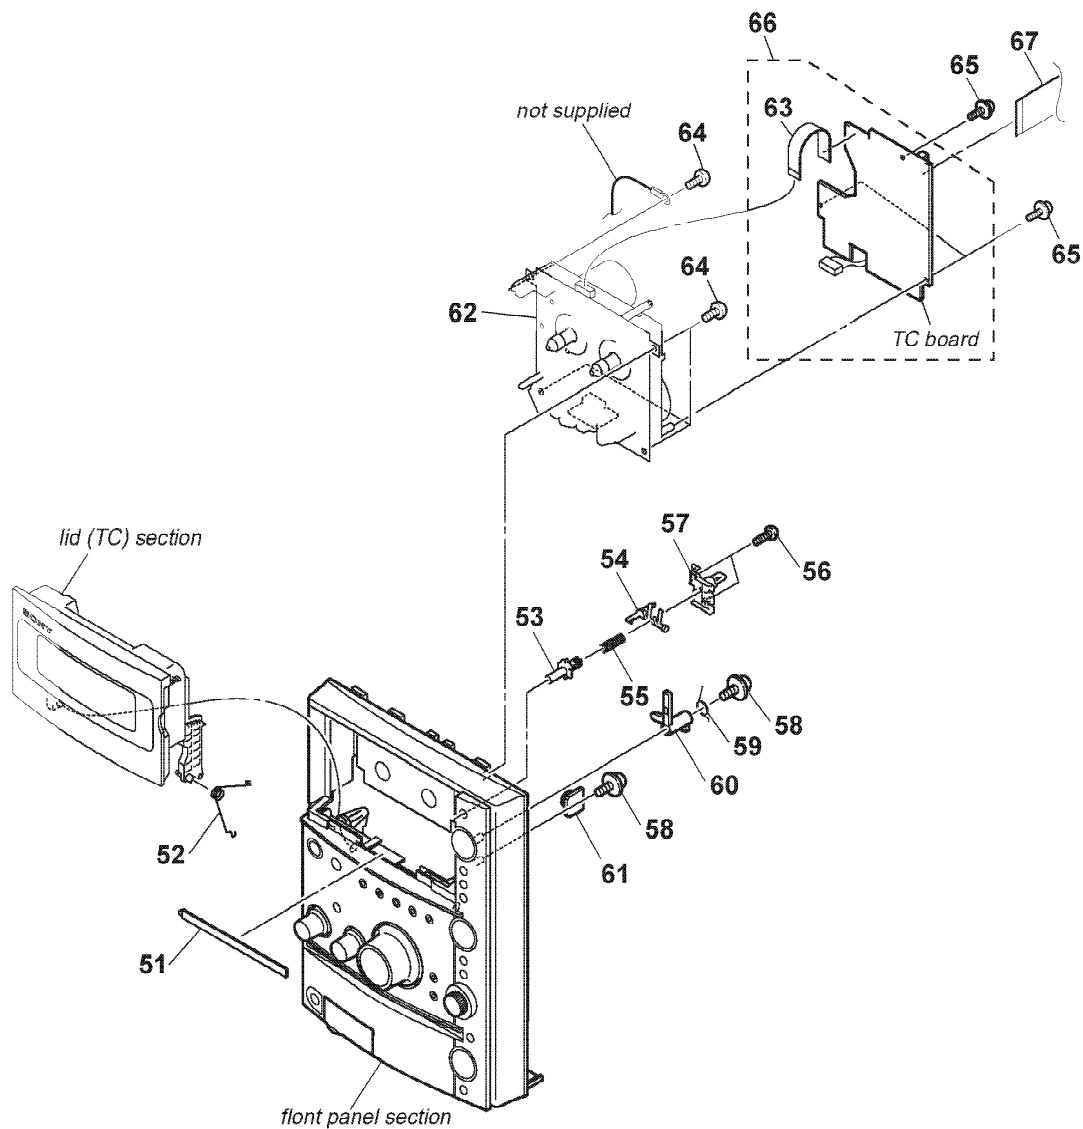


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	2-514-661-01	COVER (AZIMUTH)		60	2-588-354-01	LEVER (TC LOCK)	
52	2-023-740-01	SPRING (LID TC2), TORSION		61	4-244-530-01	DAMPER	
53	2-514-677-01	BUTTON (TC-EJECT)		62	1-796-456-41	DECK, MECHANICAL (CMAL1Z-255A)	
54	2-514-684-01	LEVER (EJECT)		63	1-963-792-11	WIRE (FLAT TYPE) (8 CORE)	
55	2-595-751-01	SPRING (TC-EJECT), COIL		64	3-254-142-01	SCREW (B3), (+) BV TAPPING	
56	3-254-151-01	SCREW (B2.6), (+) P TAPPING		65	3-669-480-51	+PTPWH 2	
57	2-514-660-02	COVER (EJECT)		66	A-1087-739-A	TC BOARD, COMPLETE	
58	3-252-828-01	SCREW (B2.6), (+) PWH TAPPING		67	1-773-106-11	WIRE (FLAT TYPE) (19 CORE)	
59	2-588-394-02	SPRING (TC LOCK)					

8-3. FRONT PANEL SECTION

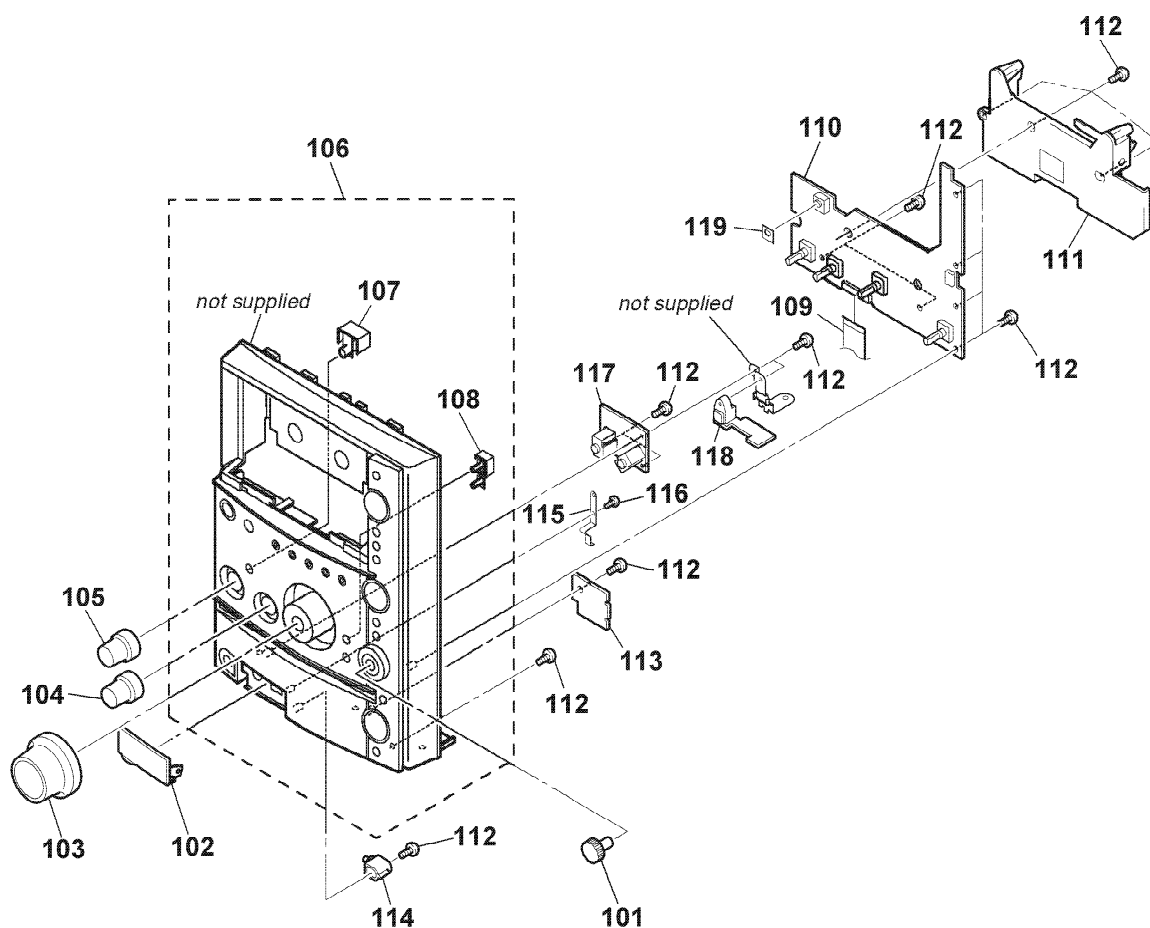


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	2-514-665-02	KNOB (UD)		110	A-1087-733-A	PANEL BOARD, COMPLETE	
102	2-514-654-01	LID (MD LINK)		111	2-514-666-02	BRACKET (TC)	
103	2-514-664-01	KNOB (VOL)		112	3-254-151-01	SCREW (B2.6), (+) P TAPPING	
104	2-514-663-01	KNOB (TRE)		113	A-1087-734-A	SUB PANEL BOARD, COMPLETE	
105	2-514-662-01	KNOB (BASS)		114	2-514-656-01	SHAFT (LID MD)	
106	X-2048-617-1	PANEL ASSY, FRONT (AEP, UK, EE)		115	2-514-688-01	SPRING (LID MD)	
106	X-2048-619-1	PANEL ASSY, FRONT (SP, KR, AUS)		116	3-254-058-01	SCREW	
107	2-514-671-01	BUTTON (DSGX)		117	A-1087-735-A	HP/MD BOARD, COMPLETE	
108	2-514-672-01	BUTTON (FOLDER)		118	A-1087-736-A	OPT BOARD, COMPLETE	
109	1-773-120-11	WIRE (FLAT TYPE) (19 CORE)		119	2-632-228-01	SHEET (RIMOLON)	

8-4. LID (TC) SECTION

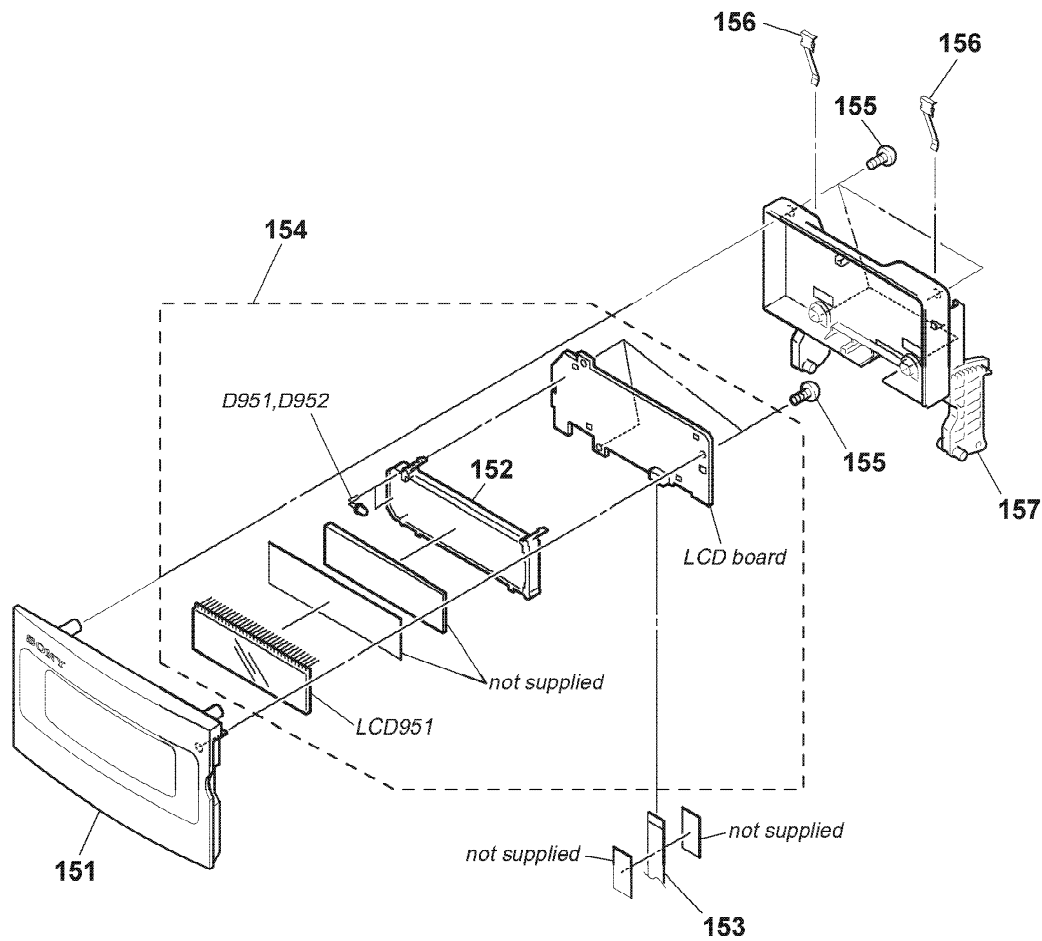

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
151	X-2048-618-1	LID (TC) ASSY		156	2-584-676-01	SPRING (TC), LEAF	
152	2-514-678-01	HOLDER (LCD)		157	4-252-353-03	HOLDER (TC)	
153	1-769-912-11	WIRE (FLAT TYPE) (9 CORE)		D951	6-501-139-01	LED SELU2B10A-SLF62 (LCD BACK LIGHT)	
154	A-1087-737-A	LCD BOARD, COMPLETE		D952	6-501-139-01	LED SELU2B10A-SLF62 (LCD BACK LIGHT)	
155	3-254-151-01	SCREW (B2.6), (+) P TAPPING		LCD951	1-963-403-11	DISPLAY PANEL, LIQUID CRYSTAL	


8-5. CHASSIS SECTION

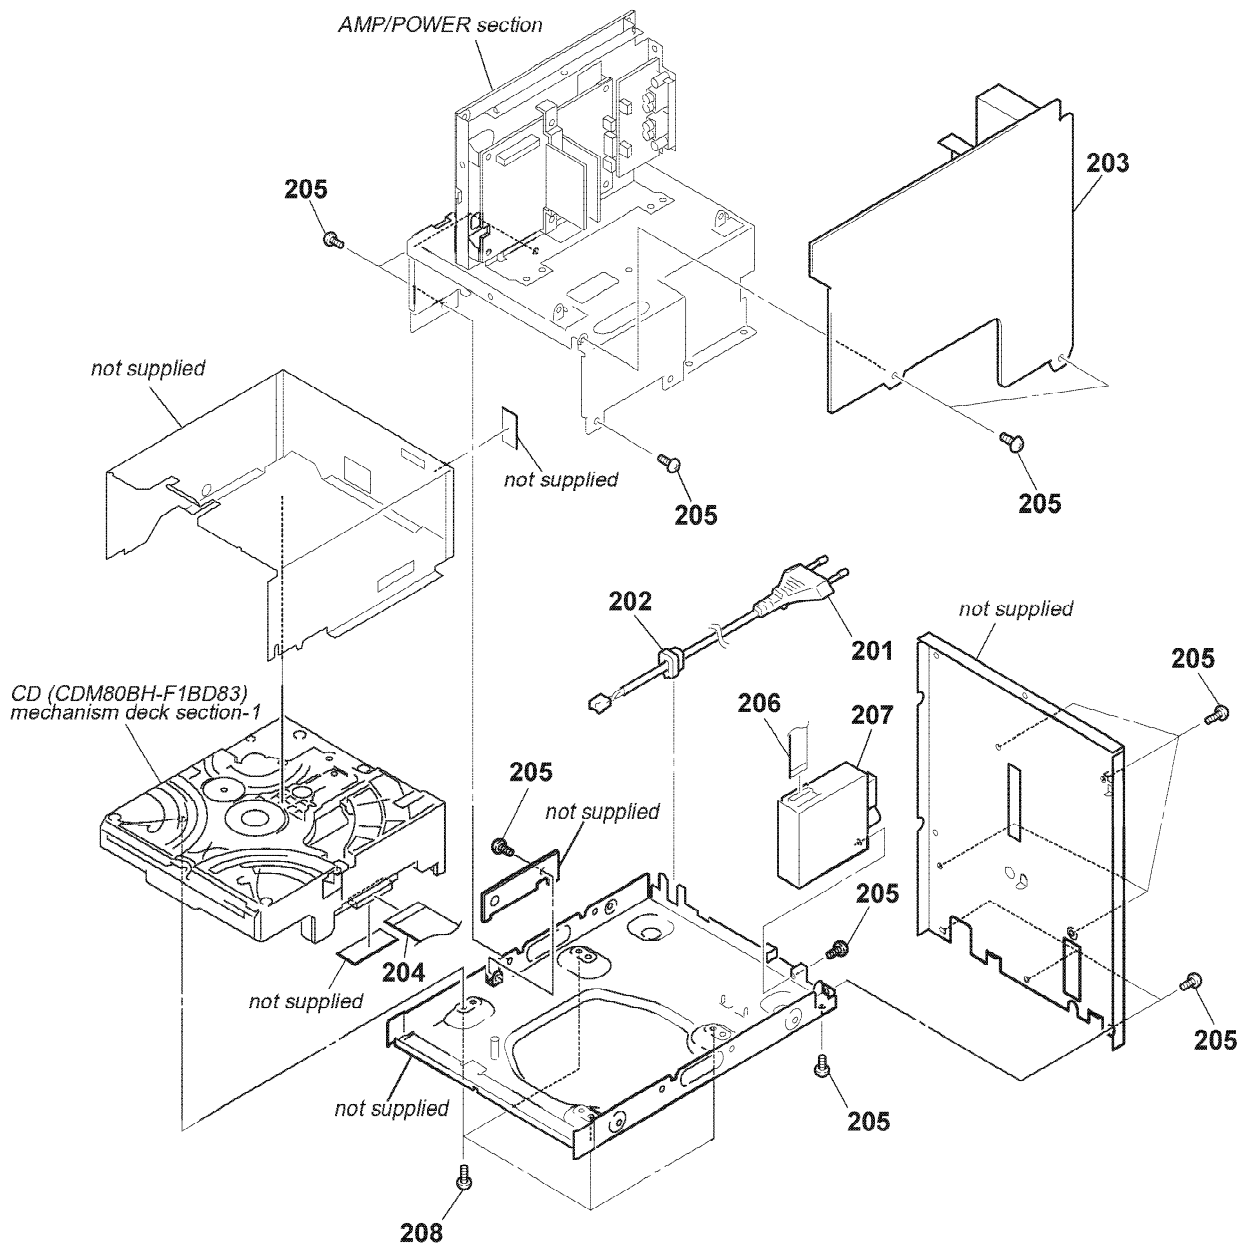

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
Δ 201	1-769-079-23	CORD, POWER (KR)		205	3-252-829-01	SCREW (B3), (+) BV TAPPING	
Δ 201	1-769-744-81	CORD, POWER (UK)		206	1-777-353-11	WIRE (FLAT TYPE) (15 CORE) (AEP, UK, EE)	
Δ 201	1-775-790-71	CORD, POWER (AUS)					
Δ 201	1-830-188-11	CORD, POWER (AEP, EE, SP)		206	1-824-486-11	WIRE (FLAT TYPE) (11 CORE) (SP, KR, AUS)	
202	3-703-244-00	BUSHING (2104), CORD		207	1-693-626-11	TUNER PACK (FM/AM) (AEP, UK, EE)	
				207	1-693-628-11	TUNER PACK (FM/AM) (SP, AUS)	
203	A-1087-727-A	MAIN BOARD, COMPLETE (AEP, UK, EE)		207	1-693-629-11	TUNER PACK (FM/AM) (KR)	
203	A-1087-748-A	MAIN BOARD, COMPLETE (SP, KR, AUS)		208	3-254-143-01	SCREW (B3), (+) BV TAPPING	
204	1-775-210-11	WIRE (FLAT TYPE) (23 CORE)					


8-6. AMP/POWER SECTION

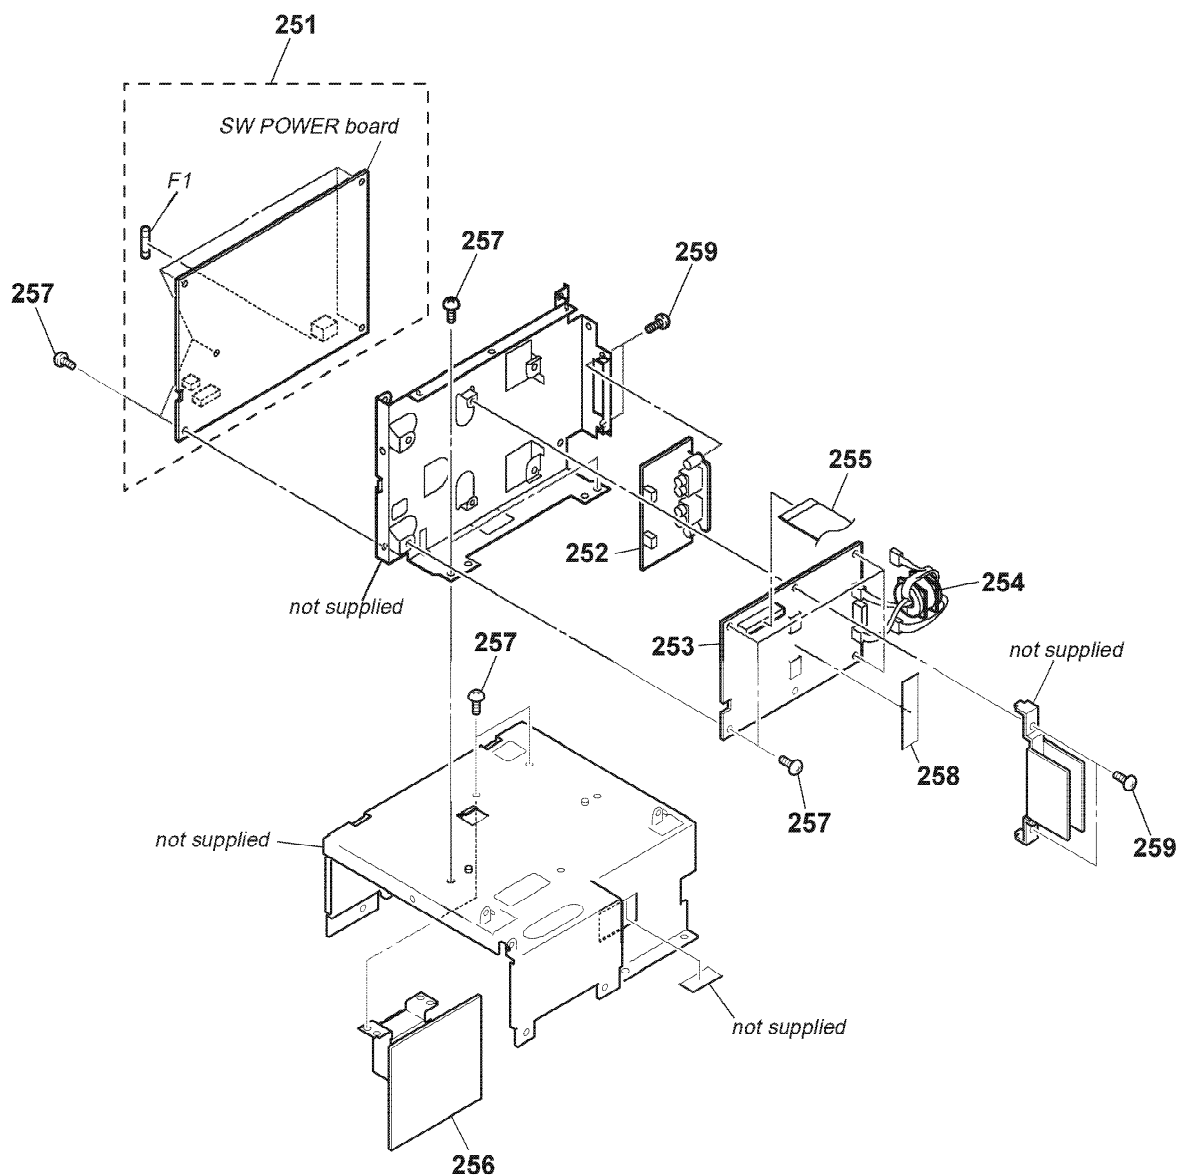

The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety.
Replace only with part number specified.


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
251	A-1087-744-A	SW POWER BOARD, COMPLETE		256	A-1087-750-A	SUB POWER BOARD, COMPLETE (SP, KR, AUS)	
252	A-1087-730-A	SP BOARD, COMPLETE		257	3-252-829-01	SCREW (B3), (+) BV TAPPING	
253	A-1087-741-A	AMP BOARD, COMPLETE		258	2-514-691-01	SHEET, RADIATION	
254	1-400-932-11	FILTER, CLAMP		259	3-254-142-01	SCREW (B3), (+) BV TAPPING	
255	1-773-144-11	WIRE (FLAT TYPE) (21 CORE)					
256	A-1087-731-A	SUB POWER BOARD, COMPLETE (AEP, UK, EE)		△F1	1-576-230-12	FUSE (T3.15AL/H250V)	

8-7. CD MECHANISM DECK SECTION-1 (CDM80BH-F1BD83)

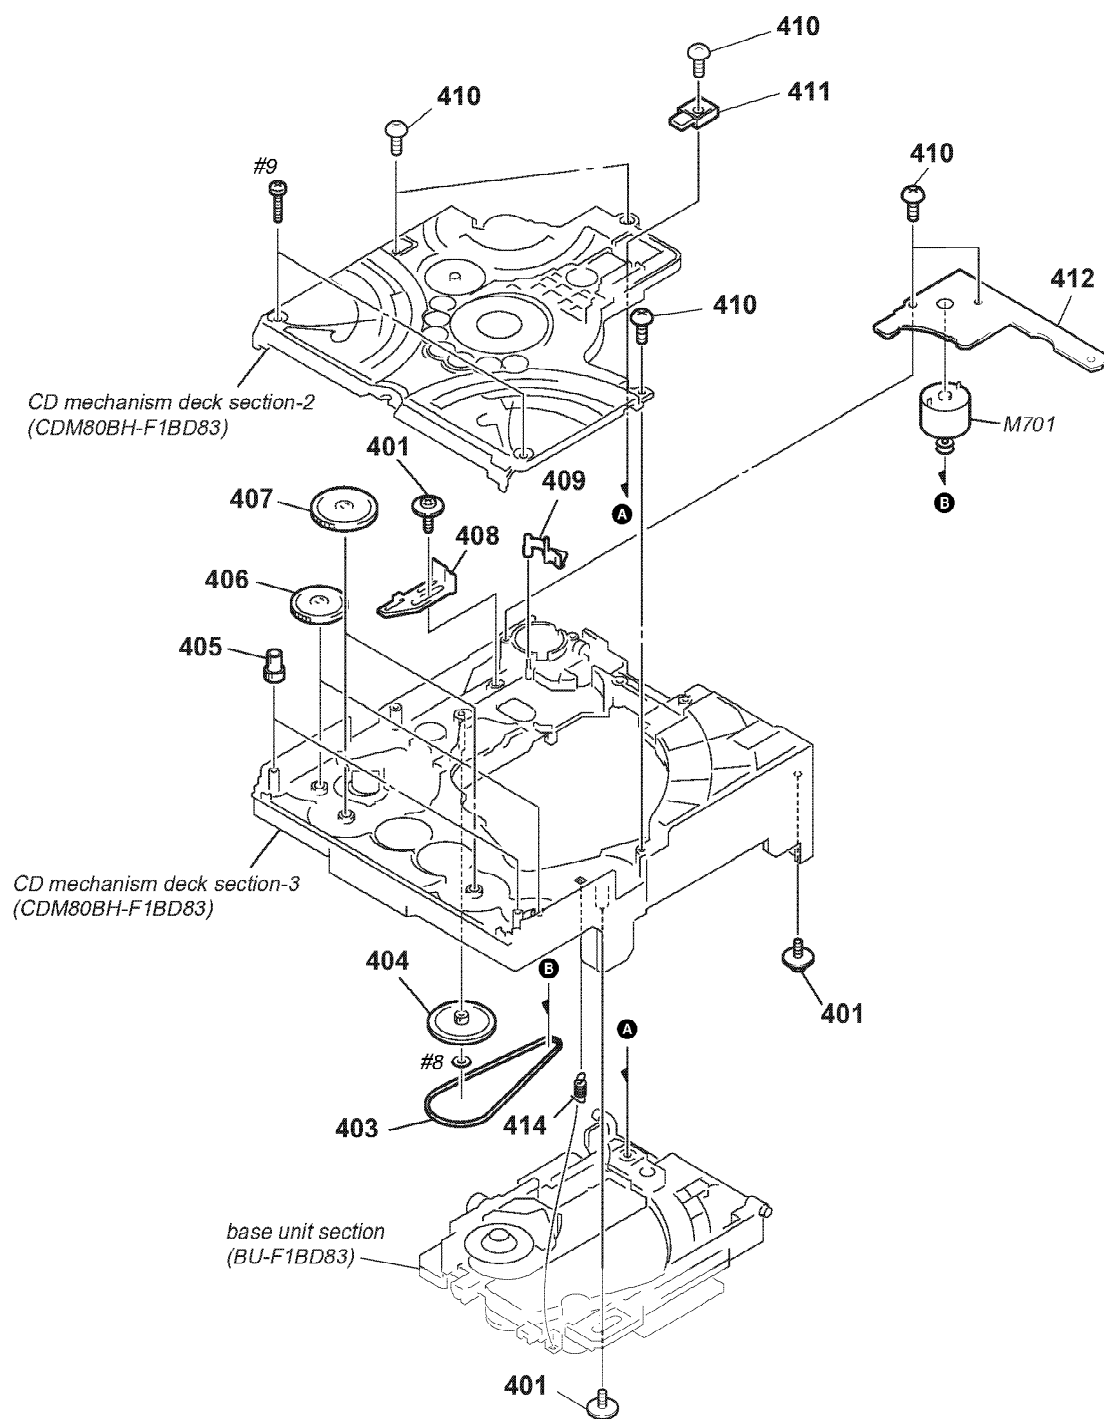


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
401	4-985-672-01	SCREW (+PTPWHM 2.6), FLOATING		410	3-087-053-01	+BVTP 2.6 (3CR)	
403	4-245-653-01	BELT (MOT)		411	4-245-639-01	LEVER (GL UP2)	
404	4-245-662-02	PULLEY (GEAR)		412	1-688-337-11	DRIVER BOARD	
405	4-245-646-01	GEAR (IDL-F)		414	2-515-538-01	SPRING (HOLDER DOWN B), COIL	
406	4-245-644-01	GEAR (IDL-D)		M701	X-4955-496-1	MOTOR (PULLEY) ASSY (LOADING)	
407	4-245-645-01	GEAR (IDL-E)		#8	7-623-921-01	WASHER 1.7, NYLON	
408	4-246-203-01	LEVER (RELEASE)		#9	7-685-106-19	SCREW +P 2X10 TYPE2 NON-SLIT	
409	4-245-630-01	LEVER (SW)					

8-8. CD MECHANISM DECK SECTION-2 (CDM80BH-F1BD83)

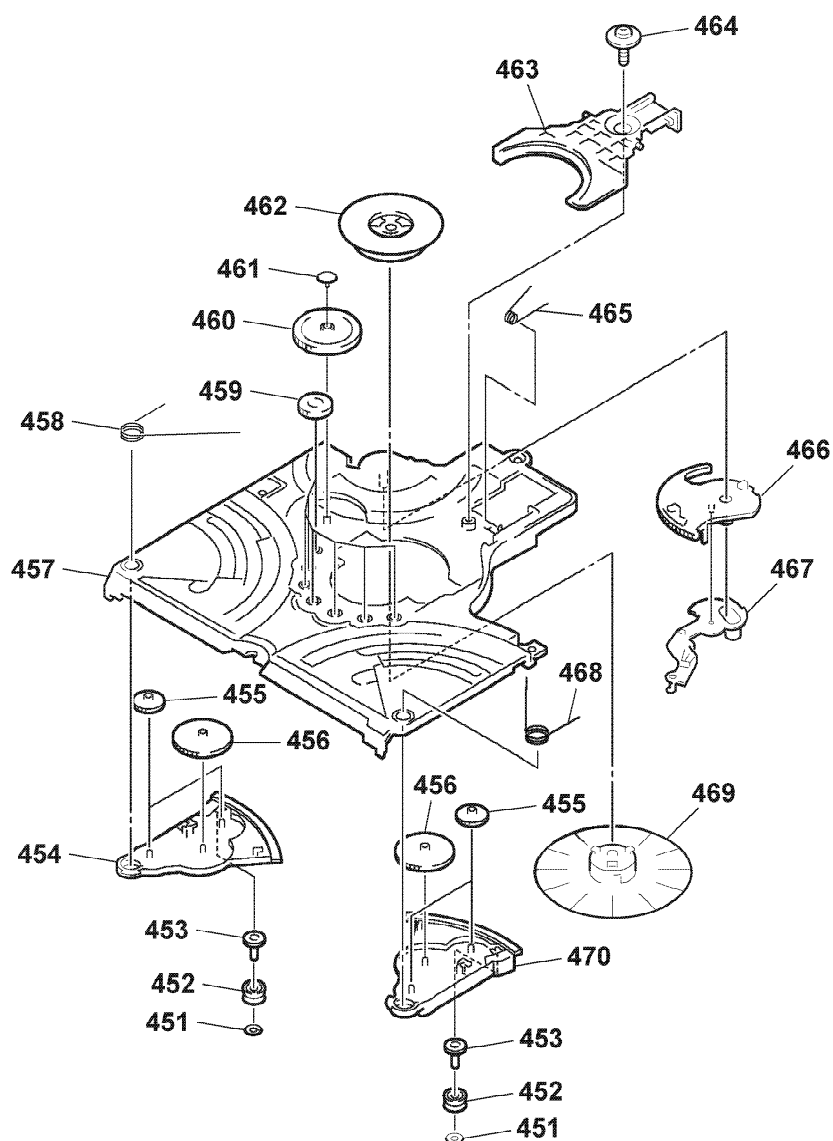


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
451	4-245-627-01	WASHER (6-2.7-0.4)		461	4-245-640-01	GEAR (CAP)	
452	4-245-637-11	ROLLER, RUBBER		462	1-452-925-21	MAGNET ASSY	
453	4-245-649-01	GEAR (IDL-I)		463	4-245-638-01	LEVER (CL UP1)	
454	4-245-657-11	LEVER (LOADING-R)		464	4-985-672-01	SCREW (+PTPWHM 2.6), FLOATING	
455	4-245-647-01	GEAR (IDL-G)		465	4-245-636-01	SPR-T CL DOWN	
456	4-245-648-01	GEAR (IDL-H)		466	4-245-658-11	LEVER (DISC STOP)	
457	4-245-655-01	CHASSIS (TOP)		467	4-245-659-11	LEVER (DISC SENSOR)	
458	4-245-631-11	SPT-T (LOADING-R)		468	4-245-632-11	SPR-T (LOADING-L)	
459	4-245-650-01	GEAR (IDL-J)		469	X-2021-532-1	CLAMPER 213 ASSY	
460	4-245-651-11	GEAR (IDL-L)		470	4-245-656-11	LEVER (LOADING-L)	

8-9. CD MECHANISM DECK SECTION-3
(CDM80BH-F1BD83)

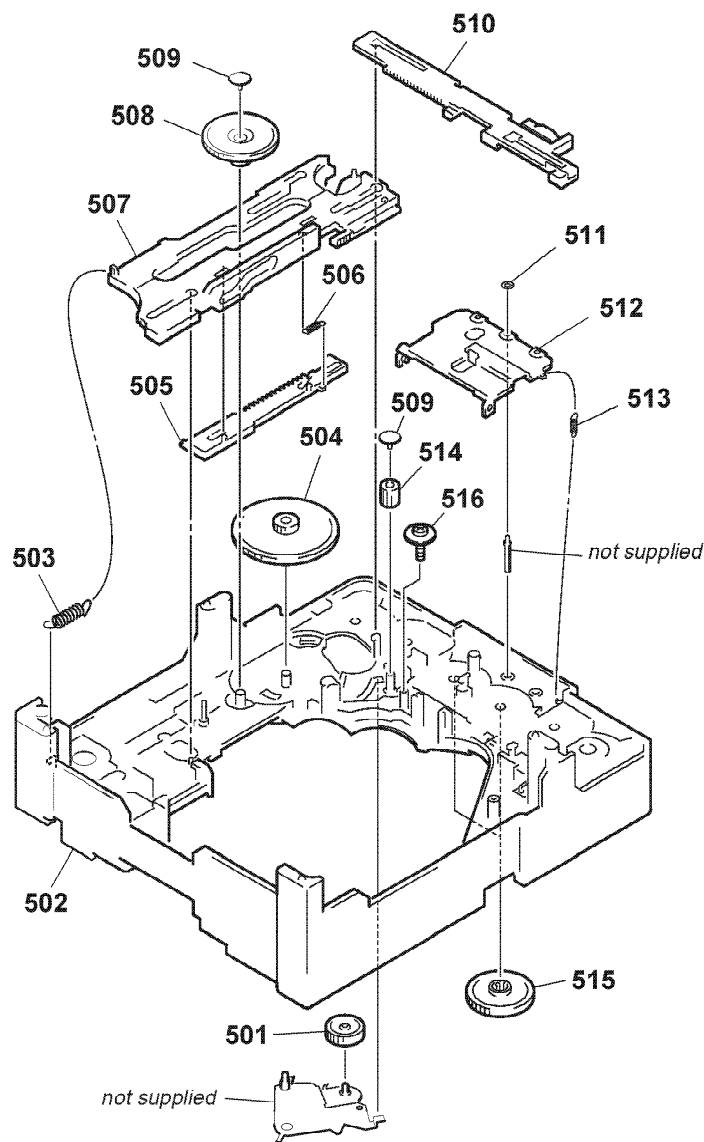

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
501	4-245-643-01	GEAR (IDL-C)		509	4-245-640-01	GEAR (CAP)	
502	X-4956-147-1	CHASSIS (BOTTOM) ASSY		510	4-245-628-01	LEVER (BU LOCK)	
503	2-515-536-01	SPRING (DIR), TENSION COIL		511	4-248-206-01	WASHER (3-1-0.4)	
504	4-245-642-01	GEAR (IDL-B)		512	4-245-624-01	LEVER, CLOSE	
505	4-245-814-01	LEVER (DIR FIRST)		513	4-245-635-01	SPR-E LEVER CLOSE	
506	2-515-534-01	SPRING (DIR BACK), TENSION COIL		514	4-245-629-01	GEAR (BU LOCK)	
507	4-245-660-11	LEVER (DIR)		515	4-245-644-01	GEAR (IDL-D)	
508	4-245-641-01	GEAR (IDL-A)		516	4-985-672-01	SCREW (+PTPWHM 2.6), FLOATING	

8-10. BASE UNIT SECTION
(BU-F1BD83)

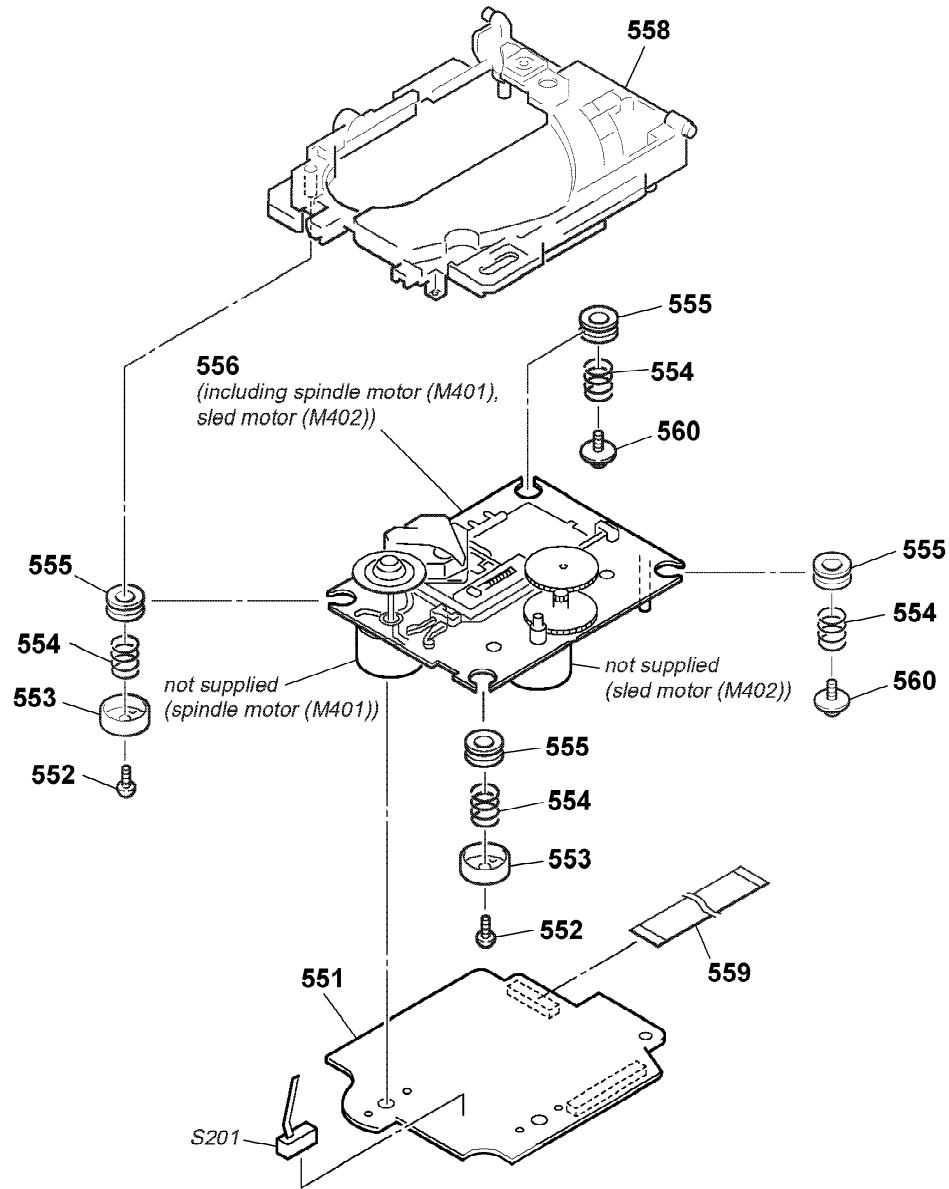

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
551	A-1096-375-A	BD BOARD, COMPLETE		Δ 556	8-820-244-01	OPTICAL PICK-UP BLOCK (KSM-215DCP/C2NP)	
552	4-218-253-31	+BTTP M2.6		558	X-4956-146-1	HOLDER (BU215) ASSY	
553	4-231-151-01	STOPPER (BU)		559	1-827-992-11	WIRE (FLAT TYPE) (16 CORE)	
554	4-227-045-31	SPRING (INSULATOR), COIL		560	4-985-672-01	SCREW (+PTPWH M2.6), FLOATING	
555	4-227-549-11	INSULATOR		S201	1-771-853-11	SWITCH, DETECTION (LIMIT)	

SECTION 9 ELECTRICAL PARTS LIST

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable
- Abbreviation
AUS: Australian model KR : Korean model
EE : East European model SP : Singapore model

- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- SEMICONDUCTORS
In each case, u: μ , for example:
uA... : μ A... uPA... : μ PA...
uPB... : μ PB... uPC... : μ PC...
uPD... : μ PD...
- CAPACITORS
uF: μ F
- COILS
uH: μ H

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

When indicating parts by reference number, please include the board.

Ref. No.	Part No.	Description	Remark				Ref. No.	Part No.	Description	Remark			
	A-1087-741-A	AMP BOARD, COMPLETE *****											
		< CAPACITOR/SHORT >											
C701	1-126-961-11	ELECT	2.2uF	20%	50V		C748	1-126-964-11	ELECT	10uF	20%	50V	
C702	1-136-497-81	FILM	0.1uF	5%	50V		C749	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C703	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C750	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V	
C704	1-115-416-11	CERAMIC CHIP	0.001uF	5%	25V		C751	1-126-961-11	ELECT	2.2uF	20%	50V	
C706	1-100-717-91	CERAMIC CHIP	1uF		16V		C752	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C708	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C753	1-104-665-11	ELECT	100uF	20%	25V	
C709	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C754	1-115-416-11	CERAMIC CHIP	0.001uF	5%	25V	
C710	1-162-923-11	CERAMIC CHIP	47PF	5%	50V		C756	1-100-717-91	CERAMIC CHIP	1uF		16V	
C711	1-126-934-11	ELECT	220uF	20%	16V		C757	1-162-923-11	CERAMIC CHIP	47PF	5%	50V	
C712	1-100-717-91	CERAMIC CHIP	1uF		16V		C758	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C713	1-100-756-91	CERAMIC CHIP	0.047uF		50V		C759	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C714	1-125-898-91	CERAMIC CHIP	0.22uF	10%	50V		C761	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V	
C715	1-125-898-91	CERAMIC CHIP	0.22uF	10%	50V		C762	1-100-717-91	CERAMIC CHIP	1uF		16V	
C716	1-125-898-91	CERAMIC CHIP	0.22uF	10%	50V		C763	1-100-756-91	CERAMIC CHIP	0.047uF		50V	
C717	1-125-898-91	CERAMIC CHIP	0.22uF	10%	50V		C764	1-125-898-91	CERAMIC CHIP	0.22uF	10%	50V	
C718	1-100-756-91	CERAMIC CHIP	0.047uF		50V		C765	1-125-898-91	CERAMIC CHIP	0.22uF	10%	50V	
C719	1-100-924-21	ELECT	2200uF	20%	35V		C766	1-125-898-91	CERAMIC CHIP	0.22uF	10%	50V	
C720	1-136-177-00	FILM	1uF	5%	50V		C767	1-125-898-91	CERAMIC CHIP	0.22uF	10%	50V	
C722	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V		C768	1-100-756-91	CERAMIC CHIP	0.047uF		50V	
C723	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V		C769	1-100-924-21	ELECT	2200uF	20%	35V	
C724	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V		C770	1-136-177-00	FILM	1uF	5%	50V	
C725	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V		C772	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	
C726	1-125-838-11	CERAMIC CHIP	2.2uF	10%	6.3V		C773	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	
C728	1-136-177-00	FILM	1uF	5%	50V		C774	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	
C729	1-115-416-11	CERAMIC CHIP	0.001uF	5%	25V		C775	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	
C730	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C777	1-136-177-00	FILM	1uF	5%	50V	
C731	1-126-947-11	ELECT	47uF	20%	35V		C778	1-125-838-11	CERAMIC CHIP	2.2uF	10%	6.3V	
C732	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C779	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C733	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C780	1-115-416-11	CERAMIC CHIP	0.001uF	5%	25V	
C734	1-115-416-11	CERAMIC CHIP	0.001uF	5%	25V		C781	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C735	1-126-964-11	ELECT	10uF	20%	50V		C782	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C737	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V		C783	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V	
C738	1-162-917-11	CERAMIC CHIP	15PF	5%	50V		C784	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	
C739	1-162-916-11	CERAMIC CHIP	12PF	5%	50V		C785	1-162-910-11	CERAMIC CHIP	5PF	0.25PF	50V	
C740	1-126-934-11	ELECT	220uF	20%	16V		C786	1-115-416-11	CERAMIC CHIP	0.001uF	5%	25V	
C741	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C787	1-115-416-11	CERAMIC CHIP	0.001uF	5%	25V	
C744	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C788	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C745	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V		C791	1-136-497-81	FILM	0.1uF	5%	50V	
C746	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V		C792	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C747	1-104-665-11	ELECT	100uF	20%	25V		C794	1-125-837-11	CERAMIC CHIP	1uF	10%	6.3V	
							C796	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
							C797	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V	
							C798	1-104-665-11	ELECT	100uF	20%	25V	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C799	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V		L759	1-456-813-11	COIL, AIR-CORE	
C806	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V		L760	1-456-680-11	INDUCTOR 10uH	
				L761	1-456-680-11	INDUCTOR 10uH	
C813	1-216-864-11	SHORT CHIP 0				< TRANSISTOR >	
C827	1-216-864-11	SHORT CHIP 0					
C828	1-216-864-11	SHORT CHIP 0					
C829	1-216-864-11	SHORT CHIP 0		Q701	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
C830	1-216-864-11	SHORT CHIP 0		Q702	8-729-600-22	TRANSISTOR 2SA1235-F	
				Q703	8-729-600-22	TRANSISTOR 2SA1235-F	
C831	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V		Q752	8-729-600-22	TRANSISTOR 2SA1235-F	
C832	1-107-726-91	CERAMIC CHIP 0.01uF 10% 16V		Q753	8-729-600-22	TRANSISTOR 2SA1235-F	
C839	1-216-864-11	SHORT CHIP 0				< RESISTOR >	
C844	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V					
C845	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V		R701	1-216-864-11	SHORT CHIP 0	
				R704	1-216-864-11	SHORT CHIP 0	
C846	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V		R706	1-216-809-11	METAL CHIP 100 5% 1/10W	
C847	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V		R707	1-216-864-11	SHORT CHIP 0	
C848	1-216-864-11	SHORT CHIP 0		R708	1-216-864-11	SHORT CHIP 0	
C849	1-216-864-11	SHORT CHIP 0					
		< CONNECTOR >		R709	1-216-864-11	SHORT CHIP 0	
CN700	1-568-838-11	CONNECTOR, FFC 21P		R711	1-216-809-11	METAL CHIP 100 5% 1/10W	
* CN704	1-564-508-11	PLUG, CONNECTOR 5P		R712	1-216-809-11	METAL CHIP 100 5% 1/10W	
		< DIODE >		R713	1-216-837-11	METAL CHIP 22K 5% 1/10W	
				R714	1-216-817-11	METAL CHIP 470 5% 1/10W	
D701	8-719-988-61	DIODE 1SS355TE-17					
D702	8-719-988-61	DIODE 1SS355TE-17		R716	1-216-821-11	METAL CHIP 1K 5% 1/10W	
D703	8-719-988-61	DIODE 1SS355TE-17		R717	1-216-821-11	METAL CHIP 1K 5% 1/10W	
D704	8-719-988-61	DIODE 1SS355TE-17		R718	1-216-833-11	METAL CHIP 10K 5% 1/10W	
D705	6-500-260-01	DIODE P6SMB39AT3		R719	1-220-942-11	METAL CHIP 3.3 1% 1/4W	
				R720	1-220-942-11	METAL CHIP 3.3 1% 1/4W	
D706	6-500-260-01	DIODE P6SMB39AT3					
D713	6-500-694-01	DIODE UDZSTE-172.4B		R721	1-216-833-11	METAL CHIP 10K 5% 1/10W	
D755	6-500-260-01	DIODE P6SMB39AT3		R723	1-216-821-11	METAL CHIP 1K 5% 1/10W	
D756	6-500-260-01	DIODE P6SMB39AT3		R724	1-216-793-11	METAL CHIP 4.7 5% 1/10W	
		< EARTH TERMINAL >		R725	1-216-793-11	METAL CHIP 4.7 5% 1/10W	
* EP701	1-537-738-21	TERMINAL, EARTH		R726	1-216-849-11	METAL CHIP 220K 5% 1/10W	
* EP702	1-537-738-21	TERMINAL, EARTH					
* EP703	1-537-738-21	TERMINAL, EARTH		R727	1-216-845-11	METAL CHIP 100K 5% 1/10W	
		< IC >		R728	1-216-849-11	METAL CHIP 220K 5% 1/10W	
				R729	1-216-821-11	METAL CHIP 1K 5% 1/10W	
IC701	6-701-834-01	IC PCM1802DBR		R730	1-216-809-11	METAL CHIP 100 5% 1/10W	
IC703	8-759-096-87	IC TC7WU04FU (TE12R)		R731	1-216-813-11	METAL CHIP 220 5% 1/10W	
IC704	6-707-956-01	IC NJM2871BF18-TE2					
IC705	6-705-979-01	IC CXD9788AR		R733	1-216-813-11	METAL CHIP 220 5% 1/10W	
IC707	6-704-802-01	IC CXD9774M		R734	1-216-864-11	SHORT CHIP 0	
				R736	1-216-857-11	METAL CHIP 1M 5% 1/10W	
IC708	6-704-802-01	IC CXD9774M		R737	1-216-821-11	METAL CHIP 1K 5% 1/10W	
IC709	6-701-189-01	IC MC74VHC1GU04DFT1		R738	1-216-821-11	METAL CHIP 1K 5% 1/10W	
		< SHORT/COIL >					
				R739	1-216-833-11	METAL CHIP 10K 5% 1/10W	
L701	1-216-295-00	SHORT CHIP 0		R740	1-216-833-11	METAL CHIP 10K 5% 1/10W	
L702	1-469-967-21	INDUCTOR 10uH		R741	1-216-809-11	METAL CHIP 100 5% 1/10W	
L703	1-469-967-21	INDUCTOR 10uH		R742	1-216-833-11	METAL CHIP 10K 5% 1/10W	
L704	1-469-967-21	INDUCTOR 10uH		R743	1-216-809-11	METAL CHIP 100 5% 1/10W	
L705	1-412-939-11	INDUCTOR 1uH					
				R744	1-216-864-11	SHORT CHIP 0	
L708	1-456-813-11	COIL, AIR-CORE		R745	1-216-809-11	METAL CHIP 100 5% 1/10W	
L709	1-456-813-11	COIL, AIR-CORE		R746	1-216-809-11	METAL CHIP 100 5% 1/10W	
L710	1-456-680-11	INDUCTOR 10uH		R747	1-216-809-11	METAL CHIP 100 5% 1/10W	
L711	1-456-680-11	INDUCTOR 10uH		R748	1-216-841-11	METAL CHIP 47K 5% 1/10W	
L758	1-456-813-11	COIL, AIR-CORE					
				R749	1-216-864-11	SHORT CHIP 0	
				R750	1-216-841-11	METAL CHIP 47K 5% 1/10W	
				R751	1-216-864-11	SHORT CHIP 0	
				R752	1-216-837-11	METAL CHIP 22K 5% 1/10W	
				R754	1-216-817-11	METAL CHIP 470 5% 1/10W	
				R756	1-216-809-11	METAL CHIP 100 5% 1/10W	

HCD-CPZ1

Ver. 1.1

AMP BD

Ref. No.	Part No.	Description	Remark			
R757	1-216-864-11	SHORT CHIP	0			
R758	1-216-864-11	SHORT CHIP	0			
R759	1-216-864-11	SHORT CHIP	0			
R761	1-216-809-11	METAL CHIP	100	5%	1/10W	
R762	1-216-809-11	METAL CHIP	100	5%	1/10W	
R764	1-216-864-11	SHORT CHIP	0			
R765	1-216-864-11	SHORT CHIP	0			
R768	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R769	1-220-942-11	METAL CHIP	3.3	1%	1/4W	
R770	1-220-942-11	METAL CHIP	3.3	1%	1/4W	
R771	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R772	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R773	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R774	1-216-793-11	METAL CHIP	4.7	5%	1/10W	
R775	1-216-793-11	METAL CHIP	4.7	5%	1/10W	
R776	1-216-849-11	METAL CHIP	220K	5%	1/10W	
R777	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R778	1-216-849-11	METAL CHIP	220K	5%	1/10W	
R779	1-216-864-11	SHORT CHIP	0			
R781	1-216-809-11	METAL CHIP	100	5%	1/10W	
R782	1-216-857-11	METAL CHIP	1M	5%	1/10W	
R783	1-216-809-11	METAL CHIP	100	5%	1/10W	
R784	1-216-809-11	METAL CHIP	100	5%	1/10W	
R785	1-216-809-11	METAL CHIP	100	5%	1/10W	
R786	1-216-809-11	METAL CHIP	100	5%	1/10W	
R787	1-216-809-11	METAL CHIP	100	5%	1/10W	
R788	1-216-809-11	METAL CHIP	100	5%	1/10W	
R789	1-216-809-11	METAL CHIP	100	5%	1/10W	
R790	1-216-809-11	METAL CHIP	100	5%	1/10W	
R792	1-216-864-11	SHORT CHIP	0			
R793	1-216-841-11	METAL CHIP	47K	5%	1/10W	
R800	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R801	1-216-821-11	METAL CHIP	1K	5%	1/10W	

< VIBRATOR >

X701 1-795-843-11 VIBRATOR, CRYSTAL (12.288MHz)
X702 1-795-660-21 QUARTZ CRYSTAL UNIT (49.152MHz)

A-1096-375-A BD BOARD, COMPLETE

< CAPACITOR >

C101	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C102	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C103	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C104	1-164-230-11	CERAMIC CHIP	220PF	5%	50V
C105	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C107	1-164-230-11	CERAMIC CHIP	220PF	5%	50V
C108	1-164-230-11	CERAMIC CHIP	220PF	5%	50V
C109	1-164-230-11	CERAMIC CHIP	220PF	5%	50V
C110	1-164-230-11	CERAMIC CHIP	220PF	5%	50V
C111	1-164-230-11	CERAMIC CHIP	220PF	5%	50V
C112	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C113	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C131	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C132	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C133	1-164-360-11	CERAMIC CHIP	0.1uF		16V

C201	1-128-995-21	ELECT CHIP	100uF	20%	10V
C202	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C203	1-128-995-21	ELECT CHIP	100uF	20%	10V
C204	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C205	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C206	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C207	1-128-995-21	ELECT CHIP	100uF	20%	10V
C208	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C210	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C213	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C214	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C215	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C217	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C218	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C219	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C220	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C221	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C222	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C223	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C224	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C226	1-165-908-11	CERAMIC CHIP	1uF	10%	10V
C227	1-164-360-11	CERAMIC CHIP	0.1uF	10%	16V
C228	1-128-590-11	ELECT CHIP	100uF	20%	6.3V
C230	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C232	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C251	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C252	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
C253	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C254	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
C256	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C257	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C258	1-164-230-11	CERAMIC CHIP	220PF	5%	50V
C259	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C260	1-117-863-11	CERAMIC CHIP	0.47uF	10%	6.3V
C261	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C264	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C265	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C267	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C268	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C269	1-126-208-21	ELECT CHIP	47uF	20%	4V
C270	1-126-208-21	ELECT CHIP	47uF	20%	4V
C271	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C272	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C273	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C275	1-162-910-11	CERAMIC CHIP	5PF	0.25PF	50V
C291	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C292	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C301	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C302	1-137-710-11	CERAMIC CHIP	10uF	20%	6.3V
C303	1-137-710-11	CERAMIC CHIP	10uF	20%	6.3V
C321	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C322	1-115-156-11	CERAMIC CHIP	1uF		10V
C323	1-128-995-21	ELECT CHIP	100uF	20%	10V
C401	1-128-396-11	ELECT CHIP	470uF	20%	10V
C404	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C405	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C406	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C424	1-164-360-11	CERAMIC CHIP	0.1uF		16V

BD

DRIVER

HP/MD

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C451	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V	R291	1-216-809-11	METAL CHIP	100	5%	1/10W
C452	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	R292	1-216-809-11	METAL CHIP	100	5%	1/10W
< CONNECTOR >						R321	1-216-789-11	METAL CHIP	2.2	5%	1/10W
						R322	1-216-789-11	METAL CHIP	2.2	5%	1/10W
CN102	1-770-706-11	CONNECTOR, FFC/FPC 23P				R323	1-216-864-11	SHORT CHIP	0		
CN301	1-770-425-11	CONNECTOR, FFC/FPC 16P				R324	1-216-845-11	METAL CHIP	100K	5%	1/10W
< IC >						R325	1-216-864-11	SHORT CHIP	0		
IC201	8-753-239-32	IC CXD3014-201R				R326	1-216-864-11	SHORT CHIP	0		
IC202	6-700-394-01	IC BA25BC0FP-E2				R401	1-216-295-00	SHORT CHIP	0		
IC402	6-705-808-01	IC BA5947FM-E2				R421	1-216-864-11	SHORT CHIP	0		
< TRANSISTOR >						R423	1-216-833-11	METAL CHIP	10K	5%	1/10W
						R451	1-216-837-11	METAL CHIP	22K	5%	1/10W
Q321	6-551-120-01	TRANSISTOR	2SA2119K			R452	1-216-833-11	METAL CHIP	10K	5%	1/10W
< RESISTOR/FERRITE BEAD >						< VIBRATOR >					
						X202	1-767-408-21	VIBRATOR, CRYSTAL (16.9344MHz)			

R101	1-216-809-11	METAL CHIP	100	5%	1/10W						
R102	1-216-809-11	METAL CHIP	100	5%	1/10W	1-688-337-11	DRIVER BOARD				
R103	1-216-809-11	METAL CHIP	100	5%	1/10W	*****					
R104	1-216-809-11	METAL CHIP	100	5%	1/10W	< CAPACITOR >					
R105	1-216-809-11	METAL CHIP	100	5%	1/10W						
R107	1-216-809-11	METAL CHIP	100	5%	1/10W	C705	1-162-306-11	CERAMIC	0.01uF	20%	16V
R108	1-216-809-11	METAL CHIP	100	5%	1/10W	C711	1-126-964-11	ELECT	10uF	20%	50V
R109	1-216-809-11	METAL CHIP	100	5%	1/10W	< CONNECTOR >					
R110	1-216-809-11	METAL CHIP	100	5%	1/10W						
R111	1-216-809-11	METAL CHIP	100	5%	1/10W	CN701	1-785-333-11	PIN, CONNECTOR (LIGHT ANGLE) 7P			
R112	1-216-809-11	METAL CHIP	100	5%	1/10W	< DIODE >					
R113	1-216-809-11	METAL CHIP	100	5%	1/10W						
R114	1-216-864-11	SHORT CHIP	0			D701	8-719-921-40	DIODE	MTZJ-4.7C		
R201	1-500-445-21	FERRITE, EMI (SMD) (2012)				< IC >					
R202	1-500-445-21	FERRITE, EMI (SMD) (2012)				IC701	8-759-598-69	IC	BA6956AN		
R203	1-216-295-00	SHORT CHIP	0			< RESISTOR >					
R207	1-216-295-00	SHORT CHIP	0			R701	1-249-415-11	CARBON	680	5%	1/4W
R249	1-216-841-11	METAL CHIP	47K	5%	1/10W	R702	1-247-807-31	CARBON	100	5%	1/4W
R250	1-216-857-11	METAL CHIP	1M	5%	1/10W	< SWITCH >					
R252	1-216-833-11	METAL CHIP	10K	5%	1/10W	S701	1-762-951-13	SWITCH, PUSH (OUT)			
R253	1-216-821-11	METAL CHIP	1K	5%	1/10W	S702	1-762-951-13	SWITCH, PUSH (CHUCK)			
R254	1-216-833-11	METAL CHIP	10K	5%	1/10W	*****					
R255	1-216-821-11	METAL CHIP	1K	5%	1/10W	A-1087-735-A	HP/MD BOARD, COMPLETE				
R256	1-216-837-11	METAL CHIP	22K	5%	1/10W	*****					
R257	1-216-853-11	METAL CHIP	470K	5%	1/10W	< CAPACITOR >					
R258	1-216-849-11	METAL CHIP	220K	5%	1/10W						
R259	1-216-833-11	METAL CHIP	10K	5%	1/10W	C983	1-164-360-11	CERAMIC CHIP	0.1uF		16V
R260	1-216-864-11	SHORT CHIP	0			C984	1-162-962-11	CERAMIC CHIP	470PF	10%	50V
R265	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	C985	1-162-962-11	CERAMIC CHIP	470PF	10%	50V
R266	1-216-821-11	METAL CHIP	1K	5%	1/10W	C986	1-164-360-11	CERAMIC CHIP	0.1uF		16V
R267	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	C990	1-164-227-11	CERAMIC CHIP	0.022uF	10%	25V
R268	1-216-833-11	METAL CHIP	10K	5%	1/10W	C991	1-164-227-11	CERAMIC CHIP	0.022uF	10%	25V
R269	1-216-809-11	METAL CHIP	100	5%	1/10W	C992	1-164-227-11	CERAMIC CHIP	0.022uF	10%	25V
R270	1-216-817-11	METAL CHIP	470	5%	1/10W	< EARTH TERMINAL >					
R271	1-216-857-11	METAL CHIP	1M	5%	1/10W	* EP981	1-537-738-21	TERMINAL, EARTH			
R272	1-500-445-21	FERRITE, EMI (SMD) (2012)									
R275	1-216-809-11	METAL CHIP	100	5%	1/10W						
R276	1-216-841-11	METAL CHIP	47K	5%	1/10W						
R277	1-216-809-11	METAL CHIP	100	5%	1/10W						
R278	1-216-809-11	METAL CHIP	100	5%	1/10W						
R279	1-216-809-11	METAL CHIP	100	5%	1/10W						

HCD-CPZ1

Ver. 1.1

HP/MD LCD MAIN

Ref. No.	Part No.	Description	Remark			
< SHORT >						
FB981	1-216-864-11	SHORT CHIP	0			
FB982	1-216-864-11	SHORT CHIP	0			
FB983	1-216-864-11	SHORT CHIP	0			
< JACK >						
J981	1-815-603-11	JACK (ANALOG IN)				
J982	1-815-603-11	JACK (PHONES)				
< RESISTOR >						
R982	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R983	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R984	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R985	1-216-845-11	METAL CHIP	100K	5%	1/10W	

A-1087-737-A	LCD BOARD, COMPLETE					

2-514-678-01	HOLDER (LCD)					
< CAPACITOR >						
C951	1-164-360-11	CERAMIC CHIP	0.1uF		16V	
C952	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
C953	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
C954	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
C955	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
C956	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
< CONNECTOR >						
CN951	1-784-731-11	CONNECTOR, FFC 9P				
< LED >						
D951	6-501-139-01	LED SELU2B10A-SLF62 (LCD BACK LIGHT)				
D952	6-501-139-01	LED SELU2B10A-SLF62 (LCD BACK LIGHT)				
< IC >						
IC951	(Not supplied)	IC NJU6433AF				
< SHORT >						
JR952	1-216-864-11	SHORT CHIP	0			
JR953	1-216-864-11	SHORT CHIP	0			
JR954	1-216-864-11	SHORT CHIP	0			
JR955	1-216-864-11	SHORT CHIP	0			
JR956	1-216-864-11	SHORT CHIP	0			
JR958	1-216-864-11	SHORT CHIP	0			
JR959	1-216-864-11	SHORT CHIP	0			
JR960	1-216-864-11	SHORT CHIP	0			
JR961	1-216-864-11	SHORT CHIP	0			
< LIQUID CRYSTAL DISPLAY >						
LCD951	1-963-403-11	DISPLAY PANEL, LIQUID CRYSTAL				
< RESISTOR >						
R951	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R952	1-216-821-11	METAL CHIP	1K	5%	1/10W	

Ref. No.	Part No.	Description			Remark
R953	1-216-833-11	METAL CHIP	10K	5%	1/10W
R954	1-216-809-11	METAL CHIP	100	5%	1/10W
R955	1-216-809-11	METAL CHIP	100	5%	1/10W
R956	1-216-809-11	METAL CHIP	100	5%	1/10W
R957	1-216-809-11	METAL CHIP	100	5%	1/10W
R958	1-216-809-11	METAL CHIP	100	5%	1/10W
R959	1-216-817-11	METAL CHIP	470	5%	1/10W
R960	1-216-817-11	METAL CHIP	470	5%	1/10W
R961	1-216-817-11	METAL CHIP	470	5%	1/10W
R962	1-216-817-11	METAL CHIP	470	5%	1/10W
R963	1-216-841-11	METAL CHIP	47K	5%	1/10W

A-1087-727-A	MAIN BOARD, COMPLETE (AEP, UK, EE)				
A-1087-748-A	MAIN BOARD, COMPLETE (SP, KR, AUS)				

3-252-829-01	SCREW (B3), (+) BV TAPPING				
3-254-142-01	SCREW (B3), (+) BV TAPPING				
< CAPACITOR >					
C200	1-126-964-11	ELECT	10uF	20%	50V
C201	1-126-937-11	ELECT	4700uF	20%	16V
C202	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C203	1-126-935-11	ELECT	470uF	20%	16V
C204	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C205	1-126-935-11	ELECT	470uF	20%	16V
C206	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C207	1-126-935-11	ELECT	470uF	20%	16V
C208	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C209	1-126-934-11	ELECT	220uF	20%	16V
C210	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C211	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C212	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C214	1-126-933-11	ELECT	100uF	20%	16V
C215	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C301	1-126-916-11	ELECT	1000uF	20%	6.3V
C309	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V
C310	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C311	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C312	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C316	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C359	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V
C362	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C401	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C402	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C403	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C404	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C440	1-126-964-11	ELECT	10uF	20%	50V
C490	1-126-964-11	ELECT	10uF	20%	50V
C501	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C502	1-126-934-11	ELECT	220uF	20%	16V
C503	1-126-934-11	ELECT	220uF	20%	16V
C504	1-126-964-11	ELECT	10uF	20%	50V
C505	1-126-964-11	ELECT	10uF	20%	50V
C506	1-130-495-00	MYLAR	0.1uF	5%	50V
C507	1-130-495-00	MYLAR	0.1uF	5%	50V
C508	1-130-475-00	MYLAR	0.0022uF	5%	50V
C509	1-126-960-11	ELECT	1uF	20%	50V

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C510	1-126-960-11	ELECT	1uF 20% 50V	CN305	1-784-780-11	CONNECTOR, FFC 19P	
C511	1-126-964-11	ELECT	10uF 20% 50V	* CN306	1-815-448-11	PIN, CONNECTOR (PWB) 7P	
				CN307	1-815-444-11	PIN, CONNECTOR (PWB) 3P	
C512	1-126-960-11	ELECT	1uF 20% 50V				
C513	1-126-960-11	ELECT	1uF 20% 50V	CN308	1-779-291-11	CONNECTOR, FFC (LIF (NON-ZIF)) 23P	
C514	1-126-960-11	ELECT	1uF 20% 50V	CN309	1-568-830-11	CONNECTOR, FFC 11P (SP, KR, AUS)	
C515	1-126-964-11	ELECT	10uF 20% 50V	CN309	1-784-776-11	CONNECTOR, FFC 15P (AEP, UK, EE)	
C517	1-126-934-11	ELECT	220uF 20% 16V				
						< DIODE >	
C518	1-104-665-11	ELECT	100uF 20% 25V	D202	8-719-000-07	DIODE MC2836	
C519	1-164-360-11	CERAMIC CHIP	0.1uF 16V	D203	6-500-522-31	DIODE 10EDB40-TB5	
C524	1-126-935-11	ELECT	470uF 20% 16V	D204	6-500-522-31	DIODE 10EDB40-TB5	
C527	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	D205	6-500-522-31	DIODE 10EDB40-TB5	
C530	1-126-964-11	ELECT	10uF 20% 50V	D301	8-719-000-07	DIODE MC2836	
C531	1-126-964-11	ELECT	10uF 20% 50V	D302	8-719-000-07	DIODE MC2836	
C536	1-126-934-11	ELECT	220uF 20% 16V	D303	8-719-000-07	DIODE MC2836	
C537	1-126-935-11	ELECT	470uF 20% 16V	D305	8-719-988-61	DIODE 1SS355TE-17	
C538	1-164-360-11	CERAMIC CHIP	0.1uF 16V	D306	8-719-988-61	DIODE 1SS355TE-17	
C539	1-164-360-11	CERAMIC CHIP	0.1uF 16V	D307	8-719-988-61	DIODE 1SS355TE-17	
C540	1-126-935-11	ELECT	470uF 20% 16V	D308	8-719-988-61	DIODE 1SS355TE-17 (AEP, UK, EE)	
C541	1-162-927-11	CERAMIC CHIP	100PF 5% 50V	D501	6-500-522-31	DIODE 10EDB40-TB5	
C542	1-162-927-11	CERAMIC CHIP	100PF 5% 50V	D502	6-500-522-31	DIODE 10EDB40-TB5	
C543	1-162-927-11	CERAMIC CHIP	100PF 5% 50V				
C544	1-162-927-11	CERAMIC CHIP	100PF 5% 50V			< EARTH TERMINAL >	
				* EP301	1-537-738-21	TERMINAL, EARTH	
C545	1-162-927-11	CERAMIC CHIP	100PF 5% 50V	* EP302	1-537-738-21	TERMINAL, EARTH	
C546	1-164-360-11	CERAMIC CHIP	0.1uF 16V				
C550	1-126-934-11	ELECT	220uF 20% 16V			< FERRITE BEAD >	
C552	1-104-665-11	ELECT	100uF 20% 25V				
C554	1-126-964-11	ELECT	10uF 20% 50V				
C555	1-126-964-11	ELECT	10uF 20% 50V	FB540	1-412-473-51	INDUCTOR (SMALL TYPE)	
C556	1-130-495-00	MYLAR	0.1uF 5% 50V				
C557	1-130-495-00	MYLAR	0.1uF 5% 50V			< IC >	
C558	1-130-475-00	MYLAR	0.0022uF 5% 50V	IC200	8-759-518-68	IC PQ12RF21J00H	
C559	1-126-960-11	ELECT	1uF 20% 50V	IC201	8-759-071-48	IC TA7807S	
				IC202	6-701-760-01	IC uPC3504AHF	
C560	1-126-960-11	ELECT	1uF 20% 50V	IC203	8-759-701-59	IC NJM78M09FA	
C561	1-126-964-11	ELECT	10uF 20% 50V	IC204	8-759-231-53	IC TA7805S	
C562	1-126-960-11	ELECT	1uF 20% 50V				
C563	1-126-960-11	ELECT	1uF 20% 50V	IC301	6-805-558-01	IC M30624MGP-A41FPU0	
C564	1-126-960-11	ELECT	1uF 20% 50V	IC302	6-701-680-01	IC PST3629NR	
				IC501	6-707-974-01	IC BD3872FS	
C565	1-126-964-11	ELECT	10uF 20% 50V	IC502	8-759-656-83	IC NJM4580MD-(TE2)	
C567	1-126-934-11	ELECT	220uF 20% 16V				
C581	1-162-927-11	CERAMIC CHIP	100PF 5% 50V			< TRANSISTOR >	
C582	1-162-927-11	CERAMIC CHIP	100PF 5% 50V				
C583	1-162-927-11	CERAMIC CHIP	100PF 5% 50V	Q301	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
				Q401	8-729-027-43	TRANSISTOR DTC114EKA-T146	
C584	1-162-927-11	CERAMIC CHIP	100PF 5% 50V	Q402	8-729-027-23	TRANSISTOR DTA114EKA-T146	
C585	1-162-927-11	CERAMIC CHIP	100PF 5% 50V	Q403	8-729-027-43	TRANSISTOR DTC114EKA-T146	
C586	1-162-927-11	CERAMIC CHIP	100PF 5% 50V	Q404	8-729-027-23	TRANSISTOR DTA114EKA-T146	
C587	1-162-927-11	CERAMIC CHIP	100PF 5% 50V				
C588	1-162-927-11	CERAMIC CHIP	100PF 5% 50V	Q407	8-729-027-43	TRANSISTOR DTC114EKA-T146	
				Q408	8-729-034-00	TRANSISTOR 2SA1282ATP-EF	
C590	1-162-927-11	CERAMIC CHIP	100PF 5% 50V	Q409	8-729-027-43	TRANSISTOR DTC114EKA-T146	
				Q410	8-729-027-23	TRANSISTOR DTA114EKA-T146	
				Q411	8-729-027-43	TRANSISTOR DTC114EKA-T146	
				Q412	8-729-600-22	TRANSISTOR 2SA1235-F	
CN201	1-564-505-11	PLUG, CONNECTOR 2P		Q413	6-550-889-01	TRANSISTOR 2SC5938-T112-1B	
CN202	1-815-443-11	PIN, CONNECTOR (PWB) 2P		Q414	6-550-889-01	TRANSISTOR 2SC5938-T112-1B	
CN300	1-815-444-11	PIN, CONNECTOR (PWB) 3P		Q450	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
CN301	1-784-780-11	CONNECTOR, FFC 19P		Q463	6-550-889-01	TRANSISTOR 2SC5938-T112-1B	
CN302	1-568-838-11	CONNECTOR, FFC 21P					
				Q464	6-550-889-01	TRANSISTOR 2SC5938-T112-1B	
* CN303	1-815-448-11	PIN, CONNECTOR (PWB) 7P					
CN304	1-568-828-11	CONNECTOR, FFC 9P					

HCD-CPZ1

Ver. 1.1

MAIN

Ref. No.	Part No.	Description				Remark	Ref. No.	Part No.	Description				Remark
< RESISTOR >							R370	1-216-809-11	METAL CHIP	100	5%	1/10W	
R301	1-216-833-11	METAL CHIP	10K	5%	1/10W		R371	1-216-809-11	METAL CHIP	100	5%	1/10W	
R302	1-216-809-11	METAL CHIP	100	5%	1/10W		R372	1-216-809-11	METAL CHIP	100	5%	1/10W	
R303	1-216-809-11	METAL CHIP	100	5%	1/10W		R376	1-216-809-11	METAL CHIP	100	5%	1/10W	
R304	1-216-809-11	METAL CHIP	100	5%	1/10W		R377	1-216-809-11	METAL CHIP	100	5%	1/10W	
R305	1-216-809-11	METAL CHIP	100	5%	1/10W		R378	1-216-809-11	METAL CHIP	100	5%	1/10W	
R306	1-216-809-11	METAL CHIP	100	5%	1/10W		R379	1-216-809-11	METAL CHIP	100	5%	1/10W	
R307	1-216-809-11	METAL CHIP	100	5%	1/10W		R380	1-216-809-11	METAL CHIP	100	5%	1/10W	
R309	1-216-833-11	METAL CHIP	10K	5%	1/10W		R382	1-216-809-11	METAL CHIP	100	5%	1/10W	
R311	1-216-849-11	METAL CHIP	220K	5%	1/10W		R383	1-216-809-11	METAL CHIP	100	5%	1/10W	
R313	1-216-864-11	SHORT CHIP	0				R384	1-216-809-11	METAL CHIP	100	5%	1/10W	
R318	1-216-809-11	METAL CHIP	100	5%	1/10W	(AEP, UK, EE)	R385	1-216-809-11	METAL CHIP	100	5%	1/10W	
R319	1-216-809-11	METAL CHIP	100	5%	1/10W		R386	1-216-809-11	METAL CHIP	100	5%	1/10W	
R320	1-216-841-11	METAL CHIP	47K	5%	1/10W		R387	1-216-809-11	METAL CHIP	100	5%	1/10W	
R321	1-216-809-11	METAL CHIP	100	5%	1/10W		R388	1-216-809-11	METAL CHIP	100	5%	1/10W	
R322	1-216-809-11	METAL CHIP	100	5%	1/10W		R389	1-216-809-11	METAL CHIP	100	5%	1/10W	
R323	1-216-809-11	METAL CHIP	100	5%	1/10W		R390	1-216-809-11	METAL CHIP	100	5%	1/10W	
R324	1-216-809-11	METAL CHIP	100	5%	1/10W		R391	1-216-809-11	METAL CHIP	100	5%	1/10W	
R325	1-216-809-11	METAL CHIP	100	5%	1/10W		R392	1-216-809-11	METAL CHIP	100	5%	1/10W	
R326	1-216-809-11	METAL CHIP	100	5%	1/10W		R393	1-216-864-11	SHORT CHIP	0 (SP, KR, AUS)			
R327	1-216-809-11	METAL CHIP	100	5%	1/10W	(AEP, UK, EE)	R394	1-216-809-11	METAL CHIP	100	5%	1/10W	
R328	1-216-809-11	METAL CHIP	100	5%	1/10W		R395	1-216-809-11	METAL CHIP	100	5%	1/10W	
R329	1-216-809-11	METAL CHIP	100	5%	1/10W		R397	1-216-809-11	METAL CHIP	100	5%	1/10W	
R330	1-216-809-11	METAL CHIP	100	5%	1/10W		R400	1-216-809-11	METAL CHIP	100	5%	1/10W	
R331	1-216-809-11	METAL CHIP	100	5%	1/10W		R401	1-216-841-11	METAL CHIP	47K	5%	1/10W	
R332	1-216-809-11	METAL CHIP	100	5%	1/10W		R402	1-216-841-11	METAL CHIP	47K	5%	1/10W	
R333	1-216-809-11	METAL CHIP	100	5%	1/10W		R403	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R334	1-216-809-11	METAL CHIP	100	5%	1/10W		R404	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R335	1-216-809-11	METAL CHIP	100	5%	1/10W		R405	1-216-837-11	METAL CHIP	22K	5%	1/10W	
R336	1-216-809-11	METAL CHIP	100	5%	1/10W		R406	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R337	1-216-809-11	METAL CHIP	100	5%	1/10W		R408	1-216-837-11	METAL CHIP	22K	5%	1/10W	
R338	1-216-809-11	METAL CHIP	100	5%	1/10W		R409	1-216-813-11	METAL CHIP	220	5%	1/10W	
R339	1-216-809-11	METAL CHIP	100	5%	1/10W		R410	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R340	1-216-809-11	METAL CHIP	100	5%	1/10W		R411	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R341	1-216-809-11	METAL CHIP	100	5%	1/10W		R412	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R342	1-216-809-11	METAL CHIP	100	5%	1/10W		R417	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R343	1-216-809-11	METAL CHIP	100	5%	1/10W		R418	1-216-864-11	SHORT CHIP	0 (SP, KR, AUS)			
R344	1-216-809-11	METAL CHIP	100	5%	1/10W		R420	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R345	1-216-809-11	METAL CHIP	100	5%	1/10W		R425	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R346	1-216-809-11	METAL CHIP	100	5%	1/10W		R426	1-216-894-11	SHORT CHIP	0 (SP, KR, AUS)			
R347	1-216-809-11	METAL CHIP	100	5%	1/10W		R429	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R348	1-216-809-11	METAL CHIP	100	5%	1/10W		R430	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R349	1-216-809-11	METAL CHIP	100	5%	1/10W		R440	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R354	1-216-809-11	METAL CHIP	100	5%	1/10W		R441	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R355	1-216-809-11	METAL CHIP	100	5%	1/10W		R453	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R357	1-216-809-11	METAL CHIP	100	5%	1/10W		R454	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R358	1-216-809-11	METAL CHIP	100	5%	1/10W		R455	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R359	1-216-809-11	METAL CHIP	100	5%	1/10W		R456	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R360	1-216-809-11	METAL CHIP	100	5%	1/10W		R457	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R361	1-216-809-11	METAL CHIP	100	5%	1/10W		R468	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R365	1-216-809-11	METAL CHIP	100	5%	1/10W		R469	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R366	1-216-809-11	METAL CHIP	100	5%	1/10W		R470	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R367	1-216-809-11	METAL CHIP	100	5%	1/10W		R471	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R368	1-216-809-11	METAL CHIP	100	5%	1/10W		R473	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R369	1-216-809-11	METAL CHIP	100	5%	1/10W		R474	1-216-857-11	METAL CHIP	1M	5%	1/10W	
							R475	1-216-833-11	METAL CHIP	10K	5%	1/10W	
							R476	1-216-833-11	METAL CHIP	10K	5%	1/10W	

Ref. No.	Part No.	Description			Remark
R477	1-216-833-11	METAL CHIP	10K	5%	1/10W
R478	1-216-833-11	METAL CHIP	10K	5%	1/10W
R490	1-216-821-11	METAL CHIP	1K	5%	1/10W
R491	1-216-845-11	METAL CHIP	100K	5%	1/10W
R493	1-216-829-11	METAL CHIP	4.7K	5%	1/10W (AEP, UK, EE)
R494	1-216-833-11	METAL CHIP	10K	5%	1/10W
R495	1-216-833-11	METAL CHIP	10K	5%	1/10W
R497	1-216-833-11	METAL CHIP	10K	5%	1/10W
R501	1-216-821-11	METAL CHIP	1K	5%	1/10W
R502	1-216-833-11	METAL CHIP	10K	5%	1/10W
R503	1-216-821-11	METAL CHIP	1K	5%	1/10W
R504	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R505	1-216-837-11	METAL CHIP	22K	5%	1/10W
R506	1-216-849-11	METAL CHIP	220K	5%	1/10W
R507	1-216-805-11	METAL CHIP	47	5%	1/10W
R509	1-216-833-11	METAL CHIP	10K	5%	1/10W
R510	1-216-845-11	METAL CHIP	100K	5%	1/10W
R511	1-216-821-11	METAL CHIP	1K	5%	1/10W
R512	1-216-833-11	METAL CHIP	10K	5%	1/10W
R516	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R522	1-216-864-11	SHORT CHIP	0		
R523	1-216-864-11	SHORT CHIP	0		
R547	1-216-813-11	METAL CHIP	220	5%	1/10W
R550	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R551	1-216-821-11	METAL CHIP	1K	5%	1/10W
R552	1-216-833-11	METAL CHIP	10K	5%	1/10W
R553	1-216-821-11	METAL CHIP	1K	5%	1/10W
R554	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R555	1-216-837-11	METAL CHIP	22K	5%	1/10W
R556	1-216-849-11	METAL CHIP	220K	5%	1/10W
R557	1-216-805-11	METAL CHIP	47	5%	1/10W
R558	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R559	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R560	1-216-845-11	METAL CHIP	100K	5%	1/10W
R561	1-216-821-11	METAL CHIP	1K	5%	1/10W
R562	1-216-833-11	METAL CHIP	10K	5%	1/10W
R566	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
< VIBRATOR >					
X301	1-760-252-12	VIBRATOR, CRYSTAL (32.768kHz)			
X302	1-795-482-11	VIBRATOR, CERAMIC (16MHz)			

A-1087-736-A		OPT BOARD, COMPLETE			

< CAPACITOR >					
C981	1-104-665-11	ELECT	100uF	20%	25V
C982	1-164-360-11	CERAMIC CHIP	0.1uF		16V
< IC >					
IC981	6-600-012-01	IC TOTX141L (CD DIGITAL OUT)			
< RESISTOR >					
R981	1-216-864-11	SHORT CHIP	0		

Ref. No.	Part No.	Description	Remark		
	A-1087-733-A	PANEL BOARD, COMPLETE *****			
< CAPACITOR >					
C904	1-126-947-11	ELECT	47uF	20%	35V
C906	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C907	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C908	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C909	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C910	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C911	1-164-360-11	CERAMIC CHIP	0.1uF		16V
< CONNECTOR >					
CN901	1-784-741-11	CONNECTOR, FFC 19P			
* CN902	1-564-720-11	PIN, CONNECTOR (SMALL TYPE) 4P			
< LED >					
D901	8-719-812-44	LED TLO124 (STANDBY)			
D902	8-719-046-36	LED SEL5921A-TP15 (TUNER, BAND)			
D903	8-719-046-36	LED SEL5921A-TP15 (TAPE ◀▶)			
< IC >					
IC901	6-600-349-31	IC NJL24H400A			
< TRANSISTOR >					
Q901	8-729-120-28	TRANSISTOR	2SC1623-L5L6		
Q902	8-729-120-28	TRANSISTOR	2SC1623-L5L6		
Q903	8-729-120-28	TRANSISTOR	2SC1623-L5L6		
Q904	8-729-120-28	TRANSISTOR	2SC1623-L5L6		
< RESISTOR >					
R901	1-216-821-11	METAL CHIP	1K	5%	1/10W
R902	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R903	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R904	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R905	1-216-833-11	METAL CHIP	10K	5%	1/10W
R906	1-216-821-11	METAL CHIP	1K	5%	1/10W
R907	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R908	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R911	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R912	1-216-821-11	METAL CHIP	1K	5%	1/10W
R913	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R914	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R915	1-216-833-11	METAL CHIP	10K	5%	1/10W
R916	1-216-837-11	METAL CHIP	22K	5%	1/10W
R917	1-216-841-11	METAL CHIP	47K	5%	1/10W
R921	1-216-817-11	METAL CHIP	470	5%	1/10W
R922	1-216-817-11	METAL CHIP	470	5%	1/10W
R923	1-216-817-11	METAL CHIP	470	5%	1/10W
R924	1-216-833-11	METAL CHIP	10K	5%	1/10W
R925	1-216-833-11	METAL CHIP	10K	5%	1/10W
R926	1-216-833-11	METAL CHIP	10K	5%	1/10W
R927	1-216-833-11	METAL CHIP	10K	5%	1/10W
R928	1-216-833-11	METAL CHIP	10K	5%	1/10W
R929	1-216-833-11	METAL CHIP	10K	5%	1/10W
R930	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R931	1-216-833-11	METAL CHIP	10K	5%	1/10W

HCD-CPZ1

Ver. 1.1

PANEL	SP	SUB PANEL	SUB POWER	SW POWER
-------	----	-----------	-----------	----------

Ref. No.	Part No.	Description	Remark
R932	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
R933	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R934	1-216-821-11	METAL CHIP 1K 5%	1/10W
R935	1-216-833-11	METAL CHIP 10K 5%	1/10W
< ROTARY ENCODER >			
RV901	1-418-859-31	ENCODER, ROTARY (BASS)	
RV902	1-418-859-31	ENCODER, ROTARY (TREBLE)	
RV903	1-479-195-11	ENCODER (VOLUME)	
RV904	1-478-061-11	ENCODER, ROTARY (PUSH ENTER (JOG))	
< SWITCH >			
S901	1-762-875-21	SWITCH, KEYBOARD (I/⏏)	
S902	1-762-875-21	SWITCH, KEYBOARD (DSCX)	
S903	1-762-875-21	SWITCH, KEYBOARD (PLAYMODE, DIRECTION, TUNING MODE)	
S904	1-762-875-21	SWITCH, KEYBOARD (REPEAT, FM MODE)	
S905	1-762-875-21	SWITCH, KEYBOARD (CD SYNCHRO)	
S906	1-762-875-21	SWITCH, KEYBOARD (FUNCTION)	
S907	1-762-875-21	SWITCH, KEYBOARD (●)	
S908	1-762-875-21	SWITCH, KEYBOARD (■ (TAPE))	
S909	1-762-875-21	SWITCH, KEYBOARD (■ (TAPE))	
S910	1-762-875-21	SWITCH, KEYBOARD (TAPE ◀▶)	
S914	1-762-875-21	SWITCH, KEYBOARD (DISPLAY)	
S915	1-762-875-21	SWITCH, KEYBOARD (TUNER, BAND)	
S916	1-762-875-21	SWITCH, KEYBOARD (TUNING +)	
S917	1-762-875-21	SWITCH, KEYBOARD (TUNING -)	
S918	1-762-875-21	SWITCH, KEYBOARD (□ +)	
S919	1-762-875-21	SWITCH, KEYBOARD (□ -)	

A-1087-730-A	SP BOARD, COMPLETE	*****	
< CAPACITOR >			
C851	1-164-315-11	CERAMIC CHIP 470PF 5%	50V
C852	1-164-315-11	CERAMIC CHIP 470PF 5%	50V
C853	1-164-315-11	CERAMIC CHIP 470PF 5%	50V
C854	1-164-315-11	CERAMIC CHIP 470PF 5%	50V
< CONNECTOR >			
CN850	1-564-505-11	PLUG, CONNECTOR 2P	
CN870	1-564-505-11	PLUG, CONNECTOR 2P	
< JACK >			
J860	1-537-114-21	TERMINAL BOARD (SPEAKER)	

A-1087-734-A	SUB PANEL BOARD, COMPLETE	*****	
< LED >			
D904	8-719-046-36	LED SEL5921A-TP15 (CD ▶■)	

Ref. No.	Part No.	Description	Remark
< RESISTOR >			
R909	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R910	1-216-833-11	METAL CHIP 10K 5%	1/10W
< SWITCH >			
S911	1-762-875-21	SWITCH, KEYBOARD (■/CANCEL (CD))	
S912	1-762-875-21	SWITCH, KEYBOARD (CD ▶■)	
S913	1-762-875-21	SWITCH, KEYBOARD (▲ (CD))	

A-1087-731-A	SUB POWER BOARD, COMPLETE (AEP, UK, EE)		
A-1087-750-A	SUB POWER BOARD, COMPLETE (SP, KR, AUS)	*****	
< CAPACITOR >			
△ C991	1-113-925-11	CERAMIC 0.01uF 20%	250V
△ C992	1-113-925-11	CERAMIC 0.01uF 20%	250V
C993	1-126-768-11	ELECT 2200uF 20%	16V
C994	1-104-665-11	ELECT 100uF 20%	25V
C995	1-107-726-91	CERAMIC CHIP 0.01uF 10%	16V
< CONNECTOR >			
CN990	1-564-321-00	PIN, CONNECTOR (3.96mm PITCH) 2P	
< DIODE >			
D991	8-719-988-61	DIODE 1SS355TE-17	
D992	6-500-522-31	DIODE 10EDB40-TB5	
D993	6-500-522-31	DIODE 10EDB40-TB5	
D994	6-500-522-31	DIODE 10EDB40-TB5	
D995	6-500-522-31	DIODE 10EDB40-TB5	
< IC >			
IC991	6-704-135-01	IC MM1614A	
< TRANSISTOR >			
Q991	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
< RESISTOR >			
R991	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
R992	1-216-845-11	METAL CHIP 100K 5%	1/10W
< RELAY >			
△ RY990	1-755-467-11	RELAY (POWER)	
△ RY991	1-755-467-11	RELAY (POWER)	
< TRANSFORMER >			
△ T991	1-437-676-11	TRANSFORMER, POWER (AEP, UK, EE)	
△ T991	1-437-677-11	TRANSFORMER, POWER (SP, KR, AUS)	

A-1087-744-A	SW POWER BOARD, COMPLETE	*****	
1-533-399-21	FUSE HOLDER		
3-254-142-01	SCREW (B3), (+) BV TAPPING		
< CAPACITOR >			
△ C1	1-165-529-11	MYLAR 0.22uF 10	275V

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
△ C3	1-165-528-11	MYLAR 0.1uF 10 275V		△ Q12	6-551-319-01	FET 2SK3563 (LB2SONY)	
△ C4	1-119-886-51	CERAMIC 470PF 10% 250V				< RESISTOR >	
△ C5	1-119-886-51	CERAMIC 470PF 10% 250V		△ R2	1-219-759-11	METAL 1M 5% 1/2W	
△ C6	1-115-350-51	CERAMIC 4700PF 2kV		△ R10	1-218-895-11	METAL CHIP 100K 0.5% 1/10W	
△ C7	1-115-350-51	CERAMIC 4700PF 2kV		△ R12	1-245-478-31	METAL 470K 1% 1/4W	
△ C11	1-100-923-21	ELECT 100uF 20% 450V		△ R13	1-245-478-31	METAL 470K 1% 1/4W	
△ C13	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		△ R14	1-218-869-11	METAL CHIP 8.2K 0.5% 1/10W	
△ C14	1-163-275-11	CERAMIC CHIP 0.001uF 5% 50V		△ R15	1-218-875-11	METAL CHIP 15K 0.5% 1/10W	
△ C15	1-126-965-11	ELECT 22uF 20% 50V		△ R16	1-218-823-11	METAL CHIP 100 0.5% 1/10W	
△ C16	1-126-963-11	ELECT 4.7uF 20% 50V		△ R17	1-211-989-11	METAL CHIP 68 0.5% 1/10W	
△ C17	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V		△ R18	1-216-833-11	METAL CHIP 10K 5% 1/10W	
△ C18	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V		△ R19	1-249-393-11	CARBON 10 5% 1/4W	
△ C19	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V		△ R20	1-216-833-11	METAL CHIP 10K 5% 1/10W	
△ C20	1-126-947-11	ELECT 47uF 20% 35V		△ R21	1-249-393-11	CARBON 10 5% 1/4W	
△ C21	1-115-340-11	CERAMIC CHIP 0.22uF 10% 25V		△ R22	1-249-417-11	CARBON 1K 5% 1/4W	
△ C22	1-107-824-11	CERAMIC 220PF 5% 1KV		△ R23	1-243-979-71	METAL OXIDE 0.1 5% 2W	
△ C23	1-107-824-11	CERAMIC 220PF 5% 1KV		△ R24	1-216-821-11	METAL CHIP 1K 5% 1/10W	
△ C24	1-128-990-22	FILM 27000PF 3% 800V		△ R25	1-247-694-11	CARBON 33 5% 1/4W	
△ C25	1-107-910-11	ELECT 100uF 20% 50V		R32	1-216-821-11	METAL CHIP 1K 5% 1/10W	
△ C26	1-119-888-51	CERAMIC 2200PF 20% 250V		R33	1-216-817-11	METAL CHIP 470 5% 1/10W	
C31	1-128-953-31	ELECT 470uF 20% 25V				< TRANSFORMER >	
C32	1-100-924-21	ELECT 2200uF 20% 35V		△ T1	1-443-673-11	TRANSFORMER, LINE FILTER	
		< CONNECTOR >		△ T2	1-443-673-11	TRANSFORMER, LINE FILTER	
CN1	1-564-321-00	PIN, CONNECTOR (3.96mm PITCH) 2P		△ T31	1-443-620-11	TRANSFORMER, CONVERTER	
* CN31	1-564-508-11	PLUG, CONNECTOR 5P				< THERMISTOR >	
CN32	1-564-505-11	PLUG, CONNECTOR 2P		△ TH1	1-803-806-31	THERMISTOR, NTC	
		< DIODE >				< GROUND TERMINAL >	
△ D1	8-719-077-77	DIODE D3SB60F3		* TK001	1-537-738-21	TERMINAL, EARTH	
△ D11	8-719-979-64	DIODE UF4005/23		* TK002	1-537-738-21	TERMINAL, EARTH	
△ D12	8-719-083-83	DIODE UDZS-TE17-15B		*****			
△ D13	8-719-083-83	DIODE UDZS-TE17-15B					
△ D14	8-719-063-74	DIODE D1NL20U-TR2					
△ D15	8-719-083-83	DIODE UDZS-TE17-15B					
△ D16	8-719-083-83	DIODE UDZS-TE17-15B					
△ D17	6-500-137-01	DIODE BAT54HT1					
D31	8-719-052-37	DIODE F10P04Q					
D32	8-719-074-58	DIODE FGH10A10					
D33	8-719-982-15	DIODE MTZJ-27B					
D34	8-719-923-91	DIODE MTZJ-T-77-16A					
		< FUSE >					
△ F1	1-576-230-12	FUSE (T3.15AL/H250V)					
		< FERRITE BEAD >					
△ FB11	1-410-397-21	FERRITE 1.1uH					
		< IC >					
△ IC11	6-707-749-01	IC CXD9841P					
		< PHOTO INTERRUPTER >					
△ PH11	6-600-187-01	PHOTO COUPLER PC123Y22JOOF					
		< TRANSISTOR >					
△ Q11	6-551-319-01	FET 2SK3563 (LB2SONY)					

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

HCD-CPZ1

TC

Ref. No.	Part No.	Description			Remark
C635	1-126-960-11	ELECT	1uF	20%	50V
C640	1-126-947-11	ELECT	47uF	20%	35V
C641	1-126-961-11	ELECT	2.2uF	20%	50V
C642	1-137-150-11	FILM	0.01uF	5%	100V
C643	1-130-483-00	MYLAR	0.01uF	5%	50V
C644	1-130-479-00	MYLAR	0.0047uF	5%	50V
C645	1-130-479-00	MYLAR	0.0047uF	5%	50V
C646	1-130-483-00	MYLAR	0.01uF	5%	50V
C647	1-126-964-11	ELECT	10uF	20%	50V
C651	1-126-947-11	ELECT	47uF	20%	35V
C653	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C655	1-126-964-11	ELECT	10uF	20%	50V
C656	1-126-960-11	ELECT	1uF	20%	50V
C657	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C658	1-126-961-11	ELECT	2.2uF	20%	50V
C660	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C661	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C662	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C663	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C664	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C665	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C667	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C681	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
< CONNECTOR >					
CN603	1-784-780-11	CONNECTOR, FFC 19P			
< DIODE >					
D681	8-719-988-61	DIODE 1SS355TE-17			
< IC >					
IC601	6-702-130-01	IC HA12237F			
< COIL >					
L601	1-410-780-11	INDUCTOR	27mH		
L651	1-410-780-11	INDUCTOR	27mH		
< TRANSISTOR >					
Q601	8-729-120-28	TRANSISTOR	2SC1623-L5L6		
Q602	8-729-120-28	TRANSISTOR	2SC1623-L5L6		
Q639	8-729-119-76	TRANSISTOR	2SA1175-HFE		
Q640	8-729-027-43	TRANSISTOR	DTC114EKA-T146		
Q642	6-551-350-01	TRANSISTOR	2SC5484-TP-J		
Q643	6-551-350-01	TRANSISTOR	2SC5484-TP-J		
Q651	8-729-120-28	TRANSISTOR	2SC1623-L5L6		
Q652	8-729-120-28	TRANSISTOR	2SC1623-L5L6		
Q680	8-729-027-43	TRANSISTOR	DTC114EKA-T146		
Q681	8-729-027-23	TRANSISTOR	DTA114EKA-T146		
Q688	8-729-027-43	TRANSISTOR	DTC114EKA-T146		
Q691	8-729-027-43	TRANSISTOR	DTC114EKA-T146		
Q692	8-729-027-43	TRANSISTOR	DTC114EKA-T146		
Q693	8-729-040-76	TRANSISTOR	KTA1273-Y-AT		
Q694	8-729-040-76	TRANSISTOR	KTA1273-Y-AT		
< RESISTOR >					
R601	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R602	1-216-829-11	METAL CHIP	4.7K	5%	1/10W

Ref. No.	Part No.	Description	Remark		
R603	1-216-821-11	METAL CHIP	1K	5%	1/10W
R604	1-216-833-11	METAL CHIP	10K	5%	1/10W
R605	1-216-841-11	METAL CHIP	47K	5%	1/10W
R606	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R607	1-216-833-11	METAL CHIP	10K	5%	1/10W
R608	1-216-833-11	METAL CHIP	10K	5%	1/10W
R609	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R610	1-216-833-11	METAL CHIP	10K	5%	1/10W
R611	1-216-837-11	METAL CHIP	22K	5%	1/10W
R612	1-216-833-11	METAL CHIP	10K	5%	1/10W
R613	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R614	1-216-845-11	METAL CHIP	100K	5%	1/10W
R616	1-216-809-11	METAL CHIP	100	5%	1/10W
R617	1-216-833-11	METAL CHIP	10K	5%	1/10W
R630	1-216-857-11	METAL CHIP	1M	5%	1/10W
R631	1-216-837-11	METAL CHIP	22K	5%	1/10W
R632	1-216-821-11	METAL CHIP	1K	5%	1/10W
R633	1-216-833-11	METAL CHIP	10K	5%	1/10W
R635	1-216-809-11	METAL CHIP	100	5%	1/10W
R640	1-216-833-11	METAL CHIP	10K	5%	1/10W
△ R643	1-217-641-00	FUSIBLE	4.7	5%	1/4W
△ R644	1-217-641-00	FUSIBLE	4.7	5%	1/4W
R645	1-216-837-11	METAL CHIP	22K	5%	1/10W
R646	1-216-837-11	METAL CHIP	22K	5%	1/10W
R647	1-216-837-11	METAL CHIP	22K	5%	1/10W
R648	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R651	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R652	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R653	1-216-821-11	METAL CHIP	1K	5%	1/10W
R654	1-216-833-11	METAL CHIP	10K	5%	1/10W
R655	1-216-841-11	METAL CHIP	47K	5%	1/10W
R656	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R657	1-216-833-11	METAL CHIP	10K	5%	1/10W
R658	1-216-833-11	METAL CHIP	10K	5%	1/10W
R659	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R660	1-216-833-11	METAL CHIP	10K	5%	1/10W
R661	1-216-837-11	METAL CHIP	22K	5%	1/10W
R662	1-216-833-11	METAL CHIP	10K	5%	1/10W
R663	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R664	1-216-845-11	METAL CHIP	100K	5%	1/10W
R681	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R682	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R683	1-216-821-11	METAL CHIP	1K	5%	1/10W
R684	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R685	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R687	1-216-841-11	METAL CHIP	47K	5%	1/10W
R688	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R689	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R690	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R691	1-216-833-11	METAL CHIP	10K	5%	1/10W
R692	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R693	1-216-841-11	METAL CHIP	47K	5%	1/10W
R694	1-216-837-11	METAL CHIP	22K	5%	1/10W
R695	1-216-833-11	METAL CHIP	10K	5%	1/10W
< TRANSFORMER >					
T601	1-423-980-11	TRANSFORMER, BIAS OSCILLATION			

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remark
MISCELLANEOUS			

62	1-796-456-41	DECK, MECHANICAL (CMAL1Z-255A)	
67	1-773-106-11	WIRE (FLAT TYPE) (19 CORE)	
119	1-773-120-11	WIRE (FLAT TYPE) (19 CORE)	
153	1-769-912-11	WIRE (FLAT TYPE) (9 CORE)	
△ 201	1-769-079-23	CORD, POWER (KR)	
△ 201	1-769-744-81	CORD, POWER (UK)	
△ 201	1-775-790-71	CORD, POWER (AUS)	
△ 201	1-830-188-11	CORD, POWER (AEP, EE, SP)	
204	1-775-210-11	WIRE (FLAT TYPE) (23 CORE)	
206	1-777-353-11	WIRE (FLAT TYPE) (15 CORE) (AEP, UK, EE)	
206	1-824-486-11	WIRE (FLAT TYPE) (11 CORE) (SP, KR, AUS)	
207	1-693-626-11	TUNER PACK (FM/AM) (AEP, UK, EE)	
207	1-693-628-11	TUNER PACK (FM/AM) (SP, AUS)	
207	1-693-629-11	TUNER PACK (FM/AM) (KR)	
254	1-400-932-11	FILTER, CLAMP	
255	1-773-144-11	WIRE (FLAT TYPE) (21 CORE)	
462	1-452-925-21	MAGNET ASSY	
△ 556	8-820-244-01	OPTICAL PICK-UP BLOCK (KSM-215DCP/C2NP)	
559	1-827-992-11	WIRE (FLAT TYPE) (16 CORE)	
M701	X-4955-496-1	MOTOR (PULLEY) ASSY (LOADING)	
S201	1-771-853-11	SWITCH, DETECTION (LIMIT)	

ACCESSORIES

△	1-569-008-32	ADAPTOR, CONVERSION PLUG (SP)	
△	1-770-019-51	ADAPTOR, CONVERSION PLUG (UK)	