

SECTION 5 EXPLODED VIEWS


NOTE :

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.


5-1. CHASSIS

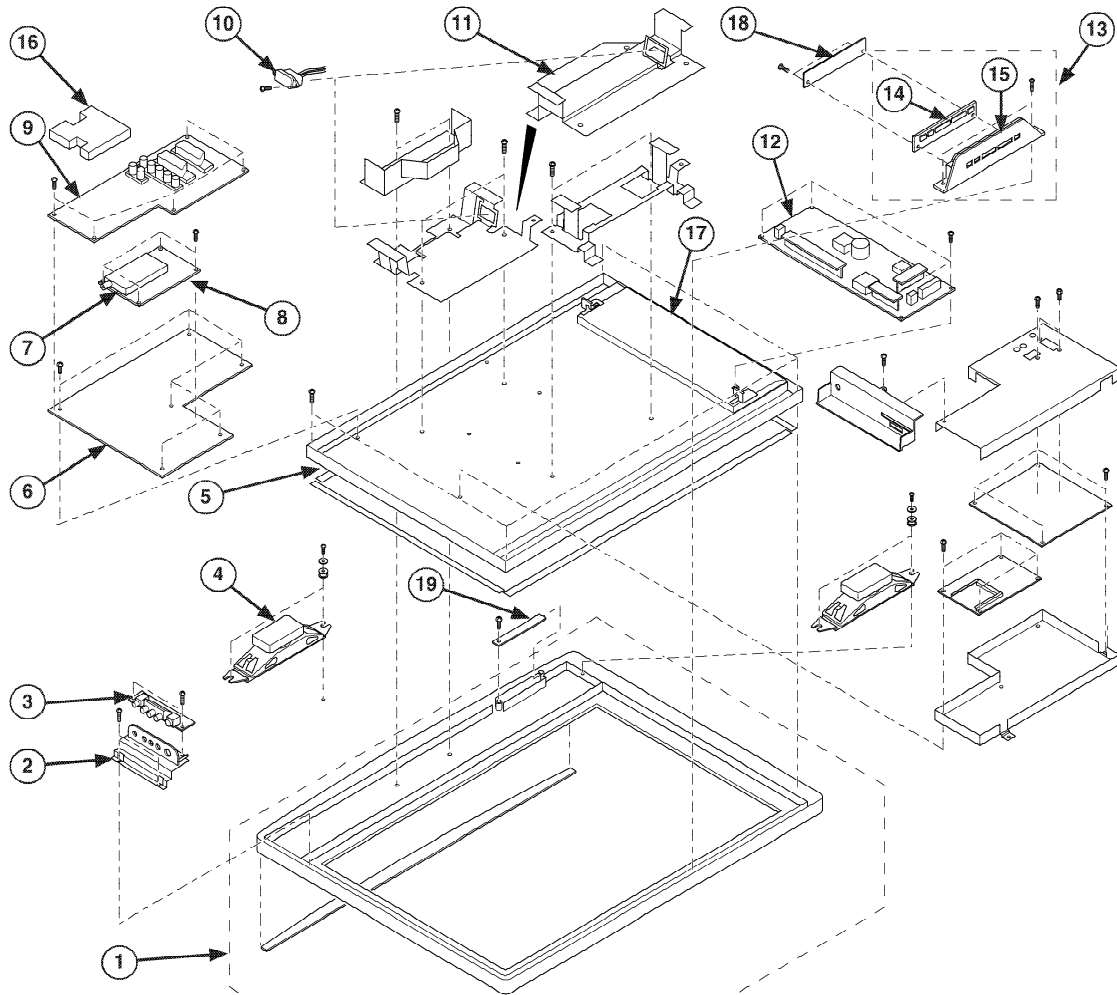

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
1	X-2148-708-2	BEZEL ASSY (32) (32S2510 UK/AEP)		6	*X-2109-046-4	BRACKET, (A,TU) (C) ASSY	
	X-2148-707-2	BEZEL ASSY (32) (32S2520 UK/AEP)		7	8-597-598-00	TUNER UNIT, DIGITAL BTD-HF441Z	
	X-2159-783-1	BEZEL ASSY (32) (32S2530 UK/AEP)		8	*A-1173-184-C	TUE BOARD COMPLETE WAX2	
	X-2109-271-5	BEZEL ASSY (40) (40S2510 UK/AEP)		9	*A-1144-539-D	AE BOARD COMPLETE	
	X-2159-784-1	BEZEL ASSY (40) (40S2530 UK/AEP)		10	Δ 1-819-729-14	INLET, AC (WITH NOISE FILTER)	
	X-2109-262-5	BEZEL ASSY (46) (46S2510 UK/AEP)		11	X-2109-168-4	BOTTOM FRAME(L) ASSY (40/46S2510/S2530 UK/AEP)	
	X-2159-785-1	BEZEL ASSY (46) (46S2530 UK/AEP)		12	*1-468-980-21	G1 BOARD COMPLETE	
2	*2-663-985-71	HOLDER, SIDE JACK (M)				(32S2510/S2520/S2530 UK/AEP)	
		(32S2510/S2520/S2530 UK/AEP)			*A-1184-357-B	G2A BOARD COMPLETE (40/46S2510/S2530 UK/AEP)	
	*2-663-986-21	HOLDER, SIDE JACK (L) (40/46S2510/S2530 UK/AEP)		13	X-2109-049-3	BUTTON,MULTI (C) ASSY	14, 15
3	*A-1152-233-D	H2E BOARD COMPLETE (KDL-32S2510/S2520/S2530/40S2510/S2530 UK/AEP)		14	2-663-977-01	BUTTON, MULTI	
	*A-1192-084-B	H46E BOARD COMPLETE (KDL-46S2510/S2530 UK/AEP)		15	2-663-978-22	COVER, BUTTON	
4	1-826-363-11	LOUDSPEAKER (4.2X15CM)		16	*2-672-470-21	SHIELD, (A,TUNER)	
		(32S2510/S2520/S2530UK/AEP)		17	*2-672-348-12	BRACKET, G1 (32S2510/S2520/S2530 UK/AEP)	
	1-826-362-11	LOUDSPEAKER (5.5X15.5CM) (40S2510/S2530 UK/AEP)			*2-664-617-11	BRACKET, G2 (40/46S2510/S2530 UK/AEP)	
	1-826-435-11	LOUDSPEAKER (13X7CM) (46S2510/S2530 UK/AEP)		18	*A-1172-590-D	H1E BOARD COMPLETE	
5	1-802-261-11	LCD PANEL (32S2510/S2520/S2530 UK/AEP)		19	*A-1172-592-D	H3E BOARD COMPLETE	
	1-802-267-11	LCD PANEL (40S2510/S2530 UK/AEP)					
	1-802-133-41	LCD PANEL (46S2510/S2530 UK/AEP)					


Note : The components identified by mark  contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.

5-1. CHASSIS Cont.

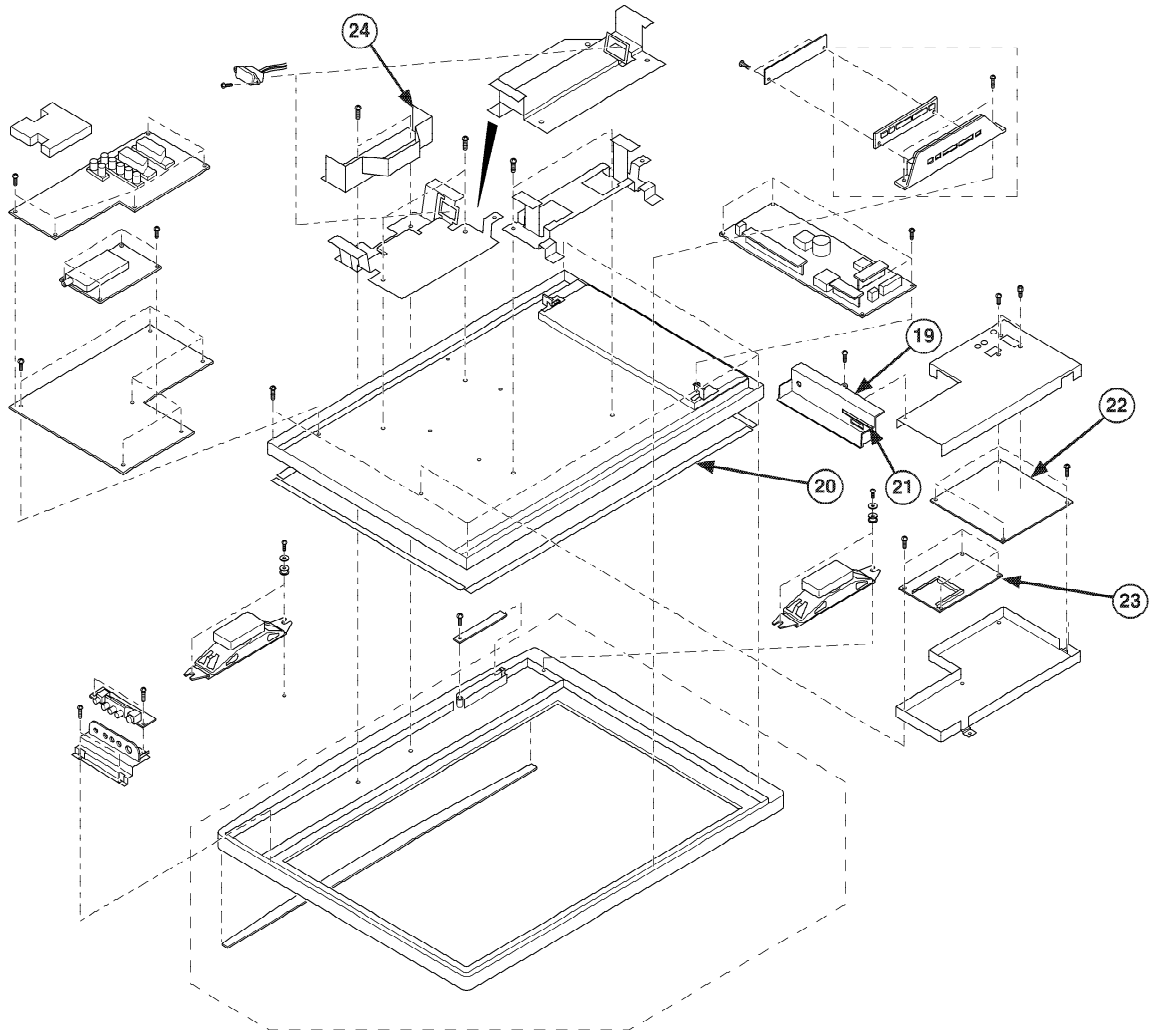

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
19	*2-696-147-01	SIDE, TERMINAL BKT (C)					
20	4-660-752-01	TAPE (LCD) (32S2510/S2520/S2530 UK/AEP)					
21	2-667-975-01	COVER, PCMCIA					
22	 *A-1214-950-C	B2H BOARD COMPLETE					
23	*A-1173-179-K	FEE BOARD COMPLETE					
24	2-660-802-11	COVER, UNDER (M) (32S2510/S2520/S2530 UK/AEP)					
	2-660-801-12	COVER, UNDER (L) (40/46S2510/S2530 UK/AEP)					

5-2. REAR COVER, STAND and VESA BRACKET

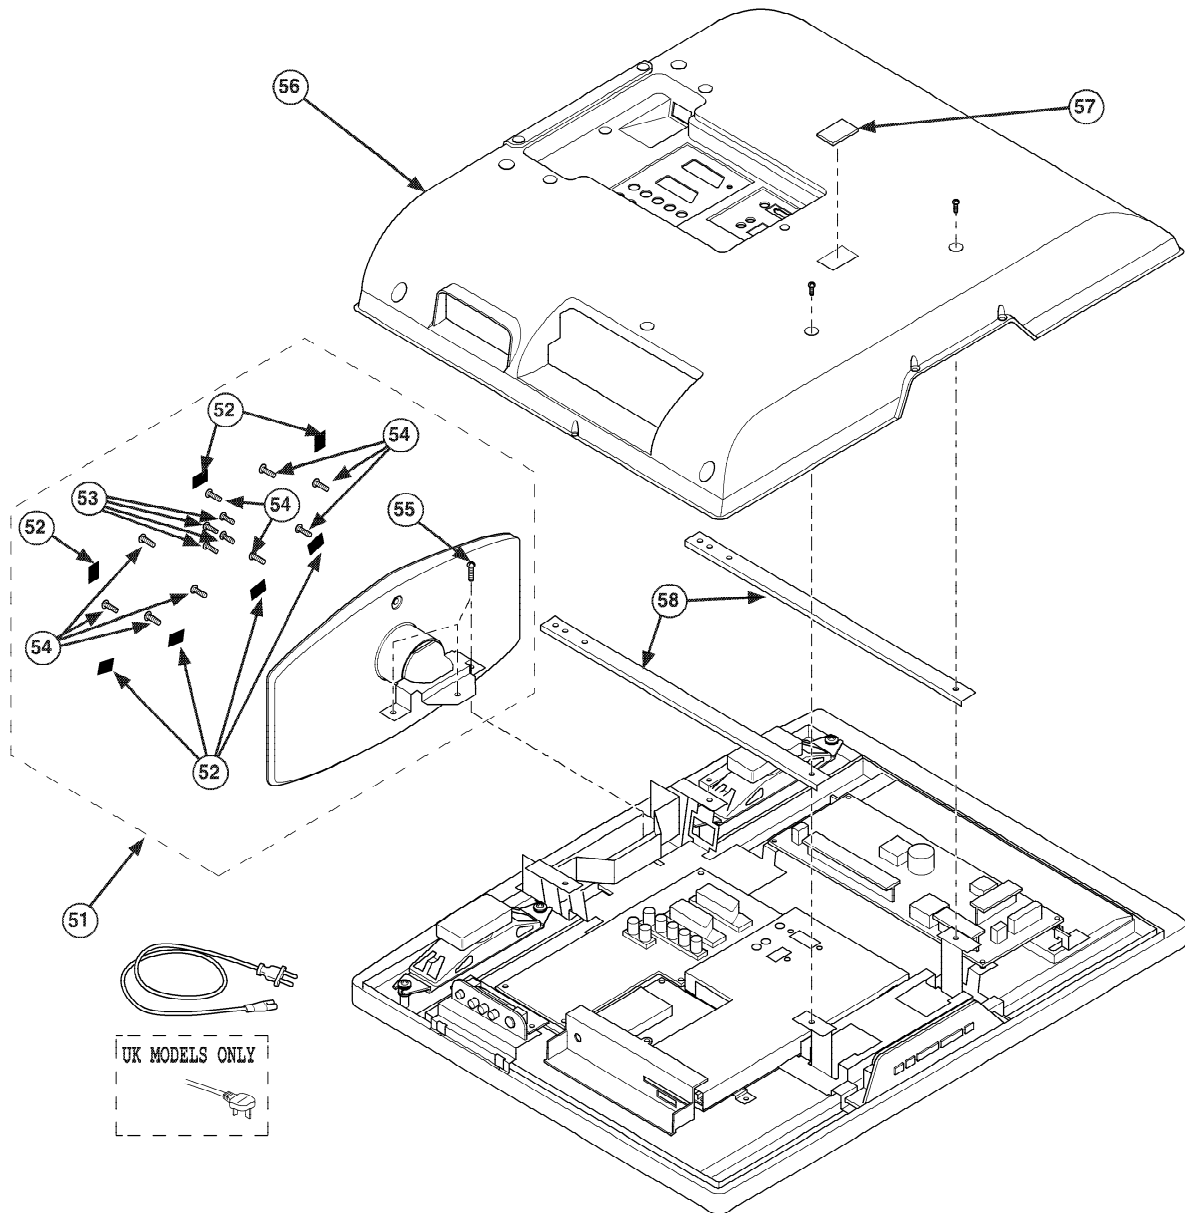


REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
51	X-2148-360-1	STAND ASSY (M) (32S2510 UK/AEP)	52-55	56	2-689-628-01	SCREW, (B) 5X30 (40/46S2510/S2530 UK/AEP)	
	X-2109-668-1	STAND ASSY (M) (32S2520 UK/AEP)	52-55		2-679-157-31	COVER, REAR (32) (32S2510/S2520/S2530 UK/AEP)	
	X-2149-692-1	STAND ASSY (M) (32S2530 UK/AEP)	52-55		2-672-439-51	COVER, REAR (40) (40S2510/S2530 UK/AEP)	
	X-2149-790-1	STAND ASSY (ML)S(40S2510 UK/AEP)	52-55		2-679-182-61	COVER, REAR (46) (46S2510/S2530 UK/AEP)	
	X-2149-932-1	STAND ASSY (ML) (40S2530 UK/AEP)	52-55	57	2-664-636-11	COVER, ECS	
	X-2109-667-3	STAND ASSY (L) (46S2510 UK/AEP)	52-55	58	X-2109-236-2	BRACKET, VESA (32) ASSY	
	X-2148-378-2	STAND ASSY (L)B(46S2530 UK/AEP)	52-55			(32S2510/S2520/S2530 UK/AEP)	
52	2-675-191-02	FOOT			X-2109-058-3	VESA BRACKET (40) L ASSY (40S2510/S2530 UK/AEP)	
53	2-580-602-01	SCREW, +PSW M4X12			X-2109-059-3	VESA BRACKET (40) R ASSY (40S2510/S2530 UK/AEP)	
	2-580-608-01	SCREW, +PSW M5X16			X-2109-250-5	ARM, VESA (46) L ASSY (46S2510/S2530 UK/AEP)	
54	2-580-644-01	SCREW, +KTP2 3X8 (32S2510/S2520/S2530 UK/AEP)			X-2109-251-5	ARM, VESA (46) R ASSY (46S2510/S2530 UK/AEP)	
	2-580-647-01	SCREW, +KTP2 4X12 (40/46S2510/S2530 UK/AEP)					
55	2-689-629-01	SCREW, (B) 4X25 (32S2510/S2520/S2530 UK/AEP)					

Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

5-2. REAR COVER, STAND and VESA BRACKET Cont.

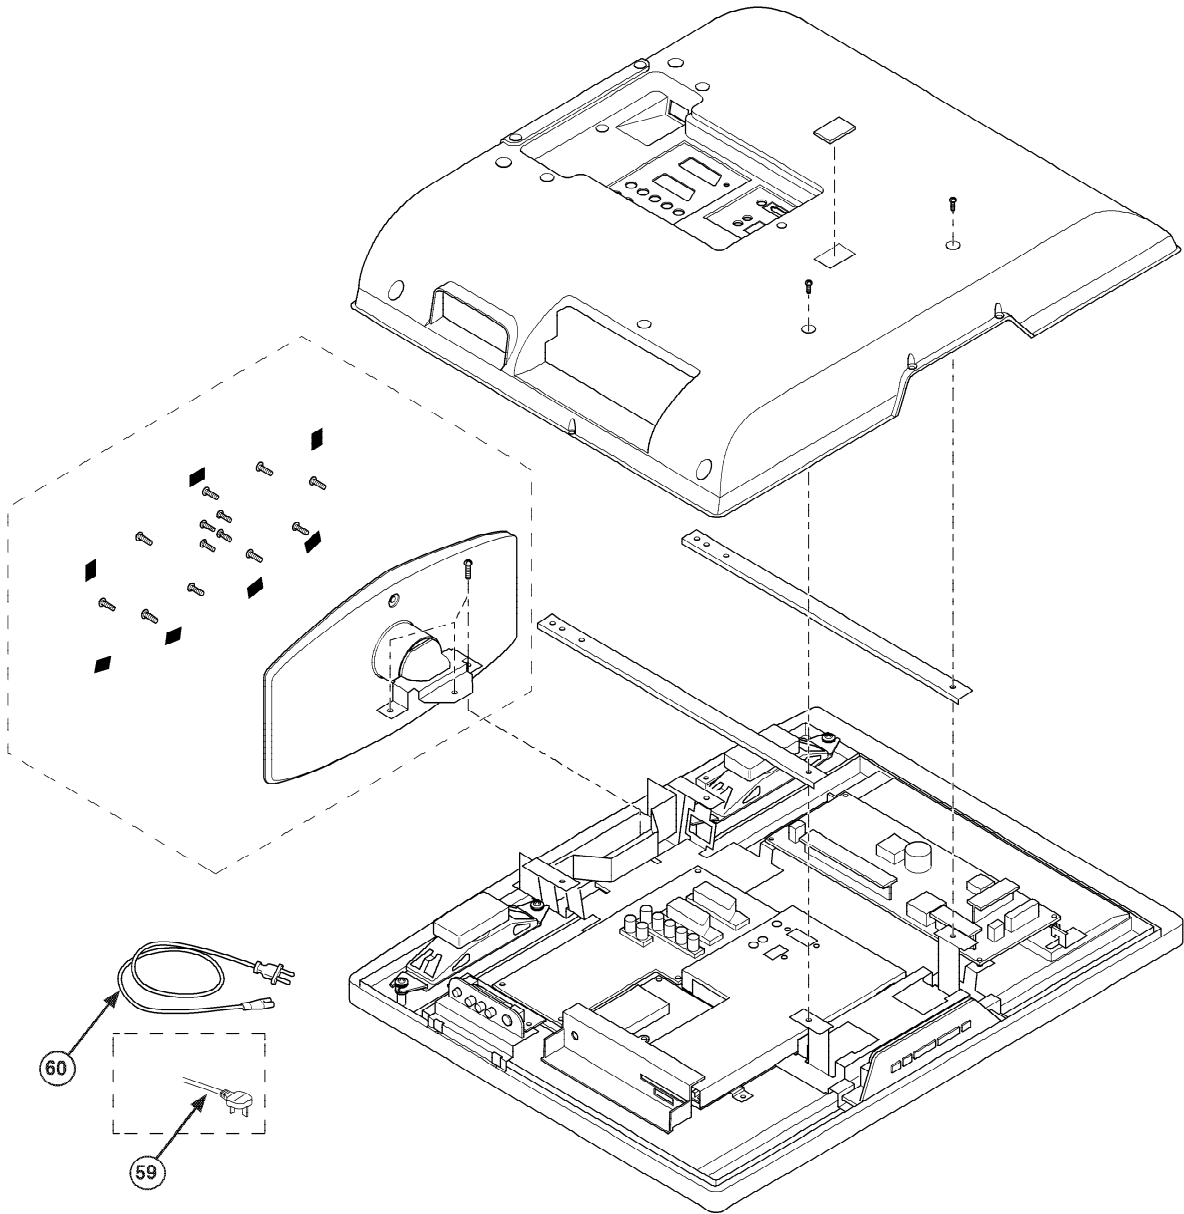

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
59	Δ 1-832-210-11	POWER-SUPPLY CORD SET (32S2510/S2520/S2530 & 40/46S2510/S2530 UK)					
60	Δ 1-832-211-11	POWER-SUPPLY CORD SET (32S2510/S2520/S2530 & 40/46S2510/S2530 AEP)					

SECTION 6 ELECTRICAL PARTS LIST

PARTS LISTING TABLE OF CONTENTS

	Page
FEE BOARD COMPLETE Parts List :	74
TUE BOARD COMPLETE Parts List :	77
H46E BOARD COMPLETE Parts List :	79
G2A BOARD COMPLETE Parts List :	80
B2H BOARD COMPLETE Parts List :	83
AE BOARD COMPLETE Parts List :	92
H1E BOARD COMPLETE Parts List :	99
H3E BOARD COMPLETE Parts List :	99
H2E BOARD COMPLETE Parts List :	100
MISCELLANEOUS :	101
ACCESSORIES AND CONNECTORS :	101
REMOTE COMMANDER :	101

Note : The G1 board (32 inch only) schematic diagram, printed wiring board and parts list are not indicated in this manual as the PWB is regarded as a non service item for exchange only.

Note : Items marked “**” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
Parts indicated (XX) on the Schematic Diagram are not used in this model and therefore do not appear in the Parts List.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
*A-1173-179-K FEE Board, Complete							
	< CAPACITOR >						
C3100	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C3208	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3101	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3209	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3102	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3210	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3103	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3211	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3104	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3212	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C3105	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3214	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3106	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3215	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3107	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3216	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3108	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3217	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3109	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3218	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3110	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3219	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3111	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3220	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3112	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3300	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3113	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3301	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3114	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3302	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3116	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C3303	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3120	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3306	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3121	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3307	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3122	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3308	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3123	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3309	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3124	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3310	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3125	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3312	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3126	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3315	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3130	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3316	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3131	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3320	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3132	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3322	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3133	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C3323	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3134	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3324	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3135	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3326	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3136	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C3328	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3137	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3402	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3138	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3403	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3139	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3404	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C3140	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C3405	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3141	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3409	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V
C3142	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3410	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3143	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3411	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V
C3144	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3412	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C3145	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3413	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3200	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3415	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3201	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3417	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3202	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3428	1-112-066-11	CERAMIC CHIP 10UF	10% 10V
C3203	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3432	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3205	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3436	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C3206	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C3439	1-165-681-21	ELECT CHIP 180UF	20% 16V
C3207	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3442	1-164-882-11	CERAMIC CHIP 220PF	5.00% 16V
				C3443	1-107-819-11	CERAMIC CHIP 0.022UF	10.00% 16V
				C3444	1-135-960-91	CERAMIC CHIP 10UF	10% 25V
				C3445	1-165-671-21	ELECT CHIP 470UF	20% 6.3V
				C3446	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3502	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	FB3300	1-469-869-21	FERRITE	OUH
C3503	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3301	1-469-869-21	FERRITE	OUH
C3505	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3402	1-400-244-11	FERRITE	OUH
C3506	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V	FB3403	1-400-834-11	FERRITE	OUH
C3605	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	FB3407	1-469-869-21	FERRITE	OUH
C3606	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	FB3408	1-400-461-21	FERRITE	OUH
C3607	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	FB3409	1-400-461-21	FERRITE	OUH
C3609	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	FB3410	1-400-461-21	FERRITE	OUH
C3610	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3411	1-400-461-21	FERRITE	OUH
C3611	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3412	1-400-834-11	FERRITE	OUH
< CONNECTOR >				FB3413	1-400-834-11	FERRITE	OUH
CN3300	*1-793-769-21	CONNECTOR, CARD (PCMCIA CARD)		FB3414	1-400-834-11	FERRITE	OUH
CN3401	*1-819-475-11	HEADER ASSEMBLY FOR PWB 7P		FB3415	1-400-834-11	FERRITE	OUH
CN3600	*1-820-235-21	HEADER ASSEMBLY 30P		FB3416	1-400-834-11	FERRITE	OUH
CN3601	1-820-209-11	MEMORY STICK CONNECTOR		FB3417	1-400-834-11	FERRITE	OUH
CN3610	1-780-336-11	EARTH TERMINAL		FB3418	1-400-834-11	FERRITE	OUH
CN3611	1-780-336-11	EARTH TERMINAL		FB3419	1-400-834-11	FERRITE	OUH
< DIODE >				FB3601	1-469-869-21	FERRITE	OUH
D3400	6-501-060-01	DIODE STPS2L25U		FB3602	1-469-869-21	FERRITE	OUH
D3401	6-500-294-01	DIODE PTZ-TE25-3.9B		FB3603	1-469-869-21	FERRITE	OUH
D3503	8-719-066-11	DIODE 1PS184-115		FB3604	1-400-834-11	FERRITE	OUH
< FERRITE BEAD >				FB3605	1-400-834-11	FERRITE	OUH
FB3103	1-400-834-11	FERRITE	OUH	FB3606	1-400-834-11	FERRITE	OUH
FB3104	1-400-834-11	FERRITE	OUH	FB3607	1-400-834-11	FERRITE	OUH
FB3105	1-400-834-11	FERRITE	OUH	FB3608	1-400-834-11	FERRITE	OUH
FB3106	1-400-834-11	FERRITE	OUH	FB3609	1-400-834-11	FERRITE	OUH
FB3107	1-400-834-11	FERRITE	OUH	FB3610	1-400-834-11	FERRITE	OUH
FB3108	1-400-834-11	FERRITE	OUH	FB3611	1-400-834-11	FERRITE	OUH
FB3109	1-400-834-11	FERRITE	OUH	FB3612	1-400-834-11	FERRITE	OUH
FB3110	1-400-834-11	FERRITE	OUH	FB3613	1-400-834-11	FERRITE	OUH
FB3111	1-400-834-11	FERRITE	OUH	FB3614	1-400-834-11	FERRITE	OUH
FB3113	1-400-834-11	FERRITE	OUH	FB3615	1-400-834-11	FERRITE	OUH
FB3114	1-469-869-21	FERRITE	OUH	FB3616	1-400-834-11	FERRITE	OUH
FB3115	1-400-244-11	FERRITE	OUH	FB3617	1-400-834-11	FERRITE	OUH
FB3116	1-400-244-11	FERRITE	OUH	FB3618	1-400-834-11	FERRITE	OUH
FB3117	1-469-869-21	FERRITE	OUH	FB3619	1-400-834-11	FERRITE	OUH
FB3118	1-469-869-21	FERRITE	OUH	FB3620	1-400-834-11	FERRITE	OUH
FB3119	1-400-807-21	FERRITE	OUH	< IC >			
FB3120	1-400-807-21	FERRITE	OUH	IC3100	6-709-214-01	IC UPD61123F1-100-KA3-A	
FB3121	1-400-807-21	FERRITE	OUH	IC3200	6-707-809-01	IC EDD1216AATA-6B-E	
FB3122	1-400-807-21	FERRITE	OUH	IC3201	6-708-916-01	IC ICS7150MLFT	
FB3123	1-400-807-21	FERRITE	OUH	IC3206	6-705-336-01	IC K9F2808U0C-PCB0T	
FB3125	1-469-869-21	FERRITE	OUH	IC3301	6-707-853-01	IC TC74LCX541FT(EKJ)	
FB3126	1-400-244-11	FERRITE	OUH	IC3302	6-707-853-01	IC TC74LCX541FT(EKJ)	
FB3127	1-400-244-11	FERRITE	OUH	IC3304	6-707-853-01	IC TC74LCX541FT(EKJ)	
FB3200	1-400-244-11	FERRITE	OUH	IC3305	6-707-853-01	IC TC74LCX541FT(EKJ)	
FB3201	1-400-244-11	FERRITE	OUH	IC3306	6-707-853-01	IC TC74LCX541FT(EKJ)	
				IC3308	6-707-853-01	IC TC74LCX541FT(EKJ)	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
IC3311	6-707-850-01	IC TC74LCX245FT(EKJ)		R3142	1-218-937-11	RES-CHIP	47 5% 1/16W
IC3312	6-707-853-01	IC TC74LCX541FT(EKJ)		R3143	1-218-937-11	RES-CHIP	47 5% 1/16W
IC3316	6-708-132-01	IC 74LVC14APW		R3144	1-218-937-11	RES-CHIP	47 5% 1/16W
IC3317	6-706-482-01	IC TC7SH00FU(T5RSOYJF)		R3146	1-218-965-11	RES-CHIP	10K 5% 1/16W
IC3402	6-705-790-01	IC LM3525MX-H/J5000395		R3147	1-218-965-11	RES-CHIP	10K 5% 1/16W
IC3404	6-706-106-01	IC NCP1117STAT3		R3148	1-218-965-11	RES-CHIP	10K 5% 1/16W
IC3405	6-708-603-01	IC PQ070XNA1ZPH		R3149	1-218-990-81	SHORT CHIP	0
IC3406	6-707-078-01	IC L5973ADTR		R3150	1-218-965-11	RES-CHIP	10K 5% 1/16W
IC3501	6-703-175-01	IC PST3629UL		R3151	1-218-965-11	RES-CHIP	10K 5% 1/16W
		< COIL >		R3200	1-218-941-11	RES-CHIP	100 5% 1/16W
L3100	1-414-398-11	INDUCTOR	10UH	R3201	1-218-941-11	RES-CHIP	100 5% 1/16W
L3400	1-419-353-21	INDUCTOR	10UH	R3202	1-218-939-11	RES-CHIP	68 5% 1/16W
L3401	*1-424-924-21	COIL, POWER		R3203	1-218-941-81	RES-CHIP	100 5% 1/16W
		< TRANSISTOR >		R3204	1-218-941-81	RES-CHIP	100 5% 1/16W
Q3409	8-729-010-05	TRANSISTOR MSB709-RT1		R3205	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3501	8-729-027-43	TRANSISTOR DTC114EKA-T146		R3207	1-218-953-11	RES-CHIP	1K 5% 1/16W
Q3502	8-729-027-43	TRANSISTOR DTC114EKA-T146		R3209	1-218-953-11	RES-CHIP	1K 5% 1/16W
		< RESISTOR >		R3210	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3100	1-218-965-11	RES-CHIP	10K 5% 1/16W	R3212	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3101	1-218-941-81	RES-CHIP	100 5% 1/16W	R3214	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3102	1-218-941-81	RES-CHIP	100 5% 1/16W	R3217	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3103	1-218-941-81	RES-CHIP	100 5% 1/16W	R3218	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3104	1-218-941-81	RES-CHIP	100 5% 1/16W	R3220	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3105	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R3222	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3106	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R3224	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3109	1-218-941-81	RES-CHIP	100 5% 1/16W	R3226	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3110	1-218-941-81	RES-CHIP	100 5% 1/16W	R3229	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3111	1-218-941-81	RES-CHIP	100 5% 1/16W	R3230	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3112	1-218-941-81	RES-CHIP	100 5% 1/16W	R3233	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3113	1-218-965-11	RES-CHIP	10K 5% 1/16W	R3235	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3114	1-218-965-11	RES-CHIP	10K 5% 1/16W	R3237	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R3115	1-218-965-11	RES-CHIP	10K 5% 1/16W	R3238	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3117	1-218-965-11	RES-CHIP	10K 5% 1/16W	R3239	1-218-965-11	RES-CHIP	10K 5% 1/16W
R3119	1-218-990-81	SHORT CHIP	0	R3240	1-218-939-11	RES-CHIP	68 5% 1/16W
R3120	1-218-990-81	SHORT CHIP	0	R3241	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3125	1-218-937-11	RES-CHIP	47 5% 1/16W	R3242	1-218-941-81	RES-CHIP	100 5% 1/16W
R3126	1-218-990-81	SHORT CHIP	0	R3244	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3127	1-220-174-11	RES-CHIP	200 5% 1/16W	R3247	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3128	1-220-174-11	RES-CHIP	200 5% 1/16W	R3249	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3129	1-220-174-11	RES-CHIP	200 5% 1/16W	R3250	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3130	1-220-174-11	RES-CHIP	200 5% 1/16W	R3251	1-218-949-11	RES-CHIP	470 5% 1/16W
R3131	1-220-174-11	RES-CHIP	200 5% 1/16W	R3254	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3132	1-220-174-11	RES-CHIP	200 5% 1/16W	R3255	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3133	1-208-671-11	METAL CHIP	330 0.5% 1/16W	R3258	1-218-941-81	RES-CHIP	100 5% 1/16W
R3134	1-208-679-11	METAL CHIP	680 0.5% 1/16W	R3259	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3136	1-208-675-11	METAL CHIP	470 0.5% 1/16W	R3263	1-218-965-11	RES-CHIP	10K 5% 1/16W
R3138	1-218-990-81	SHORT CHIP	0	R3264	1-218-949-11	RES-CHIP	470 5% 1/16W
				R3265	1-218-949-11	RES-CHIP	470 5% 1/16W
				R3300	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R3301	1-218-965-11	RES-CHIP	10K 5% 1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3302	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3609	1-218-941-81	RES-CHIP	100	5%	1/16W
R3303	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3610	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3308	1-218-941-81	RES-CHIP	100	5%	1/16W	R3611	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3310	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3612	1-218-990-81	SHORT CHIP	0		
R3311	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3613	1-218-990-81	SHORT CHIP	0		
						R3616	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3312	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3617	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3313	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3623	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3314	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3628	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3317	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3646	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3321	1-218-941-81	RES-CHIP	100	5%	1/16W						
						R3647	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3324	1-218-941-81	RES-CHIP	100	5%	1/16W	R3648	1-218-941-81	RES-CHIP	100	5%	1/16W
R3329	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3649	1-218-941-81	RES-CHIP	100	5%	1/16W
R3330	1-218-939-11	RES-CHIP	68	5%	1/16W	R3650	1-218-941-81	RES-CHIP	100	5%	1/16W
R3331	1-218-939-11	RES-CHIP	68	5%	1/16W	R3651	1-218-941-81	RES-CHIP	100	5%	1/16W
R3332	1-218-939-11	RES-CHIP	68	5%	1/16W						
R3333	1-218-939-11	RES-CHIP	68	5%	1/16W	R3652	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3334	1-218-939-11	RES-CHIP	68	5%	1/16W	R3653	1-218-943-11	RES-CHIP	150	5%	1/16W
R3335	1-218-939-11	RES-CHIP	68	5%	1/16W	R3654	1-218-943-11	RES-CHIP	150	5%	1/16W
R3400	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3655	1-218-943-11	RES-CHIP	150	5%	1/16W
R3401	1-208-683-11	METAL CHIP	1K	0.5%	1/16W						
						< RESISTOR CHIP >					
R3406	1-218-935-11	RES-CHIP	33	5%	1/16W	RB3200	1-234-372-11	RES, NETWORK	100		(1005X4)
R3407	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	RB3201	1-234-372-11	RES, NETWORK	100		(1005X4)
R3418	1-218-965-11	RES-CHIP	10K	5%	1/16W	RB3202	1-234-372-11	RES, NETWORK	100		(1005X4)
R3419	1-218-965-11	RES-CHIP	10K	5%	1/16W	RB3203	1-234-702-11	RES, NETWORK	68		(1005X4)
R3425	1-220-174-11	RES-CHIP	200	5%	1/16W	RB3204	1-234-702-11	RES, NETWORK	68		(1005X4)
R3426	1-208-683-11	METAL CHIP	1K	0.5%	1/16W						
R3430	1-218-953-11	RES-CHIP	1K	5%	1/16W	RB3206	1-234-372-11	RES, NETWORK	100		(1005X4)
R3432	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	RB3207	1-234-372-11	RES, NETWORK	100		(1005X4)
R3433	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W	RB3208	1-234-702-11	RES, NETWORK	68		(1005X4)
R3434	1-208-702-11	METAL CHIP	6.2K	0.5%	1/16W	RB3209	1-234-702-11	RES, NETWORK	68		(1005X4)
						< CRYSTAL >					
R3435	1-208-703-11	METAL CHIP	6.8K	0.5%	1/16W	X3200	1-813-055-11	QUARTZ CRYSTAL UNIT			
R3436	1-218-937-11	RES-CHIP	47	5%	1/16W						
R3437	1-218-990-81	SHORT CHIP	0								
R3473	1-218-945-11	RES-CHIP	220	5%	1/16W						
R3504	1-218-965-11	RES-CHIP	10K	5%	1/16W						
R3508	1-218-965-11	RES-CHIP	10K	5%	1/16W	< CAPACITOR >					
R3511	1-218-965-11	RES-CHIP	10K	5%	1/16W	C3803	1-100-566-91	CERAMIC CHIP	0.1UF	10.00%	25V
R3513	1-218-965-11	RES-CHIP	10K	5%	1/16W	C3814	1-100-907-11	CERAMIC CHIP	0.1UF	10%	10V
R3514	1-218-941-81	RES-CHIP	100	5%	1/16W	C3815	1-117-681-11	ELECT CHIP	100UF	20.00%	16V
R3515	1-218-953-11	RES-CHIP	1K	5%	1/16W	C3819	1-100-907-11	CERAMIC CHIP	0.1UF	10%	10V
						C3821	1-117-681-11	ELECT CHIP	100UF	20.00%	16V
R3518	1-218-965-11	RES-CHIP	10K	5%	1/16W						
R3519	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	C3834	1-165-908-11	CERAMIC CHIP	1UF	10%	10V
R3520	1-218-965-11	RES-CHIP	10K	5%	1/16W	C3900	1-100-611-91	CERAMIC CHIP	22UF	20%	6.3V
R3522	1-218-941-81	RES-CHIP	100	5%	1/16W	C3901	1-164-943-81	CERAMIC CHIP	0.01UF	10.00%	16V
R3554	1-218-965-11	RES-CHIP	10K	5%	1/16W	C3902	1-164-947-11	CERAMIC CHIP	0.01UF		50V
						C3903	1-100-907-11	CERAMIC CHIP	0.1UF	10%	10V
R3600	1-218-965-11	RES-CHIP	10K	5%	1/16W						
R3601	1-218-953-11	RES-CHIP	1K	5%	1/16W	C3904	1-100-907-11	CERAMIC CHIP	0.1UF	10%	10V
R3602	1-218-941-81	RES-CHIP	100	5%	1/16W	C3906	1-164-947-11	CERAMIC CHIP	0.01UF		50V
R3603	1-218-941-81	RES-CHIP	100	5%	1/16W	C3907	1-135-366-11	ELECT CHIP	100UF	20%	16V
R3604	1-218-961-11	RES-CHIP	4.7K	5%	1/16W						

***A-1173-184-C TUE Board, Complete WAX2**

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3909	1-128-991-21	ELECT CHIP 10UF	20% 50V			< FILTER >	
C3910	1-126-204-11	ELECT CHIP 47UF	20.00% 16V				
C3911	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FL3800	1-239-899-21	FERRITE	0UH
C3914	1-164-947-11	CERAMIC CHIP 0.01UF	50V			< IC >	
C3917	1-117-681-11	ELECT CHIP 100UF	20.00% 16V				
C3918	1-135-595-11	ELECT 100UF	20% 6.3V	IC3802	6-706-106-01	IC NCP1117STAT3	
C3919	1-135-595-11	ELECT 100UF	20% 6.3V	IC3900	6-709-257-01	IC 74LVC4066PW	
C3920	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V			< COIL >	
C3921	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V				
C3923	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	L3804	1-400-175-21	INDUCTOR	47UH
C3924	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	L3805	1-410-993-42	INDUCTOR	1UH
C3926	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	L3900	1-412-006-31	INDUCTOR	10UH
C3927	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	L3902	*1-424-924-21	COIL, POWER	
C3929	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	L3903	1-410-993-42	INDUCTOR	1UH
C3930	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	L3904	1-412-989-11	INDUCTOR	6.8UH
C3931	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V			< TRANSISTOR >	
C3932	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V				
C3933	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	Q3900	8-729-027-43	TRANSISTOR DTC114EKA-T146	
C3935	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	Q3901	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R	
C3937	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	Q3902	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R	
C3941	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V	Q3903	6-550-871-01	TRANSISTOR 2SA2048TL QR	
C3942	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V	Q3904	6-550-871-01	TRANSISTOR 2SA2048TL QR	
C3945	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V				
C3946	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V	Q3905	6-550-871-01	TRANSISTOR 2SA2048TL QR	
C3947	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V	Q3906	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R	
C3948	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V	Q3907	6-550-232-01	TRANSISTOR 2SA2029T2LQ/R	
C3950	1-100-611-91	CERAMIC CHIP 22UF	20% 6.3V			< RESISTOR >	
C3951	1-128-405-11	ELECT CHIP 22UF	20% 50V	R3810	1-208-683-11	METAL CHIP 1K	0.5% 1/16W
C3952	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	R3812	1-218-948-11	RES-CHIP 390	5% 1/16W
C3953	1-100-053-21	ELECT CHIP 220UF	20% 6.3V	R3813	1-218-937-11	RES-CHIP 47	5% 1/16W
C3954	1-164-866-11	CERAMIC CHIP 47PF	5.00% 50V	R3900	1-216-295-91	SHORT CHIP	0
C3955	1-164-936-11	CERAMIC CHIP 680PF	10.00% 50V	R3901	1-218-990-81	SHORT CHIP	0
C3956	1-164-936-11	CERAMIC CHIP 680PF	10.00% 50V	R3902	1-218-938-11	RES-CHIP 56	5% 1/16W
< CONNECTOR >				R3903	1-218-953-11	RES-CHIP 1K	5% 1/16W
CN3802	1-819-339-11	HEADER ASSEMBLY FOR PWB 12P		R3904	1-218-937-11	RES-CHIP 47	5% 1/16W
CN3900	1-695-915-11	TAB (CONTACT)		R3906	1-216-821-11	METAL CHIP 1K	5% 1/10W
CN3901	*1-820-235-21	HEADER ASSEMBLY 30P		R3907	1-218-973-11	RES-CHIP 47K	5% 1/16W
CN3903	1-819-337-11	HEADER ASSEMBLY FOR PWB 10P		R3908	1-218-937-11	RES-CHIP 47	5% 1/16W
CN3904	*1-819-474-11	HEADER ASSEMBLY FOR PWB 6P		R3909	1-218-965-11	RES-CHIP 10K	5% 1/16W
CN3907	1-780-336-11	EARTH TERMINAL		R3911	1-218-990-81	SHORT CHIP	0
< DIODE >				R3913	1-218-965-11	RES-CHIP 10K	5% 1/16W
D3900	8-719-083-87	DIODE UDZS-TE17-33B		R3918	1-218-941-81	RES-CHIP 100	5% 1/16W
< FERRITE BEAD >				R3919	1-218-941-81	RES-CHIP 100	5% 1/16W
FB3901	1-469-869-21	FERRITE 0UH		R3921	1-218-941-81	RES-CHIP 100	5% 1/16W
FB3902	1-469-869-21	FERRITE 0UH		R3922	1-218-941-81	RES-CHIP 100	5% 1/16W
FB3903	1-469-869-21	FERRITE 0UH		R3924	1-218-933-11	RES-CHIP 22	5% 1/16W
FB3909	1-469-869-21	FERRITE 0UH		R3925	1-218-933-11	RES-CHIP 22	5% 1/16W
				R3926	1-218-941-81	RES-CHIP 100	5% 1/16W
				R3927	1-218-965-11	RES-CHIP 10K	5% 1/16W
				R3929	1-218-990-81	SHORT CHIP	0

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3930	1-218-990-81	SHORT CHIP	0			C205	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%	10V	
R3938	1-218-941-81	RES-CHIP	100	5%	1/16W	C206	1-125-889-91	CERAMIC CHIP 2.2UF	10%	10V	
R3943	1-218-949-11	RES-CHIP	470	5%	1/16W	C207	1-125-889-91	CERAMIC CHIP 2.2UF	10%	10V	
R3945	1-218-953-11	RES-CHIP	1K	5%	1/16W	C208	1-125-889-91	CERAMIC CHIP 2.2UF	10%	10V	
R3946	1-218-949-11	RES-CHIP	470	5%	1/16W	C209	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
R3947	1-218-929-11	RES-CHIP	10	5%	1/16W	C210	1-164-227-11	CERAMIC CHIP 0.022UF	10.00%	25V	
R3948	1-218-929-11	RES-CHIP	10	5%	1/16W	C211	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
R3950	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	C212	1-164-227-11	CERAMIC CHIP 0.022UF	10.00%	25V	
R3951	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	C215	1-115-416-11	CERAMIC CHIP 0.001UF	5.00%	25V	
R3952	1-218-937-11	RES-CHIP	47	5%	1/16W	< CONNECTOR >					
R3953	1-218-941-81	RES-CHIP	100	5%	1/16W	CN201	1-820-192-11	HEADER ASSEMBLY (PRINT PWB)15P			
R3958	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	< DIODE >					
R3959	1-218-953-11	RES-CHIP	1K	5%	1/16W	D201	8-719-070-63	DIODE PDZ10B-115			
R3960	1-218-953-11	RES-CHIP	1K	5%	1/16W	D202	8-719-070-63	DIODE PDZ10B-115			
R3961	1-218-965-11	RES-CHIP	10K	5%	1/16W	D203	8-719-070-63	DIODE PDZ10B-115			
R3962	1-218-969-11	RES-CHIP	22K	5%	1/16W	D204	8-719-070-63	DIODE PDZ10B-115			
R3967	1-218-941-81	RES-CHIP	100	5%	1/16W	D205	8-719-070-63	DIODE PDZ10B-115			
R3970	1-218-953-11	RES-CHIP	1K	5%	1/16W	D206	8-719-070-63	DIODE PDZ10B-115			
R3971	1-218-969-11	RES-CHIP	22K	5%	1/16W	< SOCKET >					
R3973	1-218-990-81	SHORT CHIP	0			J201	1-780-368-11	S TERMINAL BLOCK (RIGHT ANGLE)			
R3974	1-218-990-81	SHORT CHIP	0			J202	1-815-325-11	JACK			
R3980	1-218-941-81	RES-CHIP	100	5%	1/16W	< RESISTOR >					
R3981	1-218-933-11	RES-CHIP	22	5%	1/16W	R201	1-216-864-11	SHORT CHIP	0		
R3982	1-218-953-11	RES-CHIP	1K	5%	1/16W	R202	1-216-864-11	SHORT CHIP	0		
R3983	1-218-990-81	SHORT CHIP	0			R205	1-216-821-11	METAL CHIP	1K	5% 1/10W	
R3984	1-218-990-81	SHORT CHIP	0			R206	1-216-821-11	METAL CHIP	1K	5% 1/10W	
R3985	1-218-990-81	SHORT CHIP	0			R207	1-218-831-11	METAL CHIP	220	0.5% 1/10W	
R3986	1-218-990-81	SHORT CHIP	0			R208	1-218-831-11	METAL CHIP	220	0.5% 1/10W	
R3987	1-218-990-81	SHORT CHIP	0			R209	1-218-285-11	METAL CHIP	75	5% 1/10W	
R3988	1-218-990-81	SHORT CHIP	0			R210	1-218-831-11	METAL CHIP	220	0.5% 1/10W	
R3989	1-218-990-81	SHORT CHIP	0			R211	1-218-831-11	METAL CHIP	220	0.5% 1/10W	
R3996	1-218-990-81	SHORT CHIP	0			R212	1-216-797-11	METAL CHIP	10	5% 1/10W	
R3997	1-218-933-11	RES-CHIP	22	5%	1/16W	R213	1-216-821-11	METAL CHIP	1K	5% 1/10W	
R3998	1-218-933-11	RES-CHIP	22	5%	1/16W	R214	1-216-821-11	METAL CHIP	1K	5% 1/10W	
< RESISTOR CHIP >						R215	1-216-809-11	METAL CHIP	100	5% 1/10W	
RB3900	1-234-371-21	RES, NETWORK	47		(1005X4)	R216	1-216-809-11	METAL CHIP	100	5% 1/10W	
RB3901	1-234-371-21	RES, NETWORK	47		(1005X4)	R217	1-216-821-11	METAL CHIP	1K	5% 1/10W	
RB3902	1-234-371-21	RES, NETWORK	47		(1005X4)	R218	1-216-821-11	METAL CHIP	1K	5% 1/10W	
< TUNER >						R219	1-216-809-11	METAL CHIP	100	5% 1/10W	
TU3901	8-597-598-00	TUNER UNIT, DIGITAL BTD-HF441Z				R220	1-216-797-11	METAL CHIP	10	5% 1/10W	
*A-1192-084-B H46E Board, Complete (46 inch only)											
< CAPACITOR >						R222	1-216-853-11	METAL CHIP	470K	5% 1/10W	
C201	1-162-964-11	CERAMIC CHIP	0.001UF		10.00% 50V	R223	1-216-853-11	METAL CHIP	470K	5% 1/10W	
C202	1-162-964-11	CERAMIC CHIP	0.001UF		10.00% 50V	R224	1-218-831-11	METAL CHIP	220	0.5% 1/10W	
C203	1-127-573-11	CERAMIC CHIP	1UF		10% 16V	R225	1-218-831-11	METAL CHIP	220	0.5% 1/10W	
C204	1-127-573-11	CERAMIC CHIP	1UF		10% 16V	R226	1-216-864-11	SHORT CHIP	0		

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

H46E

G2A

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< VARISTOR >							
VD201	1-802-082-11	VARISTOR (SMD)		C6316	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
VD202	1-802-082-11	VARISTOR (SMD)		C6401	1-107-882-91	ELECT 100UF	20% 16V
VD203	1-802-082-11	VARISTOR (SMD)		C6402	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
				C6404	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
				C6405	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
				C6406	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
				C6407	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
				C6408	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
				C6409	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
				C6412	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
				C6413	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
				C6451	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
				C6454	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
				C6504	1-162-134-11	CERAMIC 470PF	10.00% 2KV
				C6505	1-162-134-11	CERAMIC 470PF	10.00% 2KV
				C6507	1-107-888-11	ELECT 47UF	20% 25V
				C6517	1-117-227-11	MYLAR 1UF	10.00% 450V
				C6518	1-112-744-52	MYLAR 1UF	10% 450V
				C6519	1-162-969-11	CERAMIC CHIP 0.0068UF	10.00% 25V
				C6520	1-117-227-11	MYLAR 1UF	10.00% 450V
				C6521	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V
				C6522	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
				C6523	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
				C6525	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
				C6526	1-107-906-11	ELECT 10UF	20% 50V
				< CONNECTOR >			
				CN6000	1-695-915-11	TAB (CONTACT)	
				CN6001 Δ	*1-793-660-11	PIN, CONNECTOR (PC BOARD) 3P	
				CN6011	1-537-770-21	TERMINAL BOARD, GROUND	
				CN6200	*1-793-236-11	PIN, CONNECTOR (PC BOARD) 14P	
				CN6202	*1-785-708-11	PIN, CONNECTOR (PC BOARD) 12P	
				CN6204	*1-785-706-11	PIN, CONNECTOR (PC BOARD) 10P	
				CN6206	1-695-915-11	TAB (CONTACT)	
				CN6207	1-695-915-11	TAB (CONTACT)	
				CN6211	1-537-770-21	TERMINAL BOARD, GROUND	
				CN6214	1-537-770-21	TERMINAL BOARD, GROUND	
				CN6216	1-537-770-21	TERMINAL BOARD, GROUND	
				CN6217	*1-785-701-11	PIN, CONNECTOR (PC BOARD) 3P	
				< DIODE >			
				D6000	8-719-054-89	DIODE D15XB60	
				D6002	8-719-404-50	DIODE MA111-TX	
				D6003	8-719-404-50	DIODE MA111-TX	
				D6102	6-500-137-01	DIODE BAT54HT1	
				D6103	8-719-979-64	DIODE UF4005/23	
				D6104	6-501-043-01	DIODE UMZ16NT106	
				D6105	6-501-043-01	DIODE UMZ16NT106	
				D6106	8-719-081-67	DIODE M1FM3	
				D6107	8-719-081-67	DIODE M1FM3	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2A

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D6108	8-719-041-97	DIODE MA113-(TX)		IC6402	6-709-368-01	IC MM1431ATT (CN)	
D6109	8-719-022-90	DIODE MA8160-M		IC6502	6-709-192-01	IC FA5501AN-D1-TE1	
D6200	8-719-057-96	DIODE D10SC6M-4012		< COIL >			
D6201	8-719-057-96	DIODE D10SC6M-4012		L6000	Δ 1-456-856-21	LINE FILTER COIL	
D6202	8-719-057-96	DIODE D10SC6M-4012		L6203	1-414-487-41	INDUCTOR	1UH
D6203	8-719-057-96	DIODE D10SC6M-4012		L6204	1-414-487-41	INDUCTOR	1UH
D6204	6-500-567-31	DIODE 10ERB20-TB3		L6207	1-457-239-11	INDUCTOR	4.7UH
D6205	6-500-567-31	DIODE 10ERB20-TB3		L6208	1-457-239-11	INDUCTOR	4.7UH
D6207	8-719-057-96	DIODE D10SC6M-4012		L6300	1-414-183-41	INDUCTOR	10UH
D6208	8-719-057-96	DIODE D10SC6M-4012		L6500	1-457-218-11	INDUCTOR	100UH
D6302	6-500-567-31	DIODE 10ERB20-TB3		L6502	1-457-141-21	INDUCTOR	175UH
D6303	6-500-567-31	DIODE 10ERB20-TB3		< PHOTOCOUPLER >			
D6304	6-500-849-01	DIODE ERA22-08KFLB		PH6000	Δ 6-600-187-01	PHOTO COUPLER	PC123Y22JOOF
D6305	6-500-567-31	DIODE 10ERB20-TB3		PH6100	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF
D6306	8-719-510-02	DIODE D1NS4		PH6301	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF
D6401	8-719-404-50	DIODE MA111-TX		PH6400	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF
D6402	8-719-404-50	DIODE MA111-TX		PH6401	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF
D6406	8-719-404-50	DIODE MA111-TX		PH6402	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF
D6407	8-719-018-01	DIODE MA8220-TX		< TRANSISTOR >			
D6408	8-719-404-50	DIODE MA111-TX		Q6051	8-729-045-62	TRANSISTOR 2SK2158-T2B	
D6452	8-719-404-50	DIODE MA111-TX		Q6100	6-551-297-01	TRANSISTOR 2SK3568 (LBS1SONY.Q)	
D6456	8-719-404-50	DIODE MA111-TX		Q6101	6-551-297-01	TRANSISTOR 2SK3568 (LBS1SONY.Q)	
D6504	8-719-404-50	DIODE MA111-TX		Q6400	8-729-804-41	TRANSISTOR 2SB1122-S	
D6505	8-719-421-82	DIODE MA8043-M		Q6401	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6506	8-719-054-59	DIODE FSF05A60		Q6402	8-729-045-62	TRANSISTOR 2SK2158-T2B	
D6507	8-719-404-50	DIODE MA111-TX		Q6403	8-729-600-22	TRANSISTOR 2SA1235-F	
D6508	6-500-108-01	DIODE EP05FA20		Q6404	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6509	6-500-108-01	DIODE EP05FA20		Q6405	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6510	6-500-137-01	DIODE BAT54HT1		Q6406	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6511	8-719-404-50	DIODE MA111-TX		Q6408	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6512	8-719-404-50	DIODE MA111-TX		Q6409	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6551	8-719-404-50	DIODE MA111-TX		Q6454	8-729-600-22	TRANSISTOR 2SA1235-F	
D6552	8-719-404-50	DIODE MA111-TX		Q6455	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6553	8-719-404-50	DIODE MA111-TX		Q6500	6-551-403-01	TRANSISTOR 2SK3797 (LBS1SONY)	
< FUSE >				Q6501	8-729-820-90	TRANSISTOR 2SD1621-ST	
F6000	Δ 1-576-233-51	FUSE	6.3A 250V	Q6502	8-729-804-41	TRANSISTOR 2SB1122-S	
FH6000	Δ 1-533-223-11	FUSE HOLDER		Q6504	6-551-403-01	TRANSISTOR 2SK3797 (LBS1SONY)	
FH6001	Δ 1-533-223-11	FUSE HOLDER		< RESISTOR >			
< FERRITE BEAD >				R6002	Δ 1-240-251-11	METAL	6.8 5% 10W
FB6100	1-412-911-11	FERRITE	0UH	R6003	1-247-752-11	CARBON	1K 5% 1/2W
FB6101	1-412-911-11	FERRITE	0UH	R6004	1-218-835-11	METAL CHIP	330 0.5% 1/10W
< IC >				R6016	1-535-143-71	LEAD, JUMPER (7.5MM)	
IC6100	6-707-749-01	IC CXD9841P		R6051	1-216-821-11	METAL CHIP	1K 5% 1/10W
IC6200	6-709-368-01	IC MM1431ATT (CN)		R6052	1-216-837-11	METAL CHIP	22K 5% 1/10W
IC6301	6-708-801-01	IC MIP2H2		R6101	1-249-385-11	CARBON	2.2 5% 1/4W
IC6302	6-709-442-01	IC MM1530ATT					
IC6401	6-709-368-01	IC MM1431ATT (CN)					

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2A

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R6102	Δ 1-202-933-61	FUSIBLE	0.1	10%	1/2W	R6415	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6103	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R6416	1-216-837-11	METAL CHIP	22K	5%	1/10W
R6104	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R6417	1-216-821-11	METAL CHIP	1K	5%	1/10W
R6105	1-208-854-11	METAL CHIP	1M	0.5%	1/10W	R6418	1-216-845-11	METAL CHIP	100K	5%	1/10W
R6106	1-208-854-11	METAL CHIP	1M	0.5%	1/10W	R6419	1-216-837-11	METAL CHIP	22K	5%	1/10W
R6107	1-208-854-11	METAL CHIP	1M	0.5%	1/10W	R6420	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6108	1-208-854-11	METAL CHIP	1M	0.5%	1/10W	R6421	1-216-864-11	SHORT CHIP	0		
R6109	1-218-761-11	METAL CHIP	240K	0.5%	1/10W	R6422	1-218-887-11	METAL CHIP	47K	0.5%	1/10W
R6110	1-218-881-11	METAL CHIP	27K	0.5%	1/10W	R6425	1-216-809-11	METAL CHIP	100	5%	1/10W
R6111	1-218-873-11	METAL CHIP	12K	0.5%	1/10W	R6426	1-216-849-11	METAL CHIP	220K	5%	1/10W
R6114	1-211-985-11	METAL CHIP	47	0.5%	1/10W	R6427	1-218-889-11	METAL CHIP	56K	0.5%	1/10W
R6116	1-216-009-91	RES-CHIP	22	5%	1/10W	R6436	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R6117	1-216-009-91	RES-CHIP	22	5%	1/10W	R6437	1-216-821-11	METAL CHIP	1K	5%	1/10W
R6118	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6441	1-216-841-11	METAL CHIP	47K	5%	1/10W
R6119	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6442	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6121	1-216-361-00	METAL OXIDE	0.22	5%	2W	R6443	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6122	1-216-361-00	METAL OXIDE	0.22	5%	2W	R6444	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6123	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R6451	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6127	1-216-857-11	METAL CHIP	1M	5%	1/10W	R6452	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R6200	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6453	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6201	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6454	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R6202	1-216-105-91	RES-CHIP	220K	5%	1/10W	R6455	1-218-903-11	METAL CHIP	220K	0.5%	1/10W
R6203	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R6456	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W
R6204	1-218-843-11	METAL CHIP	680	0.5%	1/10W	R6459	1-218-885-11	METAL CHIP	39K	0.5%	1/10W
R6205	1-218-865-11	METAL CHIP	5.6K	0.5%	1/10W	R6461	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6207	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R6462	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6208	1-249-377-11	CARBON	0.47	5%	1/4W	R6468	1-218-903-11	METAL CHIP	220K	0.5%	1/10W
R6226	1-249-389-11	CARBON	4.7	5%	1/4W	R6503	1-215-882-00	METAL OXIDE	22	5%	2W
R6300	Δ 1-212-958-00	FUSIBLE	10	5%	1/2W	R6512	1-218-907-11	METAL CHIP	330K	0.5%	1/10W
R6301	1-243-725-71	METAL OXIDE	100K	5%	1W	R6513	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R6302	1-218-865-11	METAL CHIP	5.6K	0.5%	1/10W	R6514	1-218-895-11	METAL CHIP	100K	0.5%	1/10W
R6303	1-249-385-11	CARBON	2.2	5%	1/4W	R6515	1-218-823-11	METAL CHIP	100	0.5%	1/10W
R6304	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6526	1-211-989-11	METAL CHIP	68	0.5%	1/10W
R6305	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R6527	1-218-913-91	METAL CHIP	560K	0.5%	1/10W
R6306	1-216-805-11	METAL CHIP	47	5%	1/10W	R6528	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R6307	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R6529	1-216-864-11	SHORT CHIP	0		
R6308	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R6530	1-219-729-61	METAL	0.33	10%	5W
R6309	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R6531	1-219-729-61	METAL	0.33	10%	5W
R6400	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6532	1-216-864-11	SHORT CHIP	0		
R6401	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R6533	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6402	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6534	1-218-823-11	METAL CHIP	100	0.5%	1/10W
R6403	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R6535	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6405	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R6536	1-218-830-11	METAL CHIP	200	0.5%	1/10W
R6407	1-216-837-11	METAL CHIP	22K	5%	1/10W	R6537	1-249-389-11	CARBON	4.7	5%	1/4W
R6408	1-218-879-11	METAL CHIP	22K	0.5%	1/10W	R6538	1-249-405-11	CARBON	100	5%	1/4W
R6409	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6539	1-218-830-11	METAL CHIP	200	0.5%	1/10W
R6410	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6540	1-249-389-11	CARBON	4.7	5%	1/4W
R6412	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6541	1-208-818-11	METAL CHIP	33K	0.5%	1/10W
R6413	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R6542	1-208-814-91	METAL CHIP	22K	0.5%	1/10W
R6414	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6543	1-218-830-11	METAL CHIP	200	0.5%	1/10W

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

Note : The components identified by mark $\square$ contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.

G2A

B2H

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R6544	1-218-830-11	METAL CHIP	200 0.5% 1/10W	C4024	1-100-591-91	CERAMIC CHIP 1UF	10% 25V
R6545	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	C4025	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
R6546	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	C4026	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R6547	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	C4027	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
R6548	1-208-846-11	METAL CHIP	470K 0.5% 1/10W	C4028	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R6549	1-208-844-11	METAL CHIP	390K 0.5% 1/10W	C4029	1-162-912-11	CERAMIC CHIP 7PF	0.50PF 50V
R6550	1-218-875-11	METAL CHIP	15K 0.5% 1/10W	C4031	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
R6551	1-249-393-11	CARBON	10 5% 1/4W	C4032	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
R6552	1-216-809-11	METAL CHIP	100 5% 1/10W	C4033	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
R6553	Δ 1-208-830-11	METAL CHIP	100K 0.5% 1/10W	C4035	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
R6554	1-218-911-11	METAL CHIP	470K 0.5% 1/10W	C4036	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
R6555	1-218-887-11	METAL CHIP	47K 0.5% 1/10W	C4037	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
R6557	1-218-851-11	METAL CHIP	1.5K 0.5% 1/10W	C4038	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
R6560	1-218-911-11	METAL CHIP	470K 0.5% 1/10W	C4039	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R6562	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W	C4040	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R6563	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W	C4042	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
R6564	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W	C4046	1-100-591-91	CERAMIC CHIP 1UF	10% 25V
R6565	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W	C4047	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
R6566	1-216-833-11	METAL CHIP	10K 5% 1/10W	C4048	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
< RELAY >				C4049	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
RY6003	Δ 1-755-579-11	RELAY, POWER		C4050	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
< TRANSFORMER >				C4051	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
T6102	Δ 1-443-983-11	CONVERTER TRANSFORMER (PIT)		C4052	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
T6103	Δ 1-443-982-11	CONVERTER TRANSFORMER (PIT)		C4053	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
T6301	Δ 1-443-984-11	CONVERTER TRANSFORMER (SBT)		C4054	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
< VARISTOR >				C4055	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
VD6000	Δ 1-804-996-21	VARISTOR		C4056	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
VD6001	Δ 1-804-996-21	VARISTOR		C4057	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
$\square$ *A-1214-950-C B2H Board, Complete				C4058	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
A5001	1-694-974-21	CONTACT TERMINAL		C4059	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
< CAPACITOR >				C4060	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C4001	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C4061	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C4003	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C4062	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4005	1-162-974-11	CERAMIC CHIP 0.01UF	50V	C4067	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4009	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C4068	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4011	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C4069	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4012	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C4070	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4013	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4071	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C4015	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C4073	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C4017	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4074	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4018	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C4075	1-126-390-11	ELECT CHIP 22UF	20.00% 6.3V
C4021	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4077	1-126-391-11	ELECT CHIP 47UF	20.00% 6.3V
C4022	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V	C4078	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4023	1-115-456-21	DOUBLE LAYER 0.22F	5.5V	C4079	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
				C4080	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
				C4081	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
				C4083	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
				C4084	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
				C4085	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
				C4086	1-126-394-11	ELECT CHIP 10UF	20.00% 16V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C4301	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C4537	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C4304	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C4540	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4306	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4541	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
C4307	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4542	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
C4308	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C4543	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4310	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C4545	1-135-595-11	ELECT 100UF	20% 6.3V
C4311	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C4549	1-165-673-21	ELECT CHIP 56UF	20% 10V
C4312	1-100-162-91	CERAMIC CHIP 1UF	50V	C4551	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C4402	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C4552	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
C4403	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C4554	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C4404	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C4555	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V
C4405	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C4556	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C4406	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4570	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C4407	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5000	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4408	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C5002	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4409	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C5003	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4410	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C5005	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4411	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C5006	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4412	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C5007	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4413	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C5009	1-162-905-11	CERAMIC CHIP 1PF	0.25PF 50V
C4501	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C5010	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4502	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5011	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4503	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5012	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4504	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V	C5013	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4505	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V	C5014	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4507	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C5015	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4508	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C5016	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4509	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C5017	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4510	1-100-552-21	ELECT CHIP 10UF	20% 25V	C5018	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4512	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C5019	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4513	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C5020	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4514	1-128-536-11	ELECT CHIP 100UF	20.00% 25V	C5021	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4515	1-110-648-11	ELECT CHIP 220UF	20.00% 25V	C5022	1-162-905-11	CERAMIC CHIP 1PF	0.25PF 50V
C4516	1-110-648-11	ELECT CHIP 220UF	20.00% 25V	C5023	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C4517	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C5024	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C4518	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C5025	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C4519	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C5027	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C4520	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C5028	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V
C4521	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C5032	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C4524	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C5033	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C4525	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C5201	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4526	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C5202	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4527	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C5204	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
C4528	1-112-794-11	ELECT CHIP 470UF	20% 16V	C5205	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4530	1-165-673-21	ELECT CHIP 56UF	20% 10V	C5208	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C4531	1-165-673-21	ELECT CHIP 56UF	20% 10V	C5209	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
C4532	1-112-794-11	ELECT CHIP 470UF	20% 16V	C5211	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
C4534	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C5212	1-162-979-11	CERAMIC CHIP 0.0027UF	10.00% 50V
C4535	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C5213	1-162-979-11	CERAMIC CHIP 0.0027UF	10.00% 50V
C4536	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C5216	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C5217	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5803	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5218	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5804	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C5219	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5805	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C5220	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5806	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5221	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5807	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5222	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5808	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C5224	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5809	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C5225	1-162-960-11	CERAMIC CHIP 220PF	10.00% 50V	C5810	1-115-412-11	CERAMIC CHIP 680PF	5.00% 25V
C5226	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5812	1-115-412-11	CERAMIC CHIP 680PF	5.00% 25V
C5230	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5813	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5231	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5814	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C5234	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5815	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5236	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5816	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5237	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5817	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5239	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5818	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5240	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5819	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V
C5241	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5820	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V
C5246	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5821	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V
C5250	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5822	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V
C5252	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5823	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V
C5253	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5824	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V
C5254	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5825	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V
C5255	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5826	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5256	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5830	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5257	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5832	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V
C5258	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5834	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5259	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5835	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V
C5260	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5836	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C5262	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5838	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5265	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5839	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5269	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5840	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C5270	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5841	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5271	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5842	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5273	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	< CONNECTOR >			
C5274	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	CN4000	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P	
C5278	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	CN4002	*1-819-447-11	HEADER ASSEMBLY FOR PWB 10P	
C5279	1-125-837-91	CERAMIC CHIP 1UF	10% 6.3V	CN4003	1-779-331-51	CONNECTOR, FFC/FPC 14P	
C5280	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	CN4004	1-779-936-51	CONNECTOR, FFC/FPC 18P	
C5281	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	CN4006	*1-819-336-11	HEADER ASSEMBLY FOR PWB 3P	
C5502	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN4007	1-820-187-11	HEADER ASSEMBLY (PRINT PWB) 10P	
C5503	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	CN4300	1-820-187-11	HEADER ASSEMBLY (PRINT PWB) 10P	
C5504	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN4302	*1-820-189-11	HEADER ASSEMBLY (PRINT PWB) 12P	
C5506	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	CN4400	1-820-284-11	D SUB CONNECTOR	
C5507	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	CN4500	1-820-186-11	HEADER ASSEMBLY (PRINT PWB) 9P	
C5508	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN4501	1-820-184-11	HEADER ASSEMBLY (PRINT PWB) 7P	
C5510	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	CN4700	1-820-255-51	FFC/FPC CONNECTOR (ZIF) 20P	
C5512	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	CN5000	*1-820-235-11	HEADER ASSEMBLY 30P	
C5513	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	CN5800	1-818-737-11	HDMI CONNECTOR	
C5514	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN5801	1-818-737-11	HDMI CONNECTOR	
C5802	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

B2H

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< DIODE >				D5824	1-802-255-11	ESD SUPPRESSOR	
D4001	8-719-058-24	DIODE RB501V-40TE-17		D5825	1-802-255-11	ESD SUPPRESSOR	
D4002	8-719-404-50	DIODE MA111-TX		D5826	1-802-255-11	ESD SUPPRESSOR	
D4003	8-719-077-59	DIODE 1PS302		D5827	1-802-255-11	ESD SUPPRESSOR	
D4004	8-719-422-46	DIODE MA8056		ET4503	1-780-336-11	EARTH TERMINAL	
D4005	8-719-422-46	DIODE MA8056		ET4504	1-780-336-11	EARTH TERMINAL	
D4301	8-719-064-03	DIODE HZU16B2TRF-E		ET4505	1-780-336-11	EARTH TERMINAL	
D4302	8-719-064-03	DIODE HZU16B2TRF-E		ET4506	1-780-336-11	EARTH TERMINAL	
D4400	8-719-422-46	DIODE MA8056		< FUSE >			
D4401	8-719-422-46	DIODE MA8056		F4500	Δ 1-576-603-21	FUSE	3.15A 24V
D4402	8-719-422-46	DIODE MA8056		F4501	Δ 1-576-603-21	FUSE	3.15A 24V
D4403	8-719-050-38	DIODE M1MA152WK-T1		< FERRITE BEAD >			
D4500	8-719-404-50	DIODE MA111-TX		FB4000	1-400-110-21	FERRITE	OUH
D4501	6-501-336-01	DIODE RSX201L-30TE25		FB4001	1-400-110-21	FERRITE	OUH
D4502	8-719-404-50	DIODE MA111-TX		FB4002	1-400-807-21	FERRITE	OUH
D4504	8-719-072-43	DIODE RB050L-40TE25		FB4003	1-400-591-22	FERRITE	OUH
D4505	8-719-072-43	DIODE RB050L-40TE25		FB4004	1-400-807-21	FERRITE	OUH
D4506	6-501-336-01	DIODE RSX201L-30TE25		FB4005	1-400-807-21	FERRITE	OUH
D4507	6-500-579-01	DIODE PTZ-TE25-6.8B		FB4006	1-400-807-21	FERRITE	OUH
D4508	8-719-073-69	DIODE PTZ-TE25-6.2A		FB4007	1-400-807-21	FERRITE	OUH
D4510	8-719-056-83	DIODE UDZ-TE-17-6.8B		FB4008	1-400-807-21	FERRITE	OUH
D4512	8-719-056-83	DIODE UDZ-TE-17-6.8B		FB4009	1-400-807-21	FERRITE	OUH
D4560	8-719-056-84	DIODE UDZ-TE-17-7.5B		FB4010	1-400-110-21	FERRITE	OUH
D4561	8-719-404-50	DIODE MA111-TX		FB4011	1-414-227-11	FERRITE	OUH
D4562	8-719-404-50	DIODE MA111-TX		FB4012	1-400-110-21	FERRITE	OUH
D4563	8-719-404-50	DIODE MA111-TX		FB4013	1-400-110-21	FERRITE	OUH
D5800	8-719-050-37	DIODE M1MA152WA-T1		FB4014	1-414-227-11	FERRITE	OUH
D5802	8-719-404-50	DIODE MA111-TX		FB4015	1-400-807-21	FERRITE	OUH
D5803	1-802-255-11	ESD SUPPRESSOR		FB4016	1-400-794-21	FERRITE	OUH
D5804	1-802-255-11	ESD SUPPRESSOR		FB4017	1-400-794-21	FERRITE	OUH
D5805	1-802-255-11	ESD SUPPRESSOR		FB4018	1-400-591-22	FERRITE	OUH
D5806	1-802-255-11	ESD SUPPRESSOR		FB4019	1-400-591-22	FERRITE	OUH
D5807	1-802-255-11	ESD SUPPRESSOR		FB4020	1-400-591-22	FERRITE	OUH
D5808	8-719-404-50	DIODE MA111-TX		FB4021	1-400-591-22	FERRITE	OUH
D5809	1-802-255-11	ESD SUPPRESSOR		FB4022	1-400-591-22	FERRITE	OUH
D5810	1-802-255-11	ESD SUPPRESSOR		FB4023	1-400-591-22	FERRITE	OUH
D5811	1-802-255-11	ESD SUPPRESSOR		FB4024	1-400-591-22	FERRITE	OUH
D5812	1-802-255-11	ESD SUPPRESSOR		FB4025	1-400-591-22	FERRITE	OUH
D5813	1-802-255-11	ESD SUPPRESSOR		FB4026	1-400-591-22	FERRITE	OUH
D5814	8-719-404-50	DIODE MA111-TX		FB4027	1-400-591-22	FERRITE	OUH
D5815	8-719-404-50	DIODE MA111-TX		FB4028	1-400-591-22	FERRITE	OUH
D5816	8-719-050-38	DIODE M1MA152WK-T1		FB4029	1-400-591-22	FERRITE	OUH
D5817	8-719-050-38	DIODE M1MA152WK-T1		FB4300	1-400-141-22	FERRITE	OUH
D5818	1-802-255-11	ESD SUPPRESSOR		FB4301	1-400-141-22	FERRITE	OUH
D5819	1-802-255-11	ESD SUPPRESSOR		FB4303	1-500-113-22	FERRITE	OUH
D5820	1-802-255-11	ESD SUPPRESSOR		FB4304	1-400-110-21	FERRITE	OUH
D5821	1-802-255-11	ESD SUPPRESSOR		FB4305	1-400-110-21	FERRITE	OUH
D5822	1-802-255-11	ESD SUPPRESSOR					
D5823	1-802-255-11	ESD SUPPRESSOR					

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
FB4306	1-400-110-21	FERRITE	OUH	IC4504	6-708-862-01	IC MM1662FTRE	
FB4400	1-469-100-21	FERRITE	OUH	IC5000	6-710-599-01	IC CXD9199GG-DW	
FB4401	1-469-100-21	FERRITE	OUH	IC5201	8-759-651-59	IC SN74CBTLV3245APWR	
FB4402	1-469-100-21	FERRITE	OUH	IC5202	8-759-651-59	IC SN74CBTLV3245APWR	
FB4403	1-400-141-22	FERRITE	OUH	IC5203	6-706-491-01	IC TC7SH86FU(T5RSOYJF)	
FB4405	1-469-100-21	FERRITE	OUH	IC5204	*6-703-108-01	IC SN74LVC2G04DCKR	
FB4500	1-400-794-21	FERRITE	OUH	IC5500	6-707-822-01	IC EM6A9320BI-5MG	
FB4501	1-400-794-21	FERRITE	OUH	IC5800	6-704-819-01	IC CS4335-KSZR	
FB4502	1-400-110-21	FERRITE	OUH	IC5801	6-704-001-01	IC BR24L02F-WE2	
FB4503	1-400-110-21	FERRITE	OUH	IC5802	6-704-001-01	IC BR24L02F-WE2	
FB4506	1-400-110-21	FERRITE	OUH	IC5803	6-708-758-01	IC PCA9517DP.118	
FB4507	1-400-110-21	FERRITE	OUH	IC5804	6-708-758-01	IC PCA9517DP.118	
FB4508	1-414-445-11	FERRITE	OUH	IC5805	8-759-596-34	IC SN74LV4053APWR	
FB4509	1-414-445-11	FERRITE	OUH	IC5806	8-753-255-97	IC CXB1441R-T4	
FB4510	1-414-445-11	FERRITE	OUH				
FB4511	1-400-591-22	FERRITE	OUH			< SOCKET >	
FB4512	1-400-591-22	FERRITE	OUH	J4400	1-820-638-11	JACK (SMALL TYPE)	
FB4513	1-400-591-22	FERRITE	OUH	J5800	1-820-765-11	PHONO JACK 2P	
FB4514	1-400-591-22	FERRITE	OUH				
FB5201	1-400-794-21	FERRITE	OUH			< COIL >	
FB5800	1-469-094-21	FERRITE	OUH	L4500	1-457-041-21	INDUCTOR	10UH
		< FILTER >		L4501	1-416-740-11	INDUCTOR	10UH
FL4000	1-234-177-21	FERRITE	OUH	L4502	1-416-740-11	INDUCTOR	10UH
FL5201	1-234-177-21	FERRITE	OUH	L4503	1-481-081-11	INDUCTOR	47UH
FL5203	1-234-177-21	FERRITE	OUH	L4504	1-481-080-11	INDUCTOR	22UH
FL5206	1-234-177-21	FERRITE	OUH	L4505	1-481-083-11	INDUCTOR	22UH
FL5207	1-234-177-21	FERRITE	OUH	L4506	1-456-786-21	INDUCTOR	47UH
FL5500	1-234-177-21	FERRITE	OUH	L4507	1-412-056-11	INDUCTOR	4.7UH
FL5501	1-234-177-21	FERRITE	OUH	L5000	1-456-984-11	INDUCTOR	0UH
FL5800	1-234-177-21	FERRITE	OUH	L5001	1-456-984-11	INDUCTOR	0UH
FL5801	1-234-177-21	FERRITE	OUH	L5002	1-456-984-11	INDUCTOR	0UH
		< IC >		L5003	1-456-984-11	INDUCTOR	0UH
IC4000	8-759-460-79	IC BA09FP-E2		L5004	1-456-984-11	INDUCTOR	0UH
IC4001	6-706-419-01	IC LM393DT (A)		L5005	1-400-177-21	FERRITE	0UH
IC4002	6-709-517-01	IC S-35390A-J8T1G		L5006	1-469-561-21	INDUCTOR	100UH
IC4003	6-708-219-01	IC MB91305PMC-G-BNDE1		L5201	1-400-794-21	FERRITE	0UH
IC4004	6-703-175-01	IC PST3629UL		L5202	1-412-054-21	INDUCTOR	2.2UH
IC4005	6-709-512-01	IC S-1132B18-M5T1G		L5203	1-469-551-21	INDUCTOR	2.2UH
IC4006	6-710-121-01	IC M24256-BWMN6TP(A)		L5205	1-469-551-21	INDUCTOR	2.2UH
IC4007	6-706-815-01	IC TMP75AIDR		L5206	1-469-551-21	INDUCTOR	2.2UH
IC4008	6-707-867-01	IC TC74VHC132FT(EKJ)		L5500	1-400-794-21	FERRITE	0UH
IC4009	6-807-089-01	IC MX29LV160CTTI-70G-WAX2TE-01		L5501	1-400-794-21	FERRITE	0UH
IC4400	6-704-600-01	IC M24C02-WMN6T(B)		L5800	1-469-555-21	INDUCTOR	10UH
IC4401	6-707-846-01	IC TC74LCX14FT(EKJ)		L5801	1-469-555-21	INDUCTOR	10UH
IC4500	6-707-927-01	IC BD9775FV		L5802	1-457-057-21	INDUCTOR	0UH
IC4501	6-709-441-01	IC SI8008TM-TL		L5803	1-457-057-21	INDUCTOR	0UH
IC4502	6-709-441-01	IC SI8008TM-TL		L5804	1-457-057-21	INDUCTOR	0UH
				L5805	1-457-057-21	INDUCTOR	0UH
				L5806	1-457-057-21	INDUCTOR	0UH
				L5807	1-457-057-21	INDUCTOR	0UH

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

B2H

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
L5808	1-457-057-21	INDUCTOR	0UH	Q5817	8-729-907-00	TRANSISTOR DTC114EU	
L5809	1-457-057-21	INDUCTOR	0UH	Q5818	8-729-907-00	TRANSISTOR DTC114EU	
< PROTECTOR MODULE >				Q5819	8-729-907-00	TRANSISTOR DTC114EU	
PS4400 Δ	1-576-122-21	IC LINK	0.4A 72V	< RESISTOR >			
< TRANSISTOR >				R4000	1-216-801-11	METAL CHIP 22 5% 1/10W	
Q4000	6-551-387-01	TRANSISTOR SSM6N16FU		R4001	1-216-801-11	METAL CHIP 22 5% 1/10W	
Q4001	8-729-028-74	TRANSISTOR DTA114TUA-T106		R4002	1-216-801-11	METAL CHIP 22 5% 1/10W	
Q4002	8-729-029-00	TRANSISTOR DTC115EUA-T106		R4003	1-216-864-11	SHORT CHIP 0	
Q4003	8-729-013-28	TRANSISTOR HN1B01FU-TE85R		R4004	1-216-864-11	SHORT CHIP 0	
Q4004	8-729-028-74	TRANSISTOR DTA114TUA-T106		R4005	1-216-801-11	METAL CHIP 22 5% 1/10W	
Q4005	8-729-029-04	TRANSISTOR DTC123JUA-T106		R4006	1-216-801-11	METAL CHIP 22 5% 1/10W	
Q4006	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4007	1-216-801-11	METAL CHIP 22 5% 1/10W	
Q4301	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R4008	1-216-864-11	SHORT CHIP 0	
Q4400	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R4009	1-216-864-11	SHORT CHIP 0	
Q4401	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R4010	1-216-864-11	SHORT CHIP 0	
Q4500	8-729-046-04	TRANSISTOR FDS6690A		R4011	1-216-801-11	METAL CHIP 22 5% 1/10W	
Q4501	6-550-828-01	TRANSISTOR RSQ035P03TR		R4012	1-216-801-11	METAL CHIP 22 5% 1/10W	
Q4502	6-550-851-01	TRANSISTOR RSS050P03FTB		R4013	1-216-801-11	METAL CHIP 22 5% 1/10W	
Q4503	*6-550-663-01	TRANSISTOR RSS100N03TB		R4014	1-216-864-11	SHORT CHIP 0	
Q4504	8-729-029-00	TRANSISTOR DTC115EUA-T106		R4015	1-216-864-11	SHORT CHIP 0	
Q4505	8-729-602-21	TRANSISTOR 2SC4154-F		R4016	1-218-990-81	SHORT CHIP 0	
Q4506	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4017	1-218-990-81	SHORT CHIP 0	
Q4560	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4018	1-208-683-11	METAL CHIP 1K 0.5% 1/16W	
Q4561	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4019	1-216-864-11	SHORT CHIP 0	
Q4562	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4020	1-216-864-11	SHORT CHIP 0	
Q4563	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4021	1-216-864-11	SHORT CHIP 0	
Q4564	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4022	1-216-864-11	SHORT CHIP 0	
Q4565	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4024	1-218-990-81	SHORT CHIP 0	
Q5000	8-729-602-36	TRANSISTOR 2SA1602-F		R4025	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	
Q5001	8-729-602-36	TRANSISTOR 2SA1602-F		R4026	1-216-864-11	SHORT CHIP 0	
Q5800	8-729-600-22	TRANSISTOR 2SA1235-F		R4027	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	
Q5801	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R4028	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	
Q5802	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R4029	1-216-864-11	SHORT CHIP 0	
Q5803	6-551-364-01	TRANSISTOR DTC614TUT106		R4030	1-218-965-11	RES-CHIP 10K 5% 1/16W	
Q5804	6-551-364-01	TRANSISTOR DTC614TUT106		R4031	1-218-965-11	RES-CHIP 10K 5% 1/16W	
Q5805	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R4032	1-218-965-11	RES-CHIP 10K 5% 1/16W	
Q5806	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4033	1-216-841-11	METAL CHIP 47K 5% 1/10W	
Q5807	8-729-907-00	TRANSISTOR DTC114EU		R4034	1-218-965-11	RES-CHIP 10K 5% 1/16W	
Q5808	8-729-907-00	TRANSISTOR DTC114EU		R4035	1-218-965-11	RES-CHIP 10K 5% 1/16W	
Q5809	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)		R4036	1-218-965-11	RES-CHIP 10K 5% 1/16W	
Q5810	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)		R4037	1-218-965-11	RES-CHIP 10K 5% 1/16W	
Q5811	8-729-907-00	TRANSISTOR DTC114EU		R4038	1-218-965-11	RES-CHIP 10K 5% 1/16W	
Q5812	8-729-907-00	TRANSISTOR DTC114EU		R4039	1-218-965-11	RES-CHIP 10K 5% 1/16W	
Q5813	8-729-907-00	TRANSISTOR DTC114EU		R4040	1-218-965-11	RES-CHIP 10K 5% 1/16W	
Q5814	8-729-907-00	TRANSISTOR DTC114EU		R4041	1-218-941-81	RES-CHIP 100 5% 1/16W	
Q5815	8-729-907-00	TRANSISTOR DTC114EU		R4042	1-218-990-81	SHORT CHIP 0	
Q5816	8-729-907-00	TRANSISTOR DTC114EU		R4045	1-216-813-11	METAL CHIP 220 5% 1/10W	
				R4046	1-218-945-11	RES-CHIP 220 5% 1/16W	
				R4049	1-218-990-81	SHORT CHIP 0	

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R4051	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4125	1-218-941-81	RES-CHIP	100	5%	1/16W
R4052	1-218-990-81	SHORT CHIP	0			R4126	1-218-941-81	RES-CHIP	100	5%	1/16W
R4055	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4127	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4056	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4128	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4057	1-218-990-81	SHORT CHIP	0			R4131	1-218-990-81	SHORT CHIP	0		
R4058	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4132	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4060	1-218-990-81	SHORT CHIP	0			R4134	1-218-990-81	SHORT CHIP	0		
R4062	1-218-990-81	SHORT CHIP	0			R4135	1-218-990-81	SHORT CHIP	0		
R4064	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4136	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4065	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4137	1-218-949-11	RES-CHIP	470	5%	1/16W
R4066	1-216-864-11	SHORT CHIP	0			R4138	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4067	1-216-864-11	SHORT CHIP	0			R4139	1-218-949-11	RES-CHIP	470	5%	1/16W
R4068	1-218-990-81	SHORT CHIP	0			R4140	1-218-990-81	SHORT CHIP	0		
R4070	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R4141	1-218-990-81	SHORT CHIP	0		
R4071	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4142	1-218-949-11	RES-CHIP	470	5%	1/16W
R4072	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R4143	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R4073	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R4144	1-208-715-11	METAL CHIP	22K	0.5%	1/16W
R4074	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4146	1-218-937-11	RES-CHIP	47	5%	1/16W
R4075	1-218-959-11	RES-CHIP	3.3K	5%	1/16W	R4147	1-218-990-81	SHORT CHIP	0		
R4079	1-218-941-81	RES-CHIP	100	5%	1/16W	R4150	1-218-937-11	RES-CHIP	47	5%	1/16W
R4080	1-218-941-81	RES-CHIP	100	5%	1/16W	R4152	1-216-864-11	SHORT CHIP	0		
R4081	1-218-941-81	RES-CHIP	100	5%	1/16W	R4153	1-218-990-81	SHORT CHIP	0		
R4082	1-218-941-81	RES-CHIP	100	5%	1/16W	R4156	1-216-813-11	METAL CHIP	220	5%	1/10W
R4083	1-218-933-11	RES-CHIP	22	5%	1/16W	R4157	1-216-864-11	SHORT CHIP	0		
R4084	1-218-941-81	RES-CHIP	100	5%	1/16W	R4159	1-216-864-11	SHORT CHIP	0		
R4085	1-218-933-11	RES-CHIP	22	5%	1/16W	R4160	1-216-849-11	METAL CHIP	220K	5%	1/10W
R4086	1-218-941-81	RES-CHIP	100	5%	1/16W	R4162	1-216-864-11	SHORT CHIP	0		
R4087	1-218-941-81	RES-CHIP	100	5%	1/16W	R4163	1-218-941-81	RES-CHIP	100	5%	1/16W
R4088	1-218-941-81	RES-CHIP	100	5%	1/16W	R4164	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4092	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4165	1-216-809-11	METAL CHIP	100	5%	1/10W
R4093	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4300	1-216-864-11	SHORT CHIP	0		
R4095	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4302	1-216-809-11	METAL CHIP	100	5%	1/10W
R4096	1-208-691-11	METAL CHIP	2.2K	0.5%	1/16W	R4303	1-216-864-11	SHORT CHIP	0		
R4099	1-218-941-81	RES-CHIP	100	5%	1/16W	R4307	1-218-990-81	SHORT CHIP	0		
R4101	1-218-941-81	RES-CHIP	100	5%	1/16W	R4308	1-218-990-81	SHORT CHIP	0		
R4103	1-218-941-81	RES-CHIP	100	5%	1/16W	R4309	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4104	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4310	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4105	1-218-973-11	RES-CHIP	47K	5%	1/16W	R4311	1-216-853-11	METAL CHIP	470K	5%	1/10W
R4106	1-218-941-81	RES-CHIP	100	5%	1/16W	R4313	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R4107	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4400	1-216-805-11	METAL CHIP	47	5%	1/10W
R4108	1-216-864-11	SHORT CHIP	0			R4401	1-216-805-11	METAL CHIP	47	5%	1/10W
R4109	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4404	1-216-821-11	METAL CHIP	1K	5%	1/10W
R4110	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4405	1-216-821-11	METAL CHIP	1K	5%	1/10W
R4111	1-218-941-81	RES-CHIP	100	5%	1/16W	R4408	1-216-853-11	METAL CHIP	470K	5%	1/10W
R4115	1-218-941-81	RES-CHIP	100	5%	1/16W	R4409	1-216-853-11	METAL CHIP	470K	5%	1/10W
R4116	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4410	1-216-833-11	METAL CHIP	10K	5%	1/10W
R4119	1-218-990-81	SHORT CHIP	0			R4411	1-216-833-11	METAL CHIP	10K	5%	1/10W
R4121	1-218-990-81	SHORT CHIP	0			R4412	1-216-847-11	METAL CHIP	150K	5%	1/10W
R4123	1-208-886-81	METAL CHIP	910	0.5%	1/16W	R4413	1-216-847-11	METAL CHIP	150K	5%	1/10W
R4124	1-218-965-11	RES-CHIP	10K	5%	1/16W	R4414	1-216-805-11	METAL CHIP	47	5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R4415	1-216-805-11	METAL CHIP	47	5%	1/10W	R4535	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R4416	1-216-821-11	METAL CHIP	1K	5%	1/10W	R4536	1-218-845-11	METAL CHIP	820	0.5%	1/10W
R4417	1-216-847-11	METAL CHIP	150K	5%	1/10W	R4538	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R4418	1-216-847-11	METAL CHIP	150K	5%	1/10W	R4539	1-216-295-91	SHORT CHIP	0		
R4419	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R4540	1-216-864-11	SHORT CHIP	0		
R4420	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R4541	1-216-295-91	SHORT CHIP	0		
R4421	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R4542	1-216-295-91	SHORT CHIP	0		
R4422	1-216-821-11	METAL CHIP	1K	5%	1/10W	R4543	1-216-295-91	SHORT CHIP	0		
R4423	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R4544	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R4424	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R4545	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R4425	1-216-821-11	METAL CHIP	1K	5%	1/10W	R4547	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W
R4426	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R4548	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R4429	1-216-801-11	METAL CHIP	22	5%	1/10W	R4549	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R4430	1-216-801-11	METAL CHIP	22	5%	1/10W	R4550	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W
R4431	1-216-801-11	METAL CHIP	22	5%	1/10W	R4551	1-216-843-11	METAL CHIP	68K	5%	1/10W
R4432	1-216-845-11	METAL CHIP	100K	5%	1/10W	R4552	1-216-851-11	METAL CHIP	330K	5%	1/10W
R4436	1-218-933-11	RES-CHIP	22	5%	1/16W	R4553	1-216-833-11	METAL CHIP	10K	5%	1/10W
R4437	1-218-933-11	RES-CHIP	22	5%	1/16W	R4555	1-216-833-11	METAL CHIP	10K	5%	1/10W
R4500	1-218-877-11	METAL CHIP	18K	0.5%	1/10W	R4556	1-216-864-11	SHORT CHIP	0		
R4501	1-218-877-11	METAL CHIP	18K	0.5%	1/10W	R4558	1-216-835-11	METAL CHIP	15K	5%	1/10W
R4502	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R4560	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4503	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R4561	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R4504	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R4562	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4505	1-218-891-11	METAL CHIP	68K	0.5%	1/10W	R4563	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4506	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R4564	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R4507	1-218-891-11	METAL CHIP	68K	0.5%	1/10W	R4565	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4508	1-216-841-11	METAL CHIP	47K	5%	1/10W	R4566	1-216-864-11	SHORT CHIP	0		
R4509	1-216-841-11	METAL CHIP	47K	5%	1/10W	R4567	1-218-977-11	RES-CHIP	100K	5%	1/16W
R4510	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R4568	1-216-845-11	METAL CHIP	100K	5%	1/10W
R4511	1-218-879-11	METAL CHIP	22K	0.5%	1/10W	R4569	1-216-846-11	METAL CHIP	120K	5%	1/10W
R4512	1-216-835-11	METAL CHIP	15K	5%	1/10W	R4570	1-216-845-11	METAL CHIP	100K	5%	1/10W
R4513	1-218-882-11	METAL CHIP	30K	0.5%	1/10W	R4571	1-216-847-11	METAL CHIP	150K	5%	1/10W
R4514	1-216-821-11	METAL CHIP	1K	5%	1/10W	R4700	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R4515	1-216-815-11	METAL CHIP	330	5%	1/10W	R4710	1-216-864-11	SHORT CHIP	0		
R4516	1-216-809-11	METAL CHIP	100	5%	1/10W	R4716	1-216-864-11	SHORT CHIP	0		
R4517	1-216-809-11	METAL CHIP	100	5%	1/10W	R4717	1-216-864-11	SHORT CHIP	0		
R4519	1-216-835-11	METAL CHIP	15K	5%	1/10W	R5000	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R4520	1-216-864-11	SHORT CHIP	0			R5002	1-218-949-11	RES-CHIP	470	5%	1/16W
R4521	1-216-837-11	METAL CHIP	22K	5%	1/10W	R5003	1-218-990-81	SHORT CHIP	0		
R4522	1-216-864-11	SHORT CHIP	0			R5004	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R4523	1-216-864-11	SHORT CHIP	0			R5007	1-218-949-11	RES-CHIP	470	5%	1/16W
R4524	1-216-837-11	METAL CHIP	22K	5%	1/10W	R5008	1-218-990-81	SHORT CHIP	0		
R4525	1-216-864-11	SHORT CHIP	0			R5009	1-218-989-11	RES-CHIP	1M	5%	1/16W
R4526	1-216-864-11	SHORT CHIP	0			R5010	1-218-935-11	RES-CHIP	33	5%	1/16W
R4527	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5011	1-218-941-81	RES-CHIP	100	5%	1/16W
R4528	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5012	1-218-941-81	RES-CHIP	100	5%	1/16W
R4529	1-216-841-11	METAL CHIP	47K	5%	1/10W	R5013	1-218-941-81	RES-CHIP	100	5%	1/16W
R4530	1-216-841-11	METAL CHIP	47K	5%	1/10W	R5014	1-218-941-81	RES-CHIP	100	5%	1/16W
R4531	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W	R5016	1-218-941-81	RES-CHIP	100	5%	1/16W
R4532	1-218-843-11	METAL CHIP	680	0.5%	1/10W	R5017	1-218-941-81	RES-CHIP	100	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R5025	1-218-990-81	SHORT CHIP	0			R5807	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5026	1-216-864-11	SHORT CHIP	0			R5808	1-216-864-11	SHORT CHIP	0		
R5027	1-216-864-11	SHORT CHIP	0			R5809	1-216-853-11	METAL CHIP	470K	5%	1/10W
R5029	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5810	1-216-864-11	SHORT CHIP	0		
R5031	1-218-941-81	RES-CHIP	100	5%	1/16W	R5811	1-216-853-11	METAL CHIP	470K	5%	1/10W
R5039	1-218-990-81	SHORT CHIP	0			R5812	1-216-847-11	METAL CHIP	150K	5%	1/10W
R5040	1-218-990-81	SHORT CHIP	0			R5813	1-216-847-11	METAL CHIP	150K	5%	1/10W
R5042	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5814	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5043	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5815	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5044	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5816	1-216-847-11	METAL CHIP	150K	5%	1/10W
R5045	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5817	1-216-847-11	METAL CHIP	150K	5%	1/10W
R5046	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R5818	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R5047	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R5819	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R5206	1-216-295-91	SHORT CHIP	0			R5820	1-218-969-11	RES-CHIP	22K	5%	1/16W
R5210	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5821	1-218-989-11	RES-CHIP	1M	5%	1/16W
R5211	1-218-990-81	SHORT CHIP	0			R5822	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5212	1-218-973-11	RES-CHIP	47K	5%	1/16W	R5823	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5214	1-218-933-11	RES-CHIP	22	5%	1/16W	R5824	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5215	1-218-933-11	RES-CHIP	22	5%	1/16W	R5825	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5218	1-216-864-11	SHORT CHIP	0			R5828	1-218-929-11	RES-CHIP	10	5%	1/16W
R5219	1-216-864-11	SHORT CHIP	0			R5829	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R5221	1-216-864-11	SHORT CHIP	0			R5830	1-218-929-11	RES-CHIP	10	5%	1/16W
R5222	1-216-864-11	SHORT CHIP	0			R5831	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R5223	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5832	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R5224	1-218-990-81	SHORT CHIP	0			R5833	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R5225	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5834	1-218-941-81	RES-CHIP	100	5%	1/16W
R5226	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5835	1-218-941-81	RES-CHIP	100	5%	1/16W
R5500	1-400-794-21	FERRITE	0UH			R5836	1-218-941-81	RES-CHIP	100	5%	1/16W
R5503	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R5837	1-218-941-81	RES-CHIP	100	5%	1/16W
R5504	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R5838	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5505	1-218-990-81	SHORT CHIP	0			R5839	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5506	1-211-986-11	METAL CHIP	51	0.5%	1/10W	R5840	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5507	1-218-990-81	SHORT CHIP	0			R5841	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5508	1-218-933-11	RES-CHIP	22	5%	1/16W	R5842	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5509	1-211-986-11	METAL CHIP	51	0.5%	1/10W	R5843	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5510	1-218-933-11	RES-CHIP	22	5%	1/16W	R5844	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5511	1-218-933-11	RES-CHIP	22	5%	1/16W	R5845	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5512	1-218-933-11	RES-CHIP	22	5%	1/16W	R5846	1-218-941-81	RES-CHIP	100	5%	1/16W
R5513	1-218-933-11	RES-CHIP	22	5%	1/16W	R5847	1-218-990-81	SHORT CHIP	0		
R5514	1-218-933-11	RES-CHIP	22	5%	1/16W	R5848	1-218-990-81	SHORT CHIP	0		
R5515	1-218-933-11	RES-CHIP	22	5%	1/16W	R5849	1-218-990-81	SHORT CHIP	0		
R5516	1-218-933-11	RES-CHIP	22	5%	1/16W	R5850	1-218-941-81	RES-CHIP	100	5%	1/16W
R5517	1-218-933-11	RES-CHIP	22	5%	1/16W	R5851	1-218-990-81	SHORT CHIP	0		
R5518	1-218-933-11	RES-CHIP	22	5%	1/16W	R5852	1-218-990-81	SHORT CHIP	0		
R5519	1-218-933-11	RES-CHIP	22	5%	1/16W	R5854	1-218-929-11	RES-CHIP	10	5%	1/16W
R5800	1-216-805-11	METAL CHIP	47	5%	1/10W	R5855	1-218-929-11	RES-CHIP	10	5%	1/16W
R5801	1-216-805-11	METAL CHIP	47	5%	1/10W	R5856	1-218-929-11	RES-CHIP	10	5%	1/16W
R5802	1-216-805-11	METAL CHIP	47	5%	1/10W	R5857	1-218-929-11	RES-CHIP	10	5%	1/16W
R5803	1-216-805-11	METAL CHIP	47	5%	1/10W	R5858	1-218-929-11	RES-CHIP	10	5%	1/16W
R5806	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5859	1-218-929-11	RES-CHIP	10	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R5860	1-218-929-11	RES-CHIP	10	5%	1/16W	RB5501	1-234-370-21	RES, NETWORK 22	(1005X4)		
R5861	1-218-929-11	RES-CHIP	10	5%	1/16W	RB5502	1-234-370-21	RES, NETWORK 22	(1005X4)		
R5862	1-218-990-81	SHORT CHIP	0			RB5503	1-234-370-21	RES, NETWORK 22	(1005X4)		
R5863	1-218-990-81	SHORT CHIP	0			RB5504	1-234-370-21	RES, NETWORK 22	(1005X4)		
R5865	1-218-929-11	RES-CHIP	10	5%	1/16W	RB5505	1-234-370-21	RES, NETWORK 22	(1005X4)		
R5866	1-218-929-11	RES-CHIP	10	5%	1/16W	RB5506	1-234-370-21	RES, NETWORK 22	(1005X4)		
R5867	1-218-929-11	RES-CHIP	10	5%	1/16W	RB5507	1-234-370-21	RES, NETWORK 22	(1005X4)		
R5868	1-218-929-11	RES-CHIP	10	5%	1/16W	RB5508	1-234-370-21	RES, NETWORK 22	(1005X4)		
R5869	1-218-929-11	RES-CHIP	10	5%	1/16W	RB5509	1-234-370-21	RES, NETWORK 22	(1005X4)		
R5870	1-218-929-11	RES-CHIP	10	5%	1/16W	RB5510	1-234-370-21	RES, NETWORK 22	(1005X4)		
R5871	1-218-929-11	RES-CHIP	10	5%	1/16W	RB5511	1-234-370-21	RES, NETWORK 22	(1005X4)		
R5872	1-218-929-11	RES-CHIP	10	5%	1/16W						
R5873	1-218-990-81	SHORT CHIP	0				< VARISTOR >				
R5874	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	VD4400	1-802-078-11	VARISTOR (SMD)			
R5875	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	VD4401	1-802-078-11	VARISTOR (SMD)			
R5876	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	VD4402	1-802-078-11	VARISTOR (SMD)			
R5877	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	VD4403	1-802-078-11	VARISTOR (SMD)			
R5878	1-218-965-11	RES-CHIP	10K	5%	1/16W	VD4404	1-802-078-11	VARISTOR (SMD)			
R5879	1-218-965-11	RES-CHIP	10K	5%	1/16W						
R5880	1-218-965-11	RES-CHIP	10K	5%	1/16W	VD4405	1-802-078-11	VARISTOR (SMD)			
R5881	1-218-937-11	RES-CHIP	47	5%	1/16W	VD4406	1-802-078-11	VARISTOR (SMD)			
R5882	1-218-937-11	RES-CHIP	47	5%	1/16W	VD5800	1-802-078-11	VARISTOR (SMD)			
R5883	1-218-937-11	RES-CHIP	47	5%	1/16W	VD5801	1-802-078-11	VARISTOR (SMD)			
R5892	1-218-951-11	RES-CHIP	680	5%	1/16W		< CRYSTAL >				
R5893	1-218-937-11	RES-CHIP	47	5%	1/16W	X4000	1-813-784-21	VIBRATOR, CRYSTAL			
R5894	1-218-937-11	RES-CHIP	47	5%	1/16W	X4002	1-813-070-21	PIEZOELECTRIC OSCILLATOR			
R5895	1-218-937-11	RES-CHIP	47	5%	1/16W	X5000	1-813-773-11	VIBRATOR, CRYSTAL			
R5896	1-218-951-11	RES-CHIP	680	5%	1/16W	*A-1144-539-D AE Board, Complete					
R5897	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W		< CAPACITOR >				
R5898	1-218-965-11	RES-CHIP	10K	5%	1/16W	C2008	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
R5899	1-218-951-11	RES-CHIP	680	5%	1/16W	C2009	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
R5900	1-218-937-11	RES-CHIP	47	5%	1/16W	C2013	1-127-715-91	CERAMIC CHIP 0.22UF	10%	16V	
R5901	1-218-937-11	RES-CHIP	47	5%	1/16W	C2015	1-117-681-11	ELECT CHIP 100UF	20.00%	16V	
R5902	1-216-295-91	SHORT CHIP	0			C2016	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
R5906	1-216-864-11	SHORT CHIP	0			C2017	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
< RESISTOR CHIP >						C2018	1-127-715-91	CERAMIC CHIP 0.22UF	10%	16V	
RB4000	1-234-372-11	RES, NETWORK 100	(1005X4)			C2019	1-124-779-00	ELECT CHIP 10UF	20.00%	16V	
RB4001	1-234-372-11	RES, NETWORK 100	(1005X4)			C2020	1-127-715-91	CERAMIC CHIP 0.22UF	10%	16V	
RB4002	1-234-372-11	RES, NETWORK 100	(1005X4)			C2021	1-127-715-91	CERAMIC CHIP 0.22UF	10%	16V	
RB4003	1-234-378-21	RES, NETWORK 10K	(1005X4)			C2022	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
RB4004	1-234-378-21	RES, NETWORK 10K	(1005X4)			C2023	1-117-681-11	ELECT CHIP 100UF	20.00%	16V	
RB4700	1-234-375-21	RES, NETWORK 1K	(1005X4)			C2024	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
RB4701	1-234-375-21	RES, NETWORK 1K	(1005X4)			C2025	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
RB5000	1-234-795-21	RES, NETWORK 0X4	(2010)			C2026	1-125-889-91	CERAMIC CHIP 2.2UF	10%	10V	
RB5001	1-234-795-21	RES, NETWORK 0X4	(2010)			C2033	1-125-889-91	CERAMIC CHIP 2.2UF	10%	10V	
RB5201	1-234-372-11	RES, NETWORK 100	(1005X4)			C2040	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
RB5202	1-234-372-11	RES, NETWORK 100	(1005X4)			C2041	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
RB5203	1-234-372-11	RES, NETWORK 100	(1005X4)			C2042	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
RB5500	1-234-370-21	RES, NETWORK 22	(1005X4)								

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C6001	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7049	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C6003	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C7050	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C6005	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	C7051	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C6011	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7052	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C6014	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	C7053	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C6015	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7054	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C6017	1-126-204-11	ELECT CHIP 47UF	20.00% 16V	C7055	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C6019	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7056	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C6020	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C7057	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C6022	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C7060	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C6027	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C7061	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7002	1-162-928-11	CERAMIC CHIP 120PF	5.00% 50V	C7062	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7004	1-162-906-11	CERAMIC CHIP 1.5PF	0.25PF 50V	C7033	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7005	1-162-906-11	CERAMIC CHIP 1.5PF	0.25PF 50V	C7064	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7007	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	C7065	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7008	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7072	1-128-536-11	ELECT CHIP 100UF	20.00% 25V
C7009	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7073	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C7010	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C7075	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C7011	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C7076	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C7012	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C7082	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7013	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C7083	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V
C7014	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	C7086	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C7015	1-162-960-11	CERAMIC CHIP 220PF	10.00% 50V	C7087	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C7017	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7088	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C7018	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7089	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C7019	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C7090	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C7020	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C7091	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C7021	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7092	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C7023	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7093	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C7024	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7094	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C7025	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7095	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C7027	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7096	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C7028	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C7097	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C7029	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7098	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C7030	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C7099	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C7033	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7100	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C7034	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C7101	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C7035	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7102	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C7036	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7103	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C7037	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7104	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C7038	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C7105	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C7039	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C7106	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C7040	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C7107	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C7042	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7108	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C7043	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7109	1-162-959-11	CERAMIC CHIP 330PF	5.00% 50V
C7044	1-126-204-11	ELECT CHIP 47UF	20.00% 16V	C7110	1-162-959-11	CERAMIC CHIP 330PF	5.00% 50V
C7045	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7111	1-162-959-11	CERAMIC CHIP 330PF	5.00% 50V
C7046	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7112	1-162-959-11	CERAMIC CHIP 330PF	5.00% 50V
C7047	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7113	1-112-797-11	ELECT CHIP 470UF	20% 25V
C7048	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7114	1-112-800-11	ELECT CHIP 100UF	20% 35V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C7115	1-112-800-11	ELECT CHIP 100UF	20% 35V	C9032	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7116	1-112-800-11	ELECT CHIP 100UF	20% 35V	C9043	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7117	1-112-800-11	ELECT CHIP 100UF	20% 35V	C9044	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7118	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9045	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
C7119	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9046	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
C7120	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9047	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C7121	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9048	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C7123	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C9049	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7124	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C9050	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7125	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C9051	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7126	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C9052	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7127	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9057	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7128	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9058	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7147	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9060	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C7148	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9061	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C7600	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C9065	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7601	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9066	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7602	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9067	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7603	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C9068	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7604	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C9069	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7605	1-126-204-11	ELECT CHIP 47UF	20.00% 16V	C9070	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7609	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C9501	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7610	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9502	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7611	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	< CONNECTOR >			
C7612	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	CN7000	*1-819-461-11	HEADER ASSEMBLY FOR PWB 4P	
C7613	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	CN7001	1-780-148-11	CLIP, SHIELD	
C7614	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	CN7002	1-780-148-11	CLIP, SHIELD	
C7615	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	CN7501	1-820-184-11	HEADER ASSEMBLY (PRINT PWB) 7P	
C7616	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	CN7502	1-820-185-11	HEADER ASSEMBLY (PRINT PWB) 8P	
C7617	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	CN7503	1-820-211-11	HEADER ASSEMBLY FOR PWB 5P	
C7618	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	CN9001	1-820-192-11	HEADER ASSEMBLY (PRINT PWB) 15P	
C7619	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	CN9501	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P	
C9001	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	CN9502	1-820-186-11	HEADER ASSEMBLY (PRINT PWB) 9P	
C9003	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	CN9521	1-780-336-11	EARTH TERMINAL	
C9005	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	CN9522	1-780-336-11	EARTH TERMINAL	
C9007	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	CN9523	1-780-336-11	EARTH TERMINAL	
C9009	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	< DIODE >			
C9010	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6001	8-719-074-43	DIODE BAS316-115	
C9011	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D7001	8-719-072-66	DIODE PDZ11B-115	
C9012	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D7004	6-500-334-01	DIODE MC2836-T112-1	
C9013	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D7005	8-719-074-43	DIODE BAS316-115	
C9014	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D7006	8-719-074-43	DIODE BAS316-115	
C9015	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D7007	8-719-074-43	DIODE BAS316-115	
C9016	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D7009	6-500-884-01	DIODE P6SMBJ30A-5	
C9021	1-128-992-21	ELECT CHIP 47UF	20% 25V	D7010	6-500-884-01	DIODE P6SMBJ30A-5	
C9027	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D7011	6-500-884-01	DIODE P6SMBJ30A-5	
C9028	1-128-992-21	ELECT CHIP 47UF	20% 25V	D7012	6-500-884-01	DIODE P6SMBJ30A-5	
C9029	1-128-992-21	ELECT CHIP 47UF	20% 25V				
C9030	1-128-992-21	ELECT CHIP 47UF	20% 25V				
C9031	1-128-992-21	ELECT CHIP 47UF	20% 25V				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

AE

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D7013	8-719-074-43	DIODE BAS316-115		< SOCKET >			
D7602	6-500-334-01	DIODE MC2836-T112-1		J9001	1-695-549-11	SOCKET, PIN 21P	
D7603	6-500-334-01	DIODE MC2836-T112-1		J9002	1-695-549-11	SOCKET, PIN 21P	
D7604	8-719-074-43	DIODE BAS316-115		J9003	*1-819-358-11	PHONO JACK	
D7605	8-719-074-43	DIODE BAS316-115		J9004	1-819-354-11	PHONO JACK 5P	
D9001	8-719-070-63	DIODE PDZ10B-115		< COIL >			
D9002	8-719-072-68	DIODE PDZ13B-115		L2002	1-469-557-21	INDUCTOR	22UH
D9003	8-719-070-63	DIODE PDZ10B-115		L2003	1-469-555-21	INDUCTOR	10UH
D9004	8-719-070-63	DIODE PDZ10B-115		L6001	1-469-555-21	INDUCTOR	10UH
D9005	8-719-070-57	DIODE PDZ5.6B-115		L7001	1-412-990-41	INDUCTOR	8.2UH
D9007	8-719-070-57	DIODE PDZ5.6B-115		L7002	1-400-794-21	FERRITE	0UH
D9008	8-719-070-63	DIODE PDZ10B-115		L7004	1-400-794-21	FERRITE	0UH
D9009	8-719-072-68	DIODE PDZ13B-115		L7005	1-469-555-21	INDUCTOR	10UH
D9010	8-719-070-63	DIODE PDZ10B-115		L7006	1-400-794-21	FERRITE	0UH
D9011	8-719-070-57	DIODE PDZ5.6B-115		L7007	1-469-555-21	INDUCTOR	10UH
D9012	8-719-070-63	DIODE PDZ10B-115		L7008	1-481-083-11	INDUCTOR	22UH
D9013	8-719-070-57	DIODE PDZ5.6B-115		L7009	1-457-106-11	INDUCTOR	10UH
D9015	8-719-070-57	DIODE PDZ5.6B-115		L7010	1-457-106-11	INDUCTOR	10UH
D9016	8-719-070-63	DIODE PDZ10B-115		L7011	1-400-794-21	FERRITE	0UH
D9017	8-719-070-63	DIODE PDZ10B-115		L7012	1-400-794-21	FERRITE	0UH
D9018	8-719-070-63	DIODE PDZ10B-115		L7013	1-400-794-21	FERRITE	0UH
D9019	8-719-070-63	DIODE PDZ10B-115		L9001	1-469-555-21	INDUCTOR	10UH
D9020	8-719-070-63	DIODE PDZ10B-115		L9503	1-400-178-21	FERRITE	0UH
D9021	8-719-070-63	DIODE PDZ10B-115		L9504	1-400-178-21	FERRITE	0UH
D9022	8-719-070-63	DIODE PDZ10B-115		L9505	1-400-178-21	FERRITE	0UH
D9023	8-719-070-63	DIODE PDZ10B-115		< PROTECTOR MODULE >			
D9036	8-719-070-63	DIODE PDZ10B-115		PS7001 Δ	1-576-958-21	FUSE	4A 24V
D9037	8-719-070-63	DIODE PDZ10B-115		< TRANSISTOR >			
D9038	8-719-070-63	DIODE PDZ10B-115		Q2001	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D9039	8-719-070-63	DIODE PDZ10B-115		Q2002	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
< FERRITE BEAD >				Q6001	8-729-600-22	TRANSISTOR 2SA1235-F	
FB7000	1-400-089-21	FERRITE	0UH	Q6002	8-729-600-22	TRANSISTOR 2SA1235-F	
FB7001	1-400-089-21	FERRITE	0UH	Q6004	8-729-600-22	TRANSISTOR 2SA1235-F	
FB7002	1-400-089-21	FERRITE	0UH	Q6008	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
FB7003	1-400-089-21	FERRITE	0UH	Q6009	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
FB7004	1-400-040-22	FERRITE	0UH	Q7000	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
FB7005	1-400-040-22	FERRITE	0UH	Q7001	8-729-600-22	TRANSISTOR 2SA1235-F	
FB7006	1-400-040-22	FERRITE	0UH	Q7002	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
FB7007	1-400-040-22	FERRITE	0UH	Q7005	8-729-600-22	TRANSISTOR 2SA1235-F	
FB7008	1-400-040-22	FERRITE	0UH	Q7007	8-729-029-14	TRANSISTOR DTC144EUA-T106	
FB9003	1-216-864-11	SHORT CHIP	0	Q7008	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
< IC >				Q7009	8-729-600-22	TRANSISTOR 2SA1235-F	
IC2001	8-752-089-33	IC CXA2069Q-TL		Q7010	8-729-029-14	TRANSISTOR DTC144EUA-T106	
IC7001	6-709-191-01	IC MSP4410K-QA-D6-501		Q7011	8-729-029-14	TRANSISTOR DTC144EUA-T106	
IC7003	8-759-278-58	IC NJM4558V-TE2		Q7012	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16	
IC7007	6-709-285-01	IC M61571AFP-DF0T		Q7013	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16	
IC7601	8-759-278-58	IC NJM4558V-TE2					
IC7602	8-759-359-49	IC NJM3414AV(Te2)					

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
Q7014	8-729-600-22	TRANSISTOR 2SA1235-F		R6001	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
Q7015	8-729-600-22	TRANSISTOR 2SA1235-F		R6002	1-216-809-11	METAL CHIP 100 5%	1/10W
Q7016	8-729-600-22	TRANSISTOR 2SA1235-F		R6003	1-216-864-11	SHORT CHIP 0	
Q7017	8-729-600-22	TRANSISTOR 2SA1235-F		R6004	1-218-855-11	METAL CHIP 2.2K 0.5%	1/10W
Q7018	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6009	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
Q7019	8-729-029-14	TRANSISTOR DTC144EUA-T106		R6017	1-216-857-11	METAL CHIP 1M 5%	1/10W
Q7020	8-729-029-14	TRANSISTOR DTC144EUA-T106		R6021	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
Q7021	8-729-028-96	TRANSISTOR DTC114EUA-T106		R6025	1-218-857-11	METAL CHIP 2.7K 0.5%	1/10W
Q7022	8-729-028-96	TRANSISTOR DTC114EUA-T106		R6028	1-218-861-11	METAL CHIP 3.9K 0.5%	1/10W
Q7602	8-729-600-22	TRANSISTOR 2SA1235-F		R6031	1-216-864-11	SHORT CHIP 0	
Q7603	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		R6032	1-216-857-11	METAL CHIP 1M 5%	1/10W
Q7604	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		R6034	1-216-864-11	SHORT CHIP 0	
Q7605	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6037	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q7606	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		R6039	1-216-815-11	METAL CHIP 330 5%	1/10W
Q7607	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		R6040	1-216-864-11	SHORT CHIP 0	
Q7608	8-729-029-14	TRANSISTOR DTC144EUA-T106		R6051	1-216-864-11	SHORT CHIP 0	
Q7609	8-729-600-22	TRANSISTOR 2SA1235-F		R6940	1-216-864-11	SHORT CHIP 0	
Q7610	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6942	1-216-864-11	SHORT CHIP 0	
Q7611	8-729-029-14	TRANSISTOR DTC144EUA-T106		R6943	1-216-864-11	SHORT CHIP 0	
Q9001	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6946	1-216-864-11	SHORT CHIP 0	
Q9002	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6947	1-216-864-11	SHORT CHIP 0	
< RESISTOR >				R6948	1-216-864-11	SHORT CHIP 0	
R2002	1-216-821-11	METAL CHIP 1K 5%	1/10W	R6962	1-216-864-11	SHORT CHIP 0	
R2003	1-216-821-11	METAL CHIP 1K 5%	1/10W	R6963	1-216-864-11	SHORT CHIP 0	
R2004	1-216-864-11	SHORT CHIP 0		R7000	1-216-864-11	SHORT CHIP 0	
R2005	1-216-864-11	SHORT CHIP 0		R7001	1-216-821-11	METAL CHIP 1K 5%	1/10W
R2006	1-216-809-11	METAL CHIP 100 5%	1/10W	R7004	1-216-841-11	METAL CHIP 47K 5%	1/10W
R2007	1-216-809-11	METAL CHIP 100 5%	1/10W	R7007	1-216-805-11	METAL CHIP 47 5%	1/10W
R2010	1-216-864-11	SHORT CHIP 0		R7008	1-216-864-11	SHORT CHIP 0	
R2011	1-216-864-11	SHORT CHIP 0		R7010	1-216-821-11	METAL CHIP 1K 5%	1/10W
R2012	1-216-864-11	SHORT CHIP 0		R7011	1-216-845-11	METAL CHIP 100K 5%	1/10W
R2014	1-216-864-11	SHORT CHIP 0		R7012	1-216-864-11	SHORT CHIP 0	
R2015	1-216-864-11	SHORT CHIP 0		R7014	1-216-841-11	METAL CHIP 47K 5%	1/10W
R2017	1-216-864-11	SHORT CHIP 0		R7015	1-216-841-11	METAL CHIP 47K 5%	1/10W
R2019	1-216-809-11	METAL CHIP 100 5%	1/10W	R7017	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2020	1-216-809-11	METAL CHIP 100 5%	1/10W	R7018	1-400-499-21	FERRITE 0UH	
R2023	1-216-821-11	METAL CHIP 1K 5%	1/10W	R7019	1-400-499-21	FERRITE 0UH	
R2024	1-216-821-11	METAL CHIP 1K 5%	1/10W	R7020	1-216-841-11	METAL CHIP 47K 5%	1/10W
R2025	1-216-864-11	SHORT CHIP 0		R7022	1-216-864-11	SHORT CHIP 0	
R2026	1-216-864-11	SHORT CHIP 0		R7025	1-216-864-11	SHORT CHIP 0	
R2027	1-216-864-11	SHORT CHIP 0		R7031	1-218-863-11	METAL CHIP 4.7K 0.5%	1/10W
R2028	1-216-864-11	SHORT CHIP 0		R7032	1-218-875-11	METAL CHIP 15K 0.5%	1/10W
R2029	1-216-864-11	SHORT CHIP 0		R7033	1-218-863-11	METAL CHIP 4.7K 0.5%	1/10W
R2030	1-216-809-11	METAL CHIP 100 5%	1/10W	R7034	1-218-875-11	METAL CHIP 15K 0.5%	1/10W
R2035	1-216-809-11	METAL CHIP 100 5%	1/10W	R7035	1-216-845-11	METAL CHIP 100K 5%	1/10W
R2037	1-216-817-11	METAL CHIP 470 5%	1/10W	R7037	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2038	1-216-817-11	METAL CHIP 470 5%	1/10W	R7039	1-218-873-11	METAL CHIP 12K 0.5%	1/10W
R2039	1-216-864-11	SHORT CHIP 0		R7040	1-218-875-11	METAL CHIP 15K 0.5%	1/10W
				R7041	1-216-833-11	METAL CHIP 10K 5%	1/10W
				R7045	1-216-833-11	METAL CHIP 10K 5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R7047	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7143	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7049	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7144	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7050	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R7145	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7054	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7146	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7055	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7147	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7056	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R7152	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7057	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R7153	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7059	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R7154	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7061	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R7155	1-216-864-11	SHORT CHIP	0		
R7062	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W	R7156	1-216-841-11	METAL CHIP	47K	5%	1/10W
R7063	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W	R7158	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7064	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R7501	1-216-864-11	SHORT CHIP	0		
R7066	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R7505	1-216-864-11	SHORT CHIP	0		
R7067	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7600	1-216-864-11	SHORT CHIP	0		
R7087	1-216-857-11	METAL CHIP	1M	5%	1/10W	R7601	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R7088	1-216-837-11	METAL CHIP	22K	5%	1/10W	R7602	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R7093	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7603	1-218-873-11	METAL CHIP	12K	0.5%	1/10W
R7101	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7604	1-218-875-11	METAL CHIP	15K	0.5%	1/10W
R7102	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7605	1-216-841-11	METAL CHIP	47K	5%	1/10W
R7103	1-218-865-11	METAL CHIP	5.6K	0.5%	1/10W	R7606	1-216-841-11	METAL CHIP	47K	5%	1/10W
R7111	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7614	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7112	1-216-864-11	SHORT CHIP	0			R7615	1-218-873-11	METAL CHIP	12K	0.5%	1/10W
R7113	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R7620	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R7114	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W	R7621	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W
R7115	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R7622	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W
R7116	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W	R7623	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R7117	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7626	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7118	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R7627	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7119	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R7628	1-216-844-11	METAL CHIP	82K	5%	1/10W
R7120	1-216-864-11	SHORT CHIP	0			R7629	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R7122	1-216-864-11	SHORT CHIP	0			R7630	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R7124	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R7631	1-216-844-11	METAL CHIP	82K	5%	1/10W
R7125	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R7632	1-218-887-11	METAL CHIP	47K	0.5%	1/10W
R7126	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R7633	1-218-887-11	METAL CHIP	47K	0.5%	1/10W
R7127	1-218-879-11	METAL CHIP	22K	0.5%	1/10W	R7634	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W
R7128	1-218-901-11	METAL CHIP	180K	0.5%	1/10W	R7635	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W
R7129	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R7636	1-216-837-11	METAL CHIP	22K	5%	1/10W
R7130	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R7637	1-216-857-11	METAL CHIP	1M	5%	1/10W
R7131	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R7639	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7132	1-218-895-11	METAL CHIP	100K	0.5%	1/10W	R7641	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R7133	1-218-895-11	METAL CHIP	100K	0.5%	1/10W	R7642	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R7134	1-216-296-11	SHORT CHIP	0			R7643	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7135	1-216-296-11	SHORT CHIP	0			R7644	1-216-813-11	METAL CHIP	220	5%	1/10W
R7136	1-216-296-11	SHORT CHIP	0			R7646	1-216-813-11	METAL CHIP	220	5%	1/10W
R7137	1-216-296-11	SHORT CHIP	0			R7650	1-216-841-11	METAL CHIP	47K	5%	1/10W
R7138	1-216-800-11	METAL CHIP	18	5%	1/10W	R7651	1-216-864-11	SHORT CHIP	0		
R7139	1-216-800-11	METAL CHIP	18	5%	1/10W	R7652	1-216-864-11	SHORT CHIP	0		
R7140	1-216-800-11	METAL CHIP	18	5%	1/10W	R7653	1-216-864-11	SHORT CHIP	0		
R7141	1-216-800-11	METAL CHIP	18	5%	1/10W	R7654	1-216-841-11	METAL CHIP	47K	5%	1/10W
R7142	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7655	1-216-829-11	METAL CHIP	4.7K	5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R7656	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R9041	1-216-864-11	SHORT CHIP	0		
R7657	1-216-837-11	METAL CHIP	22K	5%	1/10W	R9042	1-216-809-11	METAL CHIP	100	5%	1/10W
R7658	1-216-857-11	METAL CHIP	1M	5%	1/10W	R9044	1-216-809-11	METAL CHIP	100	5%	1/10W
R7659	1-216-833-11	METAL CHIP	10K	5%	1/10W	R9045	1-216-809-11	METAL CHIP	100	5%	1/10W
R7660	1-216-841-11	METAL CHIP	47K	5%	1/10W	R9046	1-216-817-11	METAL CHIP	470	5%	1/10W
R7661	1-216-864-11	SHORT CHIP	0			R9047	1-216-813-11	METAL CHIP	220	5%	1/10W
R7662	1-216-841-11	METAL CHIP	47K	5%	1/10W	R9048	1-216-864-11	SHORT CHIP	0		
R7663	1-216-833-11	METAL CHIP	10K	5%	1/10W	R9049	1-216-813-11	METAL CHIP	220	5%	1/10W
R7676	1-216-864-11	SHORT CHIP	0			R9050	1-216-864-11	SHORT CHIP	0		
R7679	1-216-864-11	SHORT CHIP	0			R9051	1-216-809-11	METAL CHIP	100	5%	1/10W
R7682	1-216-864-11	SHORT CHIP	0			R9053	1-216-809-11	METAL CHIP	100	5%	1/10W
R7683	1-216-864-11	SHORT CHIP	0			R9054	1-216-809-11	METAL CHIP	100	5%	1/10W
R7684	1-216-864-11	SHORT CHIP	0			R9055	1-216-809-11	METAL CHIP	100	5%	1/10W
R7685	1-216-864-11	SHORT CHIP	0			R9056	1-216-817-11	METAL CHIP	470	5%	1/10W
R9001	1-216-864-11	SHORT CHIP	0			R9057	1-216-809-11	METAL CHIP	100	5%	1/10W
R9002	1-216-864-11	SHORT CHIP	0			R9058	1-216-809-11	METAL CHIP	100	5%	1/10W
R9005	1-218-285-11	METAL CHIP	75	5%	1/10W	R9059	1-216-809-11	METAL CHIP	100	5%	1/10W
R9006	1-218-285-11	METAL CHIP	75	5%	1/10W	R9060	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R9007	1-216-815-11	METAL CHIP	330	5%	1/10W	R9061	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R9008	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9062	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9009	1-216-815-11	METAL CHIP	330	5%	1/10W	R9063	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9010	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9064	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9011	1-216-815-11	METAL CHIP	330	5%	1/10W	R9065	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9012	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9066	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9013	1-216-815-11	METAL CHIP	330	5%	1/10W	R9067	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9014	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9068	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9015	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9069	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9017	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9070	1-218-873-11	METAL CHIP	12K	0.5%	1/10W
R9018	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9071	1-218-873-11	METAL CHIP	12K	0.5%	1/10W
R9019	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9072	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9020	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9073	1-216-809-11	METAL CHIP	100	5%	1/10W
R9021	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9074	1-216-819-11	METAL CHIP	680	5%	1/10W
R9023	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9075	1-216-819-11	METAL CHIP	680	5%	1/10W
R9024	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9086	1-216-864-11	SHORT CHIP	0		
R9025	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9088	1-216-849-11	METAL CHIP	220K	5%	1/10W
R9026	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9089	1-216-849-11	METAL CHIP	220K	5%	1/10W
R9027	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9095	1-216-864-11	SHORT CHIP	0		
R9028	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9096	1-216-864-11	SHORT CHIP	0		
R9029	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9104	1-216-864-11	SHORT CHIP	0		
R9030	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9105	1-216-864-11	SHORT CHIP	0		
R9031	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9106	1-216-864-11	SHORT CHIP	0		
R9032	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9107	1-216-864-11	SHORT CHIP	0		
R9033	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9109	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9034	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9110	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9035	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9111	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9036	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9112	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9037	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9113	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9038	1-216-813-11	METAL CHIP	220	5%	1/10W	R9114	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9039	1-216-864-11	SHORT CHIP	0			R9115	1-216-801-11	METAL CHIP	22	5%	1/10W
R9040	1-216-813-11	METAL CHIP	220	5%	1/10W	R9116	1-216-801-11	METAL CHIP	22	5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK		
R9117	1-216-801-11	METAL CHIP	22	5%	1/10W
R9122	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9123	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9124	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9125	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9126	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9127	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9128	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9129	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9130	1-216-815-11	METAL CHIP	330	5%	1/10W
R9131	1-216-815-11	METAL CHIP	330	5%	1/10W
R9135	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9136	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9137	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9138	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9139	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9140	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9141	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9142	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9143	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9144	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9145	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9146	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9147	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9150	1-216-864-11	SHORT CHIP	0		
R9151	1-216-864-11	SHORT CHIP	0		
R9152	1-216-864-11	SHORT CHIP	0		
R9153	1-216-864-11	SHORT CHIP	0		
R9154	1-216-864-11	SHORT CHIP	0		
R9155	1-216-864-11	SHORT CHIP	0		
R9156	1-216-864-11	SHORT CHIP	0		
R9157	1-216-864-11	SHORT CHIP	0		
R9158	1-216-864-11	SHORT CHIP	0		
R9501	1-216-864-11	SHORT CHIP	0		
R9502	1-216-864-11	SHORT CHIP	0		
R9506	1-216-864-11	SHORT CHIP	0		
R9541	1-216-864-11	SHORT CHIP	0		
R9546	1-216-809-11	METAL CHIP	100	5%	1/10W
R9547	1-216-809-11	METAL CHIP	100	5%	1/10W
< VARISTOR >					
VD9013	8-719-070-63	DIODE PDZ10B-115			
VD9014	8-719-070-63	DIODE PDZ10B-115			
VD9015	8-719-070-63	DIODE PDZ10B-115			
VD9016	8-719-070-63	DIODE PDZ10B-115			
VD9017	8-719-070-63	DIODE PDZ10B-115			
VD9018	8-719-070-63	DIODE PDZ10B-115			
VD9025	1-802-082-11	VARISTOR (SMD)			
VD9026	1-802-082-11	VARISTOR (SMD)			

REF.NO.	PART.NO	DESCRIPTION	REMARK		
< CRYSTAL >					
X7000	1-795-612-11	VIBRATOR, CRYSTAL			
*A-1172-590-D H1E Board, Complete					
< CONNECTOR >					
CN101	*1-819-445-11	HEADER ASSEMBLY FOR PWB 3P			
< RESISTOR >					
R101	1-218-848-11	METAL CHIP	1.1K	0.5%	1/10W
R102	1-218-841-11	METAL CHIP	560	0.5%	1/10W
R103	1-218-835-11	METAL CHIP	330	0.5%	1/10W
R104	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R105	1-218-827-11	METAL CHIP	150	0.5%	1/10W
< SWITCH >					
S101	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
S102	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
S103	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
S104	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
S105	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
S106	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
S107	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
*A-1172-592-D H3E Board, Complete					
< CAPACITOR >					
C302	1-162-960-11	CERAMIC CHIP 220PF	10.00%	50V	
C303	1-119-667-11	CERAMIC CHIP 22UF		10V	
C305	1-165-908-11	CERAMIC CHIP 1UF	10%	10V	
C307	1-107-826-11	CERAMIC CHIP 0.1UF	10.00%	16V	
C308	1-126-205-11	ELECT CHIP 47UF	20.00%	6.3V	
< CONNECTOR >					
CN301	1-820-187-11	HEADER ASSEMBLY (PRINT PWB)10P			
< DIODE >					
D302	8-719-085-26	DIODE CL-165HR/SYG-D-T			
D305	8-719-085-26	DIODE CL-165HR/SYG-D-T			
D308	6-500-817-01	DIODE (LED) SML-512UWT86			
< IC >					
IC301	6-600-502-01	HIC GP1UE26RK0VF			
IC302	6-600-447-01	IC TPS853(SONY)			
< TRANSISTOR >					
Q301	8-729-028-96	TRANSISTOR DTC114EUA-T106			
Q302	8-729-028-96	TRANSISTOR DTC114EUA-T106			
Q303	8-729-028-96	TRANSISTOR DTC114EUA-T106			

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
Q304	8-729-028-96	TRANSISTOR DTC114EUA-T106		< SOCKET >			
Q305	8-729-028-96	TRANSISTOR DTC114EUA-T106		J201	1-780-368-11	S TERMINAL BLOCK (RIGHT ANGLE)	
Q306	8-729-602-36	TRANSISTOR 2SA1602-F		J202	1-815-325-11	JACK	
< RESISTOR >				< RESISTOR >			
R301	1-216-819-11	METAL CHIP 680 5% 1/10W		R202	1-216-864-11	SHORT CHIP 0	
R302	1-216-815-11	METAL CHIP 330 5% 1/10W		R205	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R303	1-216-819-11	METAL CHIP 680 5% 1/10W		R206	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R304	1-216-815-11	METAL CHIP 330 5% 1/10W		R207	1-218-831-11	METAL CHIP 220 0.5% 1/10W	
R305	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		R208	1-218-831-11	METAL CHIP 220 0.5% 1/10W	
R306	1-216-817-11	METAL CHIP 470 5% 1/10W		R209	1-218-285-11	METAL CHIP 75 5% 1/10W	
R307	1-216-805-11	METAL CHIP 47 5% 1/10W		R210	1-218-831-11	METAL CHIP 220 0.5% 1/10W	
R309	1-216-839-11	METAL CHIP 33K 5% 1/10W		R211	1-218-831-11	METAL CHIP 220 0.5% 1/10W	
R310	1-216-821-11	METAL CHIP 1K 5% 1/10W		R212	1-216-797-11	METAL CHIP 10 5% 1/10W	
R311	1-216-833-11	METAL CHIP 10K 5% 1/10W		R213	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R313	1-216-849-11	METAL CHIP 220K 5% 1/10W		R214	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R314	1-216-849-11	METAL CHIP 220K 5% 1/10W		R215	1-216-809-11	METAL CHIP 100 5% 1/10W	
R315	1-216-864-11	SHORT CHIP 0		R216	1-216-809-11	METAL CHIP 100 5% 1/10W	
R316	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		R217	1-216-821-11	METAL CHIP 1K 5% 1/10W	
*A-1152-233-D H2E Board, Complete (32/40 inch only)				R218	1-216-821-11	METAL CHIP 1K 5% 1/10W	
< CAPACITOR >				R219	1-216-809-11	METAL CHIP 100 5% 1/10W	
C201	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		R220	1-216-797-11	METAL CHIP 10 5% 1/10W	
C202	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		R222	1-216-853-11	METAL CHIP 470K 5% 1/10W	
C203	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		R223	1-216-853-11	METAL CHIP 470K 5% 1/10W	
C204	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		R224	1-218-831-11	METAL CHIP 220 0.5% 1/10W	
C205	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V		R225	1-218-831-11	METAL CHIP 220 0.5% 1/10W	
C206	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		< VARISTOR >			
C207	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		VD201	1-802-082-11	VARISTOR (SMD)	
C208	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		VD202	1-802-082-11	VARISTOR (SMD)	
C209	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		VD203	1-802-082-11	VARISTOR (SMD)	
C210	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V					
C211	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V					
C212	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V					
C215	1-115-416-11	CERAMIC CHIP 0.001UF 5.00% 25V					
< CONNECTOR >							
CN201	1-820-192-11	HEADER ASSEMBLY (PRINT PWB)15P					
< DIODE >							
D201	8-719-070-63	DIODE PDZ10B-115					
D202	8-719-070-63	DIODE PDZ10B-115					
D203	8-719-070-63	DIODE PDZ10B-115					
D204	8-719-070-63	DIODE PDZ10B-115					
D205	8-719-070-63	DIODE PDZ10B-115					
D206	8-719-070-63	DIODE PDZ10B-115					

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
MISCELLANEOUS							
	1-826-363-11	LOUDSPEAKER (4.2X15CM) (32S2510/S2520/S2530 UK/AEP)		*1-910-027-15	CONNECTOR ASSY 3P (CN1007-CN101(1)) (40S2510/30 UK/AEP)		
	1-826-362-11	LOUDSPEAKER (5.5X15.5CM) (40S2510/S2530 UK/AEP)		*1-910-030-59	CONNECTOR ASSY 15P (CN9001-CN201(1)) (40S2510/30 UK/AEP)		
	1-826-435-11	LOUDSPEAKER (13X7CM) (46S2510/S2530 UK/AEP)		*1-910-025-84	CONNECTOR ASSY 3P (CN101-CN1007(1)) (46S2510/30 UK/AEP)		
	1-802-261-11	LCD PANEL (32S2510/S2520/S2530 UK/AEP)					
	1-802-267-11	LCD PANEL (40S2510/S2530 UK/AEP)		*1-910-025-86	CONNECTOR ASSY 10P (CN301-CN1008(1)) (46S2510/30 UK/AEP)		
	1-802-133-41	LCD PANEL (46S2510/S2530 UK/AEP)		*1-910-025-88	CONNECTOR ASSY 14P (CN6200-CN1002(1), CN6200-CN7503(0)) (46S2510/30 UK/AEP)		
	8-597-598-00	TUNER UNIT, DIGITAL BYD-HF441Z		*1-910-025-89	CONNECTOR ASSY 12P (CN6202-CN401(1), CN6202-CN7009(0)) (46S2510/30 UK/AEP)		
Δ	1-819-729-14	INLET, AC (WITH NOISE FILTER)					
	*1-468-980-21	G1 BOARD COMPLETE (32S2510/S2520/S2530 UK/AEP)		*1-910-025-90	CONNECTOR ASSY 10P (CN6204-CN201(1)) (46S2510/30 UK/AEP)		
Δ	1-832-210-11	POWER-SUPPLY CORD SET (32S2510/S2520/S2530 & 40/46S2510/S2530 UK)		*1-910-026-77	CONNECTOR ASSY 15P (CN201-CN9001(1)) (46S2510/30 UK/AEP)		
Δ	1-832-211-11	POWER-SUPPLY CORD SET (32S2510/S2520/S2530 & 40/46S2510/S2530 AEP)		*1-910-027-05	SP CONNECTOR ASSY (CN7000-SPEAKER L(1), CN7000-SPEAKER R(0)) (46S2510/30 UK/AEP)		
ACCESSORIES AND CONNECTORS							
	1-769-175-21	ANTENNA CABLE		2-894-287-11	INSTRUCTION MANUAL (UK) (ENGLISH)		
	*1-832-389-11	HARNESS WITH CONNECTOR (LVDS) (CN101-CN5000(1))		2-894-287-21	INSTRUCTION MANUAL (AEP) (GERMAN/FRENCH/ITALIAN/DUTCH)		
	*1-910-025-32	CONNECTOR ASSY 6P (CN3904-CN7501(1))		2-894-287-31	INSTRUCTION MANUAL (AEP) (SPANISH/ PORTUGUESE/GREEK)		
	*1-910-025-33	CONNECTOR ASSY 7P (CN3401-CN7502(1))					
	*1-910-025-35	CONNECTOR ASSY 30P (CN3600-CN3901(1))		2-894-287-41	INSTRUCTION MANUAL (AEP) (ENGLISH/ RUSSIAN/POLISH)		
	*1-910-025-36	CONNECTOR ASSY 9P (CN7008-CN9502(1))		2-894-287-51	INSTRUCTION MANUAL (AEP) (SWEDISH/ DANISH/FINNISH/NORWEGIAN)		
	*1-910-025-37	CONNECTOR ASSY 10P (CN1700-CN3903(1))					
	*1-910-025-38	CONNECTOR ASSY 1P (R VESA-G2 BOARD (1))					
	*1-910-025-39	CONNECTOR ASSY (FFC) 20P (CN4700-CN3400(1))					
	*1-910-025-63	FFC CONNECTOR ASSY 49P (CN1001-CN9501(1))					
	*1-910-027-14	CONNECTOR ASSY 12P (CN1701-CN3802(1))					
	*1-910-025-76	CONNECTOR ASSY 3P (CN1007-CN101(1)) (32S2510/20/30 UK/AEP)					
	*1-910-025-77	CONNECTOR ASSY 10P (CN1008-CN301(1)) (32S2510/20/30 UK/AEP)					
	*1-910-025-78	CONNECTOR ASSY 14P (CN6202-CN1002(1), CN6202-CN7503(0)) (32S2510/20/30 UK/AEP)					
	*1-910-025-79	CONNECTOR ASSY 12P (CN6203-CN7009(1), CN6203-CN8001(0)) (32S2510/20/30 UK/AEP)					
	*1-910-026-79	SP CONNECTOR ASSY (CN7000-SP, RL(1)) (32S2510/20/30 UK/AEP)					
	*1-910-028-20	CONNECTOR ASSY 15P (CN9001-CN201(1)) (32S2510/20/30 UK/AEP)					
	*1-910-025-81	CONNECTOR ASSY 10P (CN1008-CN301(1)) (40S2510/30 UK/AEP)					
	*1-910-025-82	CONNECTOR ASSY 14P (CN6200-CN1002(1), CN6200-CN7503(0)) (40S2510/30 UK/AEP)					
	*1-910-025-83	CONNECTOR ASSY 12P (CN6202-CN7009(1), CN6202-CN1(0)) (40S2510/30 UK/AEP)					
	*1-910-026-78	SP CONNECTOR ASSY (CN7000-SP, RL(1)) (40S2510/30 UK/AEP)					
				REMOTE COMMANDER			
				1-479-978-11	REMOTE COMMANDER (RM-ED008)		

