

SECTION 5 EXPLODED VIEWS


Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la secu

NOTE :

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.


Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

5-1. CHASSIS

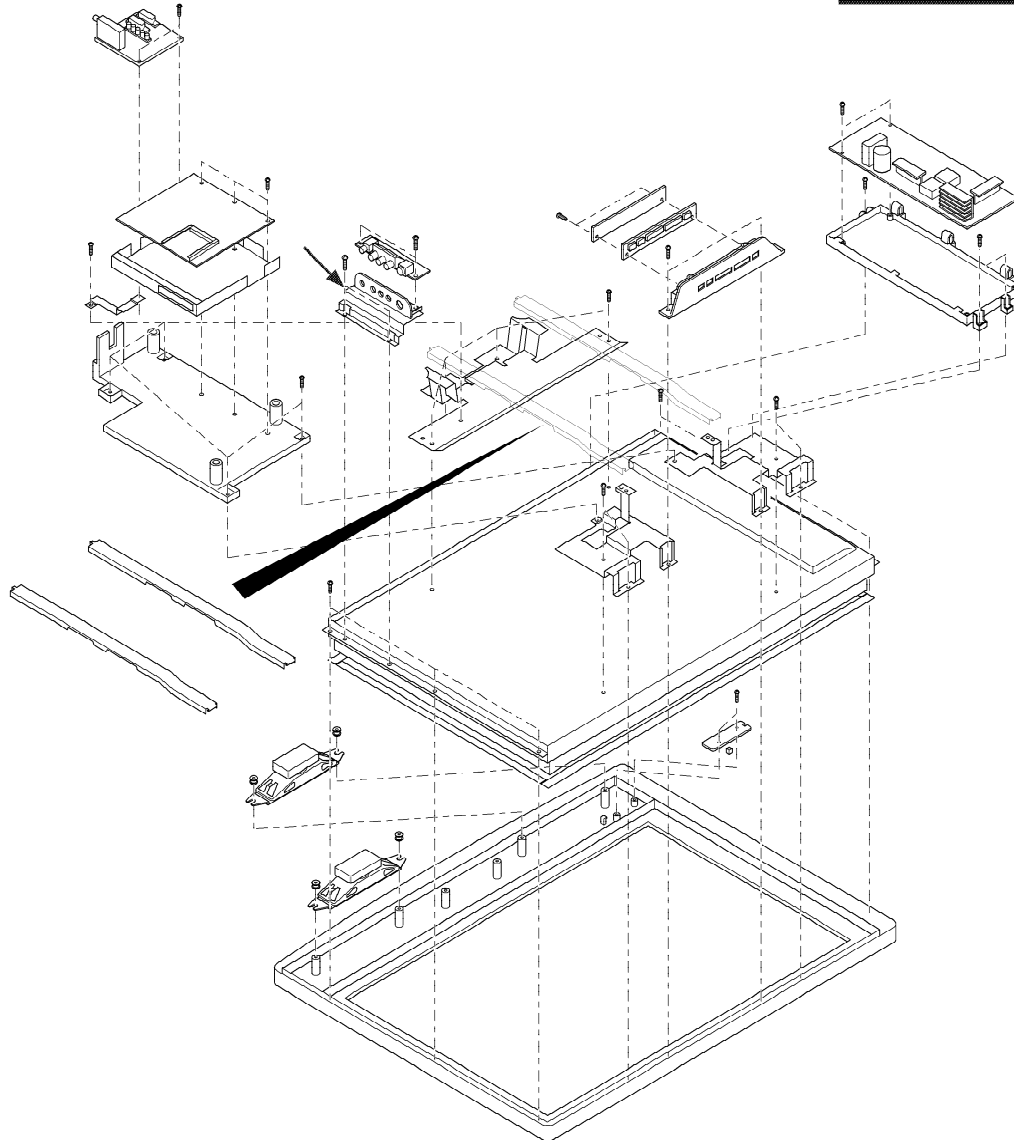

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
1	X-2109-945-1	BEZEL ASSY (26) SILVER (26U2000UK/AEP)					
	X-2177-005-1	BEZEL ASSY (26) GREY (26U2000UK/AEP)					
	X-2109-674-1	BEZEL ASSY (32) SILVER (32U2000UK/AEP)					
	X-2176-987-1	BEZEL ASSY (32) GREY (32U2000UK/AEP)					
	X-2109-938-1	BEZEL ASSY (40) SILVER (40U2000UK/AEP)					
	X-2177-008-1	BEZEL ASSY (40) GREY (40U2000UK/AEP)					
2	1-826-479-11	LOUDSPEAKER (4.2X15CM) (26/32U2000UK/AEP)					
	1-826-478-11	LOUDSPEAKER (4.2X24CM) (40U2000UK/AEP)					
3	*2-674-183-01	VESA BRACKET (26/32U2000UK/AEP)					
	*X-2109-059-3	VESA BRACKET (40) R ASSY (40U2000UK/AEP)					
4	*2-674-183-01	VESA BRACKET (26/32U2000UK/AEP)					
	*X-2109-058-3	VESA BRACKET (40) L ASSY (40U2000UK/AEP)					
5	*2-679-993-01	BRACKET (A) DIG					
6	*2-674-192-01	BRACKET, TERMINAL SIDE					
7	Δ *A-1198-236-A	BDT BOARD, COMPLETE (40U2000UK/AEP)					
8	*A-1189-407-A	A1 BOARD, COMPLETE (26/32U2000UK/AEP)					
	*A-1202-962-A	A1P BOARD, COMPLETE (40U2000UK/AEP)					
9	8-597-585-00	TUNER, FSS BTP-HC401					

5-1. CHASSIS Cont.

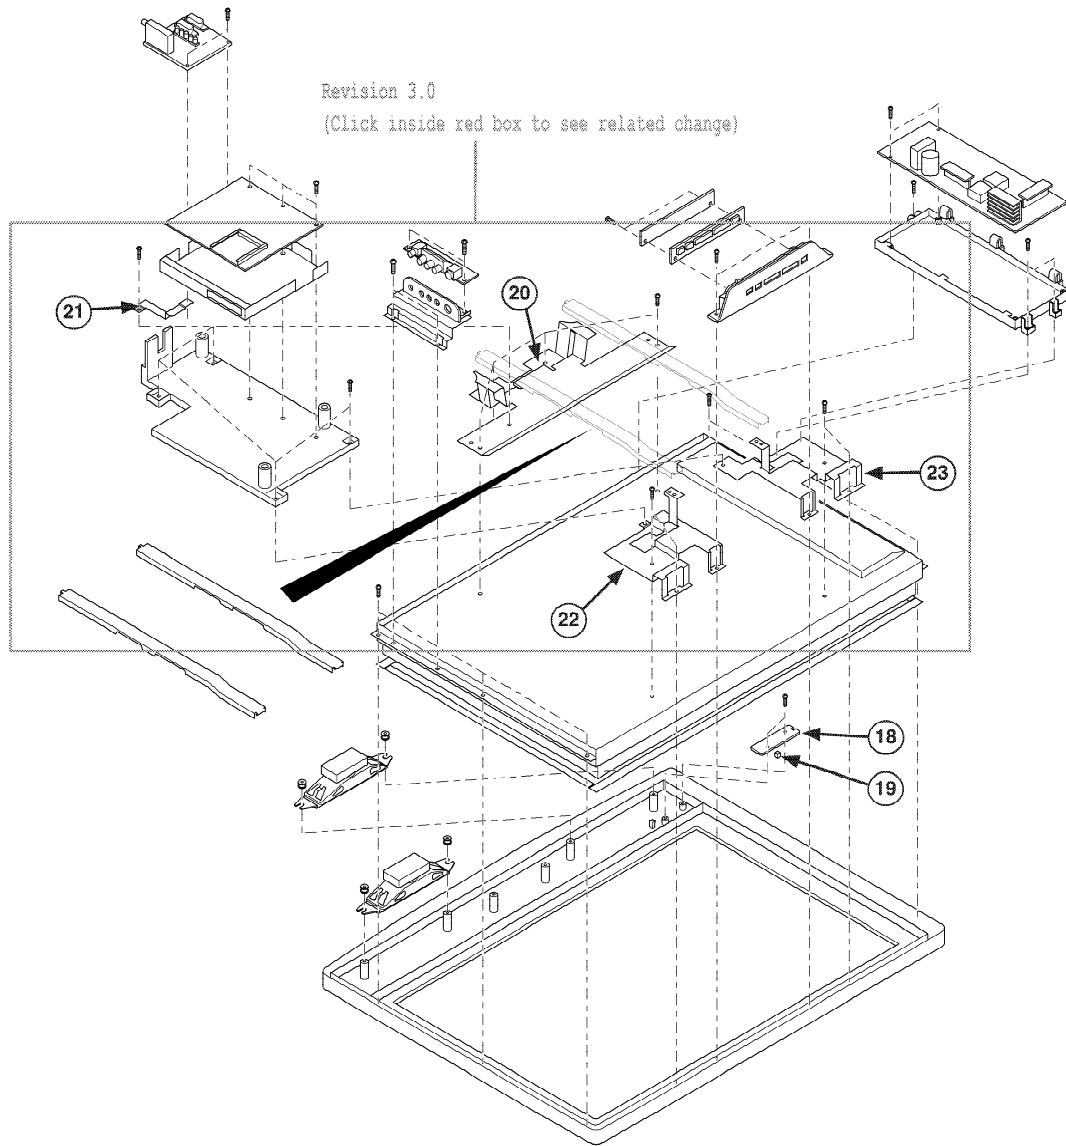


REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
18	*A-1189-410-A	H3 BOARD, COMPLETE (26/32U2000UK/AEP)					
	*A-1202-965-A	H3P BOARD, COMPLETE (40U2000UK/AEP)					
19	2-674-189-01	GUIDE, LIGHT					
20		NOT SERVICEABLE PART					
21		NOT SERVICEABLE PART					
22		NOT SERVICEABLE PART					
23		NOT SERVICEABLE PART					

Revision 3.0
(Click inside red box to see related change)

Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

5-2. STAND, REAR COVER, POWER LEADS

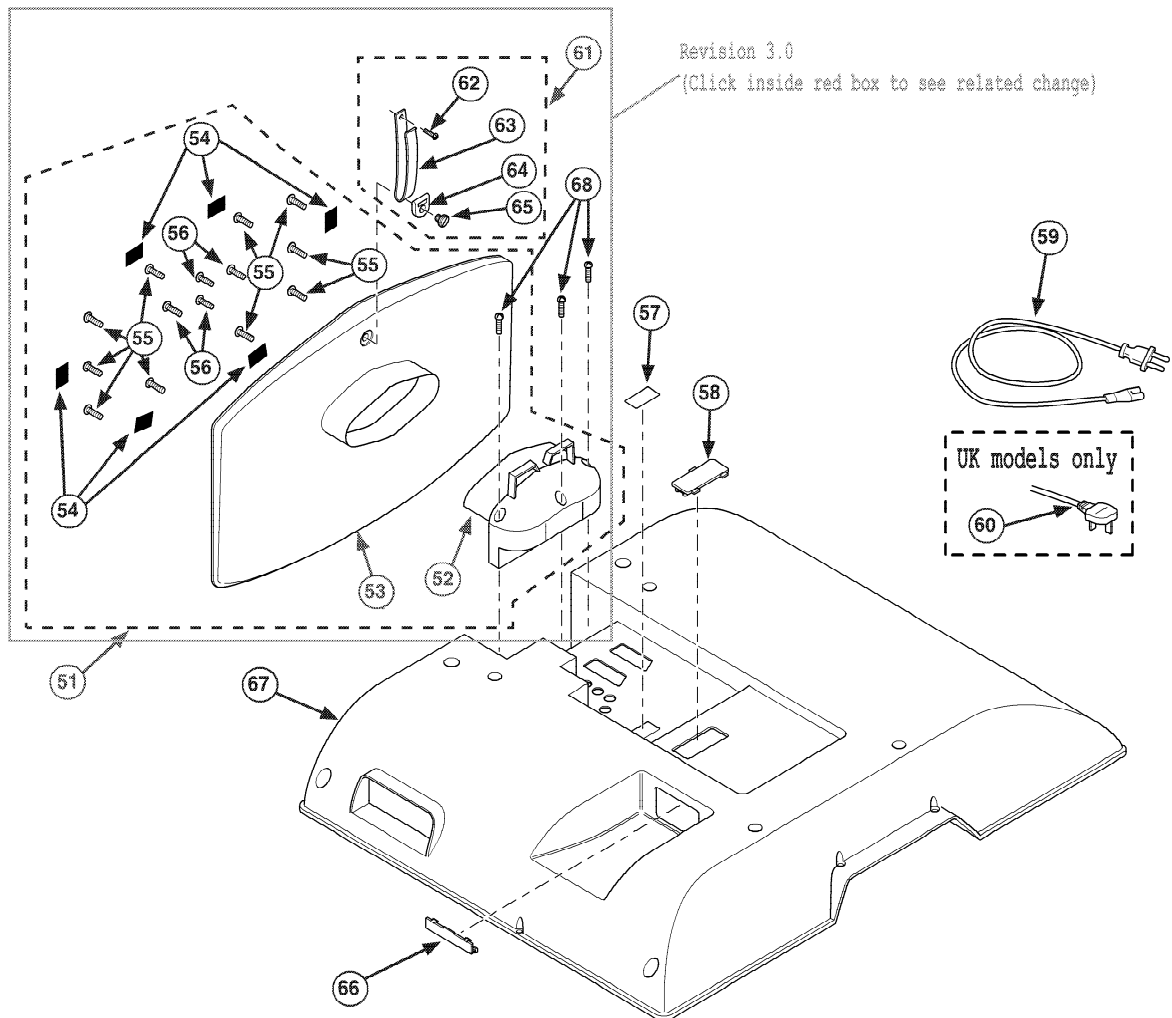

Revision 3.0
(Click inside red box to see related change)

Revision 3.0
(Click inside red box to see related change)

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
51	*X-2177-004-1	STAND (M) ASSY 26	(26U2000UK/AEP) 52-56	59	Δ 1-832-132-11	POWER SUPPLY CORD (26/32/40U2000AEP)	
	*X-2176-991-1	STAND (M) ASSY 32	(32U2000UK/AEP) 52-56	60	Δ 1-832-170-11	POWER SUPPLY CORD (UK PLUG)	
	*X-2177-007-1	STAND (L) ASSY 40	(40U2000UK/AEP) 52-56			(26/32/40U2000UK)	
52	*2-674-301-11	NECK, STAND	(26U2000UK/AEP)	61	*X-2102-511-2	BAG ASSY, RUDDER LOCK	(62-65)
	*2-674-301-01	NECK, STAND	(32U2000UK/AEP)	62	*2-580-663-01	SCREW, WOOD 3.8X20	
	*2-674-301-22	NECK, STAND	(40U2000UK/AEP)	63	*2-591-689-01	BELT	
53	2-674-194-21	COVER, STAND (M)	(26/32U2000UK/AEP)	64	*2-591-688-02	RUDDER LOCK	
	2-674-314-01	COVER, STAND (L)	(40U2000UK/AEP)	65	*2-593-320-02	SCREW, COIN (M6X18)	
54	4-100-951-02	FOOT, STAND		66	2-667-975-01	COVER, PCMCIA	
55	2-580-644-01	SCREW, KTP2 3X8	(26/32U2000UK/AEP)	67	2-674-304-03	COVER, REAR (26)	(26U2000UK/AEP)
	2-580-647-01	SCREW, KTP2 4X12	(40U2000UK/AEP)		2-674-191-03	COVER, REAR (32)	(32U2000UK/AEP)
56	2-580-640-01	SCREW, +BVTP2 4X16			2-674-312-01	COVER, REAR (40)	(40U2000UK/AEP)
57	2-021-173-12	COVER, ECS (20)		68	2-580-608-01	SCREW, +PSW M5X16	(26/32U2000UK/AEP)
58	2-667-973-02	COVER, SERVICE C			2-580-609-01	SCREW, +PSW M5X25	(40U2000UK/AEP)

SECTION 6 ELECTRICAL PARTS LIST

PARTS LISTING TABLE OF CONTENTS

	Page
A1/A1P BOARD COMPLETE Parts List :	65
H2/H2P BOARD COMPLETE Parts List :	68
H3/H3P BOARD COMPLETE Parts List :	69
G2 BOARD COMPLETE Parts List : KDL-40U2000 only.....	69
H1/H1P BOARD COMPLETE Parts List :	73
BDT BOARD COMPLETE Parts List :	73
G1 BOARD COMPLETE Parts List : KDL-26U2000 & KDL-32U2000 only.....	85
MISCELLANEOUS :	88
ACCESSORIES AND CONNECTORS :	88
REMOTE COMMANDER :	88

Note: The BDT Board is regarded as a non service item for exchange only if there is a fault with either IC3006 or IC5630.

Note : Items marked “**” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
Parts indicated (XX) on the Schematic Diagram are not used in this model and therefore do not appear in the Parts List.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
*A-1189-407-A A1 Board Complete (KDL-26/32U2000)				C2056	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
*A-1202-962-A A1P Board Complete (KDL-40U2000)				C2057	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
	*2-586-040-02	SHIELD CASE, IFOB (MAIN)		C2058	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
	*2-586-041-01	SHIELD CASE, IFOB (TOP)		C2059	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
	*2-586-042-02	SHIELD CASE, IFOB (BOTTOM)		C2060	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
< CAPACITOR >				C2065	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C1000	1-126-947-11	ELECT 47UF	20.00% 35V	C2066	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1001	1-164-156-11	CERAMIC CHIP 0.1UF	25V	C2067	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C1102	1-162-925-11	CERAMIC CHIP 68PF	5.00% 50V	C2068	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1103	1-162-925-11	CERAMIC CHIP 68PF	5.00% 50V	C2069	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C1104	1-164-156-11	CERAMIC CHIP 0.1UF	25V	C2070	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C1105	1-126-968-11	ELECT 100UF	20.00% 50V	C2071	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C1106	1-126-916-11	ELECT 1000UF	20.00% 6.3V	C2072	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C1107	1-164-156-11	CERAMIC CHIP 0.1UF	25V	C2073	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C1108	1-164-156-11	CERAMIC CHIP 0.1UF	25V	C2074	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C1200	1-164-156-11	CERAMIC CHIP 0.1UF	25V	C2079	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1202	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C2080	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1203	1-104-662-91	ELECT 22UF	20.00% 25V	C2081	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C1204	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C2084	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C1205	1-164-392-11	CERAMIC CHIP 390PF	5.00% 50V	C2085	1-117-370-11	CERAMIC CHIP 10UF	10V
C1206	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C2086	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C1207	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C2087	1-117-370-11	CERAMIC CHIP 10UF	10V
C1208	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	< CONNECTOR >			
C1209	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V	CN2021	*1-417-602-11	SOCKET 21PIN	
C1210	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V	CN2022	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P	
C1211	1-131-664-91	CERAMIC CHIP 0.15UF	10% 10V	CN2023	*1-417-602-11	SOCKET 21PIN	
C1213	1-165-176-11	CERAMIC CHIP 0.047UF	10.00% 16V	CN2024	1-820-255-51	FFC/FPC CONNECTOR (ZIF) 20P	
C1216	1-162-919-11	CERAMIC CHIP 22PF	5.00% 50V	< DIODE >			
C1218	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D1100	8-719-069-55	DIODE UDZSTE-175.6B	
C1219	1-162-926-11	CERAMIC CHIP 82PF	5.00% 50V	D1101	8-719-083-87	DIODE UDZS-TE17-33B	
C1220	1-162-928-11	CERAMIC CHIP 120PF	5.00% 50V	D1102	8-719-069-55	DIODE UDZSTE-175.6B	
C1221	1-164-388-91	CERAMIC CHIP 270PF	5.00% 50V	D1200	8-719-050-38	DIODE M1MA152WK-T1	
C1222	1-162-915-11	CERAMIC CHIP 10PF	0.50PF 50V	D2021	8-719-083-82	DIODE UDZS-TE17-12B	
C1223	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D2022	8-719-083-82	DIODE UDZS-TE17-12B	
C1226	1-162-961-11	CERAMIC CHIP 330PF	10.00% 50V	D2023	8-719-083-82	DIODE UDZS-TE17-12B	
C1227	1-126-933-11	ELECT 100UF	20.00% 16V	D2024	8-719-083-82	DIODE UDZS-TE17-12B	
C2000	1-126-933-11	ELECT 100UF	20.00% 16V	D2025	8-719-083-63	DIODE UDZSTE-1713B	
C2025	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D2026	8-719-069-60	DIODE UDZSTE-179.1B	
C2026	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D2027	8-719-069-60	DIODE UDZSTE-179.1B	
C2027	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D2028	8-719-069-60	DIODE UDZSTE-179.1B	
C2028	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D2029	8-719-069-55	DIODE UDZSTE-175.6B	
C2043	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	D2030	8-719-069-60	DIODE UDZSTE-179.1B	
C2044	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	D2031	8-719-069-60	DIODE UDZSTE-179.1B	
C2048	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	D2037	8-719-069-60	DIODE UDZSTE-179.1B	
C2049	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	D2038	8-719-069-60	DIODE UDZSTE-179.1B	
C2053	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	D2039	8-719-069-60	DIODE UDZSTE-179.1B	
C2054	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	D2040	8-719-069-60	DIODE UDZSTE-179.1B	
C2055	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D2041	8-719-069-60	DIODE UDZSTE-179.1B	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D2042	8-719-069-60	DIODE UDZSTE-179.1B		L1104	1-414-934-21	INDUCTOR	10UH
D2043	8-719-069-60	DIODE UDZSTE-179.1B		L1105	1-414-580-21	INDUCTOR	100NH
D2044	8-719-069-60	DIODE UDZSTE-179.1B		L1107	1-414-934-21	INDUCTOR	10UH
D2045	8-719-083-63	DIODE UDZSTE-1713B		L1200	1-414-934-21	INDUCTOR	10UH
D2046	8-719-069-60	DIODE UDZSTE-179.1B		L1201	1-410-993-42	INDUCTOR	1UH
D2047	8-719-069-60	DIODE UDZSTE-179.1B		L1223	1-410-509-11	INDUCTOR	10UH
D2048	8-719-069-60	DIODE UDZSTE-179.1B		L2000	1-414-934-21	INDUCTOR	10UH
D2049	8-719-069-55	DIODE UDZSTE-175.6B		< TRANSISTOR >			
D2050	8-719-069-60	DIODE UDZSTE-179.1B		Q1200	8-729-010-29	TRANSISTOR MSD601-RST1	
D2052	8-719-083-63	DIODE UDZSTE-1713B		Q1201	8-729-421-19	TRANSISTOR UN2213	
D2058	8-719-069-60	DIODE UDZSTE-179.1B		Q1202	8-729-421-19	TRANSISTOR UN2213	
D2059	8-719-069-60	DIODE UDZSTE-179.1B		Q1203	8-729-422-33	TRANSISTOR 2SD601A-Q-TX	
D2061	8-719-069-60	DIODE UDZSTE-179.1B		Q1204	8-729-421-19	TRANSISTOR UN2213	
D2062	8-719-069-60	DIODE UDZSTE-179.1B		Q1205	8-729-010-05	TRANSISTOR MSB709-RT1	
D2063	8-719-069-60	DIODE UDZSTE-179.1B		Q2000	8-729-010-29	TRANSISTOR MSD601-RST1	
D2064	8-719-069-60	DIODE UDZSTE-179.1B		Q2001	8-729-010-29	TRANSISTOR MSD601-RST1	
D2065	8-719-069-55	DIODE UDZSTE-175.6B		Q2002	8-729-010-05	TRANSISTOR MSB709-RT1	
D2066	8-719-069-55	DIODE UDZSTE-175.6B		Q2003	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D2067	8-719-069-55	DIODE UDZSTE-175.6B		Q2004	8-729-010-05	TRANSISTOR MSB709-RT1	
D2068	8-719-069-60	DIODE UDZSTE-179.1B		Q2005	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D2069	8-719-069-55	DIODE UDZSTE-175.6B		< RESISTOR >			
D2070	8-719-069-55	DIODE UDZSTE-175.6B		R1001	1-216-809-11	METAL CHIP	100 5% 1/10W
D2071	8-719-069-55	DIODE UDZSTE-175.6B		R1002	1-216-809-11	METAL CHIP	100 5% 1/10W
< EARTH TERMINAL >				R1003	1-216-864-11	SHORT CHIP	0
ET6501	1-780-336-11	EARTH TERMINAL		R1004	1-216-864-11	SHORT CHIP	0
ET6502	1-780-336-11	EARTH TERMINAL		R1006	1-216-864-11	SHORT CHIP	0
< FERRITE BEAD >				R1007	1-216-864-11	SHORT CHIP	0
FB1100	1-469-185-11	FERRITE	0UH	R1008	1-216-864-11	SHORT CHIP	0
FB1101	1-469-185-11	FERRITE	0UH	R1009	1-216-864-11	SHORT CHIP	0
< IC >				R1010	1-216-864-11	SHORT CHIP	0
IC1000	6-704-465-01	IC MC74LVX8053DTR2		R1101	1-216-049-11	RES-CHIP	1K 5% 1/10W
IC1200	6-704-747-01	IC TDA9886TS/V4,118		R1201	1-216-837-11	METAL CHIP	22K 5% 1/10W
IC2000	8-759-385-76	IC MC14052 BDR2		R1202	1-216-821-11	METAL CHIP	1K 5% 1/10W
< SOCKET >				R1203	1-216-837-11	METAL CHIP	22K 5% 1/10W
J2021	1-819-327-11	PHONO JACK 2P		R1204	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
J2022	1-819-327-11	PHONO JACK 2P		R1206	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
J2023	1-820-021-11	JACK		R1207	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
J2024	1-819-354-11	PHONO JACK 5P		R1208	1-216-864-11	SHORT CHIP	0
< COIL >				R1210	1-216-817-11	METAL CHIP	470 5% 1/10W
L1000	1-414-934-21	INDUCTOR	10UH	R1212	1-216-830-11	METAL CHIP	5.6K 5% 1/10W
L1100	1-412-987-31	INDUCTOR	4.7UH	R1213	1-216-811-11	METAL CHIP	150 5% 1/10W
L1101	1-412-987-31	INDUCTOR	4.7UH	R1214	1-216-827-11	METAL CHIP	3.3K 5% 1/10W
L1102	1-414-580-21	INDUCTOR	100NH	R1215	1-216-817-11	METAL CHIP	470 5% 1/10W
L1103	1-414-580-21	INDUCTOR	100NH	R1216	1-216-834-11	METAL CHIP	12K 5% 1/10W
				R1217	1-216-864-11	SHORT CHIP	0
				R1218	1-216-809-11	METAL CHIP	100 5% 1/10W
				R1219	1-216-864-11	SHORT CHIP	0

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R1220	1-216-809-11	METAL CHIP	100	5%	1/10W	R2025	1-216-049-11	RES-CHIP	1K	5%	1/10W
R1221	1-216-845-11	METAL CHIP	100K	5%	1/10W	R2026	1-216-022-00	RES-CHIP	75	5%	1/10W
R1222	1-216-813-11	METAL CHIP	220	5%	1/10W	R2028	1-216-022-00	RES-CHIP	75	5%	1/10W
R1223	1-216-824-11	METAL CHIP	1.8K	5%	1/10W	R2029	1-216-022-00	RES-CHIP	75	5%	1/10W
R1224	1-216-809-11	METAL CHIP	100	5%	1/10W	R2030	1-216-022-00	RES-CHIP	75	5%	1/10W
R1225	1-216-864-11	SHORT CHIP	0			R2031	1-216-022-00	RES-CHIP	75	5%	1/10W
R1226	1-216-819-11	METAL CHIP	680	5%	1/10W	R2032	1-216-815-11	METAL CHIP	330	5%	1/10W
R1228	1-216-864-11	SHORT CHIP	0			R2033	1-216-815-11	METAL CHIP	330	5%	1/10W
R1229	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R2034	1-216-813-11	METAL CHIP	220	5%	1/10W
R1230	1-216-822-11	METAL CHIP	1.2K	5%	1/10W	R2035	1-216-864-11	SHORT CHIP	0		
R1232	1-216-807-11	METAL CHIP	68	5%	1/10W	R2036	1-216-813-11	METAL CHIP	220	5%	1/10W
R1233	1-216-807-11	METAL CHIP	68	5%	1/10W	R2037	1-216-864-11	SHORT CHIP	0		
R1234	1-216-814-11	METAL CHIP	270	5%	1/10W	R2038	1-216-864-11	SHORT CHIP	0		
R1235	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R2039	1-216-864-11	SHORT CHIP	0		
R1237	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2040	1-216-864-11	SHORT CHIP	0		
R1238	1-216-864-11	SHORT CHIP	0			R2041	1-216-864-11	SHORT CHIP	0		
R1239	1-216-812-11	METAL CHIP	180	5%	1/10W	R2042	1-216-864-11	SHORT CHIP	0		
R1240	1-216-801-11	METAL CHIP	22	5%	1/10W	R2043	1-216-864-11	SHORT CHIP	0		
R1241	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2044	1-216-864-11	SHORT CHIP	0		
R1301	1-216-864-11	SHORT CHIP	0			R2045	1-216-864-11	SHORT CHIP	0		
R1302	1-216-864-11	SHORT CHIP	0			R2046	1-216-864-11	SHORT CHIP	0		
R1305	1-216-864-11	SHORT CHIP	0			R2047	1-216-864-11	SHORT CHIP	0		
R1306	1-216-864-11	SHORT CHIP	0			R2048	1-216-864-11	SHORT CHIP	0		
R1307	1-216-864-11	SHORT CHIP	0			R2049	1-216-864-11	SHORT CHIP	0		
R1308	1-216-864-11	SHORT CHIP	0			R2050	1-216-864-11	SHORT CHIP	0		
R2000	1-216-809-11	METAL CHIP	100	5%	1/10W	R2051	1-216-864-11	SHORT CHIP	0		
R2001	1-216-809-11	METAL CHIP	100	5%	1/10W	R2052	1-216-864-11	SHORT CHIP	0		
R2002	1-216-809-11	METAL CHIP	100	5%	1/10W	R2053	1-216-864-11	SHORT CHIP	0		
R2003	1-216-809-11	METAL CHIP	100	5%	1/10W	R2054	1-216-864-11	SHORT CHIP	0		
R2004	1-216-864-11	SHORT CHIP	0			R2055	1-216-864-11	SHORT CHIP	0		
R2005	1-216-864-11	SHORT CHIP	0			R2056	1-216-864-11	SHORT CHIP	0		
R2006	1-216-809-11	METAL CHIP	100	5%	1/10W	R2057	1-216-864-11	SHORT CHIP	0		
R2007	1-216-864-11	SHORT CHIP	0			R2058	1-216-864-11	SHORT CHIP	0		
R2008	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R2059	1-216-864-11	SHORT CHIP	0		
R2009	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R2060	1-216-864-11	SHORT CHIP	0		
R2010	1-216-809-11	METAL CHIP	100	5%	1/10W	R2061	1-216-864-11	SHORT CHIP	0		
R2011	1-216-809-11	METAL CHIP	100	5%	1/10W	R2062	1-216-864-11	SHORT CHIP	0		
R2012	1-216-809-11	METAL CHIP	100	5%	1/10W	R2063	1-216-853-11	METAL CHIP	470K	5%	1/10W
R2013	1-216-809-11	METAL CHIP	100	5%	1/10W	R2064	1-216-853-11	METAL CHIP	470K	5%	1/10W
R2014	1-216-809-11	METAL CHIP	100	5%	1/10W	R2065	1-216-853-11	METAL CHIP	470K	5%	1/10W
R2015	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2066	1-216-853-11	METAL CHIP	470K	5%	1/10W
R2016	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2067	1-216-025-11	RES-CHIP	100	5%	1/10W
R2017	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2068	1-216-033-00	RES-CHIP	220	5%	1/10W
R2018	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2069	1-216-025-11	RES-CHIP	100	5%	1/10W
R2019	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2070	1-216-025-11	RES-CHIP	100	5%	1/10W
R2020	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2071	1-216-025-11	RES-CHIP	100	5%	1/10W
R2021	1-216-295-91	SHORT CHIP	0			R2072	1-216-022-00	RES-CHIP	75	5%	1/10W
R2022	1-216-815-11	METAL CHIP	330	5%	1/10W	R2073	1-216-025-11	RES-CHIP	100	5%	1/10W
R2023	1-216-049-11	RES-CHIP	1K	5%	1/10W	R2074	1-216-049-11	RES-CHIP	1K	5%	1/10W
R2024	1-216-815-11	METAL CHIP	330	5%	1/10W	R2075	1-216-049-11	RES-CHIP	1K	5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R2076	1-216-853-11	METAL CHIP	470K	5%	1/10W	R2127	1-216-049-11	RES-CHIP	1K	5%	1/10W
R2077	1-216-853-11	METAL CHIP	470K	5%	1/10W	R2129	1-216-864-11	SHORT CHIP	0		
R2078	1-216-864-11	SHORT CHIP	0			R2132	1-216-864-11	SHORT CHIP	0		
R2079	1-216-864-11	SHORT CHIP	0			R2134	1-216-836-11	METAL CHIP	18K	5%	1/10W
R2080	1-216-864-11	SHORT CHIP	0			R2135	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2081	1-216-864-11	SHORT CHIP	0			R2136	1-216-811-11	METAL CHIP	150	5%	1/10W
R2082	1-216-295-91	SHORT CHIP	0			R2137	1-216-817-11	METAL CHIP	470	5%	1/10W
R2083	1-216-853-11	METAL CHIP	470K	5%	1/10W	R2138	1-216-811-11	METAL CHIP	150	5%	1/10W
R2084	1-216-853-11	METAL CHIP	470K	5%	1/10W	R2139	1-216-811-11	METAL CHIP	150	5%	1/10W
R2085	1-216-049-11	RES-CHIP	1K	5%	1/10W	R2140	1-216-817-11	METAL CHIP	470	5%	1/10W
R2086	1-216-049-11	RES-CHIP	1K	5%	1/10W	R2141	1-216-811-11	METAL CHIP	150	5%	1/10W
R2087	1-216-022-00	RES-CHIP	75	5%	1/10W	R2142	1-216-836-11	METAL CHIP	18K	5%	1/10W
R2088	1-216-022-00	RES-CHIP	75	5%	1/10W	R2143	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2089	1-216-022-00	RES-CHIP	75	5%	1/10W	R2145	1-216-864-11	SHORT CHIP	0		
R2090	1-216-022-00	RES-CHIP	75	5%	1/10W	< FILTER >					
R2091	1-216-022-00	RES-CHIP	75	5%	1/10W	SW1200	1-795-617-11	SAW FILTER			
R2092	1-216-815-11	METAL CHIP	330	5%	1/10W	SW1201	1-767-083-11	FILTER, SURFACE WAVE			
R2093	1-216-049-11	RES-CHIP	1K	5%	1/10W	< TUNER >					
R2094	1-216-815-11	METAL CHIP	330	5%	1/10W	TU1300	8-597-585-00	TUNER, FSS BTP-HC401			
R2095	1-216-049-11	RES-CHIP	1K	5%	1/10W	< CRYSTAL >					
R2097	1-216-864-11	SHORT CHIP	0			X1200	1-767-704-11	VIBRATOR, CRYSTAL			
R2098	1-216-864-11	SHORT CHIP	0			*A-1189-409-A H2 Board, Complete (KDL-26/32U2000) *A-1202-964-A H2P Board, Complete (KDL-40U2000)					
R2099	1-216-864-11	SHORT CHIP	0			< CAPACITOR >					
R2100	1-216-864-11	SHORT CHIP	0			C2902	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2101	1-216-853-11	METAL CHIP	470K	5%	1/10W	C2903	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2102	1-216-853-11	METAL CHIP	470K	5%	1/10W	C2904	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2103	1-216-853-11	METAL CHIP	470K	5%	1/10W	C2905	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2104	1-216-853-11	METAL CHIP	470K	5%	1/10W	C2930	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2105	1-216-025-11	RES-CHIP	100	5%	1/10W	C2931	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2106	1-216-033-00	RES-CHIP	220	5%	1/10W	C9041	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%	10V	
R2107	1-216-025-11	RES-CHIP	100	5%	1/10W	C9049	1-164-505-11	CERAMIC CHIP 2.2UF		16V	
R2108	1-216-025-11	RES-CHIP	100	5%	1/10W	C9050	1-164-505-11	CERAMIC CHIP 2.2UF		16V	
R2109	1-216-025-11	RES-CHIP	100	5%	1/10W	C9077	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2110	1-216-022-00	RES-CHIP	75	5%	1/10W	C9078	1-165-908-11	CERAMIC CHIP 1UF	10%	10V	
R2111	1-216-025-11	RES-CHIP	100	5%	1/10W	C9079	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2112	1-216-809-11	METAL CHIP	100	5%	1/10W	C9080	1-165-908-11	CERAMIC CHIP 1UF	10%	10V	
R2113	1-216-809-11	METAL CHIP	100	5%	1/10W	C9081	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
R2114	1-216-809-11	METAL CHIP	100	5%	1/10W	C9082	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
R2115	1-216-853-11	METAL CHIP	470K	5%	1/10W	< CONNECTOR >					
R2116	1-216-853-11	METAL CHIP	470K	5%	1/10W	CN9855	*1-819-335-11	HEADER ASSEMBLY FOR PWB, 9P			
R2117	1-216-864-11	SHORT CHIP	0			CN9856	1-779-993-11	PIN, CONNECTOR (PWB) 5P			
R2118	1-216-864-11	SHORT CHIP	0			CN9857	*1-764-250-11	PIN, CONNECTOR (PC BOARD) 4P			
R2119	1-216-029-00	RES-CHIP	150	5%	1/10W						
R2120	1-216-029-00	RES-CHIP	150	5%	1/10W						
R2121	1-216-029-00	RES-CHIP	150	5%	1/10W						
R2122	1-216-025-11	RES-CHIP	100	5%	1/10W						
R2123	1-216-049-11	RES-CHIP	1K	5%	1/10W						
R2124	1-216-029-00	RES-CHIP	150	5%	1/10W						
R2125	1-216-029-00	RES-CHIP	150	5%	1/10W						
R2126	1-216-029-00	RES-CHIP	150	5%	1/10W						

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

H2/H2P

H3/H3P

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK
< DIODE >			
D9036	8-719-977-28	DIODE DTZ10B	
D9038	8-719-977-28	DIODE DTZ10B	
D9058	8-719-069-60	DIODE UDZSTE-179.1B	
D9059	8-719-069-60	DIODE UDZSTE-179.1B	
< SOCKET >			
J2901	1-750-264-31	JACK	
J9006	1-794-442-21	TERMINAL BLOCK (LIGHT ANGLE), S	
< RESISTOR >			
R2901	1-220-259-11	METAL CHIP 150 5% 1/4W	
R2902	1-220-259-11	METAL CHIP 150 5% 1/4W	
R2903	1-220-259-11	METAL CHIP 150 5% 1/4W	
R2904	1-220-259-11	METAL CHIP 150 5% 1/4W	
R9104	1-218-285-11	METAL CHIP 75 5% 1/10W	
R9105	1-216-811-11	METAL CHIP 150 5% 1/10W	
R9109	1-216-811-11	METAL CHIP 150 5% 1/10W	
R9113	1-216-809-11	METAL CHIP 100 5% 1/10W	
R9116	1-216-864-11	SHORT CHIP 0	
R9136	1-216-853-11	METAL CHIP 470K 5% 1/10W	
R9137	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R9138	1-216-853-11	METAL CHIP 470K 5% 1/10W	
R9139	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R9142	1-216-864-11	SHORT CHIP 0	
R9853	1-216-864-11	SHORT CHIP 0	
R9854	1-216-864-11	SHORT CHIP 0	
< VARISTOR >			
VD9023	1-803-974-21	VARISTOR, CHIP (1608)	
VD9024	1-803-974-21	VARISTOR, CHIP (1608)	
*A-1189-410-A H3 Board Complete (KDL-26/32U2000)			
*A-1202-965-A H3P Board Complete (KDL-40U2000)			
< CAPACITOR >			
C9301	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	
C9302	1-119-667-11	CERAMIC CHIP 22UF 10V	
< CONNECTOR >			
CN9300	1-770-627-21	PIN, CONNECTOR 10P	
< DIODE >			
D9302	8-719-085-26	DIODE CL-165HR/SYG-D-T	
D9309	8-719-036-94	DIODE RD5.6SB-T1	
D9312	6-500-817-01	DIODE (LED) SML-512UWT86	
D9313	8-719-078-21	DIODE SML-310PTT86	
< IC >			
IC9300	6-600-271-01	IC RPM7140-H8	

REF.NO.	PART.NO	DESCRIPTION	REMARK
< TRANSISTOR >			
Q9300	8-729-907-00	TRANSISTOR DTC114EU	
Q9301	8-729-907-00	TRANSISTOR DTC114EU	
Q9302	8-729-907-00	TRANSISTOR DTC114EU	
Q9303	8-729-907-00	TRANSISTOR DTC114EU	
< RESISTOR >			
R9300	1-216-820-11	METAL CHIP 820 5% 1/10W	
R9301	1-216-819-11	METAL CHIP 680 5% 1/10W	
R9306	1-216-817-11	METAL CHIP 470 5% 1/10W	
R9307	1-216-805-11	METAL CHIP 47 5% 1/10W	
R9309	1-216-818-11	METAL CHIP 560 5% 1/10W	
R9310	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
R9311	1-216-818-11	METAL CHIP 560 5% 1/10W	
*A-1189-416-A G2 Board Complete (KDL-40U2000 only)			
	4-382-854-11	SCREW (M3X10), P, SW (+)	
< CAPACITOR >			
C6002	Δ 1-119-892-51	CERAMIC 470PF 10.00% 250V	
C6003	Δ 1-161-964-91	CERAMIC 0.0047UF 250V	
C6004	Δ 1-113-924-11	CERAMIC 0.0047UF 20.00% 250V	
C6005	Δ 1-119-892-51	CERAMIC 470PF 10.00% 250V	
C6007	Δ 1-165-529-11	MYLAR 0.22UF 10 275V	
C6009	Δ 1-165-531-11	MYLAR 1UF 10 275V	
C6010	Δ 1-161-964-91	CERAMIC 0.0047UF 250V	
C6011	Δ 1-119-892-51	CERAMIC 470PF 10.00% 250V	
C6013	Δ 1-119-892-51	CERAMIC 470PF 10.00% 250V	
C6014	Δ 1-113-924-11	CERAMIC 0.0047UF 20.00% 250V	
C6016	1-162-969-11	CERAMIC CHIP 0.0068UF 10.00% 25V	
C6017	1-117-227-11	MYLAR 1UF 10.00% 450V	
C6018	1-117-227-11	MYLAR 1UF 10.00% 450V	
C6020	1-100-613-81	CERAMIC 470PF 5% 1KV	
C6021	1-100-613-81	CERAMIC 470PF 5% 1KV	
C6024	1-107-823-11	CERAMIC CHIP 0.47UF 10.00% 16V	
C6026	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	
C6027	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	
C6031	1-107-882-91	ELECT 100UF 20% 16V	
C6032	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	
C6035	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	
C6036	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	
C6038	1-107-906-11	ELECT 10UF 20% 50V	
C6039	1-135-361-11	ELECT (BLOCK) 180UF 20% 450V	
C6040	1-135-361-11	ELECT (BLOCK) 180UF 20% 450V	
C6041	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	
C6042	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	
C6043	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	
C6044	1-107-905-11	ELECT 4.7UF 20% 50V	
C6045	1-107-910-11	ELECT 100UF 20% 50V	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C6046	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	< DIODE >			
C6047	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	D6000	8-719-081-97	DIODE MMDL914T1	
C6049	1-107-906-11	ELECT 10UF	20% 50V	D6001	8-719-081-97	DIODE MMDL914T1	
C6051	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6002	8-719-081-97	DIODE MMDL914T1	
C6052	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V	D6003	8-719-054-89	DIODE D15XB60	
C6053	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6005	8-719-081-97	DIODE MMDL914T1	
C6054	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V	D6006	8-719-976-99	DIODE DTZ5.1B	
C6055	1-107-888-11	ELECT 47UF	20% 25V	D6007	8-719-081-97	DIODE MMDL914T1	
C6056	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V	D6008	8-719-081-97	DIODE MMDL914T1	
C6059	1-100-613-81	CERAMIC 470PF	5% 1KV	D6011	6-501-043-01	DIODE UMZ16NT106	
C6060	1-100-310-11	FILM 18000PF	3% 800V	D6012	8-719-054-59	DIODE FSF05A60	
C6061	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V	D6013	6-500-137-01	DIODE BAT54HT1	
C6062	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6014	6-501-043-01	DIODE UMZ16NT106	
C6064	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D6015	8-719-081-97	DIODE MMDL914T1	
C6066	1-128-959-31	ELECT 1000UF	20% 35V	D6017	6-500-108-01	DIODE EP05FA20	
C6067	1-112-242-21	ELECT 1500UF	20% 25V	D6018	6-500-108-01	DIODE EP05FA20	
C6068	1-107-928-11	ELECT 4.7UF	20% 100V	D6019	8-719-081-97	DIODE MMDL914T1	
C6069	1-112-242-21	ELECT 1500UF	20% 25V	D6020	8-719-081-97	DIODE MMDL914T1	
C6070	1-112-229-21	ELECT 1500UF	20% 16V	D6021	8-719-081-97	DIODE MMDL914T1	
C6071	1-112-242-21	ELECT 1500UF	20% 25V	D6023	8-719-041-97	DIODE MA113-(TX)	
C6073	1-107-907-11	ELECT 22UF	20% 50V	D6027	8-719-081-97	DIODE MMDL914T1	
C6080	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V	D6028	8-719-979-64	DIODE UF4005/23	
C6200	1-107-974-11	CERAMIC 47PF	5.00% 2KV	D6031	6-501-043-01	DIODE UMZ16NT106	
C6201	1-107-903-11	ELECT 2.2UF	20% 50V	D6032	6-501-043-01	DIODE UMZ16NT106	
C6202	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6033	8-719-081-97	DIODE MMDL914T1	
C6203	1-165-127-11	CERAMIC 470PF	10.00% 500V	D6035	8-719-057-96	DIODE D10SC6M-4012	
C6205	1-107-905-11	ELECT 4.7UF	20% 50V	D6036	8-719-057-96	DIODE D10SC6M-4012	
C6206	1-107-910-11	ELECT 100UF	20% 50V	D6037	8-719-057-96	DIODE D10SC6M-4012	
C6209	1-165-729-31	ELECT 470UF	20% 16V	D6038	8-719-057-96	DIODE D10SC6M-4012	
C6210	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6039	8-719-057-96	DIODE D10SC6M-4012	
C6300	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V	D6040	6-501-505-01	DIODE FCH08U10	
C6301	1-126-960-11	ELECT 1UF	20.00% 50V	D6041	8-719-082-04	DIODE MM3Z22VT1	
C6302	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V	D6042	8-719-081-97	DIODE MMDL914T1	
C6303	1-126-960-11	ELECT 1UF	20.00% 50V	D6043	6-500-567-31	DIODE 10ERB20-TE3	
C6304	1-104-666-11	ELECT 220UF	20.00% 25V	D6044	6-500-567-31	DIODE 10ERB20-TE3	
C6306	1-164-489-11	CERAMIC CHIP 0.22UF	10.00% 16V	D6048	8-719-083-87	DIODE UDZS-TE17-33B	
C6307	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V	D6200	6-500-567-31	DIODE 10ERB20-TE3	
C6308	1-126-952-11	ELECT 1000UF	20.00% 35V	D6201	8-719-036-94	DIODE RD5.6SB-T1	
C6309	1-126-952-11	ELECT 1000UF	20.00% 35V	D6203	6-500-849-01	DIODE ERA22-08KFLB	
C6310	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D6204	8-719-052-90	DIODE D1NL40-TA2	
C6311	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D6206	8-719-052-90	DIODE D1NL40-TA2	
C6312	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V	D6207	8-719-032-12	DIODE D1NS6	
C6313	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V	D6300	8-719-069-55	DIODE UDZSTE-175.6B	
C6316	1-107-907-11	ELECT 22UF	20% 50V	D6302	8-719-069-55	DIODE UDZSTE-175.6B	
< CONNECTOR >				< TERMINAL BOARD >			
CN6001 Δ	*1-691-960-11	PIN, CONNECTOR (PC BOARD) 3P		ET6000	1-537-770-21	TERMINAL BOARD, GROUND	
CN6003	*1-785-703-21	PIN, CONNECTOR (PC BOARD) 6P		ET6002	1-537-770-21	TERMINAL BOARD, GROUND	
CN6004	*1-785-706-11	PIN, CONNECTOR (PC BOARD) 10P		ET6003	1-537-770-21	TERMINAL BOARD, GROUND	
CN6005	*1-793-235-11	PIN, CONNECTOR (PC BOARD) 13P					
CN6300	*1-564-507-11	PLUG, CONNECTOR 4P					

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< FUSE >							
F6000	Δ 1-576-233-51	FUSE	6.3A 250V	Q6010	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R	
FH6002	Δ 1-533-725-11	FUSE HOLDER		Q6011	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
< FERRITE BEAD >				Q6012	8-729-045-62	TRANSISTOR 2SK2158-T2B	
FB6001	1-410-396-41	FERRITE	0.45UH	Q6013	6-551-545-01	TRANSISTOR 2SK3469-01MR-F111	
FB6002	1-410-396-41	FERRITE	0.45UH	Q6014	6-551-545-01	TRANSISTOR 2SK3469-01MR-F111	
< IC >				< RESISTOR >			
IC6000	6-709-192-01	IC FA5501AN-D1-TE1		JR6313	1-216-295-91	SHORT CHIP	0
IC6001	6-705-810-01	IC MCZ3001DB		JR6314	1-216-295-91	SHORT CHIP	0
IC6002	6-709-368-01	IC MM1431ATT (CN)		JR6315	1-216-295-91	SHORT CHIP	0
IC6003	6-709-368-01	IC MM1431ATT (CN)		JR6316	1-216-295-91	SHORT CHIP	0
IC6004	6-709-368-01	IC MM1431ATT (CN)		R6001	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W
IC6200	6-600-279-01	IC STR-A6169		R6002	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W
IC6201	8-759-682-42	IC MM1431ATT		R6003	Δ 1-208-830-11	METAL CHIP	100K 0.5% 1/10W
IC6300	8-759-831-57	IC TDA7495S		R6005	1-218-911-11	METAL CHIP	470K 0.5% 1/10W
< COIL >				R6006	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W
L6000	Δ 1-456-856-21	LINE FILTER COIL		R6007	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W
L6001	Δ 1-456-856-21	LINE FILTER COIL		R6008	1-218-911-11	METAL CHIP	470K 0.5% 1/10W
L6002	1-457-218-11	INDUCTOR	100UH	R6009	1-218-887-11	METAL CHIP	47K 0.5% 1/10W
L6003	1-457-141-11	INDUCTOR	175UH	R6017	Δ 1-240-251-11	METAL	6.8 5% 10W
L6004	1-414-487-41	INDUCTOR	1UH	R6021	1-218-913-91	METAL CHIP	560K 0.5% 1/10W
L6005	1-414-487-41	INDUCTOR	1UH	R6022	1-216-864-11	SHORT CHIP	0
L6007	1-457-239-11	INDUCTOR	4.7UH	R6023	1-218-879-11	METAL CHIP	22K 0.5% 1/10W
L6008	1-457-239-11	INDUCTOR	4.7UH	R6024	1-208-814-91	METAL CHIP	22K 0.5% 1/10W
L6200	1-414-934-21	INDUCTOR	10UH	R6027	1-218-823-11	METAL CHIP	100 0.5% 1/10W
< PHOTOCOUPLER >				R6028	1-247-752-11	CARBON	1K 5% 1/2W
PH6000	Δ 6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6029	1-215-882-21	METAL OXIDE	22 5% 2W
PH6001	Δ 6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6030	1-216-864-11	SHORT CHIP	0
PH6002	Δ 6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6031	1-218-835-11	METAL CHIP	330 0.5% 1/10W
PH6003	Δ 6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6032	1-217-157-00	METAL	0.33 10% 5W
PH6200	Δ 6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6033	1-216-813-11	METAL CHIP	220 5% 1/10W
< PROTECTOR MODULE >				R6034	1-216-813-11	METAL CHIP	220 5% 1/10W
PS6301	Δ 1-533-596-21	IC LINK	4A 90V	R6035	1-217-157-00	METAL	0.33 10% 5W
< TRANSISTOR >				R6036	1-211-981-11	METAL CHIP	33 0.5% 1/10W
Q6001	6-551-403-01	TRANSISTOR 2SK3797(LBS1SONY.		R6037	1-218-823-11	METAL CHIP	100 0.5% 1/10W
Q6002	6-551-403-01	TRANSISTOR 2SK3797(LBS1SONY.		R6038	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q6003	8-729-807-17	TRANSISTOR 2SD1621-S		R6041	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
Q6004	8-729-804-41	TRANSISTOR 2SB1122-S		R6042	1-249-389-11	CARBON	4.7 5% 1/4W
Q6005	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		R6043	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q6006	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6044	1-216-837-11	METAL CHIP	22K 5% 1/10W
Q6007	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6046	1-249-405-11	CARBON	100 5% 1/4W
Q6008	8-729-804-41	TRANSISTOR 2SB1122-S		R6047	1-249-389-11	CARBON	4.7 5% 1/4W
Q6009	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6048	1-216-813-11	METAL CHIP	220 5% 1/10W
				R6050	1-216-813-11	METAL CHIP	220 5% 1/10W
				R6051	1-208-814-91	METAL CHIP	22K 0.5% 1/10W
				R6052	1-216-833-11	METAL CHIP	10K 5% 1/10W
				R6053	1-218-907-11	METAL CHIP	330K 0.5% 1/10W

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R6054	1-218-879-11	METAL CHIP	22K 0.5% 1/10W	R6107	1-216-361-00	METAL OXIDE	0.22 5% 2W
R6055	1-218-895-11	METAL CHIP	100K 0.5% 1/10W	R6108	1-218-903-11	METAL CHIP	220K 0.5% 1/10W
R6056	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6109	1-218-847-11	METAL CHIP	1K 0.5% 1/10W
R6057	1-216-809-11	METAL CHIP	100 5% 1/10W	R6110	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R6058	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	R6113	1-216-821-11	METAL CHIP	1K 5% 1/10W
R6059	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	R6114	1-216-821-11	METAL CHIP	1K 5% 1/10W
R6060	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	R6115	1-216-821-11	METAL CHIP	1K 5% 1/10W
R6061	1-208-846-11	METAL CHIP	470K 0.5% 1/10W	R6116	1-216-837-11	METAL CHIP	22K 5% 1/10W
R6062	1-208-844-11	METAL CHIP	390K 0.5% 1/10W	R6118	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R6063	1-218-875-11	METAL CHIP	15K 0.5% 1/10W	R6121	1-218-843-11	METAL CHIP	680 0.5% 1/10W
R6064	1-218-851-11	METAL CHIP	1.5K 0.5% 1/10W	R6122	1-218-865-11	METAL CHIP	5.6K 0.5% 1/10W
R6065	1-249-393-11	CARBON	10 5% 1/4W	R6124	1-218-847-11	METAL CHIP	1K 0.5% 1/10W
R6066	1-216-845-11	METAL CHIP	100K 5% 1/10W	R6125	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6067	1-216-837-11	METAL CHIP	22K 5% 1/10W	R6126	1-249-377-11	CARBON	0.47 5% 1/4W
R6068	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6127	1-249-389-11	CARBON	4.7 5% 1/4W
R6069 Δ	1-202-933-61	FUSIBLE	0.1 10% 1/2W	R6128	1-245-494-21	METAL	2.2M 2% 1/4W
R6070	1-218-823-11	METAL CHIP	100 0.5% 1/10W	R6129	1-245-494-21	METAL	2.2M 2% 1/4W
R6071	1-218-887-11	METAL CHIP	47K 0.5% 1/10W	R6130	1-216-864-11	SHORT CHIP	0
R6072	1-208-854-11	METAL CHIP	1M 0.5% 1/10W	R6131	1-216-864-11	SHORT CHIP	0
R6073	1-208-854-11	METAL CHIP	1M 0.5% 1/10W	R6132	1-249-416-11	CARBON	820 5% 1/4W
R6074	1-208-854-11	METAL CHIP	1M 0.5% 1/10W	R6133	1-216-295-91	SHORT CHIP	0
R6075	1-208-854-11	METAL CHIP	1M 0.5% 1/10W	R6200 Δ	1-212-958-00	FUSIBLE	10 5% 1/2W
R6076	1-218-761-11	METAL CHIP	240K 0.5% 1/10W	R6201	1-216-353-00	METAL OXIDE	2.2 5% 1W
R6077	1-218-881-11	METAL CHIP	27K 0.5% 1/10W	R6202	1-260-129-11	CARBON	330K 5% 1/2W
R6078	1-218-873-11	METAL CHIP	12K 0.5% 1/10W	R6203	1-249-385-11	CARBON	2.2 5% 1/4W
R6081	1-249-385-11	CARBON	2.2 5% 1/4W	R6204	1-216-813-11	METAL CHIP	220 5% 1/10W
R6082	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6205	1-249-385-11	CARBON	2.2 5% 1/4W
R6083	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6206	1-216-817-11	METAL CHIP	470 5% 1/10W
R6084	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W	R6207	1-216-823-11	METAL CHIP	1.5K 5% 1/10W
R6085	1-218-887-11	METAL CHIP	47K 0.5% 1/10W	R6208	1-216-809-11	METAL CHIP	100 5% 1/10W
R6086	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6210	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
R6087	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6211	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
R6088	1-216-857-11	METAL CHIP	1M 5% 1/10W	R6217	1-216-295-91	SHORT CHIP	0
R6090	1-211-985-11	METAL CHIP	47 0.5% 1/10W	R6218	1-216-295-91	SHORT CHIP	0
R6091	1-216-829-11	METAL CHIP	4.7K 5% 1/10W	R6304	1-216-864-11	METAL CHIP	120K 5% 1/10W
R6092	1-218-903-11	METAL CHIP	220K 0.5% 1/10W	R6306	1-216-864-11	METAL CHIP	120K 5% 1/10W
R6093	1-218-859-11	METAL CHIP	3.3K 0.5% 1/10W	R6308	1-216-825-11	METAL CHIP	2.2K 5% 1/4W
R6094	1-218-885-11	METAL CHIP	39K 0.5% 1/10W	R6309	1-216-049-11	RES-CHIP	1K 5% 1/10W
R6095	1-216-009-91	RES-CHIP	22 5% 1/10W	R6313	1-216-864-11	SHORT CHIP	0
R6096	1-216-821-11	METAL CHIP	1K 5% 1/10W	R6314	1-216-845-11	METAL CHIP	100K 5% 1/10W
R6097	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6315	1-216-845-11	METAL CHIP	100K 5% 1/10W
R6098	1-216-821-11	METAL CHIP	1K 5% 1/10W	R6316	1-216-837-11	METAL CHIP	22K 5% 1/10W
R6099	1-216-009-91	RES-CHIP	22 5% 1/10W	R6317	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6100	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6318	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6101	1-216-833-11	METAL CHIP	10K 5% 1/10W	< RELAY >			
R6102	1-216-833-11	METAL CHIP	10K 5% 1/10W	RY6000 Δ	1-755-579-11	RELAY, POWER	
R6103	1-218-879-11	METAL CHIP	22K 0.5% 1/10W				
R6104	1-218-847-11	METAL CHIP	1K 0.5% 1/10W				
R6105	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W				
R6106	1-216-361-00	METAL OXIDE	0.22 5% 2W				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

H1/H1P

BDT

REF.NO.	PART.NO	DESCRIPTION	REMARK
---------	---------	-------------	--------

< TRANSFORMER >

T6002	Δ 1-443-983-11	CONVERTER TRANSFORMER (PIT)	
T6003	Δ 1-443-986-11	CONVERTER TRANSFORMER (PIT)	
T6200	Δ 1-443-313-21	TRANSFORMER, CONVERTER (SBT)	

< VARISTOR >

VD6000	Δ 1-804-995-11	VARISTOR	
VD6001	Δ 1-804-995-11	VARISTOR	

***A-1189-408-A H1 Board Complete (KDL-26/32U2000)**

***A-1202-963-A H1P Board Complete (KDL-40U2000)**

< CAPACITOR >

C9000	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
-------	--------------	--------------------	------------

< CONNECTOR >

CN9000	1-778-507-21	PIN, CONNECTOR (PC BOARD) 4P	
--------	--------------	------------------------------	--

< DIODE >

D9000	8-719-036-94	DIODE RD5.6SB-T1	
-------	--------------	------------------	--

< RESISTOR >

R9000	1-216-864-11	SHORT CHIP	0
R9001	1-218-847-11	METAL CHIP	1K 0.5% 1/10W
R9002	1-218-843-11	METAL CHIP	680 0.5% 1/10W
R9003	1-218-851-11	METAL CHIP	1.5K 0.5% 1/10W
R9004	1-218-839-11	METAL CHIP	470 0.5% 1/10W
R9005	1-218-855-11	METAL CHIP	2.2K 0.5% 1/10W
R9006	1-218-834-11	METAL CHIP	300 0.5% 1/10W
R9007	1-216-864-11	SHORT CHIP	0
R9008	1-216-864-11	SHORT CHIP	0

< SWITCH >

S9000	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)	
S9001	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)	
S9002	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)	
S9003	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)	
S9004	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)	
S9005	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)	
S9006	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)	

< VARISTOR >

VD9000	1-803-974-21	VARISTOR, CHIP	(1608)
VD9001	1-803-974-21	VARISTOR, CHIP	(1608)
VD9002	1-803-974-21	VARISTOR, CHIP	(1608)
VD9003	1-803-974-21	VARISTOR, CHIP	(1608)
VD9004	1-803-974-21	VARISTOR, CHIP	(1608)
VD9005	1-803-974-21	VARISTOR, CHIP	(1608)

REF.NO.	PART.NO	DESCRIPTION	REMARK
---------	---------	-------------	--------

VD9006	1-803-974-21	VARISTOR, CHIP	(1608)
--------	--------------	----------------	--------

***A-1198-236-A BDT Board Complete**

< CAPACITOR >

C3001	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
C3002	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
C3003	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
C3004	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C3005	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
C3007	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C3008	1-126-205-11	ELECT CHIP 47UF	20.00% 6.3V
C3009	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C3010	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3011	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3012	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3013	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3014	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3015	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3016	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3017	1-126-205-11	ELECT CHIP 47UF	20.00% 6.3V
C3018	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C3019	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3020	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3021	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3022	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3023	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3024	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3025	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3026	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3027	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3028	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3029	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3030	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3031	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3032	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3033	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3035	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3040	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3041	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C3042	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3043	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C3044	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C3045	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3048	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3049	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3050	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3051	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3052	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C3053	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3054	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C4201	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3055	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C4202	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3056	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C4204	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3057	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4205	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3058	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4206	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3059	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4207	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3060	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4208	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3061	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	C4209	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3063	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4210	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3065	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C4211	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3068	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C4212	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3069	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C4213	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3070	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4214	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3071	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4215	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3072	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C4216	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3073	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4217	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3074	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4218	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3075	1-162-917-11	CERAMIC CHIP 15PF	5.00% 50V	C4219	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3076	1-162-917-11	CERAMIC CHIP 15PF	5.00% 50V	C4220	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3078	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4221	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3080	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C4222	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3081	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V	C4223	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3082	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4224	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3083	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C4226	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3085	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C4227	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3086	1-126-390-11	ELECT CHIP 22UF	20.00% 6.3V	C4228	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3089	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C4229	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3090	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C4230	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3092	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C4232	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3093	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C4233	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3094	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C4250	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3095	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C4251	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3096	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C4252	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3097	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C4253	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3114	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4254	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3115	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4255	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3116	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C4256	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3131	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4257	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3200	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C4258	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3201	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C4259	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3300	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C4260	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3301	1-164-388-91	CERAMIC CHIP 270PF	5.00% 50V	C4263	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3302	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C4270	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3303	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V	C4271	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3350	1-162-928-11	CERAMIC CHIP 120PF	5.00% 50V	C5040	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3353	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	C5041	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3354	1-163-037-11	CERAMIC CHIP 0.022UF	10.00% 50V	C5042	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V
C3355	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C5043	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C4000	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C5044	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V
C4200	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C5045	1-164-872-11	CERAMIC CHIP 82PF	5.00% 50V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C5046	1-164-872-11	CERAMIC CHIP 82PF	5.00% 50V	C5666	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V
C5047	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5667	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5048	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5668	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5049	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5669	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5050	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5670	1-126-394-00	ELECT CHIP 10UF	20.00% 16V
C5051	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5671	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5052	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5672	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5054	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C5673	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5055	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5674	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C5056	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5675	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C5057	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5680	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5058	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5682	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C5059	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5683	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5060	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5684	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5061	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C5685	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5062	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C5686	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5063	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5689	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C5064	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5690	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5065	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5691	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5066	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5692	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C5067	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	C5693	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5068	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5695	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5069	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5696	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5070	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5697	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5071	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5698	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5072	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5699	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5073	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5700	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5630	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C5701	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5631	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C5702	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C5632	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5703	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C5633	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5750	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5634	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5751	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C5635	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5752	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5636	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5753	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C5637	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5754	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5638	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5755	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5646	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C5756	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C5650	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5757	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5651	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5758	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5652	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5759	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5653	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5760	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5654	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5761	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5655	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5762	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5656	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5763	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5660	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C5764	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5661	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C5765	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5662	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C5766	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5663	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C5767	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C5664	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5780	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5665	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5781	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C5782	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C6518	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C5783	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	C6519	1-162-974-11	CERAMIC CHIP 0.01UF	50V
C5785	1-164-840-11	CERAMIC CHIP 1PF	0.25PF 50V	C6520	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5786	1-164-840-11	CERAMIC CHIP 1PF	0.25PF 50V	C6522	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5787	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C6523	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V
C5789	1-126-205-11	ELECT CHIP 47UF	20.00% 6.3V	C6524	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5790	1-104-905-11	DOUBLE LAYER 0.22F	5.5V	C6525	1-165-671-21	ELECT CHIP 470UF	20% 6.3V
C5791	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	C6526	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C5792	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C6528	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C5793	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C6529	1-165-671-21	ELECT CHIP 470UF	20% 6.3V
C5794	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C6530	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5795	1-165-822-91	CERAMIC CHIP 1UF	25V	C6532	1-110-530-11	ELECT CHIP 1000UF	20% 6.3V
C5796	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C6535	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5797	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C6536	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C5798	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C6538	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5799	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C6539	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5800	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C6543	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5801	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C6545	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C5803	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C6546	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C5804	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C6547	1-162-964-11	CERAMIC CHIP 0.001UF	10% 50V
C5805	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V	C6548	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5806	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C6549	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5807	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C6551	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5808	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C6553	1-117-370-11	CERAMIC CHIP 10UF	10V
C5809	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C6554	1-117-370-11	CERAMIC CHIP 10UF	10V
C5810	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V	C6555	1-117-370-11	CERAMIC CHIP 10UF	10V
C5811	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C6556	1-117-370-11	CERAMIC CHIP 10UF	10V
C5812	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C6557	1-117-370-11	CERAMIC CHIP 10UF	10V
C5813	1-135-366-11	ELECT CHIP 100UF	20% 16V	C6558	1-100-911-11	CERAMIC CHIP 4.7UF	10.00% 25V
C5814	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C6559	1-117-370-11	CERAMIC CHIP 10UF	10V
C5815	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C6560	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C5816	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C6561	1-117-370-11	CERAMIC CHIP 10UF	10V
C5844	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C6562	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C6500	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C6563	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C6501	1-162-974-11	CERAMIC CHIP 0.01UF	50V	C6564	1-100-911-11	CERAMIC CHIP 4.7UF	10.00% 25V
C6502	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C6565	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C6503	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C6566	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C6504	1-137-894-21	ELECT CHIP 470UF	20% 25V	C6567	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V
C6505	1-137-894-21	ELECT CHIP 470UF	20% 25V	C6572	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C6506	1-137-894-21	ELECT CHIP 470UF	20% 25V	C6579	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C6507	1-137-894-21	ELECT CHIP 470UF	20% 25V	C6581	1-109-982-11	CERAMIC CHIP 1UF	10.00% 10V
C6508	1-137-894-21	ELECT CHIP 470UF	20% 25V	C6582	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V
C6509	1-137-894-21	ELECT CHIP 470UF	20% 25V	C8907	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C6510	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C8922	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C6511	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C8923	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C6512	1-162-974-11	CERAMIC CHIP 0.01UF	50V	< CONNECTOR >			
C6513	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN3000	*1-819-335-11	HEADER ASSEMBLY FOR PWB, 9P	
C6515	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	CN3001	*1-818-656-21	HEADER ASSEMBLY 30P	
C6516	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	CN3002	1-779-884-11	CONNECTOR 4P	
C6517	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

BDT

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
CN3003	1-820-187-11	HEADER ASSEMBLY (PRINT PWB)10P		< FUSE >			
CN3004	*1-819-333-11	HEADER ASSEMBLY FOR PWB 5P		FB4000	Δ 1-576-646-11	FUSE	0.5A 50V
CN3005	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P		< FERRITE BEAD >			
CN3006	1-820-255-51	FFC/FPC CONNECTOR (ZIF) 20P		FB3012	1-414-445-11	FERRITE	OUH
CN3007	1-784-254-11	CONNECTOR 10P		FB3013	1-414-445-11	FERRITE	OUH
CN3008	1-779-936-51	CONNECTOR, FFC/FPC 18P		FB3014	1-414-445-11	FERRITE	OUH
CN4000	*1-817-804-11	CONNECTOR, D SUB 15P		FB3046	1-414-445-11	FERRITE	OUH
CN4200	*1-820-208-11	HDMI CONNECTOR		FB3099	1-414-760-21	FERRITE	OUH
CN5750	*1-793-769-21	CONNECTOR, CARD (PCMCIA CARD)		FB3241	1-414-760-21	FERRITE	OUH
CN5883	1-820-209-11	MEMORY STICK CONNECTOR		FB3242	1-414-760-21	FERRITE	OUH
CN6500	*1-819-441-11	PWB HEADER, 13P		FB3243	1-414-760-21	FERRITE	OUH
CN6501	*1-819-474-11	HEADER ASSEMBLY FOR PWB 6P		FB3244	1-414-760-21	FERRITE	OUH
< DIODE >				FB3245	1-414-760-21	FERRITE	OUH
D3004	8-719-050-38	DIODE M1MA152WK-T1		FB4003	1-400-141-22	FERRITE	OUH
D3005	8-719-036-94	DIODE RD5.6SB-T1		FB4200	1-414-234-22	FERRITE	OUH
D3009	8-719-081-97	DIODE MMDL914T1		FB5040	1-400-244-11	FERRITE	OUH
D3010	8-719-081-97	DIODE MMDL914T1		FB5041	1-400-244-11	FERRITE	OUH
D3011	8-719-081-97	DIODE MMDL914T1		FB5612	1-400-833-21	FERRITE	OUH
D3012	8-719-081-97	DIODE MMDL914T1		FB5613	1-400-833-21	FERRITE	OUH
D3014	8-719-081-97	DIODE MMDL914T1		FB5614	1-400-833-21	FERRITE	OUH
D3015	8-719-081-97	DIODE MMDL914T1		FB5615	1-400-833-21	FERRITE	OUH
D4000	8-719-073-39	DIODE HZU5.6GTRF		FB5616	1-400-833-21	FERRITE	OUH
D4001	8-719-073-39	DIODE HZU5.6GTRF		FB5617	1-400-833-21	FERRITE	OUH
D4002	8-719-073-39	DIODE HZU5.6GTRF		FB5618	1-400-807-21	FERRITE	OUH
D4003	8-719-801-78	DIODE 1SS184		FB5619	1-400-807-21	FERRITE	OUH
D4203	8-719-404-50	DIODE MA111-TX		FB5620	1-400-807-21	FERRITE	OUH
D4204	8-719-404-50	DIODE MA111-TX		FB5621	1-400-807-21	FERRITE	OUH
D5780	8-719-041-97	DIODE MA113-(TX)		FB5622	1-400-833-21	FERRITE	OUH
D6500	8-719-081-67	DIODE M1FM3		FB5623	1-400-833-21	FERRITE	OUH
D6501	8-719-081-67	DIODE M1FM3		FB5624	1-400-833-21	FERRITE	OUH
D6502	6-500-696-01	DIODE UDZSTE-173.0B		FB5630	1-469-869-21	FERRITE	OUH
D6504	8-719-081-97	DIODE MMDL914T1		FB5634	1-400-244-11	FERRITE	OUH
D6505	8-719-081-97	DIODE MMDL914T1		FB5635	1-400-244-11	FERRITE	OUH
D6506	6-501-336-01	DIODE RSX201L-30TE25		FB5636	1-469-869-21	FERRITE	OUH
D6507	8-719-080-41	DIODE RB063L-30TE25		FB5637	1-469-869-21	FERRITE	OUH
D6508	8-719-081-97	DIODE MMDL914T1		FB5646	1-400-834-11	FERRITE	OUH
D6509	6-500-294-01	DIODE PTZ-TE25-3.9B		FB5647	1-469-869-21	FERRITE	OUH
D6510	6-500-253-01	DIODE RB053L-30TE25		FB5680	1-400-244-11	FERRITE	OUH
D6512	6-500-253-01	DIODE RB053L-30TE25		FB5681	1-400-244-11	FERRITE	OUH
D6513	6-500-294-01	DIODE PTZ-TE25-3.9B		FB5750	1-469-869-21	FERRITE	OUH
D6514	6-500-295-01	DIODE PTZ-TE25-5.6B		FB5751	1-469-869-21	FERRITE	OUH
D6515	8-719-083-63	DIODE UDZSTE-1713B		FB5780	1-400-244-11	FERRITE	OUH
D6516	8-719-081-99	DIODE MM3Z13VT1		FB5781	1-400-244-11	FERRITE	OUH
D6517	8-719-081-99	DIODE MM3Z13VT1		FB5782	1-400-244-11	FERRITE	OUH
D6518	8-719-066-10	DIODE 1PS181-115		FB5907	1-400-834-11	FERRITE	OUH
D6519	8-719-081-97	DIODE MMDL914T1		FB5908	1-400-834-11	FERRITE	OUH
D6520	8-719-066-10	DIODE 1PS181-115		FB5909	1-400-834-11	FERRITE	OUH
				FB5910	1-400-834-11	FERRITE	OUH

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
FB5911	1-400-834-11	FERRITE	0UH	IC6504	6-709-240-01	IC BH12PB1WHFV-TR	
FB5912	1-400-834-11	FERRITE	0UH	IC6505	6-709-932-01	IC MM3141CNRE	
FB5913	1-400-834-11	FERRITE	0UH			< COIL >	
FB5914	1-400-834-11	FERRITE	0UH				
FB5915	1-400-834-11	FERRITE	0UH				
				L3000	1-456-984-11	INDUCTOR	0UH
FB5916	1-400-244-11	FERRITE	0UH	L3001	1-456-984-11	INDUCTOR	0UH
FB5917	1-400-244-11	FERRITE	0UH	L3002	1-456-984-11	INDUCTOR	0UH
FB6500	1-469-324-21	FERRITE	0UH	L3003	1-456-984-11	INDUCTOR	0UH
FB6501	1-469-324-21	FERRITE	0UH	L3004	1-456-984-11	INDUCTOR	0UH
FB6502	1-469-775-21	FERRITE	0UH				
				L3005	1-400-180-21	FERRITE	0UH
	< IC >			L3350	1-412-990-41	INDUCTOR	8.2UH
IC3000	8-759-082-60	IC TC7S66FU		L4208	1-414-394-11	INDUCTOR	2.2UH
IC3001	6-706-419-01	IC LM393DT (A)		L4212	1-414-394-11	INDUCTOR	2.2UH
IC3002	6-701-173-01	IC MC74LVXT4053DTR2		L4213	1-414-394-11	INDUCTOR	2.2UH
IC3003	8-759-701-01	IC NJM2904M					
IC3004	6-704-573-01	IC M24C32-WMN6T (B)		L4214	1-414-394-11	INDUCTOR	2.2UH
				L4216	1-414-394-11	INDUCTOR	2.2UH
IC3005	6-703-175-01	IC PST3629UL		L4217	1-414-394-11	INDUCTOR	2.2UH
IC3006	6-806-613-01	IC VCT6973G		L4262	1-414-394-11	INDUCTOR	2.2UH
IC3008	8-752-072-94	IC CXA1875AM-T4		L4263	1-414-394-11	INDUCTOR	2.2UH
IC4000	6-704-600-01	IC M24C02-WMN6T (B)					
IC4200	6-704-001-01	IC BR24L02F-WE2		L5040	1-469-842-21	INDUCTOR	0.47UH
				L5041	1-412-058-11	INDUCTOR	10UH
IC4201	6-709-806-01	IC IP4776CZ38		L5042	1-412-058-11	INDUCTOR	10UH
IC4202	6-709-602-01	IC TDA9974AHS/8/C112		L5043	1-412-058-11	INDUCTOR	10UH
IC5040	8-753-264-52	IC CXD1968R-T6		L5044	1-412-058-11	INDUCTOR	10UH
IC5630	6-709-214-01	IC UPD61123F1-100-KA3-A					
IC5680	6-705-336-01	IC K9F2808U0C-PCB0T		L5045	1-412-058-11	INDUCTOR	10UH
				L5046	1-412-058-11	INDUCTOR	10UH
IC5681	6-707-809-01	IC EDD1216AATA-6B-E		L5630	1-414-398-11	INDUCTOR	10UH
IC5682	6-708-916-01	IC ICS7150MLFT		L6500	1-416-511-11	INDUCTOR	47UH
IC5750	8-759-644-48	IC 74LVC541APW		L6501	1-416-511-11	INDUCTOR	47UH
IC5751	8-759-644-48	IC 74LVC541APW					
IC5752	6-706-482-01	IC TC7SH00FU (T5RSOYJF)		L6502	1-457-242-11	INDUCTOR	0UH
				L6503	1-414-398-11	INDUCTOR	10UH
IC5753	8-759-644-48	IC 74LVC541APW		L6504	1-424-976-21	INDUCTOR	47UH
IC5754	6-708-132-01	IC 74LVC14APW		L6505	1-457-242-11	INDUCTOR	0UH
IC5755	8-759-644-48	IC 74LVC541APW		L6506	1-424-976-21	INDUCTOR	47UH
IC5756	8-759-644-48	IC 74LVC541APW					
IC5757	8-759-644-48	IC 74LVC541APW		L6508	1-424-922-21	INDUCTOR	10UH
				L6509	1-424-922-21	INDUCTOR	10UH
IC5758	6-707-853-01	IC TC74LCX541FT (EKJ)		L6511	1-424-922-21	INDUCTOR	10UH
IC5759	8-759-298-91	IC 74LVT245PW-T		L6512	1-416-511-11	INDUCTOR	47UH
IC5780	6-700-108-01	IC RV5C387A-E2-FB		L6514	1-412-026-11	INDUCTOR	1UH
IC5781	6-703-271-01	IC TAR5S50 (TE85R)					
IC5782	6-707-808-01	IC WM8727GED/RV		L6515	1-412-026-11	INDUCTOR	1UH
				L6516	1-412-026-11	INDUCTOR	1UH
IC5783	8-759-701-40	IC NJM3404AM-T1		L6517	1-414-394-11	INDUCTOR	2.2UH
IC5784	6-706-106-01	IC NCP1117STAT3		L6518	1-412-026-11	INDUCTOR	1UH
IC5785	6-708-603-01	IC PQ070XNA1ZPH		L6519	1-412-026-11	INDUCTOR	1UH
IC5786	6-705-790-01	IC LM3525MX-H/J5000395					
IC6500	6-702-142-01	IC PQ1CY1032ZP		L6520	1-412-026-11	INDUCTOR	1UH
				L6521	1-412-026-11	INDUCTOR	1UH
IC6501	6-702-142-01	IC PQ1CY1032ZP		L6522	1-412-026-11	INDUCTOR	1UH
IC6502	6-706-046-01	IC TK11185CSCCL-G		L6523	1-412-026-11	INDUCTOR	1UH
IC6503	6-702-142-01	IC PQ1CY1032ZP		L6524	1-412-026-11	INDUCTOR	1UH
				L6525	1-412-026-11	INDUCTOR	1UH

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

BDT

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
L6526	1-414-394-11	INDUCTOR	2.2UH	Q6506	8-729-010-25	TRANSISTOR MSD601-RT1	
L6527	1-414-394-11	INDUCTOR	2.2UH	Q6507	8-729-010-25	TRANSISTOR MSD601-RT1	
L6528	1-412-026-11	INDUCTOR	1UH	Q6509	8-729-046-04	TRANSISTOR FDS6690A	
< PROTECTOR MODULE >				Q6510	8-729-421-22	TRANSISTOR UN2211	
PS6500	Δ 1-576-736-41	IC LINK	3.15A 24V	Q6511	8-729-421-22	TRANSISTOR UN2211	
PS6501	Δ 1-576-736-41	IC LINK	3.15A 24V	Q6512	6-550-369-01	TRANSISTOR TPC8109(TE12L)	
PS6502	Δ 1-576-736-41	IC LINK	3.15A 24V	Q6513	6-550-369-01	TRANSISTOR TPC8109(TE12L)	
< TRANSISTOR >				Q6514	8-729-010-05	TRANSISTOR MSB709-RT1	
Q3000	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		Q6515	8-729-421-22	TRANSISTOR UN2211	
Q3001	8-729-421-22	TRANSISTOR UN2211		Q6555	8-729-421-22	TRANSISTOR UN2211	
Q3002	8-729-927-99	TRANSISTOR 2SC4617R		< RESISTOR >			
Q3003	8-729-927-99	TRANSISTOR 2SC4617R		JR5600	1-216-295-91	SHORT CHIP	0
Q3004	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		JR5601	1-218-990-81	SHORT CHIP	0
Q3006	8-729-905-35	TRANSISTOR 2SC4081-R		JR5602	1-218-990-81	SHORT CHIP	0
Q3007	6-550-549-01	TRANSISTOR DTC114EUAFT106		R3000	1-216-864-11	SHORT CHIP	0
Q3008	8-729-045-62	TRANSISTOR 2SK2158-T2B		R3001	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q3009	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R3002	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
Q3010	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R3003	1-216-864-11	SHORT CHIP	0
Q3011	8-729-045-62	TRANSISTOR 2SK2158-T2B		R3004	1-216-864-11	SHORT CHIP	0
Q3012	8-729-422-29	TRANSISTOR 2SD601A-S		R3006	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q3013	8-729-422-29	TRANSISTOR 2SD601A-S		R3015	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
Q3014	8-729-422-29	TRANSISTOR 2SD601A-S		R3016	1-216-821-11	METAL CHIP	1K 5% 1/10W
Q3015	8-729-422-29	TRANSISTOR 2SD601A-S		R3019	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q3016	8-729-421-19	TRANSISTOR UN2213		R3020	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q3017	8-729-050-10	TRANSISTOR PMBF170-215		R3021	1-216-849-11	METAL CHIP	220K 5% 1/10W
Q3020	8-729-905-35	TRANSISTOR 2SC4081-R		R3022	1-216-849-11	METAL CHIP	220K 5% 1/10W
Q3120	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		R3023	1-216-849-11	METAL CHIP	220K 5% 1/10W
Q3121	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		R3024	1-216-849-11	METAL CHIP	220K 5% 1/10W
Q3122	8-729-028-73	TRANSISTOR DTA114EUA-T106		R3026	1-216-849-11	METAL CHIP	220K 5% 1/10W
Q3123	8-729-010-05	TRANSISTOR MSB709-RT1		R3027	1-216-849-11	METAL CHIP	220K 5% 1/10W
Q3300	8-729-010-05	TRANSISTOR MSB709-RT1		R3028	1-216-849-11	METAL CHIP	220K 5% 1/10W
Q3301	8-729-421-19	TRANSISTOR UN2213		R3029	1-216-841-11	METAL CHIP	47K 5% 1/10W
Q3350	8-729-010-05	TRANSISTOR MSB709-RT1		R3030	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q3351	8-729-010-29	TRANSISTOR MSD601-RST1		R3031	1-216-864-11	SHORT CHIP	0
Q4200	8-729-421-22	TRANSISTOR UN2211		R3032	1-216-849-11	METAL CHIP	220K 5% 1/10W
Q4204	8-729-421-22	TRANSISTOR UN2211		R3034	1-218-879-11	METAL CHIP	22K 0.5% 1/10W
Q4211	8-729-010-29	TRANSISTOR MSD601-RST1		R3035	1-216-864-11	SHORT CHIP	0
Q5780	8-729-010-05	TRANSISTOR MSB709-RT1		R3036	1-216-864-11	SHORT CHIP	0
Q5920	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		R3037	1-216-864-11	SHORT CHIP	0
Q5921	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		R3038	1-216-864-11	SHORT CHIP	0
Q5922	8-729-028-86	TRANSISTOR DTA143EUA-T106		R3039	1-216-864-11	SHORT CHIP	0
Q5923	8-729-907-00	TRANSISTOR DTC114EU		R3040	1-218-891-11	METAL CHIP	68K 0.5% 1/10W
Q6500	8-729-421-22	TRANSISTOR UN2211		R3042	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q6501	8-729-421-22	TRANSISTOR UN2211		R3043	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q6502	8-729-421-22	TRANSISTOR UN2211		R3044	1-216-817-11	METAL CHIP	470 5% 1/10W
Q6503	8-729-010-25	TRANSISTOR MSD601-RT1		R3045	1-216-864-11	SHORT CHIP	0
Q6504	8-729-421-22	TRANSISTOR UN2211		R3046	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q6505	8-729-010-25	TRANSISTOR MSD601-RT1		R3048	1-216-864-11	SHORT CHIP	0
				R3049	1-216-864-11	SHORT CHIP	0

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3050	1-216-864-11	SHORT CHIP	0			R3110	1-216-864-11	SHORT CHIP	0		
R3051	1-216-864-11	SHORT CHIP	0			R3111	1-218-823-11	METAL CHIP	100	0.5%	1/10W
R3052	1-216-864-11	SHORT CHIP	0			R3112	1-216-864-11	SHORT CHIP	0		
R3053	1-216-864-11	SHORT CHIP	0			R3113	1-218-823-11	METAL CHIP	100	0.5%	1/10W
R3054	1-216-864-11	SHORT CHIP	0			R3114	1-218-823-11	METAL CHIP	100	0.5%	1/10W
R3057	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3115	1-218-823-11	METAL CHIP	100	0.5%	1/10W
R3058	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3116	1-218-823-11	METAL CHIP	100	0.5%	1/10W
R3059	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3117	1-216-864-11	SHORT CHIP	0		
R3061	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R3119	1-216-864-11	SHORT CHIP	0		
R3062	1-216-809-11	METAL CHIP	100	5%	1/10W	R3121	1-216-864-11	SHORT CHIP	0		
R3063	1-216-809-11	METAL CHIP	100	5%	1/10W	R3124	1-216-864-11	SHORT CHIP	0		
R3064	1-216-809-11	METAL CHIP	100	5%	1/10W	R3127	1-216-864-11	SHORT CHIP	0		
R3067	1-216-809-11	METAL CHIP	100	5%	1/10W	R3129	1-216-864-11	SHORT CHIP	0		
R3068	1-216-809-11	METAL CHIP	100	5%	1/10W	R3133	1-216-809-11	METAL CHIP	100	5%	1/10W
R3069	1-216-809-11	METAL CHIP	100	5%	1/10W	R3136	1-216-809-11	METAL CHIP	100	5%	1/10W
R3071	1-216-809-11	METAL CHIP	100	5%	1/10W	R3137	1-216-864-11	SHORT CHIP	0		
R3072	1-216-809-11	METAL CHIP	100	5%	1/10W	R3138	1-216-809-11	METAL CHIP	100	5%	1/10W
R3073	1-216-809-11	METAL CHIP	100	5%	1/10W	R3140	1-216-809-11	METAL CHIP	100	5%	1/10W
R3074	1-216-809-11	METAL CHIP	100	5%	1/10W	R3142	1-216-809-11	METAL CHIP	100	5%	1/10W
R3075	1-216-809-11	METAL CHIP	100	5%	1/10W	R3143	1-216-864-11	SHORT CHIP	0		
R3076	1-216-809-11	METAL CHIP	100	5%	1/10W	R3146	1-216-864-11	SHORT CHIP	0		
R3077	1-216-809-11	METAL CHIP	100	5%	1/10W	R3147	1-216-864-11	SHORT CHIP	0		
R3078	1-216-809-11	METAL CHIP	100	5%	1/10W	R3150	1-216-809-11	METAL CHIP	100	5%	1/10W
R3079	1-216-864-11	SHORT CHIP	0			R3153	1-216-864-11	SHORT CHIP	0		
R3080	1-216-864-11	SHORT CHIP	0			R3156	1-216-864-11	SHORT CHIP	0		
R3081	1-216-864-11	SHORT CHIP	0			R3158	1-216-864-11	SHORT CHIP	0		
R3083	1-216-864-11	SHORT CHIP	0			R3159	1-216-864-11	SHORT CHIP	0		
R3084	1-216-864-11	SHORT CHIP	0			R3160	1-216-864-11	SHORT CHIP	0		
R3085	1-216-864-11	SHORT CHIP	0			R3161	1-216-864-11	SHORT CHIP	0		
R3087	1-216-864-11	SHORT CHIP	0			R3163	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3088	1-216-864-11	SHORT CHIP	0			R3175	1-216-864-11	SHORT CHIP	0		
R3089	1-216-809-11	METAL CHIP	100	5%	1/10W	R3177	1-216-809-11	METAL CHIP	100	5%	1/10W
R3090	1-216-809-11	METAL CHIP	100	5%	1/10W	R3178	1-216-809-11	METAL CHIP	100	5%	1/10W
R3091	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3180	1-216-809-11	METAL CHIP	100	5%	1/10W
R3092	1-216-864-11	SHORT CHIP	0			R3181	1-216-809-11	METAL CHIP	100	5%	1/10W
R3093	1-216-864-11	SHORT CHIP	0			R3182	1-216-809-11	METAL CHIP	100	5%	1/10W
R3094	1-216-864-11	SHORT CHIP	0			R3183	1-216-809-11	METAL CHIP	100	5%	1/10W
R3095	1-216-864-11	SHORT CHIP	0			R3184	1-216-809-11	METAL CHIP	100	5%	1/10W
R3096	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3185	1-216-809-11	METAL CHIP	100	5%	1/10W
R3097	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3186	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3098	1-216-864-11	SHORT CHIP	0			R3187	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3100	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3188	1-216-864-11	SHORT CHIP	0		
R3101	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3190	1-216-864-11	SHORT CHIP	0		
R3103	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3191	1-216-864-11	SHORT CHIP	0		
R3104	1-216-864-11	SHORT CHIP	0			R3192	1-216-864-11	SHORT CHIP	0		
R3105	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3193	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3106	1-218-891-11	METAL CHIP	68K	0.5%	1/10W	R3195	1-216-864-11	SHORT CHIP	0		
R3107	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3196	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3108	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R3198	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R3109	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3201	1-216-864-11	SHORT CHIP	0		

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3202	1-216-864-11	SHORT CHIP	0			R3276	1-216-864-11	SHORT CHIP	0		
R3203	1-216-864-11	SHORT CHIP	0			R3277	1-216-864-11	SHORT CHIP	0		
R3204	1-216-864-11	SHORT CHIP	0			R3278	1-216-864-11	SHORT CHIP	0		
R3209	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3279	1-216-864-11	SHORT CHIP	0		
R3212	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3280	1-216-864-11	SHORT CHIP	0		
R3213	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R3281	1-216-864-11	SHORT CHIP	0		
R3215	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R3282	1-216-864-11	SHORT CHIP	0		
R3216	1-216-864-11	SHORT CHIP	0			R3283	1-216-864-11	SHORT CHIP	0		
R3219	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R3284	1-216-864-11	SHORT CHIP	0		
R3220	1-216-864-11	SHORT CHIP	0			R3285	1-216-864-11	SHORT CHIP	0		
R3221	1-216-864-11	SHORT CHIP	0			R3286	1-216-864-11	SHORT CHIP	0		
R3222	1-216-809-11	METAL CHIP	100	5%	1/10W	R3287	1-216-864-11	SHORT CHIP	0		
R3224	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R3288	1-216-864-11	SHORT CHIP	0		
R3225	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R3289	1-216-864-11	SHORT CHIP	0		
R3229	1-216-864-11	SHORT CHIP	0			R3290	1-216-864-11	SHORT CHIP	0		
R3230	1-216-864-11	SHORT CHIP	0			R3291	1-216-864-11	SHORT CHIP	0		
R3231	1-216-864-11	SHORT CHIP	0			R3292	1-216-864-11	SHORT CHIP	0		
R3232	1-216-864-11	SHORT CHIP	0			R3293	1-216-809-11	METAL CHIP	100	5%	1/10W
R3233	1-216-864-11	SHORT CHIP	0			R3295	1-216-864-11	SHORT CHIP	0		
R3236	1-216-864-11	SHORT CHIP	0			R3296	1-216-845-11	METAL CHIP	100K	5%	1/10W
R3237	1-216-864-11	SHORT CHIP	0			R3297	1-216-809-11	METAL CHIP	100	5%	1/10W
R3240	1-216-817-11	METAL CHIP	470	5%	1/10W	R3298	1-216-851-11	METAL CHIP	330K	5%	1/10W
R3246	1-216-864-11	SHORT CHIP	0			R3299	1-216-813-11	METAL CHIP	220	5%	1/10W
R3247	1-216-843-11	METAL CHIP	68K	5%	1/10W	R3300	1-216-817-11	METAL CHIP	470	5%	1/10W
R3248	1-216-851-11	METAL CHIP	330K	5%	1/10W	R3301	1-216-837-11	METAL CHIP	22K	5%	1/10W
R3249	1-216-817-11	METAL CHIP	470	5%	1/10W	R3302	1-216-849-11	METAL CHIP	220K	5%	1/10W
R3250	1-216-821-11	METAL CHIP	1K	5%	1/10W	R3303	1-216-839-11	METAL CHIP	33K	5%	1/10W
R3251	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3304	1-216-839-11	METAL CHIP	33K	5%	1/10W
R3252	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3305	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3253	1-216-864-11	SHORT CHIP	0			R3310	1-216-809-11	METAL CHIP	100	5%	1/10W
R3255	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3311	1-216-809-11	METAL CHIP	100	5%	1/10W
R3256	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3320	1-216-864-11	SHORT CHIP	0		
R3257	1-218-990-81	SHORT CHIP	0			R3321	1-216-864-11	SHORT CHIP	0		
R3259	1-216-821-11	METAL CHIP	1K	5%	1/10W	R3350	1-216-821-11	METAL CHIP	1K	5%	1/10W
R3260	1-216-837-11	METAL CHIP	22K	5%	1/10W	R3351	1-216-805-11	METAL CHIP	47	5%	1/10W
R3261	1-216-864-11	SHORT CHIP	0			R3352	1-216-864-11	SHORT CHIP	0		
R3262	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R3355	1-216-821-11	METAL CHIP	1K	5%	1/10W
R3263	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R3356	1-216-864-11	SHORT CHIP	0		
R3264	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R3370	1-216-864-11	SHORT CHIP	0		
R3265	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R3371	1-216-864-11	SHORT CHIP	0		
R3266	1-216-817-11	METAL CHIP	470	5%	1/10W	R3372	1-216-864-11	SHORT CHIP	0		
R3267	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R3373	1-216-864-11	SHORT CHIP	0		
R3268	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R3374	1-216-841-11	METAL CHIP	47K	5%	1/10W
R3269	1-216-841-11	METAL CHIP	47K	5%	1/10W	R3375	1-216-809-11	METAL CHIP	100	5%	1/10W
R3270	1-216-864-11	SHORT CHIP	0			R3376	1-220-397-11	METAL CHIP	4.7M	5%	1/10W
R3271	1-216-864-11	SHORT CHIP	0			R3377	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3272	1-216-864-11	SHORT CHIP	0			R3378	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3273	1-216-864-11	SHORT CHIP	0			R3379	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3274	1-216-864-11	SHORT CHIP	0			R3380	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3275	1-216-864-11	SHORT CHIP	0			R3381	1-216-809-11	METAL CHIP	100	5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3382	1-216-841-11	METAL CHIP	47K	5%	1/10W	R4252	1-216-809-11	METAL CHIP	100	5%	1/10W
R3387	1-216-864-11	SHORT CHIP	0			R4253	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3388	1-216-864-11	SHORT CHIP	0			R4254	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3389	1-216-864-11	SHORT CHIP	0			R4255	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3392	1-216-809-11	METAL CHIP	100	5%	1/10W	R4256	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3393	1-216-833-11	METAL CHIP	10K	5%	1/10W	R4271	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3394	1-216-841-11	METAL CHIP	47K	5%	1/10W	R4272	1-216-833-11	METAL CHIP	10K	5%	1/10W
R4000	1-216-805-11	METAL CHIP	47	5%	1/10W	R5040	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4001	1-216-805-11	METAL CHIP	47	5%	1/10W	R5041	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4004	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5043	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4005	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5044	1-218-941-81	RES-CHIP	100	5%	1/16W
R4006	1-216-805-11	METAL CHIP	47	5%	1/10W	R5045	1-218-941-81	RES-CHIP	100	5%	1/16W
R4007	1-216-805-11	METAL CHIP	47	5%	1/10W	R5046	1-218-953-11	RES-CHIP	1K	5%	1/16W
R4008	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5049	1-218-989-11	RES-CHIP	1M	5%	1/16W
R4009	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5050	1-218-941-81	RES-CHIP	100	5%	1/16W
R4010	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5051	1-218-941-81	RES-CHIP	100	5%	1/16W
R4011	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5053	1-218-937-11	RES-CHIP	47	5%	1/16W
R4012	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5054	1-218-941-81	RES-CHIP	100	5%	1/16W
R4013	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5055	1-218-941-81	RES-CHIP	100	5%	1/16W
R4014	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5056	1-216-864-11	SHORT CHIP	0		
R4015	1-216-864-11	SHORT CHIP	0			R5057	1-218-941-81	RES-CHIP	100	5%	1/16W
R4016	1-216-864-11	SHORT CHIP	0			R5058	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4017	1-216-864-11	SHORT CHIP	0			R5060	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4018	1-216-864-11	SHORT CHIP	0			R5061	1-218-941-81	RES-CHIP	100	5%	1/16W
R4019	1-216-864-11	SHORT CHIP	0			R5062	1-218-941-81	RES-CHIP	100	5%	1/16W
R4020	1-216-845-11	METAL CHIP	100K	5%	1/10W	R5063	1-218-941-81	RES-CHIP	100	5%	1/16W
R4202	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5064	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4204	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5625	1-218-990-81	SHORT CHIP	0		
R4205	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R5626	1-218-990-81	SHORT CHIP	0		
R4206	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R5629	1-218-990-81	SHORT CHIP	0		
R4208	1-216-809-11	METAL CHIP	100	5%	1/10W	R5630	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4209	1-216-809-11	METAL CHIP	100	5%	1/10W	R5631	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4210	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R5632	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4211	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R5633	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4212	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5634	1-218-941-81	RES-CHIP	100	5%	1/16W
R4220	1-216-809-11	METAL CHIP	100	5%	1/10W	R5635	1-218-941-81	RES-CHIP	100	5%	1/16W
R4232	1-216-809-11	METAL CHIP	100	5%	1/10W	R5636	1-218-941-81	RES-CHIP	100	5%	1/16W
R4235	1-216-809-11	METAL CHIP	100	5%	1/10W	R5637	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4236	1-216-809-11	METAL CHIP	100	5%	1/10W	R5638	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4237	1-216-809-11	METAL CHIP	100	5%	1/10W	R5639	1-218-941-81	RES-CHIP	100	5%	1/16W
R4239	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R5640	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R4240	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R5641	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R4241	1-216-809-11	METAL CHIP	100	5%	1/10W	R5644	1-218-941-81	RES-CHIP	100	5%	1/16W
R4242	1-216-809-11	METAL CHIP	100	5%	1/10W	R5645	1-218-941-81	RES-CHIP	100	5%	1/16W
R4243	1-216-864-11	SHORT CHIP	0			R5646	1-218-941-81	RES-CHIP	100	5%	1/16W
R4244	1-216-864-11	SHORT CHIP	0			R5647	1-218-941-81	RES-CHIP	100	5%	1/16W
R4245	1-216-839-11	METAL CHIP	33K	5%	1/10W	R5648	1-216-864-11	SHORT CHIP	0		
R4246	1-216-864-11	SHORT CHIP	0			R5652	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4248	1-216-864-11	SHORT CHIP	0			R5653	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4250	1-216-864-11	SHORT CHIP	0			R5654	1-218-965-11	RES-CHIP	10K	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R5655	1-218-937-11	RES-CHIP	47	5%	1/16W	R5737	1-218-941-81	RES-CHIP	100	5%	1/16W
R5656	1-218-937-11	RES-CHIP	47	5%	1/16W	R5738	1-218-941-81	RES-CHIP	100	5%	1/16W
R5657	1-218-937-11	RES-CHIP	47	5%	1/16W	R5739	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5658	1-218-937-11	RES-CHIP	47	5%	1/16W	R5740	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5661	1-218-937-11	RES-CHIP	47	5%	1/16W	R5744	1-218-949-11	RES-CHIP	470	5%	1/16W
						R5745	1-218-949-11	RES-CHIP	470	5%	1/16W
R5663	1-220-174-11	RES-CHIP	200	5%	1/16W	R5750	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5664	1-220-174-11	RES-CHIP	200	5%	1/16W	R5751	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5665	1-220-174-11	RES-CHIP	200	5%	1/16W	R5752	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5666	1-220-174-11	RES-CHIP	200	5%	1/16W	R5753	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5667	1-220-174-11	RES-CHIP	200	5%	1/16W						
R5668	1-220-174-11	RES-CHIP	200	5%	1/16W	R5754	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5669	1-208-671-11	METAL CHIP	330	0.5%	1/16W	R5755	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5671	1-208-679-11	METAL CHIP	680	0.5%	1/16W	R5756	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5673	1-218-990-81	SHORT CHIP	0			R5757	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5674	1-208-675-11	METAL CHIP	470	0.5%	1/16W	R5758	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
						R5759	1-218-953-11	RES-CHIP	1K	5%	1/16W
R5676	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5760	1-218-941-81	RES-CHIP	100	5%	1/16W
R5677	1-216-864-11	SHORT CHIP	0			R5761	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5681	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5763	1-218-941-81	RES-CHIP	100	5%	1/16W
R5683	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5764	1-218-941-81	RES-CHIP	100	5%	1/16W
R5684	1-218-953-11	RES-CHIP	1K	5%	1/16W						
R5686	1-218-949-11	RES-CHIP	470	5%	1/16W	R5780	1-216-809-11	METAL CHIP	100	5%	1/10W
R5687	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5781	1-216-809-11	METAL CHIP	100	5%	1/10W
R5689	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5782	1-218-945-11	RES-CHIP	220	5%	1/16W
R5691	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5783	1-216-809-11	METAL CHIP	100	5%	1/10W
R5693	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5784	1-218-953-11	RES-CHIP	1K	5%	1/16W
						R5786	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W
R5695	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5789	1-216-813-11	METAL CHIP	220	5%	1/10W
R5697	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5791	1-218-990-81	SHORT CHIP	0		
R5699	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5792	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R5701	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5793	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R5703	1-218-953-11	RES-CHIP	1K	5%	1/16W						
R5706	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5794	1-218-972-11	RES-CHIP	39K	5%	1/16W
R5707	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5795	1-218-972-11	RES-CHIP	39K	5%	1/16W
R5710	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5796	1-218-968-11	RES-CHIP	18K	5%	1/16W
R5712	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5797	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5714	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5798	1-218-965-11	RES-CHIP	10K	5%	1/16W
						R5799	1-218-968-11	RES-CHIP	18K	5%	1/16W
R5715	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5800	1-218-967-11	RES-CHIP	15K	5%	1/16W
R5717	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5801	1-218-967-11	RES-CHIP	15K	5%	1/16W
R5720	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5802	1-218-968-11	RES-CHIP	18K	5%	1/16W
R5722	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5803	1-218-953-11	RES-CHIP	1K	5%	1/16W
R5723	1-218-953-11	RES-CHIP	1K	5%	1/16W						
R5726	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5804	1-218-968-11	RES-CHIP	18K	5%	1/16W
R5727	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5805	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R5729	1-218-939-11	RES-CHIP	68	5%	1/16W	R5806	1-220-174-11	RES-CHIP	200	5%	1/16W
R5730	1-218-941-11	RES-CHIP	100	5%	1/16W	R5807	1-218-941-81	RES-CHIP	100	5%	1/16W
R5731	1-218-941-11	RES-CHIP	100	5%	1/16W	R5808	1-218-941-81	RES-CHIP	100	5%	1/16W
						R5809	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5732	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5810	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R5733	1-218-937-11	RES-CHIP	47	5%	1/16W	R5811	1-218-935-11	RES-CHIP	33	5%	1/16W
R5734	1-218-939-11	RES-CHIP	68	5%	1/16W	R5812	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R5735	1-218-941-81	RES-CHIP	100	5%	1/16W	R5813	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5736	1-218-941-81	RES-CHIP	100	5%	1/16W						

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R5814	1-218-990-81	SHORT CHIP	0			R6547	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5840	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6548	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5843	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6549	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5845	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6550	1-216-864-11	SHORT CHIP	0		
R5847	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6551	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5861	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6552	1-216-864-11	SHORT CHIP	0		
R5862	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6554	1-216-864-11	SHORT CHIP	0		
R5863	1-218-990-81	SHORT CHIP	0			R6555	1-216-864-11	SHORT CHIP	0		
R5864	1-218-990-81	SHORT CHIP	0			R6556	1-216-864-11	SHORT CHIP	0		
R5865	1-218-990-81	SHORT CHIP	0			R6558	1-216-864-11	SHORT CHIP	0		
R5884	1-218-953-11	RES-CHIP	1K	5%	1/16W	R6559	1-216-864-11	SHORT CHIP	0		
R5890	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6560	1-216-864-11	SHORT CHIP	0		
R5902	1-218-941-81	RES-CHIP	100	5%	1/16W	R6568	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R5903	1-218-941-81	RES-CHIP	100	5%	1/16W	R6569	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5904	1-218-941-81	RES-CHIP	100	5%	1/16W	R6570	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5905	1-218-941-81	RES-CHIP	100	5%	1/16W	R6572	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5906	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R6573	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5922	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6574	1-216-797-11	METAL CHIP	10	5%	1/10W
R5923	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6575	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R5925	1-216-864-11	SHORT CHIP	0			R6577	1-216-864-11	SHORT CHIP	0		
R5927	1-216-864-11	SHORT CHIP	0			R6578	1-216-864-11	SHORT CHIP	0		
R5930	1-218-941-81	RES-CHIP	100	5%	1/16W	R6581	1-216-864-11	SHORT CHIP	0		
R5950	1-218-990-81	SHORT CHIP	0			R6582	1-216-864-11	SHORT CHIP	0		
R5951	1-218-990-81	SHORT CHIP	0			R6596	1-216-837-11	METAL CHIP	22K	5%	1/10W
R5954	1-218-939-11	RES-CHIP	68	5"	1/16W	R9032	1-216-864-11	SHORT CHIP	0		
R5955	1-218-939-11	RES-CHIP	68	5"	1/16W	R9034	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5956	1-218-939-11	RES-CHIP	68	5"	1/16W	< RESISTOR CHIP >					
R5957	1-218-939-11	RES-CHIP	68	5"	1/16W	RB4205	1-239-409-11	NETWORK RESISTOR (CHIP)	47		
R5958	1-218-939-11	RES-CHIP	68	5"	1/16W	RB4206	1-239-409-11	NETWORK RESISTOR (CHIP)	47		
R5959	1-218-939-11	RES-CHIP	68	5"	1/16W	RB4208	1-239-409-11	NETWORK RESISTOR (CHIP)	47		
R6500	1-216-833-11	METAL CHIP	10K	5%	1/10W	RB4209	1-239-409-11	NETWORK RESISTOR (CHIP)	47		
R6501	1-216-833-11	METAL CHIP	10K	5%	1/10W	RB4211	1-239-409-11	NETWORK RESISTOR (CHIP)	47		
R6502	1-216-833-11	METAL CHIP	10K	5%	1/10W	RB4212	1-239-409-11	NETWORK RESISTOR (CHIP)	47		
R6508	1-216-833-11	METAL CHIP	10K	5%	1/10W	RB4214	1-233-796-11	RES, NETWORK	(1608)		
R6511	1-216-833-11	METAL CHIP	10K	5%	1/10W	RB4215	1-233-796-11	RES, NETWORK	(1608)		
R6512	1-216-864-11	SHORT CHIP	0			RB4216	1-233-796-11	RES, NETWORK	(1608)		
R6513	1-218-853-11	METAL CHIP	1.8K	0.5%	1/10W	RB4217	1-233-796-11	RES, NETWORK	(1608)		
R6514	1-218-861-11	METAL CHIP	3.9K	0.5%	1/10W	RB5040	1-234-371-21	RES, NETWORK	47	(1005X4)	
R6515	1-218-873-11	METAL CHIP	12K	0.5%	1/10W	RB5041	1-234-371-21	RES, NETWORK	47	(1005X4)	
R6516	1-218-877-11	METAL CHIP	18K	0.5%	1/10W	RB5680	1-234-702-11	RES, NETWORK	68	(1005X4)	
R6521	1-218-860-11	METAL CHIP	3.6K	0.5%	1/10W	RB5681	1-234-702-11	RES, NETWORK	68	(1005X4)	
R6522	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W	RB5682	1-234-372-11	RES, NETWORK	100	(1005X4)	
R6523	1-218-861-11	METAL CHIP	3.9K	0.5%	1/10W	RB5683	1-234-372-11	RES, NETWORK	100	(1005X4)	
R6524	1-218-850-11	METAL CHIP	1.3K	0.5%	1/10W	RB5684	1-234-372-11	RES, NETWORK	100	(1005X4)	
R6526	1-216-864-11	SHORT CHIP	0			RB5685	1-234-372-11	RES, NETWORK	100	(1005X4)	
R6528	1-216-864-11	SHORT CHIP	0			RB5686	1-234-372-11	RES, NETWORK	100	(1005X4)	
R6539	1-216-847-11	METAL CHIP	150K	5%	1/10W	RB5687	1-234-702-11	RES, NETWORK	68	(1005X4)	
R6540	1-216-839-11	METAL CHIP	33K	5%	1/10W	RB5688	1-234-702-11	RES, NETWORK	68	(1005X4)	
R6542	1-216-847-11	METAL CHIP	150K	5%	1/10W						
R6543	1-216-837-11	METAL CHIP	22K	5%	1/10W						

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

BDT G1

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
RB5689	1-239-409-11	NETWORK RESISTOR (CHIP) 47		C6027	1-107-902-11	ELECT 1UF	20% 50V
	< SWITCH >			C6028	1-107-930-11	ELECT 22UF	20% 100V
S3000	1-572-921-11	SWITCH, KEY BOARD		C6029	1-128-960-31	ELECT 1500UF	20% 35V
S3001	1-572-921-11	SWITCH, KEY BOARD		C6030	1-128-951-21	ELECT 2200UF	20% 16V
	< VARISTOR >			C6031	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
VD4000	1-803-974-21	VARISTOR, CHIP (1608)		C6032	1-107-930-11	ELECT 22UF	20% 100V
VD4001	1-803-974-21	VARISTOR, CHIP (1608)		C6033	1-165-744-11	ELECT 1200UF	20% 35V
VD4002	1-803-974-21	VARISTOR, CHIP (1608)		C6034	1-165-744-11	ELECT 1200UF	20% 35V
VD4003	1-803-974-21	VARISTOR, CHIP (1608)		C6039	1-128-950-21	ELECT 1000UF	20% 16V
VD4004	1-803-974-21	VARISTOR, CHIP (1608)		C6200	1-136-201-61	MYLAR 0.22UF	10.00% 400V
	< CRYSTAL >			C6201	1-109-879-11	CERAMIC 22PF	5.00% 2KV
X3000	1-813-531-11	OSCILLATOR, CRYSTAL UNIT		C6202	1-107-905-11	ELECT 4.7UF	20% 50V
X3001	1-813-806-21	OSCILLATOR, CRYSTAL		C6203	1-107-906-11	ELECT 10UF	20% 50V
X5040	1-813-547-11	QUARTZ CRYSTAL UNIT		C6204	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
X5680	1-813-055-11	QUARTZ CRYSTAL UNIT		C6205	1-107-909-11	ELECT 47UF	20% 50V
X5780	1-781-696-31	VIBRATOR, CRYSTAL		C6206	1-104-331-11	CERAMIC 0.0022UF	10.00% 1KV
*A-1189-415-A G1 Board Complete				C6207	1-162-115-00	CERAMIC 330PF	10.00% 1KV
(KDL-26U2000 & KDL-32U2000 only)				C6208	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
	2-409-877-21	WASHER (3X10), RS TITE SPRING		C6209	1-119-892-51	CERAMIC 470PF	10.00% 250V
	< CAPACITOR >			C6210	1-131-872-91	CERAMIC CHIP 1000PF	10% 630V
C6000	Δ 1-113-924-11	CERAMIC 0.0047UF	20.00% 250V	C6211	1-128-945-31	ELECT 1000UF	20% 10V
C6001	Δ 1-161-964-91	CERAMIC 0.0047UF	250V	C6212	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C6002	Δ 1-119-892-51	CERAMIC 470PF	10.00% 250V	C6300	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V
C6003	Δ 1-165-529-11	MYLAR 0.22UF	10 275V	C6301	1-126-960-11	ELECT 1UF	20.00% 50V
C6004	Δ 1-165-530-11	MYLAR 0.47UF	10 275V	C6302	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V
C6005	Δ 1-119-892-51	CERAMIC 470PF	10.00% 250V	C6303	1-126-960-11	ELECT 1UF	20.00% 50V
C6006	Δ 1-161-964-91	CERAMIC 0.0047UF	250V	C6304	1-128-952-31	ELECT 220UF	20.00% 25V
C6007	Δ 1-119-892-51	CERAMIC 470PF	10.00% 250V	C6306	1-164-489-11	CERAMIC CHIP 0.22UF	10.00% 16V
C6008	Δ 1-117-752-11	ELECT (BLOCK) 330UF	20% 450V	C6307	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
C6009	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C6308	1-128-959-31	ELECT 1000UF	20.00% 35V
C6010	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C6309	1-128-959-31	ELECT 1000UF	20.00% 35V
C6011	1-107-888-11	ELECT 47UF	20% 25V	C6310	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C6012	Δ 1-119-892-51	CERAMIC 470PF	10.00% 250V	C6311	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C6013	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6312	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V
C6014	1-107-905-11	ELECT 4.7UF	20% 50V	C6313	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V
C6015	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C6315	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C6016	1-107-906-11	ELECT 10UF	20% 50V	C6316	1-107-907-11	ELECT 22UF	20% 50V
C6018	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	< CONNECTOR >			
C6019	1-107-888-11	ELECT 47UF	20% 25V	CN6000	Δ *1-691-960-11	PIN, CONNECTOR (PC BOARD) 3P	
C6020	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V	CN6002	*1-785-705-11	PIN, CONNECTOR (PC BOARD) 9P	
C6021	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN6003	*1-793-235-11	PIN, CONNECTOR (PC BOARD) 13P	
C6022	1-107-824-11	CERAMIC 220PF	5.00% 1KV	CN6200	*1-785-703-21	PIN, CONNECTOR (PC BOARD) 6P	
C6023	1-107-824-11	CERAMIC 220PF	5.00% 1KV	CN6300	*1-564-507-11	PLUG, CONNECTOR 4P	
C6024	1-165-610-11	FILM 33000PF	3% 800V	< DIODE >			
C6025	1-107-902-11	ELECT 1UF	20% 50V	D6000	8-719-510-53	DIODE D4SB60L	
				D6004	8-719-082-03	DIODE MM3Z15VT1	
				D6005	8-719-081-97	DIODE MMDL914T1	
				D6006	8-719-082-03	DIODE MM3Z15VT1	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G1

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D6007	8-719-082-03	DIODE MM3Z15VT1		< PROTECTOR MODULE >			
D6008	8-719-979-64	DIODE UF4005/23		PS6000	Δ 1-533-596-21	IC LINK 4A	90V
D6009	8-719-082-03	DIODE MM3Z15VT1		PS6001	Δ 1-533-596-21	IC LINK 4A	90V
D6010	8-719-082-03	DIODE MM3Z15VT1		PS6002	Δ 1-533-595-31	IC LINK 3.15A	90V
D6011	6-501-505-01	DIODE FCH08U10		< TRANSISTOR >			
D6012	8-719-310-56	DIODE FMB-29L		Q6000	8-729-010-29	TRANSISTOR MSD601-RST1	
D6013	6-500-567-31	DIODE 10ERB20-TB3		Q6001	8-729-010-08	TRANSISTOR MSB710-R	
D6014	6-501-505-01	DIODE FCH08U10		Q6002	8-729-010-29	TRANSISTOR MSD601-RST1	
D6015	6-500-567-31	DIODE 10ERB20-TB3		Q6003	6-551-545-01	TRANSISTOR 2SK3469-01MR-F111	
D6018	8-719-310-56	DIODE FMB-29L		Q6004	6-551-545-01	TRANSISTOR 2SK3469-01MR-F111	
D6019	8-719-083-70	DIODE UDZSTE-1727B		Q6005	8-729-010-29	TRANSISTOR MSD601-RST1	
D6023	8-719-083-87	DIODE UDZS-TE17-33B		Q6006	8-729-010-25	TRANSISTOR MSD601-RT1	
D6200	8-719-083-60	DIODE UDZSTE-174.7B		Q6007	8-729-010-05	TRANSISTOR MSB709-RT1	
D6201	8-719-081-97	DIODE MMDL914T1		Q6302	8-729-010-29	TRANSISTOR MSD601-RST1	
D6202	6-500-567-31	DIODE 10ERB20-TB3		Q6303	8-729-010-05	TRANSISTOR MSB709-RT1	
D6203	8-719-948-45	DIODE ERA22-08		< RESISTOR >			
D6204	8-719-080-75	DIODE M1FL20U-4063		JR6313	1-216-295-91	SHORT CHIP	0
D6300	8-719-069-55	DIODE UDZSTE-175.6B		JR6314	1-216-295-91	SHORT CHIP	0
D6302	8-719-069-55	DIODE UDZSTE-175.6B		JR6315	1-216-295-91	SHORT CHIP	0
< TERMINAL BOARD >				JR6316	1-216-295-91	SHORT CHIP	0
ET6000	1-537-770-21	TERMINAL BOARD, GROUND		R6002	Δ 1-219-759-11	METAL 1M 5%	1/2W
< FUSE >				R6009	Δ 1-202-933-61	FUSIBLE 0.1 10%	1/2W
F6000	Δ 1-576-231-51	FUSE 4A 250V		R6010	1-208-852-11	METAL CHIP 820K 0.5%	1/10W
FH6000	Δ 1-533-725-11	FUSE HOLDER		R6011	1-208-852-11	METAL CHIP 820K 0.5%	1/10W
< IC >				R6012	1-216-837-11	METAL CHIP 22K 5%	1/10W
IC6000	6-705-810-01	IC MCZ3001DB		R6013	1-208-852-11	METAL CHIP 820K 0.5%	1/10W
IC6001	8-759-586-17	IC TL1431CZ-AP		R6016	1-216-833-11	METAL CHIP 10K 5%	1/10W
IC6002	8-759-586-17	IC TL1431CZ-AP		R6017	1-208-803-11	METAL CHIP 7.5K 0.5%	1/10W
IC6200	6-600-279-01	IC STR-A6169		R6018	1-218-881-11	METAL CHIP 27K 0.5%	1/10W
IC6201	8-759-586-17	IC TL1431CZ-AP		R6020	1-218-823-11	METAL CHIP 100 0.5%	1/10W
IC6300	8-759-831-57	IC TDA7495S		R6022	1-218-875-11	METAL CHIP 15K 0.5%	1/10W
< COIL >				R6024	1-216-845-11	METAL CHIP 100K 5%	1/10W
L6000	Δ 1-456-507-12	LINE FILTER COIL		R6025	1-216-833-11	METAL CHIP 10K 5%	1/10W
L6001	Δ 1-457-243-11	INDUCTOR 37MH		R6026	1-216-833-11	METAL CHIP 10K 5%	1/10W
L6004	1-406-971-11	INDUCTOR 10UH		R6027	1-216-837-11	METAL CHIP 22K 5%	1/10W
L6005	1-406-971-11	INDUCTOR 10UH		R6028	1-218-823-11	METAL CHIP 100 0.5%	1/10W
L6006	Δ 1-456-507-12	LINE FILTER COIL		R6029	1-216-837-11	METAL CHIP 22K 5%	1/10W
L6200	1-412-537-31	INDUCTOR 100UH		R6030	1-249-393-11	CARBON 10 5%	1/4W
< PHOTOCOUPLER >				R6031	1-249-393-11	CARBON 10 5%	1/4W
PH6000	Δ 6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6033	1-216-821-11	METAL CHIP 1K 5%	1/10W
PH6001	Δ 6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6035	1-216-833-11	METAL CHIP 10K 5%	1/10W
PH6002	Δ 6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6036	1-216-833-11	METAL CHIP 10K 5%	1/10W
PH6200	Δ 6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6037	1-216-821-11	METAL CHIP 1K 5%	1/10W
				R6038	1-216-864-11	SHORT CHIP	0
				R6039	1-216-864-11	SHORT CHIP	0
				R6040	1-245-494-21	METAL 2.2M 2%	1/4W
				R6041	1-245-494-21	METAL 2.2M 2%	1/4W

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G1

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK
R6042	1-216-817-11	METAL CHIP	470	5%	1/10W	< VARISTOR >			
R6043	1-245-315-71	METAL OXIDE	0.1	5%	2W				
R6044	1-216-864-11	SHORT CHIP	0			VD6000	△ 1-804-995-11	VARISTOR	
R6045	1-245-315-71	METAL OXIDE	0.1	5%	2W				
R6046	1-216-829-11	METAL CHIP	4.7K	5%	1/10W				
R6047	1-216-821-11	METAL CHIP	1K	5%	1/10W				
R6048	1-216-837-11	METAL CHIP	22K	5%	1/10W				
R6049	1-216-837-11	METAL CHIP	22K	5%	1/10W				
R6050	1-216-833-11	METAL CHIP	10K	5%	1/10W				
R6051	1-249-377-11	CARBON	0.47	5%	1/4W				
R6052	1-216-821-11	METAL CHIP	1K	5%	1/10W				
R6053	1-216-821-11	METAL CHIP	1K	5%	1/10W				
R6054	1-216-833-11	METAL CHIP	10K	5%	1/10W				
R6055	1-216-864-11	SHORT CHIP	0						
R6057	1-216-822-11	METAL CHIP	1.2K	5%	1/10W				
R6058	1-216-833-11	METAL CHIP	10K	5%	1/10W				
R6061	1-216-837-11	METAL CHIP	22K	5%	1/10W				
R6062	1-218-849-11	METAL CHIP	1.2K	0.5%	1/10W				
R6063	1-218-868-11	METAL CHIP	7.5K	0.5%	1/10W				
R6064	1-218-847-11	METAL CHIP	1K	0.5%	1/10W				
R6066	1-216-829-11	METAL CHIP	4.7K	5%	1/10W				
R6068	1-260-332-51	CARBON	2.2K	5%	1/2W				
R6201	1-216-353-00	METAL OXIDE	2.2	5%	1W				
R6202	1-216-864-11	SHORT CHIP	0						
R6203	1-216-864-11	SHORT CHIP	0						
R6204	1-249-393-11	CARBON	10	5%	1/4W				
R6205	1-243-725-21	METAL OXIDE	100K	5%	1W				
R6206	1-216-817-11	METAL CHIP	470	5%	1/10W				
R6207	1-216-821-11	METAL CHIP	1K	5%	1/10W				
R6208	1-216-864-11	SHORT CHIP	0						
R6209	1-216-839-11	METAL CHIP	33K	5%	1/10W				
R6210	1-218-871-11	METAL CHIP	10K	0.5%	1/10W				
R6211	1-218-871-11	METAL CHIP	10K	0.5%	1/10W				
R6212	1-216-295-91	SHORT CHIP	0						
R6213	1-216-295-91	SHORT CHIP	0						
R6304	1-216-864-11	METAL CHIP	120K	5%	1/10W				
R6306	1-216-864-11	METAL CHIP	120K	5%	1/10W				
R6308	1-216-825-11	METAL CHIP	2.2K	5%	1/10W				
R6309	1-216-049-11	RES-CHIP	1K	5%	1/10W				
R6313	1-216-864-11	SHORT CHIP	0						
R6314	1-216-845-11	METAL CHIP	100K	5%	1/10W				
R6315	1-216-845-11	METAL CHIP	100K	5%	1/10W				
R6316	1-216-837-11	METAL CHIP	22K	5%	1/10W				
R6317	1-216-833-11	METAL CHIP	10K	5%	1/10W				
R6318	1-216-833-11	METAL CHIP	10K	5%	1/10W				
< TRANSFORMER >									
T6000	△ 1-445-026-11	CONVERTER TRANSFORMER (PIT)							
T6001	△ 1-445-027-11	CONVERTER TRANSFORMER (PIT)							
T6200	△ 1-443-312-11	TRANSFORMER, CONVERTER (SBT)							

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REF.NO.	PART.NO	DESCRIPTION	REMARK
MISCELLANEOUS			
	1-826-479-11	LOUDSPEAKER (4.2X15CM) (26/32U2000UK/AEP)	
	1-826-478-11	LOUDSPEAKER (4.2X24CM) (40U2000UK/AEP)	
	8-597-585-00	TUNER, FSS BTP-HC401	
	1-802-187-11	LCD PANEL (26 WXGA TFT) (26U2000UK/AEP)	
	1-802-188-11	LCD PANEL (32 WXGA TFT) (32U2000UK/AEP)	
Revision 3.0	1-802-386-21	LCD PANEL (40 WXGA TFT) (40U2000UK/AEP)	
Δ	1-832-132-11	POWER SUPPLY CORD (26/32/40U2000AEP)	
Δ	1-832-170-11	POWER SUPPLY CORD (UK PLUG) (26/32/40U2000UK)	
ACCESSORIES AND CONNECTORS			
	*1-910-026-42	CONNECTOR ASSY 4P (26/32U2000UK/AEP)	
	*1-910-026-43	CONNECTOR ASSY 4P (40U2000UK/AEP)	
	*1-910-026-45	CONNECTOR ASSY 13P (26/32U2000UK/AEP)	
	*1-910-026-46	CONNECTOR ASSY 14P (40U2000UK/AEP)	
	*1-910-026-48	CONNECTOR ASSY 14P (26U2000UK/AEP)	
	*1-910-026-49	CONNECTOR ASSY 14P (32U2000UK/AEP)	
	*1-910-026-50	CONNECTOR ASSY 14P (40U2000/AEP/UK)	
	*1-910-026-52	CONNECTOR ASSY 6P (40U2000/AEP/UK)	
	*1-910-026-53	CONNECTOR ASSY 6P (26/32U2000UK/AEP)	
	*1-910-026-54	FFC 20P	
	*1-910-026-57	CONNECTOR ASSY 9P	
	*1-910-026-59	SPEAKER HARNESS 26 (32U2000UK)	
	*1-910-026-60	SPEAKER HARNESS 32 (32U2000UK/AEP)	
	*1-910-026-61	SPEAKER HARNESS 40 (40U2000UK/AEP)	
	*1-910-026-62	CONNECTOR ASSY 4P (32U2000UK/AEP)	
	*1-910-026-63	CONNECTOR ASSY 4P (26U2000UK/AEP)	
	*1-910-026-65	CONNECTOR ASSY 10P (26U2000UK/AEP)	
	*1-910-026-66	CONNECTOR ASSY 10P (32U2000UK/AEP)	
	*1-910-026-67	FFC 49P FOLDER (26/32U2000UK/AEP)	
	*1-910-026-68	LVDS FIE-SHLD 30P (26/32U2000UK/AEP)	
	*1-910-026-69	LVDS FIR-SHLD 30P (40U2000UK/AEP)	
	*1-910-026-71	CONNECTOR ASSY 4P (40U2000UK/AEP)	
	*1-910-026-72	CONNECTOR ASSY 10P (40U2000UK/AEP)	
	*1-910-033-22	CONNECTOR ASSY 4P (32U2000UK/AEP)	
	1-830-570-41	CABLE, ANTENNA(WITH FILTER) (26U2000AEP)	
Revision 3.0	1-469-778-11	CLAMP, FERRITE (26/32U2000UK/AEP)	
	1-469-778-21	CLAMP, FERRITE (40U2000UK/AEP)	
	1-469-089-11	FILTER, CLAMP (FERRITE CORE) (26/32U2000UK/AEP)	
	2-595-155-01	CLAMP (40U2000UK/AEP)	
	X-2102-511-2	BAG ASSY, RUDDER LOCK	
	2-591-688-02	LOCK, RUDDER	
	2-591-689-01	BELT	
	2-580-663-01	SCREW, WOOD 3.8X20	
	2-593-320-02	SCREW, COIN (M6X18)	
	*4-101-087-02	BAG. PROTECTION CROSS (26U2000UK/AEP)	

REF.NO.	PART.NO	DESCRIPTION	REMARK
	*2-682-331-13	INSTRUCTION MANUAL (ENGLISH) (26/32/40U2000UK)	
	*2-682-331-23	INSTRUCTION MANUAL (GERMAN/FRENCH/ITALIAN/ DUTCH) (26/32/40U2000AEP)	
	*2-682-331-33	INSTRUCTION MANUAL (SPANISH/PORTUGUESE/ GREEK) (26/32/40U2000AEP)	
Revision 3.0	*2-682-331-43	INSTRUCTION MANUAL (ENGLISH/RUSSIAN/POLISH) (26/32/40U2000AEP)	
	*2-682-331-53	INSTRUCTION MANUAL (SWEDISH/DANISH/FINNISH/ NORWEGIAN) (26/32/40U2000AEP)	
	*2-682-331-62	INSTRUCTION MANUAL (ENGLISH/RUSSIAN) (32U2000AEP)	
	*2-693-044-11	INSTRUCTION MANUAL (ENGLISH) (26/32U2000UK)	
	*2-693-044-21	INSTRUCTION MANUAL (GERMAN/FRENCH/ITALIAN/ DUTCH) (32U2000AEP)	
	*2-693-044-31	INSTRUCTION MANUAL (SPANISH/PORTUGUESE/ GREEK) (32U2000AEP)	
	*2-693-044-41	INSTRUCTION MANUAL (ENGLISH/RUSSIAN/POLISH) (26U2000AEP)	
	*2-693-044-51	INSTRUCTION MANUAL (SWEDISH/DANISH/FINNISH/ NORWEGIAN) (26U2000AEP)	
REMOTE COMMANDER			
	1-479-847-11	REMOTE COMMANDER (RM-ED007)	

HISTORY

Model Name : KDL-26/32/40U2000
SERVICE MANUAL

Click on Page Number to display detail of changes.

[illegible]