

SECTION 5 EXPLODED VIEWS


NOTE :

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

5-1. CHASSIS

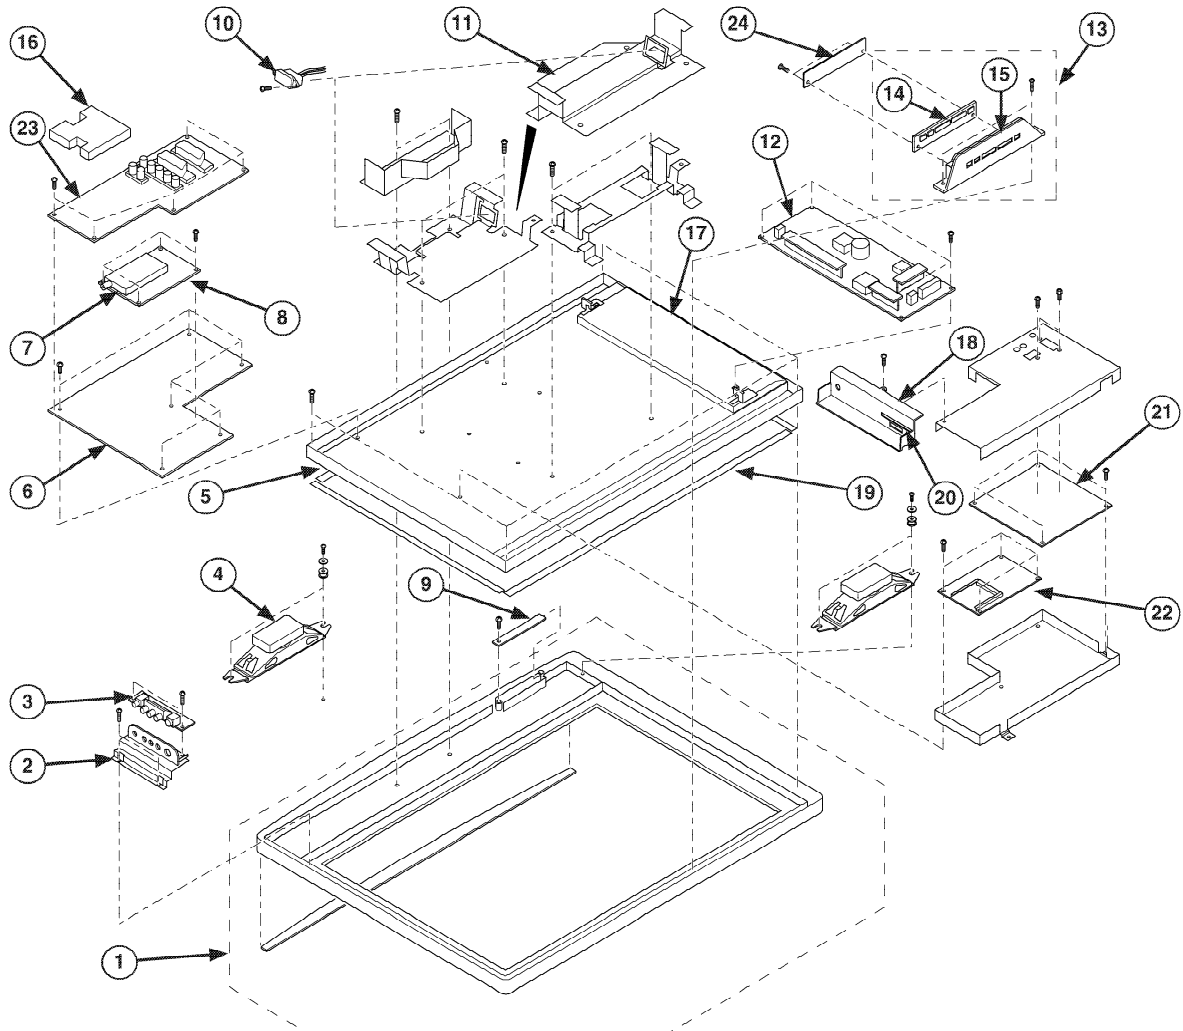


REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
1	X-2148-514-1	BEZEL ASSY (32) (KDL-32V2000)		11	X-2109-168-3	BOTTOM FRAME(40)ASSY (KDL-40/46S2000)	
	X-2109-504-3	BEZEL ASSY (40) (KDL-40V2000)		12	*1-468-980-12	G1 BOARD COMPLETE (KDL-32V2000)	
	X-2109-505-2	BEZEL ASSY (46) (KDL-46V2000)			*A-1169-591-D	G2 BOARD COMPLETE (KDL-40/46V2000)	
2	*2-663-985-21	HOLDER, SIDE JACK (M) (KDL-32V2000)		13	X-2109-049-3	BUTTON,MULTI (C) ASSY	14, 15
	*2-663-986-21	HOLDER, SIDE JACK (L) (KDL-40/46V2000)		14	2-663-977-01	BUTTON, MULTI	
3	*A-1152-233-D	H2E BOARD COMPLETE (KDL-32/40V2000)		15	2-663-978-22	COVER, BUTTON	
	*A-1192-084-B	H46E BOARD COMPLETE (KDL-46V2000)		16	*2-672-470-21	SHIELD, (A,TUNER)	
4	1-826-363-11	LOUDSPEAKER(4.2X15CM) (KDL-32V2000)		17	*2-672-348-11	BRACKET, G1 (KDL-32V2000)	
	1-826-362-11	LOUDSPEAKER(5.5X15.5CM) (KDL-40V2000)			*2-664-617-11	BRACKET, G2 (KDL-40/46V2000)	
	1-826-435-11	LOUDSPEAKER(13X7CM) (KDL-46V2000)		18	*2-664-609-12	SIDE, TERMINAL (M)	
5	1-802-135-11	LCD PANEL (KDL-32V2000)		19	4-660-752-01	TAPE (LCD) (KDL-32V2000)	
	1-802-134-11	LCD PANEL (KDL-40V2000)		20	2-667-975-01	COVER, PCMCIA	
	1-802-133-12	LCD PANEL (KDL-46V2000)		21	*A-1169-593-H	BE BOARD COMPLETE	
6	*2-663-981-22	BRACKET, (A,TU)		22	*A-1173-180-D	FEE BOARD COMPLETE (KDL-32/40/46V2000 AEP)	
7	8-597-571-00	TUNER UNIT, DIGITAL BTD-HF431Z			*A-1173-179-D	FEE BOARD COMPLETE (KDL-32/40/46V2000 UK)	
8	*A-1173-184-A	TUE BOARD COMPLETE WAX2		23	*A-1144-539-D	AE BOARD COMPLETE	
9	*A-1176-515-D	H4E BOARD COMPLETE		24	*A-1172-590-D	H1E BOARD COMPLETE	
10	Δ 1-819-729-13	INLET, AC (WITH NOISE FILTER)					

Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

5-2. REAR COVER, STAND and VESA BRACKET

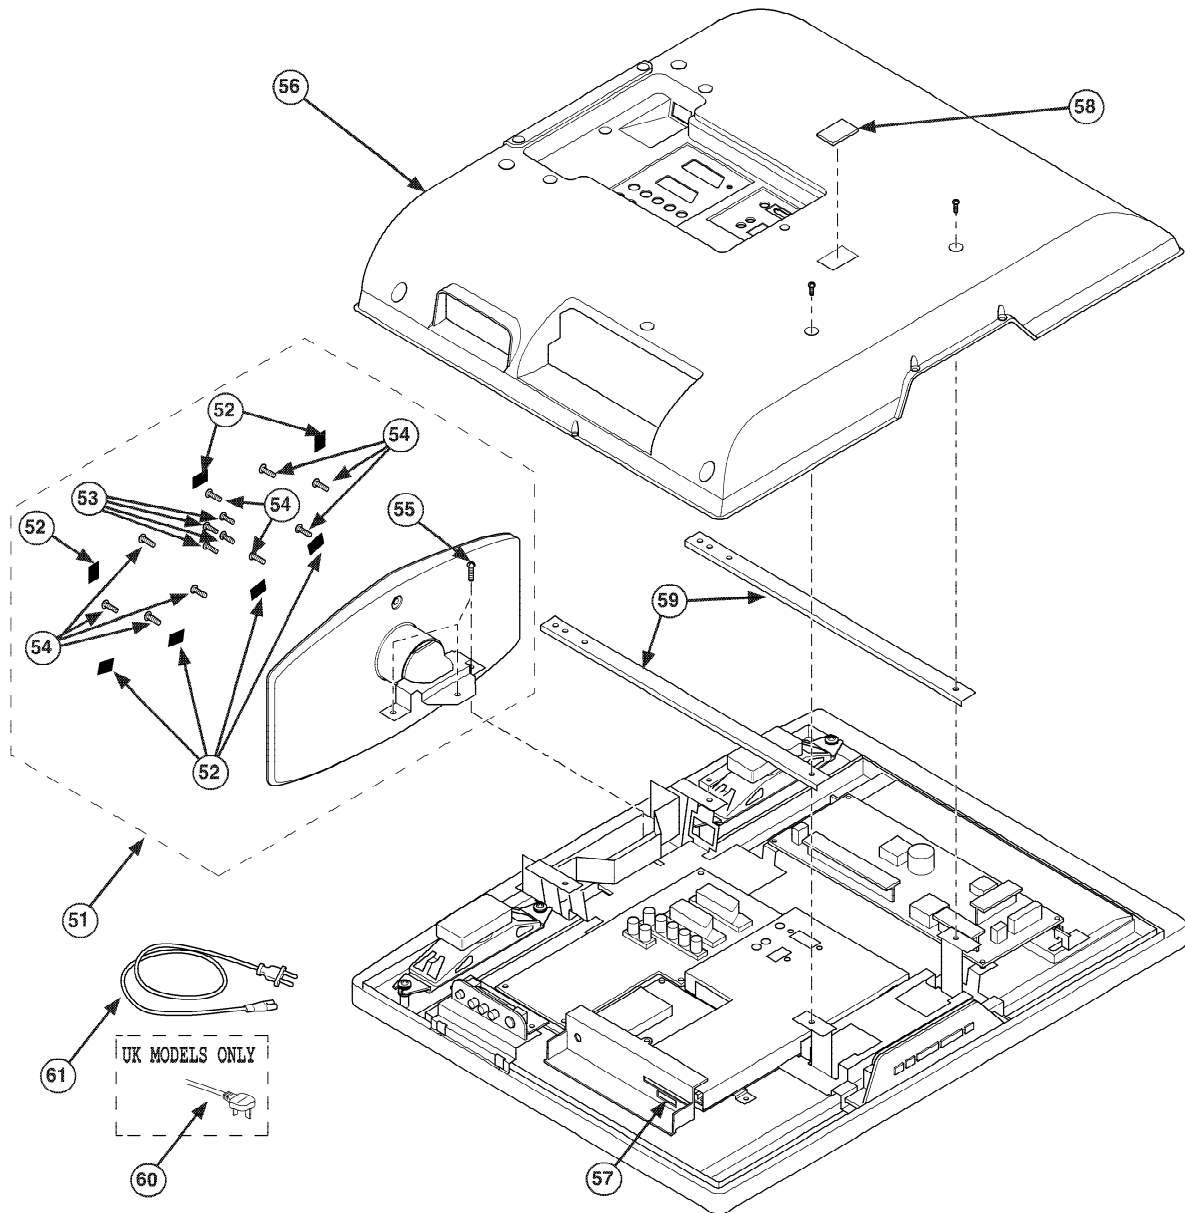

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
51	X-2103-365-3	STAND M ASSY (KDL-32V2000)	52-55	57	2-667-973-02	COVER, SERVICE (C)	
	X-2103-366-2	STAND L ASSY (KDL-40/46V2000)	52-55	58	2-664-636-11	COVER, ECS	
52	2-675-191-01	FOOT		59	X-2109-236-1	BRACKET, VESA (32) ASSY (KDL-32V2000)	
53	2-580-608-01	SCREW, +PSW M5X16			X-2109-058-3	VESA BRACKET (40) L ASSY (KDL-40V2000)	
54	2-580-644-01	SCREW, +KTP2 3X8 (KDL-32V2000)			X-2109-059-3	VESA BRACKET (40) R ASSY (KDL-40V2000)	
	2-580-647-01	SCREW, +KTP2 4X12 (KDL-40/46V2000)			X-2109-250-3	ARM, VESA (46) L ASSY (KDL-46V2000)	
55	2-685-535-01	SCREW, IT3-C 4X25 (KDL-32V2000)		59	X-2109-251-3	ARM, VESA (46) R ASSY (KDL-46V2000)	
	2-676-025-01	SCREW, WTP 5X35 (KDL-40/46V2000)		60	Δ 1-830-609-11	AC POWER-SUPPLY CORD SET (KDL-32/40/46V2000 UK)	
56	2-672-438-31	COVER, REAR (32) (KDL-32V2000)		61	Δ 1-830-611-11	POWER-SUPPLY CORD (KDL-32/40/46V2000 AEP)	
	2-679-177-32	COVER, REAR (40) (KDL-40V2000)					
	2-668-949-31	COVER, REAR (46) (KDL-46V2000)					

SECTION 6 ELECTRICAL PARTS LIST

PARTS LISTING TABLE OF CONTENTS

	Page
G2 BOARD COMPLETE Parts List :	72
BE BOARD COMPLETE Parts List :	75
FEE BOARD COMPLETE Parts List :	83
TUE BOARD COMPLETE Parts List :	87
H1E BOARD COMPLETE Parts List :	89
H4E BOARD COMPLETE Parts List :	89
AE BOARD COMPLETE Parts List :	89
H46E BOARD COMPLETE Parts List :	96
H2E BOARD COMPLETE Parts List :	96
MISCELLANEOUS :	98
ACCESSORIES AND CONNECTORS :	98
REMOTE COMMANDER :	98

Note: The G1 Board (KDL-32V2000 only) Schematic Diagram, Printed Wiring Board and Parts List are not indicated in this manual as the PWB is regarded as a non service item for exchange only.

Note : Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
Parts indicated (XX) on the Schematic Diagram are not used in this model and therefore do not appear in the Parts List.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
*A-1169-591-D G2 Board, Complete (KDL-40/46V2000)							
	4-382-854-11	SCREW (M3X10) , P, SW (+)		C6405	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
< CAPACITOR >				C6406	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C6000	Δ 1-161-964-91	CERAMIC 0.0047UF	250V	C6407	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C6001	Δ 1-119-892-51	CERAMIC 470PF	10.00% 250V	C6408	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
C6002	Δ 1-165-531-11	MYLAR 1UF	10 275V	C6412	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
C6003	Δ 1-161-964-91	CERAMIC 0.0047UF	250V				
C6004	Δ 1-165-529-11	MYLAR 0.22UF	10 275V	C6413	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C6005	Δ 1-119-892-51	CERAMIC 470PF	10.00% 250V	C6451	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C6006	1-135-361-11	ELECT (BLOCK) 180UF	20% 450V	C6504	1-100-613-81	CERAMIC 470PF	5% 1KV
C6008	1-135-361-11	ELECT (BLOCK) 180UF	20% 450V	C6505	1-100-613-81	CERAMIC 470PF	5% 1KV
C6010	Δ 1-113-889-11	CERAMIC 0.001UF	20.00% 250V	C6517	1-117-227-11	MYLAR 1UF	10.00% 450V
C6012	Δ 1-113-889-11	CERAMIC 0.001UF	20.00% 250V				
C6015	Δ 1-119-891-51	CERAMIC 220PF	10.00% 250V	C6518	1-112-744-52	MYLAR 1UF	10% 450V
C6016	Δ 1-119-891-51	CERAMIC 220PF	10.00% 250V	C6519	1-162-969-11	CERAMIC CHIP 0.0068UF	10.00% 25V
C6051	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C6520	1-117-227-11	MYLAR 1UF	10.00% 450V
C6100	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C6521	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V
C6101	1-107-905-11	ELECT 4.7UF	20% 50V	C6522	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C6102	1-107-910-11	ELECT 100UF	20% 50V				
C6103	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C6523	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C6104	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6525	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
C6105	1-107-906-11	ELECT 10UF	20% 50V	C6526	1-107-906-11	ELECT 10UF	20% 50V
C6108	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V	< CONNECTOR >			
C6109	1-107-888-11	ELECT 47UF	20% 25V	CN6000	1-695-915-11	TAB (CONTACT)	
C6111	1-100-613-81	CERAMIC 470PF	5% 1KV	CN6001	Δ *1-793-660-11	PIN, CONNECTOR (PC BOARD) 3P	
C6112	1-100-310-11	FILM 18000PF	3% 800V	CN6011	1-537-770-21	TERMINAL BOARD, GROUND	
C6116	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V	CN6200	1-793-236-11	PIN, CONNECTOR (PC BOARD) 14P	
C6200	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	CN6202	1-785-708-11	PIN, CONNECTOR (PC BOARD) 12P	
C6202	1-112-242-21	ELECT 1500UF	20% 25V				
C6203	1-107-907-11	ELECT 22UF	20% 50V	CN6204	1-785-706-11	PIN, CONNECTOR (PC BOARD) 10P	
C6204	1-112-242-21	ELECT 1500UF	20% 25V	CN6211	1-537-770-21	TERMINAL BOARD, GROUND	
C6205	1-112-242-21	ELECT 1500UF	20% 25V	CN6214	1-537-770-21	TERMINAL BOARD, GROUND	
C6207	1-112-242-21	ELECT 1500UF	20% 25V	CN6216	1-537-770-21	TERMINAL BOARD, GROUND	
C6216	1-107-928-11	ELECT 4.7UF	20% 100V	< DIODE >			
C6217	1-112-229-21	ELECT 1500UF	20% 16V	D6000	8-719-054-89	DIODE D15XB60	
C6305	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6002	8-719-081-97	DIODE MMDL914T1	
C6306	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	D6003	8-719-081-97	DIODE MMDL914T1	
C6307	1-107-903-11	ELECT 2.2UF	20% 50V	D6102	6-500-137-01	DIODE BAT54HT1	
C6308	1-107-904-11	ELECT 3.3UF	20% 50V	D6103	8-719-979-64	DIODE UF4005/23	
C6309	1-107-910-11	ELECT 100UF	20% 50V	D6104	6-501-043-01	DIODE UMZ16NT106	
C6310	1-100-139-31	FILM 0.001UF	5% 630V	D6105	6-501-043-01	DIODE UMZ16NT106	
C6314	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6106	8-719-081-67	DIODE M1FM3	
C6315	1-165-729-31	ELECT 470UF	20% 16V	D6107	8-719-081-67	DIODE M1FM3	
C6316	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6108	8-719-041-97	DIODE MA113-(TX)	
C6401	1-107-882-91	ELECT 100UF	20% 16V	D6200	8-719-057-96	DIODE D10SC6M-4012	
C6402	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D6201	8-719-057-96	DIODE D10SC6M-4012	
C6404	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6202	8-719-057-96	DIODE D10SC6M-4012	
				D6203	8-719-057-96	DIODE D10SC6M-4012	
				D6204	6-500-567-31	DIODE 10ERB20-TB3	
				D6205	6-500-567-31	DIODE 10ERB20-TB3	
				D6207	8-719-057-96	DIODE D10SC6M-4012	
				D6208	8-719-057-96	DIODE D10SC6M-4012	
				D6302	6-500-567-31	DIODE 10ERB20-TB3	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D6303	6-500-567-31	DIODE 10ERB20-TB3		L6300	1-414-934-21	INDUCTOR	10UH
D6304	6-500-849-01	DIODE ERA22-08KFL		L6500	1-457-218-11	INDUCTOR	100UH
D6305	6-500-567-31	DIODE 10ERB20-TB3		L6502	1-457-141-11	INDUCTOR	175UH
D6306	8-719-510-02	DIODE D1NS4		< PHOTOCOUPLER >			
D6401	8-719-081-97	DIODE MMDL914T1		PH6000 Δ	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF
D6402	8-719-081-97	DIODE MMDL914T1		PH6100 Δ	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF
D6407	8-719-082-04	DIODE MM3Z22VT1		PH6301 Δ	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF
D6408	8-719-081-97	DIODE MMDL914T1		PH6400 Δ	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF
D6452	8-719-081-97	DIODE MMDL914T1		PH6402 Δ	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF
D6454	1-125-889-91	CERAMIC CHIP 2.2UF 10% 10V		< TRANSISTOR >			
D6456	8-719-081-97	DIODE MMDL914T1		Q6051	8-729-045-62	TRANSISTOR 2SK2158-T2B	
D6504	1-216-295-91	SHORT CHIP 0		Q6100	6-551-297-01	TRANSISTOR 2SK3568(LBS1SONY.Q	
D6505	8-719-976-99	DIODE DTZ5.1B		Q6101	6-551-297-01	TRANSISTOR 2SK3568(LBS1SONY.Q	
D6506	8-719-054-59	DIODE FSF05A60		Q6400	8-729-804-41	TRANSISTOR 2SB1122-S	
D6507	8-719-081-97	DIODE MMDL914T1		Q6401	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6508	6-500-108-01	DIODE EP05FA20		Q6402	8-729-045-62	TRANSISTOR 2SK2158-T2B	
D6509	6-500-108-01	DIODE EP05FA20		Q6403	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R	
D6510	6-500-137-01	DIODE BAT54HT1		Q6404	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6511	8-719-081-97	DIODE MMDL914T1		Q6405	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6512	8-719-081-97	DIODE MMDL914T1		Q6406	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6551	8-719-081-97	DIODE MMDL914T1		Q6454	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R	
D6552	8-719-081-97	DIODE MMDL914T1		Q6455	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6553	8-719-081-97	DIODE MMDL914T1		Q6500	6-551-403-01	TRANSISTOR 2SK3797(LBS1SONY.	
< FUSE >				Q6501	8-729-820-90	TRANSISTOR 2SD1621-ST	
F6000 Δ	1-576-233-51	FUSE	6.3A 250V	Q6502	8-729-804-41	TRANSISTOR 2SB1122-S	
FH6000 Δ	1-533-223-11	FUSE HOLDER		Q6504	6-551-403-01	TRANSISTOR 2SK3797(LBS1SONY.	
FH6001 Δ	1-533-223-11	FUSE HOLDER		< RESISTOR >			
< FERRITE BEAD >				R6002 Δ	1-240-251-11	METAL	6.8 5% 10W
FB6100	1-410-396-41	FERRITE	0.45UH	R6003	1-247-752-11	CARBON	1K 5% 1/2W
FB6101	1-410-396-41	FERRITE	0.45UH	R6004	1-218-835-11	METAL CHIP	330 0.5% 1/10W
< IC >				R6016	1-535-143-71	LEAD, JUMPER (7.5MM)	
IC6100	6-709-581-01	IC CXD9841M-H		R6051	1-216-821-11	METAL CHIP	1K 5% 1/10W
IC6200	6-709-368-01	IC MM1431ATT (CN)		R6052	1-216-837-11	METAL CHIP	22K 5% 1/10W
IC6301	6-708-801-01	IC MIP2H2		R6101	1-249-385-11	CARBON	2.2 5% 1/4W
IC6302	6-709-442-01	IC MM1530ATT		R6102 Δ	1-202-933-61	FUSIBLE	0.1 10% 1/2W
IC6401	6-709-368-01	IC MM1431ATT (CN)		R6103	1-218-823-11	METAL CHIP	100 0.5% 1/10W
IC6402	6-709-368-01	IC MM1431ATT (CN)		R6104	1-218-887-11	METAL CHIP	47K 0.5% 1/10W
IC6502	6-709-192-01	IC FA5501AN-D1-TE1		R6105	1-208-854-11	METAL CHIP	1M 0.5% 1/10W
< COIL >				R6106	1-208-854-11	METAL CHIP	1M 0.5% 1/10W
L6000 Δ	1-456-856-21	LINE FILTER COIL		R6107	1-208-854-11	METAL CHIP	1M 0.5% 1/10W
L6001 Δ	1-456-856-21	LINE FILTER COIL		R6108	1-208-854-11	METAL CHIP	1M 0.5% 1/10W
L6203	1-414-487-41	INDUCTOR	1UH	R6109	1-218-761-11	METAL CHIP	240K 0.5% 1/10W
L6204	1-414-487-41	INDUCTOR	1UH	R6110	1-218-881-11	METAL CHIP	27K 0.5% 1/10W
L6207	1-457-239-11	INDUCTOR	4.7UH	R6111	1-218-873-11	METAL CHIP	12K 0.5% 1/10W
L6208	1-457-239-11	INDUCTOR	4.7UH	R6114	1-211-985-11	METAL CHIP	47 0.5% 1/10W
				R6116	1-216-009-91	RES-CHIP	22 5% 1/10W
				R6117	1-216-009-91	RES-CHIP	22 5% 1/10W

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R6118	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6455	1-218-903-11	METAL CHIP	220K	0.5%	1/10W
R6119	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6456	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W
R6121	1-216-361-00	METAL OXIDE	0.22	5%	2W	R6459	1-218-885-11	METAL CHIP	39K	0.5%	1/10W
R6122	1-216-361-00	METAL OXIDE	0.22	5%	2W	R6461	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6123	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R6462	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6127	1-216-857-11	METAL CHIP	1M	5%	1/10W	R6468	1-218-903-11	METAL CHIP	220K	0.5%	1/10W
R6200	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6503	1-215-882-00	METAL OXIDE	22	5%	2W
R6201	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6512	1-218-907-11	METAL CHIP	330K	0.5%	1/10W
R6202	1-216-105-91	RES-CHIP	220K	5%	1/10W	R6513	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R6203	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R6514	1-218-895-11	METAL CHIP	100K	0.5%	1/10W
R6204	1-218-843-11	METAL CHIP	680	0.5%	1/10W	R6515	1-218-823-11	METAL CHIP	100	0.5%	1/10W
R6205	1-218-865-11	METAL CHIP	5.6K	0.5%	1/10W	R6526	1-211-989-11	METAL CHIP	68	0.5%	1/10W
R6207	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R6527	1-218-913-91	METAL CHIP	560K	0.5%	1/10W
R6208	1-249-377-11	CARBON	0.47	5%	1/4W	R6528	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R6226	1-249-389-11	CARBON	4.7	5%	1/4W	R6529	1-216-864-11	SHORT CHIP	0		
R6300	Δ 1-212-958-00	FUSIBLE	10	5%	1/2W	R6530	1-219-729-11	METAL	0.33	10%	5W
R6301	1-243-725-71	METAL OXIDE	100K	5%	1W	R6531	1-219-729-11	METAL	0.33	10%	5W
R6302	1-218-865-11	METAL CHIP	5.6K	0.5%	1/10W	R6532	1-216-864-11	SHORT CHIP	0		
R6303	1-249-385-11	CARBON	2.2	5%	1/4W	R6533	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6304	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6534	1-218-823-11	METAL CHIP	100	0.5%	1/10W
R6305	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R6535	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6306	1-216-805-11	METAL CHIP	47	5%	1/10W	R6536	1-218-830-11	METAL CHIP	200	0.5%	1/10W
R6307	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R6537	1-249-389-11	CARBON	4.7	5%	1/4W
R6308	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R6538	1-249-405-11	CARBON	100	5%	1/4W
R6309	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R6539	1-218-830-11	METAL CHIP	200	0.5%	1/10W
R6400	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6540	1-249-389-11	CARBON	4.7	5%	1/4W
R6401	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R6541	1-208-818-11	METAL CHIP	33K	0.5%	1/10W
R6402	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6542	1-208-814-91	METAL CHIP	22K	0.5%	1/10W
R6403	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R6543	1-218-830-11	METAL CHIP	200	0.5%	1/10W
R6405	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R6544	1-218-830-11	METAL CHIP	200	0.5%	1/10W
R6407	1-216-837-11	METAL CHIP	22K	5%	1/10W	R6545	1-208-848-11	METAL CHIP	560K	0.5%	1/10W
R6408	1-218-879-11	METAL CHIP	22K	0.5%	1/10W	R6546	1-208-848-11	METAL CHIP	560K	0.5%	1/10W
R6409	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6547	1-208-848-11	METAL CHIP	560K	0.5%	1/10W
R6410	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6548	1-208-846-11	METAL CHIP	470K	0.5%	1/10W
R6412	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6549	1-208-844-11	METAL CHIP	390K	0.5%	1/10W
R6413	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R6550	1-218-875-11	METAL CHIP	15K	0.5%	1/10W
R6417	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6551	1-249-393-11	CARBON	10	5%	1/4W
R6418	1-216-845-11	METAL CHIP	100K	5%	1/10W	R6552	1-216-809-11	METAL CHIP	100	5%	1/10W
R6419	1-216-837-11	METAL CHIP	22K	5%	1/10W	R6553	Δ 1-208-830-11	METAL CHIP	100K	0.5%	1/10W
R6420	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6554	1-218-911-11	METAL CHIP	470K	0.5%	1/10W
R6436	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R6555	1-218-887-11	METAL CHIP	47K	0.5%	1/10W
R6437	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6557	1-218-851-11	METAL CHIP	1.5K	0.5%	1/10W
R6441	1-216-841-11	METAL CHIP	47K	5%	1/10W	R6560	1-218-911-11	METAL CHIP	470K	0.5%	1/10W
R6442	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6562	Δ 1-218-760-11	METAL CHIP	220K	0.5%	1/10W
R6443	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6563	Δ 1-218-760-11	METAL CHIP	220K	0.5%	1/10W
R6444	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6564	Δ 1-218-760-11	METAL CHIP	220K	0.5%	1/10W
R6451	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6565	Δ 1-218-760-11	METAL CHIP	220K	0.5%	1/10W
R6452	1-218-847-11	METAL CHIP	1K	0.5%	1/10W						
R6453	1-216-833-11	METAL CHIP	10K	5%	1/10W						
R6454	1-216-829-11	METAL CHIP	4.7K	5%	1/10W						

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.



REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< RELAY >				C1056	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
RY6003 Δ	1-755-488-11	RELAY (LKPIAF-18V)		C1057	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
< TRANSFORMER >				C1060	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
T6102 Δ	1-443-983-11	CONVERTER TRANSFORMER (PIT)		C1061	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
T6103 Δ	1-443-982-11	CONVERTER TRANSFORMER (PIT)		C1062	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
T6301 Δ	1-443-984-11	CONVERTER TRANSFORMER (SBT)		C1063	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
< VARISTOR >				C1066	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
VD6000 Δ	1-804-996-21	VARISTOR		C1067	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
VD6001 Δ	1-804-996-21	VARISTOR		C1068	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
*A-1169-593-H BE Board, Complete				C1069	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
A5001	1-694-974-21	CONTACT TERMINAL		C1070	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
< CAPACITOR >				C1071	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C1001	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C1072	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1003	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C1073	1-126-390-11	ELECT CHIP 22UF	20.00% 6.3V
C1004	1-162-974-11	CERAMIC CHIP 0.01UF	50V	C1074	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1005	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C1075	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C1006	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C1076	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C1007	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C1079	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C1010	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C1080	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1011	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V	C1081	1-126-391-11	ELECT CHIP 47UF	20.00% 6.3V
C1012	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C1082	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C1015	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C1083	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1016	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C1084	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C1017	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C1085	1-115-456-21	DOUBLE LAYER 0.22F	5.5V
C1018	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C1087	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C1019	1-162-912-11	CERAMIC CHIP 7PF	0.50PF 50V	C1091	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C1022	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C1092	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1023	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C1093	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C1024	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C1094	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C1027	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C1100	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1029	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C1110	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C1033	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C1701	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1035	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C1704	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V
C1036	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C1706	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1044	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C1707	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1046	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C1708	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C1047	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C1710	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V
C1048	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C1711	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V
C1049	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C1712	1-100-162-91	CERAMIC CHIP 1UF	50V
C1050	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C5000	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1051	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C5002	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1052	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5003	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1053	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C5005	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1054	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C5006	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
				C5007	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
				C5009	1-162-905-11	CERAMIC CHIP 1PF	0.25PF 50V
				C5010	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
				C5011	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
				C5012	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
				C5013	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C5014	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5257	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5015	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5258	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5016	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5259	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5017	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5260	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5018	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5262	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5019	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5265	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5020	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5269	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5021	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5270	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5022	1-162-905-11	CERAMIC CHIP 1PF	0.25PF 50V	C5271	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5023	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C5273	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5024	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C5274	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5025	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5278	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5027	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C5279	1-125-837-91	CERAMIC CHIP 1UF	10% 6.3V
C5028	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V	C5280	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5032	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C5281	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5033	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C5502	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5201	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5503	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5202	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5504	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5204	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5506	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
C5205	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5507	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V
C5208	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5508	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5209	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5510	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C5211	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5512	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5212	1-162-979-11	CERAMIC CHIP 0.0027UF	10.00% 50V	C5513	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5213	1-162-979-11	CERAMIC CHIP 0.0027UF	10.00% 50V	C5514	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5216	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C6000	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5217	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C6001	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5218	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C6002	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5219	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C6003	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5220	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C6004	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5221	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C6005	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C5222	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C6006	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C5224	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C6008	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C5225	1-162-960-11	CERAMIC CHIP 220PF	10.00% 50V	C6009	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5226	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C6012	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5230	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C6013	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5231	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C6014	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5234	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7000	1-100-591-91	CERAMIC CHIP 1UF	10% 25V
C5236	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7001	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C5237	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7002	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C5239	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C7003	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V
C5240	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7004	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V
C5241	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C7005	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C5246	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7006	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C5250	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7007	1-100-552-21	ELECT CHIP 10UF	20% 25V
C5252	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C7008	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C5253	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C7009	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C5254	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C7010	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5255	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C7011	1-128-536-11	ELECT CHIP 100UF	20.00% 25V
C5256	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C7012	1-110-648-11	ELECT CHIP 220UF	20.00% 25V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C7013	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9039	1-115-412-11	CERAMIC CHIP 680PF	5.00% 25V
C7014	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9040	1-115-412-11	CERAMIC CHIP 680PF	5.00% 25V
C7015	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C9042	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C7016	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	< CONNECTOR >			
C7017	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	CN1001	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P	
C7023	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN1002	1-819-447-11	HEADER ASSEMBLY FOR PWB 10P	
C7025	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	CN1003	1-779-331-51	CONNECTOR, FFC/FPC 14P	
C7026	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	CN1004	1-779-936-51	CONNECTOR, FFC/FPC 18P	
C7027	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN1007	1-819-336-11	HEADER ASSEMBLY FOR PWB 3P	
C7028	1-112-794-11	ELECT CHIP 470UF	20% 16V	CN1008	1-820-187-11	HEADER ASSEMBLY (PRINT PWB)10P	
C7030	1-112-794-11	ELECT CHIP 470UF	20% 16V	CN1700	1-820-187-11	HEADER ASSEMBLY (PRINT PWB)10P	
C7031	1-165-673-21	ELECT CHIP 56UF	20% 10V	CN1701	1-820-189-11	HEADER ASSEMBLY (PRINT PWB)12P	
C7032	1-165-673-21	ELECT CHIP 56UF	20% 10V	CN4700	1-820-255-51	FFC/FPC CONNECTOR (ZIF) 20P	
C7034	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	CN5000	1-820-235-11	HEADER ASSEMBLY 30P	
C7035	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	CN6000	1-818-937-11	D SUB CONNECTOR 15P	
C7036	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN7002	1-780-336-11	EARTH TERMINAL	
C7037	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN7003	1-780-336-11	EARTH TERMINAL	
C7040	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	CN7004	1-780-336-11	EARTH TERMINAL	
C7041	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	CN7005	1-780-336-11	EARTH TERMINAL	
C7042	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	CN7008	1-820-186-11	HEADER ASSEMBLY (PRINT PWB) 9P	
C7047	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	CN7009	1-820-184-11	HEADER ASSEMBLY (PRINT PWB) 7P	
C7051	1-135-595-11	ELECT 100UF	20% 6.3V	CN9000	1-818-737-11	HDMI CONNECTOR	
C7052	1-165-673-21	ELECT CHIP 56UF	20% 10V	< DIODE >			
C7054	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	D1002	8-719-058-24	DIODE RB501V-40TE-17	
C7056	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D1006	8-719-081-97	DIODE MMDL914T1	
C7057	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	D1007	8-719-077-59	DIODE 1PS302	
C7058	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D1020	8-719-036-94	DIODE RD5.6SB-T1	
C7100	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D1021	8-719-036-94	DIODE RD5.6SB-T1	
C7101	1-110-648-11	ELECT CHIP 220UF	20.00% 25V	D1701	8-719-064-03	DIODE HZU16B2TRF-E	
C9002	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	D1702	8-719-064-03	DIODE HZU16B2TRF-E	
C9003	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6000	8-719-036-94	DIODE RD5.6SB-T1	
C9004	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6001	8-719-036-94	DIODE RD5.6SB-T1	
C9005	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	D6002	8-719-036-94	DIODE RD5.6SB-T1	
C9006	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6003	8-719-050-38	DIODE M1M152WK-T1	
C9007	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D7000	8-719-081-97	DIODE MMDL914T1	
C9008	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D7001	6-501-336-01	DIODE RSX201L-30TE25	
C9009	1-100-567-81	CERAMIC CHIP 10000PF	10% 25V	D7003	8-719-081-97	DIODE MMDL914T1	
C9011	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	D7004	8-719-072-43	DIODE RB050L-40TE25	
C9012	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D7005	8-719-072-43	DIODE RB050L-40TE25	
C9013	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	D7006	6-501-336-01	DIODE RSX201L-30TE25	
C9014	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	D7008	6-500-579-01	DIODE PTZ-TE25-6.8B	
C9030	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D7009	8-719-073-69	DIODE PTZ-TE25-6.2A	
C9031	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	D7010	8-719-056-83	DIODE UDZ-TE-17-6.8B	
C9032	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	D7014	8-719-056-83	DIODE UDZ-TE-17-6.8B	
C9033	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	D7500	8-719-056-84	DIODE UDZ-TE-17-7.5B	
C9034	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	D7508	8-719-081-97	DIODE MMDL914T1	
C9035	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D7509	8-719-081-97	DIODE MMDL914T1	
C9036	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D7510	8-719-081-97	DIODE MMDL914T1	
C9037	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V				
C9038	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.



REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D9004	8-719-081-97	DIODE MMDL914T1		< IC >			
D9013	8-719-081-97	DIODE MMDL914T1		IC1001	6-708-219-01	IC MB91305PMC-G-BNDE1	
D9014	8-719-050-37	DIODE M1MA152WA-T1		IC1002	6-806-557-01	IC S29AL016D70TFT010-WAX2E4	
D9015	8-719-081-97	DIODE MMDL914T1		IC1003	6-706-419-01	IC LM393DT (A)	
< FUSE >				IC1004	6-703-175-01	IC PST3629UL	
F7000	Δ 1-576-603-21	FUSE	3.15A 24V	IC1005	6-702-985-01	IC M24256-BWMN6T	
< FERRITE BEAD >				IC1006	6-709-512-01	IC S-1132B18-M5T1G	
FB1001	1-414-227-11	FERRITE	OUH	IC1007	6-706-815-01	IC TMP75AIDR	
FB1002	1-400-110-21	FERRITE	OUH	IC1008	8-759-549-03	IC SN74LV132APWR	
FB1003	1-414-227-11	FERRITE	OUH	IC1009	6-709-517-01	IC S-35390A-J8T1G	
FB1004	1-400-110-21	FERRITE	OUH	IC1010	8-759-460-79	IC BA09FP-E2	
FB1005	1-400-110-21	FERRITE	OUH	IC5000	6-709-582-01	IC CXD9199GG-D	
FB1006	1-400-110-21	FERRITE	OUH	IC5201	8-759-651-59	IC SN74CBTLV3245APWR	
FB1007	1-400-110-21	FERRITE	OUH	IC5202	8-759-651-59	IC SN74CBTLV3245APWR	
FB1711	1-500-113-22	FERRITE	OUH	IC5203	6-706-491-01	IC TC7SH86FU (T5RSOYJF)	
FB1712	1-400-110-21	FERRITE	OUH	IC5500	6-707-822-01	IC EM6A9320BI-5MG	
FB1713	1-400-110-21	FERRITE	OUH	IC6000	6-704-600-01	IC M24C02-WMN6T (B)	
FB1715	1-400-110-21	FERRITE	OUH	IC6001	8-759-679-54	IC SN74LVC14APWR	
FB1720	1-400-141-22	FERRITE	OUH	IC7000	6-707-927-01	IC BD9775FV	
FB1721	1-400-141-22	FERRITE	OUH	IC7001	6-709-441-01	IC SI8008TM-TL	
FB5201	1-400-794-21	FERRITE	OUH	IC7002	6-709-441-01	IC SI8008TM-TL	
FB6000	1-469-100-21	FERRITE	OUH	IC7004	6-708-862-01	IC MM1662FTRE	
FB6001	1-469-100-21	FERRITE	OUH	IC9000	6-704-819-01	IC CS4335-KSZR	
FB6002	1-469-100-21	FERRITE	OUH	IC9001	6-704-001-01	IC BR24L02F-WE2	
FB6004	1-469-100-21	FERRITE	OUH	IC9002	6-708-758-01	IC PCA9517DP.118	
FB6005	1-400-141-22	FERRITE	OUH	IC9711	*6-703-108-01	IC SN74LVC2G04DCKR	
FB7001	1-414-445-11	FERRITE	OUH	< SOCKET >			
FB7002	1-414-445-11	FERRITE	OUH	J6000	1-750-925-11	JACK (SMALL TYPE)	
FB7003	1-414-445-11	FERRITE	OUH	J9000	1-820-304-11	PHONE JACK 2P	
FB7005	1-400-110-21	FERRITE	OUH	< COIL >			
FB7006	1-400-110-21	FERRITE	OUH	L1002	1-400-794-21	FERRITE	OUH
FB7007	1-400-110-21	FERRITE	OUH	L5000	1-456-984-11	INDUCTOR	OUH
FB7008	1-400-110-21	FERRITE	OUH	L5001	1-456-984-11	INDUCTOR	OUH
FB7011	1-400-794-21	FERRITE	OUH	L5002	1-456-984-11	INDUCTOR	OUH
FB9000	1-469-094-21	FERRITE	OUH	L5003	1-456-984-11	INDUCTOR	OUH
< FILTER >				L5004	1-456-984-11	INDUCTOR	OUH
FL1001	1-234-177-21	FERRITE	OUH	L5005	1-400-177-21	INDUCTOR	OUH
FL5201	1-234-177-21	FERRITE	OUH	L5006	1-469-561-21	INDUCTOR	100UH
FL5203	1-234-177-21	FERRITE	OUH	L5201	1-400-794-21	FERRITE	OUH
FL5206	1-234-177-21	FERRITE	OUH	L5202	1-412-054-21	INDUCTOR	2.2UH
FL5207	1-234-177-21	FERRITE	OUH	L5203	1-469-551-21	INDUCTOR	2.2UH
FL5500	1-234-177-21	FERRITE	OUH	L5205	1-469-551-21	INDUCTOR	2.2UH
FL5501	1-234-177-21	FERRITE	OUH	L5206	1-469-551-21	INDUCTOR	2.2UH
FL9000	1-234-177-21	FERRITE	OUH	L5500	1-400-794-21	FERRITE	OUH
FL9001	1-234-177-21	FERRITE	OUH	L5501	1-400-794-21	FERRITE	OUH
				L7000	1-416-740-11	INDUCTOR	10UH
				L7001	1-457-041-21	INDUCTOR	10UH

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

BE

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
L7002	1-481-081-11	INDUCTOR	47UH	Q9007	6-551-364-01	TRANSISTOR DTC614TUT106	
L7003	1-481-080-11	INDUCTOR	22UH	Q9008	6-551-364-01	TRANSISTOR DTC614TUT106	
L7004	1-481-083-11	INDUCTOR	22UH	Q9009	8-729-600-22	TRANSISTOR 2SA1235-F	
L7005	1-456-786-21	INDUCTOR	47UH	Q9010	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L7006	1-412-056-11	INDUCTOR	4.7UH				
						< RESISTOR >	
L7007	1-416-740-11	INDUCTOR	10UH	R1001	1-216-864-11	SHORT CHIP	0
L9000	*1-813-308-11	INDUCTOR	0UH	R1002	1-218-990-81	SHORT CHIP	0
L9001	*1-813-308-11	INDUCTOR	0UH	R1005	1-208-683-11	METAL CHIP	1K 0.5% 1/16W
L9002	*1-813-308-11	INDUCTOR	0UH	R1007	1-216-864-11	SHORT CHIP	0
L9003	*1-813-308-11	INDUCTOR	0UH	R1010	1-218-990-81	SHORT CHIP	0
L9004	1-469-555-21	INDUCTOR	10UH	R1011	1-216-864-11	SHORT CHIP	0
L9005	1-469-555-21	INDUCTOR	10UH	R1012	1-216-864-11	SHORT CHIP	0
				R1013	1-216-801-11	METAL CHIP	22 5% 1/10W
				R1014	1-216-801-11	METAL CHIP	22 5% 1/10W
				R1015	1-216-864-11	SHORT CHIP	0
				R1016	1-216-801-11	METAL CHIP	22 5% 1/10W
				R1017	1-216-801-11	METAL CHIP	22 5% 1/10W
				R1018	1-216-864-11	SHORT CHIP	0
				R1019	1-216-864-11	SHORT CHIP	0
				R1020	1-216-813-11	METAL CHIP	220 5% 1/10W
				R1021	1-216-801-11	METAL CHIP	22 5% 1/10W
				R1022	1-216-801-11	METAL CHIP	22 5% 1/10W
				R1023	1-216-801-11	METAL CHIP	22 5% 1/10W
				R1024	1-216-801-11	METAL CHIP	22 5% 1/10W
				R1025	1-216-864-11	SHORT CHIP	0
				R1026	1-216-801-11	METAL CHIP	22 5% 1/10W
				R1027	1-400-591-22	FERRITE	0UH
				R1031	1-218-887-11	METAL CHIP	47K 0.5% 1/10W
				R1032	1-400-807-21	FERRITE	0UH
				R1034	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W
				R1035	1-216-864-11	SHORT CHIP	0
				R1036	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1037	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W
				R1038	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1040	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1041	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1042	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1043	1-216-841-11	METAL CHIP	47K 5% 1/10W
				R1044	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1045	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1046	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
				R1047	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
				R1048	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
				R1049	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1050	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1051	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1052	1-218-941-81	RES-CHIP	100 5% 1/16W
				R1053	1-218-990-81	SHORT CHIP	0
				R1058	1-218-990-81	SHORT CHIP	0

< PROTECTOR MODULE >

PS6000 Δ	1-576-122-21	IC LINK	0.4A	72V
PS7000 Δ	1-576-603-21	FUSE	3.15A	24V

< TRANSISTOR >

Q1001	6-551-387-01	TRANSISTOR SSM6N16FU	
Q1002	8-729-029-00	TRANSISTOR DTC115EUA-T106	
Q1003	8-729-028-74	TRANSISTOR DTA114TUA-T106	
Q1004	8-729-013-28	TRANSISTOR HN1B01FU-TE85R	
Q1005	8-729-028-74	TRANSISTOR DTA114TUA-T106	
Q1006	8-729-029-04	TRANSISTOR DTC123JUA-T106	
Q1007	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q1701	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q5000	8-729-602-36	TRANSISTOR 2SA1602-F	
Q5001	8-729-602-36	TRANSISTOR 2SA1602-F	
Q6000	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q6001	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q7000	8-729-046-04	TRANSISTOR FDS6690A	
Q7001	6-550-828-01	TRANSISTOR RSQ035P03TR	
Q7005	6-550-851-01	TRANSISTOR RSS050P03FTB	
Q7006	8-729-029-00	TRANSISTOR DTC115EUA-T106	
Q7007	8-729-602-21	TRANSISTOR 2SC4154-F	
Q7008	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q7009	*6-550-663-01	TRANSISTOR RSS100N03TB	
Q7500	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q7502	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q7503	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q7504	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q7505	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q7506	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q9000	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q9001	8-729-025-28	TRANSISTOR 2SK1828	
Q9003	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q9004	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q9005	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q9006	8-729-028-96	TRANSISTOR DTC114EUA-T106	

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R1061	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1170	1-400-794-21	FERRITE	0UH		
R1064	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1180	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1065	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1183	1-218-941-81	RES-CHIP	100	5%	1/16W
R1070	1-216-864-11	SHORT CHIP	0			R1186	1-218-990-81	SHORT CHIP	0		
R1072	1-218-990-81	SHORT CHIP	0			R1188	1-218-990-81	SHORT CHIP	0		
R1073	1-218-990-81	SHORT CHIP	0			R1190	1-208-886-81	METAL CHIP	910	0.5%	1/16W
R1075	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1192	1-218-941-81	RES-CHIP	100	5%	1/16W
R1076	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1193	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1078	1-218-990-81	SHORT CHIP	0			R1195	1-218-990-81	SHORT CHIP	0		
R1079	1-400-807-21	FERRITE	0UH			R1196	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1080	1-400-807-21	FERRITE	0UH			R1198	1-218-990-81	SHORT CHIP	0		
R1081	1-400-807-21	FERRITE	0UH			R1199	1-218-941-81	RES-CHIP	100	5%	1/16W
R1082	1-400-807-21	FERRITE	0UH			R1202	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1083	1-400-807-21	FERRITE	0UH			R1203	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1084	1-400-807-21	FERRITE	0UH			R1205	1-218-990-81	SHORT CHIP	0		
R1085	1-400-807-21	FERRITE	0UH			R1206	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1087	1-216-864-11	SHORT CHIP	0			R1207	1-218-949-11	RES-CHIP	470	5%	1/16W
R1095	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1208	1-218-990-81	SHORT CHIP	0		
R1099	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1209	1-218-990-81	SHORT CHIP	0		
R1101	1-218-959-11	RES-CHIP	3.3K	5%	1/16W	R1210	1-218-949-11	RES-CHIP	470	5%	1/16W
R1107	1-218-941-81	RES-CHIP	100	5%	1/16W	R1211	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1108	1-218-941-81	RES-CHIP	100	5%	1/16W	R1212	1-218-949-11	RES-CHIP	470	5%	1/16W
R1109	1-218-941-81	RES-CHIP	100	5%	1/16W	R1218	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R1110	1-218-941-81	RES-CHIP	100	5%	1/16W	R1223	1-218-945-11	RES-CHIP	220	5%	1/16W
R1111	1-218-933-11	RES-CHIP	22	5%	1/16W	R1224	1-218-990-81	SHORT CHIP	0		
R1112	1-218-941-81	RES-CHIP	100	5%	1/16W	R1225	1-218-937-11	RES-CHIP	47	5%	1/16W
R1113	1-218-933-11	RES-CHIP	22	5%	1/16W	R1226	1-216-813-11	METAL CHIP	220	5%	1/10W
R1115	1-218-941-81	RES-CHIP	100	5%	1/16W	R1227	1-218-937-11	RES-CHIP	47	5%	1/16W
R1116	1-218-990-81	SHORT CHIP	0			R1235	1-216-864-11	SHORT CHIP	0		
R1117	1-218-941-81	RES-CHIP	100	5%	1/16W	R1239	1-216-864-11	SHORT CHIP	0		
R1119	1-218-941-81	RES-CHIP	100	5%	1/16W	R1240	1-216-849-11	METAL CHIP	220K	5%	1/10W
R1122	1-216-864-11	SHORT CHIP	0			R1242	1-218-941-81	RES-CHIP	100	5%	1/16W
R1123	1-216-864-11	SHORT CHIP	0			R1243	1-216-809-11	METAL CHIP	100	5%	1/10W
R1124	1-216-864-11	SHORT CHIP	0			R1246	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1125	1-216-864-11	SHORT CHIP	0			R1247	1-216-864-11	SHORT CHIP	0		
R1134	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1255	1-400-591-22	FERRITE	0UH		
R1138	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1256	1-400-591-22	FERRITE	0UH		
R1142	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1257	1-400-591-22	FERRITE	0UH		
R1144	1-208-691-11	METAL CHIP	2.2K	0.5%	1/16W	R1258	1-400-591-22	FERRITE	0UH		
R1147	1-218-941-81	RES-CHIP	100	5%	1/16W	R1259	1-400-591-22	FERRITE	0UH		
R1158	1-218-941-81	RES-CHIP	100	5%	1/16W	R1260	1-400-591-22	FERRITE	0UH		
R1160	1-218-941-81	RES-CHIP	100	5%	1/16W	R1261	1-400-591-22	FERRITE	0UH		
R1161	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1262	1-400-591-22	FERRITE	0UH		
R1162	1-218-973-11	RES-CHIP	47K	5%	1/16W	R1263	1-400-591-22	FERRITE	0UH		
R1163	1-218-941-81	RES-CHIP	100	5%	1/16W	R1264	1-400-591-22	FERRITE	0UH		
R1164	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1265	1-400-591-22	FERRITE	0UH		
R1165	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1266	1-216-864-11	SHORT CHIP	0		
R1167	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1267	1-400-591-22	FERRITE	0UH		
R1168	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1270	1-218-941-81	RES-CHIP	100	5%	1/16W
R1169	1-216-864-11	SHORT CHIP	0			R1290	1-218-990-81	SHORT CHIP	0		

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R1295	1-208-715-11	METAL CHIP	22K	0.5%	1/16W	R5226	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1701	1-216-864-11	SHORT CHIP	0			R5500	1-400-794-21	FERRITE	0UH		
R1702	1-216-809-11	METAL CHIP	100	5%	1/10W	R5503	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1703	1-216-864-11	SHORT CHIP	0			R5504	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1707	1-218-990-81	SHORT CHIP	0			R5505	1-218-990-81	SHORT CHIP	0		
R1708	1-218-990-81	SHORT CHIP	0			R5506	1-211-986-11	METAL CHIP	51	0.5%	1/10W
R1709	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5507	1-218-990-81	SHORT CHIP	0		
R1710	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5508	1-218-933-11	RES-CHIP	22	5%	1/16W
R1721	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R5509	1-211-986-11	METAL CHIP	51	0.5%	1/10W
R1722	1-216-853-11	METAL CHIP	470K	5%	1/10W	R5510	1-218-933-11	RES-CHIP	22	5%	1/16W
R4700	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R5511	1-218-933-11	RES-CHIP	22	5%	1/16W
R4710	1-216-864-11	SHORT CHIP	0			R5512	1-218-933-11	RES-CHIP	22	5%	1/16W
R5000	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R5513	1-218-933-11	RES-CHIP	22	5%	1/16W
R5002	1-218-949-11	RES-CHIP	470	5%	1/16W	R5514	1-218-933-11	RES-CHIP	22	5%	1/16W
R5003	1-218-990-81	SHORT CHIP	0			R5515	1-218-933-11	RES-CHIP	22	5%	1/16W
R5004	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R5516	1-218-933-11	RES-CHIP	22	5%	1/16W
R5007	1-218-949-11	RES-CHIP	470	5%	1/16W	R5517	1-218-933-11	RES-CHIP	22	5%	1/16W
R5008	1-218-990-81	SHORT CHIP	0			R5518	1-218-933-11	RES-CHIP	22	5%	1/16W
R5009	1-218-989-11	RES-CHIP	1M	5%	1/16W	R5519	1-218-933-11	RES-CHIP	22	5%	1/16W
R5010	1-218-935-11	RES-CHIP	33	5%	1/16W	R6000	1-216-805-11	METAL CHIP	47	5%	1/10W
R5011	1-218-941-81	RES-CHIP	100	5%	1/16W	R6001	1-216-805-11	METAL CHIP	47	5%	1/10W
R5012	1-218-941-81	RES-CHIP	100	5%	1/16W	R6006	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5013	1-218-941-81	RES-CHIP	100	5%	1/16W	R6007	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5014	1-218-941-81	RES-CHIP	100	5%	1/16W	R6008	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5016	1-218-941-81	RES-CHIP	100	5%	1/16W	R6009	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5017	1-218-941-81	RES-CHIP	100	5%	1/16W	R6010	1-216-805-11	METAL CHIP	47	5%	1/10W
R5025	1-218-990-81	SHORT CHIP	0			R6011	1-216-805-11	METAL CHIP	47	5%	1/10W
R5026	1-216-864-11	SHORT CHIP	0			R6012	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R5027	1-216-864-11	SHORT CHIP	0			R6013	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R5029	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6014	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R5031	1-218-941-81	RES-CHIP	100	5%	1/16W	R6015	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R5039	1-218-990-81	SHORT CHIP	0			R6016	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5040	1-218-990-81	SHORT CHIP	0			R6017	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R5042	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R6018	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R5043	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R6019	1-216-845-11	METAL CHIP	100K	5%	1/10W
R5044	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R6021	1-216-801-11	METAL CHIP	22	5%	1/10W
R5045	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R6022	1-216-801-11	METAL CHIP	22	5%	1/10W
R5046	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R6023	1-216-801-11	METAL CHIP	22	5%	1/10W
R5047	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R6029	1-218-933-11	RES-CHIP	22	5%	1/16W
R5210	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R6030	1-218-933-11	RES-CHIP	22	5%	1/16W
R5211	1-218-990-81	SHORT CHIP	0			R6039	1-216-853-11	METAL CHIP	470K	5%	1/10W
R5212	1-218-973-11	RES-CHIP	47K	5%	1/16W	R6040	1-216-853-11	METAL CHIP	470K	5%	1/10W
R5214	1-218-933-11	RES-CHIP	22	5%	1/16W	R6041	1-216-847-11	METAL CHIP	150K	5%	1/10W
R5215	1-218-933-11	RES-CHIP	22	5%	1/16W	R6042	1-216-847-11	METAL CHIP	150K	5%	1/10W
R5218	1-216-864-11	SHORT CHIP	0			R6043	1-216-847-11	METAL CHIP	150K	5%	1/10W
R5221	1-216-864-11	SHORT CHIP	0			R6044	1-216-847-11	METAL CHIP	150K	5%	1/10W
R5222	1-216-864-11	SHORT CHIP	0			R6045	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5223	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6046	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5224	1-218-990-81	SHORT CHIP	0			R7000	1-218-877-11	METAL CHIP	18K	0.5%	1/10W
R5225	1-218-965-11	RES-CHIP	10K	5%	1/16W	R7001	1-218-877-11	METAL CHIP	18K	0.5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R7002	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R7067	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R7003	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R7080	1-400-591-22	FERRITE	0UH		
R7004	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7081	1-400-591-22	FERRITE	0UH		
R7005	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R7082	1-400-591-22	FERRITE	0UH		
R7006	1-218-891-11	METAL CHIP	68K	0.5%	1/10W	R7083	1-400-591-22	FERRITE	0UH		
R7007	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R7506	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R7008	1-218-891-11	METAL CHIP	68K	0.5%	1/10W	R7507	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R7009	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7510	1-216-864-11	SHORT CHIP	0		
R7010	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R7515	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7011	1-218-879-11	METAL CHIP	22K	0.5%	1/10W	R7516	1-216-846-11	METAL CHIP	120K	5%	1/10W
R7012	1-216-835-11	METAL CHIP	15K	5%	1/10W	R7517	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7013	1-218-882-11	METAL CHIP	30K	0.5%	1/10W	R7518	1-216-847-11	METAL CHIP	150K	5%	1/10W
R7014	1-216-809-11	METAL CHIP	100	5%	1/10W	R7542	1-218-965-11	RES-CHIP	10K	5%	1/16W
R7015	1-216-809-11	METAL CHIP	100	5%	1/10W	R7543	1-218-965-11	RES-CHIP	10K	5%	1/16W
R7016	1-216-821-11	METAL CHIP	1K	5%	1/10W	R7544	1-218-965-11	RES-CHIP	10K	5%	1/16W
R7017	1-216-815-11	METAL CHIP	330	5%	1/10W	R7545	1-218-977-11	RES-CHIP	100K	5%	1/16W
R7019	1-216-835-11	METAL CHIP	15K	5%	1/10W	R7546	1-218-965-11	RES-CHIP	10K	5%	1/16W
R7020	1-216-864-11	SHORT CHIP	0			R9001	1-216-805-11	METAL CHIP	47	5%	1/10W
R7021	1-216-837-11	METAL CHIP	22K	5%	1/10W	R9002	1-216-805-11	METAL CHIP	47	5%	1/10W
R7022	1-216-864-11	SHORT CHIP	0			R9003	1-216-805-11	METAL CHIP	47	5%	1/10W
R7023	1-216-864-11	SHORT CHIP	0			R9004	1-216-805-11	METAL CHIP	47	5%	1/10W
R7024	1-216-837-11	METAL CHIP	22K	5%	1/10W	R9005	1-218-929-11	RES-CHIP	10	5%	1/16W
R7025	1-216-864-11	SHORT CHIP	0			R9006	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R7026	1-216-864-11	SHORT CHIP	0			R9007	1-218-990-81	SHORT CHIP	0		
R7027	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9008	1-218-990-81	SHORT CHIP	0		
R7028	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9009	1-218-990-81	SHORT CHIP	0		
R7029	1-216-841-11	METAL CHIP	47K	5%	1/10W	R9010	1-216-864-11	SHORT CHIP	0		
R7030	1-216-841-11	METAL CHIP	47K	5%	1/10W	R9013	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R7031	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W	R9014	1-216-864-11	SHORT CHIP	0		
R7032	1-218-843-11	METAL CHIP	680	0.5%	1/10W	R9015	1-216-821-11	METAL CHIP	1K	5%	1/10W
R7035	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R9016	1-216-821-11	METAL CHIP	1K	5%	1/10W
R7036	1-218-845-11	METAL CHIP	820	0.5%	1/10W	R9017	1-218-941-81	RES-CHIP	100	5%	1/16W
R7040	1-216-295-91	SHORT CHIP	0			R9018	1-218-941-81	RES-CHIP	100	5%	1/16W
R7041	1-400-794-21	FERRITE	0UH			R9019	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R7045	1-216-295-91	SHORT CHIP	0			R9020	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R7046	1-216-295-91	SHORT CHIP	0			R9022	1-218-973-11	RES-CHIP	47K	5%	1/16W
R7048	1-216-295-91	SHORT CHIP	0			R9025	1-218-941-81	RES-CHIP	100	5%	1/16W
R7049	1-216-864-11	SHORT CHIP	0			R9031	1-218-929-11	RES-CHIP	10	5%	1/16W
R7050	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R9032	1-218-929-11	RES-CHIP	10	5%	1/16W
R7051	1-218-839-11	METAL CHIP	470	0.5%	1/10W	R9033	1-218-929-11	RES-CHIP	10	5%	1/16W
R7053	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W	R9034	1-218-929-11	RES-CHIP	10	5%	1/16W
R7054	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W	R9035	1-218-929-11	RES-CHIP	10	5%	1/16W
R7055	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R9036	1-218-929-11	RES-CHIP	10	5%	1/16W
R7056	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R9037	1-218-929-11	RES-CHIP	10	5%	1/16W
R7057	1-216-843-11	METAL CHIP	68K	5%	1/10W	R9038	1-218-929-11	RES-CHIP	10	5%	1/16W
R7058	1-216-851-11	METAL CHIP	330K	5%	1/10W	R9040	1-218-965-11	RES-CHIP	10K	5%	1/16W
R7060	1-216-833-11	METAL CHIP	10K	5%	1/10W	R9041	1-218-965-11	RES-CHIP	10K	5%	1/16W
R7063	1-216-833-11	METAL CHIP	10K	5%	1/10W	R9044	1-218-937-11	RES-CHIP	47	5%	1/16W
R7064	1-216-864-11	SHORT CHIP	0			R9045	1-218-937-11	RES-CHIP	47	5%	1/16W
R7066	1-216-835-11	METAL CHIP	15K	5%	1/10W	R9046	1-218-937-11	RES-CHIP	47	5%	1/16W

*A-1173-180-D FEE Board, Complete
(KDL-32/40/46V2000 AEP)

*A-1173-179-D FEE Board, Complete
(KDL-32/40/46V2000 UK)

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3124	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3323	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3125	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3324	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3126	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3326	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3130	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3328	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3131	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3402	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3132	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3403	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3133	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C3404	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C3134	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3405	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3135	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3409	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V
C3136	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C3410	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3137	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3411	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V
C3138	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3412	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C3139	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3413	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3140	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C3415	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3141	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3417	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3142	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3428	1-112-066-11	CERAMIC CHIP 10UF	10% 10V
C3143	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3432	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3200	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3436	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C3201	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3439	1-165-681-21	ELECT CHIP 180UF	20% 16V
C3202	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3442	1-164-882-11	CERAMIC CHIP 220PF	5.00% 16V
C3203	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3443	1-107-819-11	CERAMIC CHIP 0.022UF	10.00% 16V
C3205	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3444	1-135-960-91	CERAMIC CHIP 10UF	10% 25V
C3206	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C3445	1-165-671-21	ELECT CHIP 470UF	20% 6.3V
C3207	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3446	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3208	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3502	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3209	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3503	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3210	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3505	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3211	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3506	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V
C3212	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C3605	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C3214	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3606	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C3215	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C3607	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C3216	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3609	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
C3217	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3610	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3218	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3611	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3219	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	< CONNECTOR >			
C3220	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	CN3300	*1-793-769-21	CONNECTOR, CARD (PCMCIA CARD)	
C3300	1-117-720-11	CERAMIC CHIP 4.7UF	10V	CN3400	1-820-255-51	FFC/FPC CONNECTOR (ZIF) 20P	
C3301	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	CN3401	1-819-475-11	HEADER ASSEMBLY FOR PWB 7P	
C3302	1-117-720-11	CERAMIC CHIP 4.7UF	10V	CN3600	1-820-235-21	HEADER ASSEMBLY 30P	
C3303	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	CN3601	1-820-209-11	MEMORY STICK CONNECTOR	
C3306	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	CN3610	1-780-336-11	EARTH TERMINAL	
C3307	1-117-720-11	CERAMIC CHIP 4.7UF	10V	CN3611	1-780-336-11	EARTH TERMINAL	
C3308	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	< DIODE >			
C3309	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	D3400	6-501-060-01	DIODE STPS2L25U	
C3310	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	D3401	6-500-294-01	DIODE PTZ-TE25-3.9B	
C3312	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	D3503	8-719-066-11	DIODE 1PS184-115	
C3315	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V				
C3316	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V				
C3320	1-117-720-11	CERAMIC CHIP 4.7UF	10V				
C3322	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V				

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< FERRITE BEAD >				FB3609	1-400-834-11	FERRITE	OUH
FB3103	1-400-834-11	FERRITE	OUH	FB3610	1-400-834-11	FERRITE	OUH
FB3104	1-400-834-11	FERRITE	OUH	FB3611	1-400-834-11	FERRITE	OUH
FB3105	1-400-834-11	FERRITE	OUH	FB3612	1-400-834-11	FERRITE	OUH
FB3106	1-400-834-11	FERRITE	OUH	FB3613	1-400-834-11	FERRITE	OUH
FB3107	1-400-834-11	FERRITE	OUH	FB3614	1-400-834-11	FERRITE	OUH
FB3108	1-400-834-11	FERRITE	OUH	FB3615	1-400-834-11	FERRITE	OUH
FB3109	1-400-834-11	FERRITE	OUH	FB3616	1-400-834-11	FERRITE	OUH
FB3110	1-400-834-11	FERRITE	OUH	FB3617	1-400-834-11	FERRITE	OUH
FB3111	1-400-834-11	FERRITE	OUH	FB3618	1-400-834-11	FERRITE	OUH
FB3113	1-400-834-11	FERRITE	OUH	FB3619	1-400-834-11	FERRITE	OUH
FB3114	1-469-869-21	FERRITE	OUH	FB3620	1-400-834-11	FERRITE	OUH
FB3115	1-400-244-11	FERRITE	OUH	< IC >			
FB3116	1-400-244-11	FERRITE	OUH	IC3100	6-709-214-01	IC UPD61123F1-100-KA3-A	
FB3117	1-469-869-21	FERRITE	OUH	IC3200	6-707-809-01	IC EDD1216AATA-6B-E	
FB3118	1-469-869-21	FERRITE	OUH	IC3201	6-708-916-01	IC ICS7150MLFT	
FB3119	1-400-807-21	FERRITE	OUH	IC3206	6-705-336-01	IC K9F2808U0C-PCB0T	
FB3120	1-400-807-21	FERRITE	OUH	IC3301	6-707-853-01	IC TC74LCX541FT (EKJ)	
FB3121	1-400-807-21	FERRITE	OUH	IC3302	6-707-853-01	IC TC74LCX541FT (EKJ)	
FB3122	1-400-807-21	FERRITE	OUH	IC3304	6-707-853-01	IC TC74LCX541FT (EKJ)	
FB3123	1-400-807-21	FERRITE	OUH	IC3305	6-707-853-01	IC TC74LCX541FT (EKJ)	
FB3125	1-469-869-21	FERRITE	OUH	IC3306	6-707-853-01	IC TC74LCX541FT (EKJ)	
FB3200	1-400-244-11	FERRITE	OUH	IC3308	6-707-853-01	IC TC74LCX541FT (EKJ)	
FB3201	1-400-244-11	FERRITE	OUH	IC3311	6-707-850-01	IC TC74LCX245FT (EKJ)	
FB3300	1-469-869-21	FERRITE	OUH	IC3312	6-708-853-01	IC TC74LCX541FT (EKJ)	
FB3301	1-469-869-21	FERRITE	OUH	IC3316	6-708-132-01	IC 74LVC14APW	
FB3402	1-400-244-11	FERRITE	OUH	IC3317	6-706-482-01	IC TC7SH00FU (T5RSOYJF)	
FB3403	1-400-834-11	FERRITE	OUH	IC3402	6-705-790-01	IC LM3525MX-H/J5000395	
FB3407	1-469-869-21	FERRITE	OUH	IC3404	6-706-106-01	IC NCP1117STAT3	
FB3408	1-400-461-21	FERRITE	OUH	IC3405	6-708-603-01	IC PQ070XNA12PH	
FB3409	1-400-461-21	FERRITE	OUH	IC3406	6-707-078-01	IC L5973ADTR	
FB3410	1-400-461-21	FERRITE	OUH	IC3501	6-703-175-01	IC PST3629UL	
FB3411	1-400-461-21	FERRITE	OUH	< COIL >			
FB3412	1-400-834-11	FERRITE	OUH	L3100	1-414-398-11	INDUCTOR	10UH
FB3413	1-400-834-11	FERRITE	OUH	L3400	1-419-353-21	INDUCTOR	10UH
FB3414	1-400-834-11	FERRITE	OUH	L3401	*1-424-924-21	COIL, POWER	
FB3415	1-400-834-11	FERRITE	OUH	< TRANSISTOR >			
FB3416	1-400-834-11	FERRITE	OUH	Q3409	8-729-010-05	TRANSISTOR MSB709-RT1	
FB3417	1-400-834-11	FERRITE	OUH	Q3501	8-729-027-43	TRANSISTOR DTC114EKA-T146	
FB3418	1-400-834-11	FERRITE	OUH	Q3502	8-729-027-43	TRANSISTOR DTC114EKA-T146	
FB3419	1-400-834-11	FERRITE	OUH	< RESISTOR >			
FB3601	1-469-869-21	FERRITE	OUH	R3100	1-218-965-11	RES-CHIP	10K 5% 1/16W
FB3602	1-469-869-21	FERRITE	OUH	R3101	1-218-941-81	RES-CHIP	100 5% 1/16W
FB3603	1-469-869-21	FERRITE	OUH	R3102	1-218-941-81	RES-CHIP	100 5% 1/16W
FB3604	1-400-834-11	FERRITE	OUH	R3103	1-218-941-81	RES-CHIP	100 5% 1/16W
FB3605	1-400-834-11	FERRITE	OUH	R3104	1-218-941-81	RES-CHIP	100 5% 1/16W
FB3606	1-400-834-11	FERRITE	OUH				
FB3607	1-400-834-11	FERRITE	OUH				
FB3608	1-400-834-11	FERRITE	OUH				

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3105	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3229	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3106	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3230	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3109	1-218-941-81	RES-CHIP	100	5%	1/16W	R3233	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3110	1-218-941-81	RES-CHIP	100	5%	1/16W	R3235	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3111	1-218-941-81	RES-CHIP	100	5%	1/16W	R3237	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3112	1-218-941-81	RES-CHIP	100	5%	1/16W	R3238	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3113	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3239	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3114	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3240	1-218-939-11	RES-CHIP	68	5%	1/16W
R3115	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3241	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3117	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3242	1-218-941-81	RES-CHIP	100	5%	1/16W
R3119	1-218-990-81	SHORT CHIP	0			R3244	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3120	1-218-990-81	SHORT CHIP	0			R3247	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3125	1-218-937-11	RES-CHIP	47	5%	1/16W	R3249	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3126	1-218-990-81	SHORT CHIP	0			R3250	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3127	1-220-174-11	RES-CHIP	200	5%	1/16W	R3251	1-218-949-11	RES-CHIP	470	5%	1/16W
R3128	1-220-174-11	RES-CHIP	200	5%	1/16W	R3254	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3129	1-220-174-11	RES-CHIP	200	5%	1/16W	R3255	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3130	1-220-174-11	RES-CHIP	200	5%	1/16W	R3258	1-218-941-81	RES-CHIP	100	5%	1/16W
R3131	1-220-174-11	RES-CHIP	200	5%	1/16W	R3259	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3132	1-220-174-11	RES-CHIP	200	5%	1/16W	R3263	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3133	1-208-671-11	METAL CHIP	330	0.5%	1/16W	R3300	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3134	1-208-679-11	METAL CHIP	680	0.5%	1/16W	R3301	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3136	1-208-675-11	METAL CHIP	470	0.5%	1/16W	R3302	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3138	1-218-990-81	SHORT CHIP	0			R3303	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3142	1-218-937-11	RES-CHIP	47	5%	1/16W	R3308	1-218-941-81	RES-CHIP	100	5%	1/16W
R3143	1-218-937-11	RES-CHIP	47	5%	1/16W	R3310	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3144	1-218-937-11	RES-CHIP	47	5%	1/16W	R3311	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3146	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3312	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3147	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3313	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3148	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3314	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3149	1-218-990-81	SHORT CHIP	0			R3317	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3150	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3321	1-218-941-81	RES-CHIP	100	5%	1/16W
R3151	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3324	1-218-941-81	RES-CHIP	100	5%	1/16W
R3200	1-218-941-11	RES-CHIP	100	5%	1/16W	R3329	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3201	1-218-941-11	RES-CHIP	100	5%	1/16W	R3330	1-218-939-11	RES-CHIP	68	5%	1/16W
R3202	1-218-939-11	RES-CHIP	68	5%	1/16W	R3331	1-218-939-11	RES-CHIP	68	5%	1/16W
R3203	1-218-941-81	RES-CHIP	100	5%	1/16W	R3332	1-218-939-11	RES-CHIP	68	5%	1/16W
R3204	1-218-941-81	RES-CHIP	100	5%	1/16W	R3333	1-218-939-11	RES-CHIP	68	5%	1/16W
R3205	1-218-937-11	RES-CHIP	47	5%	1/16W	R3334	1-218-939-11	RES-CHIP	68	5%	1/16W
R3207	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3335	1-218-939-11	RES-CHIP	68	5%	1/16W
R3209	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3400	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3210	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3401	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R3212	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3406	1-218-935-11	RES-CHIP	33	5%	1/16W
R3214	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3407	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R3217	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3418	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3218	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3419	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3220	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3425	1-220-174-11	RES-CHIP	200	5%	1/16W
R3222	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3426	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R3224	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3430	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3226	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3432	1-218-961-11	RES-CHIP	4.7K	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R3433	1-208-905-11	METAL CHIP	5.6K 0.5% 1/16W	RB3208	1-234-702-11	RES, NETWORK 68	(1005X4)
R3434	1-208-702-11	METAL CHIP	6.2K 0.5% 1/16W	RB3209	1-234-702-11	RES, NETWORK 68	(1005X4)
R3435	1-208-703-11	METAL CHIP	6.8K 0.5% 1/16W	< CRYSTAL >			
R3436	1-218-937-11	RES-CHIP	47 5% 1/16W	X3200	1-813-055-11	QUARTZ CRYSTAL UNIT	
R3437	1-218-990-81	SHORT CHIP	0	*A-1173-184-A TUE Board, Complete			
R3473	1-218-945-11	RES-CHIP	220 5% 1/16W	< CAPACITOR >			
R3504	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3803	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
R3508	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3814	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3511	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3815	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
R3513	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3819	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3514	1-218-941-81	RES-CHIP	100 5% 1/16W	C3821	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
R3515	1-218-953-11	RES-CHIP	1K 5% 1/16W	C3834	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
R3518	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3900	1-100-611-91	CERAMIC CHIP 22UF	20% 6.3V
R3519	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	C3901	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
R3520	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3902	1-164-947-11	CERAMIC CHIP 0.01UF	50V
R3522	1-218-941-81	RES-CHIP	100 5% 1/16W	C3903	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3554	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3904	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3600	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3906	1-164-947-11	CERAMIC CHIP 0.01UF	50V
R3601	1-218-953-11	RES-CHIP	1K 5% 1/16W	C3907	1-135-366-11	ELECT CHIP 100UF	20% 16V
R3602	1-218-941-81	RES-CHIP	100 5% 1/16W	C3909	1-128-991-21	ELECT CHIP 10UF	20% 50V
R3603	1-218-941-81	RES-CHIP	100 5% 1/16W	C3910	1-126-204-11	ELECT CHIP 47UF	20.00% 16V
R3604	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	C3911	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3609	1-218-941-81	RES-CHIP	100 5% 1/16W	C3914	1-164-947-11	CERAMIC CHIP 0.01UF	50V
R3610	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	C3917	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
R3611	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	C3918	1-135-595-11	ELECT 100UF	20% 6.3V
R3612	1-218-990-81	SHORT CHIP	0	C3919	1-135-595-11	ELECT 100UF	20% 6.3V
R3613	1-218-990-81	SHORT CHIP	0	C3920	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
R3616	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3921	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3617	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3923	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
R3623	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3924	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3628	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3926	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3646	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3927	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3647	1-218-965-11	RES-CHIP	10K 5% 1/16W	C3929	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3648	1-218-941-81	RES-CHIP	100 5% 1/16W	C3930	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3649	1-218-941-81	RES-CHIP	100 5% 1/16W	C3931	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3650	1-218-941-81	RES-CHIP	100 5% 1/16W	C3932	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V
R3651	1-218-941-81	RES-CHIP	100 5% 1/16W	C3933	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3652	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	C3935	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
R3653	1-218-943-11	RES-CHIP	150 5% 1/16W	C3937	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
R3654	1-218-943-11	RES-CHIP	150 5% 1/16W	C3941	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V
R3655	1-218-943-11	RES-CHIP	150 5% 1/16W	C3942	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V
< RESISTOR CHIP >				C3945	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V
RB3200	1-234-372-11	RES, NETWORK 100	(1005X4)	C3946	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V
RB3201	1-234-372-11	RES, NETWORK 100	(1005X4)	C3947	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V
RB3202	1-234-372-11	RES, NETWORK 100	(1005X4)	C3948	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V
RB3203	1-234-702-11	RES, NETWORK 68	(1005X4)	C3950	1-100-611-91	CERAMIC CHIP 22UF	20% 6.3V
RB3204	1-234-702-11	RES, NETWORK 68	(1005X4)	C3951	1-128-405-11	ELECT CHIP 22UF	20% 50V
RB3206	1-234-372-11	RES, NETWORK 100	(1005X4)				
RB3207	1-234-372-11	RES, NETWORK 100	(1005X4)				

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3952	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	< RESISTOR >			
C3953	1-100-053-21	ELECT CHIP 220UF	20% 6.3V	R3810	1-208-683-11	METAL CHIP 1K	0.5% 1/16W
C3954	1-164-866-11	CERAMIC CHIP 47PF	5.00% 50V	R3812	1-218-948-11	RES-CHIP 390	5% 1/16W
C3955	1-164-936-11	CERAMIC CHIP 680PF	10.00% 50V	R3813	1-218-937-11	RES-CHIP 47	5% 1/16W
C3956	1-164-936-11	CERAMIC CHIP 680PF	10.00% 50V	R3900	1-216-295-91	SHORT CHIP	0
< CONNECTOR >				R3901	1-218-990-81	SHORT CHIP	0
CN3802	1-819-339-11	HEADER ASSEMBLY FOR PWB 12P		R3902	1-218-938-11	RES-CHIP 56	5% 1/16W
CN3900	1-695-915-11	TAB (CONTACT)		R3903	1-218-953-11	RES-CHIP 1K	5% 1/16W
CN3901	1-820-235-21	HEADER ASSEMBLY 30P		R3904	1-218-937-11	RES-CHIP 47	5% 1/16W
CN3903	1-819-337-11	HEADER ASSEMBLY FOR PWB 10P		R3906	1-216-821-11	METAL CHIP 1K	5% 1/10W
CN3904	1-819-474-11	HEADER ASSEMBLY FOR PWB 6P		R3907	1-218-973-11	RES-CHIP 47K	5% 1/16W
CN3907	1-780-336-11	EARTH TERMINAL		R3908	1-218-937-11	RES-CHIP 47	5% 1/16W
< DIODE >				R3909	1-218-965-11	RES-CHIP 10K	5% 1/16W
D3900	8-719-083-87	DIODE UDZS-TE17-33B		R3911	1-218-990-81	SHORT CHIP	0
< FERRITE BEAD >				R3913	1-218-965-11	RES-CHIP 10K	5% 1/16W
FB3901	1-469-869-21	FERRITE 0UH		R3918	1-218-941-81	RES-CHIP 100	5% 1/16W
FB3902	1-469-869-21	FERRITE 0UH		R3919	1-218-941-81	RES-CHIP 100	5% 1/16W
FB3903	1-469-869-21	FERRITE 0UH		R3921	1-218-941-81	RES-CHIP 100	5% 1/16W
FB3909	1-469-869-21	FERRITE 0UH		R3922	1-218-941-81	RES-CHIP 100	5% 1/16W
< FILTER >				R3924	1-218-933-11	RES-CHIP 22	5% 1/16W
FL3800	1-239-899-21	FERRITE 0UH		R3925	1-218-933-11	RES-CHIP 22	5% 1/16W
< IC >				R3926	1-218-941-81	RES-CHIP 100	5% 1/16W
IC3802	6-706-106-01	IC NCP1117STAT3		R3927	1-218-965-11	RES-CHIP 10K	5% 1/16W
IC3900	6-709-257-01	IC 74LVC4066PW		R3929	1-218-990-81	SHORT CHIP	0
< COIL >				R3930	1-218-990-81	SHORT CHIP	0
L3804	1-400-175-21	INDUCTOR 47UH		R3938	1-218-941-81	RES-CHIP 100	5% 1/16W
L3805	1-410-993-42	INDUCTOR 1UH		R3943	1-218-949-11	RES-CHIP 470	5% 1/16W
L3900	1-412-006-31	INDUCTOR 10UH		R3945	1-218-953-11	RES-CHIP 1K	5% 1/16W
L3902	*1-424-924-21	COIL, POWER		R3946	1-218-949-11	RES-CHIP 470	5% 1/16W
L3903	1-410-993-42	INDUCTOR 1UH		R3947	1-218-929-11	RES-CHIP 10	5% 1/16W
L3904	1-412-989-11	INDUCTOR 6.8UH		R3948	1-218-929-11	RES-CHIP 10	5% 1/16W
< TRANSISTOR >				R3950	1-218-961-11	RES-CHIP 4.7K	5% 1/16W
Q3900	8-729-027-43	TRANSISTOR DTC114EKA-T146		R3951	1-218-961-11	RES-CHIP 4.7K	5% 1/16W
Q3901	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3952	1-218-937-11	RES-CHIP 47	5% 1/16W
Q3902	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3953	1-218-941-81	RES-CHIP 100	5% 1/16W
Q3903	6-550-871-01	TRANSISTOR 2SA2048TL QR		R3958	1-218-957-11	RES-CHIP 2.2K	5% 1/16W
Q3904	6-550-871-01	TRANSISTOR 2SA2048TL QR		R3959	1-218-953-11	RES-CHIP 1K	5% 1/16W
Q3905	6-550-871-01	TRANSISTOR 2SA2048TL QR		R3960	1-218-953-11	RES-CHIP 1K	5% 1/16W
Q3906	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3961	1-218-965-11	RES-CHIP 10K	5% 1/16W
Q3907	6-550-232-01	TRANSISTOR 2SA2029T2LQ/R		R3962	1-218-969-11	RES-CHIP 22K	5% 1/16W
				R3967	1-218-941-81	RES-CHIP 100	5% 1/16W
				R3970	1-218-953-11	RES-CHIP 1K	5% 1/16W
				R3971	1-218-969-11	RES-CHIP 22K	5% 1/16W
				R3973	1-218-990-81	SHORT CHIP	0
				R3974	1-218-990-81	SHORT CHIP	0
				R3980	1-218-941-81	RES-CHIP 100	5% 1/16W
				R3981	1-218-933-11	RES-CHIP 22	5% 1/16W
				R3982	1-218-953-11	RES-CHIP 1K	5% 1/16W
				R3983	1-218-990-81	SHORT CHIP	0

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3984	1-218-990-81	SHORT CHIP	0			< DIODE >					
R3985	1-218-990-81	SHORT CHIP	0			D352	8-719-085-26	DIODE CL-165HR/SYG-D-T			
R3986	1-218-990-81	SHORT CHIP	0			D355	8-719-085-26	DIODE CL-165HR/SYG-D-T			
R3987	1-218-990-81	SHORT CHIP	0			D358	6-500-817-01	DIODE (LED) SML-512UWT86			
R3988	1-218-990-81	SHORT CHIP	0			< IC >					
R3989	1-218-990-81	SHORT CHIP	0			IC351	6-600-502-01	HIC GP1UE26RK0VF			
R3996	1-218-990-81	SHORT CHIP	0			IC352	6-600-447-01	IC TPS853(SONY)			
R3997	1-218-933-11	RES-CHIP	22	5%	1/16W	< TRANSISTOR >					
R3998	1-218-933-11	RES-CHIP	22	5%	1/16W						
< RESISTOR CHIP >											
RB3900	1-234-371-21	RES, NETWORK	47		(1005X4)	Q351	8-729-038-37	TRANSISTOR RT1N141M-TP-1			
RB3901	1-234-371-21	RES, NETWORK	47		(1005X4)	Q352	8-729-038-37	TRANSISTOR RT1N141M-TP-1			
RB3902	1-234-371-21	RES, NETWORK	47		(1005X4)	Q353	8-729-038-37	TRANSISTOR RT1N141M-TP-1			
< TUNER >						Q354	8-729-038-37	TRANSISTOR RT1N141M-TP-1			
						Q355	8-729-038-37	TRANSISTOR RT1N141M-TP-1			
TU3901	8-597-571-00	TUNER UNIT, DIGITAL	BTD-HF431Z			Q356	8-729-620-10	TRANSISTOR 2SA1602TP-1EF			
*A-1172-590-D H1E Board, Complete						< RESISTOR >					
< CONNECTOR >						R351	1-216-820-11	METAL CHIP	820	5% 1/10W	
CN101	1-819-445-11	HEADER ASSEMBLY FOR PWB	3P			R352	1-216-819-11	METAL CHIP	680	5% 1/10W	
< RESISTOR >						R353	1-216-820-11	METAL CHIP	820	5% 1/10W	
R101	1-218-848-11	METAL CHIP	1.1K	0.5%	1/10W	R354	1-216-819-11	METAL CHIP	680	5% 1/10W	
R102	1-218-841-11	METAL CHIP	560	0.5%	1/10W	R355	1-216-826-11	METAL CHIP	2.7K	5% 1/10W	
R103	1-218-835-11	METAL CHIP	330	0.5%	1/10W	R356	1-216-817-11	METAL CHIP	470	5% 1/10W	
R104	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R357	1-216-805-11	METAL CHIP	47	5% 1/10W	
R105	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R359	1-216-839-11	METAL CHIP	33K	5% 1/10W	
< SWITCH >						R360	1-216-821-11	METAL CHIP	1K	5% 1/10W	
S101	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)				R361	1-216-833-11	METAL CHIP	10K	5% 1/10W	
S102	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)				R363	1-216-849-11	METAL CHIP	220K	5% 1/10W	
S103	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)				R364	1-216-849-11	METAL CHIP	220K	5% 1/10W	
S104	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)				R365	1-216-864-11	SHORT CHIP	0		
S105	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)				R366	1-216-827-11	METAL CHIP	3.3K	5% 1/10W	
S106	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)				*A-1144-539-D AE Board, Complete					
S107	1-572-595-11	SWITCH, TACTIL (REFLOW TYPE)				< CAPACITOR >					
*A-1176-515-D H4E Board, Complete						C2008	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
< CAPACITOR >						C2009	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
C352	1-162-960-11	CERAMIC CHIP 220PF	10.00%	50V		C2013	1-127-715-91	CERAMIC CHIP 0.22UF	10%	16V	
C353	1-119-667-11	CERAMIC CHIP 22UF		10V		C2015	1-117-681-11	ELECT CHIP 100UF	20.00%	16V	
C355	1-165-908-11	CERAMIC CHIP 1UF	10%	10V		C2016	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
C357	1-107-826-11	CERAMIC CHIP 0.1UF	10.00%	16V		C2017	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
C358	1-126-205-11	ELECT CHIP 47UF	20.00%	6.3V		C2018	1-127-715-91	CERAMIC CHIP 0.22UF	10%	16V	
< CONNECTOR >						C2019	1-124-779-00	ELECT CHIP 10UF	20.00%	16V	
CN351	1-820-187-11	HEADER ASSEMBLY (PRINT PWB)	10P			C2020	1-127-715-91	CERAMIC CHIP 0.22UF	10%	16V	
						C2021	1-127-715-91	CERAMIC CHIP 0.22UF	10%	16V	
						C2022	1-162-927-11	CERAMIC CHIP 100PF	5%	50V	
						C2023	1-117-681-11	ELECT CHIP 100UF	20.00%	16V	
						C2024	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C2025	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7034	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C2026	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V	C7035	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C2033	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V	C7036	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C2040	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C7037	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C2041	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C7038	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C2042	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C7039	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C6001	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7040	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C6003	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C7042	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C6005	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	C7043	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C6006	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7044	1-126-204-11	ELECT CHIP 47UF	20.00% 16V
C6009	1-100-743-91	CERAMIC CHIP 2.2UF	20% 16V	C7045	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C6011	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7046	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C6014	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	C7047	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C6015	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7048	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C6016	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	C7049	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C6017	1-126-204-11	ELECT CHIP 47UF	20.00% 16V	C7050	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C6018	1-100-743-91	CERAMIC CHIP 2.2UF	20% 16V	C7051	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C6019	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7052	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C6020	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C7053	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C6022	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C7054	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C6023	1-128-995-21	ELECT CHIP 100UF	20% 10V	C7055	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C6024	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V	C7056	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C6025	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7057	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C6026	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7060	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C6027	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C7061	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7002	1-162-928-11	CERAMIC CHIP 120PF	5.00% 50V	C7062	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7004	1-162-906-11	CERAMIC CHIP 1.5PF	0.25PF 50V	C7063	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7005	1-162-906-11	CERAMIC CHIP 1.5PF	0.25PF 50V	C7064	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7007	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	C7065	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7008	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7072	1-128-536-11	ELECT CHIP 100UF	20.00% 25V
C7009	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7073	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C7010	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C7075	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C7011	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C7076	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C7012	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C7082	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7013	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C7083	1-115-340-11	CERAMIC CHIP 0.22UF	10% 25V
C7014	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	C7086	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C7015	1-162-960-11	CERAMIC CHIP 220PF	10.00% 50V	C7087	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C7017	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7088	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C7018	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7089	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C7019	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C7090	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C7020	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C7091	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C7021	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7092	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C7023	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7093	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C7024	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7094	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C7025	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7095	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C7027	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7096	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C7028	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C7097	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C7029	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7098	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C7030	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C7099	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C7033	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7100	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C7101	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C9009	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C7102	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C9010	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C7103	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C9011	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C7104	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C9012	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C7105	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C9013	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C7106	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C9014	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C7107	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C9015	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C7108	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C9016	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C7109	1-162-959-11	CERAMIC CHIP 330PF	5.00% 50V	C9021	1-128-992-21	ELECT CHIP 47UF	20% 25V
C7110	1-162-959-11	CERAMIC CHIP 330PF	5.00% 50V	C9027	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C7111	1-162-959-11	CERAMIC CHIP 330PF	5.00% 50V	C9028	1-128-992-21	ELECT CHIP 47UF	20% 25V
C7112	1-162-959-11	CERAMIC CHIP 330PF	5.00% 50V	C9029	1-128-992-21	ELECT CHIP 47UF	20% 25V
C7113	1-112-797-11	ELECT CHIP 470UF	20% 25V	C9030	1-128-992-21	ELECT CHIP 47UF	20% 25V
C7114	1-112-800-11	ELECT CHIP 100UF	20% 35V	C9031	1-128-992-21	ELECT CHIP 47UF	20% 25V
C7115	1-112-800-11	ELECT CHIP 100UF	20% 35V	C9032	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7116	1-112-800-11	ELECT CHIP 100UF	20% 35V	C9043	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7117	1-112-800-11	ELECT CHIP 100UF	20% 35V	C9044	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7118	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9045	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
C7119	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9046	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
C7120	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9047	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C7121	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9048	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C7123	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C9049	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7124	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C9050	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7125	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C9051	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7126	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V	C9052	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C7127	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9057	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7128	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9058	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7147	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9060	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C7148	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9061	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C7600	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C9065	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7601	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9066	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7602	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9067	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7603	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C9068	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7604	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C9069	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7605	1-126-204-11	ELECT CHIP 47UF	20.00% 16V	C9070	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C7609	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C9501	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7610	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9502	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C7611	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	< CONNECTOR >			
C7612	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	CN7000	1-819-461-11	HEADER ASSEMBLY FOR PWB 4P	
C7613	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	CN7001	1-780-148-11	CLIP, SHIELD	
C7614	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	CN7002	1-780-148-11	CLIP, SHIELD	
C7615	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	CN7501	1-820-184-11	HEADER ASSEMBLY (PRINT PWB) 7P	
C7616	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	CN7502	1-820-185-11	HEADER ASSEMBLY (PRINT PWB) 8P	
C7617	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	CN7503	1-820-211-11	HEADER ASSEMBLY FOR PWB 5P	
C7618	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	CN9001	1-820-192-11	HEADER ASSEMBLY (PRINT PWB) 15P	
C7619	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	CN9501	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P	
C9001	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	CN9502	1-820-186-11	HEADER ASSEMBLY (PRINT PWB) 9P	
C9003	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	CN9521	1-780-336-11	EARTH TERMINAL	
C9005	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V				
C9007	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

AE

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
CN9522	1-780-336-11	EARTH TERMINAL		FB7004	1-400-040-22	FERRITE	0UH
CN9523	1-780-336-11	EARTH TERMINAL		FB7005	1-400-040-22	FERRITE	0UH
< DIODE >				FB7006	1-400-040-22	FERRITE	0UH
D6001	8-719-081-97	DIODE MMDL914T1		FB7007	1-400-040-22	FERRITE	0UH
D7001	6-500-551-01	DIODE MM3Z11VT1		FB7008	1-400-040-22	FERRITE	0UH
D7004	8-719-050-37	DIODE M1MA152WA-T1		< IC >			
D7005	8-719-081-97	DIODE MMDL914T1		FB9003	1-216-864-11	SHORT CHIP	0
D7006	8-719-081-97	DIODE MMDL914T1		< IC >			
D7007	8-719-081-97	DIODE MMDL914T1		IC2001	8-752-089-33	IC CXA2069Q-TL	
D7009	6-500-884-01	DIODE P6SMBJ30A-5		IC7001	6-709-191-01	IC MSP4410K-QA-D6-501	
D7010	6-500-884-01	DIODE P6SMBJ30A-5		IC7003	8-759-278-58	IC NJM4558V-TE2	
D7011	6-500-884-01	DIODE P6SMBJ30A-5		IC7007	6-709-285-01	IC M61571AFP-DF0T	
D7012	6-500-884-01	DIODE P6SMBJ30A-5		IC7601	8-759-278-58	IC NJM4558V-TE2	
D7013	8-719-081-97	DIODE MMDL914T1		IC7602	8-759-359-49	IC NJM3414AV (TE2)	
D7602	8-719-050-37	DIODE M1MA152WA-T1		< SOCKET >			
D7603	8-719-050-37	DIODE M1MA152WA-T1		J9001	1-695-549-11	SOCKET, PIN 21P	
D7604	8-719-081-97	DIODE MMDL914T1		J9002	1-695-549-11	SOCKET, PIN 21P	
D7605	8-719-081-97	DIODE MMDL914T1		J9003	*1-819-358-11	PHONO JACK	
D9001	8-719-977-28	DIODE DTZ10B		J9004	1-819-354-11	PHONO JACK 5P	
D9002	8-719-081-99	DIODE MM3Z13VT1		< COIL >			
D9003	8-719-977-28	DIODE DTZ10B		L2002	1-469-557-21	INDUCTOR	22UH
D9004	8-719-977-28	DIODE DTZ10B		L2003	1-469-555-21	INDUCTOR	10UH
D9005	8-719-036-94	DIODE RD5.6SB-T1		L6001	1-469-555-21	INDUCTOR	10UH
D9007	8-719-036-94	DIODE RD5.6SB-T1		L7001	1-412-990-41	INDUCTOR	8.2UH
D9008	8-719-977-28	DIODE DTZ10B		L7002	1-400-794-21	FERRITE	0UH
D9009	8-719-081-99	DIODE MM3Z13VT1		L7004	1-400-794-21	FERRITE	0UH
D9010	8-719-977-28	DIODE DTZ10B		L7005	1-469-555-21	INDUCTOR	10UH
D9011	8-719-036-94	DIODE RD5.6SB-T1		L7006	1-400-794-21	FERRITE	0UH
D9012	8-719-977-28	DIODE DTZ10B		L7007	1-469-555-21	INDUCTOR	10UH
D9013	8-719-036-94	DIODE RD5.6SB-T1		L7008	1-481-083-11	INDUCTOR	22UH
D9015	8-719-036-94	DIODE RD5.6SB-T1		L7009	1-457-106-11	INDUCTOR	10UH
D9016	8-719-977-28	DIODE DTZ10B		L7010	1-457-106-11	INDUCTOR	10UH
D9017	8-719-977-28	DIODE DTZ10B		L7011	1-400-794-21	FERRITE	0UH
D9018	8-719-977-28	DIODE DTZ10B		L7012	1-400-794-21	FERRITE	0UH
D9019	8-719-977-28	DIODE DTZ10B		L7013	1-400-794-21	FERRITE	0UH
D9020	8-719-977-28	DIODE DTZ10B		L9001	1-469-555-21	INDUCTOR	10UH
D9021	8-719-977-28	DIODE DTZ10B		L9503	1-400-178-21	INDUCTOR	0UH
D9022	8-719-977-28	DIODE DTZ10B		L9504	1-400-178-21	INDUCTOR	0UH
D9023	8-719-977-28	DIODE DTZ10B		L9505	1-400-178-21	INDUCTOR	0UH
D9036	8-719-977-28	DIODE DTZ10B		< PROTECTOR MODULE >			
D9037	8-719-977-28	DIODE DTZ10B		PS7001 Δ	1-576-958-21	FUSE	4A 24V
D9038	8-719-977-28	DIODE DTZ10B		< TRANSISTOR >			
D9039	8-719-977-28	DIODE DTZ10B		Q2001	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
< FERRITE BEAD >				Q2002	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
FB7000	1-400-089-21	FERRITE	0UH	Q6001	8-729-600-22	TRANSISTOR 2SA1235-F	
FB7001	1-400-089-21	FERRITE	0UH				
FB7002	1-400-089-21	FERRITE	0UH				
FB7003	1-400-089-21	FERRITE	0UH				

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
Q6002	8-729-600-22	TRANSISTOR 2SA1235-F		R2012	1-216-864-11	SHORT CHIP	0
Q6004	8-729-600-22	TRANSISTOR 2SA1235-F		R2014	1-216-864-11	SHORT CHIP	0
Q6005	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2015	1-216-864-11	SHORT CHIP	0
Q6007	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2017	1-216-864-11	SHORT CHIP	0
Q6008	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2019	1-216-809-11	METAL CHIP	100 5% 1/10W
Q6009	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2020	1-216-809-11	METAL CHIP	100 5% 1/10W
Q6011	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2023	1-216-821-11	METAL CHIP	1K 5% 1/10W
Q6012	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2024	1-216-821-11	METAL CHIP	1K 5% 1/10W
Q6013	8-729-600-22	TRANSISTOR 2SA1235-F		R2025	1-216-864-11	SHORT CHIP	0
Q7000	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2026	1-216-864-11	SHORT CHIP	0
Q7001	8-729-600-22	TRANSISTOR 2SA1235-F		R2027	1-216-864-11	SHORT CHIP	0
Q7002	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2028	1-216-864-11	SHORT CHIP	0
Q7005	8-729-600-22	TRANSISTOR 2SA1235-F		R2029	1-216-864-11	SHORT CHIP	0
Q7007	8-729-029-14	TRANSISTOR DTC144EUA-T106		R2030	1-216-809-11	METAL CHIP	100 5% 1/10W
Q7008	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2035	1-216-809-11	METAL CHIP	100 5% 1/10W
Q7009	8-729-600-22	TRANSISTOR 2SA1235-F		R2037	1-216-817-11	METAL CHIP	470 5% 1/10W
Q7010	8-729-029-14	TRANSISTOR DTC144EUA-T106		R2038	1-216-817-11	METAL CHIP	470 5% 1/10W
Q7011	8-729-029-14	TRANSISTOR DTC144EUA-T106		R2039	1-216-864-11	SHORT CHIP	0
Q7012	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		R6001	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
Q7013	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		R6002	1-216-809-11	METAL CHIP	100 5% 1/10W
Q7014	8-729-600-22	TRANSISTOR 2SA1235-F		R6003	1-216-864-11	SHORT CHIP	0
Q7015	8-729-600-22	TRANSISTOR 2SA1235-F		R6004	1-218-855-11	METAL CHIP	2.2K 0.5% 1/10W
Q7016	8-729-600-22	TRANSISTOR 2SA1235-F		R6007	1-218-887-11	METAL CHIP	47K 0.5% 1/10W
Q7017	8-729-600-22	TRANSISTOR 2SA1235-F		R6008	1-218-879-11	METAL CHIP	22K 0.5% 1/10W
Q7018	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6009	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
Q7019	8-729-029-14	TRANSISTOR DTC144EUA-T106		R6012	1-216-817-11	METAL CHIP	470 5% 1/10W
Q7020	8-729-029-14	TRANSISTOR DTC144EUA-T106		R6013	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
Q7021	8-729-028-96	TRANSISTOR DTC144EUA-T106		R6014	1-218-889-11	METAL CHIP	56K 0.5% 1/10W
Q7602	8-729-600-22	TRANSISTOR 2SA1235-F		R6017	1-216-857-11	METAL CHIP	1M 5% 1/10W
Q7603	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		R6020	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
Q7604	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		R6021	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
Q7605	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6023	1-216-821-11	METAL CHIP	1K 5% 1/10W
Q7606	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		R6025	1-218-857-11	METAL CHIP	2.7K 0.5% 1/10W
Q7607	8-729-141-73	TRANSISTOR 2SC3624A-T1L15L16		R6026	1-216-821-11	METAL CHIP	1K 5% 1/10W
Q7608	8-729-029-14	TRANSISTOR DTC144EUA-T106		R6028	1-218-861-11	METAL CHIP	3.9K 0.5% 1/10W
Q7609	8-729-600-22	TRANSISTOR 2SA1235-F		R6029	1-218-861-11	METAL CHIP	3.9K 0.5% 1/10W
Q7610	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6030	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
Q7611	8-729-029-14	TRANSISTOR DTC144EUA-T106		R6032	1-216-857-11	METAL CHIP	1M 5% 1/10W
Q9001	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6033	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
Q9002	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6034	1-216-864-11	SHORT CHIP	0
< RESISTOR >				R6037	1-216-821-11	METAL CHIP	1K 5% 1/10W
R2002	1-216-821-11	METAL CHIP	1K 5% 1/10W	R6039	1-216-815-11	METAL CHIP	330 5% 1/10W
R2003	1-216-821-11	METAL CHIP	1K 5% 1/10W	R6040	1-216-864-11	SHORT CHIP	0
R2004	1-216-864-11	SHORT CHIP	0	R6051	1-216-857-11	METAL CHIP	1M 5% 1/10W
R2005	1-216-864-11	SHORT CHIP	0	R6052	1-216-809-11	METAL CHIP	100 5% 1/10W
R2006	1-216-809-11	METAL CHIP	100 5% 1/10W	R6940	1-216-864-11	SHORT CHIP	0
R2007	1-216-809-11	METAL CHIP	100 5% 1/10W	R6942	1-216-864-11	SHORT CHIP	0
R2010	1-216-864-11	SHORT CHIP	0	R6943	1-216-864-11	SHORT CHIP	0
R2011	1-216-864-11	SHORT CHIP	0	R6946	1-216-864-11	SHORT CHIP	0
				R6947	1-216-864-11	SHORT CHIP	0

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R6948	1-216-864-11	SHORT CHIP	0			R7112	1-216-864-11	SHORT CHIP	0		
R6962	1-216-864-11	SHORT CHIP	0			R7113	1-218-887-11	METAL CHIP	47K	0.5%	1/10W
R6963	1-216-864-11	SHORT CHIP	0			R7114	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W
R7000	1-216-864-11	SHORT CHIP	0			R7115	1-218-887-11	METAL CHIP	47K	0.5%	1/10W
R7001	1-216-821-11	METAL CHIP	1K	5%	1/10W	R7116	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W
R7004	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7117	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7007	1-216-805-11	METAL CHIP	47	5%	1/10W	R7118	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R7008	1-216-864-11	SHORT CHIP	0			R7119	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R7010	1-216-821-11	METAL CHIP	1K	5%	1/10W	R7120	1-216-864-11	SHORT CHIP	0		
R7011	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7122	1-216-864-11	SHORT CHIP	0		
R7012	1-216-864-11	SHORT CHIP	0			R7124	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R7014	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7125	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R7015	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7126	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R7017	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7127	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R7018	1-216-864-11	SHORT CHIP	0			R7128	1-218-901-11	METAL CHIP	180K	0.5%	1/10W
R7019	1-216-864-11	SHORT CHIP	0			R7129	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R7020	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7130	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R7022	1-216-864-11	SHORT CHIP	0			R7131	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R7025	1-216-864-11	SHORT CHIP	0			R7132	1-218-895-11	METAL CHIP	100K	0.5%	1/10W
R7031	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R7133	1-218-895-11	METAL CHIP	100K	0.5%	1/10W
R7032	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R7134	1-216-296-11	SHORT CHIP	0		
R7033	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R7135	1-216-296-11	SHORT CHIP	0		
R7034	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R7136	1-216-296-11	SHORT CHIP	0		
R7035	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7137	1-216-296-11	SHORT CHIP	0		
R7037	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7138	1-216-800-11	METAL CHIP	18	5%	1/10W
R7039	1-218-873-11	METAL CHIP	12K	0.5%	1/10W	R7139	1-216-800-11	METAL CHIP	18	5%	1/10W
R7040	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R7140	1-216-800-11	METAL CHIP	18	5%	1/10W
R7041	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7141	1-216-800-11	METAL CHIP	18	5%	1/10W
R7045	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7142	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7047	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7143	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7049	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7144	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7050	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R7145	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7054	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7146	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7055	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7147	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7056	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R7152	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7057	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R7153	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7059	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R7154	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7061	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R7155	1-216-864-11	SHORT CHIP	0		
R7062	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W	R7156	1-216-841-11	METAL CHIP	47K	5%	1/10W
R7063	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W	R7158	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7064	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R7501	1-216-864-11	SHORT CHIP	0		
R7066	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R7505	1-216-864-11	SHORT CHIP	0		
R7067	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7600	1-216-864-11	SHORT CHIP	0		
R7087	1-216-857-11	METAL CHIP	1M	5%	1/10W	R7601	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R7088	1-216-837-11	METAL CHIP	22K	5%	1/10W	R7602	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R7093	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7603	1-218-873-11	METAL CHIP	12K	0.5%	1/10W
R7101	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7604	1-218-875-11	METAL CHIP	15K	0.5%	1/10W
R7102	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7605	1-216-841-11	METAL CHIP	47K	5%	1/10W
R7103	1-218-865-11	METAL CHIP	5.6K	0.5%	1/10W	R7606	1-216-841-11	METAL CHIP	47K	5%	1/10W
R7111	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7614	1-216-833-11	METAL CHIP	10K	5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R7615	1-218-873-11	METAL CHIP	12K	0.5%	1/10W	R9010	1-216-821-11	METAL CHIP	1K	5%	1/10W
R7620	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R9011	1-216-815-11	METAL CHIP	330	5%	1/10W
R7621	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R9012	1-216-821-11	METAL CHIP	1K	5%	1/10W
R7622	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R9013	1-216-815-11	METAL CHIP	330	5%	1/10W
R7623	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R9014	1-216-821-11	METAL CHIP	1K	5%	1/10W
R7626	1-216-845-11	METAL CHIP	100K	5%	1/10W	R9015	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7627	1-216-845-11	METAL CHIP	100K	5%	1/10W	R9017	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7628	1-216-844-11	METAL CHIP	82K	5%	1/10W	R9018	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7629	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R9019	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7630	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R9020	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7631	1-216-844-11	METAL CHIP	82K	5%	1/10W	R9021	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7632	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R9023	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7633	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R9024	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7634	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W	R9025	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7635	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W	R9026	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7636	1-216-837-11	METAL CHIP	22K	5%	1/10W	R9027	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7637	1-216-857-11	METAL CHIP	1M	5%	1/10W	R9028	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7639	1-216-845-11	METAL CHIP	100K	5%	1/10W	R9029	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7641	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R9030	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7642	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R9031	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7643	1-216-845-11	METAL CHIP	100K	5%	1/10W	R9032	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7644	1-216-813-11	METAL CHIP	220	5%	1/10W	R9033	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7646	1-216-813-11	METAL CHIP	220	5%	1/10W	R9034	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7650	1-216-841-11	METAL CHIP	47K	5%	1/10W	R9035	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7651	1-216-864-11	SHORT CHIP	0			R9036	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R7652	1-216-864-11	SHORT CHIP	0			R9037	1-216-821-11	METAL CHIP	1K	5%	1/10W
R7653	1-216-864-11	SHORT CHIP	0			R9038	1-216-813-11	METAL CHIP	220	5%	1/10W
R7654	1-216-841-11	METAL CHIP	47K	5%	1/10W	R9039	1-216-864-11	SHORT CHIP	0		
R7655	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R9040	1-216-813-11	METAL CHIP	220	5%	1/10W
R7656	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R9041	1-216-864-11	SHORT CHIP	0		
R7657	1-216-837-11	METAL CHIP	22K	5%	1/10W	R9042	1-216-809-11	METAL CHIP	100	5%	1/10W
R7658	1-216-857-11	METAL CHIP	1M	5%	1/10W	R9044	1-216-809-11	METAL CHIP	100	5%	1/10W
R7659	1-216-833-11	METAL CHIP	10K	5%	1/10W	R9045	1-216-809-11	METAL CHIP	100	5%	1/10W
R7660	1-216-841-11	METAL CHIP	47K	5%	1/10W	R9046	1-216-817-11	METAL CHIP	470	5%	1/10W
R7661	1-216-864-11	SHORT CHIP	0			R9047	1-216-813-11	METAL CHIP	220	5%	1/10W
R7662	1-216-841-11	METAL CHIP	47K	5%	1/10W	R9048	1-216-864-11	SHORT CHIP	0		
R7663	1-216-833-11	METAL CHIP	10K	5%	1/10W	R9049	1-216-813-11	METAL CHIP	220	5%	1/10W
R7676	1-216-864-11	SHORT CHIP	0			R9050	1-216-864-11	SHORT CHIP	0		
R7679	1-216-864-11	SHORT CHIP	0			R9051	1-216-809-11	METAL CHIP	100	5%	1/10W
R7682	1-216-864-11	SHORT CHIP	0			R9053	1-216-809-11	METAL CHIP	100	5%	1/10W
R7683	1-216-864-11	SHORT CHIP	0			R9054	1-216-809-11	METAL CHIP	100	5%	1/10W
R7684	1-216-864-11	SHORT CHIP	0			R9055	1-216-809-11	METAL CHIP	100	5%	1/10W
R7685	1-216-864-11	SHORT CHIP	0			R9056	1-216-817-11	METAL CHIP	470	5%	1/10W
R9001	1-216-864-11	SHORT CHIP	0			R9057	1-216-809-11	METAL CHIP	100	5%	1/10W
R9002	1-216-864-11	SHORT CHIP	0			R9058	1-216-809-11	METAL CHIP	100	5%	1/10W
R9005	1-218-285-11	METAL CHIP	75	5%	1/10W	R9059	1-216-809-11	METAL CHIP	100	5%	1/10W
R9006	1-218-285-11	METAL CHIP	75	5%	1/10W	R9060	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R9007	1-216-815-11	METAL CHIP	330	5%	1/10W	R9061	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R9008	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9062	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9009	1-216-815-11	METAL CHIP	330	5%	1/10W	R9063	1-216-853-11	METAL CHIP	470K	5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R9064	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9144	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9065	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9145	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9066	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9146	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9067	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9147	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9068	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9150	1-216-864-11	SHORT CHIP	0		
						R9151	1-216-864-11	SHORT CHIP	0		
R9069	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9152	1-216-864-11	SHORT CHIP	0		
R9070	1-218-873-11	METAL CHIP	12K	0.5%	1/10W	R9153	1-216-864-11	SHORT CHIP	0		
R9071	1-218-873-11	METAL CHIP	12K	0.5%	1/10W	R9154	1-216-864-11	SHORT CHIP	0		
R9072	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9155	1-216-864-11	SHORT CHIP	0		
R9073	1-216-809-11	METAL CHIP	100	5%	1/10W						
						R9156	1-216-864-11	SHORT CHIP	0		
R9074	1-216-819-11	METAL CHIP	680	5%	1/10W	R9157	1-216-864-11	SHORT CHIP	0		
R9075	1-216-819-11	METAL CHIP	680	5%	1/10W	R9158	1-216-864-11	SHORT CHIP	0		
R9084	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R9501	1-216-864-11	SHORT CHIP	0		
R9086	1-216-864-11	SHORT CHIP	0			R9502	1-216-864-11	SHORT CHIP	0		
R9088	1-216-849-11	METAL CHIP	220K	5%	1/10W						
						R9506	1-216-864-11	SHORT CHIP	0		
R9089	1-216-849-11	METAL CHIP	220K	5%	1/10W	R9541	1-216-864-11	SHORT CHIP	0		
R9095	1-216-864-11	SHORT CHIP	0			< VARISTOR >					
R9096	1-216-864-11	SHORT CHIP	0			VD9013	8-719-977-28	DIODE DTZ10B			
R9104	1-216-864-11	SHORT CHIP	0			VD9014	8-719-977-28	DIODE DTZ10B			
R9105	1-216-864-11	SHORT CHIP	0			VD9015	8-719-977-28	DIODE DTZ10B			
						VD9016	8-719-977-28	DIODE DTZ10B			
R9106	1-216-864-11	SHORT CHIP	0			VD9017	8-719-977-28	DIODE DTZ10B			
R9107	1-216-864-11	SHORT CHIP	0								
R9109	1-218-831-11	METAL CHIP	220	0.5%	1/10W	VD9018	8-719-977-28	DIODE DTZ10B			
R9110	1-218-831-11	METAL CHIP	220	0.5%	1/10W	VD9025	1-802-082-11	VARISTOR (SMD)			
R9111	1-218-831-11	METAL CHIP	220	0.5%	1/10W	VD9026	1-802-082-11	VARISTOR (SMD)			
						< CRYSTAL >					
R9112	1-218-831-11	METAL CHIP	220	0.5%	1/10W	X7000	1-795-612-11	VIBRATOR, CRYSTAL			
R9113	1-218-831-11	METAL CHIP	220	0.5%	1/10W	*A-1192-084-B H46E Board, Complete (KDL-46V2000) *A-1152-233-D H2E Board, Complete (KDL-32/40V2000)					
R9114	1-218-831-11	METAL CHIP	220	0.5%	1/10W						
R9115	1-216-801-11	METAL CHIP	22	5%	1/10W	< CAPACITOR >					
R9116	1-216-801-11	METAL CHIP	22	5%	1/10W	C201	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
						C202	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R9117	1-216-801-11	METAL CHIP	22	5%	1/10W	C203	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
R9122	1-216-821-11	METAL CHIP	1K	5%	1/10W	C204	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
R9123	1-216-821-11	METAL CHIP	1K	5%	1/10W	C205	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%	10V	
R9124	1-216-821-11	METAL CHIP	1K	5%	1/10W						
R9125	1-216-821-11	METAL CHIP	1K	5%	1/10W	C206	1-125-889-91	CERAMIC CHIP 2.2UF	10%	10V	
						C207	1-125-889-91	CERAMIC CHIP 2.2UF	10%	10V	
R9126	1-216-821-11	METAL CHIP	1K	5%	1/10W	C208	1-125-889-91	CERAMIC CHIP 2.2UF	10%	10V	
R9127	1-216-821-11	METAL CHIP	1K	5%	1/10W	C209	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
R9128	1-216-853-11	METAL CHIP	470K	5%	1/10W	C210	1-164-227-11	CERAMIC CHIP 0.022UF	10.00%	25V	
R9129	1-216-853-11	METAL CHIP	470K	5%	1/10W						
R9130	1-216-815-11	METAL CHIP	330	5%	1/10W	C211	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
						C212	1-164-227-11	CERAMIC CHIP 0.022UF	10.00%	25V	
R9131	1-216-815-11	METAL CHIP	330	5%	1/10W	C215	1-115-416-11	CERAMIC CHIP 0.001UF	5.00%	25V	
R9135	1-218-831-11	METAL CHIP	220	0.5%	1/10W						
R9136	1-218-831-11	METAL CHIP	220	0.5%	1/10W						
R9137	1-218-831-11	METAL CHIP	220	0.5%	1/10W						
R9138	1-218-831-11	METAL CHIP	220	0.5%	1/10W						
R9139	1-218-831-11	METAL CHIP	220	0.5%	1/10W						
R9140	1-218-831-11	METAL CHIP	220	0.5%	1/10W						
R9141	1-218-831-11	METAL CHIP	220	0.5%	1/10W						
R9142	1-218-831-11	METAL CHIP	220	0.5%	1/10W						
R9143	1-218-831-11	METAL CHIP	220	0.5%	1/10W						

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< CONNECTOR >							
CN201	1-820-192-11	HEADER ASSEMBLY (PRINT PWB)15P					
< DIODE >							
D201	8-719-083-79	DIODE MM3Z10VT1					
D202	8-719-083-79	DIODE MM3Z10VT1					
D203	8-719-083-79	DIODE MM3Z10VT1					
D204	8-719-083-79	DIODE MM3Z10VT1					
D205	8-719-083-79	DIODE MM3Z10VT1					
D206	8-719-083-79	DIODE MM3Z10VT1					
< SOCKET >							
J201	1-780-368-11	S TERMINAL BLOCK (RIGHT ANGLE)					
J202	1-568-267-11	JACK					
< RESISTOR >							
R202	1-216-864-11	SHORT CHIP	0				
R205	1-216-821-11	METAL CHIP	1K 5% 1/10W				
R206	1-216-821-11	METAL CHIP	1K 5% 1/10W				
R207	1-218-831-11	METAL CHIP	220 0.5% 1/10W				
R208	1-218-831-11	METAL CHIP	220 0.5% 1/10W				
R209	1-218-285-11	METAL CHIP	75 5% 1/10W				
R210	1-218-831-11	METAL CHIP	220 0.5% 1/10W				
R211	1-218-831-11	METAL CHIP	220 0.5% 1/10W				
R212	1-216-797-11	METAL CHIP	10 5% 1/10W				
R213	1-216-821-11	METAL CHIP	1K 5% 1/10W				
R214	1-216-821-11	METAL CHIP	1K 5% 1/10W				
R215	1-216-809-11	METAL CHIP	100 5% 1/10W				
R216	1-216-809-11	METAL CHIP	100 5% 1/10W				
R217	1-216-821-11	METAL CHIP	1K 5% 1/10W				
R218	1-216-821-11	METAL CHIP	1K 5% 1/10W				
R219	1-216-809-11	METAL CHIP	100 5% 1/10W				
R220	1-216-797-11	METAL CHIP	10 5% 1/10W				
R222	1-216-853-11	METAL CHIP	470K 5% 1/10W				
R223	1-216-853-11	METAL CHIP	470K 5% 1/10W				
R224	1-218-831-11	METAL CHIP	220 0.5% 1/10W				
R225	1-218-831-11	METAL CHIP	220 0.5% 1/10W				
< VARISTOR >							
VD201	1-802-082-11	VARISTOR (SMD)					
VD202	1-802-082-11	VARISTOR (SMD)					
VD203	1-802-082-11	VARISTOR (SMD)					

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
MISCELLANEOUS							
	1-826-363-11	LOUDSPEAKER (4.2X15CM) (KDL-32V2000)			1-910-026-80	CONNECTOR ASSY 10P (KDL-32V2000)	
	1-826-362-11	LOUDSPEAKER (5.5X15.5CM) (KDL-40V2000)			1-910-027-06	SP CONNECTOR ASSY (KDL-46V2000)	
	1-826-435-11	LOUDSPEAKER (13X7CM) (KDL-46V2000)			*2-680-539-11	INSTRUCTION MANUAL (ENGLISH) (KDL-32/40/46V2000 UK)	
	1-802-135-11	LCD PANEL (KDL-32V2000)			*2-680-539-21	INSTRUCTION MANUAL (ENGLISH/GERMAN/DUTCH/ PORTUGUESE/NORWEGIAN (KDL-32/40/46V2000 AEP)	
	1-802-134-11	LCD PANEL (KDL-40V2000)					
	1-802-133-12	LCD PANEL (KDL-46V2000)			*2-680-539-31	INSTRUCTION MANUAL (FRENCH/ITALIAN/SPANISH/ FINNISH) (KDL-32/40/46V2000 AEP)	
	8-597-571-00	TUNER UNIT, DIGITAL BTD-HF431Z			*2-680-539-41	INSTRUCTION MANUAL (SWEDISH/DANISH/GREEK/ RUSSIAN/POLISH) (KDL-32/40/46V2000 AEP)	
Δ	1-819-729-13	INLET, AC (WITH NOISE FILTER)		REMOTE COMMANDER			
	1-468-980-12	G1 BOARD, COMPLETE (KDL-32V2000)			1-479-685-21	REMOTE COMMANDER (RM-ED005)	
Δ	1-830-609-11	AC POWER-SUPPLY CORD SET (KDL-32/40/46V2000 UK)					
Δ	1-830-611-11	POWER-SUPPLY CORD (KDL-32/40/46V2000 AEP)					
ACCESSORIES AND CONNECTORS							
	1-500-082-11	CLAMP, SLEEVE FERRITE (KDL-32/40V2000)					
	1-500-753-11	CLAMP FERRITE (KDL-32V2000)					
	1-469-778-11	CLAMP FERRITE (KDL-40V2000)					
	2-650-770-21	SLIDE, CLAMP (KDL-40/46V2000)					
	4-084-562-01	CLAMP, MINI (KDL-40V2000)					
	2-595-155-01	CLAMP					
	1-769-175-21	CABLE, ANTENNA (WITH FILTER)					
	1-832-389-11	HARNESS, CONNECTOR WITH (LVDS)					
	1-910-025-32	CONNECTOR ASSY 6P					
	1-910-025-33	CONNECTOR ASSY 7P					
	1-910-025-34	CONNECTOR ASSY 12P					
	1-910-025-35	CONNECTOR ASSY 30P					
	1-910-025-36	CONNECTOR ASSY 9P					
	1-910-025-37	CONNECTOR ASSY 10P					
	1-910-025-38	CONNECTOR ASSY 1P (KDL-32/40V2000)					
	1-910-025-39	CONNECTOR ASSY (FFC) 20P					
	1-910-025-48	CONNECTOR ASSY 15P (KDL-32V2000)					
	1-910-025-63	FFC CONNECTOR ASSY 49P					
	1-910-025-76	CONNECTOR ASSY 3P (KDL-32V2000)					
	1-910-025-78	CONNECTOR ASSY 14P (KDL-32V2000)					
	1-910-025-79	CONNECTOR ASSY 12P (KDL-32V2000)					
	1-910-025-80	CONNECTOR ASSY 3P (KDL-40V2000)					
	1-910-025-81	CONNECTOR ASSY 10P (KDL-40V2000)					
	1-910-025-82	CONNECTOR ASSY 14P (KDL-40V2000)					
	1-910-025-83	CONNECTOR ASSY 12P (KDL-40V2000)					
	1-910-025-84	CONNECTOR ASSY 3P (KDL-46V2000)					
	1-910-025-85	CONNECTOR ASSY 15P (KDL-40V2000)					
	1-910-025-86	CONNECTOR ASSY 10P (KDL-46V2000)					
	1-910-025-88	CONNECTOR ASSY 14P (KDL-46V2000)					
	1-910-025-89	CONNECTOR ASSY 12P (KDL-46V2000)					
	1-910-025-90	CONNECTOR ASSY 10P (KDL-46V2000)					
	1-910-026-77	CONNECTOR ASSY 15P (KDL-46V2000)					
	1-910-026-78	SP CONNECTOR ASSY (KDL-40V2000)					
	1-910-026-79	SP CONNECTOR ASSY (KDL-32V2000)					

