


SECTION 5 EXPLODED VIEWS

NOTE :

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked “***” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

5-1. CHASSIS

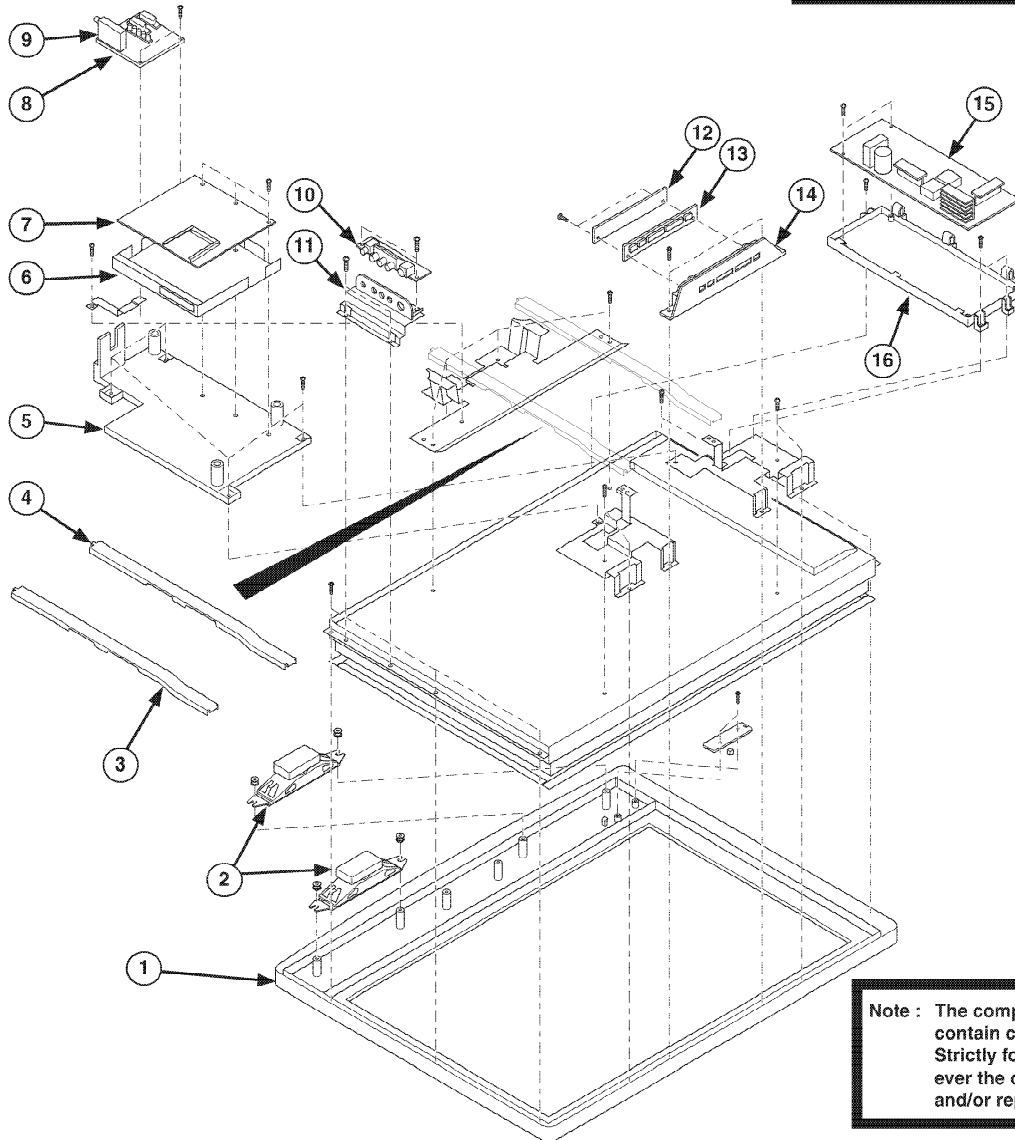


Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

Note : The components identified by mark contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
1	X-2177-507-1	BEZEL ASSY (26) (26P2520UK/AEP)		9	8-597-585-10	TUNER, FSS BTP-HC401	
	X-2177-509-1	BEZEL ASSY (32) (32P2520UK/AEP)		10	*A-1189-409-A	H2 BOARD, COMPLETE (26/32P2520/30UK/AEP)	
	X-2177-005-1	BEZEL ASSY (26) (26P2530UK/AEP)			*A-1202-964-A	H2P BOARD, COMPLETE (40P2530UK/AEP)	
	X-2176-987-1	BEZEL ASSY (32) (32P2530UK/AEP)		11	*2-679-988-01	HOLDER, SIDE JACK (26) (26P2520/30UK/AEP)	
	X-2177-008-1	BEZEL ASSY (40) (40P2530UK/AEP)			*2-674-302-02	HOLDER, SIDE JACK (32) (32P2520/30UK/AEP)	
2	1-826-479-11	LOUDSPEAKER (4.2X15CM) (26/32P2520/30UK/AEP)			*2-679-989-01	HOLDER, SIDE JACK (40) (40P2530UK/AEP)	
	1-826-478-11	LOUDSPEAKER (4.2X24CM) (40P2530UK/AEP)		12	*A-1189-408-A	H1 BOARD, COMPLETE (26/32P2520/30UK/AEP)	
3	*X-2109-059-3	VESA BRACKET (40) R ASSY (40P2530UK/AEP)			*A-1202-963-A	H1P BOARD, COMPLETE (40P2530UK/AEP)	
	*2-674-183-01	VESA BRACKET (26/32P2520/30UK/AEP)		13	2-674-197-01	BUTTON, MULTI	
4	*X-2109-058-3	VESA BRACKET (40) L ASSY (40P2530UK/AEP)		14	2-674-196-02	COVER, BUTTON	
	*2-674-183-01	VESA BRACKET (26/32P2520/30UK/AEP)		15	*A-1237-756-A	G1 BOARD, COMPLETE (26/32P2520/30UK/AEP)	
5	*2-679-993-05	BRACKET (A) DIG			*A-1212-099-A	G2 BOARD, COMPLETE (40P2530UK/AEP)	
6	*2-674-192-02	BRACKET, TERMINAL SIDE		16	*2-674-181-11	BRACKET G1 (26P2520/30UK/AEP)	
7	*A-1242-773-A	BDTR-2 BOARD, COMPLETE			*2-674-181-01	BRACKET G1 (32P2520/30UK/AEP)	
8	*A-1247-112-A	A1 BOARD, COMPLETE (26/32P2520/30UK/AEP)			*2-674-180-01	BRACKET G2 (40P2530UK/AEP)	
	*A-1247-116-A	A1P BOARD, COMPLETE (40P2530UK/AEP)					

5-1. CHASSIS Cont.

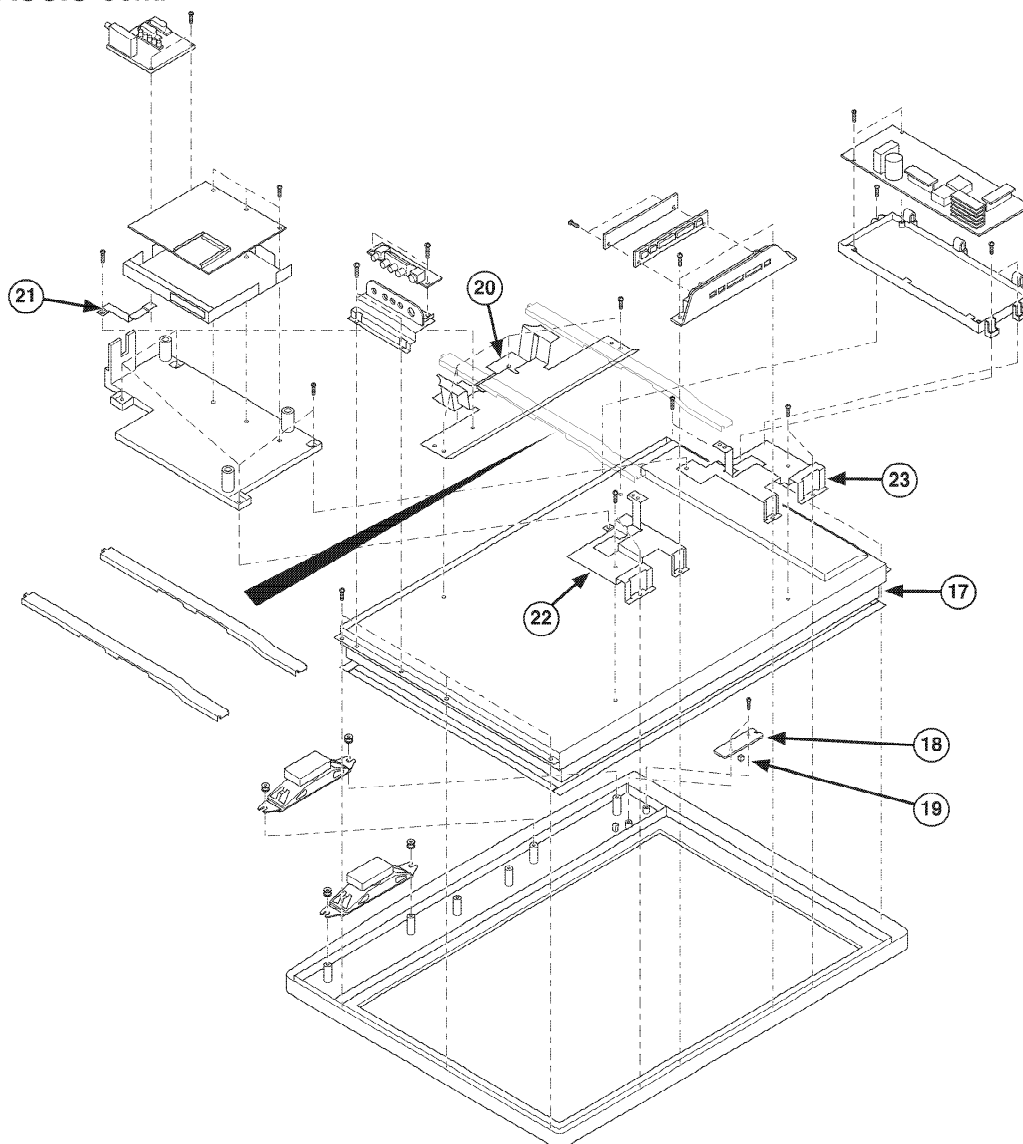


REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
17	1-802-268-11	LCD PANEL (26 WXGA TFT) (26P2520/30UK/AEP)					
	1-802-237-21	LCD PANEL (32 WXGA TFT) (32P2520/30UK/AEP)					
	1-802-386-21	LCD PANEL (40 WXGA TFT) (40P2530UK/AEP)					
18	*A-1247-113-A	H3 BOARD, COMPLETE (26/32P2520/30UK/AEP)					
	*A-1247-117-A	H3P BOARD, COMPLETE (40P2530UK/AEP)					
19	2-674-189-02	GUIDE, LIGHT					
20		NOT SERVICEABLE PART					
21		NOT SERVICEABLE PART					
22		NOT SERVICEABLE PART					
23		NOT SERVICEABLE PART					

Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

5-2. STAND, REAR COVER, POWER LEADS

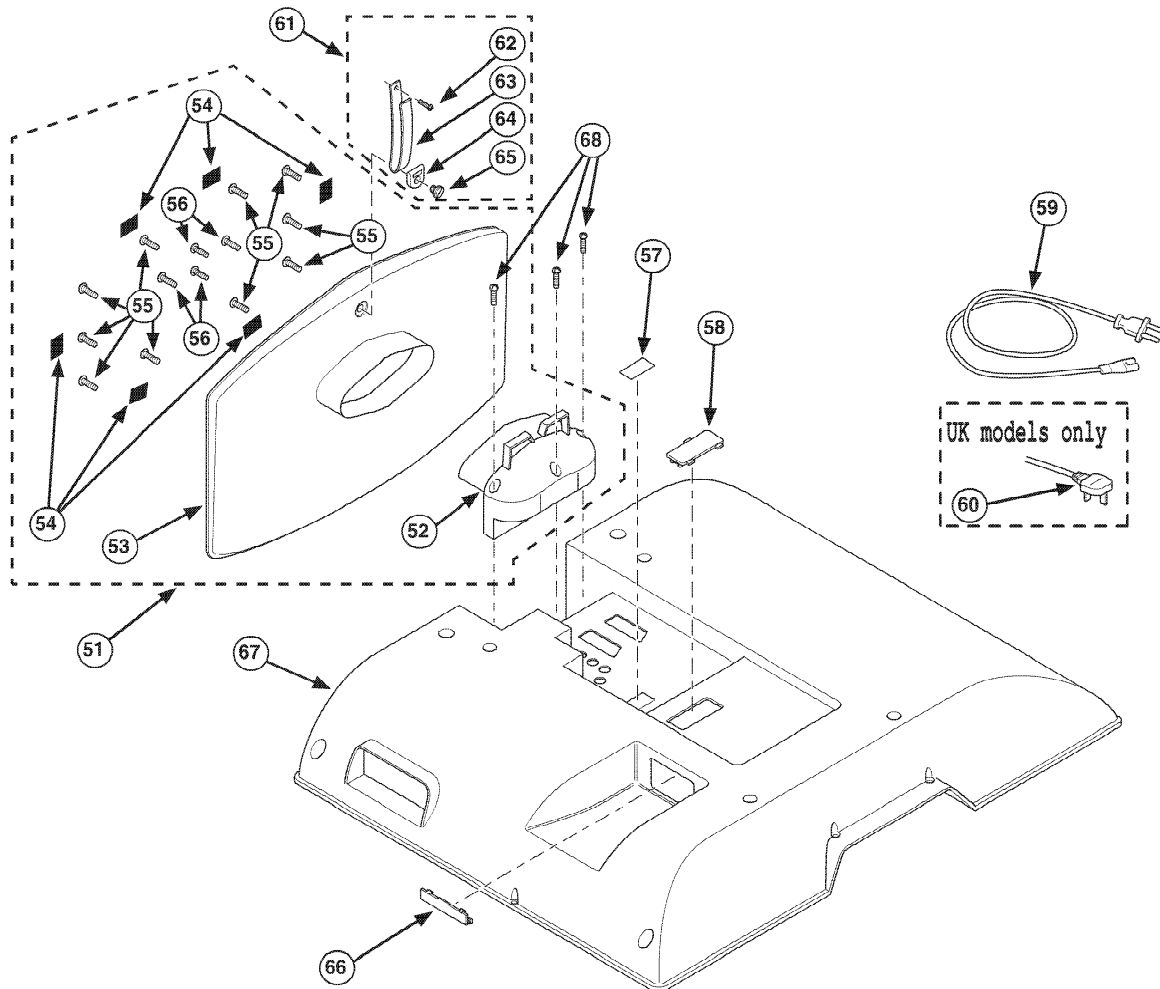

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
51	*X-2148-531-1	STAND (M) ASSY (26P2520UK/AEP)	52-56	58	2-667-973-02	COVER, SERVICE C	
	*X-2148-515-2	STAND (M) ASSY (32P2520UK/AEP)	52-56	59	Δ 1-832-132-11	POWER SUPPLY CORD	
	*X-2177-377-1	STAND (M) ASSY 26 (26P2530UK/AEP)	52-56			(26/32P2520/30/40P2530AEP)	
	*X-2176-991-1	STAND (M) ASSY 32 (32P2530UK/AEP)	52-56	60	Δ 1-832-170-11	POWER SUPPLY CORD (UK PLUG)	
	*X-2177-007-1	STAND (L) ASSY 40 (40P2530UK/AEP)	52-56			(26/32P2520/30/40P2530UK)	
52	*2-674-301-41	NECK, STAND (26) (26P2520/30UK/AEP)		61	*X-2102-511-2	BAG ASSY, RUDDER LOCK	62-65
	*2-674-301-31	NECK, STAND (32) (32P2520/30UK/AEP)		62	*2-580-663-01	SCREW, WOOD 3.8X20	
	*2-674-301-22	NECK, STAND (40) (40P2530UK/AEP)		63	*2-591-689-01	BELT	
53	2-674-194-12	COVER, STAND (M) (26/32P2520UK/AEP)		64	*2-591-688-02	RUDDER LOCK	
	2-674-194-31	COVER, STAND (M) (26/32P2530UK/AEP)		65	*2-593-320-02	SCREW, COIN (M6X18)	
	2-674-314-11	COVER, STAND (L) (40P2530UK/AEP)		66	2-667-975-01	COVER, PCMCIA	
54	4-100-951-02	FOOT, STAND		67	2-674-304-21	COVER, REAR (26) (26P2520/30UK/AEP)	
55	2-580-644-01	SCREW, KTP2 3X8 (26/32P2520/30UK/AEP)			2-674-191-41	COVER, REAR (32) (32P2520/30UK/AEP)	
	2-580-647-01	SCREW, KTP2 4X12 (40P2530UK/AEP)			2-674-312-11	COVER, REAR (40) (40P2530UK/AEP)	
56	2-580-640-01	SCREW, +BVTP2 4X16		68	2-580-608-01	SCREW, +PSW M5X16 (26/30P2520/30UK/AEP)	
57	2-021-173-12	COVER, ECS (20)			2-580-609-01	SCREW, +PSW M5X25 (40P2530UK/AEP)	

SECTION 6 ELECTRICAL PARTS LIST

PARTS LISTING TABLE OF CONTENTS

	Page
A1/A1P BOARD COMPLETE Parts List :	62
H2/H2P BOARD COMPLETE Parts List :	65
H3/H3P BOARD COMPLETE Parts List :	66
G2 BOARD COMPLETE Parts List : KDL-40P2530 only.....	66
H1/H1P BOARD COMPLETE Parts List :	70
BDTR-2 BOARD COMPLETE Parts List :	70
G1 BOARD COMPLETE Parts List : KDL-26P2520/30 & KDL-32P2520/30 only.....	81
MISCELLANEOUS :	85
ACCESSORIES AND CONNECTORS :	85
REMOTE COMMANDER :	85

Note: The BDTR-2 Board is regarded as a non service item for exchange only if there is a fault with either IC3006 or IC5630.

Note : Items marked “**” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
Parts indicated (XX) on the Schematic Diagram are not used in this model and therefore do not appear in the Parts List.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
*A-1247-112-A A1 Board Complete				C2055	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
(KDL-26/32P2520/KDL-26/32P2530)				C2056	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
*A-1247-116-A A1P Board Complete (KDL-40P2530)				C2057	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
	*2-586-040-02	SHIELD CASE, IFOB (MAIN)		C2058	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
	*2-586-041-01	SHIELD CASE, IFOB (TOP)		C2059	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
< CAPACITOR >				C2060	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C1000	1-126-947-11	ELECT 47UF	20.00% 35V	C2065	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C1001	1-164-156-11	CERAMIC CHIP 0.1UF	25V	C2066	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1100	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C2067	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C1102	1-162-925-11	CERAMIC CHIP 68PF	5.00% 50V	C2068	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1103	1-162-925-11	CERAMIC CHIP 68PF	5.00% 50V	C2069	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C1104	1-164-156-11	CERAMIC CHIP 0.1UF	25V	C2070	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C1105	1-126-968-11	ELECT 100UF	20.00% 50V	C2071	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C1106	1-126-916-11	ELECT 1000UF	20.00% 6.3V	C2072	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C1107	1-165-621-91	CERAMIC CHIP 0.1UF	50V	C2073	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C1108	1-164-156-11	CERAMIC CHIP 0.1UF	25V	C2074	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C1200	1-164-156-11	CERAMIC CHIP 0.1UF	25V	C2079	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1202	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C2080	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1203	1-104-662-91	ELECT 22UF	20.00% 25V	C2081	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C1204	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C2084	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C1205	1-164-392-11	CERAMIC CHIP 390PF	5.00% 50V	C2085	1-117-370-11	CERAMIC CHIP 10UF	10V
C1206	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C2086	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C1207	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C2087	1-117-370-11	CERAMIC CHIP 10UF	10V
C1208	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	< CONNECTOR >			
C1209	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V	CN2021	*1-417-602-11	SOCKET 21PIN	
C1210	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V	CN2022	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P	
C1211	1-131-664-91	CERAMIC CHIP 0.15UF	10% 10V	CN2023	*1-417-602-11	SOCKET 21PIN	
C1213	1-165-176-11	CERAMIC CHIP 0.047UF	10.00% 16V	CN2024	1-820-255-51	FFC/FPC CONNECTOR (ZIF) 20P	
C1216	1-162-919-11	CERAMIC CHIP 22PF	5.00% 50V	< DIODE >			
C1218	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D1100	8-719-069-55	DIODE UDZSTE-175.6B	
C1219	1-162-926-11	CERAMIC CHIP 82PF	5.00% 50V	D1101	8-719-083-87	DIODE UDZS-TE17-33B	
C1220	1-162-928-11	CERAMIC CHIP 120PF	5.00% 50V	D1102	8-719-069-55	DIODE UDZSTE-175.6B	
C1221	1-164-388-91	CERAMIC CHIP 270PF	5.00% 50V	D1200	8-719-050-38	DIODE M1MA152WK-T1	
C1222	1-162-915-11	CERAMIC CHIP 10PF	0.50PF 50V	D2021	8-719-083-82	DIODE UDZS-TE17-12B	
C1223	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D2022	8-719-083-82	DIODE UDZS-TE17-12B	
C1226	1-162-961-11	CERAMIC CHIP 330PF	10.00% 50V	D2023	8-719-083-82	DIODE UDZS-TE17-12B	
C1227	1-126-933-11	ELECT 100UF	20.00% 16V	D2024	8-719-083-82	DIODE UDZS-TE17-12B	
C2000	1-126-933-11	ELECT 100UF	20.00% 16V	D2025	8-719-083-63	DIODE UDZSTE-1713B	
C2025	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D2026	8-719-069-60	DIODE UDZSTE-179.1B	
C2026	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D2027	8-719-069-60	DIODE UDZSTE-179.1B	
C2027	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D2028	8-719-069-60	DIODE UDZSTE-179.1B	
C2028	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D2029	8-719-069-55	DIODE UDZSTE-175.6B	
C2043	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	D2030	8-719-069-60	DIODE UDZSTE-179.1B	
C2044	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	D2031	8-719-069-60	DIODE UDZSTE-179.1B	
C2048	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	D2037	8-719-069-60	DIODE UDZSTE-179.1B	
C2049	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	D2038	8-719-069-60	DIODE UDZSTE-179.1B	
C2053	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	D2039	8-719-069-60	DIODE UDZSTE-179.1B	
C2054	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	D2040	8-719-069-60	DIODE UDZSTE-179.1B	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D2041	8-719-069-60	DIODE UDZSTE-179.1B		L1104	1-414-934-21	INDUCTOR	10UH
D2042	8-719-069-60	DIODE UDZSTE-179.1B		L1105	1-414-580-21	INDUCTOR	100NH
D2043	8-719-069-60	DIODE UDZSTE-179.1B		L1107	1-414-934-21	INDUCTOR	10UH
D2044	8-719-069-60	DIODE UDZSTE-179.1B		L1200	1-414-934-21	INDUCTOR	10UH
D2045	8-719-083-63	DIODE UDZSTE-1713B		L1201	1-410-993-42	INDUCTOR	1UH
D2046	8-719-069-60	DIODE UDZSTE-179.1B		L1223	1-410-509-11	INDUCTOR	10UH
D2047	8-719-069-60	DIODE UDZSTE-179.1B		L2000	1-414-934-21	INDUCTOR	10UH
D2048	8-719-069-60	DIODE UDZSTE-179.1B		< TRANSISTOR >			
D2049	8-719-069-55	DIODE UDZSTE-175.6B		Q1200	8-729-010-29	TRANSISTOR MSD601-RST1	
D2050	8-719-069-60	DIODE UDZSTE-179.1B		Q1201	8-729-421-19	TRANSISTOR UN2213	
D2052	8-719-083-63	DIODE UDZSTE-1713B		Q1202	8-729-421-19	TRANSISTOR UN2213	
D2058	8-719-069-60	DIODE UDZSTE-179.1B		Q1203	8-729-422-33	TRANSISTOR 2SD601A-Q-TX	
D2059	8-719-069-60	DIODE UDZSTE-179.1B		Q1204	8-729-421-19	TRANSISTOR UN2213	
D2061	8-719-069-60	DIODE UDZSTE-179.1B		Q1205	8-729-010-05	TRANSISTOR MSB709-RT1	
D2062	8-719-069-60	DIODE UDZSTE-179.1B		Q2000	8-729-010-29	TRANSISTOR MSD601-RST1	
D2063	8-719-069-60	DIODE UDZSTE-179.1B		Q2001	8-729-010-29	TRANSISTOR MSD601-RST1	
D2064	8-719-069-60	DIODE UDZSTE-179.1B		Q2002	8-729-010-05	TRANSISTOR MSB709-RT1	
D2065	8-719-069-55	DIODE UDZSTE-175.6B		Q2003	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D2066	8-719-069-55	DIODE UDZSTE-175.6B		Q2004	8-729-010-05	TRANSISTOR MSB709-RT1	
D2067	8-719-069-55	DIODE UDZSTE-175.6B		Q2005	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D2068	8-719-069-60	DIODE UDZSTE-179.1B		< RESISTOR >			
D2069	8-719-069-55	DIODE UDZSTE-175.6B		R1001	1-216-809-11	METAL CHIP	100 5% 1/10W
D2070	8-719-069-55	DIODE UDZSTE-175.6B		R1002	1-216-809-11	METAL CHIP	100 5% 1/10W
D2071	8-719-069-55	DIODE UDZSTE-175.6B		R1003	1-216-864-11	SHORT CHIP	0
< EARTH TERMINAL >				R1004	1-216-864-11	SHORT CHIP	0
ET6501	1-780-336-11	EARTH TERMINAL		R1006	1-216-864-11	SHORT CHIP	0
ET6502	1-780-336-11	EARTH TERMINAL		R1007	1-216-864-11	SHORT CHIP	0
< FERRITE BEAD >				R1008	1-216-864-11	SHORT CHIP	0
FB1100	1-469-185-11	FERRITE	0UH	R1009	1-216-864-11	SHORT CHIP	0
FB1101	1-469-185-11	FERRITE	0UH	R1010	1-216-864-11	SHORT CHIP	0
< IC >				R1101	1-216-049-11	RES-CHIP	1K 5% 1/10W
IC1000	6-704-465-01	IC MC74LVX8053DTR2		R1201	1-216-835-11	METAL CHIP	15K 5% 1/10W
IC1200	6-704-747-01	IC TDA9886TS/V4,118		R1202	1-216-821-11	METAL CHIP	1K 5% 1/10W
IC2000	8-759-385-76	IC MC14052 BDR2		R1203	1-216-837-11	METAL CHIP	22K 5% 1/10W
< SOCKET >				R1204	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
J2021	1-819-327-11	PHONO JACK 2P		R1206	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
J2022	1-819-327-11	PHONO JACK 2P		R1207	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
J2023	1-820-021-11	JACK		R1208	1-216-864-11	SHORT CHIP	0
J2024	1-819-354-11	PHONO JACK 5P		R1210	1-216-817-11	METAL CHIP	470 5% 1/10W
< COIL >				R1212	1-216-830-11	METAL CHIP	5.6K 5% 1/10W
L1000	1-414-934-21	INDUCTOR	10UH	R1213	1-216-811-11	METAL CHIP	150 5% 1/10W
L1100	1-412-987-31	INDUCTOR	4.7UH	R1214	1-216-827-11	METAL CHIP	3.3K 5% 1/10W
L1101	1-412-987-31	INDUCTOR	4.7UH	R1215	1-216-817-11	METAL CHIP	470 5% 1/10W
L1102	1-414-580-21	INDUCTOR	100NH	R1216	1-216-834-11	METAL CHIP	12K 5% 1/10W
L1103	1-414-580-21	INDUCTOR	100NH	R1217	1-216-864-11	SHORT CHIP	0
				R1218	1-216-809-11	METAL CHIP	100 5% 1/10W
				R1219	1-216-864-11	SHORT CHIP	0

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R1220	1-216-809-11	METAL CHIP	100	5%	1/10W	R2025	1-216-049-11	RES-CHIP	1K	5%	1/10W
R1221	1-216-845-11	METAL CHIP	100K	5%	1/10W	R2026	1-216-022-00	RES-CHIP	75	5%	1/10W
R1222	1-216-813-11	METAL CHIP	220	5%	1/10W	R2028	1-216-022-00	RES-CHIP	75	5%	1/10W
R1223	1-216-824-11	METAL CHIP	1.8K	5%	1/10W	R2029	1-216-022-00	RES-CHIP	75	5%	1/10W
R1224	1-216-809-11	METAL CHIP	100	5%	1/10W	R2030	1-216-022-00	RES-CHIP	75	5%	1/10W
R1225	1-216-864-11	SHORT CHIP	0			R2031	1-216-022-00	RES-CHIP	75	5%	1/10W
R1226	1-216-819-11	METAL CHIP	680	5%	1/10W	R2032	1-216-815-11	METAL CHIP	330	5%	1/10W
R1228	1-216-864-11	SHORT CHIP	0			R2033	1-216-815-11	METAL CHIP	330	5%	1/10W
R1229	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R2034	1-216-813-11	METAL CHIP	220	5%	1/10W
R1230	1-216-822-11	METAL CHIP	1.2K	5%	1/10W	R2035	1-216-864-11	SHORT CHIP	0		
R1232	1-216-807-11	METAL CHIP	68	5%	1/10W	R2036	1-216-813-11	METAL CHIP	220	5%	1/10W
R1233	1-216-807-11	METAL CHIP	68	5%	1/10W	R2037	1-216-864-11	SHORT CHIP	0		
R1234	1-216-814-11	METAL CHIP	270	5%	1/10W	R2038	1-216-864-11	SHORT CHIP	0		
R1235	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R2039	1-216-864-11	SHORT CHIP	0		
R1237	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2040	1-216-864-11	SHORT CHIP	0		
R1238	1-216-864-11	SHORT CHIP	0			R2041	1-216-864-11	SHORT CHIP	0		
R1239	1-216-812-11	METAL CHIP	180	5%	1/10W	R2042	1-216-864-11	SHORT CHIP	0		
R1240	1-216-801-11	METAL CHIP	22	5%	1/10W	R2043	1-216-864-11	SHORT CHIP	0		
R1241	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2044	1-216-864-11	SHORT CHIP	0		
R1301	1-216-864-11	SHORT CHIP	0			R2045	1-216-864-11	SHORT CHIP	0		
R1302	1-216-864-11	SHORT CHIP	0			R2046	1-216-864-11	SHORT CHIP	0		
R1305	1-216-864-11	SHORT CHIP	0			R2047	1-216-864-11	SHORT CHIP	0		
R1306	1-216-864-11	SHORT CHIP	0			R2048	1-216-864-11	SHORT CHIP	0		
R1307	1-216-864-11	SHORT CHIP	0			R2049	1-216-864-11	SHORT CHIP	0		
R1308	1-216-864-11	SHORT CHIP	0			R2050	1-216-864-11	SHORT CHIP	0		
R2000	1-216-809-11	METAL CHIP	100	5%	1/10W	R2051	1-216-864-11	SHORT CHIP	0		
R2001	1-216-809-11	METAL CHIP	100	5%	1/10W	R2052	1-216-864-11	SHORT CHIP	0		
R2002	1-216-809-11	METAL CHIP	100	5%	1/10W	R2053	1-216-864-11	SHORT CHIP	0		
R2003	1-216-809-11	METAL CHIP	100	5%	1/10W	R2054	1-216-864-11	SHORT CHIP	0		
R2004	1-216-864-11	SHORT CHIP	0			R2055	1-216-864-11	SHORT CHIP	0		
R2005	1-216-864-11	SHORT CHIP	0			R2056	1-216-864-11	SHORT CHIP	0		
R2006	1-216-809-11	METAL CHIP	100	5%	1/10W	R2057	1-216-864-11	SHORT CHIP	0		
R2007	1-216-864-11	SHORT CHIP	0			R2058	1-216-864-11	SHORT CHIP	0		
R2008	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R2059	1-216-864-11	SHORT CHIP	0		
R2009	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R2060	1-216-864-11	SHORT CHIP	0		
R2010	1-216-809-11	METAL CHIP	100	5%	1/10W	R2061	1-216-864-11	SHORT CHIP	0		
R2011	1-216-809-11	METAL CHIP	100	5%	1/10W	R2062	1-216-864-11	SHORT CHIP	0		
R2012	1-216-809-11	METAL CHIP	100	5%	1/10W	R2063	1-216-853-11	METAL CHIP	470K	5%	1/10W
R2013	1-216-809-11	METAL CHIP	100	5%	1/10W	R2064	1-216-853-11	METAL CHIP	470K	5%	1/10W
R2014	1-216-809-11	METAL CHIP	100	5%	1/10W	R2065	1-216-853-11	METAL CHIP	470K	5%	1/10W
R2015	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2066	1-216-853-11	METAL CHIP	470K	5%	1/10W
R2016	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2067	1-216-025-11	RES-CHIP	100	5%	1/10W
R2017	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2068	1-216-033-00	RES-CHIP	220	5%	1/10W
R2018	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2069	1-216-025-11	RES-CHIP	100	5%	1/10W
R2019	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2070	1-216-025-11	RES-CHIP	100	5%	1/10W
R2020	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2071	1-216-025-11	RES-CHIP	100	5%	1/10W
R2021	1-216-295-91	SHORT CHIP	0			R2072	1-216-022-00	RES-CHIP	75	5%	1/10W
R2022	1-216-815-11	METAL CHIP	330	5%	1/10W	R2073	1-216-025-11	RES-CHIP	100	5%	1/10W
R2023	1-216-049-11	RES-CHIP	1K	5%	1/10W	R2074	1-216-049-11	RES-CHIP	1K	5%	1/10W
R2024	1-216-815-11	METAL CHIP	330	5%	1/10W	R2075	1-216-049-11	RES-CHIP	1K	5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R2076	1-216-853-11	METAL CHIP	470K	5%	1/10W	R2127	1-216-049-11	RES-CHIP	1K	5%	1/10W
R2077	1-216-853-11	METAL CHIP	470K	5%	1/10W	R2129	1-216-864-11	SHORT CHIP	0		
R2078	1-216-864-11	SHORT CHIP	0			R2132	1-216-864-11	SHORT CHIP	0		
R2079	1-216-864-11	SHORT CHIP	0			R2134	1-216-840-11	METAL CHIP	39K	5%	1/10W
R2080	1-216-864-11	SHORT CHIP	0			R2135	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2081	1-216-864-11	SHORT CHIP	0			R2136	1-216-811-11	METAL CHIP	150	5%	1/10W
R2082	1-216-295-91	SHORT CHIP	0			R2137	1-216-817-11	METAL CHIP	470	5%	1/10W
R2083	1-216-853-11	METAL CHIP	470K	5%	1/10W	R2138	1-216-811-11	METAL CHIP	150	5%	1/10W
R2084	1-216-853-11	METAL CHIP	470K	5%	1/10W	R2139	1-216-811-11	METAL CHIP	150	5%	1/10W
R2085	1-216-049-11	RES-CHIP	1K	5%	1/10W	R2140	1-216-817-11	METAL CHIP	470	5%	1/10W
R2086	1-216-049-11	RES-CHIP	1K	5%	1/10W	R2141	1-216-811-11	METAL CHIP	150	5%	1/10W
R2087	1-216-022-00	RES-CHIP	75	5%	1/10W	R2142	1-216-840-11	METAL CHIP	39K	5%	1/10W
R2088	1-216-022-00	RES-CHIP	75	5%	1/10W	R2143	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2089	1-216-022-00	RES-CHIP	75	5%	1/10W	R2145	1-216-864-11	SHORT CHIP	0		
R2090	1-216-022-00	RES-CHIP	75	5%	1/10W	R2147	1-216-864-11	SHORT CHIP	0		
R2091	1-216-022-00	RES-CHIP	75	5%	1/10W	< FILTER >					
R2092	1-216-815-11	METAL CHIP	330	5%	1/10W	SW1200	1-795-617-11	SAW FILTER			
R2093	1-216-049-11	RES-CHIP	1K	5%	1/10W	SW1201	1-767-083-11	FILTER, SURFACE WAVE			
R2094	1-216-815-11	METAL CHIP	330	5%	1/10W	< TUNER >					
R2095	1-216-049-11	RES-CHIP	1K	5%	1/10W	TU1300	8-597-585-00	TUNER, FSS BTP-HC401			
R2097	1-216-864-11	SHORT CHIP	0			< CRYSTAL >					
R2098	1-216-864-11	SHORT CHIP	0			X1200	1-767-704-11	VIBRATOR, CRYSTAL			
R2099	1-216-864-11	SHORT CHIP	0			*A-1189-409-A H2 Board, Complete (KDL-26/32P2520/KDL-26/32P2530) *A-1202-964-A H2P Board, Complete (KDL-40P2530)					
R2100	1-216-864-11	SHORT CHIP	0			< CAPACITOR >					
R2101	1-216-853-11	METAL CHIP	470K	5%	1/10W	C2902	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2102	1-216-853-11	METAL CHIP	470K	5%	1/10W	C2903	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2103	1-216-853-11	METAL CHIP	470K	5%	1/10W	C2904	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2104	1-216-853-11	METAL CHIP	470K	5%	1/10W	C2905	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2105	1-216-025-11	RES-CHIP	100	5%	1/10W	C2930	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2106	1-216-033-00	RES-CHIP	220	5%	1/10W	C2931	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2107	1-216-025-11	RES-CHIP	100	5%	1/10W	C9041	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%	10V	
R2108	1-216-025-11	RES-CHIP	100	5%	1/10W	C9049	1-164-505-11	CERAMIC CHIP 2.2UF		16V	
R2109	1-216-025-11	RES-CHIP	100	5%	1/10W	C9050	1-164-505-11	CERAMIC CHIP 2.2UF		16V	
R2110	1-216-022-00	RES-CHIP	75	5%	1/10W	C9077	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2111	1-216-025-11	RES-CHIP	100	5%	1/10W	C9078	1-165-908-11	CERAMIC CHIP 1UF	10%	10V	
R2112	1-216-809-11	METAL CHIP	100	5%	1/10W	C9079	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R2113	1-216-809-11	METAL CHIP	100	5%	1/10W	C9080	1-165-908-11	CERAMIC CHIP 1UF	10%	10V	
R2114	1-216-809-11	METAL CHIP	100	5%	1/10W	C9081	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
R2115	1-216-853-11	METAL CHIP	470K	5%	1/10W	C9082	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
R2116	1-216-853-11	METAL CHIP	470K	5%	1/10W	< CONNECTOR >					
R2117	1-216-864-11	SHORT CHIP	0			CN9855	*1-819-335-11	HEADER ASSEMBLY FOR PWB, 9P			
R2118	1-216-864-11	SHORT CHIP	0			CN9856	1-779-993-11	PIN, CONNECTOR (PWB) 5P			
R2119	1-216-029-00	RES-CHIP	150	5%	1/10W						
R2120	1-216-029-00	RES-CHIP	150	5%	1/10W						
R2121	1-216-029-00	RES-CHIP	150	5%	1/10W						
R2122	1-216-025-11	RES-CHIP	100	5%	1/10W						
R2123	1-216-049-11	RES-CHIP	1K	5%	1/10W						
R2124	1-216-029-00	RES-CHIP	150	5%	1/10W						
R2125	1-216-029-00	RES-CHIP	150	5%	1/10W						
R2126	1-216-029-00	RES-CHIP	150	5%	1/10W						

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

H2/H2P

H3/H3P

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK
CN9857	*1-764-250-11	PIN, CONNECTOR (PC BOARD) 4P	
< DIODE >			
D9036	8-719-977-28	DIODE DTZ10B	
D9038	8-719-977-28	DIODE DTZ10B	
D9058	8-719-069-60	DIODE UDZSTE-179.1B	
D9059	8-719-069-60	DIODE UDZSTE-179.1B	
< SOCKET >			
J2901	1-750-264-31	JACK	
J9006	1-794-442-21	TERMINAL BLOCK (LIGHT ANGLE), S	
< RESISTOR >			
R2901	1-220-259-11	METAL CHIP 150 5% 1/4W	
R2902	1-220-259-11	METAL CHIP 150 5% 1/4W	
R2903	1-220-259-11	METAL CHIP 150 5% 1/4W	
R2904	1-220-259-11	METAL CHIP 150 5% 1/4W	
R9104	1-218-285-11	METAL CHIP 75 5% 1/10W	
R9105	1-216-811-11	METAL CHIP 150 5% 1/10W	
R9109	1-216-811-11	METAL CHIP 150 5% 1/10W	
R9113	1-216-809-11	METAL CHIP 100 5% 1/10W	
R9116	1-216-864-11	SHORT CHIP 0	
R9136	1-216-853-11	METAL CHIP 470K 5% 1/10W	
R9137	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R9138	1-216-853-11	METAL CHIP 470K 5% 1/10W	
R9139	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R9142	1-216-864-11	SHORT CHIP 0	
R9853	1-216-864-11	SHORT CHIP 0	
R9854	1-216-864-11	SHORT CHIP 0	
< VARISTOR >			
VD9023	1-803-974-21	VARISTOR, CHIP (1608)	
VD9024	1-803-974-21	VARISTOR, CHIP (1608)	
*A-1247-113-A H3 Board Complete (KDL-26/32P2520/KDL-26/32P2530) *A-1247-117-A H3P Board Complete (KDL-40P2530)			
< CAPACITOR >			
C9301	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	
C9302	1-119-667-11	CERAMIC CHIP 22UF 10V	
< CONNECTOR >			
CN9300	1-770-627-21	PIN, CONNECTOR 10P	
< DIODE >			
D9302	8-719-085-26	DIODE CL-165HR/SYG-D-T	
D9309	8-719-036-94	DIODE RD5.6SB-T1	
D9312	6-500-817-01	DIODE (LED) SML-512UWT86	
D9313	8-719-078-21	DIODE SML-310PTT86	

REF.NO.	PART.NO	DESCRIPTION	REMARK
< IC >			
IC9300	6-600-606-01	IC RPM7540-H8	
< TRANSISTOR >			
Q9300	8-729-907-00	TRANSISTOR DTC114EU	
Q9301	8-729-907-00	TRANSISTOR DTC114EU	
Q9302	8-729-907-00	TRANSISTOR DTC114EU	
Q9303	8-729-907-00	TRANSISTOR DTC114EU	
< RESISTOR >			
R9300	1-216-820-11	METAL CHIP 820 5% 1/10W	
R9301	1-216-819-11	METAL CHIP 680 5% 1/10W	
R9306	1-216-817-11	METAL CHIP 470 5% 1/10W	
R9307	1-216-805-11	METAL CHIP 47 5% 1/10W	
R9309	1-216-818-11	METAL CHIP 560 5% 1/10W	
R9310	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
R9311	1-216-818-11	METAL CHIP 560 5% 1/10W	
*A-1212-099-A G2 Board Complete (KDL-40P2530 Only)			
	4-382-854-11	SCREW (M3X10), P, SW (+)	
< CAPACITOR >			
C6002	Δ 1-119-892-51	CERAMIC 470PF 10.00% 250V	
C6003	Δ 1-161-964-91	CERAMIC 0.0047UF 250V	
C6004	Δ 1-113-924-11	CERAMIC 0.0047UF 20.00% 250V	
C6005	Δ 1-119-892-51	CERAMIC 470PF 10.00% 250V	
C6007	Δ 1-165-529-11	MYLAR 0.22UF 10 275V	
C6009	Δ 1-165-531-11	MYLAR 1UF 10 275V	
C6010	Δ 1-161-964-91	CERAMIC 0.0047UF 250V	
C6011	Δ 1-119-892-51	CERAMIC 470PF 10.00% 250V	
C6013	Δ 1-119-892-51	CERAMIC 470PF 10.00% 250V	
C6014	Δ 1-113-924-11	CERAMIC 0.0047UF 20.00% 250V	
C6016	1-162-969-11	CERAMIC CHIP 0.0068UF 10.00% 25V	
C6017	1-117-227-11	MYLAR 1UF 10.00% 450V	
C6018	1-117-227-11	MYLAR 1UF 10.00% 450V	
C6020	1-100-613-81	CERAMIC 470PF 5% 1KV	
C6021	1-100-613-81	CERAMIC 470PF 5% 1KV	
C6024	1-107-823-11	CERAMIC CHIP 0.47UF 10.00% 16V	
C6026	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	
C6027	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	
C6031	1-107-882-91	ELECT 100UF 20% 16V	
C6032	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	
C6035	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	
C6036	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	
C6038	1-107-906-11	ELECT 10UF 20% 50V	
C6039	1-135-361-11	ELECT (BLOCK) 180UF 20% 450V	
C6040	1-135-361-11	ELECT (BLOCK) 180UF 20% 450V	
C6041	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C6042	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V	< CONNECTOR >			
C6043	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN6001	Δ *1-691-960-11	PIN, CONNECTOR (PC BOARD) 3P	
C6044	1-107-905-11	ELECT 4.7UF	20% 50V	CN6003	*1-785-703-21	PIN, CONNECTOR (PC BOARD) 6P	
C6045	1-107-910-11	ELECT 100UF	20% 50V	CN6004	*1-785-706-11	PIN, CONNECTOR (PC BOARD) 10P	
C6046	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN6005	*1-793-235-11	PIN, CONNECTOR (PC BOARD) 13P	
C6047	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	CN6300	*1-564-507-11	PLUG, CONNECTOR 4P	
C6049	1-107-906-11	ELECT 10UF	20% 50V	< DIODE >			
C6051	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6000	8-719-081-97	DIODE MMDL914T1	
C6052	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V	D6001	8-719-081-97	DIODE MMDL914T1	
C6053	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6002	8-719-081-97	DIODE MMDL914T1	
C6054	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V	D6003	8-719-054-89	DIODE D15XB60	
C6055	1-107-888-11	ELECT 47UF	20% 25V	D6005	8-719-081-97	DIODE MMDL914T1	
C6056	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V	D6006	8-719-976-99	DIODE DTZ5.1B	
C6059	1-100-613-81	CERAMIC 470PF	5% 1KV	D6007	8-719-081-97	DIODE MMDL914T1	
C6060	1-100-310-11	FILM 18000PF	3% 800V	D6008	8-719-081-97	DIODE MMDL914T1	
C6061	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V	D6011	6-501-043-01	DIODE UMZ16NT106	
C6062	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6012	8-719-054-59	DIODE FSF05A60	
C6064	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D6013	6-500-137-01	DIODE BAT54HT1	
C6066	1-128-959-31	ELECT 1000UF	20% 35V	D6014	6-501-043-01	DIODE UMZ16NT106	
C6067	1-112-242-21	ELECT 1500UF	20% 25V	D6015	8-719-081-97	DIODE MMDL914T1	
C6068	1-107-928-11	ELECT 4.7UF	20% 100V	D6017	6-500-108-01	DIODE EP05FA20	
C6069	1-112-242-21	ELECT 1500UF	20% 25V	D6018	6-500-108-01	DIODE EP05FA20	
C6070	1-112-229-21	ELECT 1500UF	20% 16V	D6019	8-719-081-97	DIODE MMDL914T1	
C6071	1-112-242-21	ELECT 1500UF	20% 25V	D6020	8-719-081-97	DIODE MMDL914T1	
C6073	1-107-907-11	ELECT 22UF	20% 50V	D6021	8-719-081-97	DIODE MMDL914T1	
C6080	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V	D6022	8-719-081-97	DIODE MMDL914T1	
C6200	1-107-974-11	CERAMIC 47PF	5.00% 2KV	D6023	8-719-041-97	DIODE MA113-(TX)	
C6201	1-107-903-11	ELECT 2.2UF	20% 50V	D6027	8-719-081-97	DIODE MMDL914T1	
C6202	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6028	8-719-979-64	DIODE UF4005/23	
C6203	1-165-127-11	CERAMIC 470PF	10.00% 500V	D6031	6-501-043-01	DIODE UMZ16NT106	
C6205	1-107-905-11	ELECT 4.7UF	20% 50V	D6032	6-501-043-01	DIODE UMZ16NT106	
C6206	1-107-910-11	ELECT 100UF	20% 50V	D6033	8-719-081-97	DIODE MMDL914T1	
C6209	1-165-729-31	ELECT 470UF	20% 16V	D6035	8-719-057-96	DIODE D10SC6M-4012	
C6210	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6036	8-719-057-96	DIODE D10SC6M-4012	
C6300	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V	D6037	8-719-057-96	DIODE D10SC6M-4012	
C6301	1-126-960-11	ELECT 1UF	20.00% 50V	D6038	8-719-057-96	DIODE D10SC6M-4012	
C6302	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V	D6039	8-719-057-96	DIODE D10SC6M-4012	
C6303	1-126-960-11	ELECT 1UF	20.00% 50V	D6040	6-501-505-01	DIODE FCH08U10	
C6304	1-104-666-11	ELECT 220UF	20.00% 25V	D6041	8-719-082-04	DIODE MM3Z22VT1	
C6306	1-164-489-11	CERAMIC CHIP 0.22UF	10.00% 16V	D6042	8-719-081-97	DIODE MMDL914T1	
C6307	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V	D6043	6-500-567-31	DIODE 10ERB20-TE3	
C6308	1-126-952-11	ELECT 1000UF	20.00% 35V	D6044	6-500-567-31	DIODE 10ERB20-TE3	
C6309	1-126-952-11	ELECT 1000UF	20.00% 35V	D6048	8-719-083-87	DIODE UDZS-TE17-33B	
C6310	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D6200	6-500-567-31	DIODE 10ERB20-TE3	
C6311	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D6201	8-719-036-94	DIODE RD5.6SB-T1	
C6312	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V	D6203	6-500-849-01	DIODE ERA22-08KFLB	
C6313	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V	D6204	8-719-052-90	DIODE D1NL40-TA2	
C6316	1-107-907-11	ELECT 22UF	20% 50V	D6206	8-719-052-90	DIODE D1NL40-TA2	
				D6207	8-719-032-12	DIODE D1NS6	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D6300	8-719-069-55	DIODE UDZSTE-175.6B		Q6002	6-551-403-01	TRANSISTOR 2SK3797(LBS1SONY.	
D6302	8-719-069-55	DIODE UDZSTE-175.6B		Q6003	8-729-807-17	TRANSISTOR 2SD1621-S	
< TERMINAL BOARD >				Q6004	8-729-804-41	TRANSISTOR 2SB1122-S	
ET6000	1-537-770-21	TERMINAL BOARD, GROUND		Q6005	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R	
ET6002	1-537-770-21	TERMINAL BOARD, GROUND		Q6006	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
ET6003	1-537-770-21	TERMINAL BOARD, GROUND		Q6007	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
< FUSE >				Q6008	8-729-804-41	TRANSISTOR 2SB1122-S	
F6000	Δ 1-576-233-51	FUSE	6.3A 250V	Q6009	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
FH6002	Δ 1-533-725-11	FUSE HOLDER		Q6010	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R	
< FERRITE BEAD >				Q6011	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
FB6001	1-410-396-41	FERRITE	0.45UH	Q6012	8-729-045-62	TRANSISTOR 2SK2158-T2B	
FB6002	1-410-396-41	FERRITE	0.45UH	Q6013	6-551-545-01	TRANSISTOR 2SK3469-01MR-F111	
< IC >				Q6014	6-551-545-01	TRANSISTOR 2SK3469-01MR-F111	
IC6000	6-709-192-01	IC FA5501AN-D1-TE1		Q6302	8-729-010-29	TRANSISTOR MSD601-RST1	
IC6001	6-705-810-01	IC MCZ3001DB		Q6303	8-729-010-05	TRANSISTOR MSB709-RT1	
IC6002	6-709-368-01	IC MM1431ATT (CN)		< RESISTOR >			
IC6003	6-709-368-01	IC MM1431ATT (CN)		JR6313	1-216-295-91	SHORT CHIP	0
IC6004	6-709-368-01	IC MM1431ATT (CN)		JR6314	1-216-295-91	SHORT CHIP	0
IC6200	6-600-279-01	IC STR-A6169		JR6315	1-216-295-91	SHORT CHIP	0
IC6201	8-759-682-42	IC MM1431ATT		JR6316	1-216-295-91	SHORT CHIP	0
IC6300	8-759-831-57	IC TDA7495S		R6001	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W
< COIL >				R6002	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W
L6000	Δ 1-456-856-21	LINE FILTER COIL		R6003	Δ 1-208-830-11	METAL CHIP	100K 0.5% 1/10W
L6001	Δ 1-456-856-21	LINE FILTER COIL		R6005	1-218-911-11	METAL CHIP	470K 0.5% 1/10W
L6002	1-457-218-11	INDUCTOR	100UH	R6006	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W
L6003	1-457-141-11	INDUCTOR	175UH	R6007	Δ 1-218-760-11	METAL CHIP	220K 0.5% 1/10W
L6004	1-414-487-41	INDUCTOR	1UH	R6008	1-218-911-11	METAL CHIP	470K 0.5% 1/10W
L6005	1-414-487-41	INDUCTOR	1UH	R6009	1-218-887-11	METAL CHIP	47K 0.5% 1/10W
L6007	1-457-239-11	INDUCTOR	4.7UH	R6017	Δ 1-240-251-11	METAL	6.8 5% 10W
L6008	1-457-239-11	INDUCTOR	4.7UH	R6021	1-218-913-91	METAL CHIP	560K 0.5% 1/10W
L6200	1-414-934-21	INDUCTOR	10UH	R6022	1-216-864-11	SHORT CHIP	0
< PHOTOCOUPLER >				R6023	1-218-879-11	METAL CHIP	22K 0.5% 1/10W
PH6000	Δ 6-600-187-01	PHOTO COUPLER	PC123Y22JOOF	R6024	1-208-814-91	METAL CHIP	22K 0.5% 1/10W
PH6001	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF	R6027	1-218-823-11	METAL CHIP	100 0.5% 1/10W
PH6002	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF	R6028	1-247-752-11	CARBON	1K 5% 1/2W
PH6003	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF	R6029	1-215-882-21	METAL OXIDE	22 5% 2W
PH6200	6-600-187-01	PHOTO COUPLER	PC123Y22JOOF	R6030	1-216-864-11	SHORT CHIP	0
< PROTECTOR MODULE >				R6031	1-218-835-11	METAL CHIP	330 0.5% 1/10W
PS6301	Δ 1-533-596-21	IC LINK	4A 90V	R6032	1-217-157-00	METAL	0.33 10% 5W
< TRANSISTOR >				R6033	1-216-813-11	METAL CHIP	220 5% 1/10W
Q6001	6-551-403-01	TRANSISTOR 2SK3797(LBS1SONY.		R6034	1-216-813-11	METAL CHIP	220 5% 1/10W
				R6035	1-217-157-00	METAL	0.33 10% 5W
				R6036	1-211-981-11	METAL CHIP	33 0.5% 1/10W
				R6037	1-218-823-11	METAL CHIP	100 0.5% 1/10W
				R6038	1-216-833-11	METAL CHIP	10K 5% 1/10W
				R6041	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
				R6042	1-249-389-11	CARBON	4.7 5% 1/4W
				R6043	1-216-833-11	METAL CHIP	10K 5% 1/10W
				R6044	1-216-837-11	METAL CHIP	22K 5% 1/10W

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R6046	1-249-405-11	CARBON	100	5%	1/4W	R6100	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6047	1-249-389-11	CARBON	4.7	5%	1/4W	R6101	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6048	1-216-813-11	METAL CHIP	220	5%	1/10W	R6102	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6050	1-216-813-11	METAL CHIP	220	5%	1/10W	R6103	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R6051	1-208-814-91	METAL CHIP	22K	0.5%	1/10W	R6104	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R6052	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6105	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W
R6053	1-218-907-11	METAL CHIP	330K	0.5%	1/10W	R6106	1-216-361-00	METAL OXIDE	0.22	5%	2W
R6054	1-218-879-11	METAL CHIP	22K	0.5%	1/10W	R6107	1-216-361-00	METAL OXIDE	0.22	5%	2W
R6055	1-218-895-11	METAL CHIP	100K	0.5%	1/10W	R6108	1-218-903-11	METAL CHIP	220K	0.5%	1/10W
R6056	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6109	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R6057	1-216-809-11	METAL CHIP	100	5%	1/10W	R6110	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R6058	1-208-848-11	METAL CHIP	560K	0.5%	1/10W	R6113	1-216-821-11	METAL CHIP	1K	5%	1/10W
R6059	1-208-848-11	METAL CHIP	560K	0.5%	1/10W	R6114	1-216-821-11	METAL CHIP	1K	5%	1/10W
R6060	1-208-848-11	METAL CHIP	560K	0.5%	1/10W	R6115	1-216-821-11	METAL CHIP	1K	5%	1/10W
R6061	1-208-846-11	METAL CHIP	470K	0.5%	1/10W	R6116	1-216-837-11	METAL CHIP	22K	5%	1/10W
R6062	1-208-844-11	METAL CHIP	390K	0.5%	1/10W	R6118	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R6063	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R6121	1-218-843-11	METAL CHIP	680	0.5%	1/10W
R6064	1-218-851-11	METAL CHIP	1.5K	0.5%	1/10W	R6122	1-218-865-11	METAL CHIP	5.6K	0.5%	1/10W
R6065	1-249-393-11	CARBON	10	5%	1/4W	R6124	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R6066	1-216-845-11	METAL CHIP	100K	5%	1/10W	R6125	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6067	1-216-837-11	METAL CHIP	22K	5%	1/10W	R6126	1-249-377-11	CARBON	0.47	5%	1/4W
R6068	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6127	1-249-389-11	CARBON	4.7	5%	1/4W
R6069 Δ	1-202-933-61	FUSIBLE	0.1	10%	1/2W	R6128	1-245-494-21	METAL	2.2M	2%	1/4W
R6070	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R6129	1-245-494-21	METAL	2.2M	2%	1/4W
R6071	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R6130	1-216-864-11	SHORT CHIP	0		
R6072	1-208-854-11	METAL CHIP	1M	0.5%	1/10W	R6131	1-216-864-11	SHORT CHIP	0		
R6073	1-208-854-11	METAL CHIP	1M	0.5%	1/10W	R6132	1-249-416-11	CARBON	820	5%	1/4W
R6074	1-208-854-11	METAL CHIP	1M	0.5%	1/10W	R6133	1-216-295-91	SHORT CHIP	0		
R6075	1-208-854-11	METAL CHIP	1M	0.5%	1/10W	R6200 Δ	1-212-958-00	FUSIBLE	10	5%	1/2W
R6076	1-218-761-11	METAL CHIP	240K	0.5%	1/10W	R6201	1-216-353-00	METAL OXIDE	2.2	5%	1W
R6077	1-218-881-11	METAL CHIP	27K	0.5%	1/10W	R6202	1-260-129-11	CARBON	330K	5%	1/2W
R6078	1-218-873-11	METAL CHIP	12K	0.5%	1/10W	R6203	1-249-385-11	CARBON	2.2	5%	1/4W
R6081	1-249-385-11	CARBON	2.2	5%	1/4W	R6204	1-216-813-11	METAL CHIP	220	5%	1/10W
R6082	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6205	1-249-385-11	CARBON	2.2	5%	1/4W
R6083	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6206	1-216-817-11	METAL CHIP	470	5%	1/10W
R6084	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R6207	1-216-823-11	METAL CHIP	1.5K	5%	1/10W
R6085	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R6208	1-216-809-11	METAL CHIP	100	5%	1/10W
R6086	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6210	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R6087	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6211	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R6088	1-216-857-11	METAL CHIP	1M	5%	1/10W	R6217	1-216-295-91	SHORT CHIP	0		
R6090	1-211-985-11	METAL CHIP	47	0.5%	1/10W	R6218	1-216-295-91	SHORT CHIP	0		
R6091	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R6304	1-216-864-11	METAL CHIP	120K	5%	1/10W
R6092	1-218-903-11	METAL CHIP	220K	0.5%	1/10W	R6306	1-216-864-11	METAL CHIP	120K	5%	1/10W
R6093	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W	R6308	1-216-825-11	METAL CHIP	2.2K	5%	1/4W
R6094	1-218-885-11	METAL CHIP	39K	0.5%	1/10W	R6309	1-216-049-11	RES-CHIP	1K	5%	1/10W
R6095	1-216-009-91	RES-CHIP	22	5%	1/10W	R6313	1-216-864-11	SHORT CHIP	0		
R6096	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6314	1-216-845-11	METAL CHIP	100K	5%	1/10W
R6097	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6315	1-216-845-11	METAL CHIP	100K	5%	1/10W
R6098	1-216-821-11	METAL CHIP	1K	5%	1/10W	R6316	1-216-837-11	METAL CHIP	22K	5%	1/10W
R6099	1-216-009-91	RES-CHIP	22	5%	1/10W	R6317	1-216-833-11	METAL CHIP	10K	5%	1/10W

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

Note : The components identified by mark $\square$ contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced

G2

H1/H1P

BDTR-2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R6318	1-216-833-11	METAL CHIP	10K 5% 1/10W	< VARISTOR >			
< RELAY >				VD9000	1-803-974-21	VARISTOR, CHIP	(1608)
				VD9001	1-803-974-21	VARISTOR, CHIP	(1608)
RY6000 Δ	1-755-579-11	RELAY, POWER		VD9002	1-803-974-21	VARISTOR, CHIP	(1608)
< TRANSFORMER >				VD9003	1-803-974-21	VARISTOR, CHIP	(1608)
T6002 Δ	1-443-983-11	CONVERTER TRANSFORMER (PIT)		VD9004	1-803-974-21	VARISTOR, CHIP	(1608)
T6003 Δ	1-443-986-11	CONVERTER TRANSFORMER (PIT)		VD9005	1-803-974-21	VARISTOR, CHIP	(1608)
T6200 Δ	1-443-313-21	TRANSFORMER, CONVERTER (SBT)		VD9006	1-803-974-21	VARISTOR, CHIP	(1608)
< VARISTOR >				$\square$ * A-1242-773-A BDTR-2 COMPLETE			
VD6000 Δ	1-804-995-11	VARISTOR		< CAPACITOR >			
VD6001 Δ	1-804-995-11	VARISTOR		C3001	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
*A-1189-408-A H1 Board Complete				C3002	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
(KDL-26/32P2520/KDL-26/32P2530)				C3003	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
*A-1202-963-A H1P Board Complete (KDL-40P2530)				C3004	1-164-156-11	CERAMIC CHIP 0.1UF	25V
< CAPACITOR >				C3005	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
C9000	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C3007	1-164-156-11	CERAMIC CHIP 0.1UF	25V
< CONNECTOR >				C3008	1-126-205-11	ELECT CHIP 47UF	20.00% 6.3V
CN9000	1-778-507-21	PIN, CONNECTOR (PC BOARD) 4P		C3009	1-164-156-11	CERAMIC CHIP 0.1UF	25V
< DIODE >				C3010	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
D9000	8-719-036-94	DIODE RD5.6SB-T1		C3011	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
< RESISTOR >				C3012	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R9000	1-216-864-11	SHORT CHIP	0	C3013	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R9001	1-218-847-11	METAL CHIP	1K 0.5% 1/10W	C3014	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R9002	1-218-843-11	METAL CHIP	680 0.5% 1/10W	C3015	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R9003	1-218-851-11	METAL CHIP	1.5K 0.5% 1/10W	C3016	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R9004	1-218-839-11	METAL CHIP	470 0.5% 1/10W	C3017	1-126-205-11	ELECT CHIP 47UF	20.00% 6.3V
R9005	1-218-855-11	METAL CHIP	2.2K 0.5% 1/10W	C3018	1-164-156-11	CERAMIC CHIP 0.1UF	25V
R9006	1-218-834-11	METAL CHIP	300 0.5% 1/10W	C3019	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R9007	1-216-864-11	SHORT CHIP	0	C3020	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R9008	1-216-864-11	SHORT CHIP	0	C3021	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
< SWITCH >				C3022	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
S9000	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)		C3023	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
S9001	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)		C3024	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
S9002	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)		C3025	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
S9003	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)		C3026	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
S9004	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)		C3027	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
S9005	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)		C3028	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
S9006	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)		C3029	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
				C3030	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
				C3031	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
				C3032	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
				C3033	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
				C3035	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
				C3040	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
				C3041	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
				C3042	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
				C3043	1-126-394-11	ELECT CHIP 10UF	20.00% 16V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3044	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C3350	1-162-928-11	CERAMIC CHIP 120PF	5.00% 50V
C3045	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C3353	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V
C3048	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C3354	1-163-037-11	CERAMIC CHIP 0.022UF	10.00% 50V
C3049	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C3355	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C3050	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C3410	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C3051	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4000	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3052	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C4200	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3053	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C4201	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3054	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C4202	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3055	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C4203	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3056	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C4204	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3057	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4205	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3058	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4206	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3059	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4207	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3060	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4208	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3061	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	C4209	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3063	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4210	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3065	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C4211	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3068	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C4212	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3069	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C4213	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3070	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4214	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3071	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4215	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3072	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C4216	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3073	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4217	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3074	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4218	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3075	1-162-917-11	CERAMIC CHIP 15PF	5.00% 50V	C4219	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3076	1-162-917-11	CERAMIC CHIP 15PF	5.00% 50V	C4220	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3078	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4221	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3080	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C4222	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3081	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V	C4223	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3082	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4224	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3086	1-126-390-11	ELECT CHIP 22UF	20.00% 6.3V	C4225	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3089	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C4226	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3090	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C4227	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3092	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C4228	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3093	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C4229	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3094	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C4230	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3095	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C4231	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C3096	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C4232	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3097	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C4233	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C3114	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4234	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3115	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C4235	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3116	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C4236	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3131	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4237	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3200	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C4250	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3201	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C4251	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3300	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C4252	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3301	1-164-388-91	CERAMIC CHIP 270PF	5.00% 50V	C4253	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3302	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C4254	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3303	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V	C4255	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C4256	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5782	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V
C4257	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5783	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C4258	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5789	1-126-205-11	ELECT CHIP 47UF	20.00% 6.3V
C4259	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5790	1-104-905-11	DOUBLE LAYER 0.22F	5.5V
C4260	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5791	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C4263	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5792	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4265	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5793	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C4270	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5795	1-165-822-91	CERAMIC CHIP 1UF	25V
C4271	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5797	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5040	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5798	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5041	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5799	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C5042	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C5800	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C5044	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C5804	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C5045	1-164-872-11	CERAMIC CHIP 82PF	5.00% 50V	C5805	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V
C5046	1-164-872-11	CERAMIC CHIP 82PF	5.00% 50V	C5806	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
C5048	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5807	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C5049	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5813	1-135-366-11	ELECT CHIP 100UF	20% 16V
C5054	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C5814	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
C5055	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5817	1-112-066-11	CERAMIC CHIP 10UF	10% 10V
C5056	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5844	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5057	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C6500	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5061	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C6501	1-162-974-11	CERAMIC CHIP 0.01UF	50V
C5062	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C6502	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5067	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	C6503	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5071	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C6504	1-137-894-21	ELECT CHIP 470UF	20% 25V
C5072	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C6505	1-137-894-21	ELECT CHIP 470UF	20% 25V
C5073	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C6506	1-137-894-21	ELECT CHIP 470UF	20% 25V
C5630	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C6507	1-137-894-21	ELECT CHIP 470UF	20% 25V
C5631	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C6508	1-137-894-21	ELECT CHIP 470UF	20% 25V
C5641	1-100-506-91	CERAMIC CHIP 1UF	20% 6.3V	C6509	1-137-894-21	ELECT CHIP 470UF	20% 25V
C5642	1-100-506-91	CERAMIC CHIP 1UF	20% 6.3V	C6510	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5646	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C6511	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5660	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C6512	1-162-974-11	CERAMIC CHIP 0.01UF	50V
C5661	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C6513	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5662	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C6515	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5663	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C6516	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V
C5666	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C6517	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V
C5670	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C6518	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C5674	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C6519	1-162-974-11	CERAMIC CHIP 0.01UF	50V
C5675	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C6520	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5686	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C6522	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5689	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C6523	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V
C5692	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C6524	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5702	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C6525	1-165-671-21	ELECT CHIP 470UF	20% 6.3V
C5703	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C6526	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C5751	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C6528	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C5753	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C6529	1-165-671-21	ELECT CHIP 470UF	20% 6.3V
C5756	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C6530	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5761	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C6532	1-110-530-11	ELECT CHIP 1000UF	20% 6.3V
C5767	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C6535	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

BDTR-2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C6536	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	< DIODE >			
C6538	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	D3001	8-719-081-97	DIODE MMDL914T1	
C6539	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	D3004	8-719-050-38	DIODE M1MA152WK-T1	
C6543	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D3005	8-719-036-94	DIODE RD5.6SB-T1	
C6545	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D3009	8-719-081-97	DIODE MMDL914T1	
C6546	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D3010	8-719-081-97	DIODE MMDL914T1	
C6547	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D3011	8-719-081-97	DIODE MMDL914T1	
C6548	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D3012	8-719-081-97	DIODE MMDL914T1	
C6549	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D3014	8-719-081-97	DIODE MMDL914T1	
C6551	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D3015	8-719-081-97	DIODE MMDL914T1	
C6553	1-117-370-11	CERAMIC CHIP 10UF	10V	D3016	8-719-069-60	DIODE UDZSTE-179.1B	
C6554	1-117-370-11	CERAMIC CHIP 10UF	10V	D4000	8-719-073-39	DIODE HZU5.6GTRF	
C6555	1-117-370-11	CERAMIC CHIP 10UF	10V	D4001	8-719-073-39	DIODE HZU5.6GTRF	
C6556	1-117-370-11	CERAMIC CHIP 10UF	10V	D4002	8-719-073-39	DIODE HZU5.6GTRF	
C6557	1-117-370-11	CERAMIC CHIP 10UF	10V	D4003	8-719-801-78	DIODE 1SS184	
C6558	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	D4202	8-719-404-50	DIODE MA111-TX	
C6559	1-117-370-11	CERAMIC CHIP 10UF	10V	D4203	8-719-404-50	DIODE MA111-TX	
C6560	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	D4204	8-719-404-50	DIODE MA111-TX	
C6561	1-117-370-11	CERAMIC CHIP 10UF	10V	D4206	8-719-404-50	DIODE MA111-TX	
C6562	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	D4207	8-719-081-97	DIODE MMDL914T1	
C6563	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	D5780	8-719-041-97	DIODE MA113-(TX)	
C6564	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	D6301	8-719-081-97	DIODE MMDL914T1	
C6565	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	D6500	8-719-081-67	DIODE M1FM3	
C6566	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	D6501	8-719-081-67	DIODE M1FM3	
C6567	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	D6502	6-500-696-01	DIODE UDZSTE-173.0B	
C6572	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	D6504	8-719-081-97	DIODE MMDL914T1	
C6581	1-109-982-11	CERAMIC CHIP 1UF	10.00% 10V	D6505	8-719-081-97	DIODE MMDL914T1	
C6582	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V	D6506	6-501-336-01	DIODE RSX201L-30TE25	
C8907	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6507	8-719-080-41	DIODE RB063L-30TE25	
C8922	1-164-156-11	CERAMIC CHIP 0.1UF	25V	D6508	8-719-081-97	DIODE MMDL914T1	
C8923	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6509	6-500-294-01	DIODE PTZ-TE25-3.9B	
C8930	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6510	6-500-253-01	DIODE RB053L-30TE25	
C8932	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6512	6-500-253-01	DIODE RB053L-30TE25	
C8933	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D6513	6-500-294-01	DIODE PTZ-TE25-3.9B	
< CONNECTOR >				D6514	6-500-295-01	DIODE PTZ-TE25-5.6B	
CN3000	*1-819-335-11	HEADER ASSEMBLY FOR PWB	9P	D6515	8-719-083-63	DIODE UDZSTE-1713B	
CN3002	1-779-884-11	CONNECTOR 4P		D6516	8-719-081-99	DIODE MM3Z13VT1	
CN3003	1-820-187-11	HEADER ASSEMBLY (PRINT PWB)10P		D6517	8-719-081-99	DIODE MM3Z13VT1	
CN3005	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P		D6518	8-719-066-10	DIODE 1PS181-115	
CN3006	1-820-255-51	FFC/FPC CONNECTOR (ZIF) 20P		D6519	8-719-081-97	DIODE MMDL914T1	
CN3007	1-784-254-11	CONNECTOR 10P		D6520	8-719-066-10	DIODE 1PS181-115	
CN3008	1-779-936-51	CONNECTOR FFC/FPC 18P		ET6501	1-780-336-11	EARTH TERMINAL	
CN4000	*1-817-804-11	CONNECTOR D SUB 15P		ET6502	1-780-336-11	EARTH TERMINAL	
CN4200	*1-821-188-11	HDMI CONNECTOR		ET6503	1-780-336-11	EARTH TERMINAL	
CN4201	*1-821-188-11	HDMI CONNECTOR		< FUSE >			
CN5750	*1-793-769-21	CONNECTOR CARD (PCMCIA CARD)		F4000 Δ	1-576-646-11	FUSE	0.5A 50V
CN5883	1-820-209-11	MEMORY STICK CONNECTOR					
CN6501	*1-819-474-11	HEADER ASSEMBLY FOR PWB 6P					

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< FERRITE BEAD >				FB5909	1-400-834-11	FERRITE	OUH
FB3012	1-414-445-11	FERRITE	OUH	FB5910	1-400-834-11	FERRITE	OUH
FB3013	1-414-445-11	FERRITE	OUH	FB5911	1-400-834-11	FERRITE	OUH
FB3014	1-414-445-11	FERRITE	OUH	FB5912	1-400-834-11	FERRITE	OUH
FB3016	1-414-760-21	FERRITE	OUH	FB5913	1-400-834-11	FERRITE	OUH
FB3046	1-414-445-11	FERRITE	OUH	FB5914	1-400-834-11	FERRITE	OUH
FB3099	1-414-760-21	FERRITE	OUH	FB5915	1-400-834-11	FERRITE	OUH
FB3241	1-414-760-21	FERRITE	OUH	FB5916	1-400-244-11	FERRITE	OUH
FB3242	1-414-760-21	FERRITE	OUH	FB5917	1-400-244-11	FERRITE	OUH
FB3243	1-414-760-21	FERRITE	OUH	FB6500	1-469-324-21	FERRITE	OUH
FB3244	1-414-760-21	FERRITE	OUH	FB6501	1-469-324-21	FERRITE	OUH
FB3245	1-414-760-21	FERRITE	OUH	FB6502	1-469-775-21	FERRITE	OUH
FB3400	1-414-445-11	FERRITE	OUH	< IC >			
FB3401	1-414-445-11	FERRITE	OUH	IC3000	8-759-082-60	IC TC7S66FU	
FB4003	1-400-141-22	FERRITE	OUH	IC3001	6-706-419-01	IC LM393DT (A)	
FB4200	1-414-234-22	FERRITE	OUH	IC3002	6-701-173-01	IC MC74LVXT4053DTR2	
FB4201	1-414-234-22	FERRITE	OUH	IC3003	8-759-701-01	IC NJM2904M	
FB5040	1-400-244-11	FERRITE	OUH	IC3004	6-704-573-01	IC M24C32-WMN6T (B)	
FB5041	1-400-244-11	FERRITE	OUH	IC3005	6-703-175-01	IC PST3629UL	
FB5612	1-400-833-21	FERRITE	OUH	IC3006	6-807-191-01	IC CXD9901R	
FB5613	1-400-833-21	FERRITE	OUH	IC3008	8-752-072-94	IC CXA1875AM-T4	
FB5614	1-400-833-21	FERRITE	OUH	IC3010	8-759-701-01	IC NJM2904M	
FB5615	1-400-833-21	FERRITE	OUH	IC4000	6-704-600-01	IC M24C02-WMN6T (B)	
FB5616	1-400-833-21	FERRITE	OUH	IC4200	6-704-001-01	IC BR24L02F-WE2	
FB5617	1-400-833-21	FERRITE	OUH	IC4201	6-709-806-01	IC IP4776CZ38	
FB5618	1-400-807-21	FERRITE	OUH	IC4202	6-710-500-01	IC TDA9974AHS/8/C112/R1	
FB5619	1-400-807-21	FERRITE	OUH	IC4203	6-704-001-01	IC BR24L02F-WE2	
FB5620	1-400-807-21	FERRITE	OUH	IC4204	6-709-806-01	IC IP4776CZ38	
FB5621	1-400-807-21	FERRITE	OUH	IC5040	8-753-264-52	IC CXD1968R-T6	
FB5622	1-400-833-21	FERRITE	OUH	IC5630	6-709-214-01	IC UPD61123F1-100-KA3-A	
FB5623	1-400-833-21	FERRITE	OUH	IC5680	6-705-336-01	IC K9F2808U0C-PCB0T	
FB5624	1-400-833-21	FERRITE	OUH	IC5681	6-710-592-01	IC HYB25DC128169EE-6	
FB5630	1-469-869-21	FERRITE	OUH	IC5682	6-708-916-01	IC ICS7150MLFT	
FB5634	1-400-244-11	FERRITE	OUH	IC5750	8-759-644-48	IC 74LVC541APW	
FB5635	1-400-244-11	FERRITE	OUH	IC5751	8-759-644-48	IC 74LVC541APW	
FB5636	1-469-869-21	FERRITE	OUH	IC5752	6-706-482-01	IC TC7SH00FU (T5RSOYJF)	
FB5637	1-469-869-21	FERRITE	OUH	IC5753	8-759-644-48	IC 74LVC541APW	
FB5640	1-400-834-11	FERRITE	OUH	IC5754	6-708-132-01	IC 74LVC14APW	
FB5646	1-400-834-11	FERRITE	OUH	IC5755	8-759-644-48	IC 74LVC541APW	
FB5647	1-469-869-21	FERRITE	OUH	IC5756	8-759-644-48	IC 74LVC541APW	
FB5680	1-400-244-11	FERRITE	OUH	IC5757	8-759-644-48	IC 74LVC541APW	
FB5681	1-400-244-11	FERRITE	OUH	IC5758	6-707-853-01	IC TC74LCX541FT (EKJ)	
FB5750	1-469-869-21	FERRITE	OUH	IC5759	8-759-298-91	IC 74LVT245PW-T	
FB5751	1-469-869-21	FERRITE	OUH	IC5780	6-700-108-01	IC RV5C387A-E2-FB	
FB5780	1-400-244-11	FERRITE	OUH	IC5781	6-703-271-01	IC TAR5S50 (TE85R)	
FB5781	1-400-244-11	FERRITE	OUH	IC5782	6-707-808-01	IC WM8727GED/RV	
FB5782	1-400-244-11	FERRITE	OUH	IC5783	8-759-701-40	IC NJM3404AM-T1	
FB5907	1-400-834-11	FERRITE	OUH	IC5784	6-706-106-01	IC NCP1117STAT3	
FB5908	1-400-834-11	FERRITE	OUH				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

BDTR-2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
IC5785	6-708-603-01	IC PQ070XNA12PH		L6515	1-412-026-11	INDUCTOR	1UH
IC5786	6-710-593-01	IC MIC2025-1YM		L6516	1-412-026-11	INDUCTOR	1UH
IC6500	6-702-142-01	IC PQ1CY1032ZP		L6517	1-414-394-11	INDUCTOR	2.2UH
IC6501	6-702-142-01	IC PQ1CY1032ZP		L6518	1-412-026-11	INDUCTOR	1UH
IC6502	6-706-046-01	IC TK11185CSCL-G		L6519	1-412-026-11	INDUCTOR	1UH
IC6503	6-702-142-01	IC PQ1CY1032ZP		L6520	1-412-026-11	INDUCTOR	1UH
IC6505	6-709-932-01	IC MM3141CNRE		L6521	1-412-026-11	INDUCTOR	1UH
< COIL >				L6522	1-412-026-11	INDUCTOR	1UH
L3000	1-456-984-11	INDUCTOR	0UH	L6523	1-412-026-11	INDUCTOR	1UH
L3001	1-456-984-11	INDUCTOR	0UH	L6524	1-412-026-11	INDUCTOR	1UH
L3002	1-456-984-11	INDUCTOR	0UH	L6525	1-412-026-11	INDUCTOR	1UH
L3003	1-456-984-11	INDUCTOR	0UH	L6526	1-414-394-11	INDUCTOR	2.2UH
L3004	1-456-984-11	INDUCTOR	0UH	L6527	1-414-394-11	INDUCTOR	2.2UH
L3005	1-400-180-21	FERRITE	0UH	L6528	1-412-026-11	INDUCTOR	1UH
L3350	1-412-990-41	INDUCTOR	8.2UH	< PROTECTOR MODULE >			
L4208	1-414-394-11	INDUCTOR	2.2UH	PS6500 Δ	1-576-736-41	IC LINK	3.15A 24V
L4212	1-414-394-11	INDUCTOR	2.2UH	PS6501 Δ	1-576-736-41	IC LINK	3.15A 24V
L4213	1-414-394-11	INDUCTOR	2.2UH	PS6502 Δ	1-576-736-41	IC LINK	3.15A 24V
L4214	1-414-394-11	INDUCTOR	2.2UH	< TRANSISTOR >			
L4215	1-414-394-11	INDUCTOR	2.2UH	Q3000	8-729-028-28	TRANSISTOR 2SK2036(TE85L)	
L4216	1-414-394-11	INDUCTOR	2.2UH	Q3001	8-729-421-22	TRANSISTOR UN2211	
L4217	1-414-394-11	INDUCTOR	2.2UH	Q3002	8-729-927-99	TRANSISTOR 2SC4617R	
L4220	*1-813-308-11	INDUCTOR	0UH	Q3003	8-729-927-99	TRANSISTOR 2SC4617R	
L4221	*1-813-308-11	INDUCTOR	0UH	Q3004	8-729-028-28	TRANSISTOR 2SK2036(TE85L)	
L4222	*1-813-308-11	INDUCTOR	0UH	Q3006	8-729-905-35	TRANSISTOR 2SC4081-R	
L4223	*1-813-308-11	INDUCTOR	0UH	Q3007	8-729-907-00	TRANSISTOR DTC114EU	
L4262	1-414-394-11	INDUCTOR	2.2UH	Q3008	8-729-045-62	TRANSISTOR 2SK2158-T2B	
L4263	1-414-394-11	INDUCTOR	2.2UH	Q3009	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	
L5040	1-469-842-21	INDUCTOR	0.47UH	Q3010	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	
L5041	1-412-058-11	INDUCTOR	10UH	Q3011	8-729-045-62	TRANSISTOR 2SK2158-T2B	
L5042	1-412-058-11	INDUCTOR	10UH	Q3012	8-729-422-29	TRANSISTOR 2SD601A-S	
L5043	1-412-058-11	INDUCTOR	10UH	Q3013	8-729-422-29	TRANSISTOR 2SD601A-S	
L5044	1-412-058-11	INDUCTOR	10UH	Q3014	8-729-422-29	TRANSISTOR 2SD601A-S	
L5045	1-412-058-11	INDUCTOR	10UH	Q3015	8-729-422-29	TRANSISTOR 2SD601A-S	
L5046	1-412-058-11	INDUCTOR	10UH	Q3016	8-729-421-19	TRANSISTOR UN2213	
L5630	1-414-398-11	INDUCTOR	10UH	Q3017	8-729-050-10	TRANSISTOR PMBF170-215	
L6500	1-416-511-11	INDUCTOR	47UH	Q3020	8-729-905-35	TRANSISTOR 2SC4081-R	
L6501	1-416-511-11	INDUCTOR	47UH	Q3120	8-729-028-28	TRANSISTOR 2SK2036(TE85L)	
L6502	1-457-242-11	INDUCTOR	47UH	Q3121	8-729-028-28	TRANSISTOR 2SK2036(TE85L)	
L6503	1-414-398-11	INDUCTOR	10UH	Q3122	8-729-028-73	TRANSISTOR DTA114EUA-T106	
L6504	1-424-976-21	INDUCTOR	47UH	Q3123	8-729-010-05	TRANSISTOR MSB709-RT1	
L6505	1-457-242-11	INDUCTOR	47UH	Q3300	8-729-010-05	TRANSISTOR MSB709-RT1	
L6506	1-424-976-21	INDUCTOR	47UH	Q3301	8-729-421-19	TRANSISTOR UN2213	
L6508	1-424-922-21	INDUCTOR	10UH	Q3350	8-729-010-05	TRANSISTOR MSB709-RT1	
L6510	1-416-948-21	INDUCTOR	10UH	Q3351	8-729-010-29	TRANSISTOR MSD601-RST1	
L6511	1-424-922-21	INDUCTOR	10UH	Q4204	8-729-421-22	TRANSISTOR UN2211	
L6512	1-416-511-11	INDUCTOR	47UH	Q4213	8-729-028-28	TRANSISTOR 2SK2036(TE85L)	
L6514	1-412-026-11	INDUCTOR	1UH	Q4214	8-729-028-28	TRANSISTOR 2SK2036(TE85L)	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
Q4215	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		R3031	1-216-864-11	SHORT CHIP	0
Q4216	8-729-421-22	TRANSISTOR UN2211		R3032	1-216-849-11	METAL CHIP	220K 5% 1/10W
Q4219	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		R3034	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
Q4220	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		R3035	1-216-864-11	SHORT CHIP	0
Q5780	8-729-010-05	TRANSISTOR MSB709-RT1		R3036	1-216-864-11	SHORT CHIP	0
Q5920	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		R3037	1-216-864-11	SHORT CHIP	0
Q5921	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		R3038	1-216-864-11	SHORT CHIP	0
Q5922	8-729-028-86	TRANSISTOR DTA143EUA-T106		R3039	1-216-864-11	SHORT CHIP	0
Q5923	8-729-907-00	TRANSISTOR DTC114EU		R3040	1-218-891-11	METAL CHIP	68K 0.5% 1/10W
Q6500	8-729-421-22	TRANSISTOR UN2211		R3042	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q6501	8-729-421-22	TRANSISTOR UN2211		R3043	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q6502	8-729-421-22	TRANSISTOR UN2211		R3044	1-218-839-11	METAL CHIP	470 0.5% 1/10W
Q6503	8-729-010-25	TRANSISTOR MSD601-RT1		R3045	1-216-864-11	SHORT CHIP	0
Q6504	8-729-421-22	TRANSISTOR UN2211		R3046	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q6505	8-729-010-25	TRANSISTOR MSD601-RT1		R3048	1-216-864-11	SHORT CHIP	0
Q6506	8-729-010-25	TRANSISTOR MSD601-RT1		R3049	1-216-864-11	SHORT CHIP	0
Q6507	8-729-010-25	TRANSISTOR MSD601-RT1		R3050	1-216-864-11	SHORT CHIP	0
Q6509	8-729-046-04	TRANSISTOR FDS6690A		R3051	1-216-864-11	SHORT CHIP	0
Q6510	8-729-421-22	TRANSISTOR UN2211		R3052	1-216-864-11	SHORT CHIP	0
Q6511	8-729-421-22	TRANSISTOR UN2211		R3053	1-216-864-11	SHORT CHIP	0
Q6512	6-550-369-01	TRANSISTOR TPC8109(TE12L)		R3054	1-216-864-11	SHORT CHIP	0
Q6513	6-550-369-01	TRANSISTOR TPC8109(TE12L)		R3058	1-218-887-11	METAL CHIP	47K 0.5% 1/10W
Q6514	8-729-010-05	TRANSISTOR MSB709-RT1		R3059	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q6515	8-729-028-28	TRANSISTOR 2SK2036(TE85L)		R3061	1-218-847-11	METAL CHIP	1K 0.5% 1/10W
Q6555	8-729-010-25	TRANSISTOR MSD601-RT1		R3062	1-216-809-11	METAL CHIP	100 5% 1/10W
< RESISTOR >				R3063	1-216-809-11	METAL CHIP	100 5% 1/10W
JR5600	1-216-295-91	SHORT CHIP	0	R3064	1-216-809-11	METAL CHIP	100 5% 1/10W
R3000	1-216-864-11	SHORT CHIP	0	R3067	1-216-809-11	METAL CHIP	100 5% 1/10W
R3001	1-216-833-11	METAL CHIP	10K 5% 1/10W	R3068	1-216-809-11	METAL CHIP	100 5% 1/10W
R3002	1-216-825-11	METAL CHIP	2.2K 5% 1/10W	R3069	1-216-809-11	METAL CHIP	100 5% 1/10W
R3003	1-216-864-11	SHORT CHIP	0	R3071	1-216-809-11	METAL CHIP	100 5% 1/10W
R3004	1-216-864-11	SHORT CHIP	0	R3073	1-216-809-11	METAL CHIP	100 5% 1/10W
R3006	1-216-833-11	METAL CHIP	10K 5% 1/10W	R3074	1-216-809-11	METAL CHIP	100 5% 1/10W
R3008	1-218-887-11	METAL CHIP	47K 0.5% 1/10W	R3075	1-216-809-11	METAL CHIP	100 5% 1/10W
R3010	1-216-864-11	SHORT CHIP	0	R3076	1-216-809-11	METAL CHIP	100 5% 1/10W
R3015	1-216-825-11	METAL CHIP	2.2K 5% 1/10W	R3077	1-216-833-11	METAL CHIP	10K 5% 1/10W
R3016	1-216-821-11	METAL CHIP	1K 5% 1/10W	R3078	1-216-809-11	METAL CHIP	100 5% 1/10W
R3019	1-216-833-11	METAL CHIP	10K 5% 1/10W	R3079	1-216-864-11	SHORT CHIP	0
R3020	1-216-833-11	METAL CHIP	10K 5% 1/10W	R3080	1-216-864-11	SHORT CHIP	0
R3021	1-216-849-11	METAL CHIP	220K 5% 1/10W	R3081	1-216-864-11	SHORT CHIP	0
R3022	1-216-849-11	METAL CHIP	220K 5% 1/10W	R3083	1-216-864-11	SHORT CHIP	0
R3023	1-216-849-11	METAL CHIP	220K 5% 1/10W	R3084	1-216-864-11	SHORT CHIP	0
R3024	1-216-849-11	METAL CHIP	220K 5% 1/10W	R3085	1-216-864-11	SHORT CHIP	0
R3026	1-216-849-11	METAL CHIP	220K 5% 1/10W	R3087	1-216-864-11	SHORT CHIP	0
R3027	1-216-849-11	METAL CHIP	220K 5% 1/10W	R3088	1-216-864-11	SHORT CHIP	0
R3028	1-216-849-11	METAL CHIP	220K 5% 1/10W	R3089	1-216-809-11	METAL CHIP	100 5% 1/10W
R3029	1-216-841-11	METAL CHIP	47K 5% 1/10W	R3090	1-216-809-11	METAL CHIP	100 5% 1/10W
R3030	1-216-833-11	METAL CHIP	10K 5% 1/10W	R3091	1-216-833-11	METAL CHIP	10K 5% 1/10W
				R3092	1-216-864-11	SHORT CHIP	0
				R3093	1-216-864-11	SHORT CHIP	0

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3094	1-216-864-11	SHORT CHIP	0			R3180	1-216-809-11	METAL CHIP	100	5%	1/10W
R3095	1-216-864-11	SHORT CHIP	0			R3181	1-216-809-11	METAL CHIP	100	5%	1/10W
R3096	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3182	1-216-809-11	METAL CHIP	100	5%	1/10W
R3097	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3183	1-216-809-11	METAL CHIP	100	5%	1/10W
R3098	1-216-864-11	SHORT CHIP	0			R3184	1-216-809-11	METAL CHIP	100	5%	1/10W
R3100	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3185	1-216-809-11	METAL CHIP	100	5%	1/10W
R3101	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3186	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3103	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3187	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3104	1-216-864-11	SHORT CHIP	0			R3188	1-216-864-11	SHORT CHIP	0		
R3105	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3190	1-216-864-11	SHORT CHIP	0		
R3106	1-218-891-11	METAL CHIP	68K	0.5%	1/10W	R3191	1-216-864-11	SHORT CHIP	0		
R3107	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3192	1-216-864-11	SHORT CHIP	0		
R3108	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R3193	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3109	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3195	1-216-864-11	SHORT CHIP	0		
R3110	1-216-864-11	SHORT CHIP	0			R3196	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3111	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3198	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R3112	1-216-864-11	SHORT CHIP	0			R3201	1-216-864-11	SHORT CHIP	0		
R3113	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3202	1-216-864-11	SHORT CHIP	0		
R3114	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3203	1-216-864-11	SHORT CHIP	0		
R3115	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3204	1-216-864-11	SHORT CHIP	0		
R3116	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R3209	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3117	1-216-864-11	SHORT CHIP	0			R3212	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3119	1-216-864-11	SHORT CHIP	0			R3213	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R3121	1-216-864-11	SHORT CHIP	0			R3215	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R3124	1-216-864-11	SHORT CHIP	0			R3216	1-216-864-11	SHORT CHIP	0		
R3127	1-216-864-11	SHORT CHIP	0			R3219	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R3128	1-216-809-11	METAL CHIP	100	5%	1/10W	R3220	1-216-864-11	SHORT CHIP	0		
R3129	1-216-864-11	SHORT CHIP	0			R3221	1-216-864-11	SHORT CHIP	0		
R3133	1-216-809-11	METAL CHIP	100	5%	1/10W	R3222	1-216-809-11	METAL CHIP	100	5%	1/10W
R3136	1-216-809-11	METAL CHIP	100	5%	1/10W	R3224	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R3137	1-216-864-11	SHORT CHIP	0			R3225	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R3138	1-216-809-11	METAL CHIP	100	5%	1/10W	R3229	1-216-864-11	SHORT CHIP	0		
R3140	1-216-809-11	METAL CHIP	100	5%	1/10W	R3230	1-216-864-11	SHORT CHIP	0		
R3142	1-216-809-11	METAL CHIP	100	5%	1/10W	R3231	1-216-864-11	SHORT CHIP	0		
R3143	1-216-864-11	SHORT CHIP	0			R3233	1-216-864-11	SHORT CHIP	0		
R3146	1-216-864-11	SHORT CHIP	0			R3240	1-216-817-11	METAL CHIP	470	5%	1/10W
R3147	1-216-864-11	SHORT CHIP	0			R3246	1-216-864-11	SHORT CHIP	0		
R3150	1-216-809-11	METAL CHIP	100	5%	1/10W	R3247	1-216-843-11	METAL CHIP	68K	5%	1/10W
R3153	1-216-864-11	SHORT CHIP	0			R3248	1-216-851-11	METAL CHIP	330K	5%	1/10W
R3156	1-216-817-11	METAL CHIP	470	5%	1/10W	R3249	1-216-817-11	METAL CHIP	470	5%	1/10W
R3158	1-216-864-11	SHORT CHIP	0			R3250	1-216-821-11	METAL CHIP	1K	5%	1/10W
R3159	1-216-817-11	METAL CHIP	470	5%	1/10W	R3251	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R3160	1-216-864-11	SHORT CHIP	0			R3252	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3161	1-216-864-11	SHORT CHIP	0			R3253	1-216-864-11	SHORT CHIP	0		
R3163	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3255	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R3166	1-216-809-11	METAL CHIP	100	5%	1/10W	R3256	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3167	1-216-809-11	METAL CHIP	100	5%	1/10W	R3259	1-216-821-11	METAL CHIP	1K	5%	1/10W
R3175	1-216-864-11	SHORT CHIP	0			R3260	1-216-837-11	METAL CHIP	22K	5%	1/10W
R3177	1-216-809-11	METAL CHIP	100	5%	1/10W	R3261	1-216-864-11	SHORT CHIP	0		
R3178	1-216-809-11	METAL CHIP	100	5%	1/10W	R3262	1-218-957-11	RES-CHIP	2.2K	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3263	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R3356	1-216-864-11	SHORT CHIP	0		
R3264	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R3370	1-216-864-11	SHORT CHIP	0		
R3265	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R3371	1-216-864-11	SHORT CHIP	0		
R3266	1-216-817-11	METAL CHIP	470	5%	1/10W	R3372	1-216-864-11	SHORT CHIP	0		
R3267	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R3373	1-216-864-11	SHORT CHIP	0		
R3268	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R3374	1-216-841-11	METAL CHIP	47K	5%	1/10W
R3269	1-216-841-11	METAL CHIP	47K	5%	1/10W	R3375	1-216-809-11	METAL CHIP	100	5%	1/10W
R3270	1-216-864-11	SHORT CHIP	0			R3376	1-220-397-11	METAL CHIP	4.7M	5%	1/10W
R3271	1-216-864-11	SHORT CHIP	0			R3377	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3272	1-216-864-11	SHORT CHIP	0			R3378	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3273	1-216-864-11	SHORT CHIP	0			R3380	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3274	1-216-864-11	SHORT CHIP	0			R3381	1-216-809-11	METAL CHIP	100	5%	1/10W
R3275	1-216-864-11	SHORT CHIP	0			R3382	1-216-841-11	METAL CHIP	47K	5%	1/10W
R3276	1-216-864-11	SHORT CHIP	0			R3387	1-216-864-11	SHORT CHIP	0		
R3277	1-216-864-11	SHORT CHIP	0			R3388	1-216-864-11	SHORT CHIP	0		
R3278	1-216-864-11	SHORT CHIP	0			R3389	1-216-864-11	SHORT CHIP	0		
R3279	1-216-864-11	SHORT CHIP	0			R3392	1-216-809-11	METAL CHIP	100	5%	1/10W
R3280	1-216-864-11	SHORT CHIP	0			R3393	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3281	1-216-864-11	SHORT CHIP	0			R3394	1-216-841-11	METAL CHIP	47K	5%	1/10W
R3282	1-216-864-11	SHORT CHIP	0			R3395	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3283	1-216-864-11	SHORT CHIP	0			R3396	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3284	1-216-864-11	SHORT CHIP	0			R3397	1-216-809-11	METAL CHIP	100	5%	1/10W
R3285	1-216-864-11	SHORT CHIP	0			R3406	1-216-864-11	SHORT CHIP	0		
R3286	1-216-864-11	SHORT CHIP	0			R3410	1-216-817-11	METAL CHIP	470	5%	1/10W
R3287	1-216-864-11	SHORT CHIP	0			R3411	1-218-893-11	METAL CHIP	82K	0.5%	1/10W
R3288	1-216-864-11	SHORT CHIP	0			R3700	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3289	1-216-864-11	SHORT CHIP	0			R4000	1-216-805-11	METAL CHIP	47	5%	1/10W
R3290	1-216-864-11	SHORT CHIP	0			R4001	1-216-805-11	METAL CHIP	47	5%	1/10W
R3291	1-216-864-11	SHORT CHIP	0			R4004	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3292	1-216-864-11	SHORT CHIP	0			R4005	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3293	1-216-809-11	METAL CHIP	100	5%	1/10W	R4006	1-216-805-11	METAL CHIP	47	5%	1/10W
R3295	1-216-864-11	SHORT CHIP	0			R4007	1-216-805-11	METAL CHIP	47	5%	1/10W
R3296	1-216-845-11	METAL CHIP	100K	5%	1/10W	R4008	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R3297	1-216-809-11	METAL CHIP	100	5%	1/10W	R4009	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R3298	1-216-851-11	METAL CHIP	330K	5%	1/10W	R4010	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R3299	1-216-813-11	METAL CHIP	220	5%	1/10W	R4011	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R3300	1-216-817-11	METAL CHIP	470	5%	1/10W	R4012	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R3301	1-216-837-11	METAL CHIP	22K	5%	1/10W	R4013	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R3302	1-216-849-11	METAL CHIP	220K	5%	1/10W	R4014	1-216-821-11	METAL CHIP	1K	5%	1/10W
R3303	1-216-839-11	METAL CHIP	33K	5%	1/10W	R4015	1-216-864-11	SHORT CHIP	0		
R3304	1-216-839-11	METAL CHIP	33K	5%	1/10W	R4016	1-216-864-11	SHORT CHIP	0		
R3305	1-216-833-11	METAL CHIP	10K	5%	1/10W	R4017	1-216-864-11	SHORT CHIP	0		
R3310	1-216-809-11	METAL CHIP	100	5%	1/10W	R4018	1-216-864-11	SHORT CHIP	0		
R3311	1-216-809-11	METAL CHIP	100	5%	1/10W	R4019	1-216-864-11	SHORT CHIP	0		
R3320	1-216-864-11	SHORT CHIP	0			R4020	1-216-845-11	METAL CHIP	100K	5%	1/10W
R3321	1-216-864-11	SHORT CHIP	0			R4202	1-216-821-11	METAL CHIP	1K	5%	1/10W
R3350	1-216-821-11	METAL CHIP	1K	5%	1/10W	R4203	1-216-821-11	METAL CHIP	1K	5%	1/10W
R3351	1-216-805-11	METAL CHIP	47	5%	1/10W	R4204	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3352	1-216-864-11	SHORT CHIP	0			R4205	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R3355	1-216-821-11	METAL CHIP	1K	5%	1/10W	R4206	1-218-871-11	METAL CHIP	10K	0.5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R4208	1-216-864-11	SHORT CHIP	0			R5063	1-218-941-81	RES-CHIP	100	5%	1/16W
R4209	1-216-809-11	METAL CHIP	100	5%	1/10W	R5064	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4210	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R5630	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4211	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R5631	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4212	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5632	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4214	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5633	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4215	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R5634	1-218-941-81	RES-CHIP	100	5%	1/16W
R4216	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R5635	1-218-941-81	RES-CHIP	100	5%	1/16W
R4217	1-216-809-11	METAL CHIP	100	5%	1/10W	R5636	1-218-941-81	RES-CHIP	100	5%	1/16W
R4218	1-216-809-11	METAL CHIP	100	5%	1/10W	R5637	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4219	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5638	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4220	1-216-809-11	METAL CHIP	100	5%	1/10W	R5639	1-218-941-81	RES-CHIP	100	5%	1/16W
R4221	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R5640	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R4222	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R5641	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R4232	1-216-809-11	METAL CHIP	100	5%	1/10W	R5644	1-218-941-81	RES-CHIP	100	5%	1/16W
R4235	1-216-809-11	METAL CHIP	100	5%	1/10W	R5645	1-218-941-81	RES-CHIP	100	5%	1/16W
R4236	1-216-809-11	METAL CHIP	100	5%	1/10W	R5646	1-218-941-81	RES-CHIP	100	5%	1/16W
R4237	1-216-809-11	METAL CHIP	100	5%	1/10W	R5647	1-218-941-81	RES-CHIP	100	5%	1/16W
R4239	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R5648	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R4240	1-218-847-11	METAL CHIP	1K	0.5%	1/10W	R5652	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4241	1-216-809-11	METAL CHIP	100	5%	1/10W	R5653	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4242	1-216-809-11	METAL CHIP	100	5%	1/10W	R5654	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4243	1-216-864-11	SHORT CHIP	0			R5655	1-218-937-11	RES-CHIP	47	5%	1/16W
R4244	1-216-864-11	SHORT CHIP	0			R5656	1-218-937-11	RES-CHIP	47	5%	1/16W
R4245	1-216-839-11	METAL CHIP	33K	5%	1/10W	R5657	1-218-937-11	RES-CHIP	47	5%	1/16W
R4246	1-216-864-11	SHORT CHIP	0			R5661	1-218-937-11	RES-CHIP	47	5%	1/16W
R4248	1-216-864-11	SHORT CHIP	0			R5663	1-220-174-11	RES-CHIP	200	5%	1/16W
R4250	1-216-864-11	SHORT CHIP	0			R5664	1-220-174-11	RES-CHIP	200	5%	1/16W
R4252	1-216-809-11	METAL CHIP	100	5%	1/10W	R5665	1-220-174-11	RES-CHIP	200	5%	1/16W
R4253	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5666	1-220-174-11	RES-CHIP	200	5%	1/16W
R4254	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5667	1-220-174-11	RES-CHIP	200	5%	1/16W
R4255	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5668	1-220-174-11	RES-CHIP	200	5%	1/16W
R4256	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5669	1-208-671-11	METAL CHIP	330	0.5%	1/16W
R5040	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5671	1-208-679-11	METAL CHIP	680	0.5%	1/16W
R5041	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5674	1-208-675-11	METAL CHIP	470	0.5%	1/16W
R5043	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5676	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5044	1-218-941-81	RES-CHIP	100	5%	1/16W	R5677	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R5045	1-218-941-81	RES-CHIP	100	5%	1/16W	R5686	1-218-949-11	RES-CHIP	470	5%	1/16W
R5049	1-218-989-11	RES-CHIP	1M	5%	1/16W	R5714	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5050	1-218-941-81	RES-CHIP	100	5%	1/16W	R5729	1-218-939-11	RES-CHIP	68	5%	1/16W
R5051	1-218-941-81	RES-CHIP	100	5%	1/16W	R5730	1-218-941-11	RES-CHIP	100	5%	1/16W
R5053	1-218-937-11	RES-CHIP	47	5%	1/16W	R5731	1-218-941-11	RES-CHIP	100	5%	1/16W
R5054	1-218-941-81	RES-CHIP	100	5%	1/16W	R5733	1-218-937-11	RES-CHIP	47	5%	1/16W
R5055	1-218-941-81	RES-CHIP	100	5%	1/16W	R5734	1-218-939-11	RES-CHIP	68	5%	1/16W
R5056	1-216-864-11	SHORT CHIP	0			R5735	1-218-941-81	RES-CHIP	100	5%	1/16W
R5057	1-218-941-81	RES-CHIP	100	5%	1/16W	R5736	1-218-941-81	RES-CHIP	100	5%	1/16W
R5058	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5737	1-218-941-81	RES-CHIP	100	5%	1/16W
R5060	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5738	1-218-941-81	RES-CHIP	100	5%	1/16W
R5061	1-218-941-81	RES-CHIP	100	5%	1/16W	R5739	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5062	1-218-941-81	RES-CHIP	100	5%	1/16W	R5740	1-218-965-11	RES-CHIP	10K	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R5744	1-218-949-11	RES-CHIP	470	5%	1/16W	R5887	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5745	1-218-949-11	RES-CHIP	470	5%	1/16W	R5888	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5750	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5889	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5751	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5890	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5752	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5891	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5753	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5892	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5754	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5893	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5755	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5895	1-218-941-81	RES-CHIP	100	5%	1/16W
R5756	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5896	1-218-941-81	RES-CHIP	100	5%	1/16W
R5757	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5897	1-218-941-81	RES-CHIP	100	5%	1/16W
R5758	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5902	1-218-941-81	RES-CHIP	100	5%	1/16W
R5760	1-218-941-81	RES-CHIP	100	5%	1/16W	R5903	1-218-941-81	RES-CHIP	100	5%	1/16W
R5761	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5904	1-218-941-81	RES-CHIP	100	5%	1/16W
R5763	1-218-941-81	RES-CHIP	100	5%	1/16W	R5905	1-218-941-81	RES-CHIP	100	5%	1/16W
R5764	1-218-941-81	RES-CHIP	100	5%	1/16W	R5906	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5780	1-216-809-11	METAL CHIP	100	5%	1/10W	R5922	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5781	1-216-809-11	METAL CHIP	100	5%	1/10W	R5923	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5782	1-218-945-11	RES-CHIP	220	5%	1/16W	R5925	1-216-864-11	SHORT CHIP	0		
R5783	1-216-809-11	METAL CHIP	100	5%	1/10W	R5927	1-216-864-11	SHORT CHIP	0		
R5786	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W	R5930	1-218-941-81	RES-CHIP	100	5%	1/16W
R5789	1-216-813-11	METAL CHIP	220	5%	1/10W	R5954	1-218-939-11	RES-CHIP	68	5%	1/16W
R5792	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R5955	1-218-939-11	RES-CHIP	68	5%	1/16W
R5793	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R5956	1-218-939-11	RES-CHIP	68	5%	1/16W
R5794	1-218-972-11	RES-CHIP	39K	5%	1/16W	R5957	1-218-939-11	RES-CHIP	68	5%	1/16W
R5795	1-218-972-11	RES-CHIP	39K	5%	1/16W	R5958	1-218-939-11	RES-CHIP	68	5%	1/16W
R5796	1-218-968-11	RES-CHIP	18K	5%	1/16W	R5959	1-218-939-11	RES-CHIP	68	5%	1/16W
R5797	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6500	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5798	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6501	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5799	1-218-968-11	RES-CHIP	18K	5%	1/16W	R6502	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5800	1-218-967-11	RES-CHIP	15K	5%	1/16W	R6508	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5801	1-218-967-11	RES-CHIP	15K	5%	1/16W	R6511	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5802	1-218-968-11	RES-CHIP	18K	5%	1/16W	R6512	1-216-864-11	SHORT CHIP	0		
R5804	1-218-968-11	RES-CHIP	18K	5%	1/16W	R6513	1-218-853-11	METAL CHIP	1.8K	0.5%	1/10W
R5805	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R6514	1-218-861-11	METAL CHIP	3.9K	0.5%	1/10W
R5806	1-220-174-11	RES-CHIP	200	5%	1/16W	R6515	1-218-873-11	METAL CHIP	12K	0.5%	1/10W
R5807	1-218-941-81	RES-CHIP	100	5%	1/16W	R6516	1-218-877-11	METAL CHIP	18K	0.5%	1/10W
R5808	1-218-941-81	RES-CHIP	100	5%	1/16W	R6521	1-218-860-11	METAL CHIP	3.6K	0.5%	1/10W
R5809	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6522	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W
R5810	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R6523	1-218-861-11	METAL CHIP	3.9K	0.5%	1/10W
R5811	1-218-935-11	RES-CHIP	33	5%	1/16W	R6524	1-218-850-11	METAL CHIP	1.3K	0.5%	1/10W
R5812	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R6526	1-216-864-11	SHORT CHIP	0		
R5813	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6528	1-216-864-11	SHORT CHIP	0		
R5840	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6539	1-216-847-11	METAL CHIP	150K	5%	1/10W
R5843	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6540	1-216-839-11	METAL CHIP	33K	5%	1/10W
R5845	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6542	1-216-847-11	METAL CHIP	150K	5%	1/10W
R5847	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6543	1-216-837-11	METAL CHIP	22K	5%	1/10W
R5861	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6547	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5862	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6548	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5885	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6549	1-216-833-11	METAL CHIP	10K	5%	1/10W
R5886	1-218-965-11	RES-CHIP	10K	5%	1/16W	R6550	1-216-864-11	SHORT CHIP	0		

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

BDTR-2

G1

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R6551	1-216-833-11	METAL CHIP	10K 5% 1/10W	RB4212	1-239-409-11	NETWORK RESISTOR (CHIP) 47	
R6552	1-216-864-11	SHORT CHIP	0	RB4214	1-233-796-11	RES NETWORK	(1608)
R6554	1-216-864-11	SHORT CHIP	0	RB4215	1-233-796-11	RES NETWORK	(1608)
R6555	1-216-864-11	SHORT CHIP	0	RB4216	1-233-796-11	RES NETWORK	(1608)
R6556	1-216-864-11	SHORT CHIP	0	RB4217	1-233-796-11	RES NETWORK	(1608)
R6557	1-216-833-11	METAL CHIP	10K 5% 1/10W	RB5040	1-234-371-21	RES NETWORK 47	(1005X4)
R6558	1-216-864-11	SHORT CHIP	0	RB5041	1-234-371-21	RES NETWORK 47	(1005X4)
R6559	1-216-864-11	SHORT CHIP	0	RB5680	1-234-702-11	RES NETWORK 68	(1005X4)
R6560	1-216-864-11	SHORT CHIP	0	RB5681	1-234-702-11	RES NETWORK 68	(1005X4)
R6561	1-216-833-11	METAL CHIP	10K 5% 1/10W	RB5682	1-234-372-11	RES NETWORK 100	(1005X4)
R6562	1-216-847-11	METAL CHIP	150K 5% 1/10W	RB5683	1-234-372-11	RES NETWORK 100	(1005X4)
R6563	1-216-838-11	METAL CHIP	27K 5% 1/10W	RB5684	1-234-372-11	RES NETWORK 100	(1005X4)
R6565	1-216-833-11	METAL CHIP	10K 5% 1/10W	RB5685	1-234-372-11	RES NETWORK 100	(1005X4)
R6566	1-216-847-11	METAL CHIP	150K 5% 1/10W	RB5686	1-234-372-11	RES NETWORK 100	(1005X4)
R6567	1-216-847-11	METAL CHIP	150K 5% 1/10W	RB5687	1-234-702-11	RES NETWORK 68	(1005X4)
R6568	1-216-829-11	METAL CHIP	4.7K 5% 1/10W	RB5688	1-234-702-11	RES NETWORK 68	(1005X4)
R6569	1-216-833-11	METAL CHIP	10K 5% 1/10W	RB5689	1-239-409-11	NETWORK RESISTOR (CHIP) 47	
R6570	1-216-821-11	METAL CHIP	1K 5% 1/10W	< SWITCH >			
R6571	1-216-833-11	METAL CHIP	10K 5% 1/10W	S3000	1-572-921-11	SWITCH KEY BOARD	
R6572	1-216-833-11	METAL CHIP	10K 5% 1/10W	S3001	1-572-921-11	SWITCH KEY BOARD	
R6573	1-216-833-11	METAL CHIP	10K 5% 1/10W	< VARISTOR >			
R6574	1-216-797-11	METAL CHIP	10 5% 1/10W	VD4000	1-803-974-21	VARISTOR CHIP	(1608)
R6575	1-216-827-11	METAL CHIP	3.3K 5% 1/10W	VD4001	1-803-974-21	VARISTOR CHIP	(1608)
R6577	1-216-864-11	SHORT CHIP	0	VD4002	1-803-974-21	VARISTOR CHIP	(1608)
R6578	1-216-864-11	SHORT CHIP	0	VD4003	1-803-974-21	VARISTOR CHIP	(1608)
R6580	1-216-857-11	METAL CHIP	1M 5% 1/10W	VD4004	1-803-974-21	VARISTOR CHIP	(1608)
R6581	1-216-864-11	SHORT CHIP	0	< CRYSTAL >			
R6582	1-216-833-11	METAL CHIP	10K 5% 1/10W	X3000	1-813-531-11	OSCILLATOR CRYSTAL UNIT	
R6583	1-216-833-11	METAL CHIP	10K 5% 1/10W	X3001	1-813-806-21	OSCILLATOR CRYSTAL	
R6596	1-216-837-11	METAL CHIP	22K 5% 1/10W	X5040	1-813-547-11	QUARTZ CRYSTAL UNIT	
R6700	1-216-809-11	METAL CHIP	100 5% 1/10W	X5680	1-813-055-11	QUARTZ CRYSTAL UNIT	
R9032	1-216-864-11	SHORT CHIP	0	X5780	1-781-696-31	VIBRATOR CRYSTAL	
R9034	1-218-965-11	RES-CHIP	10K 5% 1/16W	*A-1237-756-A G1 Board Complete			
R9038	1-216-864-11	SHORT CHIP	0	(KDL-26/32P2520 & KDL-26/32P2530 only)			
R9041	1-218-903-11	METAL CHIP	220K 0.5% 1/10W	2-409-877-21 WASHER (3X10), RS TITE SPRING			
R9042	1-218-895-11	METAL CHIP	100K 0.5% 1/10W	< CAPACITOR >			
R9044	1-218-895-11	METAL CHIP	100K 0.5% 1/10W	C6000 Δ	1-113-924-11	CERAMIC 0.0047UF	20.00% 250V
R9045	1-218-893-11	METAL CHIP	82K 0.5% 1/10W	C6001 Δ	1-161-964-91	CERAMIC 0.0047UF	250V
R9046	1-218-887-11	METAL CHIP	47K 0.5% 1/10W	C6002 Δ	1-119-892-51	CERAMIC 470PF	10.00% 250V
R9047	1-218-903-11	METAL CHIP	220K 0.5% 1/10W	C6003 Δ	1-165-529-11	MYLAR 0.22UF	10 275V
R9048	1-216-864-11	SHORT CHIP	0	C6004 Δ	1-165-530-11	MYLAR 0.47UF	10 275V
R9049	1-216-864-11	SHORT CHIP	0	C6005 Δ	1-119-892-51	CERAMIC 470PF	10.00% 250V
< RESISTOR CHIP >				C6006 Δ	1-161-964-91	CERAMIC 0.0047UF	250V
RB4205	1-239-409-11	NETWORK RESISTOR (CHIP) 47		C6007 Δ	1-119-892-51	CERAMIC 470PF	10.00% 250V
RB4206	1-239-409-11	NETWORK RESISTOR (CHIP) 47		C6008 Δ	1-117-752-11	ELECT (BLOCK) 330UF	20% 450V
RB4208	1-239-409-11	NETWORK RESISTOR (CHIP) 47					
RB4209	1-239-409-11	NETWORK RESISTOR (CHIP) 47					
RB4211	1-239-409-11	NETWORK RESISTOR (CHIP) 47					

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G1

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C6009	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C6313	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V
C6010	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C6315	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C6011	1-107-888-11	ELECT 47UF	20% 25V	C6316	1-107-907-11	ELECT 22UF	20% 50V
C6012 Δ	1-119-892-51	CERAMIC 470PF	10.00% 250V	< CONNECTOR >			
C6013	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	CN6000 Δ	*1-691-960-11	PIN, CONNECTOR (PC BOARD) 3P	
C6014	1-107-905-11	ELECT 4.7UF	20% 50V	CN6002	*1-785-705-11	PIN, CONNECTOR (PC BOARD) 9P	
C6015	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN6003	*1-793-235-11	PIN, CONNECTOR (PC BOARD) 13P	
C6016	1-107-906-11	ELECT 10UF	20% 50V	CN6200	*1-785-703-21	PIN, CONNECTOR (PC BOARD) 6P	
C6018	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	CN6300	*1-564-507-11	PLUG, CONNECTOR 4P	
C6019	1-107-888-11	ELECT 47UF	20% 25V	< DIODE >			
C6020	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V	D6000	8-719-510-53	DIODE D4SB60L	
C6021	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D6004	8-719-082-03	DIODE MM3Z15VT1	
C6022	1-107-824-11	CERAMIC 220PF	5.00% 1KV	D6005	8-719-081-97	DIODE MMDL914T1	
C6023	1-107-824-11	CERAMIC 220PF	5.00% 1KV	D6006	8-719-082-03	DIODE MM3Z15VT1	
C6024	1-165-610-11	FILM 33000PF	3% 800V	D6007	8-719-082-03	DIODE MM3Z15VT1	
C6025	1-107-902-11	ELECT 1UF	20% 50V	D6008	8-719-979-64	DIODE UF4005/23	
C6027	1-107-902-11	ELECT 1UF	20% 50V	D6009	8-719-082-03	DIODE MM3Z15VT1	
C6028	1-107-930-11	ELECT 22UF	20% 100V	D6010	8-719-082-03	DIODE MM3Z15VT1	
C6029	1-128-960-31	ELECT 1500UF	20% 35V	D6011	6-501-505-01	DIODE FCH08U10	
C6030	1-128-951-21	ELECT 2200UF	20% 16V	D6012	8-719-310-56	DIODE FMB-29L	
C6031	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D6013	6-500-567-31	DIODE 10ERB20-TE3	
C6032	1-107-930-11	ELECT 22UF	20% 100V	D6014	6-501-505-01	DIODE FCH08U10	
C6033	1-165-744-11	ELECT 1200UF	20% 35V	D6015	6-500-567-31	DIODE 10ERB20-TE3	
C6034	1-165-744-11	ELECT 1200UF	20% 35V	D6018	8-719-310-56	DIODE FMB-29L	
C6039	1-128-950-21	ELECT 1000UF	20% 16V	D6019	8-719-083-70	DIODE UDZSTE-1727B	
C6200	1-112-744-52	MYLAR 1UF	10% 450V	D6023	8-719-083-87	DIODE UDZS-TE17-33B	
C6201	1-109-879-11	CERAMIC 22PF	5.00% 2KV	D6200	8-719-083-60	DIODE UDZSTE-174.7B	
C6202	1-107-905-11	ELECT 4.7UF	20% 50V	D6201	8-719-081-97	DIODE MMDL914T1	
C6203	1-107-906-11	ELECT 10UF	20% 50V	D6202	6-500-567-31	DIODE 10ERB20-TE3	
C6204	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6203	8-719-948-45	DIODE ERA22-08	
C6205	1-107-909-11	ELECT 47UF	20% 50V	D6204	8-719-080-75	DIODE M1FL20U-4063	
C6206	1-104-331-11	CERAMIC 0.0022UF	10.00% 1KV	D6300	8-719-069-55	DIODE UDZSTE-175.6B	
C6207	1-162-115-00	CERAMIC 330PF	10.00% 1KV	D6302	8-719-069-55	DIODE UDZSTE-175.6B	
C6208	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	< TERMINAL BOARD >			
C6209	1-119-892-51	CERAMIC 470PF	10.00% 250V	ET6000	1-537-770-21	TERMINAL BOARD, GROUND	
C6210	1-131-872-91	CERAMIC CHIP 1000PF	10% 630V	< FUSE >			
C6211	1-128-945-31	ELECT 1000UF	20% 10V	F6000 Δ	1-576-231-51	FUSE 4A 250V	
C6212	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	FH6000 Δ	1-533-725-11	FUSE HOLDER	
C6300	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V	< IC >			
C6301	1-126-960-11	ELECT 1UF	20.00% 50V	IC6000	6-705-810-01	IC MCZ3001DB	
C6302	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V	IC6001	6-709-368-01	IC MM1431ATT(CN)	
C6303	1-126-960-11	ELECT 1UF	20.00% 50V	IC6002	6-709-368-01	IC MM1431ATT(CN)	
C6304	1-128-952-31	ELECT 220UF	20.00% 25V	IC6200	6-709-368-01	IC MM1431ATT(CN)	
C6306	1-164-489-11	CERAMIC CHIP 0.22UF	10.00% 16V	IC6201	8-759-586-17	IC TL1431CZ-AP	
C6307	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V				
C6308	1-128-959-31	ELECT 1000UF	20.00% 35V				
C6309	1-128-959-31	ELECT 1000UF	20.00% 35V				
C6310	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V				
C6311	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V				
C6312	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G1

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
IC6300	8-759-831-57	IC TDA7495S		R6024	1-216-845-11	METAL CHIP 100K 5%	1/10W
< COIL >				R6025	1-216-833-11	METAL CHIP 10K 5%	1/10W
L6000	Δ 1-456-507-12	LINE FILTER COIL		R6026	1-216-833-11	METAL CHIP 10K 5%	1/10W
L6001	Δ 1-457-243-11	INDUCTOR 37MH		R6027	1-216-837-11	METAL CHIP 22K 5%	1/10W
L6004	1-406-971-11	INDUCTOR 10UH		R6028	1-218-823-11	METAL CHIP 100 0.5%	1/10W
L6005	1-406-971-11	INDUCTOR 10UH		R6029	1-216-837-11	METAL CHIP 22K 5%	1/10W
L6006	Δ 1-456-507-12	LINE FILTER COIL		R6030	1-249-393-11	CARBON 10 5%	1/4W
L6200	1-412-537-31	INDUCTOR 100UH		R6031	1-249-393-11	CARBON 10 5%	1/4W
< PHOTOCOUPLER >				R6033	1-216-821-11	METAL CHIP 1K 5%	1/10W
PH6000	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6035	1-216-833-11	METAL CHIP 10K 5%	1/10W
PH6001	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6036	1-216-833-11	METAL CHIP 10K 5%	1/10W
PH6002	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6037	1-216-821-11	METAL CHIP 1K 5%	1/10W
PH6200	6-600-187-01	PHOTO COUPLER PC123Y22JOOF		R6038	1-216-864-11	SHORT CHIP 0	
< PROTECTOR MODULE >				R6039	1-216-864-11	SHORT CHIP 0	
PS6000	Δ 1-533-596-21	IC LINK 4A 90V		R6040	1-245-494-21	METAL 2.2M 2%	1/4W
PS6001	Δ 1-533-596-21	IC LINK 4A 90V		R6041	1-245-494-21	METAL 2.2M 2%	1/4W
PS6002	Δ 1-533-595-31	IC LINK 3.15A 90V		R6042	1-216-817-11	METAL CHIP 470 5%	1/10W
< TRANSISTOR >				R6043	1-245-315-71	METAL OXIDE 0.1 5%	2W
Q6000	8-729-010-29	TRANSISTOR MSD601-RST1		R6044	1-216-864-11	SHORT CHIP 0	
Q6001	8-729-010-08	TRANSISTOR MSB710-R		R6045	1-245-315-71	METAL OXIDE 0.1 5%	2W
Q6002	8-729-010-29	TRANSISTOR MSD601-RST1		R6046	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
Q6003	6-551-545-01	TRANSISTOR 2SK3469-01MR-F111		R6047	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q6004	6-551-545-01	TRANSISTOR 2SK3469-01MR-F111		R6048	1-216-837-11	METAL CHIP 22K 5%	1/10W
Q6005	8-729-010-29	TRANSISTOR MSD601-RST1		R6049	1-216-837-11	METAL CHIP 22K 5%	1/10W
Q6006	8-729-010-25	TRANSISTOR MSD601-RT1		R6050	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q6007	8-729-010-05	TRANSISTOR MSB709-RT1		R6051	1-249-377-11	CARBON 0.47 5%	1/4W
Q6302	8-729-010-29	TRANSISTOR MSD601-RST1		R6052	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q6303	8-729-010-05	TRANSISTOR MSB709-RT1		R6053	1-216-821-11	METAL CHIP 1K 5%	1/10W
< RESISTOR >				R6054	1-216-833-11	METAL CHIP 10K 5%	1/10W
JR6313	1-216-295-91	SHORT CHIP 0		R6055	1-216-864-11	SHORT CHIP 0	
JR6314	1-216-295-91	SHORT CHIP 0		R6057	1-216-822-11	METAL CHIP 1.2K 5%	1/10W
JR6315	1-216-295-91	SHORT CHIP 0		R6058	1-216-833-11	METAL CHIP 10K 5%	1/10W
JR6316	1-216-295-91	SHORT CHIP 0		R6061	1-216-837-11	METAL CHIP 22K 5%	1/10W
R6002	Δ 1-219-759-11	METAL 1M 5% 1/2W		R6062	1-218-849-11	METAL CHIP 1.2K 0.5%	1/10W
R6009	Δ 1-202-933-61	FUSIBLE 0.1 10% 1/2W		R6063	1-218-868-11	METAL CHIP 7.5K 0.5%	1/10W
R6010	1-208-852-11	METAL CHIP 820K 0.5% 1/10W		R6064	1-218-847-11	METAL CHIP 1K 0.5%	1/10W
R6011	1-208-852-11	METAL CHIP 820K 0.5% 1/10W		R6066	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R6012	1-216-837-11	METAL CHIP 22K 5% 1/10W		R6068	1-260-332-51	CARBON 2.2K 5%	1/2W
R6013	1-208-852-11	METAL CHIP 820K 0.5% 1/10W		R6201	1-216-353-00	METAL OXIDE 2.2 5%	1W
R6016	1-216-833-11	METAL CHIP 10K 5% 1/10W		R6202	1-216-864-11	SHORT CHIP 0	
R6017	1-208-803-11	METAL CHIP 7.5K 0.5% 1/10W		R6203	1-216-864-11	SHORT CHIP 0	
R6018	1-218-881-11	METAL CHIP 27K 0.5% 1/10W		R6204	1-249-393-11	CARBON 10 5%	1/4W
R6020	1-218-823-11	METAL CHIP 100 0.5% 1/10W		R6205	1-243-725-21	METAL OXIDE 100K 5%	1W
R6022	1-218-875-11	METAL CHIP 15K 0.5% 1/10W		R6206	1-216-817-11	METAL CHIP 470 5%	1/10W
				R6207	1-216-821-11	METAL CHIP 1K 5%	1/10W
				R6208	1-216-864-11	SHORT CHIP 0	
				R6209	1-216-839-11	METAL CHIP 33K 5%	1/10W
				R6210	1-218-871-11	METAL CHIP 10K 0.5%	1/10W
				R6211	1-218-871-11	METAL CHIP 10K 0.5%	1/10W
				R6212	1-216-295-91	SHORT CHIP 0	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G1

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R6213	1-216-295-91	SHORT CHIP	0				
R6304	1-216-864-11	METAL CHIP	120K 5% 1/10W				
R6306	1-216-864-11	METAL CHIP	120K 5% 1/10W				
R6308	1-216-825-11	METAL CHIP	2.2K 5% 1/10W				
R6309	1-216-049-11	RES-CHIP	1K 5% 1/10W				
R6313	1-216-864-11	SHORT CHIP	0				
R6314	1-216-845-11	METAL CHIP	100K 5% 1/10W				
R6315	1-216-845-11	METAL CHIP	100K 5% 1/10W				
R6316	1-216-837-11	METAL CHIP	22K 5% 1/10W				
R6317	1-216-833-11	METAL CHIP	10K 5% 1/10W				
R6318	1-216-833-11	METAL CHIP	10K 5% 1/10W				
< TRANSFORMER >							
T6000	Δ 1-445-026-11	CONVERTER TRANSFORMER (PIT)					
T6001	Δ 1-445-027-11	CONVERTER TRANSFORMER (PIT)					
T6200	Δ 1-443-312-11	TRANSFORMER, CONVERTER (SBT)					
< VARISTOR >							
VD6000	Δ 1-804-995-11	VARISTOR					

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
MISCELLANEOUS							
	1-826-479-11	LOUDSPEAKER (4.2X15CM) (26/32P2520/30UK/AEP)		*1-910-032-61	CONNECTOR ASSY 14P (26P2520/30UK/AEP)		
	1-826-478-11	LOUDSPEAKER (4.2X24CM) (40P2530UK/AEP)			INVERTER-CN6002(G1), CN3004(B) (1)		
	8-597-585-10	TUNER, FSS BTP-HC401		*1-910-032-62	LVDS 30P (26/32P2520/30UK/AEP)		
	1-802-268-11	LCD PANEL (26 WXGA TFT) (26P2520/30UK/AEP)			CN3001(B)-PANEL(1)		
	1-802-237-21	LCD PANEL (32 WXGA TFT) (32P2520/30UK/AEP)		*1-910-033-22	CONNECTOR ASSY 4P (32P2520/30UK/AEP)		
					CN6300(G)-CN9856(H2) (1)		
	1-802-386-21	LCD PANEL (40 WXGA TFT) (40P2530UK/AEP)		*1-910-034-72	CONNECTOR ASSY 14P (40P2530UK/AEP)		
Δ	1-832-132-11	POWER SUPPLY CORD (26/32P2520/30/40P2530AEP)			INVERTER-CN6004(G2), CN3004(B) (1)		
Δ	1-832-170-11	POWER SUPPLY CORD (UK PLUG)		*1-910-034-96	FFC 20P FOLDED - CN3006(B)-CN2024(A) (1)		
		(26/32P2520/30/40P2530UK)		*1-910-035-95	LVDS 30P (40P2530UK/AEP)		
					CN3001(B)-PANEL(1)		
ACCESSORIES AND CONNECTORS				1-469-089-11	FILTER, CLAMP (FERRITE CORE)		
	*1-910-026-42	CONNECTOR ASSY 4P (26P2520/30UK/AEP)			(26/32P2520/30UK/AEP)		
		CN6300(G1)-CN9856(H2) (1)		1-469-778-11	CLAMP, FERRITE (26/30P2520/30UK/AEP)		
	*1-910-026-43	CONNECTOR ASSY 4P (40P2530UK/AEP)		1-469-778-21	CLAMP, FERRITE (40P2530UK/AEP)		
		CN6300(G)-CN9856(H2) (1)		*4-101-087-02	BAG. PROTECTION CROSS (26P2520UK/AEP)		
	*1-910-026-45	CONNECTOR ASSY 13P (26/32P2520/30UK/AEP)		1-830-570-41	CABLE, ANTENNA(WITH FILTER) (26P2520/30AEP)		
		CN6003(G1)-CN6500(B) (1)		*3-097-662-11	INSTRUCTION MANUAL (ENGLISH)		
					(26/32P2520/30/40P2530UK)		
	*1-910-026-46	CONNECTOR ASSY 14P (40P2530UK/AEP)		*3-097-662-21	INSTRUCTION MANUAL (GERMAN/FRENCH/ITALIAN/DUTCH) (26/32P2520/30/40P2530AEP)		
		CN6005(G2)-CN6500(B) (1)					
	*1-910-026-52	CONNECTOR ASSY 6P (40P2530UK/AEP)		*3-097-662-31	INSTRUCTION MANUAL (SPANISH/PORTUGUESE/GREEK) (26/32P2520/30/40P2530AEP)		
		CN6003(G2)-CN6501(B) (1)		*3-097-662-41	INSTRUCTION MANUAL (ENGLISH/RUSSIAN/POLISH) (26/32P2520/30/40P2530AEP)		
	*1-910-026-53	CONNECTOR ASSY 6P (26/32P2520/30UK/AEP)		*3-097-662-51	INSTRUCTION MANUAL (SWEDISH/DANISH/FINNISH/NORWEGIAN) (26/32P2520/30/40P2530AEP)		
		CN6200(G1)-CN6501(B) (1)					
	*1-910-026-57	CONNECTOR ASSY 9P					
		CN3000(B)-CN9855(H2) (1)		*3-097-665-11	INSTRUCTION MANUAL (ENGLISH) (26/32P2520/30UK)		
	*1-910-026-59	SPEAKER HARNESS 26 (26P2520/30UK/AEP)		*3-097-665-21	INSTRUCTION MANUAL (GERMAN/FRENCH/ITALIAN/DUTCH) (26/32P2520/30AEP)		
		CN9857(H2)-SPEAKERS(1)		*3-097-665-31	INSTRUCTION MANUAL (SPANISH/PORTUGUESE/GREEK) (26/32P2520/30AEP)		
	*1-910-026-60	SPEAKER HARNESS 32 (32P2520/30UK/AEP)					
		CN9857(H2)-SPEAKERS(1)		*3-097-665-41	INSTRUCTION MANUAL (ENGLISH/RUSSIAN/POLISH) (26/32P2520/30AEP)		
	*1-910-026-61	SPEAKER HARNESS 40 (40P2530UK/AEP)		*3-097-665-51	INSTRUCTION MANUAL (SWEDISH/DANISH/FINNISH/NORWEGIAN) (26/32P2520/30AEP)		
		CN9857(H2)-SPEAKERS(1)					
	*1-910-026-62	CONNECTOR ASSY 4P (32P2520/30UK/AEP)		REMOTE COMMANDER			
		CN3002(B)-CN9000(H1) (1)					
	*1-910-026-63	CONNECTOR ASSY 4P (26P2520/30UK/AEP)		1-479-847-11	REMOTE COMMANDER (RM-ED007)		
		CN3002(B)-CN9000(H1) (1)					
	*1-910-026-65	CONNECTOR ASSY 10P (26P2520/30UK/AEP)					
		CN3003(B)-CN9300(H3) (1)					
	*1-910-026-66	CONNECTOR ASSY 10P (32P2520/30UK/AEP)					
		CN3003(B)-CN9300(H3) (1)					
	*1-910-026-67	FFC 49P FOLDER - CN3005(B)-CN2022(A) (1)					
	*1-910-026-69	LVDS FIR-SHLD 30P (40P2530UK/AEP)					
		CN3001(B)-PANEL(1)					
	*1-910-026-71	CONNECTOR ASSY 4P (40P2530UK/AEP)					
		CN3002(B)-CN9000(H1) (1)					
	*1-910-026-72	CONNECTOR ASSY 10P (40P2530UK/AEP)					
		CN3003(B)-CN9300(H3) (1)					
	*1-910-032-60	CONNECTOR ASSY 14P (32P2520/30UK/AEP)					
		INVERTER-CN6002(G1), CN3004(B) (1)					

