


SECTION 5 EXPLODED VIEWS

NOTE :

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

5-1. CHASSIS

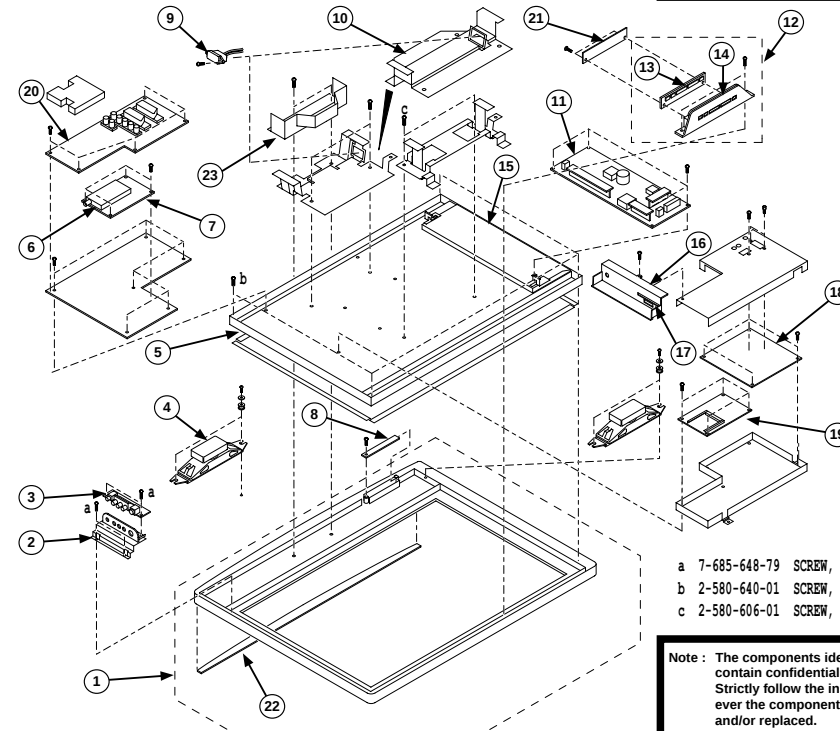

- a 7-685-648-79 SCREW, +BVT 3X12(S)TYPE2 IT-3
b 2-580-640-01 SCREW, +BVT2 4X16
c 2-580-606-01 SCREW, +PSW M5X8


Note : The components identified by mark  contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
1	X-2109-504-3	BEZEL ASSY (40VE) (40 inches)	22	11	*A-1184-357-A	G2A BOARD COMPLETE	
	X-2109-505-4	BEZEL ASSY (46VE) (46 inches)	22	12	X-2109-049-3	BUTTON,MULTI (C) ASSY	13, 14
2	*2-663-986-61	HOLDER, SIDE JACK (L)		13	2-663-977-01	BUTTON, MULTI	
3	*A-1196-585-A	H2E BOARD COMPLETE (40 inches)		14	2-663-978-22	COVER, BUTTON	
	*A-1192-085-A	H4E BOARD COMPLETE (46 inches)		15	*2-664-617-11	BRACKET, G2A	
4	1-826-362-11	LOUDSPEAKER(5.5X15.5CM) (40 inches)		16	*2-696-147-01	SIDE, TERMINAL BKT (C)	
	1-826-435-11	LOUDSPEAKER(13X7CM) (46 inches)		17	2-667-975-01	COVER, PCMCIA	
5	1-802-553-13	LCD PANEL (40INCH FHD TFT) (40 inches)		18	 *A-1196-582-A	BE BOARD COMPLETE	
	1-802-552-12	LCD PANEL (46INCH FHD TFT) (46 inches)		19	*A-1173-179-A	FEE BOARD COMPLETE	
6	8-597-598-00	TUNER UNIT, DIGITAL BTD-HF441Z		20	*A-1184-346-A	AE BOARD COMPLETE	
7	*A-1173-184-A	TUE BOARD COMPLETE WAX2		21	*A-1196-584-A	H1E BOARD COMPLETE	
8	*A-1176-515-A	H4E BOARD COMPLETE		22	2-671-014-01	ORNAMENTAL PANEL (40VE) (40 inches)	
9	 1-819-729-14	INLET, AC (WITH NOISE FILTER)			2-671-015-01	ORNAMENTAL PANEL (46VE) (46 inches)	
10	X-2109-168-4	BOTTOM FRAME(40)ASSY		23	2-687-624-11	COVER, UNDER (L)	

Note : Les composants identifiés par un triangle et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shape and marked Δ are critical for safe. Replace only with the part number specified in the parts list.

5-2. REAR COVER, STAND and VESA BRACKET

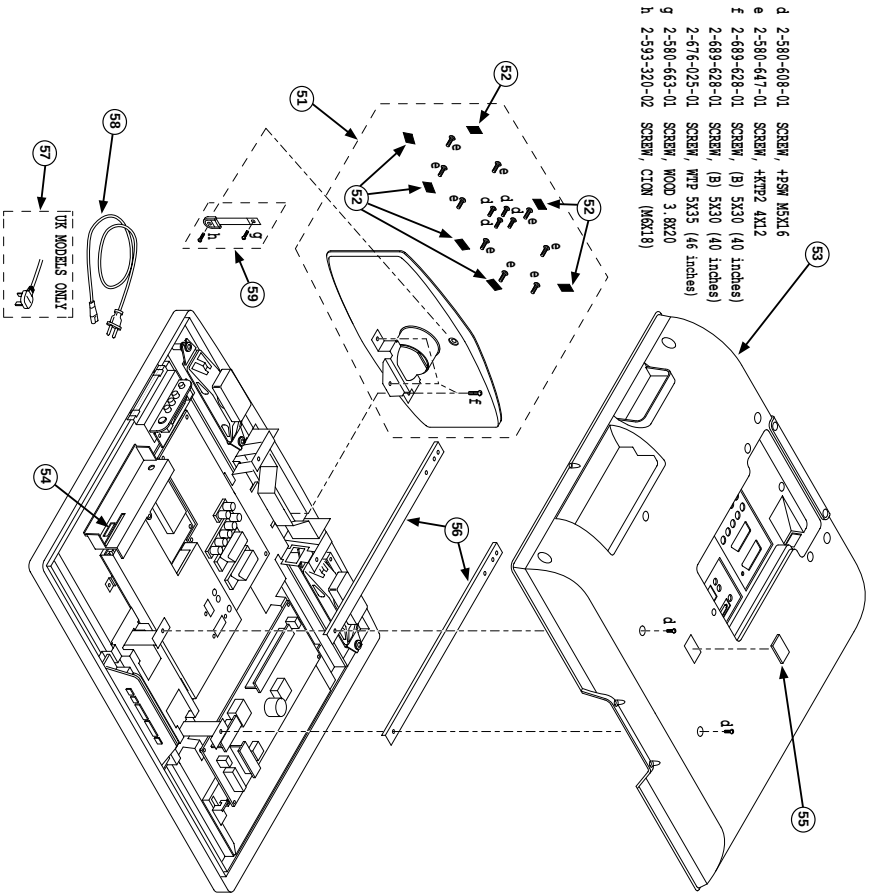

REF.NO.	PART NO.	DESCRIPTION	REMARK	REF.NO.	PART NO.	DESCRIPTION	REMARK
51	X-2149-932-2	STAND ASSY (M/L) (40 inches)	52	56	X-2109-099-3	VESA BRACKET (40) L ASSY (40 inches)	
	X-2109-507-2	STAND ASSY (L) B (46 inches)	52		X-2109-099-3	VESA BRACKET (40) R ASSY (40 inches)	
52	2-675-191-02	FOOT			X-2109-250-5	ARM, VESA (46) L ASSY (46 inches)	
53	2-886-512-41	COVER, REAR (40) (40 inches)			X-2109-251-5	ARM, VESA (46) R ASSY (46 inches)	
	2-679-182-51	COVER, REAR (46) (46 inches)		57	Δ 1-832-210-11	POWER-SUPPLY CORD SET (UK)	
54	2-689-737-01	COVER, MS		58	Δ 1-832-211-11	POWER-SUPPLY CORD SET (AEP)	
55	2-664-636-11	COVER, ECS		59	X-2102-511-3	BAG ASSY, RODDER LOCK	

SECTION 6
ELECTRICAL PARTS LIST

PARTS LISTING TABLE OF CONTENTS

FEE BOARD COMPLETE Parts List :	Page
TUE BOARD COMPLETE Parts List :	60
H46 BOARD COMPLETE Parts List :	63
G2A BOARD COMPLETE Parts List :	(46 inches only)..... 65
BE BOARD COMPLETE Parts List :	66
AE BOARD COMPLETE Parts List :	69
H1E BOARD COMPLETE Parts List :	83
H2E BOARD COMPLETE Parts List :	(40 inches only)..... 90
H4E BOARD COMPLETE Parts List :	91
ACCESSORIES AND CONNECTORS :	92
REMOTE COMMANDER:	92

Note : Items marked "XX" are not stocked since they are seldom required for routine service.
Some delay should be anticipated when ordering these items.
Parts indicated (XX) on the Schematic Diagram are not used in this model and therefore do not appear in the Parts List.

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
* A-1173-179-A FEE COMPLETE							
< CAPACITOR >							
C3100	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C3208	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3101	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3209	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3102	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3210	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3103	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3211	1-117-720-11	CERAMIC CHIP 4.7UF	10% 1
C3104	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3212	1-117-681-11	ELECT CHIP 100UF	20.00% 1
C3105	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3214	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3106	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3215	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 5
C3107	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3216	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3108	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3217	1-117-720-11	CERAMIC CHIP 4.7UF	10% 1
C3109	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3218	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3110	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3219	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3111	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3220	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3112	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3300	1-117-720-11	CERAMIC CHIP 4.7UF	10% 1
C3113	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3301	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3114	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3302	1-117-720-11	CERAMIC CHIP 4.7UF	10% 1
C3116	1-124-779-00	ELECT CHIP 100F	20.00% 16V	C3303	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3120	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3306	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3121	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3307	1-117-720-11	CERAMIC CHIP 4.7UF	10% 1
C3122	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3308	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3123	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3309	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3124	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3310	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3125	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3312	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3126	1-100-907-11	CERAMIC CHIP 0.1UF	0.50PF 50V	C3315	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3130	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3316	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3131	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3320	1-117-720-11	CERAMIC CHIP 4.7UF	10% 1
C3132	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3322	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 5
C3133	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C3323	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3134	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3324	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3135	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3326	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3136	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C3328	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3137	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3402	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3138	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3403	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3139	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3404	1-164-945-81	CERAMIC CHIP 0.01UF	10.00% 1
C3140	1-124-779-00	ELECT CHIP 100F	20.00% 16V	C3405	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3141	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3409	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 1
C3142	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3410	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3143	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3411	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 5
C3144	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3412	1-165-908-11	CERAMIC CHIP 1UF	10% 1
C3145	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3413	1-165-908-11	CERAMIC CHIP 0.1UF	10% 1
C3200	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3414	1-117-720-11	CERAMIC CHIP 4.7UF	10% 1
C3201	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3415	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3202	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3417	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3203	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3428	1-112-066-11	CERAMIC CHIP 100F	10% 1
C3205	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3432	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1
C3206	1-165-908-11	CERAMIC CHIP 1UF	10V	C3436	1-117-681-11	ELECT CHIP 1000F	20.00% 1
C3207	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3439	1-165-681-21	ELECT CHIP 180UF	20% 1
C3208	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3442	1-164-882-11	CERAMIC CHIP 220PF	5.00% 1
C3209	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3443	1-107-813-11	CERAMIC CHIP 0.02UF	10.00% 1
C3206	1-165-908-11	CERAMIC CHIP 1UF	10V	C3445	1-165-671-21	ELECT CHIP 470UF	20% 6
C3207	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3446	1-100-907-11	CERAMIC CHIP 0.1UF	10% 1

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
C3502	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	FB3201	1-400-244-11	FERRITE	00H
C3503	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3300	1-469-869-21	FERRITE	00H
C3505	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3301	1-469-869-21	FERRITE	00H
C3506	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V	FB3402	1-400-244-11	FERRITE	00H
C3605	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	FB3403	1-400-834-11	FERRITE	00H
C3606	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	FB3407	1-469-869-21	FERRITE	00H
C3607	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	FB3408	1-400-461-21	FERRITE	00H
C3609	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	FB3409	1-400-461-21	FERRITE	00H
C3610	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3410	1-400-461-21	FERRITE	00H
C3611	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3411	1-400-461-21	FERRITE	00H
< CONNECTOR >				FB3412	1-400-834-11	FERRITE	00H
CN3300	* 1-793-769-22	CONNECTOR, CARD (POMTIA CARD)		FB3413	1-400-834-11	FERRITE	00H
CN3400	* 1-820-255-51	FFC/PPC CONNECTOR (21F) 20P		FB3414	1-400-834-11	FERRITE	00H
CN3401	* 1-819-475-11	HEADER ASSEMBLY FOR FMB 7P		FB3415	1-400-834-11	FERRITE	00H
CN3600	* 1-820-235-21	HEADER ASSEMBLY 30P		FB3416	1-400-834-11	FERRITE	00H
CN3601	* 1-820-209-11	MEMORY STICK CONNECTOR		FB3417	1-400-834-11	FERRITE	00H
CN3610	* 1-780-336-11	DATA TERMINAL		FB3418	1-400-834-11	FERRITE	00H
CN3611	* 1-780-336-11	DATA TERMINAL		FB3419	1-400-834-11	FERRITE	00H
< DIODE >				FB3601	1-469-869-21	FERRITE	00H
D3400	6-501-060-01	DIODE STPS2125U		FB3602	1-469-869-21	FERRITE	00H
D3401	6-500-294-01	DIODE PIZ-T25-3.98		FB3603	1-469-869-21	FERRITE	00H
D3503	8-719-066-11	DIODE 1R5184-115		FB3604	1-400-834-11	FERRITE	00H
< FERRITE BEAD >				FB3605	1-400-834-11	FERRITE	00H
FB3103	1-400-834-11	FERRITE	00H	FB3606	1-400-834-11	FERRITE	00H
FB3104	1-400-834-11	FERRITE	00H	FB3607	1-400-834-11	FERRITE	00H
FB3105	1-400-834-11	FERRITE	00H	FB3612	1-400-834-11	FERRITE	00H
FB3106	1-400-834-11	FERRITE	00H	FB3613	1-400-834-11	FERRITE	00H
FB3107	1-400-834-11	FERRITE	00H	FB3614	1-400-834-11	FERRITE	00H
FB3108	1-400-834-11	FERRITE	00H	FB3615	1-400-834-11	FERRITE	00H
FB3109	1-400-834-11	FERRITE	00H	FB3616	1-400-834-11	FERRITE	00H
FB3110	1-400-834-11	FERRITE	00H	FB3617	1-400-834-11	FERRITE	00H
FB3111	1-400-834-11	FERRITE	00H	FB3618	1-400-834-11	FERRITE	00H
FB3113	1-400-834-11	FERRITE	00H	FB3619	1-400-834-11	FERRITE	00H
FB3114	1-469-869-21	FERRITE	00H	FB3620	1-400-834-11	FERRITE	00H
FB3115	1-400-244-11	FERRITE	00H	< IC >			
FB3116	1-400-244-11	FERRITE	00H	IC3300	6-709-214-01	IC UPD61123F1-100-PA3-A	
FB3117	1-469-869-21	FERRITE	00H	IC3200	6-707-809-01	IC EDD0216AAT-68-B	
FB3118	1-469-869-21	FERRITE	00H	IC3201	6-708-916-01	IC ICS7150MFT	
FB3119	1-400-807-21	FERRITE	00H	IC3206	6-705-336-01	IC K9F780800C-PC00T	
FB3120	1-400-807-21	FERRITE	00H	IC3301	6-707-853-01	IC TC74LC0541FT (EX)	
FB3121	1-400-807-21	FERRITE	00H	IC3301	8-759-844-48	IC 74LVCS41A9W	
FB3122	1-400-807-21	FERRITE	00H	IC3302	6-707-853-01	IC TC74LC0541FT (EX)	
FB3123	1-400-807-21	FERRITE	00H	IC3302	8-759-844-48	IC 74LVCS41A9W	
FB3125	1-469-869-21	FERRITE	00H	IC3327	1-400-244-11	IC TC74LC0541FT (EX)	
FB3126	1-400-244-11	FERRITE	00H	IC3304	6-707-853-01	IC TC74LVCS41A9W	
FB3127	1-400-244-11	FERRITE	00H	IC3304	8-759-844-48	IC 74LVCS41A9W	
FB3200	1-400-244-11	FERRITE	00H				

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
IC3305	6-707-853-01	IC TC74LCX541FT (EKK)		R3129	1-220-174-11	RES-CHIP	200 5% 1/16W
IC3305	8-759-644-48	IC 74LVCS412PW		R3130	1-220-174-11	RES-CHIP	200 5% 1/16W
IC3306	6-707-853-01	IC TC74LCX541FT (EKK)		R3131	1-220-174-11	RES-CHIP	200 5% 1/16W
IC3306	8-759-644-48	IC 74LVCS412PW		R3132	1-220-174-11	RES-CHIP	200 5% 1/16W
IC3308	6-707-853-01	IC TC74LCX541FT (EKK)		R3133	1-208-671-11	METAL CHIP	330 0.5% 1/16W
IC3308	8-759-644-48	IC 74LVCS412PW		R3134	1-208-883-81	METAL CHIP	680 0.5% 1/16W
IC3311	6-707-850-01	IC TC74LCX245FT (EKK)		R3136	1-208-675-11	METAL CHIP	470 0.5% 1/16W
IC3311	8-759-298-91	IC 74LVW245BW-T		R3138	1-218-990-81	SHORT CHIP	0
IC3312	6-707-853-01	IC TC74LCX541FT (EKK)		R3142	1-218-937-11	RES-CHIP	47 5% 1/16W
IC3316	6-708-132-01	IC 74LVCA44PW		R3143	1-218-937-11	RES-CHIP	47 5% 1/16W
IC3317	6-706-482-01	IC TC7SB00FV(TS801JF)		R3144	1-218-937-11	RES-CHIP	47 5% 1/16W
IC3402	6-703-790-01	IC LM323MK-H/15000395		R3146	1-218-965-11	RES-CHIP	10K 5% 1/16W
IC3404	6-706-106-01	IC NCP1117STAT3		R3147	1-218-965-11	RES-CHIP	10K 5% 1/16W
IC3405	6-708-603-01	IC PQ070XNA12PH		R3148	1-218-965-11	RES-CHIP	10K 5% 1/16W
IC3406	6-707-078-01	IC L5973ADPR		R3149	1-218-990-81	SHORT CHIP	0
IC3501	6-703-175-01	IC PS13629UL		R3150	1-218-965-11	RES-CHIP	10K 5% 1/16W
< CONT. >				R3151	1-218-965-11	RES-CHIP	10K 5% 1/16W
L3100	1-414-396-11	INDUCTOR 100H		R2000	1-218-941-11	RES-CHIP	100 5% 1/16W
L3400	1-419-353-21	INDUCTOR 100H		R3201	1-218-941-11	RES-CHIP	100 5% 1/16W
L3401	1-424-924-21	COIL, POWER		R2002	1-218-939-11	RES-CHIP	68 5% 1/16W
< TRANSISTOR >				R3203	1-218-941-81	RES-CHIP	100 5% 1/16W
Q3409	8-729-010-05	TRANSISTOR MS8709-BT1		R2004	1-218-941-81	RES-CHIP	100 5% 1/16W
Q3501	8-729-027-43	TRANSISTOR DTC114EKA-T146		R3205	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3502	8-729-027-43	TRANSISTOR DTC114EKA-T146		R2007	1-218-953-11	RES-CHIP	1K 5% 1/16W
< RESISTOR >				R3209	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3100	1-218-965-11	RES-CHIP	10K 5% 1/16W	R3210	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3101	1-218-941-81	RES-CHIP	100 5% 1/16W	R3212	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3102	1-218-941-81	RES-CHIP	100 5% 1/16W	R3214	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3103	1-218-941-81	RES-CHIP	100 5% 1/16W	R3217	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3104	1-218-941-81	RES-CHIP	100 5% 1/16W	R3218	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3105	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R3220	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3106	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R3222	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3109	1-218-941-81	RES-CHIP	100 5% 1/16W	R3227	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3110	1-218-941-81	RES-CHIP	100 5% 1/16W	R3226	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3111	1-218-941-81	RES-CHIP	100 5% 1/16W	R3229	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3112	1-218-941-81	RES-CHIP	100 5% 1/16W	R3230	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3113	1-218-965-11	RES-CHIP	10K 5% 1/16W	R3233	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3114	1-218-965-11	RES-CHIP	10K 5% 1/16W	R3235	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3115	1-218-965-11	RES-CHIP	10K 5% 1/16W	R3237	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R3117	1-218-965-11	RES-CHIP	10K 5% 1/16W	R3238	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3119	1-218-990-81	SHORT CHIP	0	R3239	1-218-965-11	RES-CHIP	10K 5% 1/16W
R3120	1-218-990-81	SHORT CHIP	0	R3240	1-218-939-11	RES-CHIP	68 5% 1/16W
R3125	1-218-937-11	RES-CHIP	47 5% 1/16W	R3242	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3126	1-218-990-81	SHORT CHIP	0	R3244	1-218-941-81	RES-CHIP	100 5% 1/16W
R3127	1-220-174-11	RES-CHIP	200 5% 1/16W	R3254	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3128	1-220-174-11	RES-CHIP	200 5% 1/16W				

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
R3235	1-218-933-11	RES-CHIP	1K 5% 1/1.6W	R3520	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R3258	1-218-941-81	RES-CHIP	100 5% 1/1.6W	R3522	1-218-941-81	RES-CHIP	100 5% 1/1.6W
R3259	1-218-933-11	RES-CHIP	1K 5% 1/1.6W	R3534	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R3263	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3600	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R3264	1-218-949-11	RES-CHIP	470 5% 1/1.6W	R3601	1-218-933-11	RES-CHIP	1K 5% 1/1.6W
R3265	1-218-949-11	RES-CHIP	470 5% 1/1.6W	R3602	1-218-941-81	RES-CHIP	100 5% 1/1.6W
R3300	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3603	1-218-941-81	RES-CHIP	100 5% 1/1.6W
R3301	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3604	1-218-961-11	RES-CHIP	4.7K 5% 1/1.6W
R3302	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3609	1-218-941-81	RES-CHIP	100 5% 1/1.6W
R3303	1-218-933-11	RES-CHIP	1K 5% 1/1.6W	R3610	1-218-961-11	RES-CHIP	4.7K 5% 1/1.6W
R3308	1-218-941-81	RES-CHIP	100 5% 1/1.6W	R3611	1-218-961-11	RES-CHIP	4.7K 5% 1/1.6W
R3310	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3612	1-218-990-81	SHORT CHIP	0
R3311	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3613	1-218-990-81	SHORT CHIP	0
R3312	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3616	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R3313	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3617	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R3314	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3623	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R3317	1-218-961-11	RES-CHIP	4.7K 5% 1/1.6W	R3628	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R3321	1-218-941-81	RES-CHIP	100 5% 1/1.6W	R3628	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R3324	1-218-941-81	RES-CHIP	100 5% 1/1.6W	R3647	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R3329	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3648	1-218-941-81	RES-CHIP	100 5% 1/1.6W
R3330	1-218-939-11	RES-CHIP	68 5% 1/1.6W	R3649	1-218-941-81	RES-CHIP	100 5% 1/1.6W
R3331	1-218-939-11	RES-CHIP	68 5% 1/1.6W	R3650	1-218-941-81	RES-CHIP	100 5% 1/1.6W
R3332	1-218-939-11	RES-CHIP	68 5% 1/1.6W	R3651	1-218-941-81	RES-CHIP	100 5% 1/1.6W
R3333	1-218-939-11	RES-CHIP	68 5% 1/1.6W	R3652	1-218-961-11	RES-CHIP	4.7K 5% 1/1.6W
R3334	1-218-939-11	RES-CHIP	68 5% 1/1.6W	R3653	1-218-949-11	RES-CHIP	150 5% 1/1.6W
R3335	1-218-939-11	RES-CHIP	68 5% 1/1.6W	R3654	1-218-943-11	RES-CHIP	150 5% 1/1.6W
R3400	1-218-933-11	RES-CHIP	1K 5% 1/1.6W	R3655	1-218-943-11	RES-CHIP	150 5% 1/1.6W
R3401	1-208-683-11	METAL CHIP	1K 0.5% 1/1.6W	< RESISTOR CHIP >			
R3406	1-218-935-11	RES-CHIP	33 5% 1/1.6W	< CRYSTAL >			
R3407	1-208-683-11	METAL CHIP	1K 0.5% 1/1.6W	R3200	1-234-372-11	RES, NETWORK	100 (100SX4)
R3418	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3201	1-234-372-11	RES, NETWORK	100 (100SX4)
R3419	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	R3202	1-234-372-11	RES, NETWORK	100 (100SX4)
R3425	1-220-174-11	RES-CHIP	200 5% 1/1.6W	R3203	1-234-402-11	RES, NETWORK	68 (100SX4)
R3426	1-208-683-11	METAL CHIP	1K 0.5% 1/1.6W	R3204	1-234-402-11	RES, NETWORK	68 (100SX4)
R3430	1-218-933-11	RES-CHIP	1K 5% 1/1.6W	R3206	1-234-372-11	RES, NETWORK	100 (100SX4)
R3432	1-218-961-11	RES-CHIP	4.7K 5% 1/1.6W	R3207	1-234-372-11	RES, NETWORK	100 (100SX4)
R3433	1-208-905-11	METAL CHIP	5.6K 0.5% 1/1.6W	R3208	1-234-402-11	RES, NETWORK	68 (100SX4)
R3434	1-208-906-81	METAL CHIP	6.2K 0.5% 1/1.6W	R3209	1-234-402-11	RES, NETWORK	68 (100SX4)
R3435	1-208-703-11	METAL CHIP	6.8K 0.5% 1/1.6W	< CAPACITOR >			
R3436	1-218-937-11	RES-CHIP	47 5% 1/1.6W	X3200	1-813-055-11	QUARTZ CRYSTAL UNIT	
R3437	1-218-990-81	SHORT CHIP	0	* A-1173-184-A TUECOMPLETE			
R3473	1-218-945-11	RES-CHIP	220 5% 1/1.6W	< CAPACITOR >			
R3504	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	C3803	1-100-565-91	CERAMIC CHIP	0.10UF 10.00K 2
R3508	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	C3814	1-100-907-11	CERAMIC CHIP	0.10UF 10K 1
R3511	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	C3815	1-117-681-11	ELECT CHIP	1000PF 20.00K 3
R3513	1-218-965-11	RES-CHIP	10K 5% 1/1.6W	C3819	1-100-907-11	CERAMIC CHIP	0.10UF 10K 1
R3514	1-218-941-81	RES-CHIP	100 5% 1/1.6W	C3821	1-117-681-11	ELECT CHIP	1000PF 20.00K 3
R3515	1-218-933-11	RES-CHIP	1K 5% 1/1.6W				
R3518	1-218-965-11	RES-CHIP	10K 5% 1/1.6W				
R3519	1-218-961-11	RES-CHIP	4.7K 5% 1/1.6W				

REF.NO.	PART.NO.	DESCRIPTION	REMARK	REF.NO.	PART.NO.	DESCRIPTION	REMARK
C3834	1-165-908-11	CERAMIC CHIP 10P	10% 10V	D3900	< DIODE >		
C3900	1-100-611-91	CERAMIC CHIP 220P	20% 6.3V		8-719-083-87	DIODE UDZANPTE-1133B	
C3901	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V		< FERRITE BEAD >		
C3902	1-164-947-11	CERAMIC CHIP 0.01UF	50V		< FILTER >		
C3903	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V		FB3901	1-469-868-21	FERRITE 00H
C3904	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3902	1-469-869-21	FERRITE 00H	
C3906	1-164-947-11	CERAMIC CHIP 0.01UF	50V	FB3903	1-469-869-21	FERRITE 00H	
C3907	1-135-366-11	ELECT CHIP 1000P	20% 16V	FB3909	1-469-869-21	FERRITE 00H	
C3909	1-128-991-21	ELECT CHIP 100P	20% 50V	< IC >			
C3910	1-126-204-11	ELECT CHIP 470P	20.00% 16V	IC3802	6-706-106-01	IC MCP1115AT3	
C3911	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	IC3900	6-709-257-01	IC 74VLC066PW	
C3914	1-164-947-11	CERAMIC CHIP 0.01UF	50V	< COIL >			
C3917	1-117-681-11	ELECT CHIP 1000P	20.00% 16V	L3804	1-400-175-21	INDUCTOR 470H	
C3918	1-165-667-21	ELECT CHIP 1000P	20% 6.3V	L3805	1-410-993-42	INDUCTOR 10H	
C3919	1-165-667-21	ELECT CHIP 1000P	20% 6.3V	L3900	1-412-006-31	INDUCTOR 100H	
C3920	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	L3902	1-424-924-21	COIL POWER	
C3921	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	L3903	1-410-993-42	INDUCTOR 10H	
C3923	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	< TRANSISTOR >			
C3924	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	Q3900	8-729-027-43	TRANSISTOR DTC114EZA-T146	
C3926	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	Q3901	6-550-237-01	TRANSISTOR 2SC56872LQ/R	
C3927	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	Q3902	6-550-237-01	TRANSISTOR 2SC56872LQ/R	
C3929	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	Q3903	6-550-871-01	TRANSISTOR 2SM2048TL Q/R	
C3930	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	Q3904	6-550-871-01	TRANSISTOR 2SM2048TL Q/R	
C3931	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	Q3905	6-550-871-01	TRANSISTOR 2SM2048TL Q/R	
C3932	1-115-566-11	CERAMIC CHIP 4.70P	10.00% 10V	Q3906	6-550-237-01	TRANSISTOR 2SC56872LQ/R	
C3933	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	Q3907	6-550-237-01	TRANSISTOR 2SM207972LQ/R	
C3935	1-117-681-11	ELECT CHIP 1000P	20.00% 16V	< RESISTOR >			
C3937	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	R3810	1-208-683-11	METAL CHIP 1K 0.5% 1/16W	
C3941	1-164-852-11	CERAMIC CHIP 122P	5.00% 50V	R3903	1-218-953-11	RES-CHIP 1K 5% 1/16W	
C3942	1-164-852-11	CERAMIC CHIP 122P	5.00% 50V	R3904	1-218-937-11	RES-CHIP 47 5% 1/16W	
C3945	1-115-566-11	CERAMIC CHIP 4.70P	10.00% 10V	R3906	1-216-821-11	METAL CHIP 1K 5% 1/10W	
C3946	1-115-566-11	CERAMIC CHIP 4.70P	10.00% 10V	R3907	1-218-973-11	RES-CHIP 47K 5% 1/16W	
C3947	1-164-852-11	CERAMIC CHIP 122P	5.00% 50V	R3908	1-218-937-11	RES-CHIP 47 5% 1/16W	
C3948	1-164-852-11	CERAMIC CHIP 122P	5.00% 50V	R3909	1-218-965-11	RES-CHIP 10K 5% 1/16W	
C3950	1-100-611-91	CERAMIC CHIP 220P	20% 6.3V	R3911	1-218-990-81	SHORT CHIP 0	
C3951	1-128-405-11	ELECT CHIP 220P	20% 50V	< CONNECTOR >			
C3952	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	R3902	1-218-938-11	RES-CHIP 56 5% 1/16W	
C3953	1-100-053-21	ELECT CHIP 220P	20% 6.3V	R3903	1-218-953-11	RES-CHIP 1K 5% 1/16W	
C3954	1-164-866-11	CERAMIC CHIP 47P	5.00% 50V	R3904	1-218-937-11	RES-CHIP 47 5% 1/16W	
C3955	1-164-936-11	CERAMIC CHIP 680P	10.00% 50V	R3906	1-216-821-11	METAL CHIP 1K 5% 1/10W	
C3956	1-164-936-11	CERAMIC CHIP 680P	10.00% 50V	R3907	1-218-973-11	RES-CHIP 47K 5% 1/16W	
CN3802	1-819-339-11	HEADER ASSEMBLY FOR PWB 12P		R3908	1-218-937-11	RES-CHIP 47 5% 1/16W	
CN3900	1-695-915-11	TAB (CONTACT)		R3909	1-218-965-11	RES-CHIP 10K 5% 1/16W	
CN3901	* 1-820-235-21	HEADER ASSEMBLY 30P		R3911	1-218-990-81	SHORT CHIP 0	
CN3903	* 1-819-337-11	HEADER ASSEMBLY FOR PWB 10P					
CN3904	* 1-819-474-11	HEADER ASSEMBLY FOR PWB 6P					
CN3907	* 1-780-336-11	BAZEH TERMINAL					

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R3913	1-218-965-11	RES-CHIP	10K 5% 1/16W	TU3901	8-597-596-00	TUNER UNIT, DIGITAL, BTD-HF4412	* A-1192-085-A H46 COMPLETE (46 inches only)
R3915	1-112-652-11	CERAMIC CHIP 1000PF	5% 50V				
R3918	1-218-941-81	RES-CHIP	100 5% 1/16W				
R3919	1-218-941-81	RES-CHIP	100 5% 1/16W				
R3921	1-218-941-81	RES-CHIP	100 5% 1/16W				
R3922	1-218-941-81	RES-CHIP	100 5% 1/16W	< CAPACITOR >			
R3924	1-218-933-11	RES-CHIP	22 5% 1/16W	C201	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%
R3925	1-218-933-11	RES-CHIP	22 5% 1/16W	C202	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%
R3926	1-218-941-81	RES-CHIP	100 5% 1/16W	C203	1-127-573-11	CERAMIC CHIP 1UF	10%
R3927	1-218-965-11	RES-CHIP	10K 5% 1/16W	C204	1-127-573-11	CERAMIC CHIP 1UF	10%
R3929	1-218-990-81	SHORT CHIP	0	C205	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%
R3930	1-218-990-81	SHORT CHIP	0	C206	1-125-889-11	CERAMIC CHIP 2.2UF	10%
R3938	1-218-941-81	RES-CHIP	100 5% 1/16W	C207	1-125-889-11	CERAMIC CHIP 2.2UF	10%
R3943	1-218-949-11	RES-CHIP	470 5% 1/16W	C208	1-125-889-11	CERAMIC CHIP 2.2UF	10%
R3945	1-218-953-11	RES-CHIP	1K 5% 1/16W	C209	1-162-927-11	CERAMIC CHIP 100PF	5.00%
R3946	1-218-949-11	RES-CHIP	470 5% 1/16W	C210	1-164-227-11	CERAMIC CHIP 0.022UF	10.00%
R3947	1-218-929-11	RES-CHIP	10 5% 1/16W	C211	1-162-927-11	CERAMIC CHIP 100PF	5.00%
R3948	1-218-929-11	RES-CHIP	10 5% 1/16W	C212	1-164-227-11	CERAMIC CHIP 0.022UF	10.00%
R3950	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	C215	1-115-416-11	CERAMIC CHIP 0.001UF	5.00%
R3951	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	< CONNECTOR >			
R3952	1-218-937-11	RES-CHIP	47 5% 1/16W	CH201	1-820-192-11	HEADER ASSEMBLY (PRINT PWB)15P	
R3953	1-218-941-81	RES-CHIP	100 5% 1/16W	< DIODE >			
R3958	1-218-957-11	RES-CHIP	2.2K 5% 1/16W	D201	8-719-070-63	DIODE PZL0B-115	
R3959	1-218-953-11	RES-CHIP	1K 5% 1/16W	D202	8-719-070-63	DIODE PZL0B-115	
R3960	1-218-953-11	RES-CHIP	1K 5% 1/16W	D203	8-719-070-63	DIODE PZL0B-115	
R3971	1-218-969-11	RES-CHIP	22K 5% 1/16W	D204	8-719-070-63	DIODE PZL0B-115	
R3973	1-218-990-81	SHORT CHIP	0	D205	8-719-070-63	DIODE PZL0B-115	
R3974	1-218-990-81	SHORT CHIP	0	D206	8-719-070-63	DIODE PZL0B-115	
R3980	1-218-941-81	RES-CHIP	100 5% 1/16W	< SOCKET >			
R3981	1-218-933-11	RES-CHIP	22 5% 1/16W	J201	1-780-368-11	S TERMINAL BLOCK (RIGHT ANGLE)	
R3982	1-218-953-11	RES-CHIP	1K 5% 1/16W	J202	1-815-325-11	JACK	
R3983	1-218-990-81	SHORT CHIP	0	< RESISTOR >			
R3984	1-218-990-81	SHORT CHIP	0	R201	1-216-864-11	SHORT CHIP	0
R3985	1-218-990-81	SHORT CHIP	0	R202	1-216-864-11	SHORT CHIP	0
R3986	1-218-990-81	SHORT CHIP	0	R205	1-216-821-11	METAL CHIP	1K 5% 1/10W
R3987	1-218-990-81	SHORT CHIP	0	R206	1-216-821-11	METAL CHIP	1K 5% 1/10W
R3988	1-218-990-81	SHORT CHIP	0	R207	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R3989	1-218-990-81	SHORT CHIP	0	R208	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R3996	1-218-990-81	SHORT CHIP	0	R209	1-218-885-11	METAL CHIP	75 5% 1/10W
R3997	1-218-933-11	RES-CHIP	22 5% 1/16W	R210	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R3998	1-218-933-11	RES-CHIP	22 5% 1/16W	R211	1-218-831-11	METAL CHIP	220 0.5% 1/10W
< RESISTOR CHIP >				R212	1-216-797-11	METAL CHIP	10 5% 1/10W
RE3900	1-234-371-21	RES, NETWORK 47	(1005X4)	R213	1-216-821-11	METAL CHIP	1K 5% 1/10W
RE3901	1-234-371-21	RES, NETWORK 47	(1005X4)	R214	1-216-821-11	METAL CHIP	1K 5% 1/10W
RE3902	1-234-371-21	RES, NETWORK 47	(1005X4)				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

H46

G2A

REF.NO.	PART NO	DESCRIPTION	REMARK
R215	1-216-809-11	METAL CHIP 100 5% 1/10W	
R216	1-216-809-11	METAL CHIP 100 5% 1/10W	
R217	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R218	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R219	1-216-809-11	METAL CHIP 100 5% 1/10W	
R220	1-216-797-11	METAL CHIP 10 5% 1/10W	
R222	1-216-853-11	METAL CHIP 470K 5% 1/10W	
R223	1-216-853-11	METAL CHIP 470K 5% 1/10W	
R224	1-218-831-11	METAL CHIP 220 0.5% 1/10W	
R225	1-218-831-11	METAL CHIP 220 0.5% 1/10W	
R226	1-216-864-11	SHORT CHIP 0	
< VARISTOR >			
VD201	1-802-082-11	VARISTOR (SMD)	
VD202	1-802-082-11	VARISTOR (SMD)	
VD203	1-802-082-11	VARISTOR (SMD)	
* A-1184-357-A G2A COMPLETE			
4-382-854-11 SCREW (M3X10) , P, SW (+)			
< CAPACITOR >			

C6000	Δ 1-161-864-91	CERAMIC 0.0047UF	250V
C6001	Δ 1-119-892-51	CERAMIC 470PF	10.00% 250V
C6002	Δ 1-165-531-11	MYLAR 1UF	10 275V
C6003	Δ 1-161-964-91	CERAMIC 0.0047UF	250V
C6004	Δ 1-165-529-11	MYLAR 0.22UF	10 275V
C6005	Δ 1-119-892-51	CERAMIC 470PF	10.00% 250V
C6006	1-135-361-11	ELECT (BLOCK) 180UF	20% 450V
C6008	1-135-361-11	ELECT (BLOCK) 180UF	20% 450V
C6010	Δ 1-113-889-11	CERAMIC 0.001UF	20.00% 250V
C6012	Δ 1-113-889-11	CERAMIC 0.001UF	20.00% 250V
C6015	Δ 1-113-889-11	CERAMIC 0.001UF	20.00% 250V
C6016	Δ 1-113-889-11	CERAMIC 0.001UF	20.00% 250V
C6100	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C6101	1-107-905-11	ELECT 4.7UF	20% 50V
C6102	1-107-910-11	ELECT 100UF	20% 50V
C6103	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C6104	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V
C6105	1-107-906-11	ELECT 10UF	20% 50V
C6108	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V
C6109	1-107-888-11	ELECT 47UF	20% 25V
C6111	1-162-134-11	CERAMIC 470PF	10.00% 25V
C6112	1-100-310-11	FILM 18000PF	3% 800V
C6116	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V
C6200	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C6202	1-112-242-21	ELECT 1500UF	20% 25V
C6203	1-107-907-11	ELECT 22UF	20% 50V
C6204	1-112-242-21	ELECT 1500UF	20% 25V
C6205	1-112-242-21	ELECT 1500UF	20% 25V

REF.NO.	PART NO	DESCRIPTION	REMARK
C6207	1-112-242-21	ELECT 1500UF	20% 2
C6216	1-107-828-11	ELECT 4.7UF	20% 1
C6217	1-112-229-21	ELECT 1500UF	20% 1
C6305	1-107-828-11	CERAMIC CHIP 0.1UF	10.00% 1
C6306	1-162-927-11	CERAMIC CHIP 100PF	5.00% 5
C6307	1-107-903-11	ELECT 2.2UF	20% 5
C6308	1-107-904-11	ELECT 3.3UF	20% 5
C6309	1-107-910-11	ELECT 100UF	20% 5
C6310	1-100-139-31	FILM 0.001UF	5% 6
C6314	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 5
C6315	1-165-129-31	ELECT 470PF	20% 1
C6316	1-107-828-11	CERAMIC CHIP 0.1UF	10.00% 1
C6401	1-107-882-91	ELECT 100UF	20% 1
C6402	1-127-573-11	CERAMIC CHIP 1UF	10% 1
C6404	1-107-828-11	CERAMIC CHIP 0.1UF	10.00% 1
C6405	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 5
C6412	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 1
C6413	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 5
C6451	1-107-828-11	CERAMIC CHIP 0.1UF	10.00% 1
C6454	1-125-889-11	CERAMIC CHIP 2.2UF	10% 1
C6504	1-162-134-11	CERAMIC 470PF	10.00% 2
C6409	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 5
C6505	1-162-134-11	CERAMIC 470PF	10.00% 2
C6517	1-107-888-11	ELECT 47UF	20% 2
C6518	1-112-744-52	MYLAR 1UF	10% 4
C6519	1-162-969-11	CERAMIC CHIP 0.0080UF	10.00% 2
C6520	1-117-227-11	MYLAR 1UF	10.00% 4
C6521	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 1
C6522	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 5
C6523	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 2
C6525	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 5
C6526	1-107-906-11	ELECT 10UF	20% 5
< CONNECTOR >			
CN6000	* 1-695-915-11	TAB (CONTACT)	
CN6001	Δ * 1-793-660-11	PIN, CONNECTOR (PC BOARD) 3P	
CN6011	* 1-557-770-21	TERMINAL BOARD, GROUND	
CN6200	* 1-793-236-11	PIN, CONNECTOR (PC BOARD) 14P	
CN6202	* 1-785-708-11	PIN, CONNECTOR (PC BOARD) 12P	
CN6204	* 1-785-706-11	PIN, CONNECTOR (PC BOARD) 10P	
CN6206	* 1-695-915-11	TAB (CONTACT)	
CN6207	* 1-695-915-11	TAB (CONTACT)	
CN6211	* 1-557-770-21	TERMINAL BOARD, GROUND	
CN6214	* 1-557-770-21	TERMINAL BOARD, GROUND	
CN6216	* 1-557-770-21	TERMINAL BOARD, GROUND	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART NO.	DESCRIPTION	REMARK	REF.NO.	PART NO.	DESCRIPTION	REMARK
CM6217	* 1-785-701-11	PLIN, CONNECTOR (PC BOARD) 3P		FR6000 Δ	1-533-223-11	FUSE HOLDER	OA
< DIODE >				FR6001 Δ	1-533-223-11	FUSE HOLDER	OA
D6000	8-719-054-89	DIODE D15XB60		< FERRITE BEAD >			
D6002	8-719-404-50	DIODE MAL11-TX		FR6100	1-412-911-11	FERRITE	OH
D6003	8-719-404-50	DIODE MAL11-TX		FR6101	1-412-911-11	FERRITE	OH
D6102	6-500-137-01	DIODE BAT54HT1		< IC >			
D6103	8-719-979-64	DIODE U7F4005/23		IC6100	6-707-749-01	IC CUD9841P	
D6104	6-501-043-01	DIODE UM216MT106		IC6200	6-709-366-01	IC M41431AT7 (CN)	
D6105	6-501-043-01	DIODE UM216MT106		IC6301	6-708-801-01	IC M7P2H2	
D6106	8-719-081-67	DIODE M41E43		IC6302	6-709-442-01	IC M41530ATT	
D6107	8-719-081-67	DIODE M41E43		IC6401	6-709-366-01	IC M41431AT7 (CN)	
D6108	8-719-041-97	DIODE MAL13-(TX)		IC6402	6-709-366-01	IC M41431AT7 (CN)	
D6109	8-719-022-90	DIODE M48160-M		IC6502	6-709-192-01	IC F45501AN-D1-TR1	
D6200	8-719-057-96	DIODE DI0SCM-4012		< COIL >			
D6201	8-719-057-96	DIODE DI0SCM-4012		L6000 Δ	1-456-886-21	LINE FILTER COIL	
D6202	8-719-057-96	DIODE DI0SCM-4012		L6203	1-414-481-41	INDUCTOR 10H	
D6203	8-719-057-96	DIODE DI0SCM-4012		L6204	1-414-481-41	INDUCTOR 10H	
D6204	6-500-567-31	DIODE 10ERB20-TR3		L6207	1-457-239-11	INDUCTOR 4.70H	
D6205	6-500-567-31	DIODE 10ERB20-TR3		L6208	1-457-239-11	INDUCTOR 4.70H	
D6207	8-719-057-96	DIODE DI0SCM-4012		L6300	1-414-183-41	INDUCTOR 100H	
D6302	6-500-567-31	DIODE 10ERB20-TR3		L6500	1-457-218-11	INDUCTOR 1000H	
D6303	6-500-567-31	DIODE 10ERB20-TR3		L6502	1-457-141-21	INDUCTOR 1750H	
D6304	6-500-449-01	DIODE ER22-08KFB		< PHOTOCOMP. >			
D6305	6-500-567-31	DIODE 10ERB20-TR3		PR6000 Δ	6-600-187-01	PHOTO COMP.ER PC123Y2200F	
D6306	8-719-510-02	DIODE D1NS4		PR6100	6-600-187-01	PHOTO COMP.ER PC123Y2200F	
D6401	8-719-404-50	DIODE MAL11-TX		PR6301	6-600-187-01	PHOTO COMP.ER PC123Y2200F	
D6402	8-719-404-50	DIODE MAL11-TX		PR6400	6-600-187-01	PHOTO COMP.ER PC123Y2200F	
D6406	8-719-404-50	DIODE MAL11-TX		PR6401	6-600-187-01	PHOTO COMP.ER PC123Y2200F	
D6407	8-719-018-01	DIODE M48220-TX		PR6402	6-600-187-01	PHOTO COMP.ER PC123Y2200F	
D6408	8-719-404-50	DIODE MAL11-TX		< TRANSISTOR >			
D6452	8-719-404-50	DIODE MAL11-TX		Q6100	6-551-297-01	TRANSISTOR 2SK3568(LBS)SONY.Q	
D6456	8-719-404-50	DIODE MAL11-TX		Q6101	6-551-297-01	TRANSISTOR 2SK3568(LBS)SONY.Q	
D6504	8-719-404-50	DIODE MAL11-TX		Q6400	8-729-620-07	TRANSISTOR 2SC3052EF-TL-LFF	
D6505	8-719-421-82	DIODE M48043-M		Q6401	8-729-620-07	TRANSISTOR 2SC3052EF-TL-LFF	
D6506	8-719-054-59	DIODE F3F05A60		Q6402	8-729-620-07	TRANSISTOR 2SC3052EF-TL-LFF	
D6507	8-719-404-50	DIODE MAL11-TX		Q6403	8-729-620-22	TRANSISTOR 2SM1235-F	
D6508	6-500-108-01	DIODE EP05F420		Q6404	8-729-620-07	TRANSISTOR 2SC3052EF-TL-LFF	
D6509	6-500-108-01	DIODE EP05F420		Q6405	8-729-620-07	TRANSISTOR 2SC3052EF-TL-LFF	
D6510	6-500-137-01	DIODE BAT54HT1		Q6406	8-729-620-07	TRANSISTOR 2SC3052EF-TL-LFF	
D6511	8-719-404-50	DIODE MAL11-TX		Q6408	8-729-620-07	TRANSISTOR 2SC3052EF-TL-LFF	
D6512	8-719-404-50	DIODE MAL11-TX		Q6409	8-729-620-07	TRANSISTOR 2SC3052EF-TL-LFF	
D6551	8-719-404-50	DIODE MAL11-TX		Q6454	8-729-600-22	TRANSISTOR 2SM1235-F	
D6552	8-719-404-50	DIODE MAL11-TX		Q6455	8-729-620-07	TRANSISTOR 2SC3052EF-TL-LFF	
D6553	8-719-404-50	DIODE MAL11-TX		Q6500	6-551-403-01	TRANSISTOR 2SK3197(LBS)SONY.	
< FUSE >							
FR6000 Δ	1-576-233-51	FUSE	6.3A 250V				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REF.NO.	PART NO	DESCRIPTION	REMARK	REF.NO.	PART NO	DESCRIPTION	REMARK
Q6501	8-729-820-90	TRANSISTOR 2SD1621-ST		R6309	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	
Q6502	8-729-804-41	TRANSISTOR 2SB1122-S		R6400	1-216-833-11	METAL CHIP 10K 5% 1/10W	
Q6504	6-551-403-01	TRANSISTOR 29K3797 (JBS150W).		R6401	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	
< RESISTOR >				R6402	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6002	Δ 1-240-251-11	METAL FUSIBLE 6.8 5% 10W		R6403	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	
R6003	1-247-752-11	CARBON 1K 5% 1/2W		R6405	1-216-840-11	METAL CHIP 39K 5% 1/10W	
R6004	1-218-835-11	METAL CHIP 330 0.5% 1/10W		R6407	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R6016	1-535-143-71	LEAD, JUMPER (7.5MM)		R6408	1-218-879-11	METAL CHIP 22K 0.5% 1/10W	
R6051	1-216-821-11	METAL CHIP 1K 5% 1/10W		R6409	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6052	1-216-837-11	METAL CHIP 22K 5% 1/10W		R6410	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R6053	1-216-793-11	METAL CHIP 4.7 5% 1/10W		R6412	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6101	1-249-385-11	CARBON 2.2 5% 1/4W		R6413	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	
R6102	Δ 1-202-933-61	FUSIBLE 0.1 10% 1/2W		R6414	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6103	1-218-823-11	METAL CHIP 100 0.5% 1/10W		R6415	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6104	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		R6416	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R6105	1-208-854-11	METAL CHIP 1M 0.5% 1/10W		R6417	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R6106	1-208-854-11	METAL CHIP 1M 0.5% 1/10W		R6418	1-216-846-11	METAL CHIP 100K 5% 1/10W	
R6107	1-208-854-11	METAL CHIP 1M 0.5% 1/10W		R6419	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R6108	1-208-854-11	METAL CHIP 1M 0.5% 1/10W		R6420	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6109	1-218-761-11	METAL CHIP 240K 0.5% 1/10W		R6421	1-216-864-11	SHORT CHIP 0	
R6110	1-218-881-11	METAL CHIP 27K 0.5% 1/10W		R6422	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	
R6111	1-218-873-11	METAL CHIP 12K 0.5% 1/10W		R6425	1-216-809-11	METAL CHIP 100 5% 1/10W	
R6114	1-211-985-11	METAL CHIP 47 0.5% 1/10W		R6426	1-216-846-11	METAL CHIP 220K 5% 1/10W	
R6116	1-216-109-91	RES-CHIP 22 5% 1/10W		R6427	1-218-883-11	METAL CHIP 56K 0.5% 1/10W	
R6117	1-216-109-91	RES-CHIP 22 5% 1/10W		R6430	1-216-296-11	SHORT CHIP 0	
R6118	1-216-833-11	METAL CHIP 10K 5% 1/10W		R6436	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	
R6119	1-216-833-11	METAL CHIP 10K 5% 1/10W		R6437	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R6121	1-216-361-00	METAL OXIDE 0.22 5% 2W		R6441	1-216-843-11	METAL CHIP 47K 5% 1/10W	
R6122	1-216-361-00	METAL OXIDE 0.22 5% 2W		R6442	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6123	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		R6443	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6127	1-216-857-11	METAL CHIP 1M 5% 1/10W		R6444	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6200	1-216-821-11	METAL CHIP 1K 5% 1/10W		R6451	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6201	1-216-821-11	METAL CHIP 1K 5% 1/10W		R6452	1-218-847-11	METAL CHIP 1K 0.5% 1/10W	
R6202	1-216-105-91	RES-CHIP 220K 5% 1/10W		R6453	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6203	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		R6454	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	
R6204	1-218-843-11	METAL CHIP 680 0.5% 1/10W		R6455	1-218-803-11	METAL CHIP 220K 0.5% 1/10W	
R6205	1-218-863-11	METAL CHIP 5.6K 0.5% 1/10W		R6456	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W	
R6207	1-218-847-11	METAL CHIP 1K 0.5% 1/4W		R6459	1-218-807-11	METAL CHIP 330K 0.5% 1/10W	
R6208	1-249-377-11	CARBON 0.47 5% 1/4W		R6461	1-216-833-11	METAL CHIP 22K 0.5% 1/10W	
R6226	1-249-389-11	CARBON 4.7 5% 1/4W		R6462	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6300	Δ 1-246-188-51	FUSIBLE 10 5% 1/2W		R6468	1-218-803-11	METAL CHIP 220K 0.5% 1/10W	
R6301	1-243-725-71	METAL OXIDE 100K 5% 1W		R6503	1-215-882-00	METAL OXIDE 22 5% 2W	
R6302	1-218-863-11	METAL CHIP 5.6K 0.5% 1/10W		R6512	1-218-807-11	METAL CHIP 330K 0.5% 1/10W	
R6303	1-249-385-11	CARBON 2.2 5% 1/4W		R6513	1-218-879-11	METAL CHIP 22K 0.5% 1/10W	
R6304	1-216-821-11	METAL CHIP 1K 5% 1/10W		R6514	1-218-895-11	METAL CHIP 100K 0.5% 1/10W	
R6305	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		R6515	1-218-823-11	METAL CHIP 100 0.5% 1/10W	
R6306	1-216-805-11	METAL CHIP 47 5% 1/10W		R6526	1-211-883-11	METAL CHIP 68 0.5% 1/10W	
R6307	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		R6527	1-218-813-91	METAL CHIP 560K 0.5% 1/10W	
R6308	1-218-871-11	METAL CHIP 10K 0.5% 1/10W		R6528	1-218-879-11	METAL CHIP 22K 0.5% 1/10W	
				R6529	1-216-864-11	SHORT CHIP 0	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

Note : The components identified by mark ⚠ contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.



REF.NO.	PART NO.	DESCRIPTION	REMARK	REF.NO.	PART NO.	DESCRIPTION	REMARK
R6330	1-219-729-61	METAL	0.33 10% 5W	⚠ A-1196-582-A	BE COMPLETE		
R6331	1-219-729-61	METAL	0.33 10% 5W	2-586-175-01	SHEET B, RADIATION		
R6332	1-216-564-11	SHORT CHIP	0				
R6333	1-216-833-11	METAL CHIP	10K 5% 1/10W	A5001	1-694-974-21	CONTACT TERMINAL	10.004 5
R6334	1-218-823-11	METAL CHIP	100 0.5% 1/10W	A5002	1-694-974-21	CONTACT TERMINAL	10.004 2
R6335	1-216-833-11	METAL CHIP	10K 5% 1/10W	A5003	1-694-974-21	CONTACT TERMINAL	10.004 2
R6336	1-218-830-11	METAL CHIP	200 0.5% 1/10W	A5004	1-694-974-21	CONTACT TERMINAL	10.004 3
R6337	1-249-389-11	CARBON	4.7 5% 1/4W	< CAPACITOR >			
R6338	1-249-405-11	CARBON	100 5% 1/4W	C4001	1-162-964-11	CERAMIC CHIP 0.0010UF	10.004 5
R6339	1-218-830-11	METAL CHIP	200 0.5% 1/10W	C4003	1-162-964-11	CERAMIC CHIP 0.0010UF	10.004 5
R6340	1-249-389-11	CARBON	4.7 5% 1/4W	C4004	1-162-970-11	CERAMIC CHIP 0.01UF	10.004 2
R6341	1-208-818-11	METAL CHIP	33K 0.5% 1/10W	C4006	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
R6342	1-208-814-91	METAL CHIP	22K 0.5% 1/10W	C4007	1-162-964-11	CERAMIC CHIP 0.0010UF	10.004 3
R6343	1-218-830-11	METAL CHIP	200 0.5% 1/10W	C4010	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
R6344	1-218-830-11	METAL CHIP	200 0.5% 1/10W	C4011	1-126-206-11	ELECT CHIP 1000UF	20.004 6
R6345	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	C4012	1-100-591-91	CERAMIC CHIP 1UF	10% 2
R6346	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	C4013	1-112-771-11	CERAMIC CHIP 0.01UF	10% 2
R6347	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	C4014	1-112-771-11	CERAMIC CHIP 0.01UF	10% 2
R6348	1-208-846-11	METAL CHIP	470K 0.5% 1/10W	C4015	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
R6349	1-208-844-11	METAL CHIP	390K 0.5% 1/10W	C4016	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
R6350	1-218-875-11	METAL CHIP	15K 0.5% 1/10W	C4017	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
R6351	1-249-393-11	CARBON	10 5% 1/4W	C4018	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
R6352	1-216-809-11	METAL CHIP	100 5% 1/10W	C4019	1-164-841-11	CERAMIC CHIP 7PF	0.50PF 5
R6353	1-208-830-11	METAL CHIP	100K 0.5% 1/10W	C4021	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
R6354	1-218-911-11	METAL CHIP	470K 0.5% 1/10W	C4022	1-126-392-11	ELECT CHIP 1000UF	20.004 6
R6355	1-218-887-11	METAL CHIP	47K 0.5% 1/10W	C4023	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
R6357	1-218-851-11	METAL CHIP	1.5K 0.5% 1/10W	C4024	1-126-392-11	ELECT CHIP 1000UF	20.004 6
R6360	1-208-846-11	METAL CHIP	470K 0.5% 1/10W	C4025	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
R6362	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	C4026	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
R6363	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	C4027	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
R6364	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	C4028	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
R6365	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	C4029	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
R6366	1-216-833-11	METAL CHIP	10K 5% 1/10W	C4030	1-112-771-11	CERAMIC CHIP 0.01UF	10% 2
< RELAY >							
R6003	1-755-779-11	RELAY, POWER		C4031	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
< TRANSFORMER >							
T6102	1-443-983-11	CONVERTER TRANSFORMER (PTT)		C4032	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
T6103	1-443-982-11	CONVERTER TRANSFORMER (PTT)		C4033	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
T6301	1-443-984-11	CONVERTER TRANSFORMER (SEP)		C4034	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
< VARISTOR >							
VD6000	1-804-996-21	VARISTOR		C4040	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
VD6001	1-804-996-21	VARISTOR		C4041	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
				C4042	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
				C4043	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
				C4044	1-100-591-91	CERAMIC CHIP 1UF	10% 2
				C4045	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
C4046	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4305	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2 10.00% 2
C4047	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4306	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2 10.00% 2
C4048	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4307	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2 10.00% 2
C4049	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4308	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5 5.00% 5
C4050	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4309	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5 10.00% 5
C4051	1-126-394-11	ELECT CHIP 100F	20.00% 16V	C4310	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5 10.00% 5
C4052	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4311	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5 10.00% 5
C4053	1-126-394-11	ELECT CHIP 100F	20.00% 16V	C4312	1-100-162-91	CERAMIC CHIP 1UF	5 5 5
C4054	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4400	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 5 10.00% 5
C4055	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4401	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 5 10.00% 5
C4056	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4402	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1
C4057	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4403	1-127-573-11	CERAMIC CHIP 1UF	10% 1 10% 1
C4058	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4404	1-127-573-11	CERAMIC CHIP 1UF	10% 1 10% 1
C4059	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4405	1-162-927-11	CERAMIC CHIP 100PF	5.00% 5 5.00% 5
C4060	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4406	1-162-927-11	CERAMIC CHIP 100PF	5.00% 5 5.00% 5
C4061	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4407	1-164-871-11	CERAMIC CHIP 100PF	5.00% 5 5.00% 5
C4062	1-126-394-11	ELECT CHIP 100F	20.00% 16V	C4408	1-112-781-11	CERAMIC CHIP 1UF	10% 1 10% 1
C4063	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4409	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1 10% 1
C4066	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4412	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2 10.00% 2
C4067	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4413	1-127-573-11	CERAMIC CHIP 1UF	10% 1 10% 1
C4068	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4414	1-127-573-11	CERAMIC CHIP 1UF	10% 1 10% 1
C4069	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4415	1-100-906-11	CERAMIC CHIP 0.001UF	10% 5 10% 5
C4070	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4416	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5 5.00% 5
C4071	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C4512	1-164-935-11	CERAMIC CHIP 0.001UF	10.00% 5 10.00% 5
C4072	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5000	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1
C4073	1-126-390-11	ELECT CHIP 220F	20.00% 6.3V	C5002	1-100-908-11	CERAMIC CHIP 1UF	10% 6 10% 6
C4074	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5003	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1
C4075	1-164-939-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C5004	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1
C4076	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C5005	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1
C4079	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5006	1-164-847-11	CERAMIC CHIP 7PF	0.50PF 5 0.50PF 5
C4080	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C5007	1-164-847-11	CERAMIC CHIP 7PF	0.50PF 5 0.50PF 5
C4081	1-126-391-11	ELECT CHIP 470F	20.00% 6.3V	C5008	1-112-777-11	CERAMIC CHIP 470PF	10% 5 10% 5
C4082	1-126-394-11	ELECT CHIP 100F	20.00% 16V	C5009	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2 10% 2
C4083	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5011	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5 10% 5
C4084	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5012	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2 10% 2
C4085	1-115-156-21	DOUBLE LAYER 0.22F	5.5V	C5013	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2 10% 2
C4086	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C5014	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5 10% 5
C4087	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5036	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5 10% 5
C4089	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5038	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5 10% 5
C4090	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5201	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1
C4091	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C5203	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1
C4092	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5205	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1
C4100	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C5207	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1
C4101	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C5208	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 2 10.00% 2
C4105	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C5209	1-117-681-11	ELECT CHIP 100PF	20.00% 1 20.00% 1
C4106	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C5210	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2 10.00% 2
C4107	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C5211	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2 10.00% 2
C4110	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5212	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1
C4301	1-112-592-11	CERAMIC CHIP 100PF	5% 50V	C5214	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1
C4304	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5215	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1 10% 1

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
C5216	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5337	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5217	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5338	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5218	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5339	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5219	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5340	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5220	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5341	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5221	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5342	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5222	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5343	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5223	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5344	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5224	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5345	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5226	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5346	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5227	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5347	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5228	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5348	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5229	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5349	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5300	1-126-394-11	ELECT CHIP 100PF	20.00% 16V	C5360	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5301	1-126-394-11	ELECT CHIP 100PF	20.00% 16V	C5361	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5302	1-126-392-11	ELECT CHIP 100PF	20.00% 6.3V	C5362	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5
C5303	1-126-394-11	ELECT CHIP 100PF	20.00% 16V	C5363	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5304	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5364	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5305	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5365	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5306	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5366	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5307	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5367	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5
C5308	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5368	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5309	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5369	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5310	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5370	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5
C5311	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5371	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5312	1-126-392-11	ELECT CHIP 100PF	20.00% 6.3V	C5372	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5313	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5373	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5314	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5374	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5
C5315	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5375	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5316	1-126-392-11	ELECT CHIP 100PF	20.00% 6.3V	C5376	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5317	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5377	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5318	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5378	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5
C5319	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5379	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5320	1-126-392-11	ELECT CHIP 100PF	20.00% 6.3V	C5380	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5321	1-112-068-11	CERAMIC CHIP 220PF	10% 50V	C5371	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5322	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5372	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5323	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C5373	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5324	1-162-979-11	CERAMIC CHIP 0.0027UF	10.00% 50V	C5374	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5
C5325	1-162-979-11	CERAMIC CHIP 0.0027UF	10.00% 50V	C5375	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5326	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5376	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5327	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5377	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5328	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5378	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5
C5329	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5379	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5330	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5380	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5331	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5381	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5332	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5382	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5
C5333	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5383	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5334	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C5384	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5335	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5385	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5336	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5386	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5

QUESTION 1. The following table shows the number of people who attended the 2010 World Cup in South Africa. The table is divided into two parts: the first part shows the number of people who attended the World Cup in each of the 10 countries that hosted the World Cup, and the second part shows the number of people who attended the World Cup in each of the 10 countries that did not host the World Cup. The total number of people who attended the World Cup is 11,000,000. <table><tr><th>Country</th><th>Number of people who attended the World Cup</th></tr><tr><td>South Africa</td><td>1,000,000</td></tr><tr><td>Germany</td><td>1,000,000</td></tr><tr><td>France</td><td>1,000,000</td></tr><tr><td>Italy</td><td>1,000,000</td></tr><tr><td>Spain</td><td>1,000,000</td></tr><tr><td>United States</td><td>1,000,000</td></tr><tr><td>England</td><td>1,000,000</td></tr><tr><td>Sweden</td><td>1,000,000</td></tr><tr><td>Denmark</td><td>1,000,000</td></tr><tr><td>Other countries</td><td>1,000,000</td></tr></table> ANSWER The total number of people who attended the World Cup is 11,000,000. The number of people who attended the World Cup in each of the 10 countries that hosted the World Cup is 1,000,000. The number of people who attended the World Cup in each of the 10 countries that did not host the World Cup is 1,000,000.	Country	Number of people who attended the World Cup	South Africa	1,000,000	Germany	1,000,000	France	1,000,000	Italy	1,000,000	Spain	1,000,000	United States	1,000,000	England	1,000,000	Sweden	1,000,000	Denmark	1,000,000	Other countries	1,000,000
Country	Number of people who attended the World Cup																					
South Africa	1,000,000																					
Germany	1,000,000																					
France	1,000,000																					
Italy	1,000,000																					
Spain	1,000,000																					
United States	1,000,000																					
England	1,000,000																					
Sweden	1,000,000																					
Denmark	1,000,000																					
Other countries	1,000,000																					

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
C5520	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5811	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
C5521	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5812	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
C5522	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5813	1-126-390-11	ELECT CHIP 220F	20.00% 6
C5523	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5814	1-124-779-00	ELECT CHIP 10UF	20.00% 1
C5524	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5818	1-164-874-11	CERAMIC CHIP 100UF	5.00% 5
C5525	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5819	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5526	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5820	1-164-874-11	CERAMIC CHIP 100UF	5.00% 5
C5527	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5821	1-164-874-11	CERAMIC CHIP 100UF	5.00% 5
C5528	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5827	1-126-396-11	ELECT CHIP 100F	20.00% 1
C5529	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5828	1-164-874-11	CERAMIC CHIP 100UF	5.00% 5
C5530	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5829	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5531	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5832	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5532	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5833	1-100-966-91	CERAMIC CHIP 0.1UF	10.00% 2
C5533	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5834	1-126-396-11	ELECT CHIP 47UF	20.00% 1
C5534	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5835	1-127-573-11	CERAMIC CHIP 1UF	10% 1
C5535	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5836	1-127-573-11	CERAMIC CHIP 1UF	10% 1
C5536	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5837	1-112-064-11	CERAMIC CHIP 2.2UF	10% 1
C5537	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5838	1-112-064-11	CERAMIC CHIP 2.2UF	10% 1
C5538	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5839	1-164-936-11	CERAMIC CHIP 680PF	10.00% 5
C5539	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5840	1-164-936-11	CERAMIC CHIP 680PF	10.00% 5
C5540	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5841	1-112-067-11	CERAMIC CHIP 0.22UF	10% 1
C5541	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5842	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5
C5542	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5843	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5543	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5844	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5544	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5845	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5545	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5846	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5546	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5847	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5547	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5848	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5548	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C5849	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5549	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5850	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5550	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5851	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5551	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5852	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5552	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5853	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5553	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5854	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5554	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5855	1-126-394-11	ELECT CHIP 100F	20.00% 1
C5555	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5856	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5556	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5857	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5557	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5858	1-126-396-11	ELECT CHIP 100F	20.00% 1
C5558	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5859	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5559	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5860	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5560	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5861	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5561	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5862	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5562	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5863	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5802	1-124-779-00	ELECT CHIP 100F	20.00% 16V	C5864	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5803	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5865	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5804	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5866	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5806	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5867	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5807	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C5868	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5808	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C5869	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5809	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5870	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
C5871	1-164-954-11	CERAMIC CHIP 15PF	5.00% 50V	C7012	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2
C5872	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7013	1-100-591-91	CERAMIC CHIP 1UF	10% 2
C5873	1-164-952-11	CERAMIC CHIP 12PF	5.00% 50V	C7014	1-100-591-91	CERAMIC CHIP 1UF	10% 2
C5874	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7015	1-164-904-11	CERAMIC CHIP 0.1UF	10.00% 2
C5875	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7016	1-100-591-91	CERAMIC CHIP 1UF	10% 2
C5876	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7017	1-164-904-11	CERAMIC CHIP 0.1UF	10.00% 2
C5877	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7019	1-112-161-21	ELECT CHIP 1000UF	20% 6
C5878	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7020	1-164-934-11	CERAMIC CHIP 330PF	10.00% 5
C5879	1-126-394-11	ELECT CHIP 100F	20.00% 16V	C7022	1-100-911-11	CERAMIC CHIP 4.7UF	10% 2
C5880	1-126-394-11	ELECT CHIP 100F	20.00% 16V	C7023	1-100-911-11	CERAMIC CHIP 4.7UF	10% 2
C5881	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7025	1-125-927-91	CERAMIC CHIP 1UF	10.00% 2
C5882	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7026	1-125-927-91	CERAMIC CHIP 1UF	10.00% 2
C5883	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7027	1-164-935-11	CERAMIC CHIP 0.0022UF	10.00% 5
C5884	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7028	1-119-923-11	CERAMIC CHIP 0.047UF	10.00% 1
C5885	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7029	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2
C5886	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7030	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2
C5887	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7031	1-135-942-21	ELECT CHIP 560F	20% 1
C5888	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7032	1-135-946-21	ELECT CHIP 39UF	20% 1
C5889	1-126-394-11	ELECT CHIP 100F	20.00% 16V	C7033	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2
C5892	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7034	1-164-904-11	CERAMIC CHIP 0.1UF	10.00% 2
C5893	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7035	1-164-904-11	CERAMIC CHIP 0.1UF	10.00% 2
C5894	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7036	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 5
C5895	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7037	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 2
C5896	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7039	1-100-905-11	CERAMIC CHIP 0.001UF	10% 1
C5897	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7040	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5900	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7041	1-100-567-81	CERAMIC CHIP 0.01UF	10% 2
C5901	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7042	1-112-066-11	CERAMIC CHIP 100F	10% 1
C5902	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7043	1-164-935-11	CERAMIC CHIP 0.0022UF	10.00% 5
C5903	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7044	1-100-909-11	CERAMIC CHIP 100F	10% 6
C5904	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7046	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
C5905	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7047	1-165-675-21	ELECT CHIP 470F	20% 1
C5906	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7048	1-164-978-11	CERAMIC CHIP 150PF	5% 5
C5907	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7049	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2
C5908	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7050	1-126-392-11	ELECT CHIP 1000F	20.00% 6
C5909	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7051	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2
C5910	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7054	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C5911	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7056	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C5912	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7058	1-112-046-11	CERAMIC CHIP 0.01UF	10% 1
C7000	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C7059	1-100-906-11	CERAMIC CHIP 0.01UF	10% 1
C7001	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C7060	1-165-667-21	ELECT CHIP 1000F	20% 6
C7002	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C7062	1-135-942-21	ELECT CHIP 560F	20% 1
C7003	1-164-915-11	CERAMIC CHIP 470PF	5.00% 50V	C7065	1-112-161-21	ELECT CHIP 1000UF	20% 6
C7004	1-164-915-11	CERAMIC CHIP 470PF	5.00% 50V	C7067	1-112-797-11	ELECT CHIP 470UF	20% 2
C7005	1-162-967-11	CERAMIC CHIP 0.0035UF	10.00% 50V	C7068	1-164-974-11	CERAMIC CHIP 1000F	5.00% 5
C7006	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7069	1-164-974-11	CERAMIC CHIP 1000F	5.00% 5
C7007	1-100-552-21	ELECT CHIP 100F	20% 25V	C7070	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C7008	1-164-904-11	CERAMIC CHIP 0.1UF	10.00% 25V	C7079	1-164-974-11	CERAMIC CHIP 1000F	5.00% 5
C7009	1-162-927-11	CERAMIC CHIP 1000F	5.00% 50V	C7080	1-164-974-11	CERAMIC CHIP 1000F	5.00% 5
C7010	1-112-797-11	ELECT CHIP 470UF	20% 25V	C7081	1-164-974-11	CERAMIC CHIP 1000F	5.00% 5
C7011	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V	C7082	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REF.NO.	PART NO	DESCRIPTION	REMARK	REF.NO.	PART NO	DESCRIPTION	REMARK
C7083	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	D4509	8-719-073-01	DIODE MA111-(K8).S0	
C7084	1-164-974-11	CERAMIC CHIP 100PF	5.00% 50V	D4510	8-719-073-01	DIODE MA111-(K8).S0	
C7085	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	D4511	8-719-073-01	DIODE MA111-(K8).S0	
C7088	1-164-974-11	CERAMIC CHIP 100PF	5.00% 50V	D5801	8-719-073-01	DIODE MA111-(K8).S0	
C7089	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	D5802	8-719-073-01	DIODE MA111-(K8).S0	
< CONNECTOR >				D5804	8-719-073-01	DIODE MA111-(K8).S0	
CM4001	* 1-819-390-51	FFC/FPC CONNECTOR (21F) 49P		D5813	8-719-073-01	DIODE MA111-(K8).S0	
CM4002	* 1-819-447-11	HEADER ASSEMBLY FOR PWB 10P		D7000	6-500-215-01	DIODE M2M3	
CM4004	* 1-779-236-51	CONNECTOR, FFC/FPC 18P		D7001	8-719-072-43	DIODE RB050T-40T25	
CM4007	* 1-819-336-11	HEADER ASSEMBLY FOR PWB 3P		D7002	6-500-294-01	DIODE PT2-TE25-3.9B	
CM4008	* 1-820-187-11	HEADER ASSEMBLY (PRINT PWB)10P		D7003	6-500-294-01	DIODE PT2-TE25-3.9B	
CM4300	* 1-819-337-11	HEADER ASSEMBLY FOR PWB 10P		D7004	8-719-072-43	DIODE RB050T-40T25	
CM4301	* 1-820-189-11	HEADER ASSEMBLY (PRINT PWB)12P		D7005	8-719-072-43	DIODE RB050T-40T25	
CM4400	* 1-820-284-11	D SUB CONNECTOR		D7006	8-719-073-01	DIODE MA111-(K8).S0	
CM4700	* 1-820-255-51	FFC/FPC CONNECTOR (21F) 20P		D7007	8-719-072-43	DIODE RB050T-40T25	
CM5003	* 1-820-506-11	HEADER ASSEMBLY FOR PWB 51P		D7008	6-500-579-01	DIODE PT2-TE25-6.8B	
CM5800	* 1-818-737-11	HDMT CONNECTOR		D7009	8-719-084-56	DIODE PT2-TE25-15B	
CM5801	* 1-818-737-11	HDMT CONNECTOR		D7010	6-500-295-01	DIODE PT2-TE25-5.6B	
CM7002	* 1-780-408-11	TERMINAL		< FUSE >			
CM7003	* 1-780-408-11	TERMINAL		F7000	Δ 1-576-603-21	FUSE	3.15A 2
CM7004	* 1-780-408-11	TERMINAL		< FERRITE BEAD >			
CM7005	* 1-780-408-11	TERMINAL		F84001	1-414-227-11	FERRITE	00H
CM7008	* 1-820-186-11	HEADER ASSEMBLY (PRINT PWB) 9P		F84002	1-400-177-21	FERRITE	00H
CM7009	* 1-820-186-11	HEADER ASSEMBLY (PRINT PWB) 9P		F84003	1-414-227-11	FERRITE	00H
CM7010	* 1-780-408-11	TERMINAL		F84004	1-400-110-21	FERRITE	00H
CM7011	* 1-780-408-11	TERMINAL		F84005	1-400-110-21	FERRITE	00H
CM7012	* 1-780-408-11	TERMINAL		F84006	1-400-110-21	FERRITE	00H
CM7013	* 1-780-408-11	TERMINAL		F84007	1-400-110-21	FERRITE	00H
CM7014	* 1-780-408-11	TERMINAL		F84008	1-400-331-11	FERRITE	00H
CM7015	* 1-780-408-11	TERMINAL		F84009	1-400-807-21	FERRITE	00H
CM7016	* 1-780-408-11	TERMINAL		F84010	1-400-591-22	FERRITE	00H
CM7017	* 1-780-408-11	TERMINAL		F84011	1-400-807-21	FERRITE	00H
CM7018	* 1-780-408-11	TERMINAL		F84012	1-400-807-21	FERRITE	00H
CM7019	* 1-780-408-11	TERMINAL		F84013	1-400-807-21	FERRITE	00H
< DIODE >				F84014	1-400-807-21	FERRITE	00H
D4002	8-719-058-24	DIODE RS601V-40T2-17		F84015	1-400-807-21	FERRITE	00H
D4006	8-719-073-01	DIODE MA111-(K8).S0		F84016	1-400-807-21	FERRITE	00H
D4007	8-719-077-59	DIODE 1S302		F84017	1-400-794-21	FERRITE	00H
D4020	8-719-422-46	DIODE MA8056		F84018	1-400-194-21	FERRITE	00H
D4021	8-719-422-46	DIODE MA8056		F84019	1-400-591-22	FERRITE	00H
D4301	8-719-064-03	DIODE HZ016B2TR-E		F84020	1-400-141-22	FERRITE	00H
D4302	8-719-064-03	DIODE HZ016B2TR-E		F84021	1-400-141-22	FERRITE	00H
D4400	8-719-422-46	DIODE MA8056		F84022	1-400-807-21	FERRITE	00H
D4401	8-719-422-46	DIODE MA8056		F84023	1-400-807-21	FERRITE	00H
D4402	8-719-422-46	DIODE MA8056		F84311	1-400-851-11	FERRITE	00H
D4403	8-719-050-38	DIODE MUA152MR-71		F84312	1-400-110-21	FERRITE	00H
D4500	8-719-056-84	DIODE UD2-TE-17-7.5B		F84313	1-400-110-21	FERRITE	00H
D4508	8-719-073-01	DIODE MA111-(K8).S0					

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
FB4315	1-400-110-21	FERRITE	00H	FL5303	1-234-177-21	FERRITE	00H
FB4320	1-400-141-22	FERRITE	00H	FL5304	1-234-177-21	FERRITE	00H
FB4321	1-400-141-22	FERRITE	00H	FL5306	1-234-177-21	FERRITE	00H
FB4400	1-469-100-21	FERRITE	00H	FL5500	1-234-177-21	FERRITE	00H
FB4401	1-469-100-21	FERRITE	00H	FL5501	1-234-177-21	FERRITE	00H
FB4402	1-469-100-21	FERRITE	00H	FL5800	1-234-177-21	FERRITE	00H
FB4404	1-469-100-21	FERRITE	00H	FL5801	1-234-177-21	FERRITE	00H
FB4405	1-400-141-22	FERRITE	00H	FL5802	1-234-177-21	FERRITE	00H
FB5000	1-400-461-21	FERRITE	00H	< IC >			
FB5001	1-400-461-21	FERRITE	00H				
FB5002	1-400-461-21	FERRITE	00H	IC4001	6-708-219-01	IC MB91305PMC-G-8NDE1	
FB5003	1-400-461-21	FERRITE	00H	IC4002	6-807-809-01	IC M0291V60CTE1-70G-WM2FE-11	
FB5004	1-400-461-21	FERRITE	00H	IC4003	6-706-419-01	IC LM930T (A)	
FB5005	1-400-461-21	FERRITE	00H	IC4004	6-703-175-01	IC PST3629UL	
FB5006	1-400-461-21	FERRITE	00H	IC4005	6-710-121-01	IC M24256-BMNM6T (A)	
FB5008	1-400-794-21	FERRITE	00H	IC4006	6-709-512-01	IC S-1132818-B5T1G	
FB5300	1-400-794-21	FERRITE	00H	IC4007	6-706-815-01	IC TW675ALDR	
FB5301	1-400-794-21	FERRITE	00H	IC4008	8-759-549-03	IC SW74LV132APNR	
FB5302	1-400-794-21	FERRITE	00H	IC4009	6-709-517-01	IC S-35390A-3BT1G	
FB5301	1-400-794-21	FERRITE	00H	IC4010	6-708-762-01	IC PQ200MNA12EH	
FB5502	1-400-794-21	FERRITE	00H	IC4400	6-704-600-01	IC M24C02-NNMGT (B)	
FB5800	1-469-094-21	FERRITE	00H	IC4401	8-759-679-54	IC SW74LV14APNR	
FB5801	1-400-461-21	FERRITE	00H	IC5000	6-709-899-01	IC CD0887G5	
FB5802	1-414-235-22	FERRITE	00H	IC5001	6-706-491-01	IC TC7S88FV (TSR80XUF)	
FB5803	1-414-235-22	FERRITE	00H	IC5002	8-759-651-59	IC SW74CBTV3245APNR	
FB5804	1-400-461-21	FERRITE	00H	IC5003	8-759-651-59	IC SW74CBTV3245APNR	
FB5805	1-400-461-21	FERRITE	00H	IC5004	6-703-108-01	IC SW74VLC260UDCR	
FB5806	1-414-235-22	FERRITE	00H	IC5500	6-710-089-01	IC K4D263281-VC50T	
FB5807	1-400-461-21	FERRITE	00H	IC5501	6-710-089-01	IC K4D263281-VC50T	
FB5808	1-400-382-11	FERRITE	00H	IC5800	6-704-819-01	IC CS4335-KS2R	
FB5809	1-400-382-11	FERRITE	00H	IC5801	6-704-001-01	IC BR24L02F-NSR2	
FB7000	1-400-794-21	FERRITE	00H	IC5802	6-709-927-01	IC R78H25C-TP-2	
FB7001	1-414-445-11	FERRITE	00H	IC5803	6-704-001-01	IC BR24L02F-NSR2	
FB7002	1-414-445-11	FERRITE	00H	IC5806	6-705-403-01	IC PQ070X012EH	
FB7003	1-414-445-11	FERRITE	00H	IC7000	6-707-927-01	IC BP9775FV	
FB7004	1-400-591-22	FERRITE	00H	IC7001	6-702-142-01	IC PQ07C10322P	
FB7005	1-400-110-21	FERRITE	00H	IC7002	6-710-037-01	IC M6390U1AEPF-G-BND-REEL	
FB7006	1-400-110-21	FERRITE	00H	IC7003	6-708-862-01	IC MML62FTE	
FB7007	1-400-110-21	FERRITE	00H	< SOCKET >			
FB7008	1-400-110-21	FERRITE	00H				
FB7009	1-400-591-22	FERRITE	00H	J4400	1-820-538-11	JACK (SMALL TYPE)	
FB7010	1-400-591-22	FERRITE	00H	J5800	1-820-764-11	PHONO JACK2P	
FB7011	1-400-591-22	FERRITE	00H	< COIL >			
FB7014	1-400-591-22	FERRITE	00H				
< FILTER >				L5000	1-457-360-21	INDUCTOR	00H
FL4001	1-234-177-21	FERRITE	00H	L5001	1-457-360-21	INDUCTOR	00H
FL5300	1-234-177-21	FERRITE	00H	L5002	1-457-360-21	INDUCTOR	00H
FL5301	1-234-177-21	FERRITE	00H	L5003	1-457-360-21	INDUCTOR	00H
FL5302	1-234-177-21	FERRITE	00H	L5004	1-457-360-21	INDUCTOR	00H

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
L5006	1-457-360-21	INDUCTOR	00H	Q5801	8-729-025-28	TRANSISTOR 2SK1828	
L5007	1-457-360-21	INDUCTOR	00H	Q5802	8-729-028-96	TRANSISTOR DTC114EUA-T106	
L5008	1-457-360-21	INDUCTOR	00H	Q5803	8-729-025-28	TRANSISTOR 2SK1828	
L5009	1-457-360-21	INDUCTOR	00H	Q5804	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
L5010	1-457-360-21	INDUCTOR	00H	Q5805	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
L5012	1-400-177-21	FEERLITE	00H	Q5807	6-551-864-01	TRANSISTOR DTC614TWT106	
L5200	1-469-561-21	INDUCTOR	1000H	Q5808	6-551-364-01	TRANSISTOR DTC614TWT106	
L5300	1-469-551-21	INDUCTOR	2.20H	Q5810	8-729-028-96	TRANSISTOR DTC114EUA-T106	
L5301	1-469-551-21	INDUCTOR	2.20H	Q5812	6-550-014-01	TRANSISTOR SSM6N15FU(TB55R)	
L5302	1-469-551-21	INDUCTOR	2.20H	Q5813	6-550-014-01	TRANSISTOR SSM6N15FU(TB55R)	
L5303	1-469-551-21	INDUCTOR	2.20H	Q7000	6-550-652-01	TRANSISTOR FDS4435A	
L5304	1-412-054-21	INDUCTOR	2.20H	Q7001	6-550-828-01	TRANSISTOR RSQ033P03TR	
L5305	1-400-177-21	FEERLITE	00H	Q7002	6-550-828-01	TRANSISTOR RSQ033P03TR	
L5804	1-469-555-21	INDUCTOR	100H	Q7003	6-550-663-01	TRANSISTOR RS8100W3FD5TB	
L5805	1-469-555-21	INDUCTOR	100H	Q7004	6-550-556-01	TRANSISTOR RTQ045N03TR	
L7000	1-400-175-21	INDUCTOR	470H	Q7005	6-550-851-01	TRANSISTOR RS8050P03TB	
L7001	1-457-041-21	INDUCTOR	100H	Q7007	8-729-620-13	TRANSISTOR 2SC414TFP-1EF	
L7002	1-456-787-21	INDUCTOR	100H	Q7008	8-729-028-96	TRANSISTOR DTC114EUA-T106	
L7003	1-461-080-11	INDUCTOR	220H	Q7009	6-550-663-01	TRANSISTOR RS8100W3FD5TB	
L7004	1-461-083-11	INDUCTOR	220H	Q7012	8-729-029-00	TRANSISTOR DTC114EUA-T106	
L7005	1-424-797-21	INDUCTOR	100H	Q7015	8-729-028-77	TRANSISTOR DTC114EUA-T106	
L7007	1-400-790-21	INDUCTOR	4.70H	Q7016	8-729-029-00	TRANSISTOR DTC114EUA-T106	
< PROTECTOR MODULE >							
PS4400 Δ	1-576-122-21	IC LINK	0.4A	R4001	1-216-864-11	SHORT CHIP	0
PS7000 Δ	1-576-603-21	FUSE	3.15A	R4002	1-216-864-11	SHORT CHIP	0
< TRANSISTOR >							
Q4001	6-551-387-01	TRANSISTOR SSM6N16FU		R4003	1-218-961-11	RES-CHIP	4.7K 5%
Q4003	8-729-028-74	TRANSISTOR DTA114TUA-T106		R4004	1-218-961-11	RES-CHIP	4.7K 5%
Q4004	8-729-013-28	TRANSISTOR HM1301FU-TB85R		R4005	1-216-821-11	METAL CHIP	1K 5%
Q4005	8-729-028-74	TRANSISTOR DTA114TUA-T106		R4007	1-218-937-11	RES-CHIP	47 5%
Q4006	8-729-029-04	TRANSISTOR DTC123JUA-T106		R4008	1-218-937-11	RES-CHIP	47 5%
Q4007	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4009	1-218-937-11	RES-CHIP	47 5%
Q4285	8-729-029-00	TRANSISTOR DTC114EUA-T106		R4010	1-218-996-81	SHORT CHIP	0
Q4286	8-729-028-77	TRANSISTOR DTA114TUA-T106		R4011	1-216-864-11	SHORT CHIP	0
Q4301	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R4012	1-216-864-11	SHORT CHIP	0
Q4400	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R4013	1-216-801-11	METAL CHIP	22 5%
Q4401	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R4019	1-216-864-11	SHORT CHIP	0
Q4500	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4020	1-216-813-11	METAL CHIP	220 5%
Q4502	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4021	1-216-801-11	METAL CHIP	22 5%
Q4503	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4022	1-216-801-11	METAL CHIP	22 5%
Q4504	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4023	1-216-801-11	METAL CHIP	22 5%
Q4505	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4025	1-216-864-11	SHORT CHIP	0
Q4506	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4026	1-216-801-11	METAL CHIP	22 5%
Q4507	8-729-028-96	TRANSISTOR DTC114EUA-T106					
Q5200	6-551-699-01	TRANSISTOR ISM1602MTP-1EF					
Q5201	6-551-699-01	TRANSISTOR ISM1602MTP-1EF					
Q5800	8-729-028-96	TRANSISTOR DTC114EUA-T106					

REFNO.	PARTNO	DESCRIPTION	REMARK		REFNO.	PARTNO	DESCRIPTION	REMARK	
R4027	1-218-990-81	SHORT CHIP	0		R4103	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4028	1-216-864-11	SHORT CHIP	0		R4111	1-218-933-11	RES-CHIP	22	5% 1/16W
R4029	1-216-864-11	SHORT CHIP	0		R4113	1-218-933-11	RES-CHIP	22	5% 1/16W
R4031	1-218-887-11	METAL CHIP	47K	0.5% 1/10W	R4120	1-216-864-11	SHORT CHIP	0	
R4032	1-216-864-11	SHORT CHIP	0		R4121	1-216-864-11	SHORT CHIP	0	
R4033	1-216-864-11	SHORT CHIP	0		R4122	1-216-864-11	SHORT CHIP	0	
R4034	1-218-863-11	METAL CHIP	4.7K	0.5% 1/10W	R4123	1-216-864-11	SHORT CHIP	0	
R4035	1-216-864-11	SHORT CHIP	0		R4124	1-216-864-11	SHORT CHIP	0	
R4036	1-218-963-11	RES-CHIP	6.8K	5% 1/16W	R4125	1-216-864-11	SHORT CHIP	0	
R4037	1-218-867-11	METAL CHIP	6.8K	0.5% 1/10W	R4134	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4038	1-218-963-11	RES-CHIP	6.8K	5% 1/16W	R4144	1-208-993-11	METAL CHIP	2.2K	0.5% 1/16W
R4039	1-216-864-11	SHORT CHIP	0		R4161	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4040	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4162	1-218-973-11	RES-CHIP	47K	5% 1/16W
R4041	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4164	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4042	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4165	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4043	1-208-927-11	METAL CHIP	47K	0.5% 1/16W	R4167	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4044	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4168	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4045	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4169	1-216-864-11	SHORT CHIP	0	
R4046	1-216-864-11	SHORT CHIP	0		R4180	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4047	1-216-864-11	SHORT CHIP	0		R4186	1-218-990-81	SHORT CHIP	0	
R4048	1-216-864-11	SHORT CHIP	0		R4188	1-218-990-81	SHORT CHIP	0	
R4049	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4190	1-208-888-81	METAL CHIP	910	0.5% 1/16W
R4050	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4192	1-218-943-81	RES-CHIP	100	5% 1/16W
R4051	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4193	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4052	1-216-864-11	SHORT CHIP	0		R4195	1-218-990-81	SHORT CHIP	0	
R4055	1-218-990-81	SHORT CHIP	0		R4196	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4056	1-218-990-81	SHORT CHIP	0		R4198	1-218-990-81	SHORT CHIP	0	
R4059	1-216-864-11	SHORT CHIP	0		R4199	1-218-943-81	RES-CHIP	100	5% 1/16W
R4064	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4202	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4065	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4203	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4067	1-216-864-11	SHORT CHIP	0		R4205	1-218-990-81	SHORT CHIP	0	
R4068	1-218-990-81	SHORT CHIP	0		R4206	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4069	1-208-855-81	METAL CHIP	47	0.5% 1/16W	R4207	1-218-943-11	RES-CHIP	470	5% 1/16W
R4070	1-216-864-11	SHORT CHIP	0		R4208	1-218-990-81	SHORT CHIP	0	
R4071	1-218-990-81	SHORT CHIP	0		R4209	1-218-990-81	SHORT CHIP	0	
R4074	1-218-990-81	SHORT CHIP	0		R4210	1-218-949-11	RES-CHIP	470	5% 1/16W
R4075	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4211	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4076	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4212	1-218-949-11	RES-CHIP	470	5% 1/16W
R4077	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4218	1-218-963-11	RES-CHIP	4.7K	5% 1/16W
R4078	1-216-864-11	SHORT CHIP	0		R4223	1-218-945-11	RES-CHIP	220	5% 1/16W
R4082	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4224	1-218-990-81	SHORT CHIP	0	
R4088	1-218-965-11	RES-CHIP	10K	5% 1/16W	R4225	1-218-937-11	RES-CHIP	47	5% 1/16W
R4092	1-216-864-11	SHORT CHIP	0		R4226	1-208-873-81	METAL CHIP	220	0.5% 1/16W
R4093	1-216-864-11	SHORT CHIP	0		R4227	1-218-937-11	RES-CHIP	47	5% 1/16W
R4096	1-208-899-11	METAL CHIP	4.7K	0.5% 1/16W	R4235	1-218-990-81	SHORT CHIP	0	
R4097	1-208-893-81	METAL CHIP	680	0.5% 1/16W	R4239	1-218-990-81	SHORT CHIP	0	
R4098	1-208-893-11	METAL CHIP	2.2K	0.5% 1/16W	R4240	1-208-943-11	METAL CHIP	220K	0.5% 1/16W
R4099	1-216-864-11	SHORT CHIP	0		R4242	1-218-943-81	RES-CHIP	100	5% 1/16W
R4100	1-216-864-11	SHORT CHIP	0		R4243	1-216-809-11	METAL CHIP	100	5% 1/10W
R4101	1-218-959-11	RES-CHIP	3.3K	5% 1/16W	R4246	1-218-965-11	RES-CHIP	10K	5% 1/16W

REF.NO.	PARTNO	DESCRIPTION	REMARK	REF.NO.	PARTNO	DESCRIPTION	REMARK
R4247	1-216-864-11	SHORT CHIP	0	R4423	1-216-801-11	METAL CHIP	22 5% 1/10W
R4255	1-400-591-22	FERRITE	00H	R4429	1-216-801-11	METAL CHIP	22 5% 1/10W
R4256	1-400-591-22	FERRITE	00H	R4430	1-216-801-11	METAL CHIP	22 5% 1/10W
R4257	1-400-591-22	FERRITE	00H	R4439	1-218-885-11	RES-CHIP	470K 5% 1/16W
R4258	1-400-591-22	FERRITE	00H	R4440	1-218-885-11	RES-CHIP	470K 5% 1/16W
R4259	1-400-591-22	FERRITE	00H	R4441	1-208-939-11	METAL CHIP	150K 0.5% 1/16W
R4260	1-400-591-22	FERRITE	00H	R4442	1-208-939-11	METAL CHIP	150K 0.5% 1/16W
R4261	1-400-591-22	FERRITE	00H	R4443	1-208-939-11	METAL CHIP	150K 0.5% 1/16W
R4262	1-400-591-22	FERRITE	00H	R4444	1-208-939-11	METAL CHIP	150K 0.5% 1/16W
R4263	1-400-591-22	FERRITE	00H	R4445	1-216-821-11	METAL CHIP	1K 5% 1/10W
R4264	1-400-591-22	FERRITE	00H	R4446	1-216-821-11	METAL CHIP	1K 5% 1/10W
R4265	1-400-591-22	FERRITE	00H	R4506	1-218-863-11	RES-CHIP	6.8K 5% 1/16W
R4266	1-216-864-11	SHORT CHIP	0	R4507	1-218-863-11	RES-CHIP	6.8K 5% 1/16W
R4267	1-400-591-22	FERRITE	00H	R4510	1-218-990-81	SHORT CHIP	0
R4270	1-218-941-81	RES-CHIP	100 5% 1/16W	R4515	1-208-935-11	METAL CHIP	100K 0.5% 1/16W
R4271	1-218-990-81	SHORT CHIP	0	R4516	1-218-978-11	RES-CHIP	120K 5% 1/16W
R4272	1-218-990-81	SHORT CHIP	0	R4517	1-208-935-11	METAL CHIP	100K 0.5% 1/16W
R4290	1-218-990-81	SHORT CHIP	0	R4518	1-208-923-11	METAL CHIP	33K 0.5% 1/16W
R4295	1-208-715-11	METAL CHIP	22K 0.5% 1/16W	R4542	1-218-865-11	RES-CHIP	10K 5% 1/16W
R4301	1-218-990-81	SHORT CHIP	0	R4543	1-218-865-11	RES-CHIP	10K 5% 1/16W
R4302	1-218-941-11	RES-CHIP	100 5% 1/16W	R4544	1-218-865-11	RES-CHIP	10K 5% 1/16W
R4303	1-218-990-81	SHORT CHIP	0	R4545	1-218-971-11	RES-CHIP	100K 5% 1/16W
R4307	1-218-990-81	SHORT CHIP	0	R4546	1-218-865-11	RES-CHIP	10K 5% 1/16W
R4308	1-218-990-81	SHORT CHIP	0	R4547	1-218-865-11	RES-CHIP	10K 5% 1/16W
R4309	1-218-957-11	RES-CHIP	2.2K 5% 1/16W	R4700	1-218-937-11	RES-CHIP	47 5% 1/16W
R4310	1-218-957-11	RES-CHIP	2.2K 5% 1/16W	R4710	1-218-990-81	SHORT CHIP	0
R4313	1-216-864-11	SHORT CHIP	0	R4715	1-218-865-11	RES-CHIP	22K 5% 1/16W
R4314	1-216-864-11	SHORT CHIP	0	R4716	1-218-865-11	RES-CHIP	22K 5% 1/16W
R4315	1-216-864-11	SHORT CHIP	0	R4717	1-218-869-11	RES-CHIP	22K 5% 1/16W
R4316	1-216-864-11	SHORT CHIP	0	R4718	1-218-869-11	RES-CHIP	22K 5% 1/16W
R4321	1-208-655-11	METAL CHIP	3.3K 0.5% 1/16W	R4719	1-216-864-11	SHORT CHIP	0
R4322	1-218-985-11	RES-CHIP	470K 5% 1/16W	R4720	1-216-864-11	SHORT CHIP	0
R4400	1-216-805-11	METAL CHIP	47 5% 1/10W	R4727	1-218-990-81	SHORT CHIP	0
R4401	1-216-805-11	METAL CHIP	47 5% 1/10W	R4728	1-218-990-81	SHORT CHIP	0
R4406	1-216-833-11	METAL CHIP	10K 5% 1/10W	R5004	1-218-990-81	SHORT CHIP	0
R4407	1-208-683-11	METAL CHIP	1K 0.5% 1/16W	R5007	1-218-990-81	SHORT CHIP	0
R4408	1-208-683-11	METAL CHIP	1K 0.5% 1/16W	R5009	1-218-865-11	RES-CHIP	10K 5% 1/16W
R4409	1-216-833-11	METAL CHIP	10K 5% 1/10W	R5012	1-218-865-11	RES-CHIP	10K 5% 1/16W
R4410	1-216-805-11	METAL CHIP	47 5% 1/10W	R5013	1-218-865-11	RES-CHIP	10K 5% 1/16W
R4411	1-216-805-11	METAL CHIP	47 5% 1/10W	R5015	1-218-885-11	RES-CHIP	1M 5% 1/16W
R4412	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5017	1-218-990-81	SHORT CHIP	0
R4413	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5018	1-218-941-11	RES-CHIP	100 5% 1/16W
R4414	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5019	1-208-699-11	METAL CHIP	4.7K 0.5% 1/16W
R4415	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5020	1-218-861-11	RES-CHIP	4.7K 5% 1/16W
R4416	1-216-821-11	METAL CHIP	1K 5% 1/10W	R5021	1-218-861-11	RES-CHIP	4.7K 5% 1/16W
R4417	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5022	1-218-861-11	RES-CHIP	4.7K 5% 1/16W
R4418	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5024	1-218-865-11	RES-CHIP	10K 5% 1/16W
R4419	1-216-845-11	METAL CHIP	100K 5% 1/10W	R5032	1-218-861-11	RES-CHIP	4.7K 5% 1/16W
R4421	1-216-801-11	METAL CHIP	22 5% 1/10W	R5039	1-218-935-11	RES-CHIP	33 5% 1/16W
R4422	1-216-801-11	METAL CHIP	22 5% 1/10W	R5200	1-218-957-11	RES-CHIP	2.2K 5% 1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK		REF.NO.	PART.NO	DESCRIPTION	REMARK	
R5201	1-218-957-11	RES-CHIP	2.2K	5%	1/1.6W	R5261	1-218-961-11	RES-CHIP	4.7K 5%
R5202	1-216-921-11	METAL CHIP	1K	5%	1/1.0W	R5262	1-218-961-11	RES-CHIP	4.7K 5%
R5203	1-216-921-11	METAL CHIP	1K	5%	1/1.0W	R5263	1-218-961-11	RES-CHIP	4.7K 5%
R5204	1-218-957-11	RES-CHIP	2.2K	5%	1/1.6W	R5264	1-218-961-11	RES-CHIP	4.7K 5%
R5205	1-218-957-11	RES-CHIP	2.2K	5%	1/1.6W	R5265	1-218-961-11	RES-CHIP	4.7K 5%
R5206	1-216-921-11	METAL CHIP	1K	5%	1/1.0W	R5304	1-216-235-91	SHORT CHIP	0
R5207	1-216-921-11	METAL CHIP	1K	5%	1/1.0W	R5500	1-218-961-11	METAL CHIP	51 0.5%
R5209	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5501	1-218-937-11	RES-CHIP	47 5%
R5210	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5502	1-218-961-11	METAL CHIP	51 0.5%
R5211	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5503	1-218-937-11	RES-CHIP	47 5%
R5212	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5504	1-218-933-11	RES-CHIP	22 5%
R5213	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5505	1-218-937-11	RES-CHIP	47 5%
R5214	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5506	1-218-937-11	RES-CHIP	47 5%
R5215	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5509	1-218-937-11	RES-CHIP	47 5%
R5218	1-218-990-81	SHORT CHIP	0			R5510	1-218-937-11	RES-CHIP	47 5%
R5219	1-216-984-11	SHORT CHIP	0			R5511	1-218-933-11	RES-CHIP	22 5%
R5220	1-216-984-11	SHORT CHIP	0			R5512	1-218-933-11	RES-CHIP	22 5%
R5221	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5513	1-218-939-11	RES-CHIP	68 5%
R5222	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5514	1-218-939-11	RES-CHIP	68 5%
R5223	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5515	1-218-939-11	RES-CHIP	68 5%
R5224	1-218-933-11	RES-CHIP	22	5%	1/1.6W	R5516	1-218-939-11	RES-CHIP	68 5%
R5225	1-218-933-11	RES-CHIP	22	5%	1/1.6W	R5517	1-218-961-11	METAL CHIP	51 0.5%
R5226	1-218-990-81	SHORT CHIP	0			R5518	1-218-937-11	RES-CHIP	47 5%
R5227	1-218-990-81	SHORT CHIP	0			R5519	1-218-961-11	METAL CHIP	51 0.5%
R5228	1-218-990-81	SHORT CHIP	0			R5520	1-218-937-11	RES-CHIP	47 5%
R5229	1-218-990-81	SHORT CHIP	0			R5522	1-218-847-11	METAL CHIP	1K 0.5%
R5230	1-218-990-81	SHORT CHIP	0			R5523	1-218-847-11	METAL CHIP	1K 0.5%
R5231	1-218-990-81	SHORT CHIP	0			R5524	1-218-937-11	RES-CHIP	47 5%
R5232	1-218-990-81	SHORT CHIP	0			R5525	1-218-937-11	RES-CHIP	47 5%
R5233	1-218-990-81	SHORT CHIP	0			R5526	1-218-937-11	RES-CHIP	47 5%
R5234	1-218-990-81	SHORT CHIP	0			R5527	1-218-937-11	RES-CHIP	47 5%
R5235	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5530	1-218-939-11	RES-CHIP	68 5%
R5236	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5531	1-218-939-11	RES-CHIP	68 5%
R5238	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5532	1-218-939-11	RES-CHIP	68 5%
R5239	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5533	1-218-939-11	RES-CHIP	68 5%
R5241	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5534	1-218-933-11	RES-CHIP	22 5%
R5243	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5535	1-218-933-11	RES-CHIP	22 5%
R5245	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5536	1-218-933-11	RES-CHIP	22 5%
R5247	1-218-990-81	SHORT CHIP	0			R5537	1-218-933-11	RES-CHIP	22 5%
R5248	1-218-990-81	SHORT CHIP	0			R5538	1-218-933-11	RES-CHIP	22 5%
R5251	1-218-990-81	SHORT CHIP	0			R5539	1-218-933-11	RES-CHIP	22 5%
R5252	1-218-990-81	SHORT CHIP	0			R5540	1-218-933-11	RES-CHIP	22 5%
R5253	1-218-990-81	SHORT CHIP	0			R5541	1-218-933-11	RES-CHIP	22 5%
R5254	1-218-990-81	SHORT CHIP	0			R5543	1-218-933-11	RES-CHIP	22 5%
R5255	1-218-990-81	SHORT CHIP	0			R5544	1-218-933-11	RES-CHIP	22 5%
R5256	1-218-990-81	SHORT CHIP	0			R5545	1-218-933-11	RES-CHIP	22 5%
R5257	1-218-990-81	SHORT CHIP	0			R5546	1-218-933-11	RES-CHIP	22 5%
R5258	1-218-990-81	SHORT CHIP	0			R5547	1-218-933-11	RES-CHIP	22 5%
R5259	1-218-990-81	SHORT CHIP	0			R5548	1-218-933-11	RES-CHIP	22 5%
R5260	1-218-961-11	RES-CHIP	4.7K	5%	1/1.6W	R5549	1-218-933-11	RES-CHIP	22 5%

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
R5950	1-218-933-11	RES-CHIP	22 5% 1/1.6W	R5959	1-208-697-11	METAL CHIP	3.9K 0.5% 1/1.6W
R5902	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5860	1-218-957-11	RES-CHIP	2.2K 5% 1/1.6W
R5803	1-208-683-11	METAL CHIP	1K 0.5% 1/1.6W	R5861	1-218-957-11	RES-CHIP	2.2K 5% 1/1.6W
R5804	1-218-990-81	SHORT CHIP	0	R5862	1-208-939-11	METAL CHIP	150K 0.5% 1/1.6W
R5805	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5863	1-208-939-11	METAL CHIP	150K 0.5% 1/1.6W
R5806	1-208-683-11	METAL CHIP	1K 0.5% 1/1.6W	R5864	1-216-921-11	METAL CHIP	1K 5% 1/1.0W
R5807	1-218-990-81	SHORT CHIP	0	R5865	1-208-939-11	METAL CHIP	150K 0.5% 1/1.6W
R5808	1-218-990-81	SHORT CHIP	0	R5866	1-208-939-11	METAL CHIP	150K 0.5% 1/1.6W
R5809	1-218-990-81	SHORT CHIP	0	R5867	1-216-921-11	METAL CHIP	1K 5% 1/1.0W
R5810	1-216-964-11	SHORT CHIP	0	R5870	1-218-953-11	RES-CHIP	1K 5% 1/1.6W
R5813	1-208-911-11	METAL CHIP	10K 0.5% 1/1.6W	R5871	1-218-935-11	RES-CHIP	33 5% 1/1.6W
R5814	1-216-964-11	SHORT CHIP	0	R5872	1-218-973-11	RES-CHIP	47K 5% 1/1.6W
R5815	1-208-683-11	METAL CHIP	1K 0.5% 1/1.6W	R5873	1-218-973-11	RES-CHIP	47K 5% 1/1.6W
R5816	1-208-683-11	METAL CHIP	1K 0.5% 1/1.6W	R5875	1-218-989-11	RES-CHIP	1M 5% 1/1.6W
R5817	1-218-941-81	RES-CHIP	100 5% 1/1.6W	R5877	1-218-956-11	RES-CHIP	1.8K 5% 1/1.6W
R5818	1-218-941-81	RES-CHIP	100 5% 1/1.6W	R5878	1-218-989-11	RES-CHIP	1M 5% 1/1.6W
R5819	1-218-990-81	SHORT CHIP	0	R5879	1-218-990-81	SHORT CHIP	0
R5820	1-218-990-81	SHORT CHIP	0	R5881	1-218-961-11	RES-CHIP	4.7K 5% 1/1.6W
R5821	1-208-911-11	METAL CHIP	10K 0.5% 1/1.6W	R5882	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R5822	1-218-973-11	RES-CHIP	47K 5% 1/1.6W	R5883	1-220-976-81	METAL CHIP	18 0.5% 1/1.6W
R5823	1-218-941-81	RES-CHIP	100 5% 1/1.6W	R5884	1-208-687-11	METAL CHIP	1.5K 0.5% 1/1.6W
R5824	1-218-941-81	RES-CHIP	100 5% 1/1.6W	R5885	1-208-675-11	METAL CHIP	470 0.5% 1/1.6W
R5825	1-208-697-11	METAL CHIP	3.9K 0.5% 1/1.6W	R5886	1-208-647-11	METAL CHIP	33 0.5% 1/1.6W
R5826	1-208-697-11	METAL CHIP	3.9K 0.5% 1/1.6W	R5887	1-208-683-81	METAL CHIP	680 0.5% 1/1.6W
R5827	1-208-697-11	METAL CHIP	3.9K 0.5% 1/1.6W	R5888	1-208-697-11	METAL CHIP	3.9K 0.5% 1/1.6W
R5829	1-218-941-81	RES-CHIP	100 5% 1/1.6W	R5889	1-208-697-11	METAL CHIP	3.9K 0.5% 1/1.6W
R5830	1-218-973-11	RES-CHIP	47K 5% 1/1.6W	R5890	1-218-946-11	RES-CHIP	390 5% 1/1.6W
R5831	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5892	1-218-933-11	RES-CHIP	22 5% 1/1.6W
R5832	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5893	1-218-937-11	RES-CHIP	47 5% 1/1.6W
R5833	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5894	1-218-937-11	RES-CHIP	47 5% 1/1.6W
R5834	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5895	1-218-937-11	RES-CHIP	47 5% 1/1.6W
R5835	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5896	1-218-937-11	RES-CHIP	47 5% 1/1.6W
R5836	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5900	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R5837	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5901	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R5838	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5902	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R5839	1-218-937-11	RES-CHIP	47 5% 1/1.6W	R5903	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R5840	1-208-697-11	METAL CHIP	3.9K 0.5% 1/1.6W	R5904	1-218-965-11	RES-CHIP	10K 5% 1/1.6W
R5841	1-208-697-11	METAL CHIP	3.9K 0.5% 1/1.6W	R5907	1-218-990-81	SHORT CHIP	0
R5844	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5908	1-218-990-81	SHORT CHIP	0
R5845	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5909	1-218-990-81	SHORT CHIP	0
R5846	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R5910	1-218-990-81	SHORT CHIP	0
R5847	1-208-697-11	METAL CHIP	3.9K 0.5% 1/1.6W	R7000	1-218-973-11	METAL CHIP	18K 0.5% 1/1.0W
R5848	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R7001	1-218-973-11	METAL CHIP	10K 0.5% 1/1.0W
R5849	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R7002	1-218-973-11	METAL CHIP	15K 0.5% 1/1.0W
R5850	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R7003	1-218-667-11	METAL CHIP	6.8K 0.5% 1/1.0W
R5851	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R7004	1-216-941-11	METAL CHIP	47K 5% 1/1.0W
R5854	1-218-965-11	RES-CHIP	470K 5% 1/1.6W	R7005	1-218-995-11	METAL CHIP	10K 0.5% 1/1.0W
R5855	1-218-965-11	RES-CHIP	470K 5% 1/1.6W	R7006	1-218-995-11	METAL CHIP	100K 0.5% 1/1.0W
R5856	1-218-929-11	RES-CHIP	10 5% 1/1.6W	R7007	1-218-663-11	METAL CHIP	4.7K 0.5% 1/1.0W
R5857	1-208-697-11	METAL CHIP	3.9K 0.5% 1/1.6W	R7008	1-218-991-11	METAL CHIP	68K 0.5% 1/1.0W

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
R7009	1-216-841-11	METAL CHIP 47K 5%	1/10W	R7080	1-218-990-81	SHORT CHIP 0	
R7010	1-218-875-11	METAL CHIP 15K 0.5%	1/10W	R7082	1-218-875-11	METAL CHIP 15K 0.5%	1/10W
R7011	1-218-879-11	METAL CHIP 22K 0.5%	1/10W	R7083	1-218-863-11	METAL CHIP 4.7K 0.5%	1/10W
R7012	1-216-835-11	METAL CHIP 15K 5%	1/10W	R7085	1-208-909-11	METAL CHIP 8.2K 0.5%	1/16W
R7013	1-218-882-11	METAL CHIP 30K 0.5%	1/10W	R7087	1-218-867-11	RES-CHIP 15K 5%	1/16W
R7014	1-218-837-11	RES-CHIP 47 5%	1/16W	R7090	1-218-878-11	RES-CHIP 120K 5%	1/16W
R7015	1-218-937-11	RES-CHIP 47 5%	1/16W	R7091	1-208-929-81	METAL CHIP 56K 0.5%	1/16W
R7016	1-216-295-91	SHORT CHIP 0		R7092	1-218-863-11	RES-CHIP 6.8K 5%	1/16W
R7017	1-218-861-11	RES-CHIP 4.7K 5%	1/16W	R7093	1-216-295-91	SHORT CHIP 0	
R7019	1-216-835-11	METAL CHIP 15K 5%	1/10W	R7094	1-216-864-11	SHORT CHIP 0	
R7020	1-216-864-11	SHORT CHIP 0		R7095	1-216-864-11	SHORT CHIP 0	
R7021	1-216-837-11	METAL CHIP 22K 5%	1/10W	R7096	1-216-864-11	SHORT CHIP 0	
R7022	1-216-864-11	SHORT CHIP 0		R7097	1-216-295-91	SHORT CHIP 0	
R7023	1-216-864-11	SHORT CHIP 0		R7098	1-216-295-91	SHORT CHIP 0	
R7024	1-216-837-11	METAL CHIP 22K 5%	1/10W	R7099	1-216-295-91	SHORT CHIP 0	
R7025	1-216-864-11	SHORT CHIP 0		R7100	1-216-295-91	SHORT CHIP 0	
R7026	1-216-864-11	SHORT CHIP 0		R7101	1-216-864-11	SHORT CHIP 0	
R7027	1-218-990-81	SHORT CHIP 0		R7102	1-216-864-11	SHORT CHIP 0	
R7028	1-208-933-11	METAL CHIP 82K 0.5%	1/16W	R7103	1-216-864-11	SHORT CHIP 0	
R7029	1-208-935-11	METAL CHIP 100K 0.5%	1/16W	R7104	1-216-864-11	SHORT CHIP 0	
R7030	1-208-943-11	METAL CHIP 220K 0.5%	1/16W	R7105	1-218-973-11	RES-CHIP 47K 5%	1/16W
R7031	1-218-971-11	RES-CHIP 33K 5%	1/16W	R7106	1-208-912-11	METAL CHIP 10K 0.5%	1/16W
R7032	1-218-990-81	SHORT CHIP 0		R7107	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R7033	1-218-990-81	SHORT CHIP 0		R7108	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R7034	1-218-990-81	SHORT CHIP 0		R7109	1-218-973-11	RES-CHIP 47K 5%	1/16W
R7035	1-218-990-81	SHORT CHIP 0		R7110	1-216-864-11	SHORT CHIP 0	
R7036	1-218-990-81	SHORT CHIP 0		R7111	1-216-864-11	SHORT CHIP 0	
R7037	1-218-990-81	SHORT CHIP 0		R7112	1-218-849-11	METAL CHIP 1.2K 0.5%	1/10W
R7038	1-208-713-11	METAL CHIP 18K 0.5%	1/16W	R7119	1-218-990-81	SHORT CHIP 0	
R7039	1-218-990-81	SHORT CHIP 0		< RESISTOR CHIP >			
R7041	1-218-965-11	RES-CHIP 10K 5%	1/16W	RB4007	1-234-378-21	RES, NETWORK 10K	(1005X4)
R7043	1-208-713-11	METAL CHIP 18K 0.5%	1/16W	RB4008	1-234-378-21	RES, NETWORK 10K	(1005X4)
R7044	1-218-990-81	SHORT CHIP 0		RB4009	1-234-378-21	RES, NETWORK 47	(1005X4)
R7045	1-218-941-81	RES-CHIP 100 5%	1/16W	RB4010	1-234-378-21	RES, NETWORK 47	(1005X4)
R7046	1-216-295-91	SHORT CHIP 0		RB4015	1-234-371-21	RES, NETWORK 47	(1005X4)
R7048	1-216-864-11	SHORT CHIP 0		RB4016	1-234-371-21	RES, NETWORK 47	(1005X4)
R7049	1-216-864-11	SHORT CHIP 0		RB4018	1-234-371-21	RES, NETWORK 47	(1005X4)
R7050	1-216-825-11	METAL CHIP 2.2K 5%	1/10W	RB4019	1-234-371-21	RES, NETWORK 47	(1005X4)
R7051	1-218-839-11	METAL CHIP 470 0.5%	1/10W	RB4020	1-234-371-21	RES, NETWORK 47	(1005X4)
R7053	1-218-859-11	METAL CHIP 3.3K 0.5%	1/10W	RB4700	1-234-371-11	RES, NETWORK 100	(1005X4)
R7054	1-218-843-11	METAL CHIP 680 0.5%	1/10W	RB4701	1-234-372-11	RES, NETWORK 100	(1005X4)
R7055	1-218-867-11	METAL CHIP 6.8K 0.5%	1/10W	RB4707	1-234-379-21	RES, NETWORK 22K	(1005X4)
R7056	1-218-867-11	METAL CHIP 6.8K 0.5%	1/10W	RB4708	1-234-379-21	RES, NETWORK 22K	(1005X4)
R7057	1-216-843-11	METAL CHIP 68K 5%	1/10W	RB4709	1-234-379-21	RES, NETWORK 22K	(1005X4)
R7058	1-216-851-11	METAL CHIP 330K 5%	1/10W	RB4710	1-234-379-21	RES, NETWORK 22K	(1005X4)
R7060	1-208-911-11	METAL CHIP 10K 0.5%	1/16W	RB4711	1-234-379-21	RES, NETWORK 22K	(1005X4)
R7063	1-208-911-11	METAL CHIP 10K 0.5%	1/16W	RB4712	1-234-379-21	RES, NETWORK 22K	(1005X4)
R7064	1-216-864-11	SHORT CHIP 0		RB5000	1-234-371-11	RES, NETWORK 100	(1005X4)
R7066	1-208-711-11	METAL CHIP 15K 0.5%	1/16W	RB5001	1-234-371-11	RES, NETWORK 100	(1005X4)
R7067	1-208-911-11	METAL CHIP 10K 0.5%	1/16W	RB5002	1-234-371-11	RES, NETWORK 100	(1005X4)

REF.NO.	PART.NO.	DESCRIPTION	REMARK	REF.NO.	PART.NO.	DESCRIPTION	REMARK
RB5003	1-234-372-11	RES, NETWORK 100	(1005X4)	VD5803	6-500-701-01	DIODE P68L010603NR	
RB5004	1-234-372-11	RES, NETWORK 100	(1005X4)	VD5804	6-500-701-01	DIODE P68L010603NR	
RB5005	1-234-377-21	RES, NETWORK 4,7K	(1005X4)	VD5805	6-500-701-01	DIODE P68L010603NR	
RB5006	1-234-377-21	RES, NETWORK 4,7K	(1005X4)	VD5806	6-500-701-01	DIODE P68L010603NR	
RB5007	1-234-377-21	RES, NETWORK 4,7K	(1005X4)	VD5807	6-500-701-01	DIODE P68L010603NR	
RB5212	1-234-377-21	RES, NETWORK 4,7K	(1005X4)	VD5808	6-500-701-01	DIODE P68L010603NR	
RB5213	1-234-377-21	RES, NETWORK 4,7K	(1005X4)	VD5809	6-500-701-01	DIODE P68L010603NR	
RB5501	1-234-370-21	RES, NETWORK 22	(1005X4)	VD5810	6-500-701-01	DIODE P68L010603NR	
RB5502	1-234-370-21	RES, NETWORK 22	(1005X4)	VD5811	6-500-701-01	DIODE P68L010603NR	
RB5503	1-234-370-21	RES, NETWORK 22	(1005X4)	VD5812	6-500-701-01	DIODE P68L010603NR	
RB5504	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5813	6-500-701-01	DIODE P68L010603NR	
RB5505	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5814	6-500-701-01	DIODE P68L010603NR	
RB5506	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5815	6-500-701-01	DIODE P68L010603NR	
RB5507	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5816	6-500-701-01	DIODE P68L010603NR	
RB5508	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5817	6-500-701-01	DIODE P68L010603NR	
RB5509	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5818	6-500-701-01	DIODE P68L010603NR	
RB5510	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5819	6-500-701-01	DIODE P68L010603NR	
RB5511	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5820	6-500-701-01	DIODE P68L010603NR	
RB5516	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5821	6-500-701-01	DIODE P68L010603NR	
RB5517	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5822	6-500-701-01	DIODE P68L010603NR	
RB5518	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5823	6-500-701-01	DIODE P68L010603NR	
RB5519	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5824	6-500-701-01	DIODE P68L010603NR	
RB5520	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5825	6-500-701-01	DIODE P68L010603NR	
RB5521	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5826	6-500-701-01	DIODE P68L010603NR	
RB5522	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5827	6-500-701-01	DIODE P68L010603NR	
RB5523	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5828	6-500-701-01	DIODE P68L010603NR	
RB5600	1-242-963-21	RES, NETWORK 33	(1005X4)	VD5829	6-500-701-01	DIODE P68L010603NR	
RB5601	1-234-371-21	RES, NETWORK 47	(1005X4)	VD5830	6-500-701-01	DIODE P68L010603NR	
RB5602	1-234-371-21	RES, NETWORK 47	(1005X4)	VD5831	6-500-701-01	DIODE P68L010603NR	
RB5603	1-234-371-21	RES, NETWORK 47	(1005X4)	VD5832	6-500-701-01	DIODE P68L010603NR	
RB5604	1-234-371-21	RES, NETWORK 47	(1005X4)	VD5833	6-500-701-01	DIODE P68L010603NR	
RB5605	1-234-371-21	RES, NETWORK 47	(1005X4)	VD5834	6-500-701-01	DIODE P68L010603NR	
RB5606	1-234-371-21	RES, NETWORK 47	(1005X4)	VD5835	6-500-701-01	DIODE P68L010603NR	
RB5607	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD5836	6-500-701-01	DIODE P68L010603NR	
RB5608	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD5837	6-500-701-01	DIODE P68L010603NR	
RB5609	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD5838	6-500-701-01	DIODE P68L010603NR	
RB5610	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD5839	6-500-701-01	DIODE P68L010603NR	
RB5611	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD5840	6-500-701-01	DIODE P68L010603NR	
RB5612	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD5841	6-500-701-01	DIODE P68L010603NR	
< VARISTOR >				VD5842	6-500-701-01	DIODE P68L010603NR	
VD4400	1-802-078-11	VARISTOR (SMD)		VD5843	6-500-701-01	DIODE P68L010603NR	
VD4401	1-802-078-11	VARISTOR (SMD)		VD5844	6-500-701-01	DIODE P68L010603NR	
VD4402	1-802-078-11	VARISTOR (SMD)		VD5845	6-500-701-01	DIODE P68L010603NR	
VD4403	1-802-078-11	VARISTOR (SMD)		VD5846	6-500-701-01	DIODE P68L010603NR	
VD4404	1-802-078-11	VARISTOR (SMD)		VD5847	6-500-701-01	DIODE P68L010603NR	
VD4405	1-802-078-11	VARISTOR (SMD)		VD5848	6-500-701-01	DIODE P68L010603NR	
VD4406	1-802-078-11	VARISTOR (SMD)		VD5849	6-500-701-01	DIODE P68L010603NR	
VD5801	1-802-078-11	VARISTOR (SMD)		VD5850	6-500-701-01	DIODE P68L010603NR	
VD5802	1-802-078-11	VARISTOR (SMD)		VD5851	6-500-701-01	DIODE P68L010603NR	
< CAPACITOR >				VD5852	6-500-701-01	DIODE P68L010603NR	
C2008	1-127-573-11	CERAMIC CHIP 10P	10K 1	VD5853	6-500-701-01	DIODE P68L010603NR	
C2009	1-127-573-11	CERAMIC CHIP 10P	10K 1	VD5854	6-500-701-01	DIODE P68L010603NR	
C2013	1-127-715-11	CERAMIC CHIP 0,22UF	10K 1	VD5855	6-500-701-01	DIODE P68L010603NR	
C2015	1-117-681-11	ELECT CHIP 100PF	20,00K 1	VD5856	6-500-701-01	DIODE P68L010603NR	
C2016	1-127-573-11	CERAMIC CHIP 10P	10K 1	VD5857	6-500-701-01	DIODE P68L010603NR	
C2017	1-127-573-11	CERAMIC CHIP 10P	10K 1	VD5858	6-500-701-01	DIODE P68L010603NR	
C2018	1-127-715-11	CERAMIC CHIP 0,22UF	10K 1	VD5859	6-500-701-01	DIODE P68L010603NR	
C2019	1-124-779-00	ELECT CHIP 100F	20,00K 1	VD5860	6-500-701-01	DIODE P68L010603NR	
C2020	1-127-715-11	CERAMIC CHIP 0,22UF	10K 1	VD5861	6-500-701-01	DIODE P68L010603NR	
C2021	1-127-715-11	CERAMIC CHIP 0,22UF	10K 1	VD5862	6-500-701-01	DIODE P68L010603NR	
< CRYSTAL >				VD5863	6-500-701-01	DIODE P68L010603NR	
XA001	1-813-076-21	PIEZOELECTRIC OSCILLATOR		VD5864	6-500-701-01	DIODE P68L010603NR	
XA009	1-813-784-21	VIBRATOR, CRYSTAL		VD5865	6-500-701-01	DIODE P68L010603NR	
XS000	1-813-884-11	VIBRATOR, CRYSTAL 14,31810MHZ		VD5866	6-500-701-01	DIODE P68L010603NR	
XS800	1-813-328-11	VIBRATOR, CRYSTAL 27MHZ		VD5867	6-500-701-01	DIODE P68L010603NR	
* A-1184-346-A AE COMPLETE				VD5868	6-500-701-01	DIODE P68L010603NR	
< CAPACITOR >				VD5869	6-500-701-01	DIODE P68L010603NR	
C2023	1-117-681-11	ELECT CHIP 100PF	20,00K 1	VD5870	6-500-701-01	DIODE P68L010603NR	
C2024	1-127-573-11	CERAMIC CHIP 10P	10K 1	VD5871	6-500-701-01	DIODE P68L010603NR	
C2025	1-127-573-11	CERAMIC CHIP 10P	10K 1	VD5872	6-500-701-01	DIODE P68L010603NR	
C2026	1-125-689-11	CERAMIC CHIP 2,2UF	0,25PF 5	VD5873	6-500-701-01	DIODE P68L010603NR	
C2027	1-162-906-11	CERAMIC CHIP 3PF	0,25PF 5	VD5874	6-500-701-01	DIODE P68L010603NR	
C2028	1-127-715-11	CERAMIC CHIP 0,22UF	10K 1	VD5875	6-500-701-01	DIODE P68L010603NR	
C2029	1-117-681-11	ELECT CHIP 100PF	20,00K 1	VD5876	6-500-701-01	DIODE P68L010603NR	
C2033	1-125-689-11	CERAMIC CHIP 2,2UF	10K 1	VD5877	6-500-701-01	DIODE P68L010603NR	
C2040	1-162-927-11	CERAMIC CHIP 100PF	5,00K 5	VD5878	6-500-701-01	DIODE P68L010603NR	
C2041	1-162-927-11	CERAMIC CHIP 100PF	5,00K 5	VD5879	6-500-701-01	DIODE P68L010603NR	

REF.NO.	PARTNO	DESCRIPTION	REMARK	REF.NO.	PARTNO	DESCRIPTION	REMARK
C2042	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C2548	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 5V
C2101	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C2549	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 5V
C2103	1-117-681-11	ELECT CHIP 1000PF	20.00% 16V	C2550	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 5V
C2105	1-164-227-11	CERAMIC CHIP 0.0020UF	10.00% 25V	C2551	1-127-573-11	CERAMIC CHIP 1UF	10% 1
C2111	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C2552	1-127-573-11	CERAMIC CHIP 1UF	10% 1
C2114	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	C2553	1-126-394-11	ELECT CHIP 100F	20.00% 1
C2115	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C2554	1-126-394-11	ELECT CHIP 100F	20.00% 1
C2117	1-126-204-11	ELECT CHIP 47UF	20.00% 16V	C2555	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 2
C2119	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2556	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 5V
C2120	1-127-715-11	CERAMIC CHIP 0.22UF	10% 16V	C2557	1-126-396-11	ELECT CHIP 47UF	20.00% 1
C2122	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C2560	1-112-593-11	CERAMIC CHIP 1000PF	5% 5
C2127	1-117-681-11	ELECT CHIP 1000F	20.00% 16V	C2561	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 2
C2502	1-162-928-11	CERAMIC CHIP 120PF	5.00% 50V	C2562	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 2
C2504	1-162-906-11	CERAMIC CHIP 1.5PF	0.25PF 50V	C2563	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 2
C2505	1-162-906-11	CERAMIC CHIP 1.5PF	0.25PF 50V	C2564	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 2
C2507	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	C2565	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 2
C2508	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2573	1-126-396-11	ELECT CHIP 47UF	20.00% 1
C2509	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2575	1-100-912-11	CERAMIC CHIP 1UF	10% 2
C2510	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C2576	1-100-912-11	CERAMIC CHIP 1UF	10% 2
C2511	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C2583	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 2
C2512	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C2586	1-100-912-11	CERAMIC CHIP 1UF	10% 2
C2513	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C2587	1-100-912-11	CERAMIC CHIP 1UF	10% 2
C2514	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	C2588	1-126-394-11	ELECT CHIP 100F	20.00% 1
C2515	1-164-933-11	CERAMIC CHIP 220PF	10.00% 50V	C2589	1-164-004-11	ELECT CHIP 100F	20.00% 1
C2517	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2590	1-126-394-11	ELECT CHIP 100F	20.00% 1
C2518	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2591	1-126-394-11	ELECT CHIP 100F	20.00% 1
C2519	1-126-394-11	ELECT CHIP 100F	20.00% 16V	C2592	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 5
C2520	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C2593	1-164-217-11	CERAMIC CHIP 150PF	5.00% 5
C2521	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2594	1-164-217-11	CERAMIC CHIP 150PF	5.00% 5
C2523	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2595	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 5
C2524	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2596	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 5
C2525	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2597	1-164-217-11	CERAMIC CHIP 150PF	5.00% 5
C2527	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2598	1-164-217-11	CERAMIC CHIP 150PF	5.00% 5
C2528	1-126-396-11	ELECT CHIP 470F	20.00% 16V	C2599	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 5
C2529	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2600	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 2
C2530	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C2601	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 2
C2533	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2602	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 2
C2534	1-124-779-00	ELECT CHIP 100F	20.00% 16V	C2603	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 2
C2535	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2604	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 2
C2536	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2605	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 2
C2537	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2606	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 2
C2538	1-126-394-11	ELECT CHIP 100F	20.00% 16V	C2607	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 2
C2539	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C2608	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 2
C2540	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C2613	1-112-797-11	ELECT CHIP 470UF	20% 3
C2542	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2614	1-112-800-11	ELECT CHIP 100UF	20% 3
C2543	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C2615	1-112-800-11	ELECT CHIP 100UF	20% 3
C2544	1-126-204-11	ELECT CHIP 47UF	20.00% 16V	C2616	1-112-800-11	ELECT CHIP 100UF	20% 3
C2545	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2617	1-112-800-11	ELECT CHIP 100UF	20% 3
C2546	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2618	1-100-912-11	CERAMIC CHIP 1UF	10% 2
C2547	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2619	1-100-912-11	CERAMIC CHIP 1UF	10% 2

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
C2620	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9046	1-100-997-91	CERAMIC CHIP 0.1UF	10% 10% 2
C2621	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9047	1-125-889-11	CERAMIC CHIP 2.2UF	10% 10% 1
C2623	1-165-918-91	CERAMIC CHIP 0.68UF	10% 25V	C9048	1-125-889-11	CERAMIC CHIP 2.2UF	10% 10% 1
C2624	1-165-918-91	CERAMIC CHIP 0.68UF	10% 25V	C9049	1-127-573-11	CERAMIC CHIP 1UF	10% 10% 1
C2625	1-165-918-91	CERAMIC CHIP 0.68UF	10% 25V	C9050	1-127-573-11	CERAMIC CHIP 1UF	10% 10% 1
C2626	1-165-918-91	CERAMIC CHIP 0.68UF	10% 25V	C9051	1-127-573-11	CERAMIC CHIP 1UF	10% 10% 1
C2627	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9052	1-127-573-11	CERAMIC CHIP 1UF	10% 10% 1
C2628	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9057	1-162-923-11	CERAMIC CHIP 47PF	5.00% 5.00% 5
C2647	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9058	1-162-923-11	CERAMIC CHIP 47PF	5.00% 5.00% 5
C2648	1-107-926-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9060	1-162-962-11	CERAMIC CHIP 470PF	10.00% 5.00% 5
C2800	1-124-719-00	ELECT CHIP 100F	20.00% 16V	C9061	1-162-962-11	CERAMIC CHIP 470PF	10.00% 5.00% 5
C2801	1-107-926-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9065	1-162-923-11	CERAMIC CHIP 47PF	5.00% 5.00% 5
C2802	1-107-926-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9066	1-162-923-11	CERAMIC CHIP 47PF	5.00% 5.00% 5
C2803	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C9067	1-162-923-11	CERAMIC CHIP 47PF	5.00% 5.00% 5
C2804	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C9068	1-162-923-11	CERAMIC CHIP 47PF	5.00% 5.00% 5
C2805	1-126-904-11	ELECT CHIP 47UF	20.00% 16V	C9069	1-162-923-11	CERAMIC CHIP 47PF	5.00% 5.00% 5
C2809	1-126-994-11	ELECT CHIP 100F	20.00% 16V	C9070	1-162-923-11	CERAMIC CHIP 47PF	5.00% 5.00% 5
C2810	1-107-926-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9501	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 2
C2811	1-124-719-00	ELECT CHIP 100F	20.00% 16V	C9502	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 2
C2812	1-107-926-11	CERAMIC CHIP 0.1UF	10.00% 16V	< CONNECTOR >			
C2813	1-126-904-11	ELECT CHIP 100F	20.00% 16V				
C2814	1-124-719-00	ELECT CHIP 100F	20.00% 16V				
C2815	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V				
C2816	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V				
C2817	1-126-996-11	ELECT CHIP 47UF	20.00% 16V				
C2818	1-126-996-11	ELECT CHIP 47UF	20.00% 16V				
C2819	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V				
C2826	1-127-931-21	ELECT CHIP 470UF	20% 16V				
C9001	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V				
C9003	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	C9523	* 1-780-408-11	TERMINAL	
C9005	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	C9524	* 1-780-408-11	TERMINAL	
C9007	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	C9525	* 1-780-408-11	TERMINAL	
C9009	1-164-227-11	CERAMIC CHIP 0.001UF	10.00% 25V	C9526	* 1-780-408-11	TERMINAL	
C9010	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	< DIODE >			
C9011	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V				
C9012	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V				
C9013	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V				
C9014	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V				
C9015	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V				
C9016	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V				
C9021	1-128-992-21	ELECT CHIP 47UF	20% 25V				
C9027	1-162-970-11	CERAMIC CHIP 0.00UF	10.00% 25V				
C9028	1-128-992-21	ELECT CHIP 47UF	20% 25V				
C9029	1-128-992-21	ELECT CHIP 47UF	20% 25V				
C9030	1-128-992-21	ELECT CHIP 47UF	20% 25V				
C9031	1-128-992-21	ELECT CHIP 47UF	20% 25V	D2513	8-719-074-43	DIODE BAS316-115	
C9032	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V	D2514	6-501-123-01	DIODE RB160M-60TR	
C9043	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D2515	6-501-123-01	DIODE RB160M-60TR	
C9044	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D2516	6-501-123-01	DIODE RB160M-60TR	
C9045	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	D2517	6-501-123-01	DIODE RB160M-60TR	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D2804	8-719-074-43	DIODE BAS316-115		IC2802	8-759-359-49	IC N3M341AV(TK2)	
D2805	8-719-074-43	DIODE BAS316-115		IC2803	6-709-927-01	IC FR8H225C-TP-2	
D9001	8-719-070-63	DIODE P0210P-115		IC2804	6-709-927-01	IC FR8H225C-TP-2	
D9002	8-719-072-68	DIODE P0213B-115		< SOCKET >			
D9003	8-719-070-63	DIODE P0210P-115					
D9004	8-719-070-63	DIODE P0210P-115		J9001	1-695-549-31	SOCKET, PIN 21P	
D9005	8-719-070-57	DIODE P025_6B-115		J9002	1-695-549-31	SOCKET, PIN 21P	
D9007	8-719-070-57	DIODE P025_6B-115		J9003	1-819-358-11	PHONO JACK	
D9008	8-719-070-63	DIODE P0210P-115		J9004	1-819-354-31	PHONO JACK 5P	
D9009	8-719-072-68	DIODE P0213B-115		< COIL >			
D9010	8-719-070-63	DIODE P0210P-115		L2002	1-469-557-21	INDUCTOR 22H	
D9011	8-719-070-57	DIODE P025_6B-115		L2003	1-469-555-21	INDUCTOR 10H	
D9012	8-719-070-63	DIODE P0210P-115		L2004	1-469-555-21	INDUCTOR 10H	
D9013	8-719-070-57	DIODE P025_6B-115		L2101	1-469-555-21	INDUCTOR 10H	
D9015	8-719-070-57	DIODE P025_6B-115		L2501	1-412-990-41	INDUCTOR 8.20H	
D9016	8-719-070-63	DIODE P0210P-115		< COIL >			
D9017	8-719-070-63	DIODE P0210P-115		L2502	1-400-794-21	FERRITE 00H	
D9018	8-719-070-63	DIODE P0210P-115		L2504	1-400-794-21	FERRITE 00H	
D9019	8-719-070-63	DIODE P0210P-115		L2505	1-469-555-21	INDUCTOR 10H	
D9020	8-719-070-63	DIODE P0210P-115		L2506	1-400-794-21	FERRITE 00H	
D9021	8-719-070-63	DIODE P0210P-115		L2508	1-481-083-11	INDUCTOR 22H	
D9022	8-719-070-63	DIODE P0210P-115		L2509	1-457-318-11	INDUCTOR 22H	
D9023	8-719-070-63	DIODE P0210P-115		L2510	1-457-318-11	INDUCTOR 22H	
D9036	8-719-070-63	DIODE P0210P-115		L2511	1-400-794-21	FERRITE 00H	
D9037	8-719-070-63	DIODE P0210P-115		L2512	1-400-794-21	FERRITE 00H	
D9038	8-719-070-63	DIODE P0210P-115		L2513	1-400-794-21	FERRITE 00H	
D9039	8-719-070-63	DIODE P0210P-115		L9001	1-469-555-21	INDUCTOR 10H	
< FERRITE BEAD >				L9503	1-400-179-21	FERRITE 00H	
FB2500	1-400-089-21	FERRITE 00H		L9504	1-400-179-21	FERRITE 00H	
FB2501	1-400-089-21	FERRITE 00H		L9505	1-400-179-21	FERRITE 00H	
FB2502	1-400-089-21	FERRITE 00H		< PROTECTOR MODULE >			
FB2503	1-400-089-21	FERRITE 00H					
FB2504	1-400-040-22	FERRITE 00H					
FB2505	1-400-040-22	FERRITE 00H		< TRANSISTOR >			
FB2506	1-400-040-22	FERRITE 00H		BK2501 Δ	1-576-556-21	PISE	4A 2
FB2507	1-400-040-22	FERRITE 00H		< TRANSISTOR >			
FB2508	1-400-040-22	FERRITE 00H					
FB9003	1-216-864-11	SHORT CHIP 0					
< FILTER >							
FL2001	1-234-556-21	FILTER, LOW PASS		Q2101	8-729-600-22	TRANSISTOR 2SA1235-F	
< IC >				Q2102	8-729-600-22	TRANSISTOR 2SA1235-F	
IC2001	8-752-089-33	IC CMA2069Q-TL		Q2104	8-729-600-22	TRANSISTOR 2SA1235-F	
IC2501	6-709-191-01	IC MSP410R-QA-D6-501		Q2108	8-729-620-07	TRANSISTOR 2SC3032EF-TL-LEF	
IC2503	8-759-278-58	IC N3M4558V-TE2		Q2109	8-729-620-07	TRANSISTOR 2SC3032EF-TL-LEF	
IC2507	6-710-142-01	IC R2A151055P-W00T		Q2500	8-729-620-07	TRANSISTOR 2SC3032EF-TL-LEF	
IC2801	8-759-278-58	IC N3M4558V-TE2		Q2501	8-729-600-22	TRANSISTOR 2SA1235-F	
				Q2502	8-729-600-22	TRANSISTOR 2SA1235-F	
				Q2505	8-729-600-22	TRANSISTOR 2SC3032EF-TL-LEF	
				Q2507	8-729-620-96	TRANSISTOR DT0114E2A-T106	
				Q2508	8-729-620-07	TRANSISTOR 2SC3032EF-TL-LEF	

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
Q2510	8-729-029-14	TRANSISTOR DTC144EDA-T106		R2036	1-216-809-11	METAL CHIP 100 5%	1/10W
Q2511	8-729-029-14	TRANSISTOR DTC144EDA-T106		R2037	1-216-817-11	METAL CHIP 470 5%	1/10W
Q2512	6-551-364-01	TRANSISTOR DTC614TUT106		R2038	1-216-817-11	METAL CHIP 470 5%	1/10W
Q2513	6-551-364-01	TRANSISTOR DTC614TUT106		R2039	1-216-864-11	SHORT CHIP 0	
Q2514	8-729-600-22	TRANSISTOR 2SA1235-F		R2101	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
Q2515	8-729-600-22	TRANSISTOR 2SA1235-F		R2102	1-216-809-11	METAL CHIP 100 5%	1/10W
Q2516	8-729-600-22	TRANSISTOR 2SA1235-F		R2103	1-216-864-11	SHORT CHIP 0	
Q2517	8-729-600-22	TRANSISTOR 2SA1235-F		R2104	1-218-855-11	METAL CHIP 2.2K 0.5%	1/10W
Q2518	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R2109	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
Q2519	8-729-029-14	TRANSISTOR DTC144EDA-T106		R2117	1-216-857-11	METAL CHIP 1M 5%	1/10W
Q2520	8-729-029-14	TRANSISTOR DTC144EDA-T106		R2121	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
Q2521	8-729-028-96	TRANSISTOR DTC114EDA-T106		R2125	1-218-857-11	METAL CHIP 2.7K 0.5%	1/10W
Q2803	6-551-364-01	TRANSISTOR DTC614TUT106		R2128	1-218-861-11	METAL CHIP 3.9K 0.5%	1/10W
Q2804	6-551-364-01	TRANSISTOR DTC614TUT106		R2131	1-216-864-11	SHORT CHIP 0	
Q2806	6-551-364-01	TRANSISTOR DTC614TUT106		R2132	1-216-857-11	METAL CHIP 1M 5%	1/10W
Q2807	6-551-364-01	TRANSISTOR DTC614TUT106		R2134	1-216-864-11	SHORT CHIP 0	
Q2815	8-729-602-21	TRANSISTOR 2SC14154TP-1G		R2137	1-216-827-11	METAL CHIP 3.3K 5%	1/10W
Q9001	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R2139	1-216-815-11	METAL CHIP 330 5%	1/10W
Q9002	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R2140	1-216-864-11	SHORT CHIP 0	
< RESISTOR >				R2151	1-216-864-11	SHORT CHIP 0	
R2002	1-216-821-11	METAL CHIP 1K 5%	1/10W	R2301	1-216-864-11	SHORT CHIP 0	
R2003	1-216-821-11	METAL CHIP 1K 5%	1/10W	R2305	1-216-864-11	SHORT CHIP 0	
R2004	1-216-864-11	SHORT CHIP 0		R2500	1-216-864-11	SHORT CHIP 0	
R2005	1-216-864-11	SHORT CHIP 0		R2501	1-216-821-11	METAL CHIP 1K 5%	1/10W
R2006	1-216-809-11	METAL CHIP 100 5%	1/10W	R2504	1-216-864-11	SHORT CHIP 0	
R2007	1-216-809-11	METAL CHIP 100 5%	1/10W	R2505	1-216-864-11	SHORT CHIP 0	
R2008	1-216-833-11	METAL CHIP 10K 5%	1/10W	R2508	1-216-864-11	SHORT CHIP 0	
R2009	1-216-833-11	METAL CHIP 10K 5%	1/10W	R2510	1-216-821-11	METAL CHIP 1K 5%	1/10W
R2010	1-216-864-11	SHORT CHIP 0		R2511	1-216-845-11	METAL CHIP 100K 5%	1/10W
R2011	1-216-864-11	SHORT CHIP 0		R2512	1-218-990-81	SHORT CHIP 0	
R2012	1-216-864-11	SHORT CHIP 0		R2514	1-216-841-11	METAL CHIP 47K 5%	1/10W
R2014	1-216-864-11	SHORT CHIP 0		R2515	1-216-841-11	METAL CHIP 47K 5%	1/10W
R2015	1-216-864-11	SHORT CHIP 0		R2517	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2017	1-216-864-11	SHORT CHIP 0		R2518	1-400-499-21	FERRITE 00H	
R2019	1-216-809-11	METAL CHIP 100 5%	1/10W	R2519	1-400-499-21	FERRITE 00H	
R2020	1-216-809-11	METAL CHIP 100 5%	1/10W	R2520	1-216-841-11	METAL CHIP 47K 5%	1/10W
R2023	1-216-821-11	METAL CHIP 1K 5%	1/10W	R2522	1-218-990-81	SHORT CHIP 0	
R2024	1-216-821-11	METAL CHIP 1K 5%	1/10W	R2525	1-218-990-81	SHORT CHIP 0	
R2025	1-216-864-11	SHORT CHIP 0		R2531	1-208-899-11	METAL CHIP 4.7K 0.5%	1/16W
R2026	1-216-864-11	SHORT CHIP 0		R2532	1-208-711-11	METAL CHIP 15K 0.5%	1/16W
R2027	1-216-864-11	SHORT CHIP 0		R2533	1-208-699-11	METAL CHIP 4.7K 0.5%	1/16W
R2028	1-216-864-11	SHORT CHIP 0		R2534	1-208-711-11	METAL CHIP 15K 0.5%	1/16W
R2029	1-216-864-11	SHORT CHIP 0		R2535	1-208-935-11	METAL CHIP 100K 0.5%	1/16W
R2030	1-216-809-11	METAL CHIP 100 5%	1/10W	R2537	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R2031	1-216-817-11	METAL CHIP 470 5%	1/10W	R2539	1-218-873-11	METAL CHIP 12K 0.5%	1/10W
R2032	1-216-830-11	METAL CHIP 5.6K 5%	1/10W	R2540	1-218-817-11	METAL CHIP 15K 0.5%	1/10W
R2033	1-216-818-11	METAL CHIP 560 5%	1/10W	R2541	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R2034	1-216-817-11	METAL CHIP 470 5%	1/10W	R2545	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R2035	1-216-809-11	METAL CHIP 100 5%	1/10W	R2547	1-208-911-11	METAL CHIP 10K 0.5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK		REF.NO.	PART.NO	DESCRIPTION	REMARK		
R2549	1-208-927-11	METAL CHIP	47K	0.5%	1/1.0M	R2568	1-216-833-11	METAL CHIP	10K 5%	1/1.0M
R2550	1-208-699-11	METAL CHIP	4.7K	0.5%	1/1.0M	R2682	1-216-864-11	SHORT CHIP	0	
R2554	1-216-841-11	METAL CHIP	47K	5%	1/1.0M	R2683	1-216-864-11	SHORT CHIP	0	
R2555	1-208-935-11	METAL CHIP	100K	0.5%	1/1.0M	R2684	1-216-864-11	SHORT CHIP	0	
R2556	1-208-699-11	METAL CHIP	4.7K	0.5%	1/1.0M	R2685	1-216-864-11	SHORT CHIP	0	
R2557	1-208-711-11	METAL CHIP	15K	0.5%	1/1.0M	R2801	1-216-829-11	METAL CHIP	4.7K 5%	1/1.0M
R2559	1-208-711-11	METAL CHIP	15K	0.5%	1/1.0M	R2802	1-216-829-11	METAL CHIP	4.7K 5%	1/1.0M
R2561	1-218-871-11	METAL CHIP	10K	0.5%	1/1.0M	R2803	1-218-873-11	METAL CHIP	12K 0.5%	1/1.0M
R2562	1-218-869-11	METAL CHIP	8.2K	0.5%	1/1.0M	R2804	1-218-875-11	METAL CHIP	15K 0.5%	1/1.0M
R2563	1-218-869-11	METAL CHIP	8.2K	0.5%	1/1.0M	R2805	1-216-841-11	METAL CHIP	47K 5%	1/1.0M
R2564	1-218-871-11	METAL CHIP	10K	0.5%	1/1.0M	R2806	1-216-841-11	METAL CHIP	47K 5%	1/1.0M
R2566	1-218-867-11	METAL CHIP	6.8K	0.5%	1/1.0M	R2814	1-216-833-11	METAL CHIP	10K 5%	1/1.0M
R2567	1-216-833-11	METAL CHIP	10K	5%	1/1.0M	R2815	1-218-873-11	METAL CHIP	12K 0.5%	1/1.0M
R2587	1-216-857-11	METAL CHIP	1M	5%	1/1.0M	R2820	1-218-871-11	METAL CHIP	10K 0.5%	1/1.0M
R2588	1-216-837-11	METAL CHIP	22K	5%	1/1.0M	R2821	1-218-863-11	METAL CHIP	4.7K 0.5%	1/1.0M
R2593	1-216-841-11	METAL CHIP	47K	5%	1/1.0M	R2822	1-218-863-11	METAL CHIP	4.7K 0.5%	1/1.0M
R2601	1-216-845-11	METAL CHIP	100K	5%	1/1.0M	R2823	1-218-871-11	METAL CHIP	10K 0.5%	1/1.0M
R2603	1-218-865-11	METAL CHIP	5.6K	0.5%	1/1.0M	R2826	1-216-845-11	METAL CHIP	100K 5%	1/1.0M
R2611	1-216-841-11	METAL CHIP	47K	5%	1/1.0M	R2827	1-216-845-11	METAL CHIP	100K 5%	1/1.0M
R2612	1-216-864-11	SHORT CHIP	0			R2828	1-216-844-11	METAL CHIP	82K 5%	1/1.0M
R2613	1-218-887-11	METAL CHIP	47K	0.5%	1/1.0M	R2829	1-216-827-11	METAL CHIP	3.3K 5%	1/1.0M
R2614	1-218-855-11	METAL CHIP	2.2K	0.5%	1/1.0M	R2830	1-216-827-11	METAL CHIP	3.3K 5%	1/1.0M
R2615	1-218-887-11	METAL CHIP	47K	0.5%	1/1.0M	R2831	1-216-844-11	METAL CHIP	82K 5%	1/1.0M
R2616	1-218-855-11	METAL CHIP	2.2K	0.5%	1/1.0M	R2832	1-218-887-11	METAL CHIP	47K 0.5%	1/1.0M
R2617	1-216-833-11	METAL CHIP	10K	5%	1/1.0M	R2833	1-218-887-11	METAL CHIP	47K 0.5%	1/1.0M
R2620	1-216-864-11	SHORT CHIP	0			R2834	1-218-855-11	METAL CHIP	2.2K 0.5%	1/1.0M
R2622	1-216-864-11	SHORT CHIP	0			R2835	1-218-855-11	METAL CHIP	2.2K 0.5%	1/1.0M
R2624	1-218-867-11	METAL CHIP	6.8K	0.5%	1/1.0M	R2837	1-216-857-11	METAL CHIP	1M 5%	1/1.0M
R2625	1-218-867-11	METAL CHIP	6.8K	0.5%	1/1.0M	R2839	1-216-845-11	METAL CHIP	100K 5%	1/1.0M
R2626	1-218-875-11	METAL CHIP	15K	0.5%	1/1.0M	R2840	1-216-864-11	SHORT CHIP	0	
R2627	1-218-897-11	METAL CHIP	120K	0.5%	1/1.0M	R2841	1-216-864-11	SHORT CHIP	0	
R2628	1-218-885-11	METAL CHIP	39K	0.5%	1/1.0M	R2843	1-216-845-11	METAL CHIP	100K 5%	1/1.0M
R2629	1-218-875-11	METAL CHIP	15K	0.5%	1/1.0M	R2844	1-216-813-11	METAL CHIP	220 5%	1/1.0M
R2630	1-218-867-11	METAL CHIP	6.8K	0.5%	1/1.0M	R2846	1-216-813-11	METAL CHIP	220 5%	1/1.0M
R2631	1-218-867-11	METAL CHIP	6.8K	0.5%	1/1.0M	R2851	1-216-864-11	SHORT CHIP	0	
R2632	1-218-897-11	METAL CHIP	120K	0.5%	1/1.0M	R2852	1-216-864-11	SHORT CHIP	0	
R2633	1-218-897-11	METAL CHIP	120K	0.5%	1/1.0M	R2855	1-216-864-11	SHORT CHIP	0	
R2636	1-216-296-11	SHORT CHIP	0			R2856	1-216-864-11	SHORT CHIP	0	
R2637	1-216-296-11	SHORT CHIP	0			R2858	1-216-857-11	METAL CHIP	1M 5%	1/1.0M
R2642	1-216-845-11	METAL CHIP	100K	5%	1/1.0M	R2859	1-216-833-11	METAL CHIP	10K 5%	1/1.0M
R2643	1-216-845-11	METAL CHIP	100K	5%	1/1.0M	R2863	1-216-833-11	METAL CHIP	10K 5%	1/1.0M
R2644	1-216-845-11	METAL CHIP	100K	5%	1/1.0M	R2872	1-216-821-11	METAL CHIP	1K 5%	1/1.0M
R2645	1-216-845-11	METAL CHIP	100K	5%	1/1.0M	R2873	1-216-848-11	METAL CHIP	220K 5%	1/1.0M
R2646	1-216-845-11	METAL CHIP	100K	5%	1/1.0M	R2876	1-216-864-11	SHORT CHIP	0	
R2647	1-216-845-11	METAL CHIP	100K	5%	1/1.0M	R2879	1-216-864-11	SHORT CHIP	0	
R2652	1-216-833-11	METAL CHIP	10K	5%	1/1.0M	R2882	1-216-864-11	SHORT CHIP	0	
R2653	1-216-845-11	METAL CHIP	100K	5%	1/1.0M	R2883	1-216-864-11	SHORT CHIP	0	
R2654	1-216-845-11	METAL CHIP	100K	5%	1/1.0M	R2884	1-216-864-11	SHORT CHIP	0	
R2655	1-216-864-11	SHORT CHIP	0			R2885	1-216-864-11	SHORT CHIP	0	
R2656	1-216-841-11	METAL CHIP	47K	5%	1/1.0M	R2801	1-216-864-11	SHORT CHIP	0	

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
R9002	1-216-864-11	SHORT CHIP 0		R9058	1-216-809-11	METAL CHIP 100 5%	1/10W
R9005	1-218-285-11	METAL CHIP 75 5%	1/10W	R9059	1-216-808-11	METAL CHIP 100 5%	1/10W
R9006	1-218-285-11	METAL CHIP 75 5%	1/10W	R9060	1-218-879-11	METAL CHIP 22K 0.5%	1/10W
R9007	1-216-815-11	METAL CHIP 330 5%	1/10W	R9061	1-218-879-11	METAL CHIP 22K 0.5%	1/10W
R9008	1-216-821-11	METAL CHIP 1K 5%	1/10W	R9062	1-216-853-11	METAL CHIP 470K 5%	1/10W
R9009	1-216-815-11	METAL CHIP 330 5%	1/10W	R9063	1-216-853-11	METAL CHIP 470K 5%	1/10W
R9010	1-216-821-11	METAL CHIP 1K 5%	1/10W	R9064	1-216-853-11	METAL CHIP 470K 5%	1/10W
R9011	1-216-815-11	METAL CHIP 330 5%	1/10W	R9065	1-216-853-11	METAL CHIP 470K 5%	1/10W
R9012	1-216-821-11	METAL CHIP 1K 5%	1/10W	R9066	1-216-853-11	METAL CHIP 470K 5%	1/10W
R9013	1-216-815-11	METAL CHIP 330 5%	1/10W	R9067	1-216-853-11	METAL CHIP 470K 5%	1/10W
R9014	1-216-821-11	METAL CHIP 1K 5%	1/10W	R9068	1-216-853-11	METAL CHIP 470K 5%	1/10W
R9015	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9069	1-216-853-11	METAL CHIP 470K 5%	1/10W
R9017	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9070	1-218-873-11	METAL CHIP 12K 0.5%	1/10W
R9018	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9071	1-218-873-11	METAL CHIP 12K 0.5%	1/10W
R9019	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9072	1-216-823-11	METAL CHIP 1K 5%	1/10W
R9020	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9073	1-216-809-11	METAL CHIP 100 5%	1/10W
R9021	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9074	1-216-813-11	METAL CHIP 680 5%	1/10W
R9023	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9075	1-216-813-11	METAL CHIP 680 5%	1/10W
R9024	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9086	1-216-864-11	SHORT CHIP 0	
R9025	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9088	1-216-849-11	METAL CHIP 220K 5%	1/10W
R9026	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9089	1-216-849-11	METAL CHIP 220K 5%	1/10W
R9027	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9095	1-216-864-11	SHORT CHIP 0	
R9028	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9096	1-216-864-11	SHORT CHIP 0	
R9029	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9104	1-216-864-11	SHORT CHIP 0	
R9030	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9105	1-216-864-11	SHORT CHIP 0	
R9031	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9106	1-216-864-11	SHORT CHIP 0	
R9032	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9107	1-216-864-11	SHORT CHIP 0	
R9033	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9109	1-218-831-11	METAL CHIP 220 0.5%	1/10W
R9034	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9110	1-218-831-11	METAL CHIP 220 0.5%	1/10W
R9035	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9111	1-218-831-11	METAL CHIP 220 0.5%	1/10W
R9036	1-218-831-11	METAL CHIP 220 0.5%	1/10W	R9112	1-218-831-11	METAL CHIP 220 0.5%	1/10W
R9037	1-216-821-11	METAL CHIP 1K 5%	1/10W	R9113	1-218-831-11	METAL CHIP 220 0.5%	1/10W
R9038	1-216-813-11	METAL CHIP 220 5%	1/10W	R9114	1-218-831-11	METAL CHIP 220 0.5%	1/10W
R9039	1-216-864-11	SHORT CHIP 0		R9115	1-216-801-11	METAL CHIP 22 5%	1/10W
R9040	1-216-813-11	METAL CHIP 220 5%	1/10W	R9116	1-216-801-11	METAL CHIP 22 5%	1/10W
R9041	1-216-864-11	SHORT CHIP 0		R9117	1-216-801-11	METAL CHIP 22 5%	1/10W
R9042	1-216-809-11	METAL CHIP 100 5%	1/10W	R9122	1-216-821-11	METAL CHIP 1K 5%	1/10W
R9044	1-216-809-11	METAL CHIP 100 5%	1/10W	R9123	1-216-821-11	METAL CHIP 1K 5%	1/10W
R9045	1-216-809-11	METAL CHIP 100 5%	1/10W	R9124	1-216-821-11	METAL CHIP 1K 5%	1/10W
R9046	1-216-817-11	METAL CHIP 470 5%	1/10W	R9125	1-216-821-11	METAL CHIP 1K 5%	1/10W
R9047	1-216-813-11	METAL CHIP 220 5%	1/10W	R9126	1-216-821-11	METAL CHIP 1K 5%	1/10W
R9048	1-216-864-11	SHORT CHIP 0		R9127	1-216-821-11	METAL CHIP 1K 5%	1/10W
R9049	1-216-813-11	METAL CHIP 220 5%	1/10W	R9128	1-216-853-11	METAL CHIP 470K 5%	1/10W
R9050	1-216-864-11	SHORT CHIP 0		R9129	1-216-853-11	METAL CHIP 470K 5%	1/10W
R9051	1-216-809-11	METAL CHIP 100 5%	1/10W	R9130	1-216-815-11	METAL CHIP 330 5%	1/10W
R9053	1-216-809-11	METAL CHIP 100 5%	1/10W	R9131	1-216-815-11	METAL CHIP 330 5%	1/10W
R9054	1-216-809-11	METAL CHIP 100 5%	1/10W	R9135	1-218-831-11	METAL CHIP 220 0.5%	1/10W
R9055	1-216-809-11	METAL CHIP 100 5%	1/10W	R9136	1-218-831-11	METAL CHIP 220 0.5%	1/10W
R9056	1-216-817-11	METAL CHIP 470 5%	1/10W	R9137	1-218-831-11	METAL CHIP 220 0.5%	1/10W
R9057	1-216-809-11	METAL CHIP 100 5%	1/10W	R9138	1-218-831-11	METAL CHIP 220 0.5%	1/10W

AE

H1E

H2

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
R9139	1-218-831-11	METAL CHIP	220 0.5% 1/10W	VD9018	8-719-070-63	DIODE P0210B-115	
R9140	1-218-831-11	METAL CHIP	220 0.5% 1/10W	VD9025	1-802-082-11	DIODE P0210B-115	
R9141	1-218-831-11	METAL CHIP	220 0.5% 1/10W	VD9026	1-802-082-11	DIODE P0210B-115	
R9142	1-218-831-11	METAL CHIP	220 0.5% 1/10W	< CRYSTAL >			
R9143	1-218-831-11	METAL CHIP	220 0.5% 1/10W	X2500	1-795-612-11	VARISTOR, CRYSTAL	
R9144	1-218-831-11	METAL CHIP	220 0.5% 1/10W	* A-1196-584-A H1E COMPLETE			
R9145	1-218-831-11	METAL CHIP	220 0.5% 1/10W	< CONNECTOR >			
R9146	1-218-831-11	METAL CHIP	220 0.5% 1/10W	CH1101	* 1-819-445-11	HEADER ASSEMBLY FOR PWB 3P	
R9147	1-218-831-11	METAL CHIP	220 0.5% 1/10W	< RESISTOR >			
R9150	1-216-864-11	SHORT CHIP	0	< SWITCH >			
R9151	1-216-864-11	SHORT CHIP	0	S1101	1-572-595-31	SWITCH, TACTILE (REFLOW TYE)	
R9152	1-216-864-11	SHORT CHIP	0	S1102	1-572-595-31	SWITCH, TACTILE (REFLOW TYE)	
R9153	1-216-864-11	SHORT CHIP	0	S1103	1-572-595-31	SWITCH, TACTILE (REFLOW TYE)	
R9154	1-216-864-11	SHORT CHIP	0	S1104	1-572-595-31	SWITCH, TACTILE (REFLOW TYE)	
R9155	1-216-864-11	SHORT CHIP	0	S1105	1-572-595-31	SWITCH, TACTILE (REFLOW TYE)	
R9156	1-216-864-11	SHORT CHIP	0	< CAPACITOR >			
R9157	1-216-864-11	SHORT CHIP	0	C1201	1-162-864-11	CERAMIC CHIP 0.001UF	
R9158	1-216-864-11	SHORT CHIP	0	C1202	1-162-864-11	CERAMIC CHIP 0.001UF	
R9159	1-216-864-11	SHORT CHIP	0	C1203	1-127-573-11	CERAMIC CHIP 1UF	
R9160	1-216-864-11	SHORT CHIP	0	C1204	1-127-573-11	CERAMIC CHIP 1UF	
R9161	1-216-864-11	SHORT CHIP	0	C1205	1-125-891-11	CERAMIC CHIP 0.47UF	
R9501	1-216-864-11	SHORT CHIP	0	C1206	1-125-889-11	CERAMIC CHIP 2.2UF	
R9502	1-216-864-11	SHORT CHIP	0	C1207	1-125-889-11	CERAMIC CHIP 2.2UF	
R9506	1-216-864-11	SHORT CHIP	0	C1208	1-125-889-11	CERAMIC CHIP 2.2UF	
R9515	1-216-864-11	SHORT CHIP	0	C1209	1-162-827-11	CERAMIC CHIP 100PF	
R9516	1-216-864-11	SHORT CHIP	0	C1210	1-164-227-11	CERAMIC CHIP 0.020UF	
R9517	1-216-864-11	SHORT CHIP	0	C1211	1-162-827-11	CERAMIC CHIP 100PF	
R9518	1-216-864-11	SHORT CHIP	0	C1212	1-164-227-11	CERAMIC CHIP 0.020UF	
R9519	1-216-864-11	SHORT CHIP	0	C1215	1-115-416-11	CERAMIC CHIP 0.001UF	
R9520	1-216-864-11	SHORT CHIP	0	* A-1196-585-A H2E COMPLETE (40 inches only)			
R9521	1-216-864-11	SHORT CHIP	0	< CAPACITOR >			
R9522	1-216-864-11	SHORT CHIP	0	C1201	1-162-864-11	CERAMIC CHIP 0.001UF	
R9523	1-216-864-11	SHORT CHIP	0	C1202	1-162-864-11	CERAMIC CHIP 0.001UF	
R9524	1-216-864-11	SHORT CHIP	0	C1203	1-127-573-11	CERAMIC CHIP 1UF	
R9525	1-216-864-11	SHORT CHIP	0	C1204	1-127-573-11	CERAMIC CHIP 1UF	
R9526	1-216-864-11	SHORT CHIP	0	C1205	1-125-891-11	CERAMIC CHIP 0.47UF	
R9527	1-216-864-11	SHORT CHIP	0	C1206	1-125-889-11	CERAMIC CHIP 2.2UF	
R9528	1-216-864-11	SHORT CHIP	0	C1207	1-125-889-11	CERAMIC CHIP 2.2UF	
R9529	1-216-864-11	SHORT CHIP	0	C1208	1-125-889-11	CERAMIC CHIP 2.2UF	
R9530	1-216-864-11	SHORT CHIP	0	C1209	1-162-827-11	CERAMIC CHIP 100PF	
R9546	1-216-809-11	METAL CHIP	100 5% 1/10W	C1210	1-164-227-11	CERAMIC CHIP 0.020UF	
R9547	1-216-809-11	METAL CHIP	100 5% 1/10W	C1211	1-162-827-11	CERAMIC CHIP 100PF	
< VARISTOR >				C1212	1-164-227-11	CERAMIC CHIP 0.020UF	
VD9013	8-719-070-63	DIODE P0210B-115		C1215	1-115-416-11	CERAMIC CHIP 0.001UF	
VD9014	8-719-070-63	DIODE P0210B-115		< CONNECTOR >			
VD9015	8-719-070-63	DIODE P0210B-115		CH1201	1-820-192-11	HEADER ASSEMBLY (PRINT PWB)15P	
VD9016	8-719-070-63	DIODE P0210B-115					
VD9017	8-719-070-63	DIODE P0210B-115					

REF.NO.	PART.NO.	DESCRIPTION	REMARK	REF.NO.	PART.NO.	DESCRIPTION	REMARK
< DIODE >				< CONNECTOR >			
D1201	8-719-070-63	DIODE P0210P-115		CN351	1-820-187-11	HEADER ASSEMBLY (PRINT PWB)10P	
D1202	8-719-070-63	DIODE P0210P-115		< DIODE >			
D1203	8-719-070-63	DIODE P0210P-115					
D1204	8-719-070-63	DIODE P0210P-115		D352	8-719-085-26	DIODE CU-165HR/SYG-D-T	
D1205	8-719-070-63	DIODE P0210P-115		D355	8-719-085-26	DIODE CU-165HR/SYG-D-T	
				D358	6-500-817-01	DIODE (LED) SMC-512WTR6	
D1206	8-719-070-63	DIODE P0210P-115		< IC >			
< SOCKET >							
J1201	1-780-388-11	S TERMINAL BLOCK (RIGHT ANGLE)		IC351	6-600-502-01	HIC GP1026K0VF	
J1202	1-815-325-11	JACK		IC352	6-600-447-01	IC TP8833(SONY)	
< RESISTOR >				< TRANSISTOR >			
R1202	1-216-864-11	SHORT CHIP 0		Q351	8-729-028-96	TRANSISTOR DTC114EHA-T106	
R1205	1-216-821-11	METAL CHIP 1K 5% 1/10W		Q352	8-729-028-96	TRANSISTOR DTC114EHA-T106	
R1206	1-216-821-11	METAL CHIP 1K 5% 1/10W		Q353	8-729-028-96	TRANSISTOR DTC114EHA-T106	
R1207	1-218-831-11	METAL CHIP 220 0.5% 1/10W		Q354	8-729-028-96	TRANSISTOR DTC114EHA-T106	
R1208	1-218-831-11	METAL CHIP 220 0.5% 1/10W		Q355	8-729-028-96	TRANSISTOR DTC114EHA-T106	
				Q356	8-729-820-10	TRANSISTOR 2SA1607P-1KF	
R1209	1-218-885-11	METAL CHIP 75 5% 1/10W		< RESISTOR >			
R1210	1-218-831-11	METAL CHIP 220 0.5% 1/10W					
R1211	1-218-831-11	METAL CHIP 220 0.5% 1/10W					
R1212	1-216-797-11	METAL CHIP 10 5% 1/10W					
R1213	1-216-821-11	METAL CHIP 1K 5% 1/10W					
R1214	1-216-821-11	METAL CHIP 1K 5% 1/10W		R351	1-216-820-11	METAL CHIP 820 5% 1/10W	
R1215	1-216-809-11	METAL CHIP 100 5% 1/10W		R352	1-216-819-11	METAL CHIP 680 5% 1/10W	
R1216	1-216-809-11	METAL CHIP 100 5% 1/10W		R353	1-216-820-11	METAL CHIP 820 5% 1/10W	
R1217	1-216-821-11	METAL CHIP 1K 5% 1/10W		R354	1-216-819-11	METAL CHIP 680 5% 1/10W	
R1218	1-216-821-11	METAL CHIP 1K 5% 1/10W		R355	1-216-820-11	METAL CHIP 2.7K 5% 1/10W	
R1219	1-216-809-11	METAL CHIP 100 5% 1/10W		R356	1-216-817-11	METAL CHIP 470 5% 1/10W	
R1220	1-216-797-11	METAL CHIP 10 5% 1/10W		R357	1-216-805-11	METAL CHIP 47 5% 1/10W	
R1222	1-216-853-11	METAL CHIP 470K 5% 1/10W		R359	1-216-839-11	METAL CHIP 33K 5% 1/10W	
R1223	1-216-853-11	METAL CHIP 470K 5% 1/10W		R360	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R1224	1-218-831-11	METAL CHIP 220 0.5% 1/10W		R361	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R1225	1-218-831-11	METAL CHIP 220 0.5% 1/10W		R363	1-216-849-11	METAL CHIP 220K 5% 1/10W	
< VARISTOR >				R364	1-216-849-11	METAL CHIP 220K 5% 1/10W	
VD1201	1-802-082-11	VARISTOR (SMD)		R365	1-216-864-11	SHORT CHIP 0	
VD1202	1-802-082-11	VARISTOR (SMD)		R366	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	
VD1203	1-802-082-11	VARISTOR (SMD)					
* A-1176-S15-A H4E COMPLETE							
< CAPACITOR >							
C352	1-162-960-11	CERAMIC CHIP 220PF	10.00% 50V				
C353	1-119-667-11	CERAMIC CHIP 220F	10V				
C355	1-165-908-11	CERAMIC CHIP 10F	10% 10V				
C357	1-107-826-11	CERAMIC CHIP 0.10UF	10.00% 16V				
C358	1-126-205-11	ELECT CHIP 47UF	20.00% 6.3V				

REF.NO.	PART.NO.	DESCRIPTION	REMARK
ACCESSORIES AND CONNECTORS			
*1-833-778-11	LEAD WIRE WITH CONNECTOR	(40 inches)	
*1-833-779-11	LEAD WIRE WITH CONNECTOR	(46 inches)	
*1-910-025-32	CONNECTOR ASSY 6P	(CN3904 (TUE)-CN2301 (1) (AE))	
*1-910-025-33	CONNECTOR ASSY 7P	(CN3401 (FEE)-CN2302 (1) (AE))	
*1-910-025-35	CONNECTOR ASSY 30P	(CN3600 (FEE)-CN3901 (1) (TUE))	
*1-910-025-38	CONNECTOR ASSY 1P	(CN1201 (HZE)-PANEL (1))	
		(40inches)	
*1-910-025-39	CONNECTOR ASSY (FEC) 20P	(CN4700 (BE)-CN3400 (FEE) (1))	
*1-910-025-63	FPC CONNECTOR ASSY 49P	(CN4001 (BE)-CN9501 (AE) (1))	
*1-910-025-82	CONNECTOR ASSY 14P	(CN6200 (GZA)-CN2303 (AE) (1), CN2303 (AE)-CN4002 (0) (BE))	(40 inches)
*1-910-025-85	CONNECTOR ASSY 15P	(CN1201 (HZE)-CN9001 (1) (AE))	(40 inches)
*1-910-025-88	CONNECTOR ASSY 14P	(CN6200 (GZA)-CN2303 (AE) (1), CN2303 (AE)-CN4002 (0) (BE))	(46 inches)
*1-910-025-90	CONNECTOR ASSY 10P	(INVERTER L-CN6204 (1) (GZA))	(46 inches)
*1-910-032-02	CONNECTOR ASSY 3P	(CN1101 (HLE)-CN4007 (BE) (1))	(40 inches)
*1-910-032-10	CONNECTOR ASSY 9P	(CN9502 (AE)-CN7008 (1) (BE))	(46 inches)
*1-910-032-11	CONNECTOR ASSY 3P	(CN1101 (HLE)-CN4007 (1) (BE))	(46 inches)
*1-910-032-15	CONNECTOR ASSY 1P	(YESA ARM-CN6206 (1) (GZA))	(46 inches)
*1-910-032-16	CONNECTOR ASSY 1P	(YESA ARM-CN6207 (1) (GZA))	(46 inches)
*1-910-032-17	CONNECTOR ASSY 1P	(YESA ARM-CN6000 (1) (GZA))	(46 inches)
*1-910-032-20	CONNECTOR ASSY 10P	(CN351 (H4E)-CN4008 (1) (BE))	(40 inches)
*1-910-032-21	CONNECTOR ASSY 12P	(INVERTER-CN6202 (1) (GZA), INVERTER-CN6217 (0) (GZA), CN6217 (GZA)-CN7009 (0) (BE))	(40 inches)
*1-910-032-22	SP CONNECTOR ASSY 4P	(CN2500 (AE)-SP (1))	(40 inches)
*1-910-032-23	CONNECTOR ASSY 10P	(CN351 (H4E)-CN4008 (1) (BE))	(46 inches)
*1-910-032-25	SP CONNECTOR ASSY	(CN2500 (AE)-SP (1))	(46 inches)
*1-910-032-27	CONNECTOR ASSY 10P	(CN4300 (BE)-CN3903 (1) (TUE))	(46 inches)
*1-910-032-28	CONNECTOR ASSY 12P	(CN3802 (TUE)-CN4301 (1) (BE))	(46 inches)
*1-910-032-89	CONNECTOR ASSY 12P	(INVERTER-CN6202 (1) (GZA), INVERTER-CN6217 (0) (GZA), CN6217 (GZA)-CN7009 (0) (BE))	(46 inches)
*1-910-032-95	CONNECTOR ASSY 15P	(CN201 (H46)-CN9001 (1) (AE))	(46 inches)

REF.NO.	PART.NO.	DESCRIPTION	REMARK
REMOTE COMMANDER			
*2-281-522-11	INSTRUCTION MANUAL	(ENGLISH) (UK)	
*2-281-522-21	INSTRUCTION MANUAL	(ENGLISH/GERMAN/DUTCH/PORTUGUESE/NORWEGIAN) (AEP)	
*2-281-522-31	INSTRUCTION MANUAL	(FRENCH/ITALIAN/SPANISH/FINNISH) (AEP)	
*2-281-522-41	INSTRUCTION MANUAL	(SWEDISH/DANISH/GREEK/RUSSIAN/POLISH) (AEP)	
1-479-978-11	REMOTE COMMANDER	(RM-ED008)	