

SECTION 5 EXPLODED VIEWS


NOTE :

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

5-1. REAR COVER AND STAND ASSEMBLY

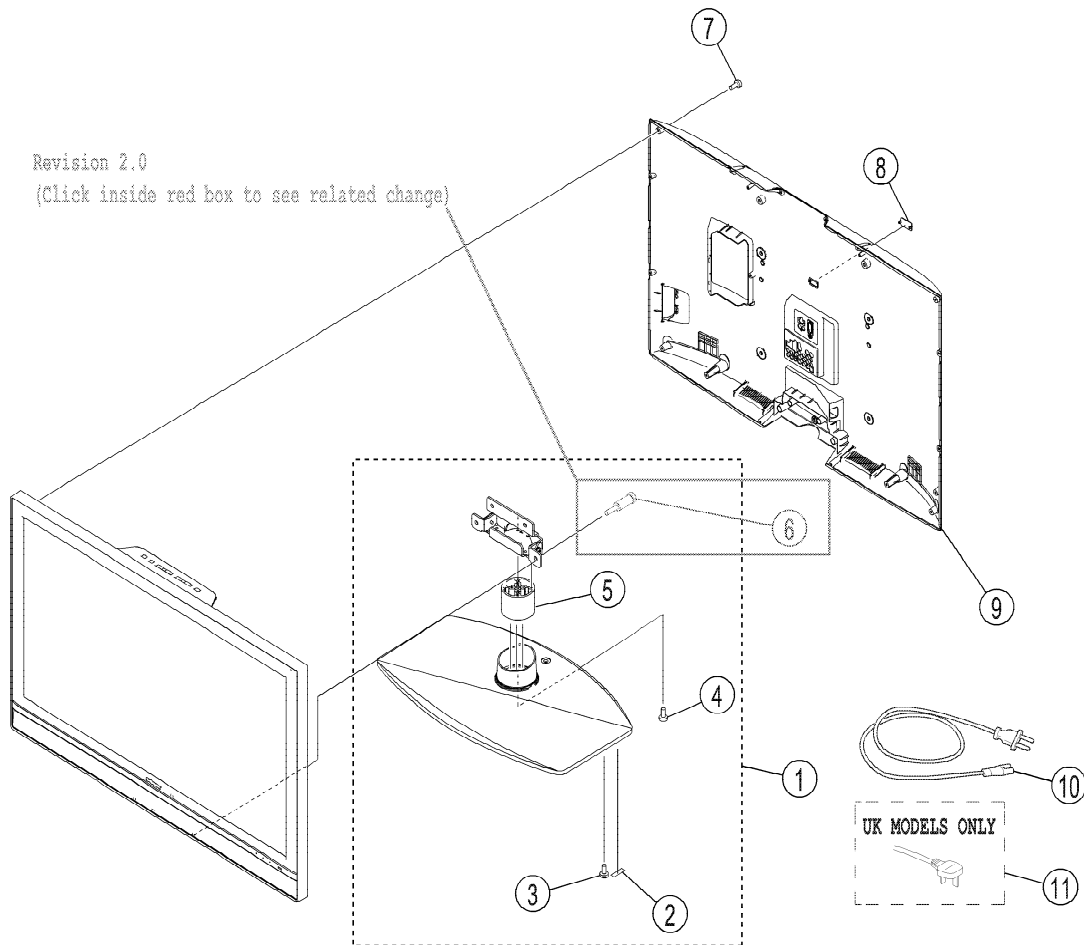


REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
1	X-2149-932-1	STAND ASSY (ML) (KDL-40W2000)	2-5	7	2-580-640-01	SCREW, +BVP2 4X16	
	X-2149-690-1	STAND ASSY (L) (KDL-46W2000)		8	2-664-636-11	COVER, ECS	
2	2-675-191-02	FOOT		9	X-2148-134-1	COVER, REAR ASSY (40) (KDL-40W2000)	
3	2-580-647-01	SCREW, +KTP2 4X12			X-2148-135-2	COVER, REAR ASSY (46) (KDL-46W2000)	
4	2-689-628-01	SCREW, (B) 5X30		10	Δ 1-830-611-11	POWER-SUPPLY CORD (AEP)	
5	*2-682-046-01	NECK (L)		11	Δ 1-830-609-11	AC POWER-SUPPLY CORD SET (UK)	
6	X-2149-374-1	JOINT, STAND ASSY					

Revision 2.0
(Click inside red box to see related change)

Note : Les composants indentifiés par une trame et par une marque Δ sont d'une importance critique pour la securite. Ne les remplacer que par des pieces du numero specifie.


Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

5-2. SPEAKERS.

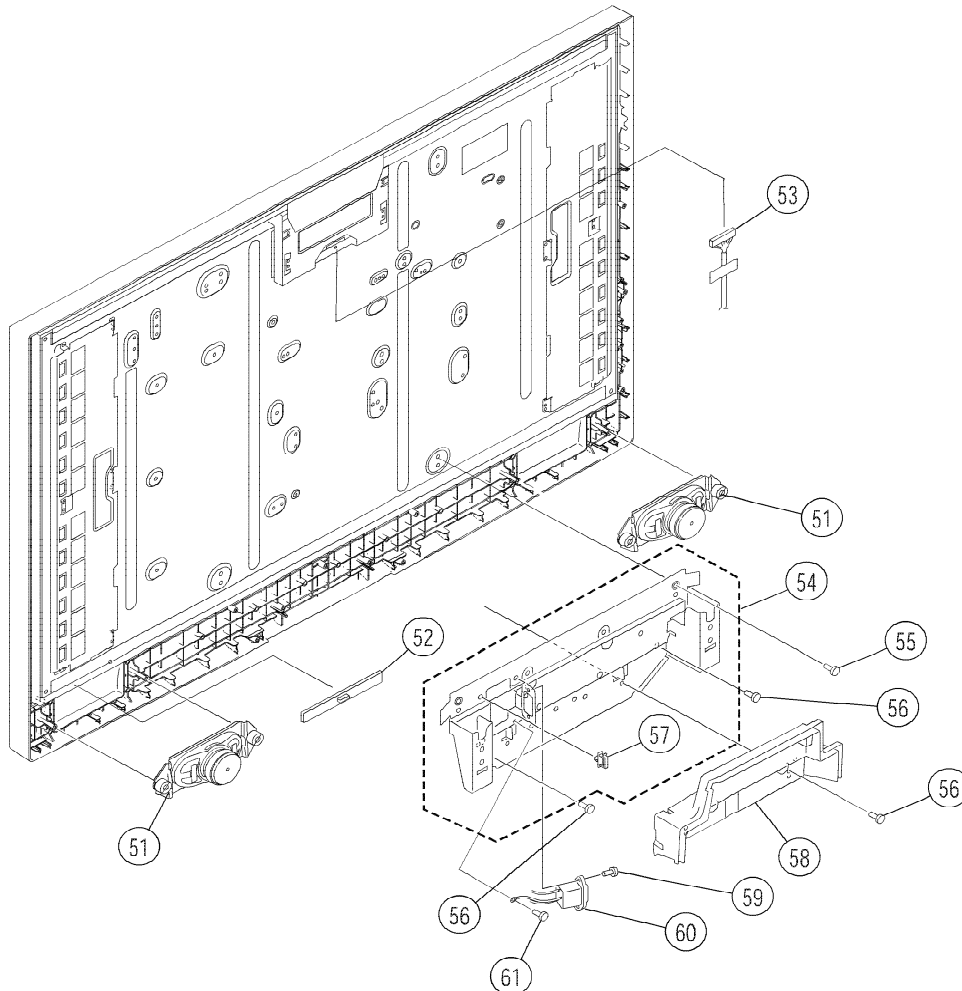


REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
51	1-826-532-11	LOUDSPEAKER (5.5X15CM) (KDL-40W2000)		56	2-580-640-01	SCREW, +BVTP2 4X16	
	1-826-435-11	LOUDSPEAKER (13X7CM) (KDL-46W2000)		57	2-650-770-21	SLIDE, CLAMP	
52	*A-1196-586-A	H3E BOARD COMPLETE		58	2-687-624-11	COVER, UNDER	
53	1-833-275-12	LEAD WIRE WITH CONNECTOR(LVDS) (KDL-40W2000)		59	2-596-649-01	+KTT 3X10 (S TYPE)	
	1-833-276-12	LEAD WIRE WITH CONNECTOR(LVDS) (KDL-46W2000)		60	Δ 1-819-729-14	INLET, AC (WITH NOISE FILTER)	
54	X-2109-168-4	FRAME, BOTTOM (L) ASSY	57	61	2-580-600-01	SCREW, +PSW M4X8	
55	2-580-606-01	SCREW, +PSW M5X8					

5-3. CHASSIS

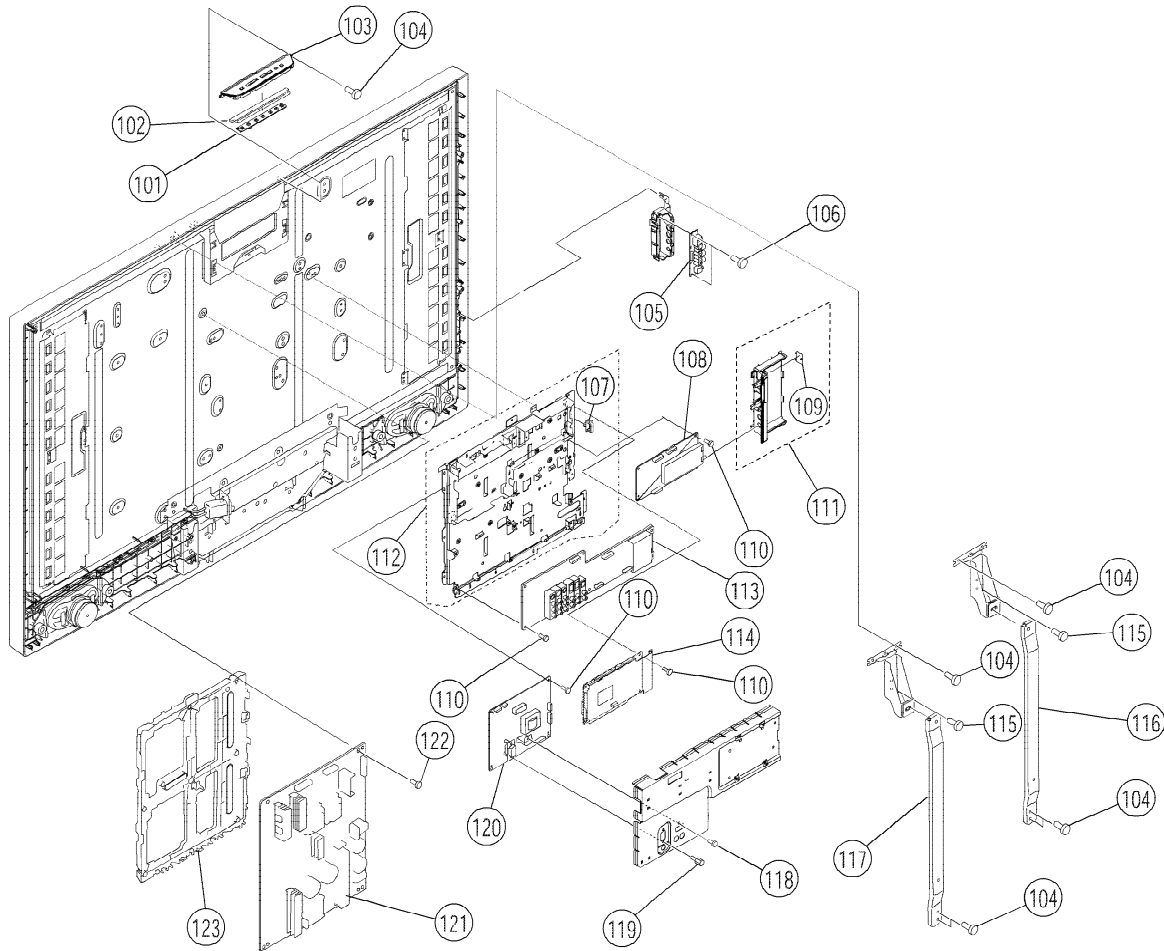

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
101	*A-1196-584-A	H1E BOARD COMPLETE		113	*A-1184-346-A	AE BOARD COMPLETE	
102	2-663-977-01	BUTTON, MULTI		114	*A-1173-179-K	FEE BOARD COMPLETE	
103	2-663-978-22	COVER, BUTTON		115	2-580-606-01	SCREW, +PSW M5X8	
104	2-580-640-01	SCREW, +BVTP2 4X16		116	X-2109-058-3	VESA BRACKET (40) L ASSY (KDL-40W2000)	
105	*A-1196-585-A	H2E BOARD COMPLETE (KDL-40W2000)			X-2109-250-3	ARM, VESA (46) L ASSY (KDL-46W2000)	
	*A-1192-085-B	H46 BOARD COMPLETE (KDL-46W2000)		117	X-2109-059-3	VESA BRACKET (40) R ASSY (KDL-40W2000)	
106	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3			X-2109-251-3	ARM, VESA (46) R ASSY (KDL-46W2000)	
107	2-650-770-21	SLIDE, CLAMP		118	2-580-590-01	SCREW, +PSW M3X5	
108	*A-1173-184-C	TUE BOARD COMPLETE		119	4-635-966-01	SCREW (HEX)	
109	2-689-737-01	COVER, MS	109	120	*A-1196-582-D	BE BOARD COMPLETE	
110	2-580-629-01	SCREW, +BVST 3X8		121	*A-1184-357-B	G2A BOARD COMPLETE	
111	X-2149-055-1	SIDE, TERMINAL (C) ASSY	107	122	2-674-965-31	SCREW, +PSW 3SG	
112	X-2149-118-4	BRACKET, CHAS ASSY (B)		123	2-664-617-11	BRACKET, G2	

5-4. LCD PANEL.

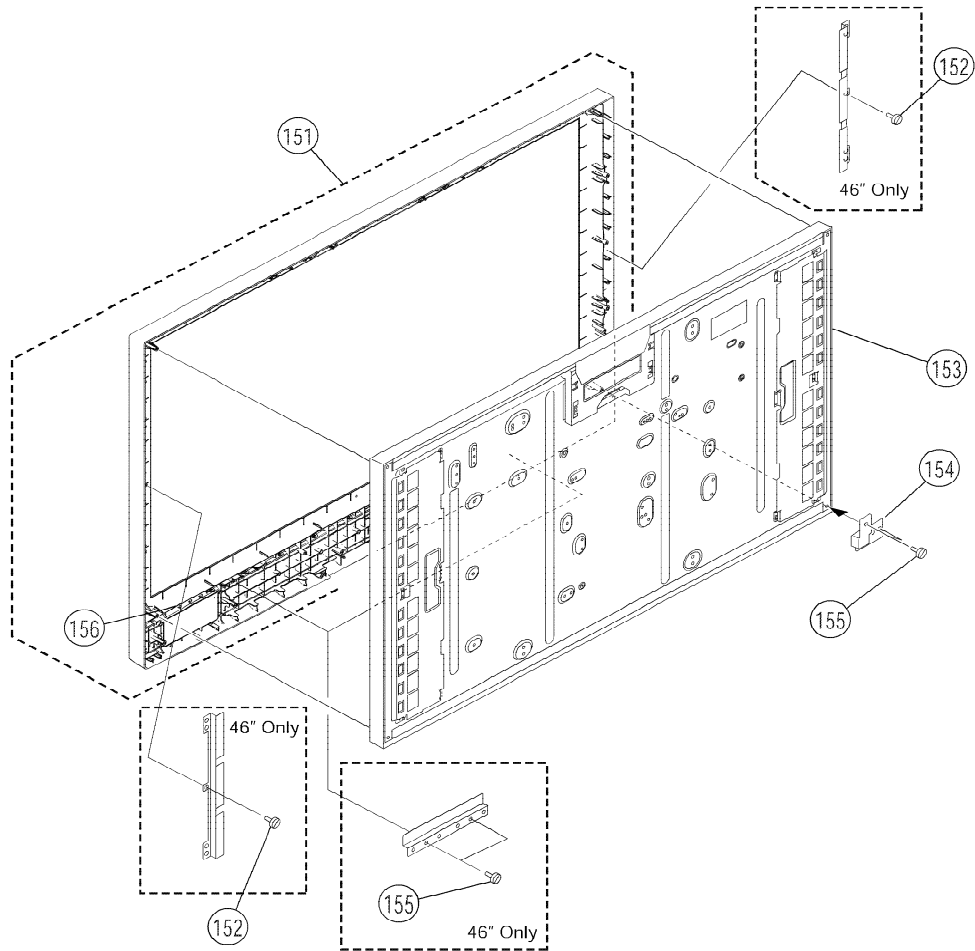

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
151	X-2148-140-4	BEZEL ASSY (40) (KDL-40W2000)	156	154	*2-682-132-01	BRACKET, PANEL CORNER (KDL-46W2000)	
	X-2148-141-4	BEZEL ASSY (46) (KDL-46W2000)	156	155	2-580-640-01	SCREW, +BVTP2 4X16	
152	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3		156	*2-664-630-01	GUIDE, LIGHT SENSOR	
153	1-802-184-11	LCD PANEL (40INCH FHD TFT) (KDL-40W2000)					
	1-802-183-11	LCD PANEL (46INCH FHD TFT) (KDL-46W2000)					

SECTION 6 ELECTRICAL PARTS LIST

PARTS LISTING TABLE OF CONTENTS

	Page
FEE BOARD COMPLETE Parts List :	75
TUE BOARD COMPLETE Parts List :	78
H46 BOARD COMPLETE Parts List : (KDL-46W2000).....	80
G2A BOARD COMPLETE Parts List :	81
BE BOARD COMPLETE Parts List :	84
AE BOARD COMPLETE Parts List :	98
H1E BOARD COMPLETE Parts List :	105
H2E BOARD COMPLETE Parts List : (KDL-40W2000).....	105
H3E BOARD COMPLETE Parts List :	106
MISCELLANEOUS :	107
ACCESSORIES AND CONNECTORS :	107
REMOTE COMMANDER:	107

Note : Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
Parts indicated (XX) on the Schematic Diagram are not used in this model and therefore do not appear in the Parts List.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
*A-1173-179-K FEE Board, Complete							
	< CAPACITOR >						
C3100	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C3208	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3101	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3209	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3102	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3210	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3103	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3211	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3104	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3212	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C3105	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3214	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3106	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3215	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3107	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3216	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3108	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3217	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3109	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3218	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3110	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3219	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3111	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3220	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3112	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3300	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3113	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3301	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3114	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3302	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3116	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C3303	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3120	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3306	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3121	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3307	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3122	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3308	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3123	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3309	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3124	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3310	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3125	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3312	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3126	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3315	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3130	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3316	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3131	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3320	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3132	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3322	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3133	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C3323	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3134	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3324	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3135	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3326	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3136	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C3328	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3137	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3402	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3138	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3403	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3139	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3404	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C3140	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C3405	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3141	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3409	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V
C3142	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3410	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3143	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3411	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V
C3144	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3412	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C3145	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3413	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3200	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3415	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3201	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3417	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3202	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3428	1-112-066-11	CERAMIC CHIP 10UF	10% 10V
C3203	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3432	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V
C3205	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3436	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C3206	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C3439	1-165-681-21	ELECT CHIP 180UF	20% 16V
C3207	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	C3442	1-164-882-11	CERAMIC CHIP 220PF	5.00% 16V
				C3443	1-107-819-11	CERAMIC CHIP 0.022UF	10.00% 16V
				C3444	1-135-960-91	CERAMIC CHIP 10UF	10% 25V
				C3445	1-165-671-21	ELECT CHIP 470UF	20% 6.3V
				C3446	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3502	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	FB3201	1-400-244-11	FERRITE	OUH
C3503	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3300	1-469-869-21	FERRITE	OUH
C3505	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3301	1-469-869-21	FERRITE	OUH
C3506	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V	FB3402	1-400-244-11	FERRITE	OUH
C3605	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	FB3403	1-400-834-11	FERRITE	OUH
C3606	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	FB3407	1-469-869-21	FERRITE	OUH
C3607	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	FB3408	1-400-461-21	FERRITE	OUH
C3609	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	FB3409	1-400-461-21	FERRITE	OUH
C3610	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3410	1-400-461-21	FERRITE	OUH
C3611	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3411	1-400-461-21	FERRITE	OUH
< CONNECTOR >				FB3412	1-400-834-11	FERRITE	OUH
CN3300	*1-793-769-21	CONNECTOR, CARD (PCMCIA CARD)		FB3413	1-400-834-11	FERRITE	OUH
CN3400	1-820-255-51	FFC/FPC CONNECTOR (ZIF) 20P		FB3414	1-400-834-11	FERRITE	OUH
CN3401	*1-819-475-11	HEADER ASSEMBLY FOR PWB 7P		FB3415	1-400-834-11	FERRITE	OUH
CN3600	*1-820-235-21	HEADER ASSEMBLY 30P		FB3416	1-400-834-11	FERRITE	OUH
CN3601	1-820-209-11	MEMORY STICK CONNECTOR		FB3417	1-400-834-11	FERRITE	OUH
CN3610	1-780-336-11	EARTH TERMINAL		FB3418	1-400-834-11	FERRITE	OUH
CN3611	1-780-336-11	EARTH TERMINAL		FB3419	1-400-834-11	FERRITE	OUH
< DIODE >				FB3601	1-469-869-21	FERRITE	OUH
D3400	6-501-060-01	DIODE STPS2L25U		FB3602	1-469-869-21	FERRITE	OUH
D3401	6-500-294-01	DIODE PTZ-TE25-3.9B		FB3603	1-469-869-21	FERRITE	OUH
D3503	8-719-066-11	DIODE 1PS184-115		FB3604	1-400-834-11	FERRITE	OUH
< FERRITE BEAD >				FB3605	1-400-834-11	FERRITE	OUH
FB3103	1-400-834-11	FERRITE	OUH	FB3606	1-400-834-11	FERRITE	OUH
FB3104	1-400-834-11	FERRITE	OUH	FB3607	1-400-834-11	FERRITE	OUH
FB3105	1-400-834-11	FERRITE	OUH	FB3608	1-400-834-11	FERRITE	OUH
FB3106	1-400-834-11	FERRITE	OUH	FB3609	1-400-834-11	FERRITE	OUH
FB3107	1-400-834-11	FERRITE	OUH	FB3610	1-400-834-11	FERRITE	OUH
FB3108	1-400-834-11	FERRITE	OUH	FB3611	1-400-834-11	FERRITE	OUH
FB3109	1-400-834-11	FERRITE	OUH	FB3612	1-400-834-11	FERRITE	OUH
FB3110	1-400-834-11	FERRITE	OUH	FB3613	1-400-834-11	FERRITE	OUH
FB3111	1-400-834-11	FERRITE	OUH	FB3614	1-400-834-11	FERRITE	OUH
FB3113	1-400-834-11	FERRITE	OUH	FB3615	1-400-834-11	FERRITE	OUH
FB3114	1-469-869-21	FERRITE	OUH	FB3616	1-400-834-11	FERRITE	OUH
FB3115	1-400-244-11	FERRITE	OUH	FB3617	1-400-834-11	FERRITE	OUH
FB3116	1-400-244-11	FERRITE	OUH	FB3618	1-400-834-11	FERRITE	OUH
FB3117	1-469-869-21	FERRITE	OUH	FB3619	1-400-834-11	FERRITE	OUH
FB3118	1-469-869-21	FERRITE	OUH	FB3620	1-400-834-11	FERRITE	OUH
FB3119	1-400-807-21	FERRITE	OUH	< IC >			
FB3120	1-400-807-21	FERRITE	OUH	IC3100	6-709-214-01	IC UPD61123F1-100-KA3-A	
FB3121	1-400-807-21	FERRITE	OUH	IC3200	6-707-809-01	IC EDD1216AATA-6B-E	
FB3122	1-400-807-21	FERRITE	OUH	IC3201	6-708-916-01	IC ICS7150MLFT	
FB3123	1-400-807-21	FERRITE	OUH	IC3206	6-705-336-01	IC K9F2808U0C-PCB0T	
FB3125	1-469-869-21	FERRITE	OUH	IC3301	6-707-853-01	IC TC74LCX541FT(EKJ)	
FB3126	1-400-244-11	FERRITE	OUH	IC3301	8-759-644-48	IC 74LVC541APW	
FB3127	1-400-244-11	FERRITE	OUH	IC3302	6-707-853-01	IC TC74LCX541FT(EKJ)	
FB3200	1-400-244-11	FERRITE	OUH	IC3302	8-759-644-48	IC 74LVC541APW	
				IC3304	6-707-853-01	IC TC74LCX541FT(EKJ)	
				IC3304	8-759-644-48	IC 74LVC541APW	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
IC3305	6-707-853-01	IC TC74LCX541FT(EKJ)		R3129	1-220-174-11	RES-CHIP 200 5%	1/16W
IC3305	8-759-644-48	IC 74LVC541APW		R3130	1-220-174-11	RES-CHIP 200 5%	1/16W
IC3306	6-707-853-01	IC TC74LCX541FT(EKJ)		R3131	1-220-174-11	RES-CHIP 200 5%	1/16W
IC3306	8-759-644-48	IC 74LVC541APW		R3132	1-220-174-11	RES-CHIP 200 5%	1/16W
IC3308	6-707-853-01	IC TC74LCX541FT(EKJ)		R3133	1-208-671-11	METAL CHIP 330 0.5%	1/16W
IC3308	8-759-644-48	IC 74LVC541APW		R3134	1-208-679-11	METAL CHIP 680 0.5%	1/16W
IC3311	6-707-850-01	IC TC74LCX245FT(EKJ)		R3136	1-208-675-11	METAL CHIP 470 0.5%	1/16W
IC3311	8-759-298-91	IC 74LVT245PW-T		R3138	1-218-990-81	SHORT CHIP 0	
IC3312	6-707-853-01	IC TC74LCX541FT(EKJ)		R3142	1-218-937-11	RES-CHIP 47 5%	1/16W
IC3316	6-708-132-01	IC 74LVC14APW		R3143	1-218-937-11	RES-CHIP 47 5%	1/16W
IC3317	6-706-482-01	IC TC7SH00FU(T5RSOYJF)		R3144	1-218-937-11	RES-CHIP 47 5%	1/16W
IC3402	6-705-790-01	IC LM3525MX-H/J5000395		R3146	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC3404	6-706-106-01	IC NCP1117STAT3		R3147	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC3405	6-708-603-01	IC PQ070XNA1ZPH		R3148	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC3406	6-707-078-01	IC L5973ADTR		R3149	1-218-990-81	SHORT CHIP 0	
IC3501	6-703-175-01	IC PST3629UL		R3150	1-218-965-11	RES-CHIP 10K 5%	1/16W
< COIL >				R3151	1-218-965-11	RES-CHIP 10K 5%	1/16W
L3100	1-414-398-11	INDUCTOR 10UH		R3200	1-218-941-11	RES-CHIP 100 5%	1/16W
L3400	1-419-353-21	INDUCTOR 10UH		R3201	1-218-941-11	RES-CHIP 100 5%	1/16W
L3401	*1-424-924-21	COIL, POWER		R3202	1-218-939-11	RES-CHIP 68 5%	1/16W
< TRANSISTOR >				R3203	1-218-941-81	RES-CHIP 100 5%	1/16W
Q3409	8-729-010-05	TRANSISTOR MSB709-RT1		R3204	1-218-941-81	RES-CHIP 100 5%	1/16W
Q3501	8-729-027-43	TRANSISTOR DTC114EKA-T146		R3205	1-218-937-11	RES-CHIP 47 5%	1/16W
Q3502	8-729-027-43	TRANSISTOR DTC114EKA-T146		R3207	1-218-953-11	RES-CHIP 1K 5%	1/16W
< RESISTOR >				R3209	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3100	1-218-965-11	RES-CHIP 10K 5%	1/16W	R3210	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3101	1-218-941-81	RES-CHIP 100 5%	1/16W	R3212	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3102	1-218-941-81	RES-CHIP 100 5%	1/16W	R3214	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3103	1-218-941-81	RES-CHIP 100 5%	1/16W	R3217	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3104	1-218-941-81	RES-CHIP 100 5%	1/16W	R3218	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3105	1-218-961-11	RES-CHIP 4.7K 5%	1/16W	R3220	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3106	1-218-961-11	RES-CHIP 4.7K 5%	1/16W	R3222	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3109	1-218-941-81	RES-CHIP 100 5%	1/16W	R3224	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3110	1-218-941-81	RES-CHIP 100 5%	1/16W	R3226	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3111	1-218-941-81	RES-CHIP 100 5%	1/16W	R3229	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3112	1-218-941-81	RES-CHIP 100 5%	1/16W	R3230	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3113	1-218-965-11	RES-CHIP 10K 5%	1/16W	R3233	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3114	1-218-965-11	RES-CHIP 10K 5%	1/16W	R3235	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3115	1-218-965-11	RES-CHIP 10K 5%	1/16W	R3237	1-218-961-11	RES-CHIP 4.7K 5%	1/16W
R3117	1-218-965-11	RES-CHIP 10K 5%	1/16W	R3238	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3119	1-218-990-81	SHORT CHIP 0		R3239	1-218-965-11	RES-CHIP 10K 5%	1/16W
R3120	1-218-990-81	SHORT CHIP 0		R3240	1-218-939-11	RES-CHIP 68 5%	1/16W
R3125	1-218-937-11	RES-CHIP 47 5%	1/16W	R3241	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3126	1-218-990-81	SHORT CHIP 0		R3242	1-218-941-81	RES-CHIP 100 5%	1/16W
R3127	1-220-174-11	RES-CHIP 200 5%	1/16W	R3244	1-218-953-11	RES-CHIP 1K 5%	1/16W
R3128	1-220-174-11	RES-CHIP 200 5%	1/16W	R3247	1-218-953-11	RES-CHIP 1K 5%	1/16W
				R3249	1-218-953-11	RES-CHIP 1K 5%	1/16W
				R3250	1-218-953-11	RES-CHIP 1K 5%	1/16W
				R3251	1-218-949-11	RES-CHIP 470 5%	1/16W
				R3254	1-218-953-11	RES-CHIP 1K 5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3255	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3520	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3258	1-218-941-81	RES-CHIP	100	5%	1/16W	R3522	1-218-941-81	RES-CHIP	100	5%	1/16W
R3259	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3554	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3263	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3600	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3264	1-218-949-11	RES-CHIP	470	5%	1/16W	R3601	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3265	1-218-949-11	RES-CHIP	470	5%	1/16W	R3602	1-218-941-81	RES-CHIP	100	5%	1/16W
R3300	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3603	1-218-941-81	RES-CHIP	100	5%	1/16W
R3301	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3604	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3302	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3609	1-218-941-81	RES-CHIP	100	5%	1/16W
R3303	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3610	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3308	1-218-941-81	RES-CHIP	100	5%	1/16W	R3611	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3310	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3612	1-218-990-81	SHORT CHIP	0		
R3311	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3613	1-218-990-81	SHORT CHIP	0		
R3312	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3616	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3313	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3617	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3314	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3623	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3317	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3628	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3321	1-218-941-81	RES-CHIP	100	5%	1/16W	R3646	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3324	1-218-941-81	RES-CHIP	100	5%	1/16W	R3647	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3329	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3648	1-218-941-81	RES-CHIP	100	5%	1/16W
R3330	1-218-939-11	RES-CHIP	68	5%	1/16W	R3649	1-218-941-81	RES-CHIP	100	5%	1/16W
R3331	1-218-939-11	RES-CHIP	68	5%	1/16W	R3650	1-218-941-81	RES-CHIP	100	5%	1/16W
R3332	1-218-939-11	RES-CHIP	68	5%	1/16W	R3651	1-218-941-81	RES-CHIP	100	5%	1/16W
R3333	1-218-939-11	RES-CHIP	68	5%	1/16W	R3652	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3334	1-218-939-11	RES-CHIP	68	5%	1/16W	R3653	1-218-943-11	RES-CHIP	150	5%	1/16W
R3335	1-218-939-11	RES-CHIP	68	5%	1/16W	R3654	1-218-943-11	RES-CHIP	150	5%	1/16W
R3400	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3655	1-218-943-11	RES-CHIP	150	5%	1/16W
R3401	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	< RESISTOR CHIP >					
R3406	1-218-935-11	RES-CHIP	33	5%	1/16W	RB3200	1-234-372-11	RES, NETWORK	100		(1005X4)
R3407	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	RB3201	1-234-372-11	RES, NETWORK	100		(1005X4)
R3418	1-218-965-11	RES-CHIP	10K	5%	1/16W	RB3202	1-234-372-11	RES, NETWORK	100		(1005X4)
R3419	1-218-965-11	RES-CHIP	10K	5%	1/16W	RB3203	1-234-702-11	RES, NETWORK	68		(1005X4)
R3425	1-220-174-11	RES-CHIP	200	5%	1/16W	RB3204	1-234-702-11	RES, NETWORK	68		(1005X4)
R3426	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	RB3206	1-234-372-11	RES, NETWORK	100		(1005X4)
R3430	1-218-953-11	RES-CHIP	1K	5%	1/16W	RB3207	1-234-372-11	RES, NETWORK	100		(1005X4)
R3432	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	RB3208	1-234-702-11	RES, NETWORK	68		(1005X4)
R3433	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W	RB3209	1-234-702-11	RES, NETWORK	68		(1005X4)
R3434	1-208-702-11	METAL CHIP	6.2K	0.5%	1/16W	< CRYSTAL >					
R3435	1-208-703-11	METAL CHIP	6.8K	0.5%	1/16W	X3200	1-813-055-11	QUARTZ CRYSTAL UNIT			
R3436	1-218-937-11	RES-CHIP	47	5%	1/16W	*A-1173-184-C TUE Board, Complete					
R3437	1-218-990-81	SHORT CHIP	0			< CAPACITOR >					
R3473	1-218-945-11	RES-CHIP	220	5%	1/16W	C3803	1-100-566-91	CERAMIC CHIP	0.1UF	10.00%	25V
R3504	1-218-965-11	RES-CHIP	10K	5%	1/16W	C3814	1-100-907-11	CERAMIC CHIP	0.1UF	10%	10V
R3508	1-218-965-11	RES-CHIP	10K	5%	1/16W	C3815	1-117-681-11	ELECT CHIP	100UF	20.00%	16V
R3511	1-218-965-11	RES-CHIP	10K	5%	1/16W	C3819	1-100-907-11	CERAMIC CHIP	0.1UF	10%	10V
R3513	1-218-965-11	RES-CHIP	10K	5%	1/16W	C3821	1-117-681-11	ELECT CHIP	100UF	20.00%	16V
R3514	1-218-941-81	RES-CHIP	100	5%	1/16W						
R3515	1-218-953-11	RES-CHIP	1K	5%	1/16W						
R3518	1-218-965-11	RES-CHIP	10K	5%	1/16W						
R3519	1-218-961-11	RES-CHIP	4.7K	5%	1/16W						

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3834	1-165-908-11	CERAMIC CHIP 1UF	10% 10V			< DIODE >	
C3900	1-100-611-91	CERAMIC CHIP 22UF	20% 6.3V				
C3901	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	D3900	8-719-083-87	DIODE UDZS-TE17-33B	
C3902	1-164-947-11	CERAMIC CHIP 0.01UF	50V			< FERRITE BEAD >	
C3903	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V				
C3904	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	FB3901	1-469-869-21	FERRITE	0UH
C3906	1-164-947-11	CERAMIC CHIP 0.01UF	50V	FB3902	1-469-869-21	FERRITE	0UH
C3907	1-135-366-11	ELECT CHIP 100UF	20% 16V	FB3903	1-469-869-21	FERRITE	0UH
C3909	1-128-991-21	ELECT CHIP 10UF	20% 50V	FB3909	1-469-869-21	FERRITE	0UH
C3910	1-126-204-11	ELECT CHIP 47UF	20.00% 16V			< FILTER >	
C3911	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V				
C3914	1-164-947-11	CERAMIC CHIP 0.01UF	50V	FL3800	1-239-899-21	FERRITE	0UH
C3917	1-117-681-11	ELECT CHIP 100UF	20.00% 16V			< IC >	
C3918	1-135-595-11	ELECT 100UF	20% 6.3V				
C3919	1-135-595-11	ELECT 100UF	20% 6.3V	IC3802	6-706-106-01	IC NCP1117STAT3	
C3920	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	IC3900	6-709-257-01	IC 74LVC4066PW	
C3921	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V			< COIL >	
C3923	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V				
C3924	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	L3804	1-400-175-21	INDUCTOR	47UH
C3926	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	L3805	1-410-993-42	INDUCTOR	1UH
C3927	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	L3900	1-412-006-31	INDUCTOR	10UH
C3929	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	L3902	1-424-924-21	COIL, POWER	
C3930	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	L3903	1-410-993-42	INDUCTOR	1UH
C3931	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V				
C3932	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V	L3904	1-412-989-11	INDUCTOR	6.8UH
C3933	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V			< TRANSISTOR >	
C3935	1-117-681-11	ELECT CHIP 100UF	20.00% 16V				
C3937	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V	Q3900	8-729-027-43	TRANSISTOR DTC114EKA-T146	
C3941	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V	Q3901	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R	
C3942	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V	Q3902	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R	
C3945	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V	Q3903	6-550-871-01	TRANSISTOR 2SA2048TL QR	
C3946	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V	Q3904	6-550-871-01	TRANSISTOR 2SA2048TL QR	
C3947	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V	Q3905	6-550-871-01	TRANSISTOR 2SA2048TL QR	
C3948	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V	Q3906	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R	
C3950	1-100-611-91	CERAMIC CHIP 22UF	20% 6.3V	Q3907	6-550-232-01	TRANSISTOR 2SA2029T2LQ/R	
C3951	1-128-405-11	ELECT CHIP 22UF	20% 50V			< RESISTOR >	
C3952	1-100-907-11	CERAMIC CHIP 0.1UF	10% 10V				
C3953	1-100-053-21	ELECT CHIP 220UF	20% 6.3V	R3810	1-208-683-11	METAL CHIP 1K	0.5% 1/16W
C3954	1-164-866-11	CERAMIC CHIP 47PF	5.00% 50V	R3812	1-218-948-11	RES-CHIP 390	5% 1/16W
C3955	1-164-936-11	CERAMIC CHIP 680PF	10.00% 50V	R3813	1-218-937-11	RES-CHIP 47	5% 1/16W
C3956	1-164-936-11	CERAMIC CHIP 680PF	10.00% 50V	R3900	1-216-295-91	SHORT CHIP	0
		< CONNECTOR >		R3901	1-218-990-81	SHORT CHIP	0
CN3802	1-819-339-11	HEADER ASSEMBLY FOR PWB 12P		R3902	1-218-938-11	RES-CHIP 56	5% 1/16W
CN3900	1-695-915-11	TAB (CONTACT)		R3903	1-218-953-11	RES-CHIP 1K	5% 1/16W
CN3901	*1-820-235-21	HEADER ASSEMBLY 30P		R3904	1-218-937-11	RES-CHIP 47	5% 1/16W
CN3903	1-819-337-11	HEADER ASSEMBLY FOR PWB 10P		R3906	1-216-821-11	METAL CHIP 1K	5% 1/10W
CN3904	*1-819-474-11	HEADER ASSEMBLY FOR PWB 6P		R3907	1-218-973-11	RES-CHIP 47K	5% 1/16W
CN3907	1-780-336-11	EARTH TERMINAL		R3908	1-218-937-11	RES-CHIP 47	5% 1/16W
				R3909	1-218-965-11	RES-CHIP 10K	5% 1/16W
				R3911	1-218-990-81	SHORT CHIP	0

REF.NO.	PART.NO	DESCRIPTION	REMARK
R3913	1-218-965-11	RES-CHIP	10K 5% 1/16W
R3918	1-218-941-81	RES-CHIP	100 5% 1/16W
R3919	1-218-941-81	RES-CHIP	100 5% 1/16W
R3921	1-218-941-81	RES-CHIP	100 5% 1/16W
R3922	1-218-941-81	RES-CHIP	100 5% 1/16W
R3924	1-218-933-11	RES-CHIP	22 5% 1/16W
R3925	1-218-933-11	RES-CHIP	22 5% 1/16W
R3926	1-218-941-81	RES-CHIP	100 5% 1/16W
R3927	1-218-965-11	RES-CHIP	10K 5% 1/16W
R3929	1-218-990-81	SHORT CHIP	0
R3930	1-218-990-81	SHORT CHIP	0
R3938	1-218-941-81	RES-CHIP	100 5% 1/16W
R3943	1-218-949-11	RES-CHIP	470 5% 1/16W
R3945	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3946	1-218-949-11	RES-CHIP	470 5% 1/16W
R3947	1-218-929-11	RES-CHIP	10 5% 1/16W
R3948	1-218-929-11	RES-CHIP	10 5% 1/16W
R3950	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R3951	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R3952	1-218-937-11	RES-CHIP	47 5% 1/16W
R3953	1-218-941-81	RES-CHIP	100 5% 1/16W
R3958	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R3959	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3960	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3961	1-218-965-11	RES-CHIP	10K 5% 1/16W
R3962	1-218-969-11	RES-CHIP	22K 5% 1/16W
R3967	1-218-941-81	RES-CHIP	100 5% 1/16W
R3970	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3971	1-218-969-11	RES-CHIP	22K 5% 1/16W
R3973	1-218-990-81	SHORT CHIP	0
R3974	1-218-990-81	SHORT CHIP	0
R3980	1-218-941-81	RES-CHIP	100 5% 1/16W
R3981	1-218-933-11	RES-CHIP	22 5% 1/16W
R3982	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3983	1-218-990-81	SHORT CHIP	0
R3984	1-218-990-81	SHORT CHIP	0
R3985	1-218-990-81	SHORT CHIP	0
R3986	1-218-990-81	SHORT CHIP	0
R3987	1-218-990-81	SHORT CHIP	0
R3988	1-218-990-81	SHORT CHIP	0
R3989	1-218-990-81	SHORT CHIP	0
R3996	1-218-990-81	SHORT CHIP	0
R3997	1-218-933-11	RES-CHIP	22 5% 1/16W
R3998	1-218-933-11	RES-CHIP	22 5% 1/16W

< RESISTOR CHIP >

RB3900	1-234-371-21	RES, NETWORK	47 (1005X4)
RB3901	1-234-371-21	RES, NETWORK	47 (1005X4)
RB3902	1-234-371-21	RES, NETWORK	47 (1005X4)

REF.NO.	PART.NO	DESCRIPTION	REMARK
< TUNER >			
TU3901	8-597-598-00	TUNER UNIT, DIGITAL	BTD-HF441Z
*A-1192-085-B H46 Board, Complete (KDL-46W2000)			
< CAPACITOR >			
C201	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C202	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C203	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C204	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C205	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
C206	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C207	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C208	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C209	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C210	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C211	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C212	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C215	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
< CONNECTOR >			
CN201	1-820-192-11	HEADER ASSEMBLY (PRINT PWB)	15P
< DIODE >			
D201	8-719-070-63	DIODE PDZ10B-115	
D202	8-719-070-63	DIODE PDZ10B-115	
D203	8-719-070-63	DIODE PDZ10B-115	
D204	8-719-070-63	DIODE PDZ10B-115	
D205	8-719-070-63	DIODE PDZ10B-115	
D206	8-719-070-63	DIODE PDZ10B-115	
< SOCKET >			
J201	1-780-368-11	S TERMINAL BLOCK (RIGHT ANGLE)	
J202	1-815-325-11	JACK	
< RESISTOR >			
R201	1-216-864-11	SHORT CHIP	0
R202	1-216-864-11	SHORT CHIP	0
R205	1-216-821-11	METAL CHIP	1K 5% 1/10W
R206	1-216-821-11	METAL CHIP	1K 5% 1/10W
R207	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R208	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R209	1-218-285-11	METAL CHIP	75 5% 1/10W
R210	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R211	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R212	1-216-797-11	METAL CHIP	10 5% 1/10W
R213	1-216-821-11	METAL CHIP	1K 5% 1/10W
R214	1-216-821-11	METAL CHIP	1K 5% 1/10W

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

H46

G2A

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R215	1-216-809-11	METAL CHIP	100 5% 1/10W	C6205	1-112-242-21	ELECT	1500UF 20% 25V
R216	1-216-809-11	METAL CHIP	100 5% 1/10W	C6207	1-112-242-21	ELECT	1500UF 20% 25V
R217	1-216-821-11	METAL CHIP	1K 5% 1/10W	C6216	1-107-928-11	ELECT	4.7UF 20% 100V
R218	1-216-821-11	METAL CHIP	1K 5% 1/10W	C6217	1-112-229-21	ELECT	1500UF 20% 16V
R219	1-216-809-11	METAL CHIP	100 5% 1/10W	C6305	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V
R220	1-216-797-11	METAL CHIP	10 5% 1/10W	C6306	1-162-927-11	CERAMIC CHIP	100PF 5.00% 50V
R222	1-216-853-11	METAL CHIP	470K 5% 1/10W	C6307	1-107-903-11	ELECT	2.2UF 20% 50V
R223	1-216-853-11	METAL CHIP	470K 5% 1/10W	C6308	1-107-904-11	ELECT	3.3UF 20% 50V
R224	1-218-831-11	METAL CHIP	220 0.5% 1/10W	C6309	1-107-910-11	ELECT	100UF 20% 50V
R225	1-218-831-11	METAL CHIP	220 0.5% 1/10W	C6310	1-100-139-31	FILM	0.001UF 5% 630V
R226	1-216-864-11	SHORT CHIP	0	C6314	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
< VARISTOR >				C6315	1-165-729-31	ELECT	470UF 20% 16V
VD201	1-802-082-11	VARISTOR (SMD)		C6316	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V
VD202	1-802-082-11	VARISTOR (SMD)		C6401	1-107-882-91	ELECT	100UF 20% 16V
VD203	1-802-082-11	VARISTOR (SMD)		C6402	1-127-573-11	CERAMIC CHIP	1UF 10% 16V
*A-1184-357-B G2A Board, Complete				C6404	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V
4-382-854-11	SCREW (M3X10), P, SW (+)			C6405	1-115-339-11	CERAMIC CHIP	0.1UF 10.00% 50V
< CAPACITOR >				C6406	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C6000	Δ 1-161-964-91	CERAMIC	0.0047UF 250V	C6407	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V
C6001	Δ 1-119-892-51	CERAMIC	470PF 10.00% 250V	C6408	1-125-891-11	CERAMIC CHIP	0.47UF 10.00% 10V
C6002	Δ 1-165-531-11	MYLAR	1UF 10 275V	C6409	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C6003	Δ 1-161-964-91	CERAMIC	0.0047UF 250V	C6412	1-125-891-11	CERAMIC CHIP	0.47UF 10.00% 10V
C6004	Δ 1-165-529-11	MYLAR	0.22UF 10 275V	C6413	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C6005	Δ 1-119-892-51	CERAMIC	470PF 10.00% 250V	C6451	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V
C6006	1-135-361-11	ELECT (BLOCK)	180UF 20% 450V	C6454	1-125-889-91	CERAMIC CHIP	2.2UF 10% 10V
C6008	1-135-361-11	ELECT (BLOCK)	180UF 20% 450V	C6504	1-162-134-11	CERAMIC	470PF 10.00% 2KV
C6010	Δ 1-113-889-11	CERAMIC	0.001UF 20.00% 250V	C6505	1-162-134-11	CERAMIC	470PF 10.00% 2KV
C6012	Δ 1-113-889-11	CERAMIC	0.001UF 20.00% 250V	C6507	1-107-888-11	ELECT	47UF 20% 25V
C6015	Δ 1-113-889-11	CERAMIC	0.001UF 20.00% 250V	C6517	1-117-227-11	MYLAR	1UF 10.00% 450V
C6016	Δ 1-113-889-11	CERAMIC	0.001UF 20.00% 250V	C6518	1-112-744-52	MYLAR	1UF 10% 450V
C6051	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	C6519	1-162-969-11	CERAMIC CHIP	0.0068UF 10.00% 25V
C6100	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	C6520	1-117-227-11	MYLAR	1UF 10.00% 450V
C6101	1-107-905-11	ELECT	4.7UF 20% 50V	C6521	1-107-823-11	CERAMIC CHIP	0.47UF 10.00% 16V
C6102	1-107-910-11	ELECT	100UF 20% 50V	C6522	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C6103	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V	C6523	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V
C6104	1-100-831-91	CERAMIC CHIP	0.001UF 2% 50V	C6525	1-115-339-11	CERAMIC CHIP	0.1UF 10.00% 50V
C6105	1-107-906-11	ELECT	10UF 20% 50V	C6526	1-107-906-11	ELECT	10UF 20% 50V
C6108	1-115-340-11	CERAMIC CHIP	0.22UF 10.00% 25V	< CONNECTOR >			
C6109	1-107-888-11	ELECT	47UF 20% 25V	CN6000	1-695-915-11	TAB (CONTACT)	
C6111	1-162-134-11	CERAMIC	470PF 10.00% 2KV	CN6001	Δ *1-793-660-11	PIN, CONNECTOR (PC BOARD)	3P
C6112	1-100-310-11	FILM	18000PF 3% 800V	CN6011	1-537-770-21	TERMINAL BOARD, GROUND	
C6116	1-163-021-91	CERAMIC CHIP	0.01UF 10.00% 50V	CN6200	*1-793-236-11	PIN, CONNECTOR (PC BOARD)	14P
C6200	1-164-227-11	CERAMIC CHIP	0.022UF 10.00% 25V	CN6202	*1-785-708-11	PIN, CONNECTOR (PC BOARD)	12P
C6202	1-112-242-21	ELECT	1500UF 20% 25V	CN6204	*1-785-706-11	PIN, CONNECTOR (PC BOARD)	10P
C6203	1-107-907-11	ELECT	22UF 20% 50V	CN6206	1-695-915-11	TAB (CONTACT)	
C6204	1-112-242-21	ELECT	1500UF 20% 25V	CN6207	1-695-915-11	TAB (CONTACT)	
				CN6211	1-537-770-21	TERMINAL BOARD, GROUND	
				CN6214	1-537-770-21	TERMINAL BOARD, GROUND	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2A

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
CN6216	1-537-770-21	TERMINAL BOARD, GROUND		< FUSE >			
CN6217	*1-785-701-11	PIN, CONNECTOR (PC BOARD) 3P		F6000	Δ 1-576-233-51	FUSE	6.3A 250V
< DIODE >				< FERRITE BEAD >			
D6000	8-719-054-89	DIODE D15XB60		FB6100	1-412-911-11	FERRITE	0UH
D6002	8-719-404-50	DIODE MA111-TX		FB6101	1-412-911-11	FERRITE	0UH
D6003	8-719-404-50	DIODE MA111-TX		< CLIP FUSE >			
D6102	6-500-137-01	DIODE BAT54HT1		FH6000	Δ 1-533-223-11	FUSE HOLDER	0A 0V
D6103	8-719-979-64	DIODE UF4005/23		FH6001	Δ 1-533-223-11	FUSE HOLDER	0A 0V
D6104	6-501-043-01	DIODE UMZ16NT106		< IC >			
D6105	6-501-043-01	DIODE UMZ16NT106		IC6100	6-707-749-01	IC CXD9841P	
D6106	8-719-081-67	DIODE M1FM3		IC6200	6-709-368-01	IC MM1431ATT (CN)	
D6107	8-719-081-67	DIODE M1FM3		IC6301	6-708-801-01	IC MIP2H2	
D6108	8-719-041-97	DIODE MA113-(TX)		IC6302	6-709-442-01	IC MM1530ATT	
D6109	8-719-022-90	DIODE MA8160-M		IC6401	6-709-368-01	IC MM1431ATT (CN)	
D6200	8-719-057-96	DIODE D10SC6M-4012		IC6402	6-709-368-01	IC MM1431ATT (CN)	
D6201	8-719-057-96	DIODE D10SC6M-4012		IC6502	6-709-192-01	IC FA5501AN-D1-TE1	
D6202	8-719-057-96	DIODE D10SC6M-4012		< COIL >			
D6203	8-719-057-96	DIODE D10SC6M-4012		L6000	Δ 1-456-856-21	LINE FILTER COIL	
D6204	6-500-567-31	DIODE 10ERB20-TB3		L6203	1-414-487-41	INDUCTOR	1UH
D6205	6-500-567-31	DIODE 10ERB20-TB3		L6204	1-414-487-41	INDUCTOR	1UH
D6207	8-719-057-96	DIODE D10SC6M-4012		L6207	1-457-239-11	INDUCTOR	4.7UH
D6208	8-719-057-96	DIODE D10SC6M-4012		L6208	1-457-239-11	INDUCTOR	4.7UH
D6302	6-500-567-31	DIODE 10ERB20-TB3		L6300	1-414-183-41	INDUCTOR	10UH
D6303	6-500-567-31	DIODE 10ERB20-TB3		L6500	1-457-218-11	INDUCTOR	100UH
D6304	6-500-849-01	DIODE ERA22-08KFLB		L6502	1-457-141-21	INDUCTOR	175UH
D6305	6-500-567-31	DIODE 10ERB20-TB3		< PHOTOCOUPLER >			
D6306	8-719-510-02	DIODE D1NS4		PH6000	Δ 6-600-187-01	PHOTO COUPLER	PC123Y22J00F
D6401	8-719-404-50	DIODE MA111-TX		PH6100	6-600-187-01	PHOTO COUPLER	PC123Y22J00F
D6402	8-719-404-50	DIODE MA111-TX		PH6301	6-600-187-01	PHOTO COUPLER	PC123Y22J00F
D6406	8-719-404-50	DIODE MA111-TX		PH6400	6-600-187-01	PHOTO COUPLER	PC123Y22J00F
D6407	8-719-018-01	DIODE MA8220-TX		PH6401	6-600-187-01	PHOTO COUPLER	PC123Y22J00F
D6408	8-719-404-50	DIODE MA111-TX		PH6402	6-600-187-01	PHOTO COUPLER	PC123Y22J00F
D6452	8-719-404-50	DIODE MA111-TX		< TRANSISTOR >			
D6456	8-719-404-50	DIODE MA111-TX		Q6051	8-729-045-62	TRANSISTOR 2SK2158-T2B	
D6504	8-719-404-50	DIODE MA111-TX		Q6100	6-551-297-01	TRANSISTOR 2SK3568 (LBS1SONY.Q	
D6505	8-719-421-82	DIODE MA8043-M		Q6101	6-551-297-01	TRANSISTOR 2SK3568 (LBS1SONY.Q	
D6506	8-719-054-59	DIODE FSF05A60		Q6400	8-729-804-41	TRANSISTOR 2SB1122-S	
D6507	8-719-404-50	DIODE MA111-TX		Q6401	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6508	6-500-108-01	DIODE EP05FA20		Q6402	8-729-045-62	TRANSISTOR 2SK2158-T2B	
D6509	6-500-108-01	DIODE EP05FA20		Q6403	8-729-600-22	TRANSISTOR 2SA1235-F	
D6510	6-500-137-01	DIODE BAT54HT1		Q6404	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6511	8-719-404-50	DIODE MA111-TX		Q6405	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
D6512	8-719-404-50	DIODE MA111-TX					
D6551	8-719-404-50	DIODE MA111-TX					
D6552	8-719-404-50	DIODE MA111-TX					
D6553	8-719-404-50	DIODE MA111-TX					

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2A

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
Q6406	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6304	1-216-821-11	METAL CHIP 1K 5% 1/10W	
Q6408	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6305	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	
Q6409	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6306	1-216-805-11	METAL CHIP 47 5% 1/10W	
Q6454	8-729-600-22	TRANSISTOR 2SA1235-F		R6307	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	
Q6455	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6308	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	
Q6500	6-551-403-01	TRANSISTOR 2SK3797(LBS1SONY.		R6309	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	
Q6501	8-729-820-90	TRANSISTOR 2SD1621-ST		R6400	1-216-833-11	METAL CHIP 10K 5% 1/10W	
Q6502	8-729-804-41	TRANSISTOR 2SB1122-S		R6401	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	
Q6504	6-551-403-01	TRANSISTOR 2SK3797(LBS1SONY.		R6402	1-216-833-11	METAL CHIP 10K 5% 1/10W	
< RESISTOR >				R6403	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	
R6002	Δ 1-240-251-11	METAL 6.8 5% 10W		R6405	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	
R6003	1-247-752-11	CARBON 1K 5% 1/2W		R6407	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R6004	1-218-835-11	METAL CHIP 330 0.5% 1/10W		R6408	1-218-879-11	METAL CHIP 22K 0.5% 1/10W	
R6016	1-535-143-71	LEAD, JUMPER (7.5MM)		R6409	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6051	1-216-821-11	METAL CHIP 1K 5% 1/10W		R6410	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R6052	1-216-837-11	METAL CHIP 22K 5% 1/10W		R6412	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6101	1-249-385-11	CARBON 2.2 5% 1/4W		R6413	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	
R6102	Δ 1-202-933-61	FUSIBLE 0.1 10% 1/2W		R6414	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6103	1-218-823-11	METAL CHIP 100 0.5% 1/10W		R6415	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6104	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		R6416	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R6105	1-208-854-11	METAL CHIP 1M 0.5% 1/10W		R6417	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R6106	1-208-854-11	METAL CHIP 1M 0.5% 1/10W		R6418	1-216-845-11	METAL CHIP 100K 5% 1/10W	
R6107	1-208-854-11	METAL CHIP 1M 0.5% 1/10W		R6419	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R6108	1-208-854-11	METAL CHIP 1M 0.5% 1/10W		R6420	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6109	1-218-761-11	METAL CHIP 240K 0.5% 1/10W		R6421	1-216-864-11	SHORT CHIP 0	
R6110	1-218-881-11	METAL CHIP 27K 0.5% 1/10W		R6422	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	
R6111	1-218-873-11	METAL CHIP 12K 0.5% 1/10W		R6425	1-216-809-11	METAL CHIP 100 5% 1/10W	
R6114	1-211-985-11	METAL CHIP 47 0.5% 1/10W		R6426	1-216-849-11	METAL CHIP 220K 5% 1/10W	
R6116	1-216-009-91	RES-CHIP 22 5% 1/10W		R6427	1-218-889-11	METAL CHIP 56K 0.5% 1/10W	
R6117	1-216-009-91	RES-CHIP 22 5% 1/10W		R6436	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	
R6118	1-216-833-11	METAL CHIP 10K 5% 1/10W		R6437	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R6119	1-216-833-11	METAL CHIP 10K 5% 1/10W		R6441	1-216-841-11	METAL CHIP 47K 5% 1/10W	
R6121	1-216-361-00	METAL OXIDE 0.22 5% 2W		R6442	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6122	1-216-361-00	METAL OXIDE 0.22 5% 2W		R6443	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6123	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		R6444	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6127	1-216-857-11	METAL CHIP 1M 5% 1/10W		R6451	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6200	1-216-821-11	METAL CHIP 1K 5% 1/10W		R6452	1-218-847-11	METAL CHIP 1K 0.5% 1/10W	
R6201	1-216-821-11	METAL CHIP 1K 5% 1/10W		R6453	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6202	1-216-105-91	RES-CHIP 220K 5% 1/10W		R6454	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	
R6203	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		R6455	1-218-903-11	METAL CHIP 220K 0.5% 1/10W	
R6204	1-218-843-11	METAL CHIP 680 0.5% 1/10W		R6456	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W	
R6205	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		R6459	1-218-885-11	METAL CHIP 39K 0.5% 1/10W	
R6207	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		R6461	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6208	1-249-377-11	CARBON 0.47 5% 1/4W		R6462	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R6226	1-249-389-11	CARBON 4.7 5% 1/4W		R6468	1-218-903-11	METAL CHIP 220K 0.5% 1/10W	
R6300	Δ 1-212-958-00	FUSIBLE 10 5% 1/2W		R6503	1-215-882-00	METAL OXIDE 22 5% 2W	
R6301	1-243-725-71	METAL OXIDE 100K 5% 1W		R6512	1-218-907-11	METAL CHIP 330K 0.5% 1/10W	
R6302	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W		R6513	1-218-879-11	METAL CHIP 22K 0.5% 1/10W	
R6303	1-249-385-11	CARBON 2.2 5% 1/4W		R6514	1-218-895-11	METAL CHIP 100K 0.5% 1/10W	
				R6515	1-218-823-11	METAL CHIP 100 0.5% 1/10W	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2A BE

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R6526	1-211-989-11	METAL CHIP	68 0.5% 1/10W	*A-1196-582-D BE Board, Complete			
R6527	1-218-913-91	METAL CHIP	560K 0.5% 1/10W				
R6528	1-218-879-11	METAL CHIP	22K 0.5% 1/10W		2-586-175-01	SHEET B, RADIATION	
R6529	1-216-864-11	SHORT CHIP	0	A5001	1-694-974-21	CONTACT TERMINAL	
R6530	1-219-729-61	METAL	0.33 10% 5W	A5002	1-694-974-21	CONTACT TERMINAL	
				A5003	1-694-974-21	CONTACT TERMINAL	
R6531	1-219-729-61	METAL	0.33 10% 5W	A5004	1-694-974-21	CONTACT TERMINAL	
R6532	1-216-864-11	SHORT CHIP	0				
R6533	1-216-833-11	METAL CHIP	10K 5% 1/10W	< CAPACITOR >			
R6534	1-218-823-11	METAL CHIP	100 0.5% 1/10W	C4001	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
R6535	1-216-833-11	METAL CHIP	10K 5% 1/10W	C4003	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
				C4004	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
R6536	1-218-830-11	METAL CHIP	200 0.5% 1/10W	C4006	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
R6537	1-249-389-11	CARBON	4.7 5% 1/4W	C4007	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
R6538	1-249-405-11	CARBON	100 5% 1/4W				
R6539	1-218-830-11	METAL CHIP	200 0.5% 1/10W	C4010	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
R6540	1-249-389-11	CARBON	4.7 5% 1/4W	C4011	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V
				C4012	1-100-591-91	CERAMIC CHIP 1UF	10% 25V
R6541	1-208-818-11	METAL CHIP	33K 0.5% 1/10W	C4013	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
R6542	1-208-814-91	METAL CHIP	22K 0.5% 1/10W	C4014	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
R6543	1-218-830-11	METAL CHIP	200 0.5% 1/10W				
R6544	1-218-830-11	METAL CHIP	200 0.5% 1/10W	C4015	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
R6545	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	C4016	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
				C4017	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
R6546	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	C4018	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
R6547	1-208-848-11	METAL CHIP	560K 0.5% 1/10W	C4019	1-164-847-11	CERAMIC CHIP 7PF	0.50PF 50V
R6548	1-208-846-11	METAL CHIP	470K 0.5% 1/10W				
R6549	1-208-844-11	METAL CHIP	390K 0.5% 1/10W	C4021	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
R6550	1-218-875-11	METAL CHIP	15K 0.5% 1/10W	C4022	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
				C4023	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
R6551	1-249-393-11	CARBON	10 5% 1/4W	C4024	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
R6552	1-216-809-11	METAL CHIP	100 5% 1/10W	C4025	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
R6553 Δ	1-208-830-11	METAL CHIP	100K 0.5% 1/10W				
R6554	1-218-911-11	METAL CHIP	470K 0.5% 1/10W	C4026	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
R6555	1-218-887-11	METAL CHIP	47K 0.5% 1/10W	C4027	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
				C4028	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
R6557	1-218-851-11	METAL CHIP	1.5K 0.5% 1/10W	C4029	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
R6560	1-218-911-11	METAL CHIP	470K 0.5% 1/10W	C4030	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
R6562 Δ	1-218-760-11	METAL CHIP	220K 0.5% 1/10W				
R6563 Δ	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	C4031	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
R6564 Δ	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	C4032	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
				C4033	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
R6565 Δ	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	C4034	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
R6566	1-216-833-11	METAL CHIP	10K 5% 1/10W	C4035	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
< RELAY >							
RY6003 Δ	1-755-579-11	RELAY, POWER		C4036	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
< TRANSFORMER >				C4037	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
T6102 Δ	1-443-983-11	CONVERTER TRANSFORMER (PIT)		C4038	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
T6103 Δ	1-443-982-11	CONVERTER TRANSFORMER (PIT)		C4039	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
T6301 Δ	1-443-984-11	CONVERTER TRANSFORMER (SBT)		C4040	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
< VARISTOR >							
VD6000 Δ	1-804-996-21	VARISTOR		C4041	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
VD6001 Δ	1-804-996-21	VARISTOR		C4042	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
				C4043	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
				C4044	1-100-591-91	CERAMIC CHIP 1UF	10% 25V
				C4045	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C4046	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4305	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4047	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4306	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4048	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4307	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4049	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4308	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C4050	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4309	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C4051	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C4310	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C4052	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4311	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C4053	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C4312	1-100-162-91	CERAMIC CHIP 1UF	50V
C4054	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4400	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C4055	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4401	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C4056	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4402	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C4057	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4403	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C4058	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4404	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C4059	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4405	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C4060	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4406	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C4061	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4407	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C4062	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C4408	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C4063	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4409	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
C4066	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4412	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4067	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4413	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C4068	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4414	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C4069	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C4415	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C4070	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C4416	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C4071	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C4512	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C4072	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5000	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C4073	1-126-390-11	ELECT CHIP 22UF	20.00% 6.3V	C5002	1-100-908-11	CERAMIC CHIP 1UF	10% 6.3V
C4074	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5003	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C4075	1-164-939-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C5004	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C4076	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C5005	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C4079	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5006	1-164-847-11	CERAMIC CHIP 7PF	0.50PF 50V
C4080	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C5007	1-164-847-11	CERAMIC CHIP 7PF	0.50PF 50V
C4081	1-126-391-11	ELECT CHIP 47UF	20.00% 6.3V	C5008	1-112-774-11	CERAMIC CHIP 470PF	10% 50V
C4082	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C5009	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C4083	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5011	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C4084	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5012	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C4085	1-115-456-21	DOUBLE LAYER 0.22F	5.5V	C5013	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C4086	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C5014	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C4087	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5036	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C4089	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5038	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C4090	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5201	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C4091	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C5203	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C4092	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5205	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C4100	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C5207	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C4101	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C5208	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V
C4105	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C5209	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
C4106	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C5210	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4107	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C5211	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C4110	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5212	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C4301	1-112-692-11	CERAMIC CHIP 1000PF	5% 50V	C5214	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C4304	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5215	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
C5216	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5337	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5217	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5338	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5218	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5339	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5219	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5340	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5220	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5341	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5221	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5342	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5222	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5343	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5223	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5344	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5224	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5345	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5226	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5346	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5227	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5347	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5228	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5348	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5229	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5349	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5300	1-126-394-11	ELECT CHIP 10UF	20.00%	16V		C5350	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5301	1-126-394-11	ELECT CHIP 10UF	20.00%	16V		C5351	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5302	1-126-392-11	ELECT CHIP 100UF	20.00%	6.3V		C5352	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V	
C5303	1-126-394-11	ELECT CHIP 10UF	20.00%	16V		C5353	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5304	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5354	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5305	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5355	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5306	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5356	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5307	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5357	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V	
C5308	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5358	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5309	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5359	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5310	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5360	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5311	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5361	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5312	1-126-392-11	ELECT CHIP 100UF	20.00%	6.3V		C5362	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V	
C5313	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5363	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5314	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5364	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5315	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5365	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5316	1-126-392-11	ELECT CHIP 100UF	20.00%	6.3V		C5366	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5317	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5367	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5318	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5368	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5319	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5369	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5320	1-126-392-11	ELECT CHIP 100UF	20.00%	6.3V		C5370	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V	
C5321	1-112-068-11	CERAMIC CHIP 220PF	10%	50V		C5371	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5322	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5372	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5323	1-100-906-11	CERAMIC CHIP 0.01UF	10%	16V		C5373	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5324	1-162-979-11	CERAMIC CHIP 0.0027UF	10.00%	50V		C5374	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V	
C5325	1-162-979-11	CERAMIC CHIP 0.0027UF	10.00%	50V		C5375	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5326	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5376	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5327	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5377	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5328	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5378	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V	
C5329	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5379	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5330	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5380	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5331	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5381	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5332	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5382	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V	
C5333	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5383	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5334	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V		C5384	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5335	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5385	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5336	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5386	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V	

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
C5387	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5437	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5388	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5438	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5389	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5439	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5390	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V		C5440	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5391	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5441	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5392	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5442	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V	
C5393	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5443	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5394	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V		C5444	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5395	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5445	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5396	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V		C5446	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5397	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5447	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V	
C5398	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5448	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5399	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5449	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5400	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5450	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5401	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5451	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5402	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V		C5452	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V	
C5403	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5453	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5404	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5454	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5405	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5455	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5406	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5456	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5407	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V		C5457	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5408	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5458	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5409	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5459	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5410	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5460	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5411	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5461	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5412	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V		C5462	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5413	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5463	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5414	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5464	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5415	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5465	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5416	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5466	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5417	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V		C5467	1-100-906-11	CERAMIC CHIP 0.01UF	10%	16V	
C5418	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5500	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5419	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5501	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5420	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5502	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5421	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5503	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5422	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V		C5504	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5423	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5505	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5424	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5506	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5425	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5507	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	
C5426	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5508	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5427	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V		C5509	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5428	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5510	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5429	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5511	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5430	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5512	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5431	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5513	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5432	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V		C5514	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5433	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5515	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5434	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V		C5516	1-100-906-11	CERAMIC CHIP 0.01UF	10%	16V	
C5435	1-126-392-11	ELECT CHIP 100UF	20.00%	6.3V		C5518	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V	
C5436	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V		C5519	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C5520	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5811	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
C5521	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5812	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
C5522	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5813	1-126-390-11	ELECT CHIP 22UF	20.00% 6.3V
C5523	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5814	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C5524	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5818	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5525	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5819	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5526	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5820	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5527	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5821	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5528	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5827	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C5529	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5828	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5530	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5829	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5531	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5832	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5532	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5833	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5533	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5834	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C5534	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5835	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5535	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5836	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5536	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5837	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C5537	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5838	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C5538	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5839	1-164-936-11	CERAMIC CHIP 680PF	10.00% 50V
C5539	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5840	1-164-936-11	CERAMIC CHIP 680PF	10.00% 50V
C5540	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5841	1-112-067-11	CERAMIC CHIP 0.22UF	10% 16V
C5541	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5842	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5542	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5843	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5543	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5844	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5544	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5845	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5545	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5846	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5546	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5847	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5547	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5848	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5548	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C5849	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5549	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5850	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5550	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5851	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5551	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5852	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5552	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5853	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5553	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5854	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5554	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5855	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C5555	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5856	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5556	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5857	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5557	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5858	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C5558	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5859	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5559	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5860	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5560	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5861	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5561	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5862	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5562	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5863	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5802	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5864	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5803	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5865	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5804	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5866	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5806	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5867	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5807	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C5868	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5808	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C5869	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5809	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	C5870	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C5871	1-164-854-11	CERAMIC CHIP 15PF	5.00% 50V	C7012	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5872	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7013	1-100-591-91	CERAMIC CHIP 1UF	10% 25V
C5873	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V	C7014	1-100-591-91	CERAMIC CHIP 1UF	10% 25V
C5874	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7015	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C5875	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7016	1-100-591-91	CERAMIC CHIP 1UF	10% 25V
C5876	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7017	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C5877	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7019	1-112-161-21	ELECT CHIP 1000UF	20% 6.3V
C5878	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7020	1-164-934-11	CERAMIC CHIP 330PF	10.00% 50V
C5879	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C7022	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V
C5880	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C7023	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V
C5881	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7025	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V
C5882	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7026	1-125-827-91	CERAMIC CHIP 1UF	10.00% 25V
C5883	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7027	1-164-939-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C5884	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7028	1-119-923-11	CERAMIC CHIP 0.047UF	10.00% 10V
C5885	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7029	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5886	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7030	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5887	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7031	1-135-342-21	ELECT CHIP 56UF	20% 10V
C5888	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7032	1-135-346-21	ELECT CHIP 39UF	20% 16V
C5889	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C7033	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5892	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7034	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C5893	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7035	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C5894	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7036	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5895	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7037	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5896	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7039	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5897	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7040	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5900	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7041	1-100-567-81	CERAMIC CHIP 0.01UF	10% 25V
C5901	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7042	1-112-066-11	CERAMIC CHIP 10UF	10% 10V
C5902	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7043	1-164-939-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C5903	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7044	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C5904	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7046	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
C5905	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7047	1-165-672-21	ELECT CHIP 47UF	20% 10V
C5906	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7048	1-164-878-11	CERAMIC CHIP 150PF	5% 50V
C5907	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7049	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5908	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7050	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
C5909	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7051	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5910	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V	C7054	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5911	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7056	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C5912	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7057	1-112-046-11	CERAMIC CHIP 4.7UF	10% 6.3V
C7000	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C7058	1-100-906-11	CERAMIC CHIP 0.01UF	10% 16V
C7001	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C7060	1-135-595-11	ELECT 100UF	20% 6.3V
C7002	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C7062	1-135-342-21	ELECT CHIP 56UF	20% 10V
C7003	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V	C7065	1-112-161-21	ELECT CHIP 1000UF	20% 6.3V
C7004	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V	C7067	1-112-797-11	ELECT CHIP 470UF	20% 25V
C7005	1-162-967-11	CERAMIC CHIP 0.0033UF	10.00% 50V	C7068	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C7006	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C7069	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C7007	1-100-552-21	ELECT CHIP 10UF	20% 25V	C7070	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C7008	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C7079	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C7009	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C7080	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C7010	1-112-797-11	ELECT CHIP 470UF	20% 25V	C7081	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C7011	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V	C7082	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

BE

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C7083	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	D4508	8-719-073-01	DIODE MA111-(K8).S0	
C7084	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	D4509	8-719-073-01	DIODE MA111-(K8).S0	
C7085	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	D4510	8-719-073-01	DIODE MA111-(K8).S0	
C7088	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	D4511	8-719-073-01	DIODE MA111-(K8).S0	
C7089	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	D5801	8-719-073-01	DIODE MA111-(K8).S0	
< CONNECTOR >				D5802	8-719-073-01	DIODE MA111-(K8).S0	
CN4001	*1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P		D5804	8-719-073-01	DIODE MA111-(K8).S0	
CN4002	*1-819-447-11	HEADER ASSEMBLY FOR PWB 10P		D5813	8-719-073-01	DIODE MA111-(K8).S0	
CN4003	*1-779-331-51	CONNECTOR, FFC/FPC 14P		D7000	6-500-215-01	DIODE M2FM3	
CN4004	*1-779-936-51	CONNECTOR, FFC/FPC 18P		D7001	8-719-072-43	DIODE RB050L-40TE25	
CN4007	*1-819-336-11	HEADER ASSEMBLY FOR PWB 3P		D7002	6-500-294-01	DIODE PTZ-TE25-3.9B	
CN4008	*1-820-187-11	HEADER ASSEMBLY (PRINT PWB)10P		D7003	6-500-294-01	DIODE PTZ-TE25-3.9B	
CN4300	*1-819-337-11	HEADER ASSEMBLY FOR PWB 10P		D7004	8-719-072-43	DIODE RB050L-40TE25	
CN4301	*1-820-189-11	HEADER ASSEMBLY (PRINT PWB)12P		D7005	8-719-072-43	DIODE RB050L-40TE25	
CN4400	*1-820-284-11	D SUB CONNECTOR		D7006	8-719-073-01	DIODE MA111-(K8).S0	
CN4700	*1-820-255-51	FFC/FPC CONNECTOR (ZIF) 20P		D7007	8-719-072-43	DIODE RB050L-40TE25	
CN5003	*1-820-506-11	HEADER ASSEMBLY FOR PWB 51P		D7008	6-500-579-01	DIODE PTZ-TE25-6.8B	
CN5800	*1-818-737-11	HDMI CONNECTOR		D7009	8-719-084-56	DIODE PTZ-TE25-15B	
CN5801	*1-818-737-11	HDMI CONNECTOR		D7010	6-500-295-01	DIODE PTZ-TE25-5.6B	
CN7002	*1-780-408-11	TERMINAL		< FUSE >			
CN7003	*1-780-408-11	TERMINAL		F7000	Δ 1-576-603-21	FUSE	3.15A 24V
CN7004	*1-780-408-11	TERMINAL		< FERRITE BEAD >			
CN7005	*1-780-408-11	TERMINAL		FB4001	1-414-227-11	FERRITE	0UH
CN7008	*1-820-186-11	HEADER ASSEMBLY (PRINT PWB) 9P		FB4002	1-400-177-21	FERRITE	0UH
CN7009	*1-820-186-11	HEADER ASSEMBLY (PRINT PWB) 9P		FB4003	1-414-227-11	FERRITE	0UH
CN7010	*1-780-408-11	TERMINAL		FB4004	1-400-110-21	FERRITE	0UH
CN7011	*1-780-408-11	TERMINAL		FB4005	1-400-110-21	FERRITE	0UH
CN7012	*1-780-408-11	TERMINAL		FB4006	1-400-110-21	FERRITE	0UH
CN7013	*1-780-408-11	TERMINAL		FB4007	1-400-110-21	FERRITE	0UH
CN7014	*1-780-408-11	TERMINAL		FB4008	1-400-331-11	FERRITE	0UH
CN7015	*1-780-408-11	TERMINAL		FB4009	1-400-807-21	FERRITE	0UH
CN7016	*1-780-408-11	TERMINAL		FB4010	1-400-591-22	FERRITE	0UH
CN7017	*1-780-408-11	TERMINAL		FB4011	1-400-807-21	FERRITE	0UH
CN7018	*1-780-408-11	TERMINAL		FB4012	1-400-807-21	FERRITE	0UH
CN7019	*1-780-408-11	TERMINAL		FB4013	1-400-807-21	FERRITE	0UH
< DIODE >				FB4014	1-400-807-21	FERRITE	0UH
D4002	8-719-058-24	DIODE RB501V-40TE-17		FB4015	1-400-807-21	FERRITE	0UH
D4006	8-719-073-01	DIODE MA111-(K8).S0		FB4016	1-400-807-21	FERRITE	0UH
D4007	8-719-077-59	DIODE 1PS302		FB4017	1-400-794-21	FERRITE	0UH
D4020	8-719-422-46	DIODE MA8056		FB4018	1-400-794-21	FERRITE	0UH
D4021	8-719-422-46	DIODE MA8056		FB4019	1-400-591-22	FERRITE	0UH
D4301	8-719-064-03	DIODE HZU16B2TRF-E		FB4020	1-400-141-22	FERRITE	0UH
D4302	8-719-064-03	DIODE HZU16B2TRF-E		FB4021	1-400-141-22	FERRITE	0UH
D4400	8-719-422-46	DIODE MA8056		FB4022	1-400-807-21	FERRITE	0UH
D4401	8-719-422-46	DIODE MA8056		FB4023	1-400-807-21	FERRITE	0UH
D4402	8-719-422-46	DIODE MA8056		FB4311	1-400-851-11	FERRITE	0UH
D4403	8-719-050-38	DIODE M1MA152WK-T1		FB4312	1-400-110-21	FERRITE	0UH
D4500	8-719-056-84	DIODE UDZ-TE-17-7.5B					

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
FB4313	1-400-110-21	FERRITE	OUH	FL5302	1-234-177-21	FERRITE	OUH
FB4315	1-400-110-21	FERRITE	OUH	FL5303	1-234-177-21	FERRITE	OUH
FB4320	1-400-141-22	FERRITE	OUH	FL5304	1-234-177-21	FERRITE	OUH
FB4321	1-400-141-22	FERRITE	OUH	FL5306	1-234-177-21	FERRITE	OUH
FB4400	1-469-100-21	FERRITE	OUH	FL5500	1-234-177-21	FERRITE	OUH
FB4401	1-469-100-21	FERRITE	OUH	FL5501	1-234-177-21	FERRITE	OUH
FB4402	1-469-100-21	FERRITE	OUH	FL5800	1-234-177-21	FERRITE	OUH
FB4404	1-469-100-21	FERRITE	OUH	FL5801	1-234-177-21	FERRITE	OUH
FB4405	1-400-141-22	FERRITE	OUH	FL5802	1-234-177-21	FERRITE	OUH
FB5000	1-400-461-21	FERRITE	OUH	< IC >			
FB5001	1-400-461-21	FERRITE	OUH	IC4001	6-708-219-01	IC MB91305PMC-G-BNDE1	
FB5002	1-400-461-21	FERRITE	OUH	IC4002	6-807-038-01	IC MX29LV160CTTI-70G-WAX2FE-03	
FB5003	1-400-461-21	FERRITE	OUH	IC4003	6-706-419-01	IC LM393DT (A)	
FB5004	1-400-461-21	FERRITE	OUH	IC4004	6-703-175-01	IC PST3629UL	
FB5005	1-400-461-21	FERRITE	OUH	IC4005	6-710-121-01	IC M24256-BWMN6TP (A)	
FB5006	1-400-461-21	FERRITE	OUH	IC4006	6-709-512-01	IC S-1132B18-M5T1G	
FB5008	1-400-794-21	FERRITE	OUH	IC4007	6-706-815-01	IC TMP75AIDR	
FB5300	1-400-794-21	FERRITE	OUH	IC4008	8-759-549-03	IC SN74LV132APWR	
FB5301	1-400-794-21	FERRITE	OUH	IC4009	6-709-517-01	IC S-35390A-J8T1G	
FB5302	1-400-794-21	FERRITE	OUH	IC4010	6-708-762-01	IC PQ200WNA12PH	
FB5501	1-400-794-21	FERRITE	OUH	IC4400	6-704-600-01	IC M24C02-WMN6T (B)	
FB5502	1-400-794-21	FERRITE	OUH	IC4401	8-759-679-54	IC SN74LVC14APWR	
FB5800	1-469-094-21	FERRITE	OUH	IC5000	6-709-896-01	IC CXD9887GG	
FB5801	1-400-461-21	FERRITE	OUH	IC5001	6-706-491-01	IC TC7SH86FU (T5RSOYJF)	
FB5802	1-414-235-22	FERRITE	OUH	IC5002	8-759-651-59	IC SN74CBTLV3245APWR	
FB5803	1-414-235-22	FERRITE	OUH	IC5003	8-759-651-59	IC SN74CBTLV3245APWR	
FB5804	1-400-461-21	FERRITE	OUH	IC5004	* 6-703-108-01	IC SN74LVC2G04DCKR	
FB5805	1-400-461-21	FERRITE	OUH	IC5500	6-710-089-01	IC K4D263238I-VC50T	
FB5806	1-414-235-22	FERRITE	OUH	IC5501	6-710-089-01	IC K4D263238I-VC50T	
FB5807	1-400-461-21	FERRITE	OUH	IC5800	6-704-819-01	IC CS4335-KSZR	
FB5808	1-400-382-11	FERRITE	OUH	IC5801	6-704-001-01	IC BR24L02F-WE2	
FB5809	1-400-382-11	FERRITE	OUH	IC5802	6-709-927-01	IC RT8H225C-TP-2	
FB7000	1-400-794-21	FERRITE	OUH	IC5803	6-704-001-01	IC BR24L02F-WE2	
FB7001	1-414-445-11	FERRITE	OUH	IC5805	6-709-498-01	IC SII9023CTU	
FB7002	1-414-445-11	FERRITE	OUH	IC5806	6-705-403-01	IC PQ070XZ01ZPH	
FB7003	1-414-445-11	FERRITE	OUH	IC7000	6-707-927-01	IC BD9775FV	
FB7004	1-400-591-22	FERRITE	OUH	IC7001	6-702-142-01	IC PQ1CY1032ZP	
FB7005	1-400-110-21	FERRITE	OUH	IC7002	6-710-037-01	IC MB39C011APFT-G-BND-ERE1	
FB7006	1-400-110-21	FERRITE	OUH	IC7003	6-708-862-01	IC MM1662FTRE	
FB7007	1-400-110-21	FERRITE	OUH	< SOCKET >			
FB7008	1-400-110-21	FERRITE	OUH	J4400	1-820-638-11	JACK (SMALL TYPE)	
FB7009	1-400-591-22	FERRITE	OUH	J5800	1-820-764-11	PHONO JACK2P	
FB7010	1-400-591-22	FERRITE	OUH	< COIL >			
FB7011	1-400-591-22	FERRITE	OUH	L5000	1-457-360-21	INDUCTOR	OUH
FB7014	1-400-591-22	FERRITE	OUH	L5001	1-457-360-21	INDUCTOR	OUH
< FILTER >				L5002	1-457-360-21	INDUCTOR	OUH
FL4001	1-234-177-21	FERRITE	OUH	L5003	1-457-360-21	INDUCTOR	OUH
FL5300	1-234-177-21	FERRITE	OUH				
FL5301	1-234-177-21	FERRITE	OUH				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

BE

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
L5004	1-457-360-21	INDUCTOR	0UH	Q5800	8-729-028-96	TRANSISTOR DTC114EUA-T106	
L5006	1-457-360-21	INDUCTOR	0UH	Q5801	8-729-025-28	TRANSISTOR 2SK1828	
L5007	1-457-360-21	INDUCTOR	0UH	Q5802	8-729-028-96	TRANSISTOR DTC114EUA-T106	
L5008	1-457-360-21	INDUCTOR	0UH	Q5803	8-729-025-28	TRANSISTOR 2SK1828	
L5009	1-457-360-21	INDUCTOR	0UH	Q5804	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L5010	1-457-360-21	INDUCTOR	0UH	Q5805	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L5012	1-400-177-21	FERRITE	0UH	Q5807	6-551-364-01	TRANSISTOR DTC614TUT106	
L5200	1-469-561-21	INDUCTOR	100UH	Q5808	6-551-364-01	TRANSISTOR DTC614TUT106	
L5300	1-469-551-21	INDUCTOR	2.2UH	Q5810	8-729-028-96	TRANSISTOR DTC114EUA-T106	
L5301	1-469-551-21	INDUCTOR	2.2UH	Q5812	6-550-014-01	TRANSISTOR SSM6N15FU (TE85R)	
L5302	1-469-551-21	INDUCTOR	2.2UH	Q5813	6-550-014-01	TRANSISTOR SSM6N15FU (TE85R)	
L5303	1-469-551-21	INDUCTOR	2.2UH	Q7000	6-550-652-01	TRANSISTOR FDS4435A	
L5304	1-412-054-21	INDUCTOR	2.2UH	Q7001	6-550-828-01	TRANSISTOR RSQ035P03TR	
L5305	1-400-177-21	FERRITE	0UH	Q7002	6-550-828-01	TRANSISTOR RSQ035P03TR	
L5804	1-469-555-21	INDUCTOR	10UH	Q7003	*6-550-663-01	TRANSISTOR RSS100N03TB	
L5805	1-469-555-21	INDUCTOR	10UH	Q7004	6-550-355-01	TRANSISTOR RTQ045N03TR	
L7000	1-400-175-21	INDUCTOR	47UH	Q7005	6-550-851-01	TRANSISTOR RSS050P03FTB	
L7001	1-457-041-21	INDUCTOR	10UH	Q7007	8-729-602-21	TRANSISTOR 2SC4154-F	
L7002	1-456-787-21	INDUCTOR	10UH	Q7008	8-729-028-96	TRANSISTOR DTC114EUA-T106	
L7003	1-481-080-11	INDUCTOR	22UH	Q7009	6-550-663-01	TRANSISTOR RSS100N03TB	
L7004	1-481-083-11	INDUCTOR	22UH	Q7012	8-729-029-00	TRANSISTOR DTC115EUA-T106	
L7005	1-424-797-21	INDUCTOR	10UH	Q7015	8-729-028-77	TRANSISTOR DTA115EUA-T106	
L7007	1-400-790-21	INDUCTOR	4.7UH	Q7016	8-729-029-00	TRANSISTOR DTC115EUA-T106	
< PROTECTOR MODULE >				< RESISTOR >			
PS4400	Δ 1-576-122-21	IC LINK	0.4A 72V	R4001	1-216-864-11	SHORT CHIP	0
PS7000	Δ 1-576-603-21	FUSE	3.15A 24V	R4002	1-216-864-11	SHORT CHIP	0
< TRANSISTOR >				R4003	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
Q4001	6-551-387-01	TRANSISTOR SSM6N16FU		R4004	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
Q4003	8-729-028-74	TRANSISTOR DTA114TUA-T106		R4005	1-216-821-11	METAL CHIP	1K 5% 1/10W
Q4004	8-729-013-28	TRANSISTOR HN1B01FU-TE85R		R4007	1-218-937-11	RES-CHIP	47 5% 1/16W
Q4005	8-729-028-74	TRANSISTOR DTA114TUA-T106		R4008	1-218-937-11	RES-CHIP	47 5% 1/16W
Q4006	8-729-029-04	TRANSISTOR DTC123JUA-T106		R4009	1-218-937-11	RES-CHIP	47 5% 1/16W
Q4007	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4010	1-218-990-81	SHORT CHIP	0
Q4285	8-729-029-00	TRANSISTOR DTC115EUA-T106		R4011	1-216-864-11	SHORT CHIP	0
Q4286	8-729-028-77	TRANSISTOR DTA115EUA-T106		R4012	1-216-864-11	SHORT CHIP	0
Q4301	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R4013	1-216-801-11	METAL CHIP	22 5% 1/10W
Q4400	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R4014	1-216-801-11	METAL CHIP	22 5% 1/10W
Q4401	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R4015	1-216-864-11	SHORT CHIP	0
Q4500	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4016	1-216-801-11	METAL CHIP	22 5% 1/10W
Q4502	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4017	1-216-801-11	METAL CHIP	22 5% 1/10W
Q4503	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4018	1-216-864-11	SHORT CHIP	0
Q4504	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4019	1-216-864-11	SHORT CHIP	0
Q4505	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4020	1-216-813-11	METAL CHIP	220 5% 1/10W
Q4506	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4021	1-216-801-11	METAL CHIP	22 5% 1/10W
Q4507	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4022	1-216-801-11	METAL CHIP	22 5% 1/10W
Q5200	8-729-602-36	TRANSISTOR 2SA1602-F		R4023	1-216-801-11	METAL CHIP	22 5% 1/10W
Q5201	8-729-602-36	TRANSISTOR 2SA1602-F		R4024	1-216-801-11	METAL CHIP	22 5% 1/10W
				R4025	1-216-864-11	SHORT CHIP	0
				R4026	1-216-801-11	METAL CHIP	22 5% 1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R4027	1-218-990-81	SHORT CHIP	0	R4103	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4028	1-216-864-11	SHORT CHIP	0	R4111	1-218-933-11	RES-CHIP	22 5% 1/16W
R4029	1-216-864-11	SHORT CHIP	0	R4113	1-218-933-11	RES-CHIP	22 5% 1/16W
R4031	1-218-887-11	METAL CHIP	47K 0.5% 1/10W	R4120	1-216-864-11	SHORT CHIP	0
R4032	1-216-864-11	SHORT CHIP	0	R4121	1-216-864-11	SHORT CHIP	0
R4033	1-216-864-11	SHORT CHIP	0	R4122	1-216-864-11	SHORT CHIP	0
R4034	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W	R4123	1-216-864-11	SHORT CHIP	0
R4035	1-216-864-11	SHORT CHIP	0	R4124	1-216-864-11	SHORT CHIP	0
R4036	1-218-963-11	RES-CHIP	6.8K 5% 1/16W	R4125	1-216-864-11	SHORT CHIP	0
R4037	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W	R4134	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4038	1-218-963-11	RES-CHIP	6.8K 5% 1/16W	R4144	1-208-691-11	METAL CHIP	2.2K 0.5% 1/16W
R4039	1-216-864-11	SHORT CHIP	0	R4161	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4040	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4162	1-218-973-11	RES-CHIP	47K 5% 1/16W
R4041	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4164	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4042	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4165	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4043	1-208-927-11	METAL CHIP	47K 0.5% 1/16W	R4167	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4044	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4168	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4045	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4169	1-216-864-11	SHORT CHIP	0
R4046	1-216-864-11	SHORT CHIP	0	R4180	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4047	1-216-864-11	SHORT CHIP	0	R4186	1-218-990-81	SHORT CHIP	0
R4048	1-216-864-11	SHORT CHIP	0	R4188	1-218-990-81	SHORT CHIP	0
R4049	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4190	1-208-886-81	METAL CHIP	910 0.5% 1/16W
R4050	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4192	1-218-941-81	RES-CHIP	100 5% 1/16W
R4051	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4193	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4052	1-216-864-11	SHORT CHIP	0	R4195	1-218-990-81	SHORT CHIP	0
R4055	1-218-990-81	SHORT CHIP	0	R4196	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4056	1-218-990-81	SHORT CHIP	0	R4198	1-218-990-81	SHORT CHIP	0
R4059	1-216-864-11	SHORT CHIP	0	R4199	1-218-941-81	RES-CHIP	100 5% 1/16W
R4064	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4202	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4065	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4203	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4067	1-216-864-11	SHORT CHIP	0	R4205	1-218-990-81	SHORT CHIP	0
R4068	1-218-990-81	SHORT CHIP	0	R4206	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4069	1-208-855-81	METAL CHIP	47 0.5% 1/16W	R4207	1-218-949-11	RES-CHIP	470 5% 1/16W
R4070	1-216-864-11	SHORT CHIP	0	R4208	1-218-990-81	SHORT CHIP	0
R4071	1-218-990-81	SHORT CHIP	0	R4209	1-218-990-81	SHORT CHIP	0
R4074	1-218-990-81	SHORT CHIP	0	R4210	1-218-949-11	RES-CHIP	470 5% 1/16W
R4075	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4211	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4076	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4212	1-218-949-11	RES-CHIP	470 5% 1/16W
R4077	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4218	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R4078	1-216-864-11	SHORT CHIP	0	R4223	1-218-945-11	RES-CHIP	220 5% 1/16W
R4082	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4224	1-218-990-81	SHORT CHIP	0
R4088	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4225	1-218-937-11	RES-CHIP	47 5% 1/16W
R4092	1-216-864-11	SHORT CHIP	0	R4226	1-218-945-11	RES-CHIP	220 5% 1/16W
R4093	1-216-864-11	SHORT CHIP	0	R4227	1-218-937-11	RES-CHIP	47 5% 1/16W
R4096	1-208-699-11	METAL CHIP	4.7K 0.5% 1/16W	R4235	1-218-990-81	SHORT CHIP	0
R4097	1-208-679-11	METAL CHIP	680 0.5% 1/16W	R4239	1-218-990-81	SHORT CHIP	0
R4098	1-208-691-11	METAL CHIP	2.2K 0.5% 1/16W	R4240	1-208-943-11	METAL CHIP	220K 0.5% 1/16W
R4099	1-216-864-11	SHORT CHIP	0	R4242	1-218-941-81	RES-CHIP	100 5% 1/16W
R4100	1-216-864-11	SHORT CHIP	0	R4243	1-216-809-11	METAL CHIP	100 5% 1/10W
R4101	1-218-959-11	RES-CHIP	3.3K 5% 1/16W	R4246	1-218-965-11	RES-CHIP	10K 5% 1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R4247	1-216-864-11	SHORT CHIP	0	R4423	1-216-801-11	METAL CHIP	22 5% 1/10W
R4255	1-400-591-22	FERRITE	0UH	R4429	1-216-801-11	METAL CHIP	22 5% 1/10W
R4256	1-400-591-22	FERRITE	0UH	R4430	1-216-801-11	METAL CHIP	22 5% 1/10W
R4257	1-400-591-22	FERRITE	0UH	R4439	1-218-985-11	RES-CHIP	470K 5% 1/16W
R4258	1-400-591-22	FERRITE	0UH	R4440	1-218-985-11	RES-CHIP	470K 5% 1/16W
R4259	1-400-591-22	FERRITE	0UH	R4441	1-208-939-11	METAL CHIP	150K 0.5% 1/16W
R4260	1-400-591-22	FERRITE	0UH	R4442	1-208-939-11	METAL CHIP	150K 0.5% 1/16W
R4261	1-400-591-22	FERRITE	0UH	R4443	1-208-939-11	METAL CHIP	150K 0.5% 1/16W
R4262	1-400-591-22	FERRITE	0UH	R4444	1-208-939-11	METAL CHIP	150K 0.5% 1/16W
R4263	1-400-591-22	FERRITE	0UH	R4445	1-216-821-11	METAL CHIP	1K 5% 1/10W
R4264	1-400-591-22	FERRITE	0UH	R4446	1-216-821-11	METAL CHIP	1K 5% 1/10W
R4265	1-400-591-22	FERRITE	0UH	R4506	1-218-963-11	RES-CHIP	6.8K 5% 1/16W
R4266	1-216-864-11	SHORT CHIP	0	R4507	1-218-963-11	RES-CHIP	6.8K 5% 1/16W
R4267	1-400-591-22	FERRITE	0UH	R4510	1-218-990-81	SHORT CHIP	0
R4270	1-218-941-81	RES-CHIP	100 5% 1/16W	R4515	1-208-935-11	METAL CHIP	100K 0.5% 1/16W
R4271	1-218-990-81	SHORT CHIP	0	R4516	1-218-978-11	RES-CHIP	120K 5% 1/16W
R4272	1-218-990-81	SHORT CHIP	0	R4517	1-208-935-11	METAL CHIP	100K 0.5% 1/16W
R4290	1-218-990-81	SHORT CHIP	0	R4518	1-208-923-11	METAL CHIP	33K 0.5% 1/16W
R4295	1-208-715-11	METAL CHIP	22K 0.5% 1/16W	R4542	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4301	1-218-990-81	SHORT CHIP	0	R4543	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4302	1-218-941-11	RES-CHIP	100 5% 1/16W	R4544	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4303	1-218-990-81	SHORT CHIP	0	R4545	1-218-977-11	RES-CHIP	100K 5% 1/16W
R4307	1-218-990-81	SHORT CHIP	0	R4546	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4308	1-218-990-81	SHORT CHIP	0	R4547	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4309	1-218-957-11	RES-CHIP	2.2K 5% 1/16W	R4700	1-218-937-11	RES-CHIP	47 5% 1/16W
R4310	1-218-957-11	RES-CHIP	2.2K 5% 1/16W	R4710	1-218-990-81	SHORT CHIP	0
R4313	1-216-864-11	SHORT CHIP	0	R4715	1-218-969-11	RES-CHIP	22K 5% 1/16W
R4314	1-216-864-11	SHORT CHIP	0	R4716	1-218-969-11	RES-CHIP	22K 5% 1/16W
R4315	1-216-864-11	SHORT CHIP	0	R4717	1-218-969-11	RES-CHIP	22K 5% 1/16W
R4316	1-216-864-11	SHORT CHIP	0	R4718	1-218-969-11	RES-CHIP	22K 5% 1/16W
R4321	1-208-695-11	METAL CHIP	3.3K 0.5% 1/16W	R4719	1-216-864-11	SHORT CHIP	0
R4322	1-218-985-11	RES-CHIP	470K 5% 1/16W	R4720	1-216-864-11	SHORT CHIP	0
R4400	1-216-805-11	METAL CHIP	47 5% 1/10W	R4727	1-218-990-81	SHORT CHIP	0
R4401	1-216-805-11	METAL CHIP	47 5% 1/10W	R4728	1-218-990-81	SHORT CHIP	0
R4406	1-216-833-11	METAL CHIP	10K 5% 1/10W	R5004	1-218-990-81	SHORT CHIP	0
R4407	1-208-683-11	METAL CHIP	1K 0.5% 1/16W	R5007	1-218-990-81	SHORT CHIP	0
R4408	1-208-683-11	METAL CHIP	1K 0.5% 1/16W	R5009	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4409	1-216-833-11	METAL CHIP	10K 5% 1/10W	R5012	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4410	1-216-805-11	METAL CHIP	47 5% 1/10W	R5013	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4411	1-216-805-11	METAL CHIP	47 5% 1/10W	R5015	1-218-989-11	RES-CHIP	1M 5% 1/16W
R4412	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5017	1-218-990-81	SHORT CHIP	0
R4413	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5018	1-218-941-11	RES-CHIP	100 5% 1/16W
R4414	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5019	1-208-699-11	METAL CHIP	4.7K 0.5% 1/16W
R4415	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5020	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R4416	1-216-821-11	METAL CHIP	1K 5% 1/10W	R5021	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R4417	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5022	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R4418	1-218-827-11	METAL CHIP	150 0.5% 1/10W	R5024	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4419	1-216-845-11	METAL CHIP	100K 5% 1/10W	R5032	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R4421	1-216-801-11	METAL CHIP	22 5% 1/10W	R5039	1-218-935-11	RES-CHIP	33 5% 1/16W
R4422	1-216-801-11	METAL CHIP	22 5% 1/10W	R5200	1-218-957-11	RES-CHIP	2.2K 5% 1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R5201	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R5261	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5202	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5262	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5203	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5263	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5204	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R5264	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5205	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R5265	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5206	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5304	1-216-295-91	SHORT CHIP	0		
R5207	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5500	1-218-661-11	METAL CHIP	51	0.5%	1/10W
R5209	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5501	1-218-937-11	RES-CHIP	47	5%	1/16W
R5210	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5502	1-218-661-11	METAL CHIP	51	0.5%	1/10W
R5211	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5503	1-218-937-11	RES-CHIP	47	5%	1/16W
R5212	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5504	1-218-933-11	RES-CHIP	22	5%	1/16W
R5213	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5505	1-218-937-11	RES-CHIP	47	5%	1/16W
R5214	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5506	1-218-937-11	RES-CHIP	47	5%	1/16W
R5215	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5509	1-218-937-11	RES-CHIP	47	5%	1/16W
R5218	1-218-990-81	SHORT CHIP	0			R5510	1-218-937-11	RES-CHIP	47	5%	1/16W
R5219	1-216-864-11	SHORT CHIP	0			R5511	1-218-933-11	RES-CHIP	22	5%	1/16W
R5220	1-216-864-11	SHORT CHIP	0			R5512	1-218-933-11	RES-CHIP	22	5%	1/16W
R5221	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5513	1-218-939-11	RES-CHIP	68	5%	1/16W
R5222	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5514	1-218-939-11	RES-CHIP	68	5%	1/16W
R5223	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5515	1-218-939-11	RES-CHIP	68	5%	1/16W
R5224	1-218-933-11	RES-CHIP	22	5%	1/16W	R5516	1-218-939-11	RES-CHIP	68	5%	1/16W
R5225	1-218-933-11	RES-CHIP	22	5%	1/16W	R5517	1-218-661-11	METAL CHIP	51	0.5%	1/10W
R5226	1-218-990-81	SHORT CHIP	0			R5518	1-218-937-11	RES-CHIP	47	5%	1/16W
R5227	1-218-990-81	SHORT CHIP	0			R5519	1-218-661-11	METAL CHIP	51	0.5%	1/10W
R5228	1-218-990-81	SHORT CHIP	0			R5520	1-218-937-11	RES-CHIP	47	5%	1/16W
R5229	1-218-990-81	SHORT CHIP	0			R5522	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R5230	1-218-990-81	SHORT CHIP	0			R5523	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R5231	1-218-990-81	SHORT CHIP	0			R5524	1-218-937-11	RES-CHIP	47	5%	1/16W
R5232	1-218-990-81	SHORT CHIP	0			R5525	1-218-937-11	RES-CHIP	47	5%	1/16W
R5233	1-218-990-81	SHORT CHIP	0			R5526	1-218-937-11	RES-CHIP	47	5%	1/16W
R5234	1-218-990-81	SHORT CHIP	0			R5527	1-218-937-11	RES-CHIP	47	5%	1/16W
R5235	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5530	1-218-939-11	RES-CHIP	68	5%	1/16W
R5236	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5531	1-218-939-11	RES-CHIP	68	5%	1/16W
R5238	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5532	1-218-939-11	RES-CHIP	68	5%	1/16W
R5239	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5533	1-218-939-11	RES-CHIP	68	5%	1/16W
R5241	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5534	1-218-933-11	RES-CHIP	22	5%	1/16W
R5243	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5535	1-218-933-11	RES-CHIP	22	5%	1/16W
R5245	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5536	1-218-933-11	RES-CHIP	22	5%	1/16W
R5247	1-218-990-81	SHORT CHIP	0			R5537	1-218-933-11	RES-CHIP	22	5%	1/16W
R5248	1-218-990-81	SHORT CHIP	0			R5538	1-218-933-11	RES-CHIP	22	5%	1/16W
R5251	1-218-990-81	SHORT CHIP	0			R5539	1-218-933-11	RES-CHIP	22	5%	1/16W
R5252	1-218-990-81	SHORT CHIP	0			R5540	1-218-933-11	RES-CHIP	22	5%	1/16W
R5253	1-218-990-81	SHORT CHIP	0			R5541	1-218-933-11	RES-CHIP	22	5%	1/16W
R5254	1-218-990-81	SHORT CHIP	0			R5543	1-218-933-11	RES-CHIP	22	5%	1/16W
R5255	1-218-990-81	SHORT CHIP	0			R5544	1-218-933-11	RES-CHIP	22	5%	1/16W
R5256	1-218-990-81	SHORT CHIP	0			R5545	1-218-933-11	RES-CHIP	22	5%	1/16W
R5257	1-218-990-81	SHORT CHIP	0			R5546	1-218-933-11	RES-CHIP	22	5%	1/16W
R5258	1-218-990-81	SHORT CHIP	0			R5547	1-218-933-11	RES-CHIP	22	5%	1/16W
R5259	1-218-990-81	SHORT CHIP	0			R5548	1-218-933-11	RES-CHIP	22	5%	1/16W
R5260	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R5549	1-218-933-11	RES-CHIP	22	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R5550	1-218-933-11	RES-CHIP	22	5%	1/16W	R5859	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W
R5802	1-218-929-11	RES-CHIP	10	5%	1/16W	R5860	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R5803	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R5861	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R5804	1-218-990-81	SHORT CHIP	0			R5862	1-208-939-11	METAL CHIP	150K	0.5%	1/16W
R5805	1-218-929-11	RES-CHIP	10	5%	1/16W	R5863	1-208-939-11	METAL CHIP	150K	0.5%	1/16W
R5806	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R5864	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5807	1-218-990-81	SHORT CHIP	0			R5865	1-208-939-11	METAL CHIP	150K	0.5%	1/16W
R5808	1-218-990-81	SHORT CHIP	0			R5866	1-208-939-11	METAL CHIP	150K	0.5%	1/16W
R5809	1-218-990-81	SHORT CHIP	0			R5867	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5810	1-216-864-11	SHORT CHIP	0			R5870	1-218-953-11	RES-CHIP	1K	5%	1/16W
R5813	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R5871	1-218-935-11	RES-CHIP	33	5%	1/16W
R5814	1-216-864-11	SHORT CHIP	0			R5872	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5815	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R5873	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5816	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R5875	1-218-989-11	RES-CHIP	1M	5%	1/16W
R5817	1-218-941-81	RES-CHIP	100	5%	1/16W	R5877	1-218-956-11	RES-CHIP	1.8K	5%	1/16W
R5818	1-218-941-81	RES-CHIP	100	5%	1/16W	R5878	1-218-989-11	RES-CHIP	1M	5%	1/16W
R5819	1-218-990-81	SHORT CHIP	0			R5879	1-218-990-81	SHORT CHIP	0		
R5820	1-218-990-81	SHORT CHIP	0			R5881	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5821	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R5882	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5822	1-218-973-11	RES-CHIP	47K	5%	1/16W	R5883	1-220-876-81	METAL CHIP	18	0.5%	1/16W
R5823	1-218-941-81	RES-CHIP	100	5%	1/16W	R5884	1-208-687-11	METAL CHIP	1.5K	0.5%	1/16W
R5824	1-218-941-81	RES-CHIP	100	5%	1/16W	R5885	1-208-675-11	METAL CHIP	470	0.5%	1/16W
R5825	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W	R5886	1-208-647-11	METAL CHIP	33	0.5%	1/16W
R5826	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W	R5887	1-208-679-11	METAL CHIP	680	0.5%	1/16W
R5827	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W	R5888	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W
R5829	1-218-941-81	RES-CHIP	100	5%	1/16W	R5889	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W
R5830	1-218-973-11	RES-CHIP	47K	5%	1/16W	R5890	1-218-948-11	RES-CHIP	390	5%	1/16W
R5831	1-218-929-11	RES-CHIP	10	5%	1/16W	R5892	1-218-933-11	RES-CHIP	22	5%	1/16W
R5832	1-218-929-11	RES-CHIP	10	5%	1/16W	R5893	1-218-937-11	RES-CHIP	47	5%	1/16W
R5833	1-218-929-11	RES-CHIP	10	5%	1/16W	R5894	1-218-937-11	RES-CHIP	47	5%	1/16W
R5834	1-218-929-11	RES-CHIP	10	5%	1/16W	R5895	1-218-937-11	RES-CHIP	47	5%	1/16W
R5835	1-218-929-11	RES-CHIP	10	5%	1/16W	R5896	1-218-937-11	RES-CHIP	47	5%	1/16W
R5836	1-218-929-11	RES-CHIP	10	5%	1/16W	R5900	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5837	1-218-929-11	RES-CHIP	10	5%	1/16W	R5901	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5838	1-218-929-11	RES-CHIP	10	5%	1/16W	R5902	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5839	1-218-937-11	RES-CHIP	47	5%	1/16W	R5903	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5840	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W	R5904	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5841	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W	R5907	1-218-990-81	SHORT CHIP	0		
R5844	1-218-929-11	RES-CHIP	10	5%	1/16W	R5908	1-218-990-81	SHORT CHIP	0		
R5845	1-218-929-11	RES-CHIP	10	5%	1/16W	R5909	1-218-990-81	SHORT CHIP	0		
R5846	1-218-929-11	RES-CHIP	10	5%	1/16W	R5910	1-218-990-81	SHORT CHIP	0		
R5847	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W	R7000	1-218-877-11	METAL CHIP	18K	0.5%	1/10W
R5848	1-218-929-11	RES-CHIP	10	5%	1/16W	R7001	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R5849	1-218-929-11	RES-CHIP	10	5%	1/16W	R7002	1-218-875-11	METAL CHIP	15K	0.5%	1/10W
R5850	1-218-929-11	RES-CHIP	10	5%	1/16W	R7003	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R5851	1-218-929-11	RES-CHIP	10	5%	1/16W	R7004	1-216-841-11	METAL CHIP	47K	5%	1/10W
R5854	1-218-985-11	RES-CHIP	470K	5%	1/16W	R7005	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R5855	1-218-985-11	RES-CHIP	470K	5%	1/16W	R7006	1-218-895-11	METAL CHIP	100K	0.5%	1/10W
R5856	1-218-929-11	RES-CHIP	10	5%	1/16W	R7007	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W
R5857	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W	R7008	1-218-891-11	METAL CHIP	68K	0.5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R7009	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7080	1-218-990-81	SHORT CHIP	0		
R7010	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R7082	1-218-875-11	METAL CHIP	15K	0.5%	1/10W
R7011	1-218-879-11	METAL CHIP	22K	0.5%	1/10W	R7083	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W
R7012	1-216-835-11	METAL CHIP	15K	5%	1/10W	R7085	1-208-909-11	METAL CHIP	8.2K	0.5%	1/16W
R7013	1-218-882-11	METAL CHIP	30K	0.5%	1/10W	R7087	1-218-967-11	RES-CHIP	15K	5%	1/16W
R7014	1-218-937-11	RES-CHIP	47	5%	1/16W	R7090	1-218-978-11	RES-CHIP	120K	5%	1/16W
R7015	1-218-937-11	RES-CHIP	47	5%	1/16W	R7091	1-208-929-81	METAL CHIP	56K	0.5%	1/16W
R7016	1-216-295-91	SHORT CHIP	0			R7092	1-218-963-11	RES-CHIP	6.8K	5%	1/16W
R7017	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R7093	1-216-295-91	SHORT CHIP	0		
R7019	1-216-835-11	METAL CHIP	15K	5%	1/10W	R7094	1-216-864-11	SHORT CHIP	0		
R7020	1-216-864-11	SHORT CHIP	0			R7095	1-216-864-11	SHORT CHIP	0		
R7021	1-216-837-11	METAL CHIP	22K	5%	1/10W	R7096	1-216-864-11	SHORT CHIP	0		
R7022	1-216-864-11	SHORT CHIP	0			R7097	1-216-295-91	SHORT CHIP	0		
R7023	1-216-864-11	SHORT CHIP	0			R7098	1-216-295-91	SHORT CHIP	0		
R7024	1-216-837-11	METAL CHIP	22K	5%	1/10W	R7099	1-216-295-91	SHORT CHIP	0		
R7025	1-216-864-11	SHORT CHIP	0			R7100	1-216-295-91	SHORT CHIP	0		
R7026	1-216-864-11	SHORT CHIP	0			R7101	1-216-864-11	SHORT CHIP	0		
R7027	1-218-990-81	SHORT CHIP	0			R7102	1-216-864-11	SHORT CHIP	0		
R7028	1-208-933-11	METAL CHIP	82K	0.5%	1/16W	R7103	1-216-864-11	SHORT CHIP	0		
R7029	1-208-935-11	METAL CHIP	100K	0.5%	1/16W	R7104	1-216-864-11	SHORT CHIP	0		
R7030	1-208-943-11	METAL CHIP	220K	0.5%	1/16W	R7105	1-218-973-11	RES-CHIP	47K	5%	1/16W
R7031	1-218-971-11	RES-CHIP	33K	5%	1/16W	R7106	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R7032	1-218-990-81	SHORT CHIP	0			R7107	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R7033	1-218-990-81	SHORT CHIP	0			R7108	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R7034	1-218-990-81	SHORT CHIP	0			R7109	1-218-973-11	RES-CHIP	47K	5%	1/16W
R7035	1-218-990-81	SHORT CHIP	0			R7110	1-216-864-11	SHORT CHIP	0		
R7036	1-218-990-81	SHORT CHIP	0			R7111	1-216-864-11	SHORT CHIP	0		
R7037	1-218-990-81	SHORT CHIP	0			R7112	1-218-849-11	METAL CHIP	1.2K	0.5%	1/10W
R7038	1-208-713-11	METAL CHIP	18K	0.5%	1/16W	R7119	1-218-990-81	SHORT CHIP	0		
R7039	1-218-990-81	SHORT CHIP	0			< RESISTOR CHIP >					
R7041	1-218-965-11	RES-CHIP	10K	5%	1/16W	RB4007	1-234-378-21	RES, NETWORK	10K		(1005X4)
R7043	1-208-713-11	METAL CHIP	18K	0.5%	1/16W	RB4008	1-234-378-21	RES, NETWORK	10K		(1005X4)
R7044	1-218-990-81	SHORT CHIP	0			RB4014	1-234-371-21	RES, NETWORK	47		(1005X4)
R7045	1-218-941-81	RES-CHIP	100	5%	1/16W	RB4015	1-234-371-21	RES, NETWORK	47		(1005X4)
R7046	1-216-295-91	SHORT CHIP	0			RB4016	1-234-371-21	RES, NETWORK	47		(1005X4)
R7048	1-216-864-11	SHORT CHIP	0			RB4018	1-234-371-21	RES, NETWORK	47		(1005X4)
R7049	1-216-864-11	SHORT CHIP	0			RB4019	1-234-371-21	RES, NETWORK	47		(1005X4)
R7050	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	RB4020	1-234-371-21	RES, NETWORK	47		(1005X4)
R7051	1-218-839-11	METAL CHIP	470	0.5%	1/10W	RB4700	1-234-372-11	RES, NETWORK	100		(1005X4)
R7053	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W	RB4701	1-234-372-11	RES, NETWORK	100		(1005X4)
R7054	1-218-843-11	METAL CHIP	680	0.5%	1/10W	RB4707	1-234-379-21	RES, NETWORK	22K		(1005X4)
R7055	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	RB4708	1-234-379-21	RES, NETWORK	22K		(1005X4)
R7056	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	RB4709	1-234-379-21	RES, NETWORK	22K		(1005X4)
R7057	1-216-843-11	METAL CHIP	68K	5%	1/10W	RB4710	1-234-379-21	RES, NETWORK	22K		(1005X4)
R7058	1-216-851-11	METAL CHIP	330K	5%	1/10W	RB4711	1-234-379-21	RES, NETWORK	22K		(1005X4)
R7060	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	RB4712	1-234-379-21	RES, NETWORK	22K		(1005X4)
R7063	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	RB5000	1-234-372-11	RES, NETWORK	100		(1005X4)
R7064	1-216-864-11	SHORT CHIP	0			RB5001	1-234-372-11	RES, NETWORK	100		(1005X4)
R7066	1-208-711-11	METAL CHIP	15K	0.5%	1/16W	RB5002	1-234-372-11	RES, NETWORK	100		(1005X4)
R7067	1-208-911-11	METAL CHIP	10K	0.5%	1/16W						

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
RB5003	1-234-372-11	RES, NETWORK 100	(1005X4)	VD5803	6-500-701-01	DIODE PGB1010603NR	
RB5004	1-234-372-11	RES, NETWORK 100	(1005X4)	VD5804	6-500-701-01	DIODE PGB1010603NR	
RB5005	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	VD5805	6-500-701-01	DIODE PGB1010603NR	
RB5006	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	VD5806	6-500-701-01	DIODE PGB1010603NR	
RB5007	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	VD5807	6-500-701-01	DIODE PGB1010603NR	
RB5212	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	VD5808	6-500-701-01	DIODE PGB1010603NR	
RB5213	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	VD5809	6-500-701-01	DIODE PGB1010603NR	
RB5501	1-234-370-21	RES, NETWORK 22	(1005X4)	VD5810	6-500-701-01	DIODE PGB1010603NR	
RB5502	1-234-370-21	RES, NETWORK 22	(1005X4)	VD5811	6-500-701-01	DIODE PGB1010603NR	
RB5503	1-234-370-21	RES, NETWORK 22	(1005X4)	VD5812	6-500-701-01	DIODE PGB1010603NR	
RB5504	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5813	6-500-701-01	DIODE PGB1010603NR	
RB5505	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5814	6-500-701-01	DIODE PGB1010603NR	
RB5506	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5815	6-500-701-01	DIODE PGB1010603NR	
RB5507	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5816	6-500-701-01	DIODE PGB1010603NR	
RB5508	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5817	6-500-701-01	DIODE PGB1010603NR	
RB5509	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5818	6-500-701-01	DIODE PGB1010603NR	
RB5510	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5819	6-500-701-01	DIODE PGB1010603NR	
RB5511	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5820	6-500-701-01	DIODE PGB1010603NR	
RB5516	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5821	6-500-701-01	DIODE PGB1010603NR	
RB5517	1-234-702-11	RES, NETWORK 68	(1005X4)	VD5822	6-500-701-01	DIODE PGB1010603NR	
RB5518	1-234-702-11	RES, NETWORK 68	(1005X4)	< CRYSTAL >			
RB5519	1-234-702-11	RES, NETWORK 68	(1005X4)	X4001	1-813-070-21	PIEZOELECTRIC OSCILLATOR	
RB5520	1-234-702-11	RES, NETWORK 68	(1005X4)	X4009	1-813-784-21	VIBRATOR, CRYSTAL	
RB5521	1-234-702-11	RES, NETWORK 68	(1005X4)	X5000	1-813-884-11	VIBRATOR, CRYSTAL 14.31818MHZ	
RB5522	1-234-702-11	RES, NETWORK 68	(1005X4)	X5800	1-813-528-11	VIBRATOR, CRYSTAL 27MHZ	
RB5523	1-234-702-11	RES, NETWORK 68	(1005X4)	*A-1184-346-A AE Board, Complete			
RB5800	1-242-963-21	RES, NETWORK 33	(1005X4)	< CAPACITOR >			
RB5801	1-234-371-21	RES, NETWORK 47	(1005X4)	C2008	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
RB5802	1-234-371-21	RES, NETWORK 47	(1005X4)	C2009	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
RB5803	1-234-371-21	RES, NETWORK 47	(1005X4)	C2013	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
RB5804	1-234-371-21	RES, NETWORK 47	(1005X4)	C2015	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
RB5805	1-234-371-21	RES, NETWORK 47	(1005X4)	C2016	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
RB5806	1-234-371-21	RES, NETWORK 47	(1005X4)	C2017	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
RB5807	1-234-378-21	RES, NETWORK 10K	(1005X4)	C2018	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
RB5808	1-234-378-21	RES, NETWORK 10K	(1005X4)	C2019	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
RB5809	1-234-378-21	RES, NETWORK 10K	(1005X4)	C2020	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
RB5810	1-234-378-21	RES, NETWORK 10K	(1005X4)	C2021	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
RB5811	1-234-378-21	RES, NETWORK 10K	(1005X4)	C2023	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
RB5812	1-234-378-21	RES, NETWORK 10K	(1005X4)	C2024	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
< VARISTOR >				C2025	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
VD4400	1-802-078-11	VARISTOR (SMD)		C2026	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
VD4401	1-802-078-11	VARISTOR (SMD)		C2027	1-162-908-11	CERAMIC CHIP 3PF	0.25PF 50V
VD4402	1-802-078-11	VARISTOR (SMD)		C2028	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
VD4403	1-802-078-11	VARISTOR (SMD)		C2029	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
VD4404	1-802-078-11	VARISTOR (SMD)		C2033	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
VD4405	1-802-078-11	VARISTOR (SMD)		C2040	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
VD4406	1-802-078-11	VARISTOR (SMD)		C2041	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
VD5801	1-802-078-11	VARISTOR (SMD)		C2042	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
VD5802	1-802-078-11	VARISTOR (SMD)					

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C2101	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C2549	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C2103	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C2550	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C2105	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	C2551	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C2111	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C2552	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C2114	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	C2553	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C2115	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C2554	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C2117	1-126-204-11	ELECT CHIP 47UF	20.00% 16V	C2555	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C2119	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2556	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C2120	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C2557	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C2122	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V	C2560	1-112-692-11	CERAMIC CHIP 1000PF	5% 50V
C2127	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	C2561	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C2502	1-162-928-11	CERAMIC CHIP 120PF	5.00% 50V	C2562	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C2504	1-162-906-11	CERAMIC CHIP 1.5PF	0.25PF 50V	C2563	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C2505	1-162-906-11	CERAMIC CHIP 1.5PF	0.25PF 50V	C2564	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C2507	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	C2565	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C2508	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2573	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C2509	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2575	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C2510	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C2576	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C2511	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C2583	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V
C2512	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C2586	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C2513	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C2587	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C2514	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	C2588	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C2515	1-164-933-11	CERAMIC CHIP 220PF	10.00% 50V	C2589	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C2517	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2590	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C2518	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2591	1-126-394-11	ELECT CHIP 10UF	20.00% 16V
C2519	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C2592	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C2520	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C2593	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C2521	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2594	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C2523	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2595	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C2524	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2596	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C2525	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2597	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C2527	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2598	1-164-217-11	CERAMIC CHIP 150PF	5.00% 50V
C2528	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C2599	1-162-965-11	CERAMIC CHIP 0.0015UF	10.00% 50V
C2529	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2600	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C2530	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C2601	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C2533	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2602	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C2534	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C2603	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C2535	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2604	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C2536	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2605	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C2537	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C2606	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C2538	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C2607	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C2539	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C2608	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V
C2540	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C2613	1-112-797-11	ELECT CHIP 470UF	20% 25V
C2542	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2614	1-112-800-11	ELECT CHIP 100UF	20% 35V
C2543	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C2615	1-112-800-11	ELECT CHIP 100UF	20% 35V
C2544	1-126-204-11	ELECT CHIP 47UF	20.00% 16V	C2616	1-112-800-11	ELECT CHIP 100UF	20% 35V
C2545	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2617	1-112-800-11	ELECT CHIP 100UF	20% 35V
C2546	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2618	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C2547	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2619	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C2548	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C2620	1-100-912-11	CERAMIC CHIP 1UF	10% 25V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C2621	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9047	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C2623	1-165-818-91	CERAMIC CHIP 0.68UF	10% 25V	C9048	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C2624	1-165-818-91	CERAMIC CHIP 0.68UF	10% 25V	C9049	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C2625	1-165-818-91	CERAMIC CHIP 0.68UF	10% 25V	C9050	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C2626	1-165-818-91	CERAMIC CHIP 0.68UF	10% 25V	C9051	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C2627	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9052	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C2628	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9057	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C2647	1-100-591-91	CERAMIC CHIP 1UF	10% 25V	C9058	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C2648	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9060	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C2800	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C9061	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C2801	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9065	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C2802	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9066	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C2803	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C9067	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C2804	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C9068	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C2805	1-126-204-11	ELECT CHIP 47UF	20.00% 16V	C9069	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C2809	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C9070	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C2810	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C9501	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C2811	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C9502	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V
C2812	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	< CONNECTOR >			
C2813	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	CN2301	1-820-184-11	HEADER ASSEMBLY (PRINT PWB) 7P	
C2814	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	CN2302	1-820-185-11	HEADER ASSEMBLY (PRINT PWB) 8P	
C2815	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	CN2303	1-820-211-11	HEADER ASSEMBLY FOR PWB 5P	
C2816	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	CN2500	*1-819-461-11	HEADER ASSEMBLY FOR PWB 4P	
C2817	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	CN9001	1-820-192-11	HEADER ASSEMBLY (PRINT PWB) 15P	
C2818	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	CN9501	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P	
C2819	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	CN9502	1-820-186-11	HEADER ASSEMBLY (PRINT PWB) 9P	
C2826	1-127-931-21	ELECT CHIP 470UF	20% 16V	CN9521	*1-780-408-11	TERMINAL	
C9001	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	CN9522	*1-780-408-11	TERMINAL	
C9003	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	CN9523	*1-780-408-11	TERMINAL	
C9005	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	CN9524	*1-780-408-11	TERMINAL	
C9007	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V	CN9525	*1-780-408-11	TERMINAL	
C9009	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	CN9526	*1-780-408-11	TERMINAL	
C9010	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	< DIODE >			
C9011	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D2101	8-719-074-43	DIODE BAS316-115	
C9012	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D2501	8-719-072-66	DIODE PDZ11B-115	
C9013	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D2504	6-500-334-01	DIODE MC2836-T112-1	
C9014	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D2505	8-719-074-43	DIODE BAS316-115	
C9015	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	D2507	8-719-074-43	DIODE BAS316-115	
C9016	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D2509	6-501-123-01	DIODE RB160M-60TR	
C9021	1-128-992-21	ELECT CHIP 47UF	20% 25V	D2510	6-501-123-01	DIODE RB160M-60TR	
C9027	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D2511	6-501-123-01	DIODE RB160M-60TR	
C9028	1-128-992-21	ELECT CHIP 47UF	20% 25V	D2512	6-501-123-01	DIODE RB160M-60TR	
C9029	1-128-992-21	ELECT CHIP 47UF	20% 25V	D2513	8-719-074-43	DIODE BAS316-115	
C9030	1-128-992-21	ELECT CHIP 47UF	20% 25V	D2514	6-501-123-01	DIODE RB160M-60TR	
C9031	1-128-992-21	ELECT CHIP 47UF	20% 25V	D2515	6-501-123-01	DIODE RB160M-60TR	
C9032	1-115-416-11	CERAMIC CHIP 0.001UF	5.00% 25V	D2516	6-501-123-01	DIODE RB160M-60TR	
C9043	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D2517	6-501-123-01	DIODE RB160M-60TR	
C9044	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D2804	8-719-074-43	DIODE BAS316-115	
C9045	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V				
C9046	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

AE

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D2805	8-719-074-43	DIODE BAS316-115		IC2803	6-709-927-01	IC RT8H225C-TP-2	
D9001	8-719-070-63	DIODE PDZ10B-115		IC2804	6-709-927-01	IC RT8H225C-TP-2	
D9002	8-719-072-68	DIODE PDZ13B-115		< SOCKET >			
D9003	8-719-070-63	DIODE PDZ10B-115		J9001	1-695-549-11	SOCKET, PIN 21P	
D9004	8-719-070-63	DIODE PDZ10B-115		J9002	1-695-549-11	SOCKET, PIN 21P	
D9005	8-719-070-57	DIODE PDZ5.6B-115		J9003	*1-819-358-11	PHONO JACK	
D9007	8-719-070-57	DIODE PDZ5.6B-115		J9004	1-819-354-11	PHONO JACK 5P	
D9008	8-719-070-63	DIODE PDZ10B-115		< COIL >			
D9009	8-719-072-68	DIODE PDZ13B-115		L2002	1-469-557-21	INDUCTOR	22UH
D9010	8-719-070-63	DIODE PDZ10B-115		L2003	1-469-555-21	INDUCTOR	10UH
D9011	8-719-070-57	DIODE PDZ5.6B-115		L2004	1-469-555-21	INDUCTOR	10UH
D9012	8-719-070-63	DIODE PDZ10B-115		L2101	1-469-555-21	INDUCTOR	10UH
D9013	8-719-070-57	DIODE PDZ5.6B-115		L2501	1-412-990-41	INDUCTOR	8.2UH
D9015	8-719-070-57	DIODE PDZ5.6B-115		L2502	1-400-794-21	FERRITE	0UH
D9016	8-719-070-63	DIODE PDZ10B-115		L2504	1-400-794-21	FERRITE	0UH
D9017	8-719-070-63	DIODE PDZ10B-115		L2505	1-469-555-21	INDUCTOR	10UH
D9018	8-719-070-63	DIODE PDZ10B-115		L2506	1-400-794-21	FERRITE	0UH
D9019	8-719-070-63	DIODE PDZ10B-115		L2508	1-481-083-11	INDUCTOR	22UH
D9020	8-719-070-63	DIODE PDZ10B-115		L2509	1-457-318-11	INDUCTOR	22UH
D9021	8-719-070-63	DIODE PDZ10B-115		L2510	1-457-318-11	INDUCTOR	22UH
D9022	8-719-070-63	DIODE PDZ10B-115		L2511	1-400-794-21	FERRITE	0UH
D9023	8-719-070-63	DIODE PDZ10B-115		L2512	1-400-794-21	FERRITE	0UH
D9036	8-719-070-63	DIODE PDZ10B-115		L2513	1-400-794-21	FERRITE	0UH
D9037	8-719-070-63	DIODE PDZ10B-115		L9001	1-469-555-21	INDUCTOR	10UH
D9038	8-719-070-63	DIODE PDZ10B-115		L9503	1-400-179-21	FERRITE	0UH
D9039	8-719-070-63	DIODE PDZ10B-115		L9504	1-400-179-21	FERRITE	0UH
< FERRITE BEAD >				L9505	1-400-179-21	FERRITE	0UH
FB2500	1-400-089-21	FERRITE	0UH	< PROTECTOR MODULE >			
FB2501	1-400-089-21	FERRITE	0UH	PS2501 Δ	1-576-958-21	FUSE	4A 24V
FB2502	1-400-089-21	FERRITE	0UH	< TRANSISTOR >			
FB2503	1-400-089-21	FERRITE	0UH	Q2001	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
FB2504	1-400-040-22	FERRITE	0UH	Q2002	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
FB2505	1-400-040-22	FERRITE	0UH	Q2003	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
FB2506	1-400-040-22	FERRITE	0UH	Q2004	8-729-600-22	TRANSISTOR 2SA1235-F	
FB2507	1-400-040-22	FERRITE	0UH	Q2101	8-729-600-22	TRANSISTOR 2SA1235-F	
FB2508	1-400-040-22	FERRITE	0UH	Q2102	8-729-600-22	TRANSISTOR 2SA1235-F	
FB9003	1-216-864-11	SHORT CHIP	0	Q2104	8-729-600-22	TRANSISTOR 2SA1235-F	
< FILTER >				Q2108	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
FL2001	1-234-558-21	FILTER, LOW PASS		Q2109	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
< IC >				Q2500	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
IC2001	8-752-089-33	IC CXA2069Q-TL		Q2501	8-729-600-22	TRANSISTOR 2SA1235-F	
IC2501	6-709-191-01	IC MSP4410K-QA-D6-501		Q2502	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
IC2503	8-759-278-58	IC NJM4558V-TE2		Q2505	8-729-600-22	TRANSISTOR 2SA1235-F	
IC2507	6-710-142-01	IC R2A15105SP-W00T		Q2507	8-729-028-96	TRANSISTOR DTC114EUA-T106	
IC2801	8-759-278-58	IC NJM4558V-TE2		Q2508	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
IC2802	8-759-359-49	IC NJM3414AV(TE2)					

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
Q2510	8-729-029-14	TRANSISTOR DTC144EUA-T106		R2036	1-216-809-11	METAL CHIP 100 5%	1/10W
Q2511	8-729-029-14	TRANSISTOR DTC144EUA-T106		R2037	1-216-817-11	METAL CHIP 470 5%	1/10W
Q2512	6-551-364-01	TRANSISTOR DTC614TUT106		R2038	1-216-817-11	METAL CHIP 470 5%	1/10W
Q2513	6-551-364-01	TRANSISTOR DTC614TUT106		R2039	1-216-864-11	SHORT CHIP 0	
Q2514	8-729-600-22	TRANSISTOR 2SA1235-F		R2101	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
Q2515	8-729-600-22	TRANSISTOR 2SA1235-F		R2102	1-216-809-11	METAL CHIP 100 5%	1/10W
Q2516	8-729-600-22	TRANSISTOR 2SA1235-F		R2103	1-216-864-11	SHORT CHIP 0	
Q2517	8-729-600-22	TRANSISTOR 2SA1235-F		R2104	1-218-855-11	METAL CHIP 2.2K 0.5%	1/10W
Q2518	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2109	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
Q2519	8-729-029-14	TRANSISTOR DTC144EUA-T106		R2117	1-216-857-11	METAL CHIP 1M 5%	1/10W
Q2520	8-729-029-14	TRANSISTOR DTC144EUA-T106		R2121	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
Q2521	8-729-028-96	TRANSISTOR DTC114EUA-T106		R2125	1-218-857-11	METAL CHIP 2.7K 0.5%	1/10W
Q2803	6-551-364-01	TRANSISTOR DTC614TUT106		R2128	1-218-861-11	METAL CHIP 3.9K 0.5%	1/10W
Q2804	6-551-364-01	TRANSISTOR DTC614TUT106		R2131	1-216-864-11	SHORT CHIP 0	
Q2806	6-551-364-01	TRANSISTOR DTC614TUT106		R2132	1-216-857-11	METAL CHIP 1M 5%	1/10W
Q2807	6-551-364-01	TRANSISTOR DTC614TUT106		R2134	1-216-864-11	SHORT CHIP 0	
Q2815	8-729-602-21	TRANSISTOR 2SC4154TP-1G		R2137	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q9001	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2139	1-216-815-11	METAL CHIP 330 5%	1/10W
Q9002	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2140	1-216-864-11	SHORT CHIP 0	
< RESISTOR >				R2151	1-216-864-11	SHORT CHIP 0	
R2002	1-216-821-11	METAL CHIP 1K 5%	1/10W	R2301	1-216-864-11	SHORT CHIP 0	
R2003	1-216-821-11	METAL CHIP 1K 5%	1/10W	R2305	1-216-864-11	SHORT CHIP 0	
R2004	1-216-864-11	SHORT CHIP 0		R2500	1-216-864-11	SHORT CHIP 0	
R2005	1-216-864-11	SHORT CHIP 0		R2501	1-216-821-11	METAL CHIP 1K 5%	1/10W
R2006	1-216-809-11	METAL CHIP 100 5%	1/10W	R2504	1-216-864-11	SHORT CHIP 0	
R2007	1-216-809-11	METAL CHIP 100 5%	1/10W	R2505	1-216-864-11	SHORT CHIP 0	
R2008	1-216-833-11	METAL CHIP 10K 5%	1/10W	R2507	1-216-805-11	METAL CHIP 47 5%	1/10W
R2009	1-216-833-11	METAL CHIP 10K 5%	1/10W	R2508	1-216-864-11	SHORT CHIP 0	
R2010	1-216-864-11	SHORT CHIP 0		R2510	1-216-821-11	METAL CHIP 1K 5%	1/10W
R2011	1-216-864-11	SHORT CHIP 0		R2511	1-216-845-11	METAL CHIP 100K 5%	1/10W
R2012	1-216-864-11	SHORT CHIP 0		R2512	1-218-990-81	SHORT CHIP 0	
R2014	1-216-864-11	SHORT CHIP 0		R2514	1-216-841-11	METAL CHIP 47K 5%	1/10W
R2015	1-216-864-11	SHORT CHIP 0		R2515	1-216-841-11	METAL CHIP 47K 5%	1/10W
R2017	1-216-864-11	SHORT CHIP 0		R2517	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2019	1-216-809-11	METAL CHIP 100 5%	1/10W	R2518	1-400-499-21	FERRITE 0UH	
R2020	1-216-809-11	METAL CHIP 100 5%	1/10W	R2519	1-400-499-21	FERRITE 0UH	
R2023	1-216-821-11	METAL CHIP 1K 5%	1/10W	R2520	1-216-841-11	METAL CHIP 47K 5%	1/10W
R2024	1-216-821-11	METAL CHIP 1K 5%	1/10W	R2522	1-218-990-81	SHORT CHIP 0	
R2025	1-216-864-11	SHORT CHIP 0		R2525	1-218-990-81	SHORT CHIP 0	
R2026	1-216-864-11	SHORT CHIP 0		R2531	1-208-699-11	METAL CHIP 4.7K 0.5%	1/16W
R2027	1-216-864-11	SHORT CHIP 0		R2532	1-208-711-11	METAL CHIP 15K 0.5%	1/16W
R2028	1-216-864-11	SHORT CHIP 0		R2533	1-208-699-11	METAL CHIP 4.7K 0.5%	1/16W
R2029	1-216-864-11	SHORT CHIP 0		R2534	1-208-711-11	METAL CHIP 15K 0.5%	1/16W
R2030	1-216-809-11	METAL CHIP 100 5%	1/10W	R2535	1-208-935-11	METAL CHIP 100K 0.5%	1/16W
R2031	1-216-817-11	METAL CHIP 470 5%	1/10W	R2537	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R2032	1-216-830-11	METAL CHIP 5.6K 5%	1/10W	R2539	1-218-873-11	METAL CHIP 12K 0.5%	1/10W
R2033	1-216-818-11	METAL CHIP 560 5%	1/10W	R2540	1-218-875-11	METAL CHIP 15K 0.5%	1/10W
R2034	1-216-817-11	METAL CHIP 470 5%	1/10W	R2541	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R2035	1-216-809-11	METAL CHIP 100 5%	1/10W	R2545	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
				R2547	1-208-911-11	METAL CHIP 10K 0.5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R2549	1-208-927-11	METAL CHIP	47K 0.5% 1/16W	R2658	1-216-833-11	METAL CHIP	10K 5% 1/10W
R2550	1-208-699-11	METAL CHIP	4.7K 0.5% 1/16W	R2662	1-216-864-11	SHORT CHIP	0
R2554	1-216-841-11	METAL CHIP	47K 5% 1/10W	R2663	1-216-864-11	SHORT CHIP	0
R2555	1-208-935-11	METAL CHIP	100K 0.5% 1/16W	R2664	1-216-864-11	SHORT CHIP	0
R2556	1-208-699-11	METAL CHIP	4.7K 0.5% 1/16W	R2665	1-216-864-11	SHORT CHIP	0
R2557	1-208-711-11	METAL CHIP	15K 0.5% 1/16W	R2801	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R2559	1-208-711-11	METAL CHIP	15K 0.5% 1/16W	R2802	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R2561	1-218-871-11	METAL CHIP	10K 0.5% 1/10W	R2803	1-218-873-11	METAL CHIP	12K 0.5% 1/10W
R2562	1-218-869-11	METAL CHIP	8.2K 0.5% 1/10W	R2804	1-218-875-11	METAL CHIP	15K 0.5% 1/10W
R2563	1-218-869-11	METAL CHIP	8.2K 0.5% 1/10W	R2805	1-216-841-11	METAL CHIP	47K 5% 1/10W
R2564	1-218-871-11	METAL CHIP	10K 0.5% 1/10W	R2806	1-216-841-11	METAL CHIP	47K 5% 1/10W
R2566	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W	R2814	1-216-833-11	METAL CHIP	10K 5% 1/10W
R2567	1-216-833-11	METAL CHIP	10K 5% 1/10W	R2815	1-218-873-11	METAL CHIP	12K 0.5% 1/10W
R2587	1-216-857-11	METAL CHIP	1M 5% 1/10W	R2820	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
R2588	1-216-837-11	METAL CHIP	22K 5% 1/10W	R2821	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W
R2593	1-216-841-11	METAL CHIP	47K 5% 1/10W	R2822	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W
R2601	1-216-845-11	METAL CHIP	100K 5% 1/10W	R2823	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
R2603	1-218-865-11	METAL CHIP	5.6K 0.5% 1/10W	R2826	1-216-845-11	METAL CHIP	100K 5% 1/10W
R2611	1-216-841-11	METAL CHIP	47K 5% 1/10W	R2827	1-216-845-11	METAL CHIP	100K 5% 1/10W
R2612	1-216-864-11	SHORT CHIP	0	R2828	1-216-844-11	METAL CHIP	82K 5% 1/10W
R2613	1-218-887-11	METAL CHIP	47K 0.5% 1/10W	R2829	1-216-827-11	METAL CHIP	3.3K 5% 1/10W
R2614	1-218-855-11	METAL CHIP	2.2K 0.5% 1/10W	R2830	1-216-827-11	METAL CHIP	3.3K 5% 1/10W
R2615	1-218-887-11	METAL CHIP	47K 0.5% 1/10W	R2831	1-216-844-11	METAL CHIP	82K 5% 1/10W
R2616	1-218-855-11	METAL CHIP	2.2K 0.5% 1/10W	R2832	1-218-887-11	METAL CHIP	47K 0.5% 1/10W
R2617	1-216-833-11	METAL CHIP	10K 5% 1/10W	R2833	1-218-887-11	METAL CHIP	47K 0.5% 1/10W
R2620	1-216-864-11	SHORT CHIP	0	R2834	1-218-855-11	METAL CHIP	2.2K 0.5% 1/10W
R2622	1-216-864-11	SHORT CHIP	0	R2835	1-218-855-11	METAL CHIP	2.2K 0.5% 1/10W
R2624	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W	R2837	1-216-857-11	METAL CHIP	1M 5% 1/10W
R2625	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W	R2839	1-216-845-11	METAL CHIP	100K 5% 1/10W
R2626	1-218-875-11	METAL CHIP	15K 0.5% 1/10W	R2840	1-216-864-11	SHORT CHIP	0
R2627	1-218-897-11	METAL CHIP	120K 0.5% 1/10W	R2841	1-216-864-11	SHORT CHIP	0
R2628	1-218-885-11	METAL CHIP	39K 0.5% 1/10W	R2843	1-216-845-11	METAL CHIP	100K 5% 1/10W
R2629	1-218-875-11	METAL CHIP	15K 0.5% 1/10W	R2844	1-216-813-11	METAL CHIP	220 5% 1/10W
R2630	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W	R2846	1-216-813-11	METAL CHIP	220 5% 1/10W
R2631	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W	R2851	1-216-864-11	SHORT CHIP	0
R2632	1-218-897-11	METAL CHIP	120K 0.5% 1/10W	R2852	1-216-864-11	SHORT CHIP	0
R2633	1-218-897-11	METAL CHIP	120K 0.5% 1/10W	R2855	1-216-864-11	SHORT CHIP	0
R2636	1-216-296-11	SHORT CHIP	0	R2856	1-216-864-11	SHORT CHIP	0
R2637	1-216-296-11	SHORT CHIP	0	R2858	1-216-857-11	METAL CHIP	1M 5% 1/10W
R2642	1-216-845-11	METAL CHIP	100K 5% 1/10W	R2859	1-216-833-11	METAL CHIP	10K 5% 1/10W
R2643	1-216-845-11	METAL CHIP	100K 5% 1/10W	R2863	1-216-833-11	METAL CHIP	10K 5% 1/10W
R2644	1-216-845-11	METAL CHIP	100K 5% 1/10W	R2872	1-216-821-11	METAL CHIP	1K 5% 1/10W
R2645	1-216-845-11	METAL CHIP	100K 5% 1/10W	R2873	1-216-849-11	METAL CHIP	220K 5% 1/10W
R2646	1-216-845-11	METAL CHIP	100K 5% 1/10W	R2876	1-216-864-11	SHORT CHIP	0
R2647	1-216-845-11	METAL CHIP	100K 5% 1/10W	R2879	1-216-864-11	SHORT CHIP	0
R2652	1-216-833-11	METAL CHIP	10K 5% 1/10W	R2882	1-216-864-11	SHORT CHIP	0
R2653	1-216-845-11	METAL CHIP	100K 5% 1/10W	R2883	1-216-864-11	SHORT CHIP	0
R2654	1-216-845-11	METAL CHIP	100K 5% 1/10W	R2884	1-216-864-11	SHORT CHIP	0
R2655	1-216-864-11	SHORT CHIP	0	R2885	1-216-864-11	SHORT CHIP	0
R2656	1-216-841-11	METAL CHIP	47K 5% 1/10W	R9001	1-216-864-11	SHORT CHIP	0

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R9002	1-216-864-11	SHORT CHIP	0			R9058	1-216-809-11	METAL CHIP	100	5%	1/10W
R9005	1-218-285-11	METAL CHIP	75	5%	1/10W	R9059	1-216-809-11	METAL CHIP	100	5%	1/10W
R9006	1-218-285-11	METAL CHIP	75	5%	1/10W	R9060	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R9007	1-216-815-11	METAL CHIP	330	5%	1/10W	R9061	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R9008	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9062	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9009	1-216-815-11	METAL CHIP	330	5%	1/10W	R9063	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9010	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9064	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9011	1-216-815-11	METAL CHIP	330	5%	1/10W	R9065	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9012	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9066	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9013	1-216-815-11	METAL CHIP	330	5%	1/10W	R9067	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9014	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9068	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9015	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9069	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9017	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9070	1-218-873-11	METAL CHIP	12K	0.5%	1/10W
R9018	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9071	1-218-873-11	METAL CHIP	12K	0.5%	1/10W
R9019	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9072	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9020	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9073	1-216-809-11	METAL CHIP	100	5%	1/10W
R9021	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9074	1-216-819-11	METAL CHIP	680	5%	1/10W
R9023	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9075	1-216-819-11	METAL CHIP	680	5%	1/10W
R9024	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9086	1-216-864-11	SHORT CHIP	0		
R9025	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9088	1-216-849-11	METAL CHIP	220K	5%	1/10W
R9026	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9089	1-216-849-11	METAL CHIP	220K	5%	1/10W
R9027	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9095	1-216-864-11	SHORT CHIP	0		
R9028	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9096	1-216-864-11	SHORT CHIP	0		
R9029	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9104	1-216-864-11	SHORT CHIP	0		
R9030	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9105	1-216-864-11	SHORT CHIP	0		
R9031	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9106	1-216-864-11	SHORT CHIP	0		
R9032	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9107	1-216-864-11	SHORT CHIP	0		
R9033	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9109	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9034	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9110	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9035	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9111	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9036	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R9112	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9037	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9113	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9038	1-216-813-11	METAL CHIP	220	5%	1/10W	R9114	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9039	1-216-864-11	SHORT CHIP	0			R9115	1-216-801-11	METAL CHIP	22	5%	1/10W
R9040	1-216-813-11	METAL CHIP	220	5%	1/10W	R9116	1-216-801-11	METAL CHIP	22	5%	1/10W
R9041	1-216-864-11	SHORT CHIP	0			R9117	1-216-801-11	METAL CHIP	22	5%	1/10W
R9042	1-216-809-11	METAL CHIP	100	5%	1/10W	R9122	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9044	1-216-809-11	METAL CHIP	100	5%	1/10W	R9123	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9045	1-216-809-11	METAL CHIP	100	5%	1/10W	R9124	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9046	1-216-817-11	METAL CHIP	470	5%	1/10W	R9125	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9047	1-216-813-11	METAL CHIP	220	5%	1/10W	R9126	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9048	1-216-864-11	SHORT CHIP	0			R9127	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9049	1-216-813-11	METAL CHIP	220	5%	1/10W	R9128	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9050	1-216-864-11	SHORT CHIP	0			R9129	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9051	1-216-809-11	METAL CHIP	100	5%	1/10W	R9130	1-216-815-11	METAL CHIP	330	5%	1/10W
R9053	1-216-809-11	METAL CHIP	100	5%	1/10W	R9131	1-216-815-11	METAL CHIP	330	5%	1/10W
R9054	1-216-809-11	METAL CHIP	100	5%	1/10W	R9135	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9055	1-216-809-11	METAL CHIP	100	5%	1/10W	R9136	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9056	1-216-817-11	METAL CHIP	470	5%	1/10W	R9137	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9057	1-216-809-11	METAL CHIP	100	5%	1/10W	R9138	1-218-831-11	METAL CHIP	220	0.5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK							
R9139	1-218-831-11	METAL CHIP	220	0.5%	1/10W	VD9018	8-719-070-63	DIODE PDZ10B-115								
R9140	1-218-831-11	METAL CHIP	220	0.5%	1/10W	VD9025	1-802-082-11	VARISTOR (SMD)								
R9141	1-218-831-11	METAL CHIP	220	0.5%	1/10W	VD9026	1-802-082-11	VARISTOR (SMD)								
R9142	1-218-831-11	METAL CHIP	220	0.5%	1/10W	< CRYSTAL >										
R9143	1-218-831-11	METAL CHIP	220	0.5%	1/10W	X2500	1-795-612-11	VIBRATOR, CRYSTAL								
*A-1196-584-A H1E Board, Complete																
< CONNECTOR >																
R9144	1-218-831-11	METAL CHIP	220	0.5%	1/10W	CN1101	*1-819-445-11	HEADER ASSEMBLY FOR PWB 3P								
R9145	1-218-831-11	METAL CHIP	220	0.5%	1/10W	< RESISTOR >										
R9146	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R1101	1-218-848-11	METAL CHIP	1.1K	0.5%	1/10W					
R9147	1-218-831-11	METAL CHIP	220	0.5%	1/10W	R1102	1-218-841-11	METAL CHIP	560	0.5%	1/10W					
R9150	1-216-864-11	SHORT CHIP	0								R1103	1-218-835-11	METAL CHIP	330	0.5%	1/10W
R9151	1-216-864-11	SHORT CHIP	0								R1104	1-218-831-11	METAL CHIP	220	0.5%	1/10W
R9152	1-216-864-11	SHORT CHIP	0								R1105	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R9153	1-216-864-11	SHORT CHIP	0								< SWITCH >					
R9154	1-216-864-11	SHORT CHIP	0								S1101	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
R9155	1-216-864-11	SHORT CHIP	0								S1102	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
R9156	1-216-864-11	SHORT CHIP	0								S1103	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
R9157	1-216-864-11	SHORT CHIP	0								S1104	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
R9158	1-216-864-11	SHORT CHIP	0								S1105	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
R9159	1-216-864-11	SHORT CHIP	0								S1106	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
R9160	1-216-864-11	SHORT CHIP	0								S1107	1-572-595-31	SWITCH, TACTIL (REFLOW TYPE)			
R9161	1-216-864-11	SHORT CHIP	0								*A-1196-585-A H2E Board, Complete (KDL-40W2000)					
R9501	1-216-864-11	SHORT CHIP	0								< CAPACITOR >					
R9502	1-216-864-11	SHORT CHIP	0								C1201	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R9506	1-216-864-11	SHORT CHIP	0								C1202	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
R9515	1-216-864-11	SHORT CHIP	0								C1203	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
R9516	1-216-864-11	SHORT CHIP	0								C1204	1-127-573-11	CERAMIC CHIP 1UF	10%	16V	
R9517	1-216-864-11	SHORT CHIP	0								C1205	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%	10V	
R9518	1-216-864-11	SHORT CHIP	0								C1206	1-125-889-91	CERAMIC CHIP 2.2UF	10%	10V	
R9519	1-216-864-11	SHORT CHIP	0								C1207	1-125-889-91	CERAMIC CHIP 2.2UF	10%	10V	
R9520	1-216-864-11	SHORT CHIP	0								C1208	1-125-889-91	CERAMIC CHIP 2.2UF	10%	10V	
R9521	1-216-864-11	SHORT CHIP	0								C1209	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
R9522	1-216-864-11	SHORT CHIP	0								C1210	1-164-227-11	CERAMIC CHIP 0.022UF	10.00%	25V	
R9523	1-216-864-11	SHORT CHIP	0								C1211	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
R9524	1-216-864-11	SHORT CHIP	0								C1212	1-164-227-11	CERAMIC CHIP 0.022UF	10.00%	25V	
R9525	1-216-864-11	SHORT CHIP	0								C1215	1-115-416-11	CERAMIC CHIP 0.001UF	5.00%	25V	
R9526	1-216-864-11	SHORT CHIP	0								< CONNECTOR >					
R9527	1-216-864-11	SHORT CHIP	0								CN1201	1-820-192-11	HEADER ASSEMBLY (PRINT PWB)15P			
R9528	1-216-864-11	SHORT CHIP	0													
R9529	1-216-864-11	SHORT CHIP	0													
R9530	1-216-864-11	SHORT CHIP	0													
R9546	1-216-809-11	METAL CHIP	100	5%	1/10W											
R9547	1-216-809-11	METAL CHIP	100	5%	1/10W											
< VARISTOR >																
VD9013	8-719-070-63	DIODE PDZ10B-115														
VD9014	8-719-070-63	DIODE PDZ10B-115														
VD9015	8-719-070-63	DIODE PDZ10B-115														
VD9016	8-719-070-63	DIODE PDZ10B-115														
VD9017	8-719-070-63	DIODE PDZ10B-115														

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< DIODE >				< CONNECTOR >			
D1201	8-719-070-63	DIODE PDZ10B-115		CN1301	1-820-187-11	HEADER ASSEMBLY (PRINT PWB) 10P	
D1202	8-719-070-63	DIODE PDZ10B-115		< DIODE >			
D1203	8-719-070-63	DIODE PDZ10B-115		D1302	8-719-085-26	DIODE CL-165HR/SYG-D-T	
D1204	8-719-070-63	DIODE PDZ10B-115		D1305	8-719-085-26	DIODE CL-165HR/SYG-D-T	
D1205	8-719-070-63	DIODE PDZ10B-115		D1308	6-500-817-01	DIODE (LED) SML-512UWT86	
D1206	8-719-070-63	DIODE PDZ10B-115		< IC >			
< SOCKET >				IC1301	6-600-502-01	HIC GP1UE26RK0VF	
J1201	1-780-368-11	S TERMINAL BLOCK (RIGHT ANGLE)		IC1302	6-600-447-01	IC TPS853(SONY)	
J1202	1-815-325-11	JACK		< TRANSISTOR >			
< RESISTOR >				Q1301	8-729-028-96	TRANSISTOR DTC114EUA-T106	
R1202	1-216-864-11	SHORT CHIP	0	Q1302	8-729-028-96	TRANSISTOR DTC114EUA-T106	
R1205	1-216-821-11	METAL CHIP	1K 5% 1/10W	Q1303	8-729-028-96	TRANSISTOR DTC114EUA-T106	
R1206	1-216-821-11	METAL CHIP	1K 5% 1/10W	Q1304	8-729-028-96	TRANSISTOR DTC114EUA-T106	
R1207	1-218-831-11	METAL CHIP	220 0.5% 1/10W	Q1305	8-729-028-96	TRANSISTOR DTC114EUA-T106	
R1208	1-218-831-11	METAL CHIP	220 0.5% 1/10W	Q1306	8-729-602-36	TRANSISTOR 2SA1602-F	
R1209	1-218-285-11	METAL CHIP	75 5% 1/10W	< RESISTOR >			
R1210	1-218-831-11	METAL CHIP	220 0.5% 1/10W	R1301	1-216-815-11	METAL CHIP 330 5% 1/10W	
R1211	1-218-831-11	METAL CHIP	220 0.5% 1/10W	R1302	1-216-811-11	METAL CHIP 150 5% 1/10W	
R1212	1-216-797-11	METAL CHIP	10 5% 1/10W	R1303	1-216-815-11	METAL CHIP 330 5% 1/10W	
R1213	1-216-821-11	METAL CHIP	1K 5% 1/10W	R1304	1-216-811-11	METAL CHIP 150 5% 1/10W	
R1214	1-216-821-11	METAL CHIP	1K 5% 1/10W	R1305	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R1215	1-216-809-11	METAL CHIP	100 5% 1/10W	R1306	1-216-817-11	METAL CHIP 470 5% 1/10W	
R1216	1-216-809-11	METAL CHIP	100 5% 1/10W	R1307	1-216-805-11	METAL CHIP 47 5% 1/10W	
R1217	1-216-821-11	METAL CHIP	1K 5% 1/10W	R1309	1-216-839-11	METAL CHIP 33K 5% 1/10W	
R1218	1-216-821-11	METAL CHIP	1K 5% 1/10W	R1310	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R1219	1-216-809-11	METAL CHIP	100 5% 1/10W	R1311	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R1220	1-216-797-11	METAL CHIP	10 5% 1/10W	R1313	1-216-849-11	METAL CHIP 220K 5% 1/10W	
R1222	1-216-853-11	METAL CHIP	470K 5% 1/10W	R1314	1-216-849-11	METAL CHIP 220K 5% 1/10W	
R1223	1-216-853-11	METAL CHIP	470K 5% 1/10W	R1315	1-216-864-11	SHORT CHIP 0	
R1224	1-218-831-11	METAL CHIP	220 0.5% 1/10W	R1316	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	
R1225	1-218-831-11	METAL CHIP	220 0.5% 1/10W				
< VARISTOR >							
VD1201	1-802-082-11	VARISTOR (SMD)					
VD1202	1-802-082-11	VARISTOR (SMD)					
VD1203	1-802-082-11	VARISTOR (SMD)					
< CAPACITOR >							
C1302	1-162-960-11	CERAMIC CHIP 220PF	10.00% 50V				
C1303	1-119-667-11	CERAMIC CHIP 22UF	10V				
C1305	*1-165-908-11	CERAMIC CHIP 1UF	10% 10V				
C1307	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V				
C1308	1-126-205-11	ELECT CHIP 47UF	20.00% 6.3V				

***A-1196-586-A H3E Board, Complete**

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
MISCELLANEOUS							
	△ 1-830-611-11	POWER-SUPPLY CORD (AEP)		*2-697-124-11	INSTRUCTION MANUAL (ENGLISH) (KDL-40/46W2000UK)		
	△ 1-830-609-11	AC POWER-SUPPLY CORD SET (UK)		*2-697-124-21	INSTRUCTION MANUAL (ENGLISH/GERMAN/DUTCH/ PORTUGUESE/NORWEGIAN) (KDL-40/46W2000AEP)		
	1-826-532-11	LOUDSPEAKER (5.5X15CM) (KDL-40W2000)		*2-697-124-31	INSTRUCTION MANUAL (FRENCH/ITALIAN/SPANISH/ FINNISH) (KDL-40/46W2000AEP)		
	1-826-435-11	LOUDSPEAKER (13X7CM) (KDL-46W2000)					
	1-833-275-12	LEAD WIRE WITH CONNECTOR(LVDS) (KDL-40W2000)		*2-697-124-41	INSTRUCTION MANUAL (SWEDISH/DANISH/GREEK/ RUSSIAN/POLISH) (KDL-40/46W2000AEP)		
	1-833-276-12	LEAD WIRE WITH CONNECTOR(LVDS) (KDL-46W2000)					
	△ 1-819-729-14	INLET, AC (WITH NOISE FILTER)		REMOTE COMMANDER			
	1-802-184-11	LCD PANEL (40INCH FHD TFT) (KDL-40W2000)					
	1-802-183-11	LCD PANEL (46INCH FHD TFT) (KDL-46W2000)		1-479-978-11 REMOTE COMMANDER (RM-ED008)			
ACCESSORIES AND CONNECTORS							
	*1-910-025-32	CONNECTOR ASSY 6P (CN3904-CN-2301(1))					
	*1-910-025-33	CONNECTOR ASSY 7P (CN3401-CN2302(1))					
	*1-910-025-35	CONNECTOR ASSY 30P (CN3600-CN3901(1))					
	*1-910-025-38	CONNECTOR ASSY 1P (CN1201-PANEL(1)) (KDL-40W2000)					
	*1-910-025-39	CONNECTOR ASSY (FFC) 20P (CN4700-CN3400(1))					
	*1-910-025-63	FFC CONNECTOR ASSY 49P (CN1001-CN9501(1))					
	*1-910-025-82	CONNECTOR ASSY 14P (CN6200-CN2303(1), CN2303-CN4002(0)) (KDL-40W2000)					
	*1-910-025-85	CONNECTOR ASSY 15P (CN1201-CN9001(1)) (KDL-40W2000)					
	*1-910-025-88	CONNECTOR ASSY 14P (CN6200-CN2303(1), CN2303-CN4002(0)) (KDL-46W2000)					
	*1-910-025-90	CONNECTOR ASSY 10P (INVERTER L-CN6204(1)) (KDL-46W2000)					
	*1-910-032-02	CONNECTOR ASSY 3P (CN1101-CN4007(1)) (KDL-40W2000)					
	*1-910-032-10	CONNECTOR ASSY 9P (CN9502-CN7008(1))					
	*1-910-032-11	CONNECTOR ASSY 3P (CN1101-CN4007(1)) (KDL-46W2000)					
	*1-910-032-15	CONNECTOR ASSY 1P (VESA ARM-CN6206(1))					
	*1-910-032-16	CONNECTOR ASSY 1P (VESA ARM-CN6207(1))					
	*1-910-032-17	CONNECTOR ASSY 1P (VESA ARM-CN6000(1))					
	*1-910-032-20	CONNECTOR ASSY 10P (CN1301-CN4008(1)) (KDL-40W2000)					
	*1-910-032-21	CONNECTOR ASSY 12P (INVERTER-CN6202(1), INVERTER-CN6217(0), CN6217-CN7009(0)) (KDL-40W2000)					
	*1-910-032-22	SP CONNECTOR ASSY 4P (CN2500-SP(1)) (KDL-40W2000)					
	*1-910-032-23	CONNECTOR ASSY 10P (CN1301-CN4008(1))					
	*1-910-032-25	SP CONNECTOR ASSY (CN2500-SP(1))					
	*1-910-032-27	CONNECTOR ASSY 10P (CN4300-CN3903(1))					
	*1-910-032-28	CONNECTOR ASSY 12P (CN3802-CN4301(1))					
	*1-910-032-89	CONNECTOR ASSY 12P (INVERTER-CN6202(1), INVERTER-CN6217(0), CN6217-CN7009(0)) (KDL-46W2000)					
	*1-910-032-95	CONNECTOR ASSY 15P (CN201-CN9001(1)) (KDL-46W2000)					

