


SECTION 5 EXPLODED VIEWS

NOTE :

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

5-1. CHASSIS

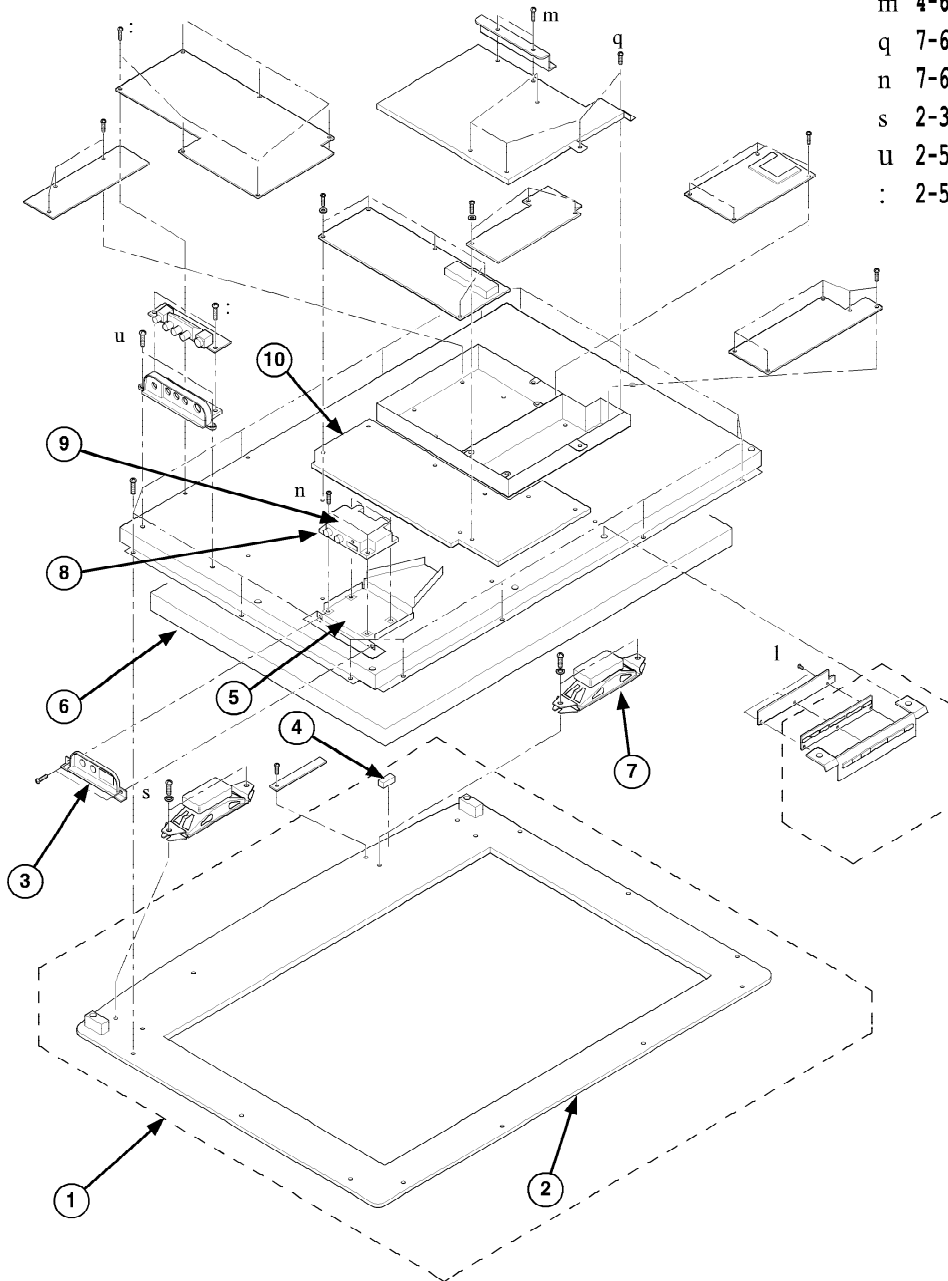


l	4-908-792-41	SCREW (B2)
m	4-635-966-01	SCREW (HEX)
q	7-685-871-01	SCREW +BVTT 3X6 (S)
n	7-685-873-09	SCREW +BVTT 3X10 (S)
s	2-320-333-01	SCREW +B M4X6
u	2-596-649-01	+KTT 3X10 (S TYPE)
:	2-580-642-01	SCREW +BVTP2 4X25

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
1	X-2102-727-1	BEZEL ASSY (KDL-S23A11E)		6	1-805-888-11	LCD PANEL (23 INCH WXGA+TFT) (KDL-S23A11E)	
	X-2102-726-1	BEZEL ASSY (KDL-S26A11E)			A-1148-322-A	PANEL COMPL 26 (KDL-S26A11E)	
	X-2102-720-1	BEZEL ASSY (KDL-S32A11E)			A-1128-519-A	PANEL COMPL 32 (KDL-S32A11E)	
2	2-656-962-01	WINDOW, 23 FRONT (KDL-S23A11E)		7	1-826-062-11	LOUDSPEAKER (4X10CM) (KDL-S23A11E)	
	2-515-723-51	WINDOW, 26 FRONT (KDL-S26A11E)			1-826-063-21	LOUDSPEAKER (4.2X15CM) (KDL-S26A11E)	
	2-656-429-11	WINDOW, 32 FRONT (KDL-S32A11E)			1-826-042-21	LOUDSPEAKER (5X15CM) (KDL-S32A11E)	
3	*X-2055-717-1	BRACKET SIDE ASSY (AD)		8	*A-1115-078-D	P BOARD, COMPLETE (KDL-S26A11E/KDL-S32A11E)	
4	*2-515-684-01	GUIDE, LIGHT SENSOR		9	*2-595-154-02	SHIELD (UPPER A), HDMI (KDL-S26A11E)	
5	*2-631-285-02	BRACKET, HDMI (26) (KDL-S26A11E)		10	*2-629-956-03	A2E BRACKET (KDL-S26A11E/KDL-S32A11E)	

(Continued)


5-1. CHASSIS (Continued)

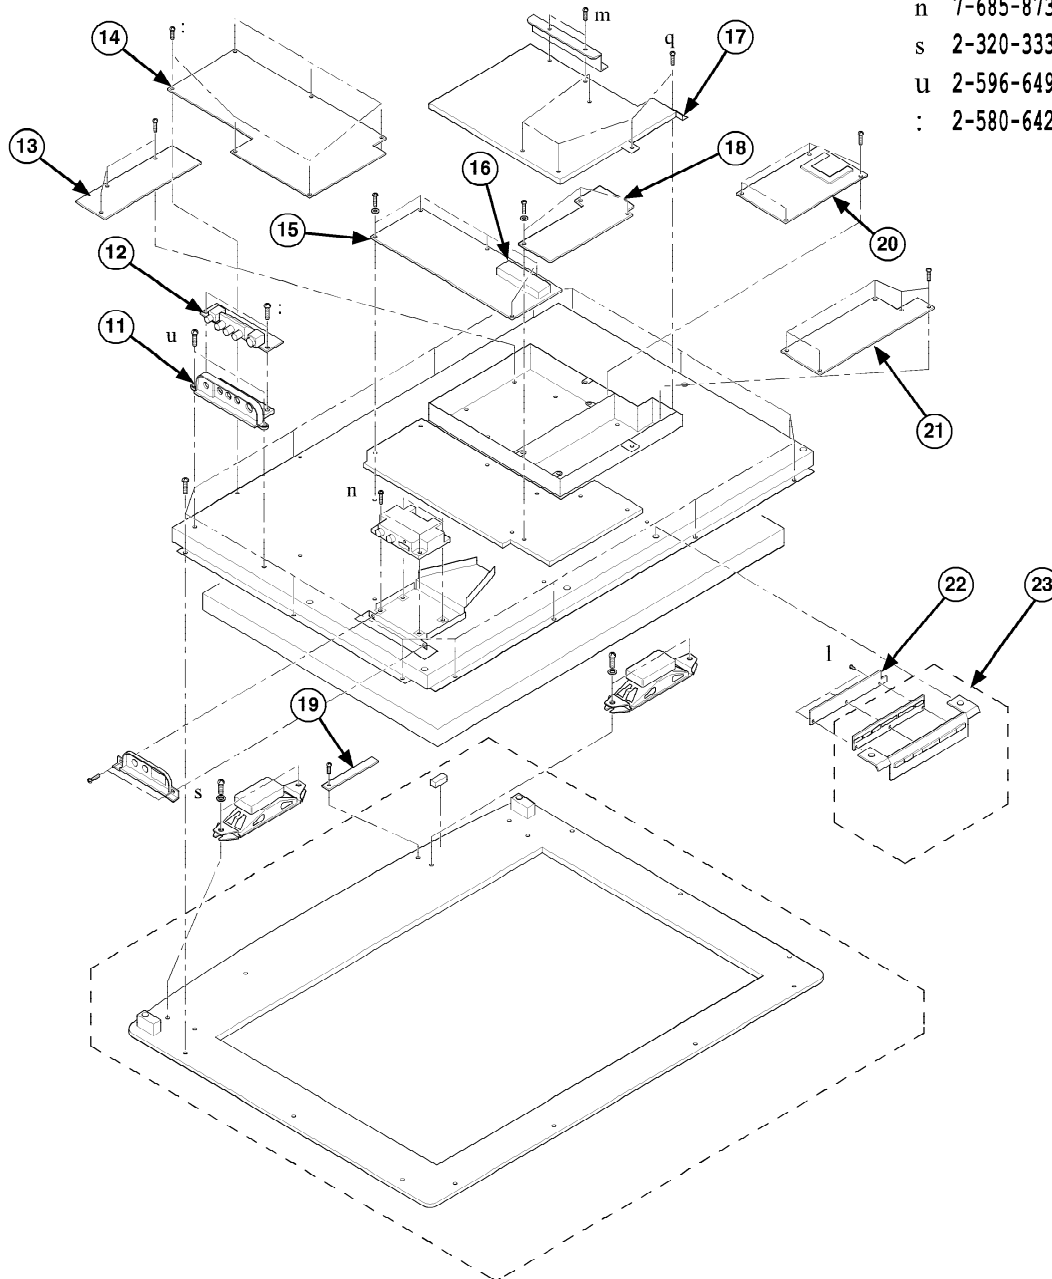

l	4-908-792-41	SCREW (B2)
m	4-635-966-01	SCREW (HEX)
q	7-685-871-01	SCREW +BVT 3X6 (S)
n	7-685-873-09	SCREW +BVT 3X10 (S)
s	2-320-333-01	SCREW +B M4X6
u	2-596-649-01	+KTT 3X10 (S TYPE)
:	2-580-642-01	SCREW +BVT2 4X25

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
11	*2-515-692-12	HOLDER SIDE JACK		18	*A-1128-515-B	GE1 BOARD, COMPLETE (KDL-S23A11E)	
12	*A-1092-253-A	H2 BOARD, COMPLETE			*A-1128-516-B	GE2 BOARD, COMPLETE (KDL-S26A11E/S32A11E)	
13	*A-1139-853-A	N1 BOARD, COMPLETE		19	*A-1092-254-A	H3 BOARD, COMPLETE	
14	*A-1128-513-C	G1 BOARD, COMPLETE (KDL-S23A11E)		20	*A-1142-596-B	N BOARD, COMPLETE	
	*A-1168-958-A	G2 BOARD, COMPLETE (KDL-S26A11E/KDL-S32A11E)		21	*A-1128-517-L	BE BOARD, COMPLETE	
15	*A-1142-615-A	A2E BOARD, COMPLETE (KDL-S23A11E)		22	*A-1128-518-B	H1E BOARD, COMPLETE	
	*A-1149-540-A	A2E BOARD, COMPLETE (KDL-S26A11E/KDL-S32A11E)		23	X-2059-758-1	ASSY, BUTTON MULTI (23A) (KDL-S23A11E)	
16	8-597-993-00	TUNER FSS BTF-EF4122			X-2059-423-1	ASSY, BUTTON MULTI (26A) (KDL-S26A11E)	
17	*2-589-406-03	S1 SHIELD MAIN (A)			X-2059-424-1	ASSY, BUTTON MULTI (32A) (KDL-S32A11E)	

5-2. REAR COVER AND STAND

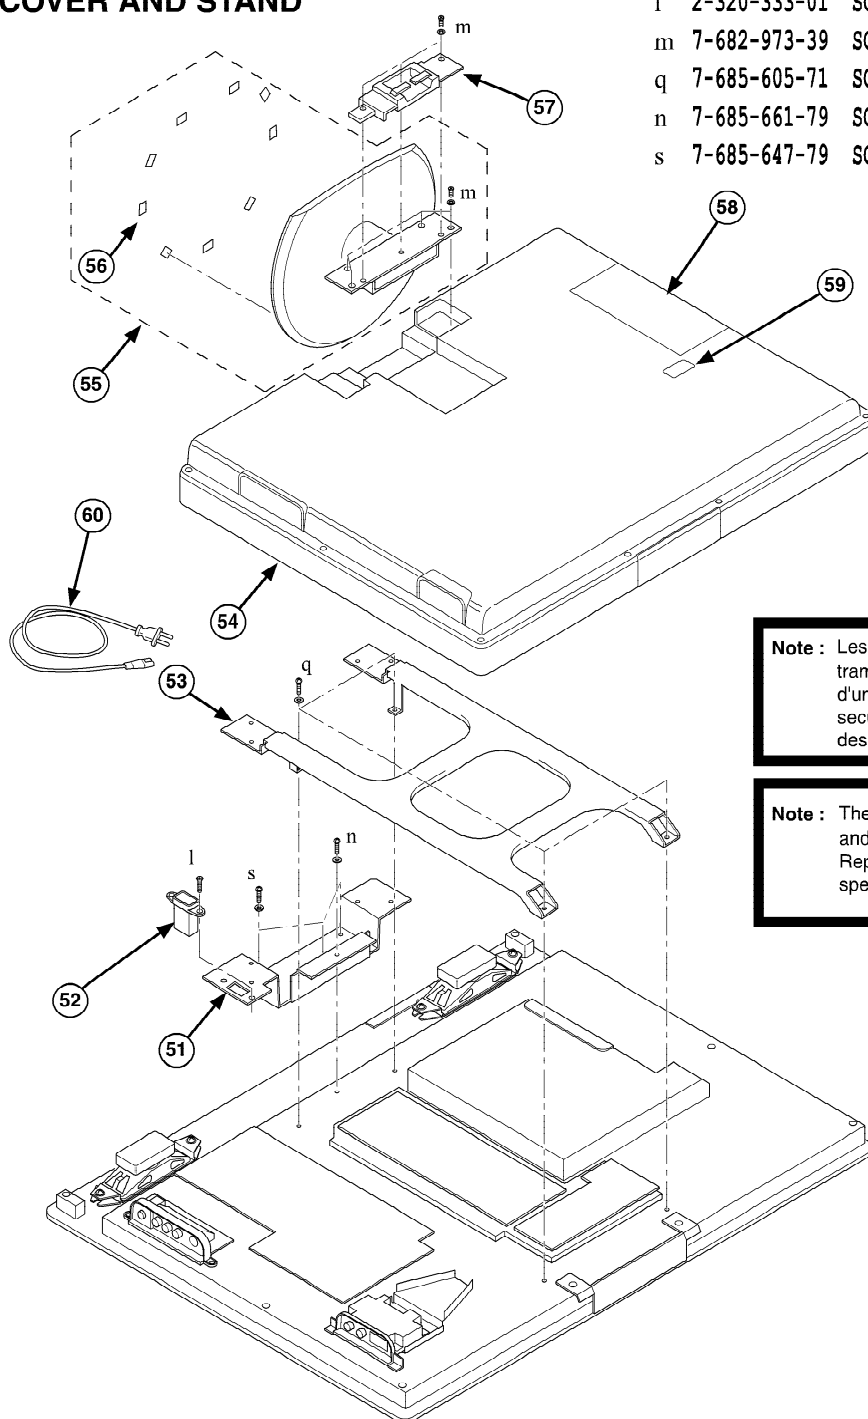

- l 2-320-333-01 SCREW +B M4X6
- m 7-682-973-39 SCREW +PSW 5X14
- q 7-685-605-71 SCREW +BVTP 4X25 TYPE2 IT-3
- n 7-685-661-79 SCREW +BVTP 4X12 TYPE2 N-S
- s 7-685-647-79 SCREW +BVTP 3X10 TYPE2 IT-3

Note : Les composants indentifiés par une trame et par une marque Δ sont d'une importance critique pour la securite. Ne les remplacer que par des pieces du numero specifie.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
51	*2-515-763-01	BRACKET, AC (KDL-S26A11E)		56	4-100-951-11	FOOT, STAND	
52	△ 1-819-594-11	INLET, AC (WITH NOISE FILTER)		57	2-515-688-03	COVER, HINGE (23) (KDL-S23A11E)	
53	2-515-734-01	BRACKET, VESA (26) (KDL-S26A11E)			2-549-469-11	COVER, HINGE (26) (KDL-S26A11E)	
	X-2055-176-1	VESA BRACKET ASSY (26) (KDL-S26A11E)			2-549-470-11	COVER, HINGE (32) (KDL-S32A11E)	
	2-515-735-01	BRACKET, VESA (32) (KDL-S32A11E)		58	X-2067-338-1	JACK COVER (SA) ASSY (KDL-S23A11E/S26A11E)	
54	X-2059-466-1	CABINET REAR ASSY (23A) (KDL-S23A11E)			X-2067-337-1	JACK COVER (LA) ASSY (KDL-S32A11E)	
	X-2059-974-1	CABINET REAR ASSY (26A) (KDL-S26A11E)		59	X-2055-564-2	ECS COVER ASSY	
	X-2055-922-3	CABINET REAR ASSY (32A) (KDL-S32A11E)		60	△ 1-830-611-21	POWER-SUPPLY CORD	
55	X-2025-222-5	STAND ASSY (S) (KDL-S23A11E)	56				
	X-2025-223-4	STAND ASSY (L) (KDL-S26A11E)	56				
	X-2025-223-4	STAND ASSY (L) (KDL-S32A11E)	56				

SECTION 6 ELECTRICAL PARTS LIST

PARTS LISTING TABLE OF CONTENTS

	Page
H2 BOARD COMPLETE Parts List :	74
H3 BOARD COMPLETE Parts List :	74
A2E BOARD COMMON Parts List : Parts common to all models listed in this manual	75
Model Parts that belong only to the model specified	
KDL-S23A11E	85
KDL-S26A11E/KDL-S32A11E	86
H1E BOARD COMPLETE Parts List :	87
G2 BOARD COMPLETE Parts List :	
KDL-S26A11E/KDL-S32A11E	87
N1 BOARD COMPLETE Parts List :	90
BE BOARD COMPLETE Parts List :	91
N BOARD COMPLETE Parts List :	98
GE2 BOARD COMPLETE Parts List :	
KDL-S26A11E/KDL-S32A11E	105
G1 BOARD COMPLETE Parts List :	
KDL-S23A11E	106
GE1 BOARD COMPLETE Parts List :	
KDL-S23A11E	109
MISCELLANEOUS :	111
ACCESSORIES AND CONNECTORS :	111
REMOTE COMMANDER :	111

Note: The P Board (KDL-S26A11E/KDL-S32A11E only) Schematic Diagram, Printed Wiring Board and Parts List are not indicated in this manual as the PWB is regarded as a non service item for exchange only.

Note : Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
Parts indicated (XX) on the Schematic Diagram are not used in this model and therefore do not appear in the Parts List.

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
*A-1092-253-A H2 Board, Complete						R9851	1-216-797-11	METAL CHIP	10	5%	1/10W
< CAPACITOR >						R9852	1-216-797-11	METAL CHIP	10	5%	1/10W
C9041	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%	10V		< VARISTOR >					
C9048	1-164-505-11	CERAMIC CHIP 2.2UF		16V		VD9022	1-803-974-21	VARISTOR, CHIP		(1608)	
C9049	1-164-505-11	CERAMIC CHIP 2.2UF		16V		VD9023	1-803-974-21	VARISTOR, CHIP		(1608)	
C9050	1-164-505-11	CERAMIC CHIP 2.2UF		16V		VD9024	1-803-974-21	VARISTOR, CHIP		(1608)	
C9077	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V		VD9058	1-803-974-21	VARISTOR, CHIP		(1608)	
C9078	1-165-908-11	CERAMIC CHIP 1UF	10%	10V		VD9059	1-803-974-21	VARISTOR, CHIP		(1608)	
C9079	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V		VD9851	1-803-974-21	VARISTOR, CHIP		(1608)	
C9080	1-165-908-11	CERAMIC CHIP 1UF	10%	10V		VD9852	1-801-925-21	VARISTOR, CHIP		(1608)	
C9081	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V		VD9853	1-801-925-21	VARISTOR, CHIP		(1608)	
C9082	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V		*A-1092-254-A H3 Board, Complete					
C9851	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V		< CAPACITOR >					
C9852	1-164-227-11	CERAMIC CHIP 0.022UF	10.00%	25V		C9902	1-126-205-11	ELECT CHIP 47UF	20.00%	6.3V	
C9853	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V		C9903	1-124-779-00	ELECT CHIP 10UF	20.00%	16V	
C9854	1-164-227-11	CERAMIC CHIP 0.022UF	10.00%	25V		C9904	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
< CONNECTOR >						C9905	1-119-667-11	CERAMIC CHIP 22UF		10V	
CN9851	1-573-290-21	PIN, CONNECTOR (1.5MM) (SMD) 4P				C9907	1-107-826-11	CERAMIC CHIP 0.1UF	10.00%	16V	
CN9855	1-766-383-11	PIN, CONNECTOR (1.5MM) (SMD) 12P				< CONNECTOR >					
< DIODE >						CN9901	1-784-254-11	CONNECTOR 10P			
D9035	8-719-977-28	DIODE DTZ10B				< DIODE >					
D9036	8-719-977-28	DIODE DTZ10B				D9903	6-500-861-01	DIODE SML-020MVT-T86			
D9037	8-719-977-28	DIODE DTZ10B				D9906	6-500-861-01	DIODE SML-020MVT-T86			
D9038	8-719-977-28	DIODE DTZ10B				D9909	8-719-036-94	DIODE RD5.6SB-T1			
D9058	8-719-977-28	DIODE DTZ10B				D9912	8-719-064-07	DIODE SML-310LTT86			
D9059	8-719-977-28	DIODE DTZ10B				< IC >					
< SOCKET >						IC9901	6-600-271-01	IC RPM7140-H8			
J9006	1-780-244-11	TERMINAL BLOCK, S(RIGHT ANGLE)				IC9902	6-600-418-01	IC TPS851(A.SONY)			
J9852	1-568-267-11	JACK				< TRANSISTOR >					
< RESISTOR >						Q9902	8-729-907-00	TRANSISTOR DTC114EU			
R9103	1-216-811-11	METAL CHIP 150	5%	1/10W		Q9903	8-729-907-00	TRANSISTOR DTC114EU			
R9104	1-218-285-11	METAL CHIP 75	5%	1/10W		Q9904	8-729-907-00	TRANSISTOR DTC114EU			
R9105	1-216-811-11	METAL CHIP 150	5%	1/10W		Q9905	8-729-907-00	TRANSISTOR DTC114EU			
R9108	1-216-811-11	METAL CHIP 150	5%	1/10W		Q9906	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR			
R9109	1-216-811-11	METAL CHIP 150	5%	1/10W		Q9907	8-729-907-00	TRANSISTOR DTC114EU			
R9112	1-216-809-11	METAL CHIP 100	5%	1/10W		< RESISTOR >					
R9113	1-216-809-11	METAL CHIP 100	5%	1/10W		R9902	1-216-818-11	METAL CHIP 560	5%	1/10W	
R9114	1-216-809-11	METAL CHIP 100	5%	1/10W		R9903	1-216-817-11	METAL CHIP 470	5%	1/10W	
R9116	1-216-864-11	SHORT CHIP 0				R9904	1-216-818-11	METAL CHIP 560	5%	1/10W	
R9136	1-216-853-11	METAL CHIP 470K	5%	1/10W		R9906	1-216-823-11	METAL CHIP 1.5K	5%	1/10W	
R9137	1-216-821-11	METAL CHIP 1K	5%	1/10W		R9907	1-216-817-11	METAL CHIP 470	5%	1/10W	
R9138	1-216-853-11	METAL CHIP 470K	5%	1/10W							
R9139	1-216-821-11	METAL CHIP 1K	5%	1/10W							
R9142	1-216-864-11	SHORT CHIP 0									

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R9908	1-216-805-11	METAL CHIP	47	5%	1/10W	C2553	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%	10V	
R9910	1-216-821-11	METAL CHIP	1K	5%	1/10W	C2554	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%	10V	
R9911	1-216-839-11	METAL CHIP	33K	5%	1/10W	C2555	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%	10V	
R9912	1-216-833-11	METAL CHIP	10K	5%	1/10W	C2558	1-126-396-11	ELECT CHIP 47UF	20.00%	16V	
R9914	1-216-833-11	METAL CHIP	10K	5%	1/10W	C2559	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%	10V	
R9915	1-216-837-11	METAL CHIP	22K	5%	1/10W	C2560	1-125-891-11	CERAMIC CHIP 0.47UF	10.00%	10V	
R9916	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	C2591	1-126-394-11	ELECT CHIP 10UF	20.00%	16V	
R9917	1-216-817-11	METAL CHIP	470	5%	1/10W	C2592	1-162-970-11	CERAMIC CHIP 0.01UF	10.00%	25V	
R9918	1-216-864-11	SHORT CHIP	0			C2608	1-126-396-11	ELECT CHIP 47UF	20.00%	16V	
*A-1142-615-A A2E Board, Complete KDL-S23A11E *A-1149-540-A A2E Board, Complete KDL-S26A11E KDL-S32A11E/						C2609	1-107-826-11	CERAMIC CHIP 0.1UF	10.00%	16V	
						C2610	1-107-826-11	CERAMIC CHIP 0.1UF	10.00%	16V	
						C2611	1-126-396-11	ELECT CHIP 47UF	20.00%	16V	
A2E Board, Common Parts						C2612	1-107-826-11	CERAMIC CHIP 0.1UF	10.00%	16V	
						C2613	1-126-396-11	ELECT CHIP 47UF	20.00%	16V	
						C6018	1-100-566-91	CERAMIC CHIP 0.1UF	10.00%	25V	
< CAPACITOR >						C6019	1-100-566-91	CERAMIC CHIP 0.1UF	10.00%	25V	
						C7800	1-162-964-11	CERAMIC CHIP 0.001UF	10.00%	50V	
						C7802	1-127-715-91	CERAMIC CHIP 0.22UF	10%	16V	
C2500	1-126-396-11	ELECT CHIP	47UF	20.00%	16V	C7803	1-127-715-91	CERAMIC CHIP 0.22UF	10%	16V	
C2501	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C7804	1-124-779-00	ELECT CHIP 10UF	20.00%	16V	
C2502	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C7810	1-126-204-11	ELECT CHIP 47UF	20.00%	16V	
C2504	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C7812	1-107-826-11	CERAMIC CHIP 0.1UF	10.00%	16V	
C2506	1-125-891-11	CERAMIC CHIP	0.47UF	10.00%	10V	C7813	1-124-779-00	ELECT CHIP 10UF	20.00%	16V	
C2507	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V	C7815	1-126-396-11	ELECT CHIP 47UF	20.00%	16V	
C2509	1-125-889-91	CERAMIC CHIP	2.2UF	10%	10V	C7817	1-164-492-11	CERAMIC CHIP 0.15UF	10.00%	16V	
C2510	1-164-227-11	CERAMIC CHIP	0.022UF	10.00%	25V	C7818	1-164-004-11	CERAMIC CHIP 0.1UF	10.00%	25V	
C2511	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V	C7819	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00%	50V	
C2516	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V	C7821	1-107-823-11	CERAMIC CHIP 0.47UF	10.00%	16V	
C2517	1-127-715-91	CERAMIC CHIP	0.22UF	10%	16V	C7822	1-107-823-11	CERAMIC CHIP 0.47UF	10.00%	16V	
C2518	1-162-915-11	CERAMIC CHIP	10PF	0.50PF	50V	C7823	1-124-779-00	ELECT CHIP 10UF	20.00%	16V	
C2519	1-126-394-11	ELECT CHIP	10UF	20.00%	16V	C7825	1-162-906-11	CERAMIC CHIP 1.5PF	0.25PF	50V	
C2520	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C7826	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00%	50V	
C2521	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V	C7827	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00%	50V	
C2522	1-126-396-11	ELECT CHIP	47UF	20.00%	16V	C7828	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00%	50V	
C2523	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C7829	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00%	50V	
C2524	1-126-396-11	ELECT CHIP	47UF	20.00%	16V	C7833	1-162-906-11	CERAMIC CHIP 1.5PF	0.25PF	50V	
C2526	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C7834	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
C2527	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C7835	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V	
C2528	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C7836	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00%	50V	
C2529	1-127-760-11	CERAMIC CHIP	4.7UF	10%	6.3V	C7838	1-126-396-11	ELECT CHIP 47UF	20.00%	16V	
C2530	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V	C7839	1-126-394-11	ELECT CHIP 10UF	20.00%	16V	
C2531	1-126-396-11	ELECT CHIP	47UF	20.00%	16V	C7840	1-164-004-11	CERAMIC CHIP 0.1UF	10.00%	25V	
C2532	1-126-396-11	ELECT CHIP	47UF	20.00%	16V	C7841	1-126-394-11	ELECT CHIP 10UF	20.00%	16V	
C2533	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V	C7842	1-164-004-11	CERAMIC CHIP 0.1UF	10.00%	25V	
C2534	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C7843	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00%	50V	
C2535	1-126-396-11	ELECT CHIP	47UF	20.00%	16V	C7844	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00%	50V	
C2536	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C7845	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00%	50V	
C2537	1-126-396-11	ELECT CHIP	47UF	20.00%	16V	C7846	1-126-394-11	ELECT CHIP 10UF	20.00%	16V	
C2543	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C7847	1-126-394-11	ELECT CHIP 10UF	20.00%	16V	
C2550	1-125-891-11	CERAMIC CHIP	0.47UF	10.00%	10V	C7849	1-162-928-11	CERAMIC CHIP 120PF	5.00%	50V	
C2551	1-125-891-11	CERAMIC CHIP	0.47UF	10.00%	10V						
C2552	1-125-891-11	CERAMIC CHIP	0.47UF	10.00%	10V						

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C7850	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C7904	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
C7851	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V	C7905	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V
C7852	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C7906	1-128-536-11	ELECT CHIP 100UF	20.00% 25V
C7853	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C7907	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C7854	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C7908	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C7855	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7909	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V
C7856	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7912	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V
C7857	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	C7913	1-100-591-91	CERAMIC CHIP 1UF	10% 25V
C7858	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C7914	1-100-591-91	CERAMIC CHIP 1UF	10% 25V
C7859	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C7917	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V
C7860	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C7918	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V
C7861	1-126-401-21	ELECT CHIP 1UF	20.00% 50V	C7919	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V
C7864	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7920	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V
C7865	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7921	1-100-591-91	CERAMIC CHIP 1UF	10% 25V
C7868	1-164-492-11	CERAMIC CHIP 0.15UF	10.00% 16V	C7922	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C7869	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C7927	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C7870	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C7928	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C7871	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C7929	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C7872	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C7930	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C7873	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C7931	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C7874	1-126-969-11	ELECT 220UF	20.00% 50V	C7932	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C7875	1-128-536-11	ELECT CHIP 100UF	20.00% 25V	C7933	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C7876	1-126-394-11	ELECT CHIP 10UF	20.00% 16V	C7934	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C7877	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7935	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C7878	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C7936	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C7879	1-162-919-11	CERAMIC CHIP 22PF	5.00% 50V	C8426	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C7880	1-162-919-11	CERAMIC CHIP 22PF	5.00% 50V	C8427	1-107-905-11	ELECT 4.7UF	20% 50V
C7881	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V	C8429	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C7882	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V	C8430	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C7883	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C8431	1-163-037-11	CERAMIC CHIP 0.022UF	10.00% 50V
C7884	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C8432	1-126-402-11	ELECT CHIP 2.2UF	20.00% 50V
C7885	1-128-536-11	ELECT CHIP 100UF	20.00% 25V	C8433	1-126-404-11	ELECT CHIP 4.7UF	20.00% 50V
C7886	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C8501	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C7887	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C8502	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C7888	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C8536	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C7889	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C8606	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C7890	1-128-536-11	ELECT CHIP 100UF	20.00% 25V	C8608	1-127-760-11	CERAMIC CHIP 4.7UF	10% 6.3V
C7891	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C8609	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C7892	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C8700	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C7893	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V	C8701	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
C7894	1-115-340-11	CERAMIC CHIP 0.22UF	10.00% 25V	C9500	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C7895	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C9502	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C7896	1-126-396-11	ELECT CHIP 47UF	20.00% 16V	C9504	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C7897	1-128-536-11	ELECT CHIP 100UF	20.00% 25V	C9506	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C7898	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C9512	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C7899	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C9513	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C7900	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9514	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C7901	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C9515	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C7902	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C9520	1-128-992-21	ELECT CHIP 47UF	20% 25V
C7903	1-128-536-11	ELECT CHIP 100UF	20.00% 25V	C9521	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C9522	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C9616	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C9523	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V	C9617	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V
C9524	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C9620	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C9539	1-128-992-21	ELECT CHIP 47UF	20% 25V	C9621	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C9540	1-128-992-21	ELECT CHIP 47UF	20% 25V	C9622	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C9541	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C9623	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C9542	1-128-992-21	ELECT CHIP 47UF	20% 25V	C9624	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
C9543	1-128-992-21	ELECT CHIP 47UF	20% 25V	C9634	1-128-360-11	ELECT CHIP 220UF	20.00% 10V
C9559	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V	C9641	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C9560	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V	< CONNECTOR >			
C9561	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V	CN7801	1-573-290-21	PIN, CONNECTOR (1.5MM) (SMD) 4P	
C9562	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V	CN7802	*1-764-250-11	PIN, CONNECTOR (PC BOARD) 4P	
C9563	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	CN8530	*1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P	
C9564	1-164-156-11	CERAMIC CHIP 0.1UF	25V	CN8551	*1-695-890-21	PIN, CONNECTOR (PC BOARD) 12P	
C9565	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V	CN8602	*1-573-768-21	PIN, CONNECTOR (1.5MM) (SMD) 5P	
C9567	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V	CN8603	1-573-806-21	PIN, CONNECTOR (1.5MM) (SMD) 6P	
C9568	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V	CN8605	*1-770-468-21	PIN, CONNECTOR (PC BOARD) 10P	
C9569	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V	CN8700	1-816-587-21	PIN, CONNECTOR (PC BOARD) 15P	
C9570	1-117-681-11	ELECT CHIP 100UF	20.00% 16V	CN8701	1-764-081-21	PIN, CONNECTOR (PC BOARD) 9P	
C9573	1-162-921-11	CERAMIC CHIP 33PF	5.00% 50V	CN9405	1-794-032-21	PIN, CONNECTOR (PC BOARD) 11P	
C9575	1-162-921-11	CERAMIC CHIP 33PF	5.00% 50V	CN9500	1-695-549-11	SOCKET, PIN 21P	
C9576	1-126-964-11	ELECT 10UF	20.00% 50V	CN9501	1-695-549-11	SOCKET, PIN 21P	
C9578	1-162-925-11	CERAMIC CHIP 68PF	5.00% 50V	< DIODE >			
C9579	1-162-925-11	CERAMIC CHIP 68PF	5.00% 50V	D2501	8-719-081-97	DIODE MMDL914T1	
C9581	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V	D2502	8-719-081-97	DIODE MMDL914T1	
C9583	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V	D2503	8-719-081-97	DIODE MMDL914T1	
C9586	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V	D6013	6-500-551-01	DIODE MM3Z11VT1	
C9587	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	D6014	8-719-081-97	DIODE MM3Z11VT1	
C9588	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	D6015	8-719-081-97	DIODE MMDL914T1	
C9589	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	D6016	8-719-081-97	DIODE MMDL914T1	
C9590	1-165-870-21	ELECT CHIP 100UF	20.00% 6.3V	D6017	8-719-081-97	DIODE MMDL914T1	
C9591	1-162-921-11	CERAMIC CHIP 33PF	5.00% 50V	D6020	8-719-081-97	DIODE MMDL914T1	
C9592	1-162-921-11	CERAMIC CHIP 33PF	5.00% 50V	D7800	8-719-081-97	DIODE MMDL914T1	
C9593	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V	D7801	8-719-977-28	DIODE DTZ10B	
C9594	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V	D7802	8-719-977-28	DIODE DTZ10B	
C9596	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V	D7804	8-719-081-97	DIODE MMDL914T1	
C9597	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V	D7807	8-719-069-60	DIODE UDZSTE-179.1B	
C9598	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V	D7808	8-719-081-97	DIODE MMDL914T1	
C9600	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	D7809	8-719-081-97	DIODE MMDL914T1	
C9601	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	D7810	8-719-081-97	DIODE MMDL914T1	
C9602	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	D7811	8-719-081-97	DIODE MMDL914T1	
C9603	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	D7812	6-500-884-01	DIODE P6SMBJ30A-5	
C9605	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	D7813	6-500-884-01	DIODE P6SMBJ30A-5	
C9606	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D7816	6-500-884-01	DIODE P6SMBJ30A-5	
C9607	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D7817	6-500-884-01	DIODE P6SMBJ30A-5	
C9608	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	D7850	8-719-081-97	DIODE MMDL914T1	
C9609	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	D7860	8-719-081-97	DIODE MMDL914T1	
C9610	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	D7861	8-719-081-97	DIODE MMDL914T1	
C9614	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V				
C9615	1-127-861-11	CERAMIC CHIP 2.2UF	10% 16V				

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
D7862	8-719-081-97	DIODE MMDL914T1		FB8607	1-414-445-11	FERRITE	0UH
D7864	8-719-081-97	DIODE MMDL914T1		FB8609	1-414-445-11	FERRITE	0UH
D7889	8-719-081-97	DIODE MMDL914T1		FB8610	1-414-445-11	FERRITE	0UH
D7890	8-719-081-97	DIODE MMDL914T1		FB8611	1-414-445-11	FERRITE	0UH
D8409	6-500-551-01	DIODE MM3Z11VT1		FB8622	1-414-445-11	FERRITE	0UH
D8410	6-500-551-01	DIODE MM3Z11VT1		FB8700	1-469-775-21	FERRITE	0UH
D8411	8-719-056-82	DIODE UDZ-TE-17-6.2B		FB8702	1-469-775-21	FERRITE	0UH
D8412	8-719-056-82	DIODE UDZ-TE-17-6.2B		FB8703	1-469-775-21	FERRITE	0UH
D8413	8-719-056-82	DIODE UDZ-TE-17-6.2B		FB8704	1-469-775-21	FERRITE	0UH
D9500	8-719-069-60	DIODE UDZSTE-179.1B		FB8705	1-469-775-21	FERRITE	0UH
D9501	8-719-083-63	DIODE UDZSTE-1713B		FB8706	1-469-775-21	FERRITE	0UH
D9502	8-719-069-55	DIODE UDZSTE-175.6B		FB8707	1-469-775-21	FERRITE	0UH
D9503	8-719-069-60	DIODE UDZSTE-179.1B		FB8709	1-469-775-21	FERRITE	0UH
D9504	8-719-069-55	DIODE UDZSTE-175.6B		FB8710	1-469-775-21	FERRITE	0UH
D9505	8-719-069-60	DIODE UDZSTE-179.1B		FB8711	1-469-775-21	FERRITE	0UH
D9506	8-719-069-55	DIODE UDZSTE-175.6B		FB8712	1-469-775-21	FERRITE	0UH
D9507	8-719-069-60	DIODE UDZSTE-179.1B		FB8713	1-469-775-21	FERRITE	0UH
D9508	8-719-083-63	DIODE UDZSTE-1713B		FB8714	1-469-775-21	FERRITE	0UH
D9509	8-719-069-55	DIODE UDZSTE-175.6B		FB9503	1-469-324-21	FERRITE	0UH
D9510	8-719-069-55	DIODE UDZSTE-175.6B		FB9504	1-414-760-21	FERRITE	0UH
D9511	8-719-069-60	DIODE UDZSTE-179.1B		FB9505	1-414-760-21	FERRITE	0UH
D9512	8-719-069-55	DIODE UDZSTE-175.6B		< FILTER >			
D9513	8-719-069-60	DIODE UDZSTE-179.1B		FL2500	1-233-765-21	FILTER	
D9514	8-719-069-55	DIODE UDZSTE-175.6B		< IC >			
D9534	8-719-069-55	DIODE UDZSTE-175.6B		IC2500	6-706-475-01	IC TC7SET02FU(T5RSOJF)	
D9537	8-719-069-55	DIODE UDZSTE-175.6B		IC2501	8-753-212-10	IC CXA2163AQ-T6	
D9543	8-719-081-97	DIODE MMDL914T1		IC2504	6-704-465-01	IC MC74LVX8053DTR2	
D9601	8-719-081-98	DIODE MM3Z6V8T1		IC2506	6-704-465-01	IC MC74LVX8053DTR2	
D9602	8-719-081-98	DIODE MM3Z6V8T1		IC2507	8-759-524-24	IC TC7WT241FU(TE12R)	
D9603	8-719-081-98	DIODE MM3Z6V8T1		IC7803	6-705-679-01	IC RC4558PWR	
D9604	8-719-081-97	DIODE MMDL914T1		IC7804	6-708-261-01	IC MSP4411K-QA-D5-001	
D9605	8-719-081-97	DIODE MMDL914T1		IC7806	6-705-679-01	IC RC4558PWR	
D9606	8-719-081-97	DIODE MMDL914T1		IC7808	8-759-359-49	IC NJM3414AV(TE2)	
< FERRITE BEAD >				IC7809	6-707-708-01	IC TPA3004D2PHPR	
FB7800	1-414-760-21	FERRITE	0UH	IC8401	8-749-925-00	IC TK11819MTL	
FB7801	1-414-760-21	FERRITE	0UH	IC8500	8-752-072-94	IC CXA1875AM-T4	
FB7802	1-500-230-21	FERRITE	0UH	IC8503	8-752-072-94	IC CXA1875AM-T4	
FB7803	1-500-230-21	FERRITE	0UH	IC9500	8-752-089-33	IC CXA2069Q-TL	
FB7804	1-500-230-21	FERRITE	0UH	IC9501	8-759-514-57	IC BA7046F	
FB7805	1-500-230-21	FERRITE	0UH	< SOCKET >			
FB7806	1-500-230-21	FERRITE	0UH	J7800	1-507-792-00	JACK	
FB7807	1-500-230-21	FERRITE	0UH	J7801	1-793-725-11	JACK BLOCK, PIN 2P	
FB7808	1-500-230-21	FERRITE	0UH	J9153	1-815-015-11	JACK BLOCK, PIN	
FB7809	1-500-230-21	FERRITE	0UH	< COIL >			
FB7810	1-469-185-11	FERRITE	0UH	L2500	1-412-058-11	INDUCTOR	10UH
FB7811	1-469-185-11	FERRITE	0UH				
FB7812	1-469-185-11	FERRITE	0UH				
FB7813	1-469-185-11	FERRITE	0UH				
FB8606	1-469-775-21	FERRITE	0UH				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

A2E

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
L2504	1-412-029-11	INDUCTOR	10UH	Q2513	8-729-010-29	TRANSISTOR MSD601-RST1	
L2506	1-412-058-11	INDUCTOR	10UH	Q2514	8-729-010-29	TRANSISTOR MSD601-RST1	
L2507	1-412-029-11	INDUCTOR	10UH	Q2515	8-729-122-63	TRANSISTOR 2SA1226-E4	
L2508	1-412-029-11	INDUCTOR	10UH	Q2617	8-729-117-73	TRANSISTOR 2SC4178-F14	
L2509	1-412-058-11	INDUCTOR	10UH	Q2618	8-729-117-73	TRANSISTOR 2SC4178-F14	
L2510	1-412-058-11	INDUCTOR	10UH	Q2619	8-729-117-73	TRANSISTOR 2SC4178-F14	
L2511	1-412-029-11	INDUCTOR	10UH	Q6006	6-550-363-01	TRANSISTOR 2SB1690KT146	
L2512	1-412-029-11	INDUCTOR	10UH	Q6007	8-729-045-62	TRANSISTOR 2SK2158-T2B	
L2513	1-412-029-11	INDUCTOR	10UH	Q6008	6-550-549-01	TRANSISTOR DTC114EUAFT106	
L7803	1-412-058-11	INDUCTOR	10UH	Q6010	6-550-549-01	TRANSISTOR DTC114EUAFT106	
L7805	1-412-990-41	INDUCTOR	8.2UH	Q7801	8-729-010-29	TRANSISTOR MSD601-RST1	
L7806	1-412-058-11	INDUCTOR	10UH	Q7802	8-729-010-29	TRANSISTOR MSD601-RST1	
L7807	1-412-058-11	INDUCTOR	10UH	Q7804	8-729-010-29	TRANSISTOR MSD601-RST1	
L7809	1-406-663-21	INDUCTOR	47UH	Q7805	8-729-010-29	TRANSISTOR MSD601-RST1	
L7810	1-400-472-11	INDUCTOR	33UH	Q7806	8-729-010-29	TRANSISTOR MSD601-RST1	
L7811	1-400-472-11	INDUCTOR	33UH	Q7808	8-729-905-35	TRANSISTOR 2SC4081-R	
L7812	1-400-472-11	INDUCTOR	33UH	Q7809	6-550-076-01	TRANSISTOR MUN5213T1	
L7813	1-400-472-11	INDUCTOR	33UH	Q7810	8-729-010-29	TRANSISTOR MSD601-RST1	
L8401	1-469-528-91	INDUCTOR	100UH	Q7811	8-729-010-05	TRANSISTOR MSB709-RT1	
L8402	1-412-550-11	INDUCTOR	1.2MH	Q7812	8-729-920-21	TRANSISTOR DTC314TK-T-146	
L8700	1-412-029-11	INDUCTOR	10UH	Q7813	8-729-920-21	TRANSISTOR DTC314TK-T-146	
L9500	1-412-029-11	INDUCTOR	10UH	Q7814	6-550-076-01	TRANSISTOR MUN5213T1	
L9502	1-412-060-11	INDUCTOR	22UH	Q7815	6-550-585-01	TRANSISTOR 2PC4081R-115	
L9503	1-414-580-21	INDUCTOR	100NH	Q7816	6-550-076-01	TRANSISTOR MUN5213T1	
L9504	1-414-580-21	INDUCTOR	100NH	Q7817	8-729-905-35	TRANSISTOR 2SC4081-R	
L9505	1-414-580-21	INDUCTOR	100NH	Q7818	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	
L9506	1-412-029-11	INDUCTOR	10UH	Q7819	8-729-029-00	TRANSISTOR DTC115EUA-T106	
L9508	1-412-979-21	INDUCTOR	1UH	Q7820	8-729-010-29	TRANSISTOR MSD601-RST1	
L9509	1-412-029-11	INDUCTOR	10UH	Q7821	8-729-010-29	TRANSISTOR MSD601-RST1	
L9510	1-412-030-11	INDUCTOR	22UH	Q7822	8-729-010-29	TRANSISTOR MSD601-RST1	
L9511	1-412-029-11	INDUCTOR	10UH	Q7823	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	
L9521	1-412-058-11	INDUCTOR	10UH	Q7824	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	
< PROTECTOR MODULE >				Q7825	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	
PS7800 Δ	1-533-596-11	IC LINK	4A 90V	Q7826	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	
PS8401 Δ	1-576-646-11	FUSE	0.5A 50V	Q7827	8-729-905-35	TRANSISTOR 2SC4081-R	
< TRANSISTOR >				Q7829	8-729-010-05	TRANSISTOR MSB709-RT1	
Q2501	8-729-010-05	TRANSISTOR MSB709-RT1		Q7830	8-729-010-05	TRANSISTOR MSB709-RT1	
Q2502	8-729-010-05	TRANSISTOR MSB709-RT1		Q7831	8-729-010-05	TRANSISTOR MSB709-RT1	
Q2503	8-729-010-05	TRANSISTOR MSB709-RT1		Q7832	8-729-010-05	TRANSISTOR MSB709-RT1	
Q2504	8-729-010-05	TRANSISTOR MSB709-RT1		Q7833	8-729-010-05	TRANSISTOR MSB709-RT1	
Q2505	8-729-010-29	TRANSISTOR MSD601-RST1		Q7834	8-729-010-05	TRANSISTOR MSB709-RT1	
Q2506	8-729-029-00	TRANSISTOR DTC115EUA-T106		Q8403	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	
Q2508	8-729-029-00	TRANSISTOR DTC115EUA-T106		Q8404	8-729-905-35	TRANSISTOR 2SC4081-R	
Q2509	8-729-010-29	TRANSISTOR MSD601-RST1		Q8490	8-729-010-29	TRANSISTOR MSD601-RST1	
Q2510	8-729-010-29	TRANSISTOR MSD601-RST1		Q8500	8-729-028-73	TRANSISTOR DTA114EUA-T106	
Q2511	8-729-122-63	TRANSISTOR 2SA1226-E4		Q8504	8-729-905-35	TRANSISTOR 2SC4081-R	
Q2512	8-729-122-63	TRANSISTOR 2SA1226-E4		Q8505	8-729-905-35	TRANSISTOR 2SC4081-R	
				Q8506	8-729-028-73	TRANSISTOR DTA114EUA-T106	
				Q8507	6-550-549-01	TRANSISTOR DTC114EUAFT106	
				Q8550	8-729-050-10	TRANSISTOR PMBF170-215	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
Q8551	8-729-050-10	TRANSISTOR PMBF170-215		R2544	1-216-830-11	METAL CHIP 5.6K 5%	1/10W
Q8552	8-729-023-32	TRANSISTOR 2SK2037		R2545	1-216-817-11	METAL CHIP 470 5%	1/10W
Q8553	8-729-023-32	TRANSISTOR 2SK2037		R2546	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
Q8601	8-729-029-00	TRANSISTOR DTC115EUA-T106		R2547	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
Q8615	8-729-905-35	TRANSISTOR 2SC4081-R		R2548	1-216-808-11	METAL CHIP 82 5%	1/10W
Q8616	6-550-549-01	TRANSISTOR DTC114EUAF106		R2549	1-211-985-11	METAL CHIP 47 0.5%	1/10W
Q9500	8-729-010-29	TRANSISTOR MSD601-RST1		R2556	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q9508	8-729-010-29	TRANSISTOR MSD601-RST1		R2558	1-216-864-11	SHORT CHIP 0	
Q9509	8-729-010-29	TRANSISTOR MSD601-RST1		R2559	1-216-864-11	SHORT CHIP 0	
Q9510	8-729-927-99	TRANSISTOR 2SC4617R		R2560	1-216-864-11	SHORT CHIP 0	
Q9511	8-729-927-99	TRANSISTOR 2SC4617R		R2561	1-216-864-11	SHORT CHIP 0	
Q9512	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2562	1-216-849-11	METAL CHIP 220K 5%	1/10W
Q9513	8-729-010-05	TRANSISTOR MSB709-RT1		R2563	1-216-849-11	METAL CHIP 220K 5%	1/10W
Q9514	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2564	1-216-849-11	METAL CHIP 220K 5%	1/10W
Q9515	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R2565	1-216-849-11	METAL CHIP 220K 5%	1/10W
Q9601	8-729-010-29	TRANSISTOR MSD601-RST1		R2566	1-216-849-11	METAL CHIP 220K 5%	1/10W
< RESISTOR >				R2567	1-216-864-11	SHORT CHIP 0	
R2500	1-216-864-11	SHORT CHIP 0		R2568	1-216-864-11	SHORT CHIP 0	
R2501	1-216-809-11	METAL CHIP 100 5%	1/10W	R2569	1-216-864-11	SHORT CHIP 0	
R2502	1-216-809-11	METAL CHIP 100 5%	1/10W	R2571	1-216-864-11	SHORT CHIP 0	
R2503	1-216-821-11	METAL CHIP 1K 5%	1/10W	R2573	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R2506	1-216-838-11	METAL CHIP 27K 5%	1/10W	R2574	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2507	1-216-864-11	SHORT CHIP 0		R2575	1-216-864-11	SHORT CHIP 0	
R2508	1-216-828-11	METAL CHIP 3.9K 5%	1/10W	R2576	1-216-864-11	SHORT CHIP 0	
R2511	1-216-849-11	METAL CHIP 220K 5%	1/10W	R2577	1-216-864-11	SHORT CHIP 0	
R2512	1-216-849-11	METAL CHIP 220K 5%	1/10W	R2578	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2513	1-216-849-11	METAL CHIP 220K 5%	1/10W	R2579	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2514	1-216-864-11	SHORT CHIP 0		R2580	1-216-849-11	METAL CHIP 220K 5%	1/10W
R2515	1-216-817-11	METAL CHIP 470 5%	1/10W	R2581	1-216-849-11	METAL CHIP 220K 5%	1/10W
R2517	1-216-821-11	METAL CHIP 1K 5%	1/10W	R2582	1-216-849-11	METAL CHIP 220K 5%	1/10W
R2518	1-216-864-11	SHORT CHIP 0		R2583	1-216-849-11	METAL CHIP 220K 5%	1/10W
R2519	1-216-864-11	SHORT CHIP 0		R2584	1-216-864-11	SHORT CHIP 0	
R2520	1-216-864-11	SHORT CHIP 0		R2586	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2521	1-216-864-11	SHORT CHIP 0		R2587	1-216-864-11	SHORT CHIP 0	
R2522	1-218-867-11	METAL CHIP 6.8K 0.5%	1/10W	R2588	1-216-864-11	SHORT CHIP 0	
R2523	1-216-864-11	SHORT CHIP 0		R2589	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R2524	1-218-867-11	METAL CHIP 6.8K 0.5%	1/10W	R2590	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R2528	1-216-864-11	SHORT CHIP 0		R2591	1-216-809-11	METAL CHIP 100 5%	1/10W
R2529	1-216-864-11	SHORT CHIP 0		R2592	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2530	1-216-820-11	METAL CHIP 820 5%	1/10W	R2593	1-216-809-11	METAL CHIP 100 5%	1/10W
R2531	1-216-818-11	METAL CHIP 560 5%	1/10W	R2594	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2534	1-216-864-11	SHORT CHIP 0		R2595	1-216-821-11	METAL CHIP 1K 5%	1/10W
R2535	1-216-809-11	METAL CHIP 100 5%	1/10W	R2596	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R2537	1-216-809-11	METAL CHIP 100 5%	1/10W	R2597	1-218-867-11	METAL CHIP 6.8K 0.5%	1/10W
R2538	1-216-809-11	METAL CHIP 100 5%	1/10W	R2598	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2539	1-216-809-11	METAL CHIP 100 5%	1/10W	R2599	1-216-809-11	METAL CHIP 100 5%	1/10W
R2540	1-216-809-11	METAL CHIP 100 5%	1/10W	R2600	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2542	1-216-809-11	METAL CHIP 100 5%	1/10W	R2601	1-216-833-11	METAL CHIP 10K 5%	1/10W
				R2602	1-216-833-11	METAL CHIP 10K 5%	1/10W
				R2604	1-216-857-11	METAL CHIP 1M 5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R2605	1-216-864-11	SHORT CHIP	0			R7814	1-216-864-11	SHORT CHIP	0		
R2607	1-216-864-11	SHORT CHIP	0			R7815	1-216-864-11	SHORT CHIP	0		
R2608	1-216-864-11	SHORT CHIP	0			R7821	1-216-845-11	METAL CHIP	100K	5%	1/10W
R2615	1-216-864-11	SHORT CHIP	0			R7828	1-216-836-11	METAL CHIP	18K	5%	1/10W
R2616	1-216-864-11	SHORT CHIP	0			R7829	1-216-839-11	METAL CHIP	33K	5%	1/10W
R2618	1-216-864-11	SHORT CHIP	0			R7830	1-218-841-11	METAL CHIP	560	0.5%	1/10W
R2652	1-216-801-11	METAL CHIP	22	5%	1/10W	R7835	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R2654	1-216-817-11	METAL CHIP	470	5%	1/10W	R7836	1-216-853-11	METAL CHIP	470K	5%	1/10W
R2655	1-216-805-11	METAL CHIP	47	5%	1/10W	R7837	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R2656	1-216-864-11	SHORT CHIP	0			R7838	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2658	1-216-817-11	METAL CHIP	470	5%	1/10W	R7839	1-216-853-11	METAL CHIP	470K	5%	1/10W
R2659	1-216-805-11	METAL CHIP	47	5%	1/10W	R7840	1-216-809-11	METAL CHIP	100	5%	1/10W
R2661	1-216-864-11	SHORT CHIP	0			R7841	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2663	1-216-813-11	METAL CHIP	220	5%	1/10W	R7843	1-216-809-11	METAL CHIP	100	5%	1/10W
R2664	1-216-805-11	METAL CHIP	47	5%	1/10W	R7844	1-216-845-11	METAL CHIP	100K	5%	1/10W
R2665	1-216-809-11	METAL CHIP	100	5%	1/10W	R7846	1-216-864-11	SHORT CHIP	0		
R2667	1-216-813-11	METAL CHIP	220	5%	1/10W	R7847	1-216-836-11	METAL CHIP	18K	5%	1/10W
R2668	1-216-805-11	METAL CHIP	47	5%	1/10W	R7848	1-216-839-11	METAL CHIP	33K	5%	1/10W
R2669	1-216-809-11	METAL CHIP	100	5%	1/10W	R7849	1-218-841-11	METAL CHIP	560	0.5%	1/10W
R2671	1-216-813-11	METAL CHIP	220	5%	1/10W	R7851	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2672	1-216-805-11	METAL CHIP	47	5%	1/10W	R7852	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2680	1-216-864-11	SHORT CHIP	0			R7853	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2682	1-216-817-11	METAL CHIP	470	5%	1/10W	R7854	1-216-864-11	SHORT CHIP	0		
R2683	1-216-805-11	METAL CHIP	47	5%	1/10W	R7856	1-216-864-11	SHORT CHIP	0		
R6031	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7857	1-216-821-11	METAL CHIP	1K	5%	1/10W
R6032	1-218-895-11	METAL CHIP	100K	0.5%	1/10W	R7859	1-218-866-11	METAL CHIP	6.2K	0.5%	1/10W
R6035	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R7860	1-218-866-11	METAL CHIP	6.2K	0.5%	1/10W
R6036	1-216-818-11	METAL CHIP	560	5%	1/10W	R7861	1-216-864-11	SHORT CHIP	0		
R6043	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R7864	1-216-805-11	METAL CHIP	47	5%	1/10W
R6044	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R7865	1-216-821-11	METAL CHIP	1K	5%	1/10W
R6045	1-216-864-11	SHORT CHIP	0			R7866	1-218-866-11	METAL CHIP	6.2K	0.5%	1/10W
R6046	1-216-864-11	SHORT CHIP	0			R7867	1-218-866-11	METAL CHIP	6.2K	0.5%	1/10W
R6047	1-216-864-11	SHORT CHIP	0			R7869	1-216-834-11	METAL CHIP	12K	5%	1/10W
R6048	1-216-864-11	SHORT CHIP	0			R7871	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6049	1-216-864-11	SHORT CHIP	0			R7872	1-216-853-11	METAL CHIP	470K	5%	1/10W
R6050	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7874	1-216-864-11	SHORT CHIP	0		
R6051	1-216-849-11	METAL CHIP	220K	5%	1/10W	R7875	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6055	1-216-864-11	SHORT CHIP	0			R7876	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R6056	1-216-864-11	SHORT CHIP	0			R7877	1-216-837-11	METAL CHIP	22K	5%	1/10W
R7800	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7878	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W
R7801	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7879	1-218-890-11	METAL CHIP	62K	0.5%	1/10W
R7802	1-216-841-11	METAL CHIP	47K	5%	1/10W	R7880	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7803	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7881	1-216-837-11	METAL CHIP	22K	5%	1/10W
R7804	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7882	1-218-890-11	METAL CHIP	62K	0.5%	1/10W
R7805	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R7883	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W
R7809	1-216-832-11	METAL CHIP	8.2K	5%	1/10W	R7884	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7810	1-216-864-11	SHORT CHIP	0			R7885	1-216-837-11	METAL CHIP	22K	5%	1/10W
R7811	1-216-840-11	METAL CHIP	39K	5%	1/10W	R7886	1-216-837-11	METAL CHIP	22K	5%	1/10W
R7812	1-216-840-11	METAL CHIP	39K	5%	1/10W	R7887	1-216-838-11	METAL CHIP	27K	5%	1/10W
R7813	1-216-832-11	METAL CHIP	8.2K	5%	1/10W	R7888	1-216-825-11	METAL CHIP	2.2K	5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R7889	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7949	1-216-864-11	SHORT CHIP	0		
R7895	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R7951	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7896	1-216-864-11	SHORT CHIP	0			R7952	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7897	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R7953	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7898	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7954	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7899	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7956	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7900	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7957	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7901	1-216-864-11	SHORT CHIP	0			R7958	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7902	1-216-864-11	SHORT CHIP	0			R7959	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7903	1-216-842-11	METAL CHIP	56K	5%	1/10W	R7960	1-216-864-11	SHORT CHIP	0		
R7904	1-216-842-11	METAL CHIP	56K	5%	1/10W	R7961	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7905	1-216-864-11	SHORT CHIP	0			R7962	1-216-842-11	METAL CHIP	56K	5%	1/10W
R7906	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R7963	1-216-864-11	SHORT CHIP	0		
R7907	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R7964	1-216-864-11	SHORT CHIP	0		
R7908	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7965	1-216-853-11	METAL CHIP	470K	5%	1/10W
R7909	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7966	1-216-853-11	METAL CHIP	470K	5%	1/10W
R7910	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R7967	1-216-821-11	METAL CHIP	1K	5%	1/10W
R7911	1-216-821-11	METAL CHIP	1K	5%	1/10W	R7968	1-216-821-11	METAL CHIP	1K	5%	1/10W
R7912	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7973	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7913	1-216-864-11	SHORT CHIP	0			R7977	1-216-864-11	SHORT CHIP	0		
R7914	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7979	1-216-864-11	SHORT CHIP	0		
R7915	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7981	1-216-864-11	SHORT CHIP	0		
R7917	1-216-864-11	SHORT CHIP	0			R7983	1-216-864-11	SHORT CHIP	0		
R7919	1-216-864-11	SHORT CHIP	0			R7985	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7921	1-218-873-11	METAL CHIP	12K	0.5%	1/10W	R7986	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7922	1-216-845-11	METAL CHIP	100K	5%	1/10W	R7991	1-216-864-11	SHORT CHIP	0		
R7923	1-216-826-11	METAL CHIP	2.7K	5%	1/10W	R7995	1-216-841-11	METAL CHIP	47K	5%	1/10W
R7924	1-216-846-11	METAL CHIP	120K	5%	1/10W	R7997	1-216-864-11	SHORT CHIP	0		
R7925	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7998	1-216-864-11	SHORT CHIP	0		
R7926	1-216-833-11	METAL CHIP	10K	5%	1/10W	R7999	1-216-864-11	SHORT CHIP	0		
R7927	1-216-846-11	METAL CHIP	120K	5%	1/10W	R8000	1-216-864-11	SHORT CHIP	0		
R7928	1-216-845-11	METAL CHIP	100K	5%	1/10W	R8002	1-216-845-11	METAL CHIP	100K	5%	1/10W
R7929	1-216-826-11	METAL CHIP	2.7K	5%	1/10W	R8003	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7930	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R8004	1-216-833-11	METAL CHIP	10K	5%	1/10W
R7931	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R8010	1-216-837-11	METAL CHIP	22K	5%	1/10W
R7932	1-216-845-11	METAL CHIP	100K	5%	1/10W	R8011	1-216-837-11	METAL CHIP	22K	5%	1/10W
R7933	1-216-864-11	SHORT CHIP	0			R8012	1-216-837-11	METAL CHIP	22K	5%	1/10W
R7934	1-216-864-11	SHORT CHIP	0			R8013	1-216-837-11	METAL CHIP	22K	5%	1/10W
R7935	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R8018	1-216-864-11	SHORT CHIP	0		
R7936	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R8019	1-216-864-11	SHORT CHIP	0		
R7937	1-216-813-11	METAL CHIP	220	5%	1/10W	R8020	1-216-864-11	SHORT CHIP	0		
R7938	1-216-845-11	METAL CHIP	100K	5%	1/10W	R8021	1-216-864-11	SHORT CHIP	0		
R7940	1-216-813-11	METAL CHIP	220	5%	1/10W	R8023	1-216-864-11	SHORT CHIP	0		
R7941	1-216-845-11	METAL CHIP	100K	5%	1/10W	R8024	1-216-864-11	SHORT CHIP	0		
R7943	1-216-864-11	SHORT CHIP	0			R8025	1-216-864-11	SHORT CHIP	0		
R7944	1-216-864-11	SHORT CHIP	0			R8200	1-216-864-11	SHORT CHIP	0		
R7945	1-216-864-11	SHORT CHIP	0			R8201	1-216-864-11	SHORT CHIP	0		
R7946	1-216-846-11	METAL CHIP	120K	5%	1/10W	R8202	1-216-864-11	SHORT CHIP	0		
R7947	1-216-845-11	METAL CHIP	100K	5%	1/10W	R8203	1-216-864-11	SHORT CHIP	0		
R7948	1-216-864-11	SHORT CHIP	0			R8204	1-216-864-11	SHORT CHIP	0		

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R8205	1-216-864-11	SHORT CHIP	0			R8558	1-216-864-11	SHORT CHIP	0		
R8206	1-216-864-11	SHORT CHIP	0			R8560	1-216-864-11	SHORT CHIP	0		
R8207	1-216-864-11	SHORT CHIP	0			R8561	1-216-864-11	SHORT CHIP	0		
R8208	1-216-864-11	SHORT CHIP	0			R8562	1-216-864-11	SHORT CHIP	0		
R8209	1-216-864-11	SHORT CHIP	0			R8563	1-216-864-11	SHORT CHIP	0		
R8210	1-216-864-11	SHORT CHIP	0			R8564	1-216-864-11	SHORT CHIP	0		
R8211	1-216-864-11	SHORT CHIP	0			R8565	1-216-864-11	SHORT CHIP	0		
R8212	1-216-864-11	SHORT CHIP	0			R8566	1-216-864-11	SHORT CHIP	0		
R8213	1-216-864-11	SHORT CHIP	0			R8567	1-216-864-11	SHORT CHIP	0		
R8214	1-216-864-11	SHORT CHIP	0			R8568	1-216-864-11	SHORT CHIP	0		
R8215	1-216-864-11	SHORT CHIP	0			R8569	1-216-864-11	SHORT CHIP	0		
R8433	1-216-821-11	METAL CHIP	1K	5%	1/10W	R8570	1-216-864-11	SHORT CHIP	0		
R8434	1-216-821-11	METAL CHIP	1K	5%	1/10W	R8571	1-216-864-11	SHORT CHIP	0		
R8436	1-216-821-11	METAL CHIP	1K	5%	1/10W	R8572	1-216-864-11	SHORT CHIP	0		
R8437	1-218-692-11	METAL CHIP	1K	0.5%	1/10W	R8573	1-216-864-11	SHORT CHIP	0		
R8438	1-216-805-11	METAL CHIP	47	5%	1/10W	R8574	1-216-864-11	SHORT CHIP	0		
R8439	1-216-805-11	METAL CHIP	47	5%	1/10W	R8575	1-216-864-11	SHORT CHIP	0		
R8441	1-216-833-11	METAL CHIP	10K	5%	1/10W	R8576	1-216-864-11	SHORT CHIP	0		
R8442	1-216-833-11	METAL CHIP	10K	5%	1/10W	R8577	1-216-864-11	SHORT CHIP	0		
R8498	1-216-833-11	METAL CHIP	10K	5%	1/10W	R8578	1-216-864-11	SHORT CHIP	0		
R8499	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R8579	1-216-864-11	SHORT CHIP	0		
R8500	1-216-833-11	METAL CHIP	10K	5%	1/10W	R8580	1-216-864-11	SHORT CHIP	0		
R8515	1-216-833-11	METAL CHIP	10K	5%	1/10W	R8581	1-216-864-11	SHORT CHIP	0		
R8529	1-216-864-11	SHORT CHIP	0			R8582	1-216-815-11	METAL CHIP	330	5%	1/10W
R8530	1-216-864-11	SHORT CHIP	0			R8583	1-216-864-11	SHORT CHIP	0		
R8531	1-216-864-11	SHORT CHIP	0			R8591	1-216-833-11	METAL CHIP	10K	5%	1/10W
R8532	1-216-864-11	SHORT CHIP	0			R8592	1-216-833-11	METAL CHIP	10K	5%	1/10W
R8533	1-216-864-11	SHORT CHIP	0			R8593	1-216-833-11	METAL CHIP	10K	5%	1/10W
R8534	1-216-864-11	SHORT CHIP	0			R8594	1-216-864-11	SHORT CHIP	0		
R8535	1-216-864-11	SHORT CHIP	0			R8595	1-216-864-11	SHORT CHIP	0		
R8536	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R8596	1-216-864-11	SHORT CHIP	0		
R8538	1-216-864-11	SHORT CHIP	0			R8597	1-216-864-11	SHORT CHIP	0		
R8539	1-216-864-11	SHORT CHIP	0			R8598	1-216-864-11	SHORT CHIP	0		
R8540	1-216-864-11	SHORT CHIP	0			R8605	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R8541	1-216-864-11	SHORT CHIP	0			R8613	1-216-809-11	METAL CHIP	100	5%	1/10W
R8542	1-216-864-11	SHORT CHIP	0			R8617	1-216-864-11	SHORT CHIP	0		
R8543	1-216-864-11	SHORT CHIP	0			R8618	1-216-864-11	SHORT CHIP	0		
R8544	1-216-864-11	SHORT CHIP	0			R8619	1-216-843-11	METAL CHIP	68K	5%	1/10W
R8545	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R8620	1-216-851-11	METAL CHIP	330K	5%	1/10W
R8546	1-216-833-11	METAL CHIP	10K	5%	1/10W	R8622	1-216-833-11	METAL CHIP	10K	5%	1/10W
R8547	1-216-833-11	METAL CHIP	10K	5%	1/10W	R8623	1-216-833-11	METAL CHIP	10K	5%	1/10W
R8548	1-216-864-11	SHORT CHIP	0			R8624	1-216-835-11	METAL CHIP	15K	5%	1/10W
R8549	1-216-864-11	SHORT CHIP	0			R8625	1-216-864-11	SHORT CHIP	0		
R8550	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R8700	1-216-864-11	SHORT CHIP	0		
R8551	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R8701	1-216-864-11	SHORT CHIP	0		
R8552	1-216-833-11	METAL CHIP	10K	5%	1/10W	R8704	1-216-864-11	SHORT CHIP	0		
R8553	1-216-864-11	SHORT CHIP	0			R9401	1-216-864-11	SHORT CHIP	0		
R8555	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R9402	1-216-864-11	SHORT CHIP	0		
R8556	1-216-8293-11	METAL CHIP	4.7K	5%	1/10W	R9407	1-216-864-11	SHORT CHIP	0		
R8557	1-216-833-11	METAL CHIP	10K	5%	1/10W	R9408	1-216-864-11	SHORT CHIP	0		

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R9409	1-216-864-11	SHORT CHIP	0			R9552	1-216-029-00	RES-CHIP	150	5%	1/10W
R9500	1-216-864-11	SHORT CHIP	0			R9553	1-216-029-00	RES-CHIP	150	5%	1/10W
R9501	1-216-864-11	SHORT CHIP	0			R9554	1-216-029-00	RES-CHIP	150	5%	1/10W
R9503	1-216-815-11	METAL CHIP	330	5%	1/10W	R9555	1-216-029-00	RES-CHIP	150	5%	1/10W
R9504	1-216-049-11	RES-CHIP	1K	5%	1/10W	R9556	1-216-025-11	RES-CHIP	100	5%	1/10W
R9505	1-216-813-11	METAL CHIP	220	5%	1/10W	R9557	1-216-025-11	RES-CHIP	100	5%	1/10W
R9506	1-216-864-11	SHORT CHIP	0			R9558	1-216-025-11	RES-CHIP	100	5%	1/10W
R9507	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9559	1-216-025-11	RES-CHIP	100	5%	1/10W
R9508	1-216-815-11	METAL CHIP	330	5%	1/10W	R9588	1-216-834-11	METAL CHIP	12K	5%	1/10W
R9509	1-216-049-11	RES-CHIP	1K	5%	1/10W	R9589	1-216-834-11	METAL CHIP	12K	5%	1/10W
R9510	1-216-029-00	RES-CHIP	150	5%	1/10W	R9606	1-216-864-11	SHORT CHIP	0		
R9511	1-216-813-11	METAL CHIP	220	5%	1/10W	R9609	1-216-833-11	METAL CHIP	10K	5%	1/10W
R9512	1-216-864-11	SHORT CHIP	0			R9610	1-216-836-11	METAL CHIP	18K	5%	1/10W
R9513	1-216-025-11	RES-CHIP	100	5%	1/10W	R9611	1-216-809-11	METAL CHIP	100	5%	1/10W
R9514	1-216-025-11	RES-CHIP	100	5%	1/10W	R9612	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R9515	1-216-837-11	METAL CHIP	22K	5%	1/10W	R9613	1-216-809-11	METAL CHIP	100	5%	1/10W
R9516	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9614	1-216-864-11	SHORT CHIP	0		
R9517	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9615	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9518	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9616	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R9520	1-216-029-00	RES-CHIP	150	5%	1/10W	R9617	1-216-809-11	METAL CHIP	100	5%	1/10W
R9521	1-216-029-00	RES-CHIP	150	5%	1/10W	R9618	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R9522	1-216-029-00	RES-CHIP	150	5%	1/10W	R9620	1-216-864-11	SHORT CHIP	0		
R9523	1-216-025-11	RES-CHIP	100	5%	1/10W	R9621	1-216-864-11	SHORT CHIP	0		
R9524	1-216-025-11	RES-CHIP	100	5%	1/10W	R9623	1-216-864-11	SHORT CHIP	0		
R9525	1-216-025-11	RES-CHIP	100	5%	1/10W	R9624	1-216-864-11	SHORT CHIP	0		
R9526	1-216-022-00	RES-CHIP	75	5%	1/10W	R9626	1-216-809-11	METAL CHIP	100	5%	1/10W
R9527	1-216-029-00	RES-CHIP	150	5%	1/10W	R9627	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R9528	1-216-029-00	RES-CHIP	150	5%	1/10W	R9628	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R9529	1-216-025-11	RES-CHIP	100	5%	1/10W	R9629	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R9530	1-216-809-11	METAL CHIP	100	5%	1/10W	R9630	1-216-809-11	METAL CHIP	100	5%	1/10W
R9531	1-216-815-11	METAL CHIP	330	5%	1/10W	R9631	1-216-809-11	METAL CHIP	100	5%	1/10W
R9532	1-216-049-11	RES-CHIP	1K	5%	1/10W	R9632	1-216-864-11	SHORT CHIP	0		
R9533	1-216-815-11	METAL CHIP	330	5%	1/10W	R9633	1-216-864-11	SHORT CHIP	0		
R9534	1-216-821-11	METAL CHIP	1K	5%	1/10W	R9634	1-216-864-11	SHORT CHIP	0		
R9535	1-216-813-11	METAL CHIP	220	5%	1/10W	R9636	1-216-864-11	SHORT CHIP	0		
R9536	1-216-864-11	SHORT CHIP	0			R9637	1-216-864-11	SHORT CHIP	0		
R9537	1-216-813-11	METAL CHIP	220	5%	1/10W	R9638	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R9538	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9639	1-216-809-11	METAL CHIP	100	5%	1/10W
R9539	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9640	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R9540	1-216-049-11	RES-CHIP	1K	5%	1/10W	R9641	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R9541	1-216-029-00	RES-CHIP	150	5%	1/10W	R9642	1-216-809-11	METAL CHIP	100	5%	1/10W
R9543	1-216-029-00	RES-CHIP	150	5%	1/10W	R9643	1-216-809-11	METAL CHIP	100	5%	1/10W
R9544	1-216-864-11	SHORT CHIP	0			R9644	1-216-864-11	SHORT CHIP	0		
R9545	1-216-025-11	RES-CHIP	100	5%	1/10W	R9645	1-216-864-11	SHORT CHIP	0		
R9546	1-216-025-11	RES-CHIP	100	5%	1/10W	R9646	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9547	1-216-025-11	RES-CHIP	100	5%	1/10W	R9647	1-216-812-11	METAL CHIP	180	5%	1/10W
R9548	1-216-837-11	METAL CHIP	22K	5%	1/10W	R9648	1-216-821-11	METAL CHIP	1K	5%	1/10W
R9549	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9649	1-216-833-11	METAL CHIP	10K	5%	1/10W
R9550	1-216-853-11	METAL CHIP	470K	5%	1/10W	R9650	1-216-853-11	METAL CHIP	470K	5%	1/10W
R9551	1-216-022-00	RES-CHIP	75	5%	1/10W	R9651	1-218-898-11	METAL CHIP	130K	0.5%	1/10W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK
R9652	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R9716	1-216-864-11	SHORT CHIP	0
R9653	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R9717	1-216-864-11	SHORT CHIP	0
R9656	1-216-809-11	METAL CHIP	100	5%	1/10W	R9718	1-216-864-11	SHORT CHIP	0
R9658	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R9719	1-216-864-11	SHORT CHIP	0
R9659	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R9727	1-216-864-11	SHORT CHIP	0
R9660	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W	R9899	1-216-864-11	SHORT CHIP	0
R9661	1-216-830-11	METAL CHIP	5.6K	5%	1/10W	< TUNER >			
R9662	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	TU9500	8-597-993-00	TUNER, FSS BTF-EF412Z	
R9663	1-216-809-11	METAL CHIP	100	5%	1/10W	< VARISTOR >			
R9664	1-218-861-11	METAL CHIP	3.9K	0.5%	1/10W	VD7800	1-803-974-21	VARISTOR, CHIP	(1608)
R9667	1-216-850-11	METAL CHIP	270K	5%	1/10W	VD7801	1-801-925-21	VARISTOR, CHIP	(1608)
R9668	1-216-853-11	METAL CHIP	470K	5%	1/10W	VD7802	1-801-925-21	VARISTOR, CHIP	(1608)
R9669	1-216-853-11	METAL CHIP	470K	5%	1/10W	VD7803	1-803-974-21	VARISTOR, CHIP	(1608)
R9670	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	VD7804	1-803-974-21	VARISTOR, CHIP	(1608)
R9672	1-216-821-11	METAL CHIP	1K	5%	1/10W	VD7805	1-803-974-21	VARISTOR, CHIP	(1608)
R9673	1-216-813-11	METAL CHIP	220	5%	1/10W	VD7806	1-801-925-21	VARISTOR, CHIP	(1608)
R9675	1-216-821-11	METAL CHIP	1K	5%	1/10W	VD7807	1-801-925-21	VARISTOR, CHIP	(1608)
R9676	1-216-821-11	METAL CHIP	1K	5%	1/10W	VD7808	1-801-925-21	VARISTOR, CHIP	(1608)
R9677	1-216-821-11	METAL CHIP	1K	5%	1/10W	VD7809	1-801-925-21	VARISTOR, CHIP	(1608)
R9679	1-216-809-11	METAL CHIP	100	5%	1/10W	VDR001	1-803-974-21	VARISTOR, CHIP	(1608)
R9680	1-216-821-11	METAL CHIP	1K	5%	1/10W	VDR002	1-803-974-21	VARISTOR, CHIP	(1608)
R9681	1-216-809-11	METAL CHIP	100	5%	1/10W	VDR003	1-803-974-21	VARISTOR, CHIP	(1608)
R9682	1-216-864-11	SHORT CHIP	0			VDR004	1-803-974-21	VARISTOR, CHIP	(1608)
R9683	1-216-864-11	SHORT CHIP	0			VDR005	1-803-974-21	VARISTOR, CHIP	(1608)
R9684	1-216-864-11	SHORT CHIP	0			VDR006	1-803-974-21	VARISTOR, CHIP	(1608)
R9685	1-216-864-11	SHORT CHIP	0			VDR007	1-803-974-21	VARISTOR, CHIP	(1608)
R9686	1-216-864-11	SHORT CHIP	0			VDR008	1-803-974-21	VARISTOR, CHIP	(1608)
R9689	1-216-821-11	METAL CHIP	1K	5%	1/10W	VDR009	1-803-974-21	VARISTOR, CHIP	(1608)
R9690	1-216-821-11	METAL CHIP	1K	5%	1/10W	VDR010	1-803-974-21	VARISTOR, CHIP	(1608)
R9691	1-216-853-11	METAL CHIP	470K	5%	1/10W	VDR011	1-803-974-21	VARISTOR, CHIP	(1608)
R9692	1-216-853-11	METAL CHIP	470K	5%	1/10W	VDR012	1-803-974-21	VARISTOR, CHIP	(1608)
R9693	1-216-029-00	RES-CHIP	150	5%	1/10W	VDR013	1-803-974-21	VARISTOR, CHIP	(1608)
R9694	1-216-864-11	SHORT CHIP	0			< CRYSTAL >			
R9695	1-216-864-11	SHORT CHIP	0			X2500	1-781-914-21	VIBRATOR, CRYSTAL	
R9696	1-216-864-11	SHORT CHIP	0			X7800	1-795-612-11	VIBRATOR, CRYSTAL	
R9697	1-216-029-00	RES-CHIP	150	5%	1/10W	Variant Parts KDL-S23A11E			
R9698	1-216-029-00	RES-CHIP	150	5%	1/10W	< CAPACITOR >			
R9699	1-216-029-00	RES-CHIP	150	5%	1/10W	C7937	NOT FITTED		
R9700	1-216-029-00	RES-CHIP	150	5%	1/10W	C7938	NOT FITTED		
R9701	1-216-029-00	RES-CHIP	150	5%	1/10W	C9508	NOT FITTED		
R9702	1-216-029-00	RES-CHIP	150	5%	1/10W	C9509	NOT FITTED		
R9703	1-216-029-00	RES-CHIP	150	5%	1/10W	C9510	NOT FITTED		
R9704	1-216-029-00	RES-CHIP	150	5%	1/10W	C9511	NOT FITTED		
R9705	1-216-029-00	RES-CHIP	150	5%	1/10W				
R9706	1-216-029-00	RES-CHIP	150	5%	1/10W				
R9707	1-216-029-00	RES-CHIP	150	5%	1/10W				
R9708	1-216-029-00	RES-CHIP	150	5%	1/10W				
R9709	1-216-029-00	RES-CHIP	150	5%	1/10W				
R9710	1-216-864-11	SHORT CHIP	0						
R9713	1-216-864-11	SHORT CHIP	0						

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
		< CONNECTOR >					
CN9505	NOT FITTED			R9564	NOT FITTED		
		< DIODE >		R9565	NOT FITTED		
D6019	NOT FITTED			R9566	NOT FITTED		
D8414	NOT FITTED			R9567	NOT FITTED		
		< IC >		R9568	NOT FITTED		
IC2601	NOT FITTED			R9569	NOT FITTED		
IC9510	NOT FITTED			R9570	NOT FITTED		
		< COIL >		R9573	NOT FITTED		
L9512	NOT FITTED			R9574	NOT FITTED		
		< TRANSISTOR >		R9581	NOT FITTED		
Q2601	NOT FITTED			R9582	NOT FITTED		
Q2611	NOT FITTED			R9583	NOT FITTED		
Q2612	NOT FITTED			R9619	NOT FITTED		
Q2613	NOT FITTED			R9714	NOT FITTED		
		< RESISTOR >		R9715	NOT FITTED		
R2606	1-216-864-11	SHORT CHIP	0	Variant Parts KDL-S26A11E/KDL-S32A11E			
R2609	1-216-864-11	SHORT CHIP	0			< CAPACITOR >	
R2610	NOT FITTED			C7937	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
R2613	NOT FITTED			C7938	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
R2614	NOT FITTED			C9508	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
R2617	1-216-864-11	SHORT CHIP	0	C9509	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
R2619	NOT FITTED			C9510	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
R2622	NOT FITTED			C9511	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
R2623	NOT FITTED					< CONNECTOR >	
R2624	NOT FITTED			CN9505	1-819-443-11	HEADER ASSEMBLY FOR PWB 15P	
R2627	NOT FITTED					< DIODE >	
R2631	NOT FITTED			D6019	8-719-081-97	DIODE MMDL914T1	
R2633	NOT FITTED			D8414	6-500-551-01	DIODE MM3Z11VT1	
R2634	NOT FITTED					< IC >	
R2635	NOT FITTED			IC2601	6-704-465-01	IC MC74LVX8053DTR2	
R2637	NOT FITTED			IC9510	6-706-999-01	IC BA09CCOWFP-E2	
R2638	NOT FITTED					< COIL >	
R2639	NOT FITTED			L9512	1-412-029-11	INDUCTOR	10UH
R2641	NOT FITTED					< TRANSISTOR >	
R2642	NOT FITTED			Q2601	8-729-029-00	TRANSISTOR DTC115EUA-T106	
R6054	NOT FITTED			Q2611	8-729-122-63	TRANSISTOR 2SA1226-E4	
R7920	1-218-873-11	METAL CHIP	12K 0.5% 1/10W	Q2612	8-729-122-63	TRANSISTOR 2SA1226-E4	
R7993	NOT FITTED			Q2613	8-729-122-63	TRANSISTOR 2SA1226-E4	
R7994	NOT FITTED					< RESISTOR >	
R9560	NOT FITTED			R2606	NOT FITTED		
R9561	NOT FITTED			R2609	NOT FITTED		
R9562	NOT FITTED						

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

A2E

H1E

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK
R2610	1-216-864-11	SHORT CHIP	0
R2613	1-216-864-11	SHORT CHIP	0
R2614	1-216-864-11	SHORT CHIP	0
R2617	NOT FITTED		
R2619	1-216-864-11	SHORT CHIP	0
R2622	1-216-864-11	SHORT CHIP	0
R2623	1-216-833-11	METAL CHIP	10K 5% 1/10W
R2624	1-216-864-11	SHORT CHIP	0
R2627	1-216-864-11	SHORT CHIP	0
R2631	1-216-864-11	SHORT CHIP	0
R2633	1-216-813-11	METAL CHIP	220 5% 1/10W
R2634	1-216-805-11	METAL CHIP	47 5% 1/10W
R2635	1-216-864-11	SHORT CHIP	0
R2637	1-216-813-11	METAL CHIP	220 5% 1/10W
R2638	1-216-805-11	METAL CHIP	47 5% 1/10W
R2639	1-216-864-11	SHORT CHIP	0
R2641	1-216-813-11	METAL CHIP	220 5% 1/10W
R2642	1-216-805-11	METAL CHIP	47 5% 1/10W
R6054	1-216-864-11	SHORT CHIP	0
R7920	1-218-872-11	METAL CHIP	11K 0.5% 1/10W
R7993	1-218-866-11	METAL CHIP	6.2K 0.5% 1/10W
R7994	1-218-866-11	METAL CHIP	6.2K 0.5% 1/10W
R9560	1-216-864-11	SHORT CHIP	0
R9561	1-216-864-11	SHORT CHIP	0
R9562	1-216-864-11	SHORT CHIP	0
R9564	1-216-864-11	SHORT CHIP	0
R9565	1-216-864-11	SHORT CHIP	0
R9566	1-216-811-11	METAL CHIP	150 5% 1/10W
R9567	1-216-864-11	SHORT CHIP	0
R9568	1-216-811-11	METAL CHIP	150 5% 1/10W
R9569	1-216-864-11	SHORT CHIP	0
R9570	1-216-811-11	METAL CHIP	150 5% 1/10W
R9573	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
R9574	1-218-859-11	METAL CHIP	3.3K 0.5% 1/10W
R9581	1-216-811-11	METAL CHIP	150 5% 1/10W
R9582	1-216-811-11	METAL CHIP	150 5% 1/10W
R9583	1-216-811-11	METAL CHIP	150 5% 1/10W
R9619	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R9714	1-216-864-11	SHORT CHIP	0
R9715	1-216-864-11	SHORT CHIP	0

***A-1128-518-B H1E Board, Complete**

< CAPACITOR >

C9801	1-107-826-11	CERAMIC CHIP	0.1UF	10.00% 16V
C9802	1-107-826-11	CERAMIC CHIP	0.1UF	10.00% 16V

< CONNECTOR >

CN9802	1-778-507-21	PIN, CONNECTOR (PC BOARD)	4P
--------	--------------	---------------------------	----

REF.NO.	PART.NO	DESCRIPTION	REMARK
< DIODE >			
D9801	8-719-036-94	DIODE RD5.6SB-T1	
D9802	8-719-036-94	DIODE RD5.6SB-T1	
< RESISTOR >			
R9801	1-216-864-11	SHORT CHIP	0
R9802	1-218-837-11	METAL CHIP	390 0.5% 1/10W
R9803	1-218-827-11	METAL CHIP	150 0.5% 1/10W
R9804	1-218-865-11	METAL CHIP	5.6K 0.5% 1/10W
R9805	1-216-864-11	SHORT CHIP	0
R9806	1-218-839-11	METAL CHIP	470 0.5% 1/10W
R9807	1-218-847-11	METAL CHIP	1K 0.5% 1/10W
R9808	1-218-855-11	METAL CHIP	2.2K 0.5% 1/10W
R9810	1-216-864-11	SHORT CHIP	0
< SWITCH >			
S9801	1-771-105-11	SWITCH, TACTILE	
S9802	1-771-105-11	SWITCH, TACTILE	
S9803	1-771-105-11	SWITCH, TACTILE	
S9804	1-771-105-11	SWITCH, TACTILE	
S9805	1-771-105-11	SWITCH, TACTILE	
S9806	1-771-105-11	SWITCH, TACTILE	
S9807	1-771-105-11	SWITCH, TACTILE	
S9808	1-771-105-11	SWITCH, TACTILE	
< VARISTOR >			
VDR980	1-803-974-21	VARISTOR, CHIP	(1608)
VDR981	1-803-974-21	VARISTOR, CHIP	(1608)
VDR982	1-803-974-21	VARISTOR, CHIP	(1608)
VDR983	1-803-974-21	VARISTOR, CHIP	(1608)
VDR984	1-803-974-21	VARISTOR, CHIP	(1608)
VDR985	1-803-974-21	VARISTOR, CHIP	(1608)
VDR986	1-803-974-21	VARISTOR, CHIP	(1608)
VDR987	1-803-974-21	VARISTOR, CHIP	(1608)

***A-1168-958-A G2 Board, Complete
(KDL-S26A11E/ KDL-S32A11E Only)**

4-382-854-11	SCREW (M3X10), P, SW (+)
*7-322-065-48	RUBBER, SILICONE RTV (KE-3490)

< CAPACITOR >

C6000	Δ	1-161-964-91	CERAMIC	0.0047UF	250V
C6001	Δ	1-119-891-51	CERAMIC	220PF	10.00% 250V
C6002	Δ	1-165-529-31	MYLAR	0.22UF	10 250V
C6003	Δ	1-161-964-91	CERAMIC	0.0047UF	250V
C6004	Δ	1-165-529-31	MYLAR	0.22UF	10 250V
C6005	Δ	1-119-891-51	CERAMIC	220PF	10.00% 250V
C6008		1-112-312-11	ELECT (BLOCK)	270UF	20% 450V
C6010		1-128-954-11	ELECT	1000UF	20% 25V

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C6012	Δ 1-113-889-11	CERAMIC	0.001UF 20.00% 250V	C6524	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C6013	Δ 1-119-891-51	CERAMIC	220PF 10.00% 250V	C6525	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
C6014	Δ 1-119-891-51	CERAMIC	220PF 10.00% 250V	C6526	1-107-906-11	ELECT 10UF	20% 50V
C6100	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	C6527	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C6101	1-107-905-11	ELECT	4.7UF 20% 50V	C6528	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C6102	1-107-910-11	ELECT	100UF 20% 50V	< CONNECTOR >			
C6103	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	CN6001	Δ *1-793-660-11	PIN, CONNECTOR (PC BOARD) 3P	
C6104	1-100-831-91	CERAMIC CHIP	0.001UF 2% 50V	CN6200	*1-564-595-11	PLUG, CONNECTOR 14P	
C6105	1-107-906-11	ELECT	10UF 20% 50V	CN6202	*1-564-512-11	PLUG, CONNECTOR 9P	
C6108	1-115-340-11	CERAMIC CHIP	0.22UF 10.00% 25V	CN6203	*1-564-508-11	PLUG, CONNECTOR 5P	
C6109	1-107-888-11	ELECT	47UF 20% 25V	< DIODE >			
C6111	1-100-613-81	CERAMIC	470PF 5% 1KV	D6000	8-719-510-53	DIODE D4SB60L	
C6112	1-100-311-91	FILM	22000PF 3% 800V	D6001	8-719-948-45	DIODE ERA22-08	
C6116	1-163-021-91	CERAMIC CHIP	0.01UF 10.00% 50V	D6002	8-719-081-97	DIODE MMDL914T1	
C6200	1-164-227-11	CERAMIC CHIP	0.022UF 10.00% 25V	D6102	6-500-137-01	DIODE BAT54HT1	
C6202	1-165-738-21	ELECT	2700PF 20% 25V	D6103	8-719-979-64	DIODE UF4005/23	
C6203	1-107-907-11	ELECT	22UF 20% 50V	D6104	6-501-043-01	DIODE UMZ16NT106	
C6204	1-128-954-11	ELECT	1000UF 20% 25V	D6105	6-501-043-01	DIODE UMZ16NT106	
C6205	1-128-954-11	ELECT	1000UF 20% 25V	D6106	8-719-081-67	DIODE M1FM3	
C6206	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	D6107	8-719-081-67	DIODE M1FM3	
C6213	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	D6108	8-719-041-97	DIODE MA113-(TX)	
C6216	1-107-928-11	ELECT	4.7UF 20% 100V	D6200	8-719-510-09	DIODE D10SC6M	
C6217	1-135-362-31	ELECT	1500UF 20% 16V	D6201	8-719-510-09	DIODE D10SC6M	
C6300	Δ 1-161-964-91	CERAMIC	0.0047UF 250V	D6202	8-719-510-09	DIODE D10SC6M	
C6301	Δ 1-161-964-91	CERAMIC	0.0047UF 250V	D6203	8-719-510-09	DIODE D10SC6M	
C6304	1-100-780-31	ELECT	22UF 20% 450V	D6204	6-500-567-31	DIODE 10ERB20-TB3	
C6305	1-107-974-11	CERAMIC	47PF 5.00% 2KV	D6205	6-500-567-31	DIODE 10ERB20-TB3	
C6306	1-107-903-11	ELECT	2.2UF 20% 50V	D6300	8-719-077-76	DIODE D2SB60A-F04	
C6307	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	D6301	8-719-036-94	DIODE RD5.6SB-T1	
C6308	1-165-127-11	CERAMIC	470PF 10.00% 500V	D6302	6-500-849-01	DIODE ERA22-08KFLB	
C6309	1-107-905-11	ELECT	4.7UF 20% 50V	D6303	8-719-052-90	DIODE D1NL40-TA2	
C6310	1-107-910-11	ELECT	100UF 20% 50V	D6304	8-719-052-90	DIODE D1NL40-TA2	
C6314	1-165-729-31	ELECT	470UF 20% 16V	D6305	8-719-032-12	DIODE D1NS6	
C6315	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V	D6307	6-500-567-31	DIODE 10ERB20-TB3	
C6400	1-107-902-11	ELECT	1UF 20% 50V	D6400	8-719-081-97	DIODE MMDL914T1	
C6401	1-107-882-91	ELECT	100UF 20% 16V	D6402	8-719-081-97	DIODE MMDL914T1	
C6403	1-107-902-11	ELECT	1UF 20% 50V	D6407	8-719-082-04	DIODE MM3222VT1	
C6404	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V	D6408	8-719-081-97	DIODE MMDL914T1	
C6405	1-115-339-11	CERAMIC CHIP	0.1UF 10.00% 50V	D6501	6-501-043-01	DIODE UMZ16NT106	
C6412	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	D6502	8-719-081-97	DIODE MMDL914T1	
C6502	1-164-645-11	CERAMIC	1000PF 10.00% 500V	D6505	8-719-054-59	DIODE F5F05A60	
C6503	1-164-645-11	CERAMIC	1000PF 10.00% 500V	D6506	8-719-054-59	DIODE F5F05A60	
C6504	1-164-645-11	CERAMIC	1000PF 10.00% 500V	D6509	6-500-108-01	DIODE EP05FA20	
C6505	1-164-645-11	CERAMIC	1000PF 10.00% 500V	D6510	6-500-137-01	DIODE BAT54HT1	
C6517	1-117-227-11	MYLAR	1UF 10.00% 450V	D6511	8-719-081-97	DIODE MMDL914T1	
C6518	1-117-227-11	MYLAR	1UF 10.00% 450V	D6512	8-719-081-97	DIODE MMDL914T1	
C6519	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	D6513	8-719-081-97	DIODE MMDL914T1	
C6520	1-117-227-11	MYLAR	1UF 10.00% 450V				
C6521	1-107-823-11	CERAMIC CHIP	0.47UF 10.00% 16V				
C6522	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V				
C6523	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V				

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< FUSE >				< RESISTOR >			
F6000	Δ 1-576-867-11	FUSE	4A 250V	R6001	Δ 1-240-938-91	METAL	1.5M 5% 0.5W
FH6000	Δ 1-533-223-11	FUSE HOLDER		R6002	Δ 1-240-251-11	CEMENTED	6.8 5% 10W
FH6001	Δ 1-533-223-11	FUSE HOLDER		R6003	1-247-752-11	CARBON	1K 5% 1/2W
< FERRITE BEAD >				R6004	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
FB6100	1-410-397-21	FERRITE	1.1UH	R6014	1-215-859-00	METAL OXIDE	22 5% 1W
FB6101	1-410-397-21	FERRITE	1.1UH	R6016	1-243-681-71	METAL OXIDE	33 5% 1W
< IC >				R6101	1-249-385-11	CARBON	2.2 5% 1/4W
IC6100	6-706-852-01	IC CXD9841M		R6102	Δ 1-202-933-61	FUSIBLE	0.1 10% 1/2W
IC6200	8-759-682-42	IC MM1431ATT		R6103	1-218-823-11	METAL CHIP	100 0.5% 1/10W
IC6300	6-600-279-01	IC STR-A6169		R6104	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
IC6301	8-759-682-42	IC MM1431ATT		R6105	1-218-760-11	METAL CHIP	220K 0.5% 1/10W
IC6402	8-759-682-42	IC MM1431ATT		R6106	1-218-760-11	METAL CHIP	220K 0.5% 1/10W
IC6502	6-704-815-01	IC FA5501N-TE1		R6107	1-218-760-11	METAL CHIP	220K 0.5% 1/10W
IC6503	8-759-682-42	IC MM1431ATT		R6108	1-208-836-11	METAL CHIP	180K 0.5% 1/10W
< COIL >				R6109	1-208-834-11	METAL CHIP	150K 0.5% 1/10W
L6000	Δ 1-456-678-11	LINE FILTER COIL		R6110	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W
L6001	Δ 1-456-678-11	LINE FILTER COIL		R6111	1-218-873-11	METAL CHIP	12K 0.5% 1/10W
L6201	1-406-971-21	INDUCTOR	10UH	R6114	1-211-969-11	METAL CHIP	10 0.5% 1/10W
L6202	1-406-971-21	INDUCTOR	10UH	R6116	1-216-009-91	RES-CHIP	22 5% 1/10W
L6300	1-414-934-21	INDUCTOR	10UH	R6117	1-216-009-91	RES-CHIP	22 5% 1/10W
L6500	1-457-039-12	INDUCTOR	110UH	R6118	1-216-833-11	METAL CHIP	10K 5% 1/10W
L6502	1-456-982-11	INDUCTOR	295UH	R6119	1-216-833-11	METAL CHIP	10K 5% 1/10W
< PHOTOCOUPLER >				R6122	1-245-315-71	METAL OXIDE	0.1 5% 2W
PH6000	Δ 6-600-187-01	PHOTO COUPLER	PC123Y22JOOF	R6123	1-218-847-11	METAL CHIP	1K 0.5% 1/10W
PH6100	Δ 6-600-187-01	PHOTO COUPLER	PC123Y22JOOF	R6127	1-216-857-11	METAL CHIP	1M 5% 1/10W
PH6300	Δ 6-600-187-01	PHOTO COUPLER	PC123Y22JOOF	R6200	1-216-821-11	METAL CHIP	1K 5% 1/10W
PH6400	Δ 6-600-187-01	PHOTO COUPLER	PC123Y22JOOF	R6201	1-216-821-11	METAL CHIP	1K 5% 1/10W
PH6402	Δ 6-600-187-01	PHOTO COUPLER	PC123Y22JOOF	R6203	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
PH6501	Δ 6-600-187-01	PHOTO COUPLER	PC123Y22JOOF	R6204	1-218-843-11	METAL CHIP	680 0.5% 1/10W
< TRANSISTOR >				R6205	1-218-865-11	METAL CHIP	5.6K 0.5% 1/10W
Q6100	6-551-297-01	TRANSISTOR 2SK3568 (LBS1SONY.Q)		R6207	1-218-847-11	METAL CHIP	1K 0.5% 1/10W
Q6101	6-551-297-01	TRANSISTOR 2SK3568 (LBS1SONY.Q)		R6208	1-249-377-11	CARBON	0.47 5% 1/4W
Q6400	8-729-804-41	TRANSISTOR 2SB1122-S		R6226	1-249-389-11	CARBON	4.7 5% 1/4W
Q6401	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6300	1-249-381-11	CARBON	1 5% 1/4W
Q6402	8-729-023-22	TRANSISTOR 2SD2114K		R6301	1-216-353-00	METAL OXIDE	2.2 5% 1W
Q6403	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		R6305	1-260-129-11	CARBON	330K 5% 1/2W
Q6404	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6306	1-216-813-11	METAL CHIP	220 5% 1/10W
Q6500	6-551-336-01	TRANSISTOR 2SK3934 (LBS1SONY.Q)		R6307	1-249-385-11	CARBON	2.2 5% 1/4W
Q6501	8-729-820-90	TRANSISTOR 2SD1621-ST		R6308	1-249-393-11	CARBON	10 5% 1/4W
Q6502	8-729-804-41	TRANSISTOR 2SB1122-S		R6310	1-216-817-11	METAL CHIP	470 5% 1/10W
Q6503	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		R6311	1-216-823-11	METAL CHIP	1.5K 5% 1/10W
Q6504	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6313	1-216-809-11	METAL CHIP	100 5% 1/10W
				R6314	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
				R6315	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
				R6400	1-216-833-11	METAL CHIP	10K 5% 1/10W
				R6401	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W
				R6402	1-216-833-11	METAL CHIP	10K 5% 1/10W
				R6403	1-218-887-11	METAL CHIP	47K 0.5% 1/10W

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G2

N1

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R6404	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R6551	1-249-393-11	CARBON	10	5%	1/4W
R6405	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R6552	1-216-809-11	METAL CHIP	100	5%	1/10W
R6407	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R6553	1-216-821-11	METAL CHIP	1K	5%	1/10W
R6408	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R6554	1-216-833-11	METAL CHIP	10K	5%	1/10W
R6409	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6555	1-216-845-11	METAL CHIP	100K	5%	1/10W
R6410	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R6556	1-216-837-11	METAL CHIP	22K	5%	1/10W
R6412	1-216-833-11	METAL CHIP	10K	5%	1/10W	R6557	1-218-823-11	METAL CHIP	100	0.5%	1/10W
R6413	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	< RELAY >					
R6436	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	RY6003	△	1-755-418-12	RELAY (AC POWER)		
R6437	1-216-821-11	METAL CHIP	1K	5%	1/10W	RY6004	△	1-755-418-12	RELAY (AC POWER)		
R6441	1-216-837-11	METAL CHIP	22K	5%	1/10W	< TRANSFORMER >					
R6442	1-216-833-11	METAL CHIP	10K	5%	1/10W	T6100	△	1-443-589-11	CONVERTER TRANSFORMER (PIT)		
R6452	1-218-851-11	METAL CHIP	1.5K	0.5%	1/10W	T6101	△	1-443-588-11	CONVERTER TRANSFORMER (PIT)		
R6453	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	T6300		1-443-313-21	TRANSFORMER, CONVERTER (SBT)		
R6454	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	< THERMISTOR >					
R6455	1-218-899-11	METAL CHIP	150K	0.5%	1/16W	TH6300		1-803-586-41	THERMISTOR		
R6456	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	< VARISTOR >					
R6457	1-218-903-11	METAL CHIP	220K	0.5%	1/10W	VD6000	△	1-804-996-21	VARISTOR		
R6458	1-216-839-11	METAL CHIP	33K	5%	1/10W	VD6001	△	1-804-996-21	VARISTOR		
R6459	1-218-831-11	METAL CHIP	220	0.5%	1/10W	*A-1139-853-A N1 Board, Complete					
R6502	1-215-882-00	METAL OXIDE	22	5%	2W	*1-963-849-11 CORD WITH COAXIAL 470MM					
R6503	1-215-882-00	METAL OXIDE	22	5%	2W	< CAPACITOR >					
R6505	1-216-864-11	SHORT CHIP	0			C0001		1-128-536-11	ELECT CHIP	100UF	20.00% 25V
R6507	1-216-821-11	METAL CHIP	1K	5%	1/10W	C0002		1-100-631-21	ELECT CHIP	82UF	20% 20V
R6508	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	C0003		1-115-339-11	CERAMIC CHIP	0.1UF	10.00% 50V
R6509	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	C0004		1-165-671-21	ELECT CHIP	470UF	20% 6.3V
R6512	1-218-907-11	METAL CHIP	330K	0.5%	1/10W	C0005		1-126-392-11	ELECT CHIP	100UF	20.00% 6.3V
R6513	1-218-879-11	METAL CHIP	22K	0.5%	1/10W	C0007		1-125-777-11	CERAMIC CHIP	0.1UF	10.00% 10V
R6514	1-218-895-11	METAL CHIP	100K	0.5%	1/10W	C0008		1-126-392-11	ELECT CHIP	100UF	20.00% 6.3V
R6516	1-218-760-11	METAL CHIP	220K	0.5%	1/10W	C0009		1-125-777-11	CERAMIC CHIP	0.1UF	10.00% 10V
R6517	1-218-760-11	METAL CHIP	220K	0.5%	1/10W	C0015		1-100-567-81	CERAMIC CHIP	10000PF	10% 25V
R6518	1-218-760-11	METAL CHIP	220K	0.5%	1/10W	C0016		1-125-777-11	CERAMIC CHIP	0.1UF	10.00% 10V
R6519	1-218-760-11	METAL CHIP	220K	0.5%	1/10W	C0017		1-117-681-11	ELECT CHIP	100UF	20.00% 16V
R6526	1-218-760-11	METAL CHIP	220K	0.5%	1/10W	C0018		1-162-974-11	CERAMIC CHIP	0.01UF	50V
R6527	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	C0019		1-162-974-11	CERAMIC CHIP	0.01UF	50V
R6528	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	C0020		1-128-991-21	ELECT CHIP	10UF	20% 50V
R6531	1-217-611-00	METAL	0.1	10%	2W	C0021		1-125-777-11	CERAMIC CHIP	0.1UF	10.00% 10V
R6532	1-216-845-11	METAL CHIP	100K	5%	1/10W	C0022		1-125-777-11	CERAMIC CHIP	0.1UF	10.00% 10V
R6533	1-216-833-11	METAL CHIP	10K	5%	1/10W	C0023		1-100-053-21	ELECT CHIP	220UF	20% 6.3V
R6534	1-216-809-11	METAL CHIP	100	5%	1/10W	C0025		1-128-991-21	ELECT CHIP	10UF	20% 50V
R6537	1-249-389-11	CARBON	4.7	5%	1/4W	C0026		1-115-339-11	CERAMIC CHIP	0.1UF	10.00% 50V
R6538	1-249-405-11	CARBON	100	5%	1/4W	C0027		1-100-566-91	CERAMIC CHIP	0.1UF	10.00% 25V
R6539	1-216-809-11	METAL CHIP	100	5%	1/10W						
R6542	1-216-835-11	METAL CHIP	15K	5%	1/10W						
R6545	1-208-840-11	METAL CHIP	270K	0.5%	1/10W						
R6546	1-208-840-11	METAL CHIP	270K	0.5%	1/10W						
R6547	1-208-840-11	METAL CHIP	270K	0.5%	1/10W						
R6548	1-208-840-11	METAL CHIP	270K	0.5%	1/10W						
R6549	1-218-760-11	METAL CHIP	220K	0.5%	1/10W						
R6550	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W						

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

N1 BE

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C0028	1-117-681-11	ELECT CHIP	100UF 20.00% 16V	R0019	1-216-864-11	SHORT CHIP	0
C0029	1-126-392-11	ELECT CHIP	100UF 20.00% 6.3V	R0020	1-216-864-11	SHORT CHIP	0
C0035	1-100-053-21	ELECT CHIP	220UF 20% 6.3V	R0021	1-218-990-81	SHORT CHIP	0
< CONNECTOR >				R0022	1-218-990-81	SHORT CHIP	0
CN0001	*1-779-268-21	PIN, CONNECTOR (1.5MM) (SMD) 11P		R0027	1-218-855-11	METAL CHIP	2.2K 0.5% 1/10W
CN0002	*1-766-376-11	PIN, CONNECTOR (1.5MM) (SMD) 9P		< TUNER >			
CN0003	*1-764-080-21	PIN, CONNECTOR (PC BOARD) 8P		R0028	1-218-855-11	METAL CHIP	2.2K 0.5% 1/10W
CN0005	*1-770-468-21	PIN, CONNECTOR (PC BOARD) 10P		TU0002	1-417-580-12	RF SPLITTER	
< DIODE >				*A-1128-517-L BE Board, Complete			
D0001	8-719-081-97	DIODE MMDL914T1		< CAPACITOR >			
D0002	8-719-073-34	DIODE EC21QS03L-TE12L		C1000	1-164-156-11	CERAMIC CHIP 0.1UF	25V
D0003	8-719-081-97	DIODE MMDL914T1		C1001	1-164-156-11	CERAMIC CHIP 0.1UF	25V
D0006	8-719-083-87	DIODE UDZS-TE17-33B		C1002	1-164-156-11	CERAMIC CHIP 0.1UF	25V
D0007	8-719-081-97	DIODE MMDL914T1		C1003	1-164-156-11	CERAMIC CHIP 0.1UF	25V
D0008	8-719-083-58	DIODE UDZSTE-173.9B		C1004	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
< FUSE >				C1005	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
F0001	Δ 1-576-415-21	FUSE	2A 32V	C1006	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
< FERRITE BEAD >				C1007	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
FB0001	1-469-869-21	FERRITE	0UH	C1008	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
FB0002	1-469-869-21	FERRITE	0UH	C1009	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
FB0003	1-469-869-21	FERRITE	0UH	C1010	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
FB0004	1-469-869-21	FERRITE	0UH	C1011	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
< FILTER >				C1012	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
FL0001	1-239-899-21	FERRITE	0UH	C1014	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
< IC >				C1015	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
IC0001	6-702-142-01	IC PQ1CY10322P		C1016	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
IC0002	6-706-953-01	IC PQ070XZ1HZPH		C1017	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
IC0004	8-759-460-79	IC BA09FP-E2		C1018	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
< COIL >				C1019	1-162-921-11	CERAMIC CHIP 33PF	5.00% 50V
L0001	1-409-556-11	INDUCTOR	47UH	C1020	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
L0002	1-400-175-21	INDUCTOR	47UH	C1021	1-162-921-11	CERAMIC CHIP 33PF	5.00% 50V
L0004	1-412-006-31	INDUCTOR	10UH	C1022	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
< RESISTOR >				C1023	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
R0002	1-208-696-11	METAL CHIP	3.6K 0.5% 1/16W	C1024	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
R0004	1-208-691-11	METAL CHIP	2.2K 0.5% 1/16W	C1026	1-126-205-11	ELECT CHIP 47UF	20.00% 6.3V
R0010	1-216-821-11	METAL CHIP	1K 5% 1/10W	C1027	1-164-156-11	CERAMIC CHIP 0.1UF	25V
R0011	1-216-841-11	METAL CHIP	47K 5% 1/10W	C1029	1-126-396-11	ELECT CHIP 47UF	20.00% 16V
R0012	1-218-941-81	RES-CHIP	100 5% 1/16W	C1032	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
R0013	1-218-941-81	RES-CHIP	100 5% 1/16W	C1037	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
R0017	1-218-965-11	RES-CHIP	10K 5% 1/16W	C1047	1-164-156-11	CERAMIC CHIP 0.1UF	25V
R0018	1-218-953-11	RES-CHIP	1K 5% 1/16W	C1048	1-164-156-11	CERAMIC CHIP 0.1UF	25V
				C1049	1-164-156-11	CERAMIC CHIP 0.1UF	25V
				C1050	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
				C1051	1-126-390-11	ELECT CHIP 22UF	20.00% 6.3V
				C1054	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
				C1055	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C1060	1-164-842-11	CERAMIC CHIP 2PF	0.25PF 50V	C5050	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C1062	1-164-842-11	CERAMIC CHIP 2PF	0.25PF 50V	C5051	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1063	1-126-205-11	ELECT CHIP 47UF	20.00% 6.3V	C5052	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C1064	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C5053	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C1065	1-115-456-21	DOUBLE LAYER 0.22F	5.5V	C5054	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C1096	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C5055	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5000	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5056	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C5001	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5057	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5003	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5058	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5004	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5059	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5005	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5060	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5006	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5061	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5007	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5062	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5009	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5063	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5010	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5064	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5012	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5065	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5013	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5066	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5014	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5067	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5015	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5068	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5017	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5069	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C5018	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5070	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5019	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5071	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5020	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5072	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5021	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5073	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5022	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5074	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5024	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5075	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5026	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5076	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5027	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5077	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5028	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5078	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5029	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5079	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C5030	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5080	1-162-962-11	CERAMIC CHIP 470PF	10.00% 50V
C5031	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V	C5081	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5032	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5082	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5033	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5083	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5034	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5084	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5035	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5085	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5036	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5086	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5037	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5087	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5038	1-162-916-11	CERAMIC CHIP 12PF	5.00% 50V	C5088	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5039	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5089	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5040	1-124-779-00	ELECT CHIP 10UF	20.00% 16V	C5090	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5041	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5091	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5042	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C5092	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5043	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5093	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5044	1-162-917-11	CERAMIC CHIP 15PF	5.00% 50V	C5094	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5045	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V	C5095	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5046	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5096	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5047	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5097	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
C5048	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5100	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5049	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C5101	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C5102	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5727	1-135-595-11	ELECT CHIP 100UF	20% 6.3V
C5103	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5728	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C5104	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5729	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
C5105	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5730	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C5106	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5731	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
C5107	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5740	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C5108	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5741	1-128-536-11	ELECT CHIP 100UF	20.00% 25V
C5109	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5742	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C5110	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C5743	1-128-536-11	ELECT CHIP 100UF	20.00% 25V
C5111	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7400	1-100-567-81	CERAMIC CHIP 10000PF	10% 25V
C5112	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7401	1-100-567-81	CERAMIC CHIP 10000PF	10% 25V
C5113	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7402	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V
C5114	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7403	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V
C5115	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7404	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C5116	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7405	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C5117	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	C7406	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V
C5404	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7407	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V
C5500	1-126-405-11	ELECT CHIP 10UF	20.00% 50V	C7408	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5501	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7409	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5502	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7411	1-126-205-11	ELECT CHIP 47UF	20.00% 6.3V
C5503	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C7412	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
C5504	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7413	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C5505	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C7416	1-137-987-81	CERAMIC CHIP 0.068UF	10% 10V
C5506	1-126-398-11	ELECT CHIP 4.7UF	20.00% 35V	C7417	1-164-882-11	CERAMIC CHIP 220PF	5.00% 16V
C5507	1-162-974-11	CERAMIC CHIP 0.01UF	50V	C7418	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C5508	1-162-974-11	CERAMIC CHIP 0.01UF	50V	C7422	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5509	1-126-405-11	ELECT CHIP 10UF	20.00% 50V	C7423	1-115-566-11	CERAMIC CHIP 4.7UF	10.00% 10V
C5510	1-162-974-11	CERAMIC CHIP 0.01UF	50V	C7425	1-126-401-21	ELECT CHIP 1UF	20.00% 50V
C5511	1-162-974-11	CERAMIC CHIP 0.01UF	50V	C7426	1-164-156-11	CERAMIC CHIP 0.1UF	25V
C5512	1-162-974-11	CERAMIC CHIP 0.01UF	50V	C7427	1-164-882-11	CERAMIC CHIP 220PF	5.00% 16V
C5513	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C7428	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5514	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	C7434	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V
C5515	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V	C7437	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5516	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	C7438	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5700	1-164-004-11	CERAMIC CHIP 0.1UF	10.00% 25V	C7439	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C5701	1-128-536-11	ELECT CHIP 100UF	20.00% 25V	C7441	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C5702	1-128-536-11	ELECT CHIP 100UF	20.00% 25V	C8535	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5703	1-100-911-11	CERAMIC CHIP 4.7UF	10.00% 25V	C9001	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C5704	1-100-911-11	CERAMIC CHIP 4.7UF	10.00% 25V	C9002	1-127-573-11	CERAMIC CHIP 1UF	10% 16V
C5705	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C9003	1-163-037-11	CERAMIC CHIP 0.022UF	10.00% 50V
C5706	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	C9004	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C5707	1-135-372-31	ELECT 470UF	20% 10V	< CONNECTOR >			
C5709	1-135-372-31	ELECT 470UF	20% 10V	CN1001	*1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P	
C5720	1-164-156-11	CERAMIC CHIP 0.1UF	25V	CN1003	1-794-032-21	PIN, CONNECTOR (PC BOARD) 11P	
C5721	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	CN1004	1-779-936-51	CONNECTOR, FFC/FPC 18P	
C5722	1-164-156-11	CERAMIC CHIP 0.1UF	25V	CN1005	*1-564-508-11	PLUG, CONNECTOR 5P	
C5723	1-135-595-11	ELECT CHIP 100UF	20% 6.3V	CN1007	1-779-884-11	CONNECTOR 4P	
C5724	1-164-156-11	CERAMIC CHIP 0.1UF	25V	CN5000	1-818-656-21	HEADER ASSEMBLY 30P	
C5725	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V				
C5726	1-164-156-11	CERAMIC CHIP 0.1UF	25V				

BE

- 94 -

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

BE

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< PROTECTOR MODULE >				R1040	1-216-809-11	METAL CHIP	100 5% 1/10W
PS5700 Δ	1-533-652-41	IC LINK	2A 24V	R1041	1-216-809-11	METAL CHIP	100 5% 1/10W
< TRANSISTOR >				R1042	1-218-990-81	SHORT CHIP	0
Q1001	8-729-010-05	TRANSISTOR MSB709-RT1		R1043	1-218-990-81	SHORT CHIP	0
Q1011	8-729-045-62	TRANSISTOR 2SK2158-T2B		R1044	1-218-990-81	SHORT CHIP	0
Q1012	8-729-045-62	TRANSISTOR 2SK2158-T2B		R1045	1-218-953-11	RES-CHIP	1K 5% 1/16W
Q5700	8-729-046-04	TRANSISTOR FDS6690A		R1046	1-218-990-81	SHORT CHIP	0
Q7401	8-729-927-99	TRANSISTOR 2SC4617R		R1047	1-218-990-81	SHORT CHIP	0
Q7402	8-729-927-99	TRANSISTOR 2SC4617R		R1053	1-218-937-11	RES-CHIP	47 5% 1/16W
Q7410	8-729-928-19	TRANSISTOR 2SA1774R		R1054	1-218-937-11	RES-CHIP	47 5% 1/16W
Q7412	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)		R1056	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q7415	8-729-421-22	TRANSISTOR UN2211		R1059	1-216-809-11	METAL CHIP	100 5% 1/10W
Q7416	8-729-010-05	TRANSISTOR MSB709-RT1		R1060	1-208-683-11	METAL CHIP	1K 0.5% 1/16W
Q7417	8-729-010-05	TRANSISTOR MSB709-RT1		R1062	1-218-965-11	RES-CHIP	10K 5% 1/16W
Q7418	8-729-010-05	TRANSISTOR MSB709-RT1		R1063	1-216-809-11	METAL CHIP	100 5% 1/10W
Q7419	8-729-927-99	TRANSISTOR 2SC4617R		R1064	1-216-809-11	METAL CHIP	100 5% 1/10W
Q7420	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)		R1065	1-216-809-11	METAL CHIP	100 5% 1/10W
Q7421	8-729-028-73	TRANSISTOR DTA114EUA-T106		R1066	1-218-990-81	SHORT CHIP	0
Q7422	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)		R1068	1-218-965-11	RES-CHIP	10K 5% 1/16W
< RESISTOR >				R1069	1-218-965-11	RES-CHIP	10K 5% 1/16W
R1001	1-216-809-11	METAL CHIP	100 5% 1/10W	R1073	1-218-965-11	RES-CHIP	10K 5% 1/16W
R1002	1-218-990-81	SHORT CHIP	0	R1075	1-216-813-11	METAL CHIP	220 5% 1/10W
R1003	1-218-990-81	SHORT CHIP	0	R1076	1-218-965-11	RES-CHIP	10K 5% 1/16W
R1009	1-218-990-81	SHORT CHIP	0	R1082	1-218-990-81	SHORT CHIP	0
R1010	1-218-990-81	SHORT CHIP	0	R1083	1-218-965-11	RES-CHIP	10K 5% 1/16W
R1011	1-218-990-81	SHORT CHIP	0	R1102	1-218-990-81	SHORT CHIP	0
R1012	1-218-990-81	SHORT CHIP	0	R1103	1-218-990-81	SHORT CHIP	0
R1013	1-218-990-81	SHORT CHIP	0	R1104	1-218-990-81	SHORT CHIP	0
R1014	1-218-990-81	SHORT CHIP	0	R1105	1-218-990-81	SHORT CHIP	0
R1015	1-218-990-81	SHORT CHIP	0	R1106	1-218-990-81	SHORT CHIP	0
R1016	1-218-990-81	SHORT CHIP	0	R1107	1-218-990-81	SHORT CHIP	0
R1017	1-218-990-81	SHORT CHIP	0	R1108	1-218-990-81	SHORT CHIP	0
R1019	1-218-973-11	RES-CHIP	47K 5% 1/16W	R1109	1-218-990-81	SHORT CHIP	0
R1020	1-218-973-11	RES-CHIP	47K 5% 1/16W	R1110	1-218-990-81	SHORT CHIP	0
R1021	1-218-973-11	RES-CHIP	47K 5% 1/16W	R1111	1-218-990-81	SHORT CHIP	0
R1027	1-218-990-81	SHORT CHIP	0	R1112	1-218-990-81	SHORT CHIP	0
R1028	1-216-809-11	METAL CHIP	100 5% 1/10W	R1115	1-216-864-11	SHORT CHIP	0
R1030	1-216-809-11	METAL CHIP	100 5% 1/10W	R1120	1-216-864-11	SHORT CHIP	0
R1031	1-218-847-11	METAL CHIP	1K 0.5% 1/10W	R1126	1-218-941-81	RES-CHIP	100 5% 1/16W
R1033	1-218-847-11	METAL CHIP	1K 0.5% 1/10W	R1200	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R1034	1-218-990-81	SHORT CHIP	0	R1201	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R1035	1-218-853-11	METAL CHIP	1.8K 0.5% 1/10W	R1202	1-218-990-81	SHORT CHIP	0
R1036	1-216-809-11	METAL CHIP	100 5% 1/10W	R1203	1-216-864-11	SHORT CHIP	0
R1037	1-216-809-11	METAL CHIP	100 5% 1/10W	R1204	1-218-965-11	RES-CHIP	10K 5% 1/16W
R1038	1-216-809-11	METAL CHIP	100 5% 1/10W	R1205	1-218-965-11	RES-CHIP	10K 5% 1/16W
R1039	1-218-953-11	RES-CHIP	1K 5% 1/16W	R1206	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1207	1-218-990-81	SHORT CHIP	0
				R1208	1-216-864-11	SHORT CHIP	0
				R1209	1-218-965-11	RES-CHIP	10K 5% 1/16W
				R1215	1-216-864-11	SHORT CHIP	0

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R1218	1-216-864-11	SHORT CHIP	0			R5425	1-216-864-11	SHORT CHIP	0		
R1220	1-216-864-11	SHORT CHIP	0			R5426	1-216-864-11	SHORT CHIP	0		
R1223	1-216-864-11	SHORT CHIP	0			R5427	1-216-864-11	SHORT CHIP	0		
R1224	1-216-864-11	SHORT CHIP	0			R5428	1-216-864-11	SHORT CHIP	0		
R1231	1-216-864-11	SHORT CHIP	0			R5500	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1232	1-216-864-11	SHORT CHIP	0			R5501	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1250	1-218-990-81	SHORT CHIP	0			R5502	1-211-986-11	METAL CHIP	51	0.5%	1/10W
R5000	1-216-864-11	SHORT CHIP	0			R5503	1-211-986-11	METAL CHIP	51	0.5%	1/10W
R5001	1-216-864-11	SHORT CHIP	0			R5504	1-218-933-11	RES-CHIP	22	5%	1/16W
R5002	1-216-864-11	SHORT CHIP	0			R5505	1-218-933-11	RES-CHIP	22	5%	1/16W
R5003	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5506	1-218-933-11	RES-CHIP	22	5%	1/16W
R5005	1-216-864-11	SHORT CHIP	0			R5507	1-218-933-11	RES-CHIP	22	5%	1/16W
R5007	1-216-864-11	SHORT CHIP	0			R5508	1-218-933-11	RES-CHIP	22	5%	1/16W
R5008	1-216-864-11	SHORT CHIP	0			R5509	1-218-933-11	RES-CHIP	22	5%	1/16W
R5009	1-216-864-11	SHORT CHIP	0			R5510	1-218-990-81	SHORT CHIP	0		
R5010	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5511	1-218-990-81	SHORT CHIP	0		
R5012	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R5512	1-218-933-11	RES-CHIP	22	5%	1/16W
R5013	1-216-864-11	SHORT CHIP	0			R5513	1-218-933-11	RES-CHIP	22	5%	1/16W
R5015	1-216-864-11	SHORT CHIP	0			R5514	1-218-933-11	RES-CHIP	22	5%	1/16W
R5016	1-216-864-11	SHORT CHIP	0			R5515	1-218-933-11	RES-CHIP	22	5%	1/16W
R5017	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5516	1-218-933-11	RES-CHIP	22	5%	1/16W
R5018	1-218-990-81	SHORT CHIP	0			R5700	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5022	1-216-864-11	SHORT CHIP	0			R5703	1-216-295-91	SHORT CHIP	0		
R5023	1-216-864-11	SHORT CHIP	0			R5704	1-216-841-11	METAL CHIP	47K	5%	1/10W
R5032	1-218-933-11	RES-CHIP	22	5%	1/16W	R5705	1-216-295-91	SHORT CHIP	0		
R5033	1-218-933-11	RES-CHIP	22	5%	1/16W	R5706	1-216-295-91	SHORT CHIP	0		
R5034	1-218-990-81	SHORT CHIP	0			R5707	1-216-841-11	METAL CHIP	47K	5%	1/10W
R5035	1-216-295-91	SHORT CHIP	0			R5708	1-216-295-91	SHORT CHIP	0		
R5036	1-216-295-91	SHORT CHIP	0			R5709	1-216-295-91	SHORT CHIP	0		
R5037	1-216-864-11	SHORT CHIP	0			R5710	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W
R5038	1-216-864-11	SHORT CHIP	0			R5711	1-218-853-11	METAL CHIP	1.8K	0.5%	1/10W
R5039	1-216-864-11	SHORT CHIP	0			R5712	1-216-295-91	SHORT CHIP	0		
R5040	1-216-864-11	SHORT CHIP	0			R5714	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W
R5041	1-216-864-11	SHORT CHIP	0			R5715	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W
R5043	1-216-841-11	METAL CHIP	47K	5%	1/10W	R5716	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W
R5400	1-216-805-11	METAL CHIP	47	5%	1/10W	R5717	1-216-295-91	SHORT CHIP	0		
R5404	1-216-805-11	METAL CHIP	47	5%	1/10W	R5718	1-216-295-91	SHORT CHIP	0		
R5409	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5719	1-216-295-91	SHORT CHIP	0		
R5410	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5720	1-216-295-91	SHORT CHIP	0		
R5411	1-216-805-11	METAL CHIP	47	5%	1/10W	R5721	1-216-295-91	SHORT CHIP	0		
R5412	1-216-805-11	METAL CHIP	47	5%	1/10W	R5722	1-216-295-91	SHORT CHIP	0		
R5413	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5723	1-216-295-91	SHORT CHIP	0		
R5414	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5724	1-216-295-91	SHORT CHIP	0		
R5417	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5725	1-216-295-91	SHORT CHIP	0		
R5418	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5726	1-216-295-91	SHORT CHIP	0		
R5419	1-216-821-11	METAL CHIP	1K	5%	1/10W	R5727	1-216-295-91	SHORT CHIP	0		
R5420	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5728	1-216-295-91	SHORT CHIP	0		
R5421	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R5729	1-216-821-11	METAL CHIP	1K	5%	1/10W
R5422	1-216-845-11	METAL CHIP	100K	5%	1/10W	R5730	1-216-295-91	SHORT CHIP	0		
R5424	1-216-864-11	SHORT CHIP	0			R5731	1-216-295-91	SHORT CHIP	0		

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R5732	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W	R7493	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5733	1-216-821-11	METAL CHIP	1K	5%	1/10W	R7494	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5740	1-216-295-91	SHORT CHIP	0			R7495	1-216-841-11	METAL CHIP	47K	5%	1/10W
R5742	1-216-295-91	SHORT CHIP	0			R7496	1-218-965-11	RES-CHIP	10K	5%	1/16W
R7400	1-208-713-11	METAL CHIP	18K	0.5%	1/16W	R7497	1-218-965-11	RES-CHIP	10K	5%	1/16W
R7401	1-208-715-11	METAL CHIP	22K	0.5%	1/16W	R7499	1-218-965-11	RES-CHIP	10K	5%	1/16W
R7402	1-218-949-11	RES-CHIP	470	5%	1/16W	R7504	1-216-809-11	METAL CHIP	100	5%	1/10W
R7403	1-208-715-11	METAL CHIP	22K	0.5%	1/16W	R7505	1-216-809-11	METAL CHIP	100	5%	1/10W
R7404	1-208-713-11	METAL CHIP	18K	0.5%	1/16W	R7506	1-216-809-11	METAL CHIP	100	5%	1/10W
R7407	1-218-949-11	RES-CHIP	470	5%	1/16W	R7507	1-216-809-11	METAL CHIP	100	5%	1/10W
R7410	1-218-933-11	RES-CHIP	22	5%	1/16W	R7509	1-216-809-11	METAL CHIP	100	5%	1/10W
R7411	1-218-933-11	RES-CHIP	22	5%	1/16W	R7510	1-216-809-11	METAL CHIP	100	5%	1/10W
R7413	1-218-949-11	RES-CHIP	470	5%	1/16W	R7511	1-216-809-11	METAL CHIP	100	5%	1/10W
R7417	1-218-973-11	RES-CHIP	47K	5%	1/16W	R7512	1-216-809-11	METAL CHIP	100	5%	1/10W
R7418	1-218-965-11	RES-CHIP	10K	5%	1/16W	R7514	1-218-990-81	SHORT CHIP	0		
R7420	1-218-955-11	RES-CHIP	1.5K	5%	1/16W	R7515	1-218-990-81	SHORT CHIP	0		
R7424	1-218-937-11	RES-CHIP	47	5%	1/16W	R7516	1-218-990-81	SHORT CHIP	0		
R7432	1-218-990-81	SHORT CHIP	0			R7517	1-218-990-81	SHORT CHIP	0		
R7433	1-218-953-11	RES-CHIP	1K	5%	1/16W	R7518	1-218-990-81	SHORT CHIP	0		
R7435	1-208-931-11	METAL CHIP	68K	0.5%	1/16W	R7519	1-218-990-81	SHORT CHIP	0		
R7436	1-218-953-11	RES-CHIP	1K	5%	1/16W	R7520	1-216-864-11	SHORT CHIP	0		
R7439	1-218-990-81	SHORT CHIP	0			R7521	1-218-990-81	SHORT CHIP	0		
R7440	1-218-990-81	SHORT CHIP	0			R7522	1-216-295-91	SHORT CHIP	0		
R7443	1-218-990-81	SHORT CHIP	0			R7523	1-218-990-81	SHORT CHIP	0		
R7444	1-218-990-81	SHORT CHIP	0			R7524	1-218-990-81	SHORT CHIP	0		
R7445	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W	R7525	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R7446	1-218-965-11	RES-CHIP	10K	5%	1/16W	R7526	1-216-817-11	METAL CHIP	470	5%	1/10W
R7447	1-218-965-11	RES-CHIP	10K	5%	1/16W	R7527	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R7448	1-218-990-81	SHORT CHIP	0			R7528	1-216-830-11	METAL CHIP	5.6K	5%	1/10W
R7449	1-218-953-11	RES-CHIP	1K	5%	1/16W	R7529	1-218-990-81	SHORT CHIP	0		
R7450	1-208-927-11	METAL CHIP	47K	0.5%	1/16W	R7531	1-218-990-81	SHORT CHIP	0		
R7455	1-218-990-81	SHORT CHIP	0			R7532	1-218-990-81	SHORT CHIP	0		
R7456	1-208-691-11	METAL CHIP	2.2K	0.5%	1/16W	R7533	1-218-990-81	SHORT CHIP	0		
R7459	1-208-691-11	METAL CHIP	2.2K	0.5%	1/16W	R7534	1-218-990-81	SHORT CHIP	0		
R7460	1-218-849-11	METAL CHIP	1.2K	0.5%	1/10W	R7535	1-218-990-81	SHORT CHIP	0		
R7461	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R7537	1-218-990-81	SHORT CHIP	0		
R7469	1-218-849-11	METAL CHIP	1.2K	0.5%	1/10W	R7538	1-218-990-81	SHORT CHIP	0		
R7474	1-216-864-11	SHORT CHIP	0			R7541	1-218-990-81	SHORT CHIP	0		
R7475	1-216-864-11	SHORT CHIP	0			R7542	1-218-990-81	SHORT CHIP	0		
R7476	1-216-864-11	SHORT CHIP	0			R7549	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R7482	1-218-990-81	SHORT CHIP	0			R7550	1-218-990-81	SHORT CHIP	0		
R7484	1-218-990-81	SHORT CHIP	0			R7552	1-216-841-11	METAL CHIP	47K	5%	1/10W
R7485	1-218-990-81	SHORT CHIP	0			R7556	1-216-809-11	METAL CHIP	100	5%	1/10W
R7486	1-218-990-81	SHORT CHIP	0			R7561	1-216-841-11	METAL CHIP	47K	5%	1/10W
R7487	1-218-990-81	SHORT CHIP	0			R7564	1-216-809-11	METAL CHIP	100	5%	1/10W
R7488	1-218-990-81	SHORT CHIP	0			R7565	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R7489	1-218-990-81	SHORT CHIP	0			R7566	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R7490	1-218-990-81	SHORT CHIP	0			R7568	1-218-990-81	SHORT CHIP	0		
R7491	1-218-990-81	SHORT CHIP	0			R7569	1-218-990-81	SHORT CHIP	0		
R7492	1-218-965-11	RES-CHIP	10K	5%	1/16W	R7570	1-218-990-81	SHORT CHIP	0		

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R7571	1-208-683-11	METAL CHIP	1K 0.5% 1/10W	RB5501	1-234-370-21	RES, NETWORK 22	(1005X4)
R7577	1-216-809-11	METAL CHIP	100 5% 1/10W	RB5502	1-234-370-21	RES, NETWORK 22	(1005X4)
R7578	1-218-965-11	RES-CHIP	10K 5% 1/16W	RB5503	1-234-370-21	RES, NETWORK 22	(1005X4)
R7587	1-218-845-11	METAL CHIP	820 0.5% 1/10W	RB5504	1-234-370-21	RES, NETWORK 22	(1005X4)
R7588	1-218-965-11	RES-CHIP	10K 5% 1/16W	RB5505	1-234-370-21	RES, NETWORK 22	(1005X4)
R7589	1-218-990-81	SHORT CHIP	0	RB5506	1-234-370-21	RES, NETWORK 22	(1005X4)
R7590	1-218-965-11	RES-CHIP	10K 5% 1/16W	RB5507	1-234-370-21	RES, NETWORK 22	(1005X4)
R7591	1-218-965-11	RES-CHIP	10K 5% 1/16W	RB5509	1-234-370-21	RES, NETWORK 22	(1005X4)
R7592	1-218-965-11	RES-CHIP	10K 5% 1/16W	RB5510	1-234-370-21	RES, NETWORK 22	(1005X4)
R7594	1-216-833-11	METAL CHIP	10K 5% 1/10W	RB5511	1-234-370-21	RES, NETWORK 22	(1005X4)
R7595	1-216-833-11	METAL CHIP	10K 5% 1/10W	RB5512	1-234-370-21	RES, NETWORK 22	(1005X4)
R7596	1-216-809-11	METAL CHIP	100 5% 1/10W	< THERMISTOR >			
R7597	1-216-841-11	METAL CHIP	47K 5% 1/10W	TH7400	1-809-350-21	THERMISTOR, NTC (2125)	
R7598	1-216-833-11	METAL CHIP	10K 5% 1/10W	< VARISTOR >			
R7599	1-218-990-81	SHORT CHIP	0	VD5400	1-803-974-21	VARISTOR, CHIP	(1608)
R7600	1-216-841-11	METAL CHIP	47K 5% 1/10W	VD5401	1-803-974-21	VARISTOR, CHIP	(1608)
R7601	1-216-809-11	METAL CHIP	100 5% 1/10W	VD5402	1-803-974-21	VARISTOR, CHIP	(1608)
R7602	1-216-845-11	METAL CHIP	100K 5% 1/10W	VD5403	1-803-974-21	VARISTOR, CHIP	(1608)
R7603	1-220-397-11	METAL CHIP	4.7M 5% 1/10W	VD5404	1-803-974-21	VARISTOR, CHIP	(1608)
R7606	1-216-864-11	SHORT CHIP	0	< CRYSTAL >			
R7607	1-216-864-11	SHORT CHIP	0	X1000	1-795-537-21	VIBRATOR, CRYSTAL	
R7608	1-216-817-11	METAL CHIP	470 5% 1/10W	X1001	1-781-696-31	VIBRATOR, CRYSTAL	
R7612	1-216-833-11	METAL CHIP	10K 5% 1/10W	X5000	1-795-790-11	VIBRATOR, CRYSTAL	
R7613	1-216-833-11	METAL CHIP	10K 5% 1/10W	*A-1142-596-B N Board, Complete			
R7614	1-216-864-11	SHORT CHIP	0				
< RESISTOR CHIP >				4-204-791-01	SCREW + B, 2X8		
RB1000	1-234-371-21	RES, NETWORK 47	(1005X4)	2-580-625-01	SCREW + B, M2X8		
RB1001	1-234-371-21	RES, NETWORK 47	(1005X4)	A3300	*1-815-640-21	CONNECTOR, CARD (PCMCIA CARD)	
RB1002	1-234-372-11	RES, NETWORK 100	(1005X4)	< CAPACITOR >			
RB1003	1-234-372-11	RES, NETWORK 100	(1005X4)	C3100	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
RB1004	1-234-372-11	RES, NETWORK 100	(1005X4)	C3101	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V
RB1005	1-234-371-21	RES, NETWORK 47	(1005X4)	C3102	1-165-908-11	CERAMIC CHIP 1UF	10% 10V
RB1006	1-234-371-21	RES, NETWORK 47	(1005X4)	C3103	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
RB1007	1-234-372-11	RES, NETWORK 100	(1005X4)	C3104	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
RB1008	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	C3105	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
RB1009	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	C3106	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
RB1010	1-234-372-11	RES, NETWORK 100	(1005X4)	C3107	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
RB1011	1-234-372-11	RES, NETWORK 100	(1005X4)	C3108	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
RB1012	1-234-371-21	RES, NETWORK 47	(1005X4)	C3109	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
RB1013	1-234-371-21	RES, NETWORK 47	(1005X4)	C3110	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
RB1014	1-234-372-11	RES, NETWORK 100	(1005X4)	C3111	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
RB1015	1-234-372-11	RES, NETWORK 100	(1005X4)	C3112	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
RB1016	1-234-372-11	RES, NETWORK 100	(1005X4)	C3113	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
RB1017	1-234-372-11	RES, NETWORK 100	(1005X4)	C3114	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
RB4703	1-234-375-21	RES, NETWORK 1K	(1005X4)				
RB4704	1-234-370-21	RES, NETWORK 22	(1005X4)				
RB4705	1-234-370-21	RES, NETWORK 22	(1005X4)				
RB4706	1-234-375-21	RES, NETWORK 1K	(1005X4)				
RB5500	1-234-370-21	RES, NETWORK 22	(1005X4)				

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3115	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3306	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3116	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3307	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3117	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3308	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3118	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3309	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3119	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3310	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3120	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3311	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3121	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3312	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3122	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3313	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3123	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3314	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3124	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3315	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3125	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3316	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3126	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3317	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3127	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3318	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3128	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3320	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3129	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3321	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3130	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3322	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V
C3131	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3323	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3132	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3324	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3133	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3326	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3134	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3400	1-100-611-91	CERAMIC CHIP 22UF	20% 6.3V
C3135	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3402	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3136	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3403	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3137	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3404	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C3138	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C3405	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3200	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3406	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
C3201	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3407	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3202	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3408	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3203	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3409	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3204	1-164-846-11	CERAMIC CHIP 6PF	0.50PF 50V	C3410	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3205	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3411	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V
C3206	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C3412	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V
C3207	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3413	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V
C3208	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3414	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3209	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3415	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3210	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3416	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3211	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3417	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3212	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V	C3418	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3213	1-164-846-11	CERAMIC CHIP 6PF	0.50PF 50V	C3419	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C3214	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3420	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C3215	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C3421	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3216	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3422	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C3217	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3423	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3218	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3424	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V
C3219	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3425	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3220	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3426	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3230	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	C3427	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3300	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3428	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3301	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3429	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3303	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3430	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3304	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3431	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3432	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3545	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C3433	1-100-354-21	ELECT CHIP 220UF	20% 6.3V	C3546	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C3434	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V	C3547	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C3435	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V	C3548	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C3436	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V	C3549	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C3438	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C3550	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C3439	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3551	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V
C3440	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C3552	1-164-860-11	CERAMIC CHIP 27PF	5.00% 50V
C3441	1-165-908-11	CERAMIC CHIP 1UF	10% 10V	C3553	1-164-860-11	CERAMIC CHIP 27PF	5.00% 50V
C3442	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3570	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3443	1-100-597-91	CERAMIC CHIP 0.1UF	10% 25V	C3571	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3444	1-100-611-91	CERAMIC CHIP 22UF	20% 6.3V	C3800	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3445	1-100-611-91	CERAMIC CHIP 22UF	20% 6.3V	C3801	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3446	1-100-611-91	CERAMIC CHIP 22UF	20% 6.3V	C3802	1-124-779-00	ELECT CHIP 10UF	20.00% 16V
C3447	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3804	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3448	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3805	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3449	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3806	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3450	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3807	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3451	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3808	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3452	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C3809	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3504	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3810	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3509	1-117-720-11	CERAMIC CHIP 4.7UF	10V	C3811	1-164-935-11	CERAMIC CHIP 470PF	10.00% 50V
C3513	1-126-206-11	ELECT CHIP 100UF	20.00% 6.3V	C3812	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3514	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3813	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3518	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3814	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3520	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3816	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3521	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	C3817	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V
C3522	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	< CONNECTOR >			
C3523	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	CN3300	*1-815-641-11	CONNECTOR, CARD (PCMCIA CARD)	
C3524	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	CN3400	1-695-209-21	PIN, CONNECTOR (PC BOARD) 15P	
C3525	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	CN3401	1-764-087-21	PIN, CONNECTOR (PC BOARD) 14P	
C3526	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	CN3402	1-695-889-21	PIN, CONNECTOR (PC BOARD) 10P	
C3527	1-164-872-11	CERAMIC CHIP 82PF	5.00% 50V	CN3403	*1-779-268-21	PIN, CONNECTOR (1.5MM) (SMD) 11P	
C3528	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	CN3404	*1-766-376-11	PIN, CONNECTOR (1.5MM) (SMD) 9P	
C3529	1-164-872-11	CERAMIC CHIP 82PF	5.00% 50V	CN3500	1-770-501-11	JACK 10P	
C3530	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	CN3503	*1-764-080-21	PIN, CONNECTOR (PC BOARD) 8P	
C3531	1-164-937-11	CERAMIC CHIP 0.001UF	10.00% 50V	< DIODE >			
C3532	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	D3400	8-719-070-20	DIODE RB706F-40	
C3533	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	D3401	8-719-070-20	DIODE RB706F-40	
C3534	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	D3402	8-719-058-24	DIODE RB501V-40TE-17	
C3535	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	D3500	6-501-233-01	DIODE BZA862AVL	
C3536	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	D3501	6-501-233-01	DIODE BZA862AVL	
C3537	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	D3502	6-501-233-01	DIODE BZA862AVL	
C3538	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	D3504	8-719-058-24	DIODE RB501V-40TE-17	
C3539	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	D3800	8-719-066-11	DIODE 1PS184-115	
C3540	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V	< FERRITE BEAD >			
C3541	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V	FB3100	1-469-869-21	FERRITE 0UH	
C3542	1-125-777-11	CERAMIC CHIP 0.1UF	10.00% 10V				
C3543	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V				
C3544	1-164-943-81	CERAMIC CHIP 0.01UF	10.00% 16V				

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
FB3101	1-469-869-21	FERRITE	OUH	FB3552	1-400-244-11	FERRITE	OUH
FB3102	1-469-869-21	FERRITE	OUH	FB3553	1-400-244-11	FERRITE	OUH
FB3103	1-400-833-21	FERRITE	OUH	FB3554	1-469-869-21	FERRITE	OUH
FB3104	1-469-869-21	FERRITE	OUH	FB3555	1-469-869-21	FERRITE	OUH
FB3105	1-400-833-21	FERRITE	OUH	FB3557	1-400-244-11	FERRITE	OUH
FB3106	1-400-833-21	FERRITE	OUH	FB3800	1-400-244-11	FERRITE	OUH
FB3107	1-400-833-21	FERRITE	OUH	FB3801	1-400-244-11	FERRITE	OUH
FB3108	1-400-833-21	FERRITE	OUH	FB3802	1-400-244-11	FERRITE	OUH
FB3109	1-400-833-21	FERRITE	OUH	FB3803	1-400-244-11	FERRITE	OUH
FB3110	1-400-833-21	FERRITE	OUH	FB3804	1-400-244-11	FERRITE	OUH
FB3111	1-400-833-21	FERRITE	OUH	FB3805	1-400-244-11	FERRITE	OUH
FB3112	1-400-833-21	FERRITE	OUH	FB3806	1-400-244-11	FERRITE	OUH
FB3200	1-400-244-11	FERRITE	OUH	< FILTER >			
FB3201	1-400-244-11	FERRITE	OUH	FL3500	1-239-899-21	FERRITE	OUH
FB3300	1-469-869-21	FERRITE	OUH	< IC >			
FB3301	1-469-869-21	FERRITE	OUH	IC3100	6-702-498-21	IC UPD61120AF1-100-JN1-A	
FB3400	1-400-244-11	FERRITE	OUH	IC3200	6-707-809-01	IC EDD1216AATA-6B-E	
FB3401	1-400-244-11	FERRITE	OUH	IC3201	6-705-271-01	IC KA5SDKAS01TSL	
FB3402	1-400-244-11	FERRITE	OUH	IC3206	6-704-621-01	IC TC58DVM72A1TG00	
FB3403	1-469-458-91	FERRITE	OUH	IC3301	8-759-644-48	IC 74LVC541APW	
FB3404	1-469-869-21	FERRITE	OUH	IC3302	8-759-644-48	IC 74LVC541APW	
FB3405	1-469-869-21	FERRITE	OUH	IC3303	8-759-564-22	IC 74LVC00-PW	
FB3406	1-469-869-21	FERRITE	OUH	IC3304	8-759-644-48	IC 74LVC541APW	
FB3407	1-469-869-21	FERRITE	OUH	IC3305	8-759-644-48	IC 74LVC541APW	
FB3408	1-400-461-21	FERRITE	OUH	IC3306	8-759-644-48	IC 74LVC541APW	
FB3409	1-400-461-21	FERRITE	OUH	IC3307	8-759-298-90	IC 74LVT245PW	
FB3410	1-400-461-21	FERRITE	OUH	IC3308	8-759-644-48	IC 74LVC541APW	
FB3411	1-400-461-21	FERRITE	OUH	IC3309	8-759-644-48	IC 74LVC541APW	
FB3412	1-400-834-21	FERRITE	OUH	IC3310	8-759-644-48	IC 74LVC541APW	
FB3413	1-400-834-21	FERRITE	OUH	IC3311	8-759-298-90	IC 74LVT245PW	
FB3414	1-400-834-21	FERRITE	OUH	IC3312	8-759-644-48	IC 74LVC541APW	
FB3415	1-400-834-21	FERRITE	OUH	IC3313	8-759-644-48	IC 74LVC541APW	
FB3416	1-400-834-21	FERRITE	OUH	IC3314	8-759-644-48	IC 74LVC541APW	
FB3417	1-400-834-21	FERRITE	OUH	IC3315	8-759-564-09	IC 74LVC32A-PW	
FB3418	1-400-834-21	FERRITE	OUH	IC3316	6-708-132-01	IC 74LVC14APW	
FB3419	1-400-834-21	FERRITE	OUH	IC3400	6-707-808-01	IC WM8727GED/RV	
FB3420	1-400-834-21	FERRITE	OUH	IC3401	8-759-701-40	IC NJM3404AM-T1	
FB3501	1-469-458-91	FERRITE	OUH	IC3402	6-705-403-01	IC PQ070XZ01ZPH	
FB3502	1-469-458-91	FERRITE	OUH	IC3403	6-705-403-01	IC PQ070XZ01ZPH	
FB3503	1-400-244-11	FERRITE	OUH	IC3404	6-705-789-01	IC LM3526MX-H/J5000396	
FB3504	1-400-244-11	FERRITE	OUH	IC3502	8-759-644-48	IC 74LVC541APW	
FB3505	1-400-244-11	FERRITE	OUH	IC3504	8-753-212-44	IC CXD1976R-T6	
FB3507	1-400-244-11	FERRITE	OUH	IC3800	6-703-175-01	IC PST3629UL	
FB3509	1-414-772-11	FERRITE	OUH	IC3801	8-759-670-18	IC 74LVC273PW	
FB3546	1-400-244-11	FERRITE	OUH	IC3802	8-759-670-18	IC 74LVC273PW	
FB3547	1-400-244-11	FERRITE	OUH	IC3803	6-706-487-01	IC TC7SH08FU (T5RSOYJF)	
FB3548	1-400-244-11	FERRITE	OUH	IC3804	8-759-564-09	IC 74LVC32A-PW	
FB3549	1-400-244-11	FERRITE	OUH				
FB3550	1-400-244-11	FERRITE	OUH				
FB3551	1-400-244-11	FERRITE	OUH				

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
IC3805	8-759-564-91	IC 74LVC08APW		R3115	1-218-941-81	RES-CHIP	100 5% 1/16W
IC3806	6-706-487-01	IC TC7SH08FU(T5RSOYJF)		R3116	1-218-937-11	RES-CHIP	47 5% 1/16W
IC3807	6-704-067-01	IC M24128-BWMN6T(A)		R3117	1-218-937-11	RES-CHIP	47 5% 1/16W
< COIL >				R3118	1-218-937-11	RES-CHIP	47 5% 1/16W
				R3119	1-218-965-11	RES-CHIP	10K 5% 1/16W
L3100	1-400-859-41	INDUCTOR	0.82UH	R3120	1-218-937-11	RES-CHIP	47 5% 1/16W
L3500	1-412-006-31	INDUCTOR	10UH	R3121	1-218-937-11	RES-CHIP	47 5% 1/16W
L3501	1-469-842-21	INDUCTOR	0.47UH	R3122	1-218-937-11	RES-CHIP	47 5% 1/16W
L3502	1-410-981-42	INDUCTOR	0.1UH	R3123	1-218-937-11	RES-CHIP	47 5% 1/16W
L3503	1-410-981-42	INDUCTOR	0.1UH	R3124	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
L3504	1-410-981-42	INDUCTOR	0.1UH	R3125	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
< TRANSISTOR >				R3126	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3400	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3127	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3401	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3129	1-218-941-81	RES-CHIP	100 5% 1/16W
Q3402	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3130	1-218-941-81	RES-CHIP	100 5% 1/16W
Q3403	6-550-232-01	TRANSISTOR 2SA2029T2LQ/R		R3131	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3404	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3132	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3405	6-550-232-01	TRANSISTOR 2SA2029T2LQ/R		R3133	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3406	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3135	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3407	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3136	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3408	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3137	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3409	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3141	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3410	6-550-232-01	TRANSISTOR 2SA2029T2LQ/R		R3145	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3411	6-550-232-01	TRANSISTOR 2SA2029T2LQ/R		R3147	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3412	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3148	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3504	8-729-027-43	TRANSISTOR DTC114EKA-T146		R3149	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3800	8-729-027-43	TRANSISTOR DTC114EKA-T146		R3151	1-218-990-81	SHORT CHIP	0
Q3801	8-729-027-43	TRANSISTOR DTC114EKA-T146		R3156	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3804	8-729-027-43	TRANSISTOR DTC114EKA-T146		R3157	1-218-965-11	RES-CHIP	10K 5% 1/16W
Q3805	8-729-027-43	TRANSISTOR DTC114EKA-T146		R3160	1-218-937-11	RES-CHIP	47 5% 1/16W
Q3806	6-550-237-01	TRANSISTOR 2SC5658T2LQ/R		R3200	1-218-941-11	RES-CHIP	100 5% 1/16W
Q3808	6-550-232-01	TRANSISTOR 2SA2029T2LQ/R		R3201	1-218-941-11	RES-CHIP	100 5% 1/16W
< RESISTOR >				R3202	1-218-939-11	RES-CHIP	68 5% 1/16W
R3100	1-218-937-11	RES-CHIP	47 5% 1/16W	R3203	1-218-941-81	RES-CHIP	100 5% 1/16W
R3101	1-218-941-81	RES-CHIP	100 5% 1/16W	R3204	1-218-941-81	RES-CHIP	100 5% 1/16W
R3102	1-218-937-11	RES-CHIP	47 5% 1/16W	R3205	1-218-937-11	RES-CHIP	47 5% 1/16W
R3103	1-218-937-11	RES-CHIP	47 5% 1/16W	R3206	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3104	1-218-937-11	RES-CHIP	47 5% 1/16W	R3211	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R3105	1-218-937-11	RES-CHIP	47 5% 1/16W	R3212	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R3106	1-218-937-11	RES-CHIP	47 5% 1/16W	R3213	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R3107	1-218-937-11	RES-CHIP	47 5% 1/16W	R3214	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R3108	1-218-937-11	RES-CHIP	47 5% 1/16W	R3216	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3109	1-218-941-81	RES-CHIP	100 5% 1/16W	R3218	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3110	1-218-937-11	RES-CHIP	47 5% 1/16W	R3220	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R3111	1-218-937-11	RES-CHIP	47 5% 1/16W	R3222	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3112	1-218-937-11	RES-CHIP	47 5% 1/16W	R3224	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3113	1-218-937-11	RES-CHIP	47 5% 1/16W	R3227	1-218-953-11	RES-CHIP	1K 5% 1/16W
R3114	1-218-937-11	RES-CHIP	47 5% 1/16W	R3229	1-218-953-11	RES-CHIP	1K 5% 1/16W
				R3230	1-218-953-11	RES-CHIP	1K 5% 1/16W
				R3232	1-218-953-11	RES-CHIP	1K 5% 1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3234	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3450	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3236	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3451	1-218-967-11	RES-CHIP	15K	5%	1/16W
R3238	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3452	1-218-967-11	RES-CHIP	15K	5%	1/16W
R3239	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3453	1-218-967-11	RES-CHIP	15K	5%	1/16W
R3240	1-218-939-11	RES-CHIP	68	5%	1/16W	R3454	1-218-948-11	RES-CHIP	390	5%	1/16W
R3242	1-218-941-81	RES-CHIP	100	5%	1/16W	R3455	1-218-937-11	RES-CHIP	47	5%	1/16W
R3251	1-218-949-11	RES-CHIP	470	5%	1/16W	R3456	1-218-967-11	RES-CHIP	15K	5%	1/16W
R3262	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3457	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R3303	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3458	1-218-941-11	RES-CHIP	100	5%	1/16W
R3306	1-218-941-81	RES-CHIP	100	5%	1/16W	R3459	1-218-941-11	RES-CHIP	100	5%	1/16W
R3308	1-218-941-81	RES-CHIP	100	5%	1/16W	R3460	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R3310	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3461	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3311	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3462	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3312	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3463	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3313	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3464	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3314	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3465	1-218-966-11	RES-CHIP	12K	5%	1/16W
R3317	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3466	1-218-967-11	RES-CHIP	15K	5%	1/16W
R3318	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3467	1-218-966-11	RES-CHIP	12K	5%	1/16W
R3321	1-218-941-81	RES-CHIP	100	5%	1/16W	R3468	1-218-967-11	RES-CHIP	15K	5%	1/16W
R3324	1-218-941-81	RES-CHIP	100	5%	1/16W	R3469	1-218-949-11	RES-CHIP	470	5%	1/16W
R3325	1-218-937-11	RES-CHIP	47	5%	1/16W	R3470	1-208-675-11	METAL CHIP	470	0.5%	1/16W
R3400	1-218-966-11	RES-CHIP	12K	5%	1/16W	R3471	1-208-885-11	METAL CHIP	820	0.5%	1/16W
R3401	1-218-967-11	RES-CHIP	15K	5%	1/16W	R3472	1-218-949-11	RES-CHIP	470	5%	1/16W
R3406	1-218-949-11	RES-CHIP	470	5%	1/16W	R3473	1-208-675-11	METAL CHIP	470	0.5%	1/16W
R3407	1-208-675-11	METAL CHIP	470	0.5%	1/16W	R3474	1-208-885-11	METAL CHIP	820	0.5%	1/16W
R3408	1-208-885-11	METAL CHIP	820	0.5%	1/16W	R3475	1-218-949-11	RES-CHIP	470	5%	1/16W
R3415	1-208-675-11	METAL CHIP	470	0.5%	1/16W	R3478	1-208-675-11	METAL CHIP	470	0.5%	1/16W
R3421	1-218-990-81	SHORT CHIP	0			R3479	1-208-885-11	METAL CHIP	820	0.5%	1/16W
R3422	1-218-937-11	RES-CHIP	47	5%	1/16W	R3480	1-218-941-81	RES-CHIP	100	5%	1/16W
R3423	1-218-937-11	RES-CHIP	47	5%	1/16W	R3481	1-218-941-81	RES-CHIP	100	5%	1/16W
R3424	1-218-945-11	RES-CHIP	220	5%	1/16W	R3482	1-218-948-11	RES-CHIP	390	5%	1/16W
R3427	1-218-949-11	RES-CHIP	470	5%	1/16W	R3483	1-218-948-11	RES-CHIP	390	5%	1/16W
R3428	1-218-949-11	RES-CHIP	470	5%	1/16W	R3484	1-216-001-00	RES-CHIP	10	5%	1/10W
R3429	1-218-949-11	RES-CHIP	470	5%	1/16W	R3485	1-218-990-81	SHORT CHIP	0		
R3430	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3486	1-218-948-11	RES-CHIP	390	5%	1/16W
R3433	1-218-937-11	RES-CHIP	47	5%	1/16W	R3487	1-218-945-11	RES-CHIP	220	5%	1/16W
R3434	1-218-937-11	RES-CHIP	47	5%	1/16W	R3488	1-218-945-11	RES-CHIP	220	5%	1/16W
R3435	1-218-937-11	RES-CHIP	47	5%	1/16W	R3489	1-218-945-11	RES-CHIP	220	5%	1/16W
R3436	1-218-937-11	RES-CHIP	47	5%	1/16W	R3490	1-218-967-11	RES-CHIP	15K	5%	1/16W
R3438	1-218-966-11	RES-CHIP	12K	5%	1/16W	R3491	1-218-967-11	RES-CHIP	15K	5%	1/16W
R3439	1-218-990-81	SHORT CHIP	0			R3492	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3440	1-218-990-81	SHORT CHIP	0			R3493	1-218-941-81	RES-CHIP	100	5%	1/16W
R3441	1-218-937-11	RES-CHIP	47	5%	1/16W	R3500	1-216-295-91	SHORT CHIP	0		
R3442	1-218-949-11	RES-CHIP	470	5%	1/16W	R3501	1-216-295-91	SHORT CHIP	0		
R3444	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R3502	1-216-295-91	SHORT CHIP	0		
R3445	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R3504	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3446	1-218-972-11	RES-CHIP	39K	5%	1/16W	R3505	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3447	1-218-972-11	RES-CHIP	39K	5%	1/16W	R3506	1-218-941-81	RES-CHIP	100	5%	1/16W
R3448	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3507	1-218-941-81	RES-CHIP	100	5%	1/16W
R3449	1-218-967-11	RES-CHIP	15K	5%	1/16W	R3508	1-216-295-91	SHORT CHIP	0		

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R3509	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3646	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3510	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3647	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3511	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3800	1-218-969-11	RES-CHIP	22K	5%	1/16W
R3516	1-218-937-11	RES-CHIP	47	5%	1/16W	R3801	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3517	1-218-937-11	RES-CHIP	47	5%	1/16W	R3802	1-218-941-81	RES-CHIP	100	5%	1/16W
R3518	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3803	1-218-941-81	RES-CHIP	100	5%	1/16W
R3537	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R3804	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R3542	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3806	1-218-941-81	RES-CHIP	100	5%	1/16W
R3543	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R3809	1-218-941-81	RES-CHIP	100	5%	1/16W
R3544	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3810	1-218-941-81	RES-CHIP	100	5%	1/16W
R3545	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R3814	1-218-941-81	RES-CHIP	100	5%	1/16W
R3546	1-218-941-81	RES-CHIP	100	5%	1/16W	R3815	1-218-941-81	RES-CHIP	100	5%	1/16W
R3547	1-218-941-81	RES-CHIP	100	5%	1/16W	R3816	1-218-941-81	RES-CHIP	100	5%	1/16W
R3548	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3817	1-218-941-81	RES-CHIP	100	5%	1/16W
R3550	1-208-927-11	METAL CHIP	47K	0.5%	1/16W	R3818	1-218-941-81	RES-CHIP	100	5%	1/16W
R3554	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3819	1-218-941-81	RES-CHIP	100	5%	1/16W
R3558	1-208-687-11	METAL CHIP	1.5K	0.5%	1/16W	R3820	1-218-941-81	RES-CHIP	100	5%	1/16W
R3559	1-208-927-11	METAL CHIP	47K	0.5%	1/16W	R3821	1-218-941-81	RES-CHIP	100	5%	1/16W
R3560	1-218-937-11	RES-CHIP	47	5%	1/16W	R3822	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3561	1-218-941-81	RES-CHIP	100	5%	1/16W	R3824	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3562	1-218-941-81	RES-CHIP	100	5%	1/16W	R3825	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3563	1-218-941-81	RES-CHIP	100	5%	1/16W	R3826	1-218-941-81	RES-CHIP	100	5%	1/16W
R3564	1-218-941-81	RES-CHIP	100	5%	1/16W	R3827	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3565	1-218-941-81	RES-CHIP	100	5%	1/16W	R3828	1-218-941-81	RES-CHIP	100	5%	1/16W
R3566	1-218-989-11	RES-CHIP	1M	5%	1/16W	R3830	1-218-941-81	RES-CHIP	100	5%	1/16W
R3567	1-218-941-81	RES-CHIP	100	5%	1/16W	R3831	1-218-941-81	RES-CHIP	100	5%	1/16W
R3601	1-218-953-11	RES-CHIP	1K	5%	1/16W	R3832	1-218-990-81	SHORT CHIP	0		
R3602	1-218-941-81	RES-CHIP	100	5%	1/16W	R3835	1-218-941-81	RES-CHIP	100	5%	1/16W
R3603	1-218-941-81	RES-CHIP	100	5%	1/16W	R3836	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3604	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3837	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3609	1-218-941-81	RES-CHIP	100	5%	1/16W	R3838	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3610	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3839	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3611	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3840	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3613	1-218-941-81	RES-CHIP	100	5%	1/16W	R3841	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3616	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3842	1-218-941-81	RES-CHIP	100	5%	1/16W
R3617	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3843	1-218-941-81	RES-CHIP	100	5%	1/16W
R3620	1-218-941-81	RES-CHIP	100	5%	1/16W	R3844	1-218-941-81	RES-CHIP	100	5%	1/16W
R3621	1-218-941-81	RES-CHIP	100	5%	1/16W	R3846	1-218-949-11	RES-CHIP	470	5%	1/16W
R3623	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3848	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3629	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3849	1-218-941-81	RES-CHIP	100	5%	1/16W
R3631	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3850	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3633	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3852	1-218-941-81	RES-CHIP	100	5%	1/16W
R3635	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3853	1-218-941-81	RES-CHIP	100	5%	1/16W
R3637	1-218-948-11	RES-CHIP	390	5%	1/16W	R3854	1-218-941-81	RES-CHIP	100	5%	1/16W
R3638	1-218-948-11	RES-CHIP	390	5%	1/16W	R3855	1-218-941-81	RES-CHIP	100	5%	1/16W
R3639	1-218-948-11	RES-CHIP	390	5%	1/16W	R3856	1-218-941-81	RES-CHIP	100	5%	1/16W
R3640	1-218-948-11	RES-CHIP	390	5%	1/16W	R3857	1-218-941-81	RES-CHIP	100	5%	1/16W
R3641	1-218-948-11	RES-CHIP	390	5%	1/16W	R3858	1-218-941-81	RES-CHIP	100	5%	1/16W
R3642	1-218-941-81	RES-CHIP	100	5%	1/16W	R3859	1-218-941-81	RES-CHIP	100	5%	1/16W
R3645	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3861	1-218-941-81	RES-CHIP	100	5%	1/16W

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

N GE2

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R3862	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	C8826	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
R3892	1-218-965-11	RES-CHIP	10K 5% 1/16W	C8829	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
R3895	1-218-965-11	RES-CHIP	10K 5% 1/16W	C8831	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
R3896	1-218-965-11	RES-CHIP	10K 5% 1/16W	C8832	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V
R3899	1-218-965-11	RES-CHIP	10K 5% 1/16W	C8837	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
< RESISTOR CHIP >				C8838	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
RB3100	1-234-370-21	RES, NETWORK 22	(1005X4)	C8839	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
RB3101	1-234-370-21	RES, NETWORK 22	(1005X4)	C8840	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
RB3102	1-234-370-21	RES, NETWORK 22	(1005X4)	C8841	1-110-530-11	ELECT CHIP 1000UF	20% 6.3V
RB3103	1-234-370-21	RES, NETWORK 22	(1005X4)	C8846	1-137-894-21	ELECT CHIP 470UF	20% 25V
RB3104	1-234-370-21	RES, NETWORK 22	(1005X4)	C8850	1-137-894-21	ELECT CHIP 470UF	20% 25V
RB3105	1-234-370-21	RES, NETWORK 22	(1005X4)	C8851	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
RB3106	1-234-370-21	RES, NETWORK 22	(1005X4)	C8852	1-137-894-21	ELECT CHIP 470UF	20% 25V
RB3107	1-234-370-21	RES, NETWORK 22	(1005X4)	C8853	1-137-894-21	ELECT CHIP 470UF	20% 25V
RB3108	1-234-370-21	RES, NETWORK 22	(1005X4)	C8854	1-110-530-11	ELECT CHIP 1000UF	20% 6.3V
RB3109	1-234-370-21	RES, NETWORK 22	(1005X4)	C8856	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
RB3110	1-234-370-21	RES, NETWORK 22	(1005X4)	C8857	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
RB3200	1-234-372-21	RES, NETWORK 100	(1005X4)	C8858	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
RB3201	1-234-372-21	RES, NETWORK 100	(1005X4)	C8859	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
RB3202	1-234-372-21	RES, NETWORK 100	(1005X4)	C8860	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
RB3203	1-234-702-11	RES, NETWORK 68	(1005X4)	C8861	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
RB3204	1-234-702-11	RES, NETWORK 68	(1005X4)	C8862	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V
RB3206	1-234-372-21	RES, NETWORK 100	(1005X4)	C8863	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V
RB3207	1-234-372-21	RES, NETWORK 100	(1005X4)	C8866	1-117-681-11	ELECT CHIP 100UF	20.00% 16V
RB3208	1-234-702-11	RES, NETWORK 68	(1005X4)	< CONNECTOR >			
RB3209	1-234-702-11	RES, NETWORK 68	(1005X4)	CN8800	1-794-519-21	PIN, CONNECTOR (PC BOARD) 14P	
RB3500	1-234-371-21	RES, NETWORK 47	(1005X4)	CN8801	1-818-033-21	PIN, CONNECTOR (PC BOARD)	
RB3501	1-234-371-21	RES, NETWORK 47	(1005X4)	CN8802	*1-764-094-21	PIN, CONNECTOR (PC BOARD) 9P	
< CRYSTAL >				< DIODE >			
X3200	1-813-055-11	QUARTZ CRYSTAL UNIT		D8800	8-719-081-97	DIODE MMD1914T1	
X3500	1-813-547-11	QUARTZ CRYSTAL UNIT		D8803	6-501-336-01	DIODE RSX201L-30TE25	
*A-1128-516-B GE2 Board, Complete (KDL-S26A11E/KDL-S32A11E Only)				D8805	6-501-336-01	DIODE RSX201L-30TE25	
*2-637-727-01	SPACER			D8806	8-719-069-55	DIODE UDZSTE-175.6B	
< CAPACITOR >				D8812	6-501-336-01	DIODE RSX201L-30TE25	
C8801	1-137-894-21	ELECT CHIP 470UF	20% 25V	D8813	6-501-336-01	DIODE RSX201L-30TE25	
C8803	1-137-894-21	ELECT CHIP 470UF	20% 25V	D8814	8-719-069-55	DIODE UDZSTE-175.6B	
C8805	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V	D8815	8-719-069-55	DIODE UDZSTE-175.6B	
C8806	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	D8816	6-501-336-01	DIODE RSX201L-30TE25	
C8807	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	< FUSE >			
C8808	1-110-530-11	ELECT CHIP 1000UF	20% 6.3V	F8801 Δ	1-576-603-11	FUSE 3.15A	24V
C8814	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	F8802 Δ	1-576-603-11	FUSE 3.15A	24V
C8819	1-100-566-91	CERAMIC CHIP 0.1UF	10.00% 25V	< FERRITE BEAD >			
C8823	1-127-573-11	CERAMIC CHIP 1UF	10% 16V	FB8800	1-469-775-21	FERRITE 0UH	
C8825	1-126-392-11	ELECT CHIP 100UF	20.00% 6.3V	FB8802	1-469-775-21	FERRITE 0UH	
				FB8803	1-469-775-21	FERRITE 0UH	
				FB8804	1-469-775-21	FERRITE 0UH	
				FB8805	1-469-775-21	FERRITE 0UH	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

GE2

G1

REF.NO.	PART.NO	DESCRIPTION	REMARK
FB8806	1-469-775-21	FERRITE	0UH
FB8808	1-469-775-21	FERRITE	0UH
FB8810	1-469-775-21	FERRITE	0UH
FB8811	1-469-775-21	FERRITE	0UH
FB8812	1-469-775-21	FERRITE	0UH
FB8813	1-469-775-21	FERRITE	0UH
FB8814	1-469-775-21	FERRITE	0UH
FB8816	1-469-775-21	FERRITE	0UH
FB8817	1-469-775-21	FERRITE	0UH
FB8818	1-469-775-21	FERRITE	0UH
FB8819	1-469-775-21	FERRITE	0UH
FB8820	1-469-775-21	FERRITE	0UH
FB8821	1-469-775-21	FERRITE	0UH
FB8823	1-469-775-21	FERRITE	0UH
< IC >			
IC8800	6-702-142-01	IC PQ1CY1032ZP	
IC8802	6-704-407-01	IC PQ1CZ41H2ZPH	
IC8803	6-705-468-01	IC BA33BC0FP-E2	
IC8805	6-702-142-01	IC PQ1CY1032ZP	
IC8806	8-759-460-79	IC BA09FP-E2	
IC8810	6-706-999-01	IC BA09CC0WFP-E2	
< COIL >			
L8800	1-416-606-11	INDUCTOR	47UH
L8801	1-409-556-11	INDUCTOR	47UH
L8802	1-424-976-21	INDUCTOR	47UH
L8804	1-416-606-11	INDUCTOR	47UH
L8805	1-424-976-21	INDUCTOR	47UH
L8808	1-424-976-21	INDUCTOR	47UH
L8809	1-416-606-11	INDUCTOR	47UH
L8810	1-456-786-21	INDUCTOR	47UH
L8811	1-412-058-11	INDUCTOR	10UH
L8812	1-412-058-11	INDUCTOR	10UH
L8813	1-412-058-11	INDUCTOR	10UH
L8814	1-412-058-11	INDUCTOR	10UH
< TRANSISTOR >			
Q8803	6-550-549-01	TRANSISTOR DTC114EUAFT106	
Q8804	8-729-422-33	TRANSISTOR 2SD601A-Q-TX	
Q8805	6-550-549-01	TRANSISTOR DTC114EUAFT106	
Q8806	8-729-422-33	TRANSISTOR 2SD601A-Q-TX	
< RESISTOR >			
R8802	1-216-295-91	SHORT CHIP	0
R8803	1-216-295-91	SHORT CHIP	0
R8804	1-216-864-11	SHORT CHIP	0
R8807	1-216-821-11	METAL CHIP	1K 5% 1/10W
R8808	1-216-295-91	SHORT CHIP	0

REF.NO.	PART.NO	DESCRIPTION	REMARK
R8816	1-218-861-11	METAL CHIP	3.9K 0.5% 1/10W
R8818	1-216-841-11	METAL CHIP	47K 5% 1/10W
R8819	1-216-295-91	SHORT CHIP	0
R8820	1-216-295-91	SHORT CHIP	0
R8821	1-218-850-11	METAL CHIP	1.3K 0.5% 1/10W
R8825	1-218-850-11	METAL CHIP	1.3K 0.5% 1/10W
R8826	1-218-861-11	METAL CHIP	3.9K 0.5% 1/10W
R8836	1-216-833-11	METAL CHIP	10K 5% 1/10W
R8837	1-216-833-11	METAL CHIP	10K 5% 1/10W
R8838	1-216-833-11	METAL CHIP	10K 5% 1/10W
R8840	1-216-833-11	METAL CHIP	10K 5% 1/10W
R8841	1-216-295-91	SHORT CHIP	0
R8848	1-216-295-91	SHORT CHIP	0
R8853	1-218-865-11	METAL CHIP	5.6K 0.5% 1/10W
R8854	1-218-887-11	METAL CHIP	47K 0.5% 1/10W
R8855	1-216-295-91	SHORT CHIP	0
R8856	1-218-857-11	METAL CHIP	2.7K 0.5% 1/10W
R8857	1-218-861-11	METAL CHIP	3.9K 0.5% 1/10W
R8862	1-216-864-11	SHORT CHIP	0
R8865	1-216-295-91	SHORT CHIP	0
R8866	1-216-295-91	SHORT CHIP	0
R8867	1-216-295-91	SHORT CHIP	0
R8868	1-216-295-91	SHORT CHIP	0
R8869	1-216-295-91	SHORT CHIP	0

***A-1128-513-C G1 Board, Complete
(KDL-S23A11E Only)**

4-382-854-11 SCREW (M3X10), P, SW (+)
*7-322-065-48 RUBBER, SILICONE RTV (KE-3490)

< CAPACITOR >

C6000	Δ	1-161-964-91	CERAMIC	0.0047UF	250V
C6001	Δ	1-119-892-51	CERAMIC	470PF	10.00% 250V
C6002	Δ	1-165-529-31	MYLAR	0.22UF	10 250V
C6003	Δ	1-161-964-91	CERAMIC	0.0047UF	250V
C6004	Δ	1-165-529-31	MYLAR	0.22UF	10 250V
C6005	Δ	1-119-892-51	CERAMIC	470PF	10.00% 250V
C6008		1-135-361-11	ELECT	180UF	20% 450V
C6012	Δ	1-113-889-11	CERAMIC	0.001UF	20.00% 250V
C6013	Δ	1-113-889-11	CERAMIC	0.001UF	20.00% 250V
C6100		1-162-970-11	CERAMIC CHIP	0.01UF	10.00% 25V
C6101		1-107-905-11	ELECT	4.7UF	20% 50V
C6102		1-107-910-11	ELECT	100UF	20% 50V
C6103		1-162-970-11	CERAMIC CHIP	0.01UF	10.00% 25V
C6104		1-100-831-91	CERAMIC CHIP	0.001UF	2% 50V
C6105		1-107-906-11	ELECT	10UF	20% 50V
C6108		1-115-340-11	CERAMIC CHIP	0.22UF	10.00% 25V
C6109		1-107-888-11	ELECT	47UF	20% 25V
C6111		1-100-613-81	CERAMIC	470PF	5% 1KV
C6112		1-165-608-11	FILM	15000PF	3% 800V
C6116		1-163-021-91	CERAMIC CHIP	0.01UF	10.00% 50V

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G1

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C6200	1-164-245-11	CERAMIC CHIP 0.015UF	10.00% 25V	D6103	8-719-979-64	DIODE UF4005/23	
C6202	1-128-954-11	ELECT 1000UF	20% 25V	D6104	6-501-043-01	DIODE UMZ16NT106	
C6203	1-107-907-11	ELECT 22UF	20% 50V	D6105	6-501-043-01	DIODE UMZ16NT106	
C6204	1-128-954-11	ELECT 1000UF	20% 25V	D6106	8-719-081-67	DIODE M1FM3	
C6205	1-128-954-11	ELECT 1000UF	20% 25V	D6107	8-719-081-67	DIODE M1FM3	
C6216	1-107-928-11	ELECT 4.7UF	20% 100V	D6108	8-719-041-97	DIODE MA113-(TX)	
C6217	1-128-950-31	ELECT 1000UF	20% 16V	D6200	8-719-510-09	DIODE D10SC6M	
C6300 Δ	1-161-964-91	CERAMIC 0.0047UF	250V	D6201	8-719-510-09	DIODE D10SC6M	
C6301 Δ	1-161-964-91	CERAMIC 0.0047UF	250V	D6203	8-719-052-92	DIODE D10SBS4F	
C6304	1-100-780-31	ELECT 22UF	20% 450V	D6204	6-500-567-31	DIODE 10ERB20-TB3	
C6305	1-107-974-11	CERAMIC 47PF	5.00% 2KV	D6205	6-500-567-31	DIODE 10ERB20-TB3	
C6306	1-107-903-11	ELECT 2.2UF	20% 50V	D6207	8-719-510-09	DIODE D10SC6M	
C6307	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6300	8-719-077-76	DIODE D2SB60A-F04	
C6308	1-165-127-11	CERAMIC 470PF	10.00% 500V	D6301	8-719-036-94	DIODE RD5.6SB-T1	
C6309	1-107-905-11	ELECT 4.7UF	20% 50V	D6302	6-500-849-01	DIODE ERA22-08KFLB	
C6310	1-107-910-11	ELECT 100UF	20% 50V	D6303	8-719-052-90	DIODE D1NL40-TA2	
C6314	1-165-729-31	ELECT 470UF	20% 16V	D6304	8-719-052-90	DIODE D1NL40-TA2	
C6315	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6305	8-719-032-12	DIODE D1NS6	
C6400	1-107-902-11	ELECT 1UF	20% 50V	D6307	6-500-567-31	DIODE 10ERB20-TB3	
C6401	1-107-882-91	ELECT 100UF	20% 16V	D6400	8-719-081-97	DIODE MMDL914T1	
C6403	1-107-902-11	ELECT 1UF	20% 50V	D6402	8-719-081-97	DIODE MMDL914T1	
C6404	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	D6407	8-719-082-04	DIODE MM3Z22VT1	
C6405	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V	D6408	8-719-081-97	DIODE MMDL914T1	
C6412	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6501	6-501-043-01	DIODE UMZ16NT106	
C6504	1-131-872-91	CERAMIC CHIP 1000PF	10% 630V	D6502	8-719-081-97	DIODE MMDL914T1	
C6505	1-131-872-91	CERAMIC CHIP 1000PF	10% 630V	D6505	8-719-054-59	DIODE FSF05A60	
C6517	1-117-227-11	MYLAR 1UF	10.00% 450V	D6506	8-719-054-59	DIODE FSF05A60	
C6518	1-117-227-11	MYLAR 1UF	10.00% 450V	D6509	6-500-108-01	DIODE EP05FA20	
C6519	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	D6510	6-500-137-01	DIODE BAT54HT1	
C6520	1-117-227-11	MYLAR 1UF	10.00% 450V	D6511	8-719-081-97	DIODE MMDL914T1	
C6521	1-107-823-11	CERAMIC CHIP 0.47UF	10.00% 16V	D6512	8-719-081-97	DIODE MMDL914T1	
C6522	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	D6513	8-719-081-97	DIODE MMDL914T1	
C6523	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	< FUSE >			
C6524	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V	F6000 Δ	1-576-867-11	FUSE 4A 250V	
C6525	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V	FH6000 Δ	1-533-223-11	FUSE HOLDER	
C6526	1-107-906-11	ELECT 10UF	20% 50V	FH6001 Δ	1-533-223-11	FUSE HOLDER	
C6527	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V	< FERRITE BEAD >			
C6528	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V	FB6100	1-410-397-21	FERRITE 1.1UH	
< CONNECTOR >				FB6101	1-410-397-21	FERRITE 1.1UH	
CN6001 Δ	*1-691-960-11	PIN, CONNECTOR (PC BOARD) 3P		< IC >			
CN6200	*1-564-595-11	PLUG, CONNECTOR 14P		IC6100	6-706-852-01	IC CXD9841M	
CN6202	*1-564-512-11	PLUG, CONNECTOR 9P		IC6200	8-759-682-42	IC MM1431ATT	
CN6203	*1-564-508-11	PLUG, CONNECTOR 5P		IC6300	6-600-279-01	IC STR-A6169	
< DIODE >				IC6301	8-759-682-42	IC MM1431ATT	
D6000	8-719-510-53	DIODE D4SB60L		IC6402	8-759-682-42	IC MM1431ATT	
D6001	8-719-948-45	DIODE ERA22-08		IC6502	6-704-815-01	IC FA5501N-TE1	
D6002	8-719-081-97	DIODE MMDL914T1		IC6503	8-759-682-42	IC MM1431ATT	
D6102	6-500-137-01	DIODE BAT54HT1					

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G1

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< COIL >				R6110	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W
L6001 Δ	1-457-037-11	LINE FILTER COIL		R6111	1-218-873-11	METAL CHIP	12K 0.5% 1/10W
L6201	1-406-971-21	INDUCTOR	10UH	R6114	1-211-977-11	METAL CHIP	22 0.5% 1/10W
L6203	1-414-487-41	INDUCTOR	1UH	R6116	1-216-009-91	RES-CHIP	22 5% 1/10W
L6204	1-414-487-41	INDUCTOR	1UH	R6117	1-216-009-91	RES-CHIP	22 5% 1/10W
L6300	1-414-934-21	INDUCTOR	10UH	R6118	1-216-833-11	METAL CHIP	10K 5% 1/10W
L6500	1-457-039-12	INDUCTOR	110UH	R6119	1-216-833-11	METAL CHIP	10K 5% 1/10W
L6502	1-456-950-11	INDUCTOR	380UH	R6122	1-216-361-00	METAL OXIDE	0.22 5% 2W
< PHOTOCOUPLER >				R6123	1-218-847-11	METAL CHIP	1K 0.5% 1/10W
PH6000 Δ	6-600-187-01	PHOTO COUPLER	PC123Y22J00F	R6127	1-216-857-11	METAL CHIP	1M 5% 1/10W
PH6100 Δ	6-600-187-01	PHOTO COUPLER	PC123Y22J00F	R6200	1-216-821-11	METAL CHIP	1K 5% 1/10W
PH6300 Δ	6-600-187-01	PHOTO COUPLER	PC123Y22J00F	R6201	1-216-821-11	METAL CHIP	1K 5% 1/10W
PH6400 Δ	6-600-187-01	PHOTO COUPLER	PC123Y22J00F	R6203	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
PH6402 Δ	6-600-187-01	PHOTO COUPLER	PC123Y22J00F	R6204	1-218-843-11	METAL CHIP	680 0.5% 1/10W
PH6501 Δ	6-600-187-01	PHOTO COUPLER	PC123Y22J00F	R6205	1-218-865-11	METAL CHIP	5.6K 0.5% 1/10W
< TRANSISTOR >				R6207	1-218-847-11	METAL CHIP	1K 0.5% 1/10W
Q6100	6-551-302-01	TRANSISTOR 2SK3561 (LBS1SONY,Q)		R6208	1-249-377-11	CARBON	0.47 5% 1/4W
Q6101	6-551-302-01	TRANSISTOR 2SK3561 (LBS1SONY,Q)		R6226	1-249-389-11	CARBON	4.7 5% 1/4W
Q6400	8-729-804-41	TRANSISTOR 2SB1122-S		R6300	1-249-381-11	CARBON	1 5% 1/4W
Q6401	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6301	1-216-353-00	METAL OXIDE	2.2 5% 1W
Q6402	8-729-023-22	TRANSISTOR 2SD2114K		R6305	1-260-129-11	CARBON	330K 5% 1/2W
Q6403	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		R6306	1-216-813-11	METAL CHIP	220 5% 1/10W
Q6404	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6307	1-249-385-11	CARBON	2.2 5% 1/4W
Q6500	6-551-303-01	TRANSISTOR 2SK3683-01MR-F111		R6308	1-249-393-11	CARBON	10 5% 1/4W
Q6501	8-729-820-90	TRANSISTOR 2SD1621-ST		R6310	1-216-817-11	METAL CHIP	470 5% 1/10W
Q6502	8-729-804-41	TRANSISTOR 2SB1122-S		R6311	1-216-823-11	METAL CHIP	1.5K 5% 1/10W
Q6503	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R		R6313	1-216-809-11	METAL CHIP	100 5% 1/10W
Q6504	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R6314	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
< RESISTOR >				R6315	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
R6001 Δ	1-240-938-91	METAL	1.5M 5% 0.5W	R6400	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6002 Δ	1-240-251-11	CEMENTED	6.8 5% 10W	R6401	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W
R6003	1-247-752-11	CARBON	1K 5% 1/2W	R6402	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6004	1-216-829-11	METAL CHIP	4.7K 5% 1/10W	R6403	1-218-887-11	METAL CHIP	47K 0.5% 1/10W
R6014	1-215-859-00	METAL OXIDE	22 5% 1W	R6404	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R6016	1-243-681-71	METAL OXIDE	33 5% 1W	R6405	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R6101	1-249-385-11	CARBON	2.2 5% 1/4W	R6407	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R6102 Δ	1-202-933-61	FUSIBLE	0.1 10% 1/2W	R6408	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W
R6103	1-211-985-11	METAL CHIP	47 0.5% 1/10W	R6409	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6104	1-218-871-11	METAL CHIP	10K 0.5% 1/10W	R6410	1-216-823-11	METAL CHIP	1.5K 5% 1/10W
R6105	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	R6412	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6106	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	R6413	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W
R6107	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	R6436	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R6108	1-208-836-11	METAL CHIP	180K 0.5% 1/10W	R6437	1-216-821-11	METAL CHIP	1K 5% 1/10W
R6109	1-208-834-11	METAL CHIP	150K 0.5% 1/10W	R6441	1-216-837-11	METAL CHIP	22K 5% 1/10W
				R6442	1-216-833-11	METAL CHIP	10K 5% 1/10W
				R6452	1-218-851-11	METAL CHIP	1.5K 0.5% 1/10W
				R6453	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
				R6454	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
				R6455	1-218-899-11	METAL CHIP	150K 0.5% 1/16W
				R6456	1-218-871-11	METAL CHIP	10K 0.5% 1/10W

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

G1 GE1

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
R6457	1-218-903-11	METAL CHIP	220K 0.5% 1/10W	< THERMISTOR >			
R6458	1-216-839-11	METAL CHIP	33K 5% 1/10W	TH6300	1-803-586-41	THERMISTOR	
R6459	1-218-831-11	METAL CHIP	220 0.5% 1/10W				
R6503	1-215-882-00	METAL OXIDE	22 5% 2W				
R6505	1-216-864-11	SHORT CHIP	0				
				< VARISTOR >			
R6507	1-216-821-11	METAL CHIP	1K 5% 1/10W	VD6000	△ 1-804-996-21	VARISTOR	
R6508	1-216-829-11	METAL CHIP	4.7K 5% 1/10W	VD6001	△ 1-804-996-21	VARISTOR	
R6509	1-216-829-11	METAL CHIP	4.7K 5% 1/10W				
R6512	1-218-907-11	METAL CHIP	330K 0.5% 1/10W				
R6513	1-218-879-11	METAL CHIP	22K 0.5% 1/10W				
R6514	1-218-895-11	METAL CHIP	100K 0.5% 1/10W				
R6516	1-218-760-11	METAL CHIP	220K 0.5% 1/10W				
R6517	1-218-760-11	METAL CHIP	220K 0.5% 1/10W				
R6518	1-218-760-11	METAL CHIP	220K 0.5% 1/10W				
R6519	1-218-760-11	METAL CHIP	220K 0.5% 1/10W				
R6526	1-218-760-11	METAL CHIP	220K 0.5% 1/10W				
R6527	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W				
R6528	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W				
R6531	1-217-611-00	METAL	0.1 10% 2W				
R6532	1-216-845-11	METAL CHIP	100K 5% 1/10W				
R6533	1-216-833-11	METAL CHIP	10K 5% 1/10W				
R6534	1-216-809-11	METAL CHIP	100 5% 1/10W				
R6537	1-249-389-11	CARBON	4.7 5% 1/4W				
R6538	1-249-405-11	CARBON	100 5% 1/4W				
R6539	1-216-809-11	METAL CHIP	100 5% 1/10W				
R6542	1-216-835-11	METAL CHIP	15K 5% 1/10W				
R6545	1-208-840-11	METAL CHIP	270K 0.5% 1/10W				
R6546	1-208-840-11	METAL CHIP	270K 0.5% 1/10W				
R6547	1-208-840-11	METAL CHIP	270K 0.5% 1/10W				
R6548	1-208-840-11	METAL CHIP	270K 0.5% 1/10W				
R6549	1-218-760-11	METAL CHIP	220K 0.5% 1/10W				
R6550	1-218-869-11	METAL CHIP	8.2K 0.5% 1/10W				
R6551	1-249-393-11	CARBON	10 5% 1/4W				
R6552	1-216-809-11	METAL CHIP	100 5% 1/10W				
R6553	1-216-821-11	METAL CHIP	1K 5% 1/10W				
R6554	1-216-833-11	METAL CHIP	10K 5% 1/10W				
R6555	1-216-845-11	METAL CHIP	100K 5% 1/10W				
R6556	1-216-837-11	METAL CHIP	22K 5% 1/10W				
R6557	1-218-823-11	METAL CHIP	100 0.5% 1/10W				
< RELAY >							
RY6003	△ 1-755-418-12	RELAY (AC POWER)					
RY6004	△ 1-755-418-12	RELAY (AC POWER)					
< TRANSFORMER >							
T6100	△ 1-443-587-11	CONVERTER TRANSFORMER (PIT)					
T6300	1-443-313-21	TRANSFORMER, CONVERTER (SBT)					
</							

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

GE1

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
< CONNECTOR >				< COIL >			
CN8800	1-815-889-21	PIN, CONNECTOR (PC BOARD) 14P		L8800	1-416-606-11	INDUCTOR 47UH	
CN8801	1-818-033-21	PIN, CONNECTOR (PC BOARD)		L8801	1-409-556-11	INDUCTOR 47UH	
CN8802	*1-764-094-21	PIN, CONNECTOR (PC BOARD) 9P		L8802	1-424-976-21	INDUCTOR 47UH	
< DIODE >				L8804	1-416-606-11	INDUCTOR 47UH	
D8800	8-719-081-97	DIODE MMDL914T1		L8805	1-424-976-21	INDUCTOR 47UH	
D8803	6-501-336-01	DIODE RSX201L-30TE25		L8808	1-424-976-21	INDUCTOR 47UH	
D8805	6-501-336-01	DIODE RSX201L-30TE25		L8809	1-416-606-11	INDUCTOR 47UH	
D8806	8-719-069-55	DIODE UDZSTE-175.6B		L8810	1-456-786-21	INDUCTOR 47UH	
D8812	6-501-336-01	DIODE RSX201L-30TE25		L8811	1-412-058-11	INDUCTOR 10UH	
D8813	6-501-336-01	DIODE RSX201L-30TE25		L8812	1-412-058-11	INDUCTOR 10UH	
D8814	8-719-069-55	DIODE UDZSTE-175.6B		L8813	1-412-058-11	INDUCTOR 10UH	
D8815	8-719-069-55	DIODE UDZSTE-175.6B		L8814	1-412-058-11	INDUCTOR 10UH	
D8816	6-501-336-01	DIODE RSX201L-30TE25		< TRANSISTOR >			
< FUSE >				Q8803	6-550-549-01	TRANSISTOR DTC114EUAFT106	
F8801	Δ 1-576-603-11	FUSE 3.15A 24V		Q8804	8-729-422-33	TRANSISTOR 2SD601A-Q-TX	
F8802	Δ 1-576-603-11	FUSE 3.15A 24V		Q8805	6-550-549-01	TRANSISTOR DTC114EUAFT106	
< FERRITE BEAD >				Q8806	8-729-422-33	TRANSISTOR 2SD601A-Q-TX	
FB8800	1-469-775-21	FERRITE 0UH		< RESISTOR >			
FB8802	1-469-775-21	FERRITE 0UH		R8802	1-216-295-91	SHORT CHIP 0	
FB8803	1-469-775-21	FERRITE 0UH		R8803	1-216-295-91	SHORT CHIP 0	
FB8804	1-469-775-21	FERRITE 0UH		R8804	1-216-864-11	SHORT CHIP 0	
FB8805	1-469-775-21	FERRITE 0UH		R8807	1-216-821-11	METAL CHIP 1K 5% 1/10W	
FB8806	1-469-775-21	FERRITE 0UH		R8808	1-216-295-91	SHORT CHIP 0	
FB8808	1-469-775-21	FERRITE 0UH		R8816	1-218-861-11	METAL CHIP 3.9K 0.5% 1/10W	
FB8810	1-469-775-21	FERRITE 0UH		R8818	1-216-841-11	METAL CHIP 47K 5% 1/10W	
FB8811	1-469-775-21	FERRITE 0UH		R8819	1-216-295-91	SHORT CHIP 0	
FB8812	1-469-775-21	FERRITE 0UH		R8820	1-216-295-91	SHORT CHIP 0	
FB8813	1-469-775-21	FERRITE 0UH		R8821	1-218-850-11	METAL CHIP 1.3K 0.5% 1/10W	
FB8814	1-469-775-21	FERRITE 0UH		R8825	1-218-850-11	METAL CHIP 1.3K 0.5% 1/10W	
FB8816	1-469-775-21	FERRITE 0UH		R8826	1-218-861-11	METAL CHIP 3.9K 0.5% 1/10W	
FB8817	1-469-775-21	FERRITE 0UH		R8836	1-216-833-11	METAL CHIP 10K 5% 1/10W	
FB8818	1-469-775-21	FERRITE 0UH		R8837	1-216-833-11	METAL CHIP 10K 5% 1/10W	
FB8819	1-469-775-21	FERRITE 0UH		R8838	1-216-833-11	METAL CHIP 10K 5% 1/10W	
FB8820	1-469-775-21	FERRITE 0UH		R8840	1-216-833-11	METAL CHIP 10K 5% 1/10W	
FB8821	1-469-775-21	FERRITE 0UH		R8841	1-216-295-91	SHORT CHIP 0	
FB8822	1-469-775-21	FERRITE 0UH		R8848	1-216-295-91	SHORT CHIP 0	
FB8823	1-469-775-21	FERRITE 0UH		R8853	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	
< IC >				R8854	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	
IC8800	6-702-142-01	IC PQ1CY1032ZP		R8855	1-216-295-91	SHORT CHIP 0	
IC8802	6-704-407-01	IC PQ1CZ41H2ZPH		R8856	1-218-857-11	METAL CHIP 2.7K 0.5% 1/10W	
IC8803	6-705-468-01	IC BA33BC0FP-E2		R8857	1-218-861-11	METAL CHIP 3.9K 0.5% 1/10W	
IC8805	6-702-142-01	IC PQ1CY1032ZP		R8862	1-216-864-11	SHORT CHIP 0	
IC8806	8-759-460-79	IC BA09FP-E2		R8865	1-216-295-91	SHORT CHIP 0	
IC8810	6-706-999-01	IC BA09CC0WFP-E2		R8866	1-216-295-91	SHORT CHIP 0	
				R8867	1-216-295-91	SHORT CHIP 0	
				R8868	1-216-295-91	SHORT CHIP 0	
				R8869	1-216-295-91	SHORT CHIP 0	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
MISCELLANEOUS							
	1-805-888-11	LCD PANEL (23 INCH WXGA+TFT) (KDL-S23A11E)		*2-655-830-11	INSTRUCTION MANUAL (ENGLISH/GERMAN/FRENCH/SPANISH)		
	1-826-062-11	LOUDSPEAKER (4X10CM) (KDL-S23A11E)		*2-655-830-21	INSTRUCTION MANUAL (ITALIAN/SWEDISH/FINNISH/DANISH)		
	1-826-063-21	LOUDSPEAKER (4.2X15CM) (KDL-S26A11E)					
	1-826-042-21	LOUDSPEAKER (5X15CM) (KDL-S32A11E)					
	8-597-993-00	TUNER FSS BTF-EF412Z					
△	1-819-594-11	INLET, AC (WITH NOISE FILTER)					
△	1-830-611-21	POWER-SUPPLY CORD					
ACCESSORIES AND CONNECTORS				REMOTE COMMANDER			
				1-479-392-12 REMOTE COMMANDER (RM-ED002)			

