

SECTION 8
REPAIR PARTS LIST


8-1. EXPLODED VIEWS

NOTE:

- -XX, -X mean standardized parts, so they may have some differences from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.


The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety. Replace only with part number specified.

8-1-1. OVERALL SECTION

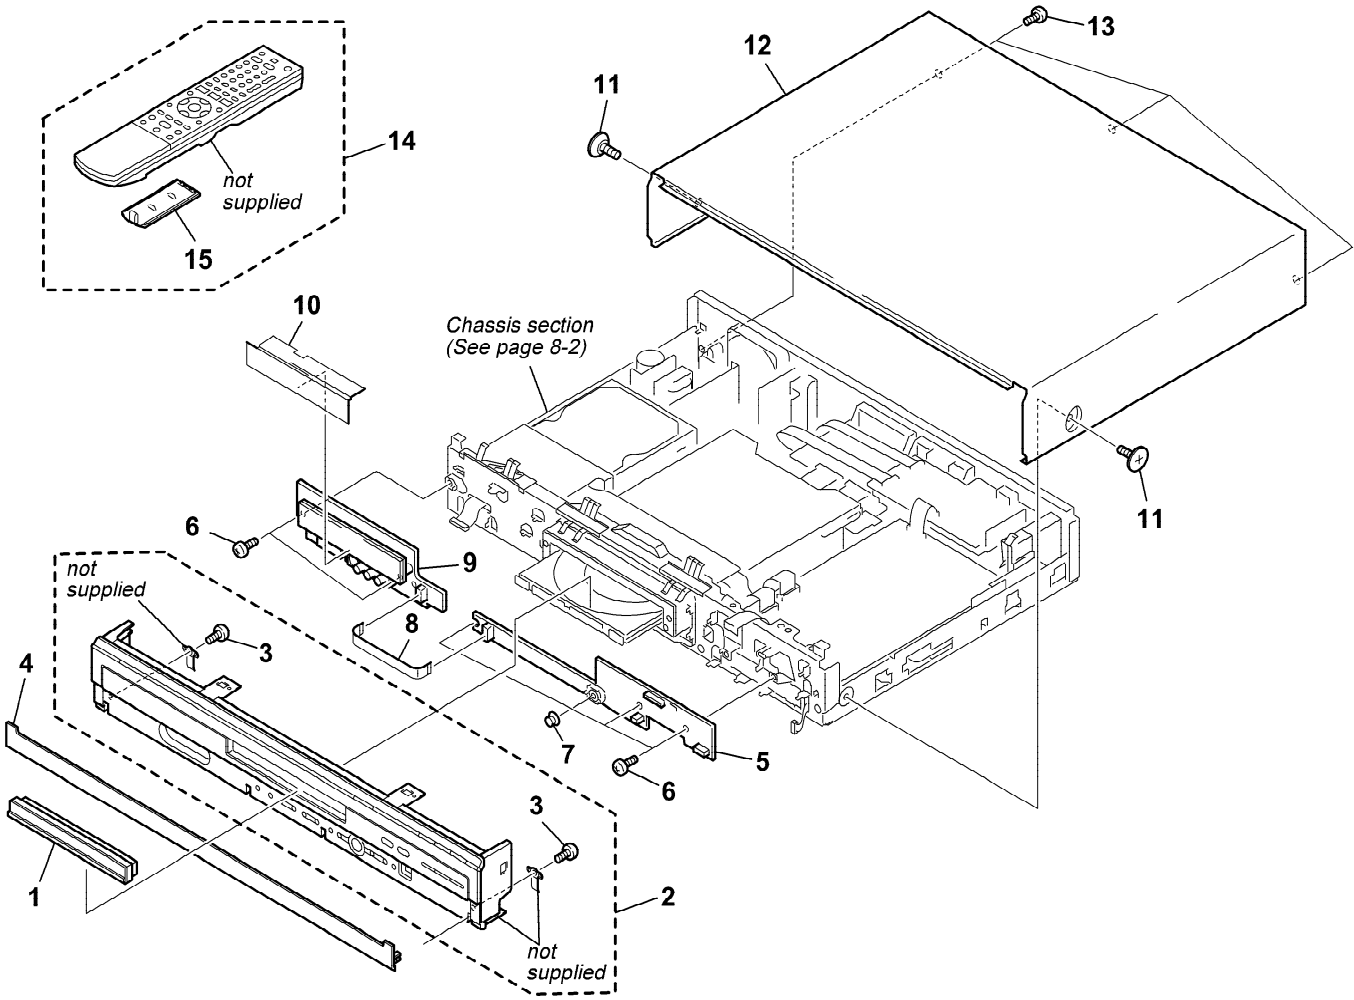

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
1	X-2050-530-1	COVER ASSY (1380), TRAY		* 9	A-1129-169-A	FL-144 (CS) COMPL	
2	X-2067-096-1	PANEL ASSY, FRONT (1385)		10	2-189-250-11	COVER, FL	
3	7-685-533-14	SCREW +BTP 2.6X6 TYPE2 N-S		11	3-070-883-41	SCREW, TAPPING	
4	2-515-217-21	DOOR (3G), SLIDE		12	A-1121-378-A	CASE BLOCK ASSY (SERVICE USE)	
* 5	A-1129-171-A	FR-232 (BS) COPML		13	3-077-331-31	+BV3 (3-CR)	
6	3-077-331-01	+BV3 (3-CR)		14	1-479-289-11	REMOTE COMMANDER (RMT-D217P)	
7	2-159-703-12	CURSOR		15	3-071-119-91	LID,BATTERY(FOR RMT-D217P)	
8	1-829-813-11	CABLE, FLEXIBLE FLAT (FFS-001)					

8-1-2. CHASSIS SECTION

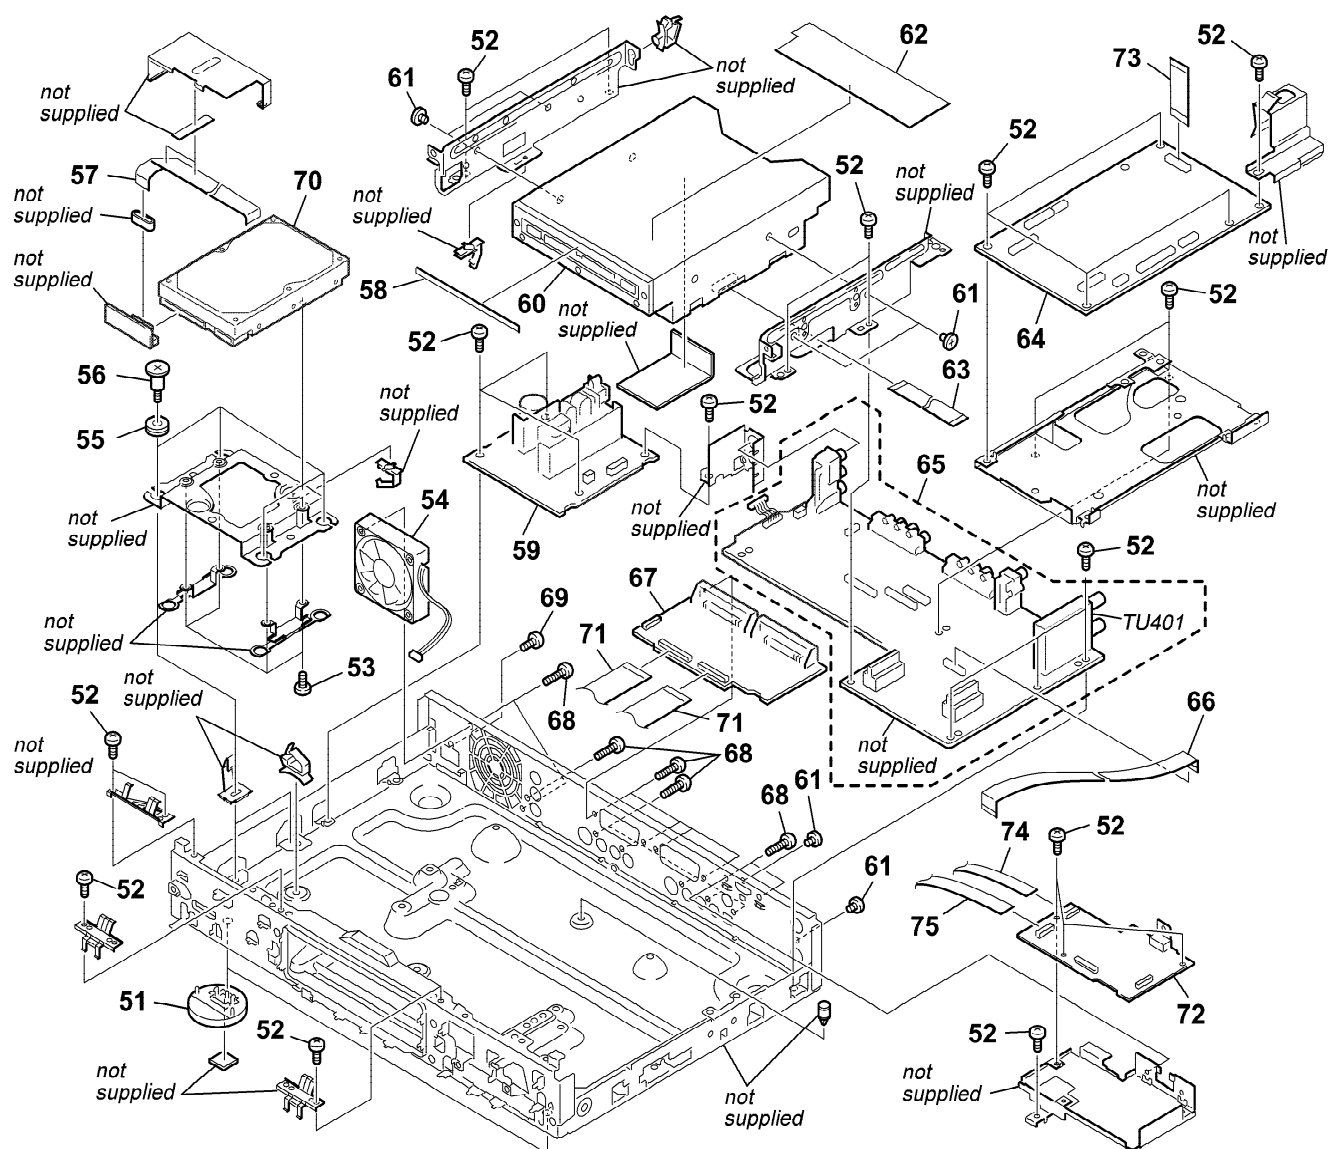

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
51	3-086-778-01	FOOT		* 64	A-1129-278-A	RD-58 (BS) S COMPL	
52	3-077-331-01	+BV3 (3-CR)		* 65	A-1129-167-A	AV-089 (LS) COMPL	
53	3-087-675-01	6-32UNCX5		66	1-829-815-11	CABLE, FLEXIBLE FLAT (FAF-001)	
54	1-787-291-11	FAN, D.C		* 67	A-1129-173-A	ER-036 (BS) COMPL	
55	3-089-380-01	DAMPER		68	3-077-331-31	+BV3 (3-CR)	
56	2-159-920-01	SCREW, HDD DAMPER		69	3-088-022-01	+P3 (B TYPE) (3-CR)	
57	1-830-755-21	CABLE, FLEXIBLE FLAT (FRH-002)		70	A-1151-702-A	HDD (HGST-KUROFUNE-400G) ASSY	
58	2-635-472-01	CUSHION (DRIVE-1380)		71	1-830-443-11	CABLE, FLEXIBLE FLAT (FAE-007)	
△ 59	1-468-930-11	POWER SUPPLY BLOCK		* 72	A-1129-175-A	MI-056 (AS) COMPL	
60	1-797-247-11	DRIVE, DVD DRW-V35P		73	1-830-772-11	CABLE, FLEXIBLE FLAT (FFC-059)	
61	3-088-023-01	+B3 (3-CR)		74	1-830-771-11	CABLE, FLEXIBLE FLAT (FMA-018)	
62	2-159-921-11	COVER, FLEXIBLE		75	1-830-664-11	CABLE, FLEXIBLE FLAT (FME-004)	
63	1-830-665-11	CABLE, FLEXIBLE FLAT (FRD-002)		TU401	8-597-979-00	TUNER, FSS BTF-DF421	

Note : The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

8-2. ELECTRICAL PARTS LIST

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX, -X mean standardized parts, so they may have some difference from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- CAPACITORS:
uF: μ F
- RESISTORS
All resistors are in ohms.
METAL: metal film resistor
METAL OXIDE: Metal Oxide-film resistor
F: nonflammable
- COILS
uH: μ H
- SEMICONDUCTORS
In each case, u: μ , for example:
uA..., μ A..., uPA..., μ PA...,
uPB..., μ PB..., uPC..., μ PC...,
uPD..., μ PD...

When indicating parts by reference number, please include the board name.

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
*	A-1129-167-A	AV-089 (LS) COMPL *****		C312	1-164-217-11	CERAMIC CHIP 150PF 5% 50V	
		< CAPACITOR >		C314	1-164-217-11	CERAMIC CHIP 150PF 5% 50V	
C101	1-126-947-11	ELECT 47uF 20% 35V		C317	1-126-934-11	ELECT 220uF 20% 16V	
C104	1-137-921-31	ELECT 1500uF 20% 10V		C318	1-126-934-11	ELECT 220uF 20% 16V	
C107	1-126-947-11	ELECT 47uF 20% 35V		C319	1-126-947-11	ELECT 47uF 20% 35V	
C108	1-110-501-11	CERAMIC CHIP 0.33uF 10% 16V		C320	1-126-947-11	ELECT 47uF 20% 35V	
C110	1-126-947-11	ELECT 47uF 20% 35V		C321	1-126-960-11	ELECT 47uF 20% 35V	
C111	1-126-947-11	ELECT 47uF 20% 35V		C322	1-126-960-11	ELECT 47uF 20% 35V	
C115	1-107-682-11	CERAMIC CHIP 1uF 10% 16V		C323	1-126-786-11	ELECT 47uF 20% 16V	
C116	1-128-945-31	ELECT 1000uF 20% 10V		C324	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C120	1-165-714-31	ELECT 150uF 20% 6.3V		C325	1-162-970-11	CERAMIC CHIP 0.1uF 10% 16V	
C121	1-165-714-31	ELECT 150uF 20% 6.3V		C326	1-162-970-11	CERAMIC CHIP 0.1uF 10% 16V	
C124	1-126-942-61	ELECT 1000uF 20% 25V		C327	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C126	1-126-947-11	ELECT 47uF 20% 35V		C328	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C127	1-126-947-11	ELECT 47uF 20% 35V		C329	1-126-786-11	ELECT 47uF 20% 16V	
C128	1-126-947-11	ELECT 47uF 20% 35V		C330	1-126-947-11	ELECT 47uF 20% 35V	
C129	1-126-947-11	ELECT 47uF 20% 35V		C331	1-126-947-11	ELECT 47uF 20% 35V	
C132	1-128-952-31	ELECT 220uF 20% 25V		C334	1-126-947-11	ELECT 47uF 20% 35V	
C133	1-126-947-11	ELECT 47uF 20% 35V		C335	1-162-927-11	CERAMIC CHIP 100PF 5% 50V	
C140	1-126-963-11	ELECT 4.7uF 20% 50V		C336	1-162-927-11	CERAMIC CHIP 100PF 5% 50V	
C205	1-126-947-11	ELECT 47uF 20% 35V		C341	1-126-947-11	ELECT 47uF 20% 35V	
C206	1-126-947-11	ELECT 47uF 20% 35V		C401	1-126-786-11	ELECT 47uF 20% 16V	
C207	1-126-947-11	ELECT 47uF 20% 35V		C405	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V	
C208	1-126-947-11	ELECT 47uF 20% 35V		C406	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C209	1-126-947-11	ELECT 47uF 20% 35V		C407	1-126-964-11	ELECT 10uF 20% 50V	
C210	1-126-963-11	ELECT 4.7uF 20% 50V		C408	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C211	1-126-947-11	ELECT 47uF 20% 35V		C409	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V	
C212	1-126-963-11	ELECT 4.7uF 20% 50V		C410	1-126-964-11	ELECT 10uF 20% 50V	
C213	1-126-947-11	ELECT 47uF 20% 35V		C414	1-126-947-11	ELECT 47uF 20% 35V	
C214	1-126-947-11	ELECT 47uF 20% 35V		C415	1-126-933-11	ELECT 100uF 20% 16V	
C215	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V		C416	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C216	1-126-964-11	ELECT 10uF 20% 50V		C422	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C217	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V		C446	1-162-927-11	CERAMIC CHIP 100PF 5% 50V	
C218	1-126-947-11	ELECT 47uF 20% 35V		C447	1-162-927-11	CERAMIC CHIP 100PF 5% 50V	
C219	1-126-961-11	ELECT 2.2uF 20% 50V		C449	1-162-915-11	CERAMIC CHIP 10PF 0PF 50V	
C220	1-107-826-11	CERAMIC CHIP 0.1uF 10.00% 16V		C452	1-115-416-11	CERAMIC CHIP 0.001uF 5% 25V	
C221	1-126-947-11	ELECT 47uF 20% 35V		C453	1-115-416-11	CERAMIC CHIP 0.001uF 5% 25V	
C222	1-126-964-11	ELECT 10uF 20% 50V		C454	1-115-416-11	CERAMIC CHIP 0.001uF 5% 25V	
C225	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V		C455	1-162-919-11	CERAMIC CHIP 22PF 5% 50V	
C226	1-165-883-11	CERAMIC CHIP 10000PF 10% 630V		C456	1-115-416-11	CERAMIC CHIP 0.001uF 5% 25V	
C301	1-126-947-11	ELECT 47uF 20% 35V		C457	1-115-416-11	CERAMIC CHIP 0.001uF 5% 25V	
C302	1-126-924-11	ELECT 330uF 20% 10V		C458	1-115-416-11	CERAMIC CHIP 0.001uF 5% 25V	
C304	1-164-217-11	CERAMIC CHIP 150PF 5% 50V		C459	1-100-927-21	CERAMIC CHIP 0.001uF 10% 630V	
C307	1-164-217-11	CERAMIC CHIP 150PF 5% 50V		C502	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
C308	1-126-934-11	ELECT 220uF 20% 16V		C605	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C309	1-164-739-11	CERAMIC CHIP 560PF 5% 50V					
C310	1-164-739-11	CERAMIC CHIP 560PF 5% 50V					

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
C606	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C726	1-164-677-11	CERAMIC CHIP	0.033uF	10%	16V
C609	1-115-871-11	ELECT	1uF	20%	50V	C727	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C611	1-126-786-11	ELECT	47uF	20%	16V	C729	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C612	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C732	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C614	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C734	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C615	1-126-786-11	ELECT	47uF	20%	16V	C735	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C616	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C738	1-126-947-11	ELECT	47uF	20%	35V
C618	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	C739	1-126-947-11	ELECT	47uF	20%	35V
C619	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	C815	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C620	1-162-908-11	CERAMIC CHIP	3PF	0.25PF	50V	C1201	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V
C621	1-162-908-11	CERAMIC CHIP	3PF	0.25PF	50V	C1202	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C623	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C1203	1-126-947-11	ELECT	47uF	20%	35V
C624	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	< CONNNECTOR >					
C625	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	CN102	1-778-317-11	CONNECTOR, BOARD TO BOARD	13P		
C626	1-104-655-91	ELECT	470uF	20%	6.3V	CN301	1-694-994-11	TERMINAL BOARD			
C627	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	CN501	1-818-859-11	CONNECTOR, BOARD TO BOARD	42P		
C628	1-162-923-11	CERAMIC CHIP	47PF	5%	50V	CN502	1-818-859-11	CONNECTOR, BOARD TO BOARD	42P		
C630	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	CN602	1-774-768-31	CONNECTOR, FFC/FPC	17P		
C631	1-162-923-11	CERAMIC CHIP	47PF	5.00%	50V	* CN701	1-564-712-11	PIN, CONNECTOR (SMALL TYPE)	10P		
C633	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	CN901	1-784-327-41	CONNECTOR, FFC/FPC	28P		
C634	1-162-923-11	CERAMIC CHIP	47PF	5%	50V	CN902	1-784-327-41	CONNECTOR, FFC/FPC	28P		
C635	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	CN1201	1-564-705-11	PIN, CONNECTOR (SMALL TYPE)	3P		
C636	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	< DIODE >					
C637	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D108	6-500-451-01	DIODE CMS04-TE12R			
C638	1-164-739-11	CERAMIC CHIP	560PF	5%	50V	D109	8-719-053-18	DIODE 1SR154-400TE-25			
C639	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D301	8-719-902-49	DIODE BAV70			
C640	1-125-891-11	CERAMIC CHIP	0.47uF	10%	10V	D302	8-719-053-18	DIODE 1SR154-400TE-25			
C641	1-125-891-11	CERAMIC CHIP	0.47uF	10%	10V	D303	8-719-914-44	DIODE DAP202K			
C643	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D304	8-719-914-44	DIODE DAP202K			
C645	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D603	8-719-075-77	DIODE EC10DA40-TE12			
C646	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D604	8-719-056-82	DIODE UDZ-TE-17-6.2B			
C647	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D605	8-719-075-77	DIODE EC10DA40-TE12			
C648	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D606	8-719-988-61	DIODE 1SS355TE-17			
C649	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D608	8-719-988-61	DIODE 1SS355TE-17			
C651	1-115-456-21	CAPACITOR	0.22F		5.5V	D712	8-719-071-15	DIODE HZM6.8ZWA1TL			
C652	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	D713	8-719-071-15	DIODE HZM6.8ZWA1TL			
C654	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	D805	8-719-071-15	DIODE HZM6.8ZWA1TL			
C656	1-126-786-11	ELECT	47uF	20%	16V	D808	8-719-071-15	DIODE HZM6.8ZWA1TL			
C658	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	< TERMINAL >					
C662	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	* ET101	1-537-738-21	TERMINAL, EARTH			
C663	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	< IC >					
C667	1-119-941-91	ELECT	470uF	20%	6.3V	IC101	6-703-758-01	IC PQ050DZ01ZPH			
C703	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	IC102	6-706-740-01	IC BA00BC0WFP-E2			
C705	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	IC106	6-706-725-01	IC PQ070XZ02ZPH			
C706	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	IC107	6-706-726-01	IC PQ033DZ01ZPH			
C707	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	IC108	6-706-237-01	IC PQ1MX55M2SPQ			
C710	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	IC111	6-706-724-01	IC S-8520E25MC-BJKT2G			
C711	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	IC112	6-707-180-01	IC PQ070XH02ZPH			
C713	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	IC201	6-707-181-01	IC AK5366VQ-L			
C714	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	IC301	6-707-187-01	IC HA17558AFEL-E			
C715	1-164-677-11	CERAMIC CHIP	0.033uF	10%	16V	IC302	6-705-337-01	IC TK11150CSCL-G			
C716	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	IC401	8-749-925-00	IC TK11819MTL			
C717	1-126-964-11	ELECT	10uF	20%	50V	IC601	6-706-673-01	IC S-80852CNMC-B9DT2G			
C718	1-125-837-91	CERAMIC CHIP	1uF	10%	6.3V	IC602	6-703-225-01	IC S-80928CNMC-G8YT2G			
C719	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	IC604	6-805-443-01	IC M306H3MC-061FPU2			
C720	1-126-947-11	ELECT	47uF	20%	25V	IC605	8-759-679-19	IC S-24C04BFJ-TB			
C721	1-126-947-11	ELECT	47uF	20%	25V						
C722	1-125-837-91	CERAMIC CHIP	1uF	10%	6.3V						
C724	1-162-927-11	CERAMIC CHIP	100PF	5%	50V						
C725	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V						

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
IC701	6-706-723-01	IC BH7623KS2		Q613	8-729-010-25	TRANSISTOR MSD601-RT1	
IC1201	6-706-742-01	IC BD7800FP-E2		Q614	8-729-010-25	TRANSISTOR MSD601-RT1	
		< COIL >		Q615	8-729-010-25	TRANSISTOR MSD601-RT1	
L101	1-414-740-21	INDUCTOR 4.7uH		Q616	8-729-421-22	TRANSISTOR UN2211	
L103	1-456-918-11	INDUCTOR 22uH		Q617	8-729-045-17	TRANSISTOR 2SB1561T100Q	
L105	1-412-521-31	INDUCTOR 4.7uH		Q618	8-729-010-05	TRANSISTOR MSB709-RT1	
L106	1-412-521-31	INDUCTOR 4.7uH		Q619	8-729-421-22	TRANSISTOR UN2211	
L301	1-412-062-11	INDUCTOR 47uH		Q807	8-729-421-19	TRANSISTOR UN2213	
L302	1-400-145-21	INDUCTOR 47uH		Q808	8-729-901-06	TRANSISTOR DTA144EK	
L401	1-414-183-41	INDUCTOR 10uH		Q1201	8-729-421-19	TRANSISTOR UN2213	
L402	1-469-967-21	INDUCTOR 10uH				< RESISTOR >	
L403	1-414-858-31	INDUCTOR 1MH		R102	1-216-864-11	SHORT CHIP 0	
L404	1-414-183-41	INDUCTOR 10uH		R112	1-216-864-11	SHORT CHIP 0	
L405	1-469-967-21	INDUCTOR 10uH		R116	1-218-895-11	METAL CHIP 100K	0.5% 1/10W
L406	1-414-183-41	INDUCTOR 10uH		R117	1-218-865-11	METAL CHIP 5.6K	0.5% 1/10W
L701	1-469-967-21	INDUCTOR 10uH		R118	1-218-883-11	METAL CHIP 33K	0.5% 1/10W
L803	1-412-060-11	INDUCTOR 22uH		R121	1-216-295-91	SHORT CHIP 0	
L804	1-412-060-11	INDUCTOR 22uH		R125	1-216-295-91	SHORT CHIP 0	
		< FUSE >		R129	1-216-295-91	SHORT CHIP 0	
△PS101	1-576-415-11	FUSE 2A/36V		R130	1-216-295-91	SHORT CHIP 0	
△PS601	1-576-570-11	FUSE 0.63A/32V		R131	1-216-033-00	RES-CHIP 220	5% 1/10W
△PS602	1-576-863-21	FUSE 0.5A/32V		R134	1-218-851-11	METAL CHIP 1.5K	0.5% 1/10W
		< TRANSISTOR >		R135	1-218-863-11	METAL CHIP 4.7K	0.5% 1/10W
Q104	8-729-056-58	TRANSISTOR TPC6102(TE85R)		R136	1-218-859-11	METAL CHIP 3.3K	0.5% 1/10W
Q106	8-729-424-08	TRANSISTOR UN2111		R137	1-218-839-11	METAL CHIP 470	0.5% 1/10W
Q109	8-729-921-73	TRANSISTOR 2SD1781K-QR		R138	1-218-851-11	METAL CHIP 1.5K	0.5% 1/10W
Q301	8-729-045-17	TRANSISTOR 2SB1561T100Q		R139	1-218-859-11	METAL CHIP 3.3K	0.5% 1/10W
Q302	6-550-286-01	TRANSISTOR BC847CE6327		R143	1-216-295-91	SHORT CHIP 0	
Q303	8-729-045-17	TRANSISTOR 2SB1561T100Q		R144	1-216-295-91	SHORT CHIP 0	
Q304	8-729-421-19	TRANSISTOR UN2213		R148	1-216-829-11	METAL CHIP 4.7K	5% 1/10W
Q305	8-729-421-19	TRANSISTOR UN2213		R150	1-216-206-00	RES-CHIP 2.2K	5% 1/8W
Q306	8-729-027-53	TRANSISTOR DTC124TKA-T146		R151	1-216-206-00	RES-CHIP 2.2K	5% 1/8W
Q307	8-729-027-53	TRANSISTOR DTC124TKA-T146		R152	1-216-833-11	METAL CHIP 10K	5% 1/10W
Q308	6-550-280-01	TRANSISTOR BC857CE6327		R156	1-216-295-91	SHORT CHIP 0	
Q309	8-729-424-02	TRANSISTOR 2SB709A-QRS-TX		R157	1-216-295-91	SHORT CHIP 0	
Q310	8-729-046-97	TRANSISTOR 2SD1938(F)-T(TX).SO		R163	1-216-295-91	SHORT CHIP 0	
Q311	8-729-046-97	TRANSISTOR 2SD1938(F)-T(TX).SO		R175	1-216-295-91	SHORT CHIP 0	
Q312	8-729-230-49	TRANSISTOR 2SC2712-YG		R177	1-216-296-11	SHORT CHIP 0	
Q313	6-550-286-01	TRANSISTOR BC847CE6327		R178	1-216-864-11	SHORT CHIP 0	
Q314	8-729-216-22	TRANSISTOR 2SA1162-G		R179	1-216-864-11	SHORT CHIP 0	
Q315	6-550-280-01	TRANSISTOR BC857CE6327		R180	1-216-864-11	SHORT CHIP 0	
Q316	8-729-421-19	TRANSISTOR UN2213		R182	1-218-839-11	METAL CHIP 470	0.5% 1/10W
Q401	6-550-286-01	TRANSISTOR BC847CE6327		R183	1-218-863-11	METAL CHIP 4.7K	0.5% 1/10W
Q402	8-729-421-22	TRANSISTOR UN2211		R185	1-218-847-11	METAL CHIP 1K	0.5% 1/10W
Q403	8-729-010-25	TRANSISTOR MSD601-RT1		R186	1-216-295-91	SHORT CHIP 0	
Q404	8-729-904-87	TRANSISTOR 2SB1197K-R		R188	1-218-859-11	METAL CHIP 3.3K	0.5% 1/10W
Q405	6-550-286-01	TRANSISTOR BC847CE6327		R203	1-216-864-11	SHORT CHIP 0	
Q407	8-729-421-19	TRANSISTOR UN2213		R204	1-216-864-11	SHORT CHIP 0	
Q410	8-729-421-22	TRANSISTOR UN2211-TX		R205	1-216-864-11	SHORT CHIP 0	
Q412	8-729-904-87	TRANSISTOR 2SB1197K-R		R212	1-216-864-11	SHORT CHIP 0	
Q602	8-729-045-17	TRANSISTOR 2SB1561T100Q		R217	1-216-841-11	METAL CHIP 47K	5% 1/10W
Q604	6-550-280-01	TRANSISTOR BC857CE6327		R218	1-218-887-11	METAL CHIP 47K	0.5% 1/10W
Q605	6-550-286-01	TRANSISTOR BC847CE6327		R219	1-218-887-11	METAL CHIP 47K	0.5% 1/10W
Q606	8-729-421-19	TRANSISTOR UN2213		R220	1-218-887-11	METAL CHIP 47K	0.5% 1/10W
Q607	8-729-901-06	TRANSISTOR DTA144EK		R221	1-216-841-11	METAL CHIP 47K	5% 1/10W
Q608	8-729-048-28	TRANSISTOR 2SD1766-T100-QR		R222	1-218-871-11	METAL CHIP 10K	0.5% 1/10W
Q611	8-729-421-19	TRANSISTOR UN2213					
Q612	8-729-216-22	TRANSISTOR 2SA1162-G					

Note : The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R223	1-216-841-11	METAL CHIP	47K	5%	1/10W	R350	1-216-833-11	METAL CHIP	10K	5%	1/10W
R224	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R351	1-216-821-11	METAL CHIP	1K	5%	1/10W
R225	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R352	1-216-864-11	SHORT CHIP	0		
R226	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R354	1-216-817-11	METAL CHIP	470	5%	1/10W
R227	1-218-887-11	METAL CHIP	47K	0.5%	1/10W	R356	1-216-817-11	METAL CHIP	470	5%	1/10W
R228	1-216-841-11	METAL CHIP	47K	5%	1/10W	R357	1-216-864-11	SHORT CHIP	0		
R229	1-216-837-11	METAL CHIP	22K	5%	1/10W	R358	1-216-807-11	METAL CHIP	68	5%	1/10W
R230	1-216-837-11	METAL CHIP	22K	5%	1/10W	R359	1-216-807-11	METAL CHIP	68	5%	1/10W
R231	1-216-837-11	METAL CHIP	22K	5%	1/10W	R362	1-216-809-11	METAL CHIP	100	5%	1/10W
R232	1-216-801-11	METAL CHIP	22	5%	1/10W	R363	1-216-833-11	METAL CHIP	10K	5%	1/10W
R233	1-216-801-11	METAL CHIP	22	5%	1/10W	R365	1-216-864-11	SHORT CHIP	0		
R235	1-216-833-11	METAL CHIP	10K	5%	1/10W	R367	1-216-864-11	SHORT CHIP	0		
R236	1-216-833-11	METAL CHIP	10K	5%	1/10W	R386	1-216-864-11	SHORT CHIP	0		
R237	1-216-833-11	METAL CHIP	10K	5%	1/10W	R401	1-216-864-11	SHORT CHIP	0		
R238	1-216-809-11	METAL CHIP	100	5%	1/10W	R402	1-216-864-11	SHORT CHIP	0		
R239	1-216-809-11	METAL CHIP	100	5%	1/10W	R405	1-216-821-11	METAL CHIP	1K	5%	1/10W
R240	1-216-801-11	METAL CHIP	22	5%	1/10W	R406	1-216-833-11	METAL CHIP	10K	5%	1/10W
R245	1-216-801-11	METAL CHIP	22	5%	1/10W	R407	1-216-821-11	METAL CHIP	1K	5%	1/10W
R301	1-216-049-11	RES-CHIP	1K	5%	1/10W	R409	1-216-821-11	METAL CHIP	1K	5%	1/10W
R302	1-216-041-00	RES-CHIP	470	5%	1/10W	R410	1-216-809-11	METAL CHIP	100	5%	1/10W
R307	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W	R411	1-216-809-11	METAL CHIP	100	5%	1/10W
R308	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W	R412	1-216-809-11	METAL CHIP	100	5%	1/10W
R309	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W	R413	1-216-817-11	METAL CHIP	470	5%	1/10W
R310	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W	R414	1-216-845-11	METAL CHIP	100K	5%	1/10W
R311	1-216-849-11	METAL CHIP	220K	5%	1/10W	R415	1-216-838-11	METAL CHIP	27K	5%	1/10W
R312	1-216-817-11	METAL CHIP	470	5%	1/10W	R418	1-216-845-11	METAL CHIP	100K	5%	1/10W
R313	1-216-833-11	METAL CHIP	10K	5%	1/10W	R420	1-216-809-11	METAL CHIP	100	5%	1/10W
R314	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R422	1-216-809-11	METAL CHIP	100	5%	1/10W
R315	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R423	1-216-864-11	SHORT CHIP	0		
R316	1-216-833-11	METAL CHIP	10K	5%	1/10W	R428	1-216-821-11	METAL CHIP	1K	5%	1/10W
R317	1-216-845-11	METAL CHIP	100K	5%	1/10W	R429	1-216-821-11	METAL CHIP	1K	5%	1/10W
R318	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R439	1-216-833-11	METAL CHIP	10K	5%	1/10W
R319	1-216-830-11	METAL CHIP	5.6K	5%	1/10W	R441	1-216-821-11	METAL CHIP	1K	5%	1/10W
R320	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R475	1-216-864-11	SHORT CHIP	0		
R321	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R476	1-216-864-11	SHORT CHIP	0		
R322	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R477	1-216-864-11	SHORT CHIP	0		
R323	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R479	1-216-295-91	SHORT CHIP	0		
R324	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R610	1-216-864-11	SHORT CHIP	0		
R325	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R614	1-216-833-11	METAL CHIP	10K	5%	1/10W
R326	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R620	1-216-813-11	METAL CHIP	220	5%	1/10W
R327	1-216-817-11	METAL CHIP	470	5%	1/10W	R629	1-216-817-11	METAL CHIP	470	5%	1/10W
R328	1-216-817-11	METAL CHIP	470	5%	1/10W	R630	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R329	1-216-833-11	METAL CHIP	10K	5%	1/10W	R631	1-218-852-11	METAL CHIP	1.6K	0.5%	1/10W
R330	1-216-833-11	METAL CHIP	10K	5%	1/10W	R632	1-216-855-11	METAL CHIP	680K	5%	1/10W
R331	1-216-841-11	METAL CHIP	47K	5%	1/10W	R633	1-216-864-11	SHORT CHIP	0		
R332	1-216-841-11	METAL CHIP	47K	5%	1/10W	R634	1-216-864-11	SHORT CHIP	0		
R333	1-216-833-11	METAL CHIP	10K	5%	1/10W	R637	1-216-853-11	METAL CHIP	470K	5%	1/10W
R334	1-216-841-11	METAL CHIP	47K	5%	1/10W	R638	1-216-833-11	METAL CHIP	10K	5%	1/10W
R335	1-216-833-11	METAL CHIP	10K	5%	1/10W	R640	1-216-057-00	RES-CHIP	2.2K	5%	1/10W
R336	1-216-841-11	METAL CHIP	47K	5%	1/10W	R641	1-216-057-00	RES-CHIP	2.2K	5%	1/10W
R337	1-216-833-11	METAL CHIP	10K	5%	1/10W	R642	1-216-841-11	METAL CHIP	47K	5%	1/10W
R338	1-216-833-11	METAL CHIP	10K	5%	1/10W	R644	1-216-833-11	METAL CHIP	10K	5%	1/10W
R341	1-216-833-11	METAL CHIP	10K	5%	1/10W	R646	1-216-809-11	METAL CHIP	100	5%	1/10W
R342	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R647	1-216-833-11	METAL CHIP	10K	5%	1/10W
R344	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R648	1-216-851-11	METAL CHIP	330K	5%	1/10W
R345	1-216-845-11	METAL CHIP	100K	5%	1/10W	R650	1-216-817-11	METAL CHIP	470	5%	1/10W
R346	1-216-845-11	METAL CHIP	100K	5%	1/10W	R651	1-216-864-11	SHORT CHIP	0		
R347	1-216-821-11	METAL CHIP	1K	5%	1/10W	R652	1-216-809-11	METAL CHIP	100	5%	1/10W
R348	1-216-821-11	METAL CHIP	1K	5%	1/10W	R653	1-216-809-11	METAL CHIP	100	5%	1/10W
R349	1-216-837-11	METAL CHIP	22K	5%	1/10W	R654	1-216-809-11	METAL CHIP	100	5%	1/10W

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R655	1-216-809-11	METAL CHIP	100	5%	1/10W	R1201	1-216-295-91	SHORT CHIP	0		
R656	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1202	1-218-894-11	METAL CHIP	91K	0.5%	1/10W
R657	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1203	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R658	1-216-864-11	SHORT CHIP	0			R1204	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W
R660	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R1205	1-216-833-11	METAL CHIP	10K	5%	1/10W
R661	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R1601	1-216-833-11	METAL CHIP	10K	5%	1/10W
R663	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1605	1-216-809-11	METAL CHIP	100	5%	1/10W
R664	1-216-809-11	METAL CHIP	100	5%	1/10W	R1606	1-216-809-11	METAL CHIP	100	5%	1/10W
R665	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1607	1-216-809-11	METAL CHIP	100	5%	1/10W
R668	1-216-809-11	METAL CHIP	100	5%	1/10W	R1608	1-216-864-11	SHORT CHIP	0		
R669	1-216-809-11	METAL CHIP	100	5%	1/10W	R1609	1-216-847-11	METAL CHIP	150K	5%	1/10W
R670	1-216-809-11	METAL CHIP	100	5%	1/10W	R1610	1-216-809-11	METAL CHIP	100	5%	1/10W
R671	1-218-289-11	METAL CHIP	510	5%	1/10W	R1611	1-216-809-11	METAL CHIP	100	5%	1/10W
R672	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R1612	1-216-809-11	METAL CHIP	100	5%	1/10W
R673	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1613	1-216-837-11	METAL CHIP	22K	5%	1/10W
R674	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1614	1-216-833-11	METAL CHIP	10K	5%	1/10W
R675	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R1616	1-216-809-11	METAL CHIP	100	5%	1/10W
R676	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1617	1-216-864-11	SHORT CHIP	0		
R677	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R1618	1-216-833-11	METAL CHIP	10K	5%	1/10W
R678	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W	R1619	1-216-809-11	METAL CHIP	100	5%	1/10W
R679	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1621	1-216-839-11	METAL CHIP	33K	5%	1/10W
R680	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1622	1-216-833-11	METAL CHIP	10K	5%	1/10W
R681	1-216-864-11	SHORT CHIP	0			R1634	1-216-809-11	METAL CHIP	100	5%	1/10W
R682	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1635	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R683	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1636	1-216-864-11	SHORT CHIP	0		
R686	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R1638	1-216-864-11	SHORT CHIP	0		
R687	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1639	1-216-864-11	SHORT CHIP	0		
R688	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1641	1-216-809-11	METAL CHIP	100	5%	1/10W
R689	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1642	1-216-864-11	SHORT CHIP	0		
R690	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1643	1-216-809-11	METAL CHIP	100	5%	1/10W
R691	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1645	1-216-809-11	METAL CHIP	100	5%	1/10W
R692	1-216-864-11	SHORT CHIP	0			R1650	1-216-809-11	METAL CHIP	100	5%	1/10W
R693	1-216-809-11	METAL CHIP	100	5%	1/10W	R1651	1-216-809-11	METAL CHIP	100	5%	1/10W
R694	1-216-809-11	METAL CHIP	100	5%	1/10W	R1653	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R696	1-216-817-11	METAL CHIP	470	5%	1/10W	R1654	1-216-833-11	METAL CHIP	10K	5%	1/10W
R699	1-216-809-11	METAL CHIP	100	5%	1/10W	R1655	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R703	1-216-864-11	SHORT CHIP	0			R1656	1-216-849-11	METAL CHIP	220K	5%	1/10W
R706	1-216-845-11	METAL CHIP	100K	5%	1/10W	R1657	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R707	1-216-864-11	SHORT CHIP	0			R1658	1-216-815-11	METAL CHIP	330	5%	1/10W
R711	1-216-851-11	METAL CHIP	330K	5%	1/10W	R1662	1-216-864-11	SHORT CHIP	0		
R712	1-216-851-11	METAL CHIP	330K	5%	1/10W	R1664	1-216-864-11	SHORT CHIP	0		
R726	1-216-864-11	SHORT CHIP	0			R1670	1-216-833-11	METAL CHIP	10K	5%	1/10W
R733	1-216-864-11	SHORT CHIP	0			R1672	1-216-833-11	METAL CHIP	10K	5%	1/10W
R738	1-216-864-11	SHORT CHIP	0			R1684	1-216-864-11	SHORT CHIP	0		
R739	1-216-808-11	METAL CHIP	82	5%	1/10W	R1690	1-216-057-00	RES-CHIP	2.2K	5%	1/10W
R740	1-216-808-11	METAL CHIP	82	5%	1/10W	< THERMISTOR >					
R741	1-216-808-11	METAL CHIP	82	5%	1/10W	TH001	1-803-384-11	THERMISTOR (1608)			
R744	1-216-295-91	SHORT CHIP	0			< TUNER >					
R746	1-216-864-11	SHORT CHIP	0			TU401	8-597-979-00	TUNER, FSS BTF-DF421			
R751	1-216-853-11	METAL CHIP	470K	5%	1/10W	< VIBRATOR >					
R752	1-216-853-11	METAL CHIP	470K	5%	1/10W	X601	1-781-913-11	VIBRATOR, CRYSTAL(32.768KHz)			
R822	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	X602	1-813-436-11	VIBRATOR, CRYSTAL (SMD)(10MHz)			
R825	1-216-833-11	METAL CHIP	10K	5%	1/10W						
R826	1-216-808-11	METAL CHIP	82	5%	1/10W						
R829	1-216-808-11	METAL CHIP	82	5%	1/10W						
R830	1-216-808-11	METAL CHIP	82	5%	1/10W						
R832	1-216-808-11	METAL CHIP	82	5%	1/10W						
R833	1-216-808-11	METAL CHIP	82	5%	1/10W						
R834	1-216-808-11	METAL CHIP	82	5%	1/10W						
R852	1-216-295-91	SHORT CHIP	0								

Ref. No.	Part No.	Description	Remarks
		CN-243(SS) COMPL(NOT SUPPLIED)	

< CONNECTOR >

CN1801	1-818-021-11	PIN, CONNECTOR 40P	
CN1802	1-818-005-61	CONNECTOR, FFC/FPC 40P	

*	A-1129-173-A	ER-036 (BS) COMPL	

< CAPACITOR >

C101	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V
C102	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C103	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V
C104	1-124-779-00	ELECT CHIP	10uF	20%	16V
C105	1-124-779-00	ELECT CHIP	10uF	20%	16V
C106	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V
C107	1-126-204-11	ELECT CHIP	47uF	20%	16V
C108	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C109	1-126-204-11	ELECT CHIP	47uF	20%	16V
C110	1-117-681-11	ELECT CHIP	100uF	20%	16V
C111	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C112	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C113	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C114	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C115	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C116	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C117	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C118	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C119	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C120	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C121	1-117-681-11	ELECT CHIP	100uF	20%	16V
C122	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C123	1-126-204-11	ELECT CHIP	47uF	20%	16V
C124	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C125	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C126	1-126-204-11	ELECT CHIP	47uF	20%	16V
C127	1-126-204-11	ELECT CHIP	47uF	20%	16V
C131	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C132	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C133	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C134	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C135	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C136	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C137	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C139	1-126-204-11	ELECT CHIP	47uF	20%	16V
C140	1-126-204-11	ELECT CHIP	47uF	20%	16V
C141	1-126-204-11	ELECT CHIP	47uF	20%	16V
C142	1-126-204-11	ELECT CHIP	47uF	20%	16V
C143	1-126-204-11	ELECT CHIP	47uF	20%	16V
C144	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C145	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C146	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C147	1-126-204-11	ELECT CHIP	47uF	20%	16V
C148	1-126-204-11	ELECT CHIP	47uF	20%	16V
C149	1-126-204-11	ELECT CHIP	47uF	20%	16V

Ref. No.	Part No.	Description	Remarks
C150	1-126-204-11	ELECT CHIP	47uF 20% 16V
C151	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C152	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C153	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C154	1-162-927-11	CERAMIC CHIP	100PF 5% 50V

C155	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C156	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C157	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C158	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C159	1-162-927-11	CERAMIC CHIP	100PF 5% 50V

C160	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C161	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C162	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C164	1-126-204-11	ELECT CHIP	47uF 20% 16V
C301	1-126-204-11	ELECT CHIP	47uF 20% 16V

C302	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C303	1-162-924-11	CERAMIC CHIP	56PF 5% 50V
C304	1-162-907-11	CERAMIC CHIP	2PF 0.25PF 50V
C305	1-162-907-11	CERAMIC CHIP	2PF 0.25PF 50V
C306	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V

C307	1-162-924-11	CERAMIC CHIP	56PF 5% 50V
C308	1-165-908-11	CERAMIC CHIP	1uF 10% 10V
C309	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C310	1-124-779-00	ELECT CHIP	10uF 20% 16V
C311	1-126-602-11	ELECT CHIP	3.3uF 20% 50V

C312	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C313	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C314	1-124-779-00	ELECT CHIP	10uF 20% 16V
C315	1-127-715-91	CERAMIC CHIP	0.22uF 10% 16V
C316	1-126-204-11	ELECT CHIP	47uF 20% 16V

C317	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C318	1-165-908-11	CERAMIC CHIP	1uF 10% 10V
C319	1-165-908-11	CERAMIC CHIP	1uF 10% 10V

< CONNECTOR >

CN103	1-816-044-11	CONNECTOR, SQUARE TYPE 21P	
CN104	1-816-044-11	CONNECTOR, SQUARE TYPE 21P	
CN105	1-770-710-21	CONNECTOR, FFC/FPC 28P	
CN106	1-770-710-21	CONNECTOR, FFC/FPC 28P	

< DIODE >

D101	8-719-075-77	DIODE EC10DA40-TE12	
D114	8-719-069-56	DIODE UDZSTE-176.2B	
D115	8-719-083-63	DIODE UDZSTE-1713B	
D116	8-719-069-56	DIODE UDZSTE-176.2B	
D117	8-719-083-63	DIODE UDZSTE-1713B	

D125	8-719-069-56	DIODE UDZSTE-176.2B	
D127	8-719-071-15	DIODE HZM6.8ZWA1TL	
D128	8-719-071-15	DIODE HZM6.8ZWA1TL	
D129	8-719-071-15	DIODE HZM6.8ZWA1TL	
D130	8-719-071-15	DIODE HZM6.8ZWA1TL	

D131	8-719-071-15	DIODE HZM6.8ZWA1TL	
D132	8-719-071-15	DIODE HZM6.8ZWA1TL	
D133	8-719-071-15	DIODE HZM6.8ZWA1TL	
D134	8-719-071-15	DIODE HZM6.8ZWA1TL	
D135	8-719-071-15	DIODE HZM6.8ZWA1TL	

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
D136	8-719-071-15	DIODE HZM6.8ZWA1TL				< TRANSISTOR >	
D137	8-719-071-15	DIODE HZM6.8ZWA1TL					
D138	8-719-071-15	DIODE HZM6.8ZWA1TL		Q102	8-729-010-05	TRANSISTOR MSB709-RT1	
D139	8-719-071-15	DIODE HZM6.8ZWA1TL		Q106	8-729-010-25	TRANSISTOR MSD601-RT1	
D140	8-719-071-15	DIODE HZM6.8ZWA1TL		Q107	8-729-010-25	TRANSISTOR MSD601-RT1	
				Q108	8-729-010-25	TRANSISTOR MSD601-RT1	
D141	8-719-071-15	DIODE HZM6.8ZWA1TL		Q109	8-729-010-25	TRANSISTOR MSD601-RT1	
D142	8-719-071-15	DIODE HZM6.8ZWA1TL					
D143	8-719-071-15	DIODE HZM6.8ZWA1TL		Q110	6-550-683-01	TRANSISTOR RJK005N03-T146	
D144	8-719-071-15	DIODE HZM6.8ZWA1TL		Q301	8-729-010-05	TRANSISTOR MSB709-RT1	
D301	8-719-988-61	DIODE 1SS355TE-17		Q302	8-729-010-25	TRANSISTOR MSD601-RT1	
		< FERRITE BADE >				< RESISTOR >	
FB101	1-469-796-21	FERRITE	0uH	R107	1-216-841-11	METAL CHIP	47K 5% 1/10W
FB102	1-469-796-21	FERRITE	0uH	R110	1-216-845-11	METAL CHIP	100K 5% 1/10W
FB103	1-469-796-21	FERRITE	0uH	R111	1-216-864-11	SHORT CHIP	0
FB104	1-469-796-21	FERRITE	0uH	R113	1-216-295-91	SHORT CHIP	0
FB105	1-469-796-21	FERRITE	0uH	R114	1-216-864-11	SHORT CHIP	0
FB106	1-469-796-21	FERRITE	0uH	R115	1-216-801-11	METAL CHIP	22 5% 1/10W
FB107	1-469-796-21	FERRITE	0uH	R116	1-216-864-11	SHORT CHIP	0
FB108	1-469-796-21	FERRITE	0uH	R121	1-216-864-11	SHORT CHIP	0
FB109	1-469-796-21	FERRITE	0uH	R122	1-216-801-11	METAL CHIP	22 5% 1/10W
FB110	1-469-796-21	FERRITE	0uH	R124	1-216-801-11	METAL CHIP	22 5% 1/10W
FB111	1-469-796-21	FERRITE	0uH	R126	1-216-801-11	METAL CHIP	22 5% 1/10W
FB112	1-469-796-21	FERRITE	0uH	R128	1-216-801-11	METAL CHIP	22 5% 1/10W
FB113	1-469-796-21	FERRITE	0uH	R130	1-216-849-11	METAL CHIP	220K 5% 1/10W
FB114	1-469-796-21	FERRITE	0uH	R131	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
FB115	1-469-796-21	FERRITE	0uH	R134	1-216-849-11	METAL CHIP	220K 5% 1/10W
FB116	1-469-796-21	FERRITE	0uH	R137	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
FB117	1-469-796-21	FERRITE	0uH	R138	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
FB118	1-469-796-21	FERRITE	0uH	R139	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
FB119	1-469-796-21	FERRITE	0uH	R140	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
FB120	1-469-796-21	FERRITE	0uH	R145	1-216-833-11	METAL CHIP	10K 5% 1/10W
FB121	1-469-796-21	FERRITE	0uH	R146	1-216-833-11	METAL CHIP	10K 5% 1/10W
FB122	1-469-796-21	FERRITE	0uH	R147	1-216-833-11	METAL CHIP	10K 5% 1/10W
FB124	1-469-796-21	FERRITE	0uH	R148	1-216-849-11	METAL CHIP	220K 5% 1/10W
				R150	1-216-849-11	METAL CHIP	220K 5% 1/10W
		< IC >		R153	1-216-821-11	METAL CHIP	1K 5% 1/10W
IC101	6-705-338-01	IC TK11250CMCL-G					
IC102	6-706-743-01	IC TK72250CMCL-G		R154	1-216-821-11	METAL CHIP	1K 5% 1/10W
IC103	6-704-276-01	IC CD74HCT4053PWR		R155	1-216-864-11	SHORT CHIP	0
IC104	6-704-276-01	IC CD74HCT4053PWR		R157	1-218-285-11	METAL CHIP	75 5% 1/10W
IC105	6-705-793-01	IC BH7624KS2		R159	1-218-285-11	METAL CHIP	75 5% 1/10W
				R163	1-216-815-11	METAL CHIP	330 5% 1/10W
IC106	6-705-819-01	IC BD3825FS-E2					
IC301	6-702-714-01	IC MSP3417G-QG-B8V3		R164	1-216-815-11	METAL CHIP	330 5% 1/10W
IC301	6-702-714-11	IC MSP3417G-QG-B8V3-T		R165	1-216-815-11	METAL CHIP	330 5% 1/10W
				R166	1-216-815-11	METAL CHIP	330 5% 1/10W
		< COIL >		R169	1-216-841-11	METAL CHIP	47K 5% 1/10W
L101	1-400-145-21	INDUCTOR	47uH	R170	1-216-841-11	METAL CHIP	47K 5% 1/10W
L102	1-419-368-11	INDUCTOR	47uH				
L301	1-400-145-21	INDUCTOR	47uH	R171	1-216-833-11	METAL CHIP	10K 5% 1/10W
				R173	1-216-808-11	METAL CHIP	82 5% 1/10W
		< FUSE >		R174	1-216-864-11	SHORT CHIP	0
△ PS101	1-576-415-11	FUSE	2A/36V	R175	1-216-864-11	SHORT CHIP	0
△ PS102	1-576-863-21	FUSE	0.5A/32V	R176	1-216-808-11	METAL CHIP	82 5% 1/10W
△ PS103	1-576-415-11	FUSE	2A/36V				
				R179	1-216-808-11	METAL CHIP	82 5% 1/10W
				R180	1-216-815-11	METAL CHIP	330 5% 1/10W
				R181	1-216-815-11	METAL CHIP	330 5% 1/10W
				R182	1-216-815-11	METAL CHIP	330 5% 1/10W
				R184	1-216-815-11	METAL CHIP	330 5% 1/10W

Note : The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description			Remarks
R185	1-216-815-11	METAL CHIP	330	5%	1/10W
R186	1-216-845-11	METAL CHIP	100K	5%	1/10W
R187	1-216-864-11	SHORT CHIP	0		
R188	1-216-808-11	METAL CHIP	82	5%	1/10W
R189	1-218-285-11	METAL CHIP	75	5%	1/10W
R190	1-216-845-11	METAL CHIP	100K	5%	1/10W
R192	1-216-857-11	METAL CHIP	1M	5%	1/10W
R194	1-216-808-11	METAL CHIP	82	5%	1/10W
R195	1-216-808-11	METAL CHIP	82	5%	1/10W
R196	1-216-845-11	METAL CHIP	100K	5%	1/10W
R197	1-216-808-11	METAL CHIP	82	5%	1/10W
R198	1-216-808-11	METAL CHIP	82	5%	1/10W
R199	1-216-808-11	METAL CHIP	82	5%	1/10W
R201	1-216-845-11	METAL CHIP	100K	5%	1/10W
R202	1-216-845-11	METAL CHIP	100K	5%	1/10W
R203	1-216-845-11	METAL CHIP	100K	5%	1/10W
R204	1-216-845-11	METAL CHIP	100K	5%	1/10W
R205	1-216-845-11	METAL CHIP	100K	5%	1/10W
R206	1-216-845-11	METAL CHIP	100K	5%	1/10W
R207	1-216-845-11	METAL CHIP	100K	5%	1/10W
R208	1-216-845-11	METAL CHIP	100K	5%	1/10W
R221	1-216-864-11	SHORT CHIP	0		
R222	1-216-864-11	SHORT CHIP	0		
R225	1-216-864-11	SHORT CHIP	0		
R226	1-216-864-11	SHORT CHIP	0		
R228	1-216-864-11	SHORT CHIP	0		
R230	1-216-864-11	SHORT CHIP	0		
R232	1-216-864-11	SHORT CHIP	0		
R301	1-216-821-11	METAL CHIP	1K	5%	1/10W
R302	1-216-823-11	METAL CHIP	1.5K	5%	1/10W
R303	1-216-821-11	METAL CHIP	1K	5%	1/10W
R305	1-216-864-11	SHORT CHIP	0		
R306	1-216-809-11	METAL CHIP	100	5%	1/10W
R307	1-216-819-11	METAL CHIP	680	5%	1/10W
R308	1-216-809-11	METAL CHIP	100	5%	1/10W
R309	1-216-809-11	METAL CHIP	100	5%	1/10W
R310	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R311	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R312	1-216-846-11	METAL CHIP	120K	5%	1/10W
< VIBRATOR >					
X301	1-795-612-11	VIBRATOR, CRYSTAL(18.432MHz)			
*	A-1129-169-A	FL-144 (CS) COMPL			

< CAPACITOR >					
C1303	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C1304	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C1306	1-125-972-91	ELECT	100uF	20%	16V
C1307	1-124-589-11	ELECT	47uF	20%	16V
C1308	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C1309	1-106-363-00	MYLAR	0.0068uF	5%	100V
C1311	1-162-922-11	CERAMIC CHIP	39PF	5%	50V
C1312	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V
C1314	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V
C1315	1-128-131-11	ELECT	22uF	20%	50V
C1318	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V

Ref. No.	Part No.	Description	Remarks		
< CONNECTOR >					
CN1302	1-774-729-21	PIN, CONNECTOR (PC BOARD) 10P			
< DIODE >					
D1303	8-719-067-40	DIODE STZ6.8N-T146			
D1304	8-719-067-40	DIODE STZ6.8N-T146			
D1305	8-719-067-40	DIODE STZ6.8N-T146			
D1306	8-719-067-40	DIODE STZ6.8N-T146			
D1307	8-719-067-40	DIODE STZ6.8N-T146			
< DIODE >					
D1308	8-719-067-40	DIODE STZ6.8N-T146			
D1312	8-719-988-61	DIODE 1SS355TE-17			
D1313	8-719-988-61	DIODE 1SS355TE-17			
D1314	8-719-988-61	DIODE 1SS355TE-17			
D1315	8-719-988-61	DIODE 1SS355TE-17			
< DIODE >					
D1317	8-719-056-82	DIODE UDZ-TE-17-6.2B			
< IC >					
IC1301	6-706-722-01	IC ML9208-06MBZ03W			
< TERMINAL >					
J1301	1-694-980-21	TERMINAL BOARD (S TERMINAL+3P)			
< COIL >					
L1301	1-412-537-31	INDUCTOR	100uH		
< TRANSISTOR >					
Q1303	8-729-901-88	TRANSISTOR 2SC2411K-CR			
Q1304	8-729-901-88	TRANSISTOR 2SC2411K-CR			
< RESISTOR >					
R1301	1-216-808-11	METAL CHIP	82	5%	1/10W
R1302	1-216-808-11	METAL CHIP	82	5%	1/10W
R1303	1-216-864-11	SHORT CHIP	0		
R1304	1-216-864-11	SHORT CHIP	0		
R1305	1-216-864-11	SHORT CHIP	0		
R1306	1-216-808-11	METAL CHIP	82	5%	1/10W
R1310	1-216-849-11	METAL CHIP	220K	5%	1/10W
R1311	1-216-849-11	METAL CHIP	220K	5%	1/10W
R1314	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R1316	1-216-809-11	METAL CHIP	100	5%	1/10W
R1317	1-216-809-11	METAL CHIP	100	5%	1/10W
R1318	1-216-809-11	METAL CHIP	100	5%	1/10W
R1319	1-216-809-11	METAL CHIP	100	5%	1/10W
R1320	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R1323	1-216-838-11	METAL CHIP	27K	5%	1/10W
R1324	1-216-864-11	SHORT CHIP	0		
R1325	1-216-864-11	SHORT CHIP	0		
R1326	1-216-864-11	SHORT CHIP	0		
R1327	1-216-296-11	SHORT CHIP	0		
< SWITCH >					
S1302	1-771-410-21	SWITCH, TACTILE(POWER)			
< TRANSFORMER >					
T1301	1-443-502-11	TRANSFORMER, DC-DC CONVERTER			

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
*	A-1129-171-A	FR-232 (BS) COPML *****		JR073	1-216-295-91	SHORT CHIP 0	
		< CAPACITOR >		JR074	1-216-295-91	SHORT CHIP 0	
C102	1-107-726-91	CERAMIC CHIP 0.01uF 10% 16V		JR075	1-216-295-91	SHORT CHIP 0	
C103	1-107-726-91	CERAMIC CHIP 0.01uF 10% 16V		JR077	1-216-295-91	SHORT CHIP 0	
C104	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V		JR078	1-216-296-11	SHORT CHIP 0	
		< CONNECTOR >		JR080	1-216-296-11	SHORT CHIP 0	
CN101	1-793-600-11	CONNECTOR, FFC/FPC (ZIF) 17P				< TRANSISTOR >	
CN102	1-794-479-11	CONNECTOR, FPC/FFC 9P		Q101	8-729-027-43	TRANSISTOR DTC114EKA-T146	
* CN103	1-564-708-11	PIN, CONNECTOR (SMALL TYPE) 6P		Q102	8-729-010-05	TRANSISTOR MSB709-RT1	
CN104	1-785-828-21	CONNECTOR, SQUARE TYPE 4P				< RESISTOR >	
		< DIODE >		R101	1-216-295-91	SHORT CHIP 0	
D102	8-719-077-79	DIODE SLR-332VRT32(TIMER REC)		R102	1-216-864-11	SHORT CHIP 0	
D103	8-719-077-79	DIODE SLR-332VRT32(SYNCHRO) REC)		R103	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
D104	6-500-176-01	DIODE EB3804X-TP-J555K(HDD)		R104	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
D105	8-719-084-27	DIODE SLI-343YCT32WST(VDD)		R105	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	
		< IC >		R106	1-216-830-11	METAL CHIP 5.6K 5% 1/10W	
IC101	6-600-392-01	IC GP1UM27XK0SF		R109	1-216-864-11	SHORT CHIP 0	
IC102	6-706-783-01	IC BU2050F-E2		R110	1-216-830-11	METAL CHIP 5.6K 5% 1/10W	
		< JUMPER >		R111	1-216-832-11	METAL CHIP 8.2K 5% 1/10W	
JR001	1-216-296-11	SHORT CHIP 0		R112	1-216-837-11	METAL CHIP 22K 5% 1/10W	
JR002	1-216-295-91	SHORT CHIP 0		R114	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	
JR003	1-216-296-11	SHORT CHIP 0		R115	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
JR004	1-216-296-11	SHORT CHIP 0		R116	1-216-813-11	METAL CHIP 220 5% 1/10W	
JR005	1-216-296-11	SHORT CHIP 0		R117	1-216-813-11	METAL CHIP 220 5% 1/10W	
JR006	1-216-296-11	SHORT CHIP 0		R118	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
JR007	1-216-296-11	SHORT CHIP 0		R119	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
JR008	1-216-295-91	SHORT CHIP 0		R120	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	
JR009	1-216-296-11	SHORT CHIP 0		R121	1-216-830-11	METAL CHIP 5.6K 5% 1/10W	
JR010	1-216-295-91	SHORT CHIP 0		R122	1-216-832-11	METAL CHIP 8.2K 5% 1/10W	
JR011	1-216-295-91	SHORT CHIP 0		R124	1-216-864-11	SHORT CHIP 0	
JR012	1-216-296-11	SHORT CHIP 0		R125	1-216-811-11	METAL CHIP 150 5% 1/10W	
JR014	1-216-295-91	SHORT CHIP 0		R126	1-216-818-11	METAL CHIP 560 5% 1/10W	
JR015	1-216-296-11	SHORT CHIP 0		R129	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
JR016	1-216-296-11	SHORT CHIP 0		R130	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	
JR017	1-216-296-11	SHORT CHIP 0		R131	1-216-830-11	METAL CHIP 5.6K 5% 1/10W	
JR018	1-216-295-91	SHORT CHIP 0		R132	1-216-832-11	METAL CHIP 8.2K 5% 1/10W	
JR019	1-216-296-11	SHORT CHIP 0		R134	1-216-837-11	METAL CHIP 22K 5% 1/10W	
JR020	1-216-296-11	SHORT CHIP 0		R136	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
JR021	1-216-295-91	SHORT CHIP 0		R137	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	
JR022	1-216-295-91	SHORT CHIP 0		R138	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
JR023	1-216-295-91	SHORT CHIP 0		R139	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
JR024	1-216-296-11	SHORT CHIP 0				< SWITCH >	
JR025	1-216-295-91	SHORT CHIP 0		S101	1-771-410-21	SWITCH, TACTILE(REC STOP)	
JR026	1-216-296-11	SHORT CHIP 0		S102	1-771-410-21	SWITCH, TACTILE(REC PAUSE)	
JR027	1-216-295-91	SHORT CHIP 0		S103	1-771-410-21	SWITCH, TACTILE(REC)	
JR029	1-216-295-91	SHORT CHIP 0		S104	1-771-410-21	SWITCH, TACTILE(STOP)	
JR030	1-216-295-91	SHORT CHIP 0		S105	1-771-410-21	SWITCH, TACTILE(PAUSE)	
JR031	1-216-295-91	SHORT CHIP 0		S106	1-771-410-21	SWITCH, TACTILE(PLAY)	
JR032	1-216-295-91	SHORT CHIP 0		S107	1-771-410-21	SWITCH, TACTILE(TOOL)	
JR033	1-216-296-11	SHORT CHIP 0		S108	1-771-410-21	SWITCH, TACTILE(CH+)	
JR035	1-216-295-91	SHORT CHIP 0		S109	1-771-410-21	SWITCH, TACTILE(CH-)	
JR036	1-216-295-91	SHORT CHIP 0		S110	1-771-410-21	SWITCH, TACTILE(INPUT SEL)	
JR071	1-216-296-11	SHORT CHIP 0		S112	1-771-410-21	SWITCH, TACTILE(DVD)	
JR072	1-216-296-11	SHORT CHIP 0		S113	1-771-410-21	SWITCH, TACTILE(HDD)	
				S114	1-771-410-21	SWITCH, TACTILE(MENU)	
				S115	1-771-410-21	SWITCH, TACTILE(PPEV)	
				S116	1-771-410-21	SWITCH, TACTILE(REC MODE)	

Ref. No.	Part No.	Description	Remarks
S119	1-771-410-21	SWITCH, TACTILE(RETURN)	
S120	1-771-410-21	SWITCH, TACTILE(NEXT)	
S121	1-771-410-21	SWITCH, TACTILE(OPEN/CLOSE)	
S122	1-771-410-21	SWITCH, TACTILE(DUB)	
S123	1-786-793-11	SWITCH, TACTILE(SELECT)	

* A-1129-175-A MI-056 (AS) COMPL

< CAPACITOR >

C101	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C102	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C103	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C104	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C105	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C106	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C107	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C108	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C114	1-125-777-11	CERAMIC CHIP	0.33uF	10%	10V
C116	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C125	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C126	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C127	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C152	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C153	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C154	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C155	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C156	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C157	1-128-934-61	CERAMIC CHIP	0.33uF	10%	10V
C158	1-164-677-61	CERAMIC CHIP	0.033uF	10%	16V
C159	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C160	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C161	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C162	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C163	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C164	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C165	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C166	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C167	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C168	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C169	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C170	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C171	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C172	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C173	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C174	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C175	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C176	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C177	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C178	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C179	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C180	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C181	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C182	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C183	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C184	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C185	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C186	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C187	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C201	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V

C202	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C204	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C205	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C206	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C207	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C208	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C209	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C212	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C213	1-218-953-11	RES-CHIP	1K	5%	1/16W
C214	1-218-953-11	RES-CHIP	1K	5%	1/16W
C215	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C216	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C217	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C218	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C219	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C220	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C227	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C233	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C235	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C236	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C237	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C242	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C243	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C244	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C301	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C302	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C303	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C304	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C305	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C306	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C307	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C310	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C311	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C312	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C313	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C314	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C315	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C316	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C317	1-117-446-81	CERAMIC CHIP	3900PF	10%	16V
C318	1-117-949-81	CERAMIC CHIP	820PF	10%	50V
C319	1-126-204-11	ELECT CHIP	47uF	20%	16V
C320	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C321	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C322	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C323	1-128-994-21	ELECT CHIP	47uF	20%	10V
C326	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C327	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C328	1-128-994-21	ELECT CHIP	47uF	20%	10V
C329	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C330	1-128-994-21	ELECT CHIP	47uF	20%	10V
C331	1-164-005-11	CERAMIC CHIP	0.47uF		25V
C332	1-164-005-11	CERAMIC CHIP	0.47uF		25V
C333	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C334	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V
C335	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C401	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C402	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C403	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C404	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C405	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
< CONNECTOR >				R122	1-218-941-81	RES-CHIP	100 5% 1/16W
CN101	1-818-857-51	CONNECTOR, FFC/FPC 40P		R124	1-218-937-11	RES-CHIP	47 5% 1/16W
CN201	1-818-086-21	HDMI CONNECTOR		R125	1-218-937-11	RES-CHIP	47 5% 1/16W
* CN401	1-691-591-11	PIN, CONNECTOR (1.5MM) (SMD)8P		R126	1-218-929-11	RES-CHIP	10 5% 1/16W
< DIODE >				R131	1-218-990-81	SHORT CHIP	0
D208	8-719-069-56	DIODE UDZSTE-176.2B		R132	1-218-990-81	SHORT CHIP	0
D301	8-719-914-44	DIODE DAP202K		R133	1-218-990-81	SHORT CHIP	0
< FILTER >				R134	1-218-990-81	SHORT CHIP	0
FL105	1-234-867-11	FILTER, EMI REMOVAL (SMD)		R135	1-218-937-11	RES-CHIP	47 5% 1/16W
FL106	1-234-867-11	FILTER, EMI REMOVAL (SMD)		R136	1-218-933-11	RES-CHIP	22 5% 1/16W
FL107	1-234-867-11	FILTER, EMI REMOVAL (SMD)		R137	1-218-990-81	SHORT CHIP	0
FL201	1-234-867-11	FILTER, EMI REMOVAL (SMD)		R140	1-216-295-91	SHORT CHIP	0
FL202	1-234-867-11	FILTER, EMI REMOVAL (SMD)		R143	1-218-990-81	SHORT CHIP	0
FL203	1-234-867-11	FILTER, EMI REMOVAL (SMD)		R195	1-218-990-81	SHORT CHIP	0
FL204	1-234-867-11	FILTER, EMI REMOVAL (SMD)		R197	1-216-827-11	METAL CHIP	3.3K 5% 1/10W
FL205	1-234-867-11	FILTER, EMI REMOVAL (SMD)		R198	1-216-820-11	METAL CHIP	820 5% 1/10W
FL301	1-234-867-11	FILTER, EMI REMOVAL (SMD)		R199	1-218-990-81	SHORT CHIP	0
FL401	1-234-867-11	FILTER, EMI REMOVAL (SMD)		R206	1-218-990-81	SHORT CHIP	0
< IC >				R208	1-218-990-81	SHORT CHIP	0
IC101	6-708-021-01	IC CXD9866R		R242	1-218-941-81	RES-CHIP	100 5% 1/16W
IC102	6-705-992-11	IC HY57V161610ETP-7DR		R244	1-218-965-11	RES-CHIP	10K 5% 1/16W
IC203	6-703-046-01	IC SN74LVC1G08DCKR		R247	1-218-965-11	RES-CHIP	10K 5% 1/16W
IC205	6-702-302-01	IC TK11133CSCL-G		R248	1-220-179-11	METAL CHIP	510 0.5% 1/16W
IC207	6-705-338-01	IC TK11250CMCL-G		R251	1-218-973-11	RES-CHIP	47K 5% 1/16W
IC301	6-702-301-01	IC TK11125CSCL-G		R252	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
IC302	6-707-997-01	IC ADV7320KSTZ		R268	1-218-956-11	RES-CHIP	1.8K 5% 1/16W
IC304	6-707-155-01	IC NJM2588V(TE2)		R269	1-218-956-11	RES-CHIP	1.8K 5% 1/16W
IC306	6-705-337-01	IC TK11150CSCL-G		R271	1-218-990-81	SHORT CHIP	0
IC307	6-706-743-01	IC TK72250CMCL-G		R272	1-218-990-81	SHORT CHIP	0
IC401	8-759-082-59	IC TC7W32FU(TE12R)		R273	1-218-990-81	SHORT CHIP	0
IC402	6-805-771-01	IC MB89F538L-EURO001		R274	1-218-990-81	SHORT CHIP	0
< COIL >				R276	1-218-990-81	SHORT CHIP	0
L101	1-412-064-11	INDUCTOR 100uH		R278	1-218-990-81	SHORT CHIP	0
L102	1-412-064-11	INDUCTOR 100uH		R279	1-218-990-81	SHORT CHIP	0
L301	1-412-060-11	INDUCTOR 22uH		R280	1-218-990-81	SHORT CHIP	0
L303	1-412-060-11	INDUCTOR 22uH		R281	1-218-990-81	SHORT CHIP	0
L304	1-412-060-11	INDUCTOR 22uH		R282	1-218-990-81	SHORT CHIP	0
< FUSE >				R286	1-218-990-81	SHORT CHIP	0
△ PS101	1-576-415-11	FUSE 2A/36V		R287	1-218-929-11	RES-CHIP	10 5% 1/16W
< TRANSISTOR >				R288	1-218-929-11	RES-CHIP	10 5% 1/16W
Q301	8-729-010-05	TRANSISTOR MSB709-RT1		R289	1-218-929-11	RES-CHIP	10 5% 1/16W
< RESISTOR >				R290	1-218-929-11	RES-CHIP	10 5% 1/16W
R101	1-218-940-11	RES-CHIP 82 5% 1/16W		R291	1-218-929-11	RES-CHIP	10 5% 1/16W
R102	1-218-990-81	SHORT CHIP 0		R292	1-218-929-11	RES-CHIP	10 5% 1/16W
R103	1-218-990-81	SHORT CHIP 0		R293	1-218-929-11	RES-CHIP	10 5% 1/16W
R104	1-218-990-81	SHORT CHIP 0		R294	1-218-929-11	RES-CHIP	10 5% 1/16W
R105	1-218-933-11	RES-CHIP 22 5% 1/16W		R298	1-218-990-81	SHORT CHIP	0
R106	1-218-933-11	RES-CHIP 22 5% 1/16W		R306	1-218-990-81	SHORT CHIP	0
R107	1-218-941-81	RES-CHIP 100 5% 1/16W		R307	1-218-941-81	RES-CHIP	100 5% 1/16W
R108	1-218-933-11	RES-CHIP 22 5% 1/16W		R308	1-218-941-81	RES-CHIP	100 5% 1/16W
R109	1-218-929-11	RES-CHIP 10 5% 1/16W		R315	1-218-990-81	SHORT CHIP	0
R110	1-218-990-81	SHORT CHIP 0		R316	1-218-965-11	RES-CHIP	10K 5% 1/16W
R111	1-218-990-81	SHORT CHIP 0		R318	1-218-959-11	RES-CHIP	3.3K 5% 1/16W
				R319	1-218-959-11	RES-CHIP	3.3K 5% 1/16W

Note : The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description	Remarks
R320	1-218-941-81	RES-CHIP 100	5% 1/16W
R325	1-218-951-11	RES-CHIP 680	5% 1/16W
R326	1-208-874-81	METAL CHIP 300	0.5% 1/16W
R327	1-208-874-81	METAL CHIP 300	0.5% 1/16W
R328	1-208-874-81	METAL CHIP 300	0.5% 1/16W
R329	1-218-973-11	RES-CHIP 47K	5% 1/16W
R330	1-208-874-81	METAL CHIP 300	0.5% 1/16W
R331	1-208-874-81	METAL CHIP 300	0.5% 1/16W
R333	1-208-874-81	METAL CHIP 300	0.5% 1/16W
R334	1-218-969-11	RES-CHIP 22K	5% 1/16W
R336	1-218-969-11	RES-CHIP 22K	5% 1/16W
R343	1-218-965-11	RES-CHIP 10K	5% 1/16W
R344	1-218-965-11	RES-CHIP 10K	5% 1/16W
R345	1-218-977-11	RES-CHIP 100K	5% 1/16W
R347	1-218-990-81	SHORT CHIP 0	
R348	1-218-990-81	SHORT CHIP 0	
R349	1-218-990-81	SHORT CHIP 0	
R350	1-218-990-81	SHORT CHIP 0	
R351	1-218-990-81	SHORT CHIP 0	
R352	1-218-990-81	SHORT CHIP 0	
R354	1-218-990-81	SHORT CHIP 0	
R355	1-218-933-11	RES-CHIP 22	5% 1/16W
R357	1-218-957-11	RES-CHIP 2.2K	5% 1/16W
R407	1-218-990-81	SHORT CHIP 0	
R413	1-218-965-11	RES-CHIP 10K	5% 1/16W
R418	1-218-965-11	RES-CHIP 10K	5% 1/16W
R422	1-218-965-11	RES-CHIP 10K	5% 1/16W
R424	1-218-965-11	RES-CHIP 10K	5% 1/16W
R426	1-218-965-11	RES-CHIP 10K	5% 1/16W
R428	1-218-965-11	RES-CHIP 10K	5% 1/16W
R429	1-218-953-11	RES-CHIP 1K	5% 1/16W
R430	1-218-953-11	RES-CHIP 1K	5% 1/16W
R434	1-218-965-11	RES-CHIP 10K	5% 1/16W
R435	1-218-965-11	RES-CHIP 10K	5% 1/16W
R436	1-218-965-11	RES-CHIP 10K	5% 1/16W
R439	1-218-941-81	RES-CHIP 100	5% 1/16W
R443	1-218-956-11	RES-CHIP 1.8K	5% 1/16W
R444	1-218-961-11	RES-CHIP 4.7K	5% 1/16W
R454	1-218-953-11	RES-CHIP 1K	5% 1/16W
R455	1-218-953-11	RES-CHIP 1K	5% 1/16W
R457	1-218-953-11	RES-CHIP 1K	5% 1/16W
R458	1-218-953-11	RES-CHIP 1K	5% 1/16W
R466	1-218-990-81	SHORT CHIP 0	
< COMPONENT CIRCUIT BLOCK >			
RB101	1-234-371-21	RES, NETWORK 47	(1005X4)
RB102	1-234-371-21	RES, NETWORK 47	(1005X4)
RB103	1-242-962-21	RES, NETWORK 82X4	(1005)
RB104	1-242-962-21	RES, NETWORK 82X4	(1005)
RB105	1-242-962-21	RES, NETWORK 82X4	(1005)
RB106	1-242-962-21	RES, NETWORK 82X4	(1005)
RB111	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB112	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB113	1-234-371-21	RES, NETWORK 47	(1005X4)
RB114	1-234-371-21	RES, NETWORK 47	(1005X4)
RB115	1-234-371-21	RES, NETWORK 47	(1005X4)
RB116	1-234-371-21	RES, NETWORK 47	(1005X4)
RB117	1-234-370-21	RES, NETWORK 22	(1005X4)
RB118	1-234-370-21	RES, NETWORK 22	(1005X4)
RB119	1-234-370-21	RES, NETWORK 22	(1005X4)

Ref. No.	Part No.	Description	Remarks
RB125	1-242-962-21	RES, NETWORK 82X4	(1005)
RB126	1-242-962-21	RES, NETWORK 82X4	(1005)
RB127	1-242-962-21	RES, NETWORK 82X4	(1005)
RB128	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB129	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB130	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB131	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB132	1-234-371-21	RES, NETWORK 47	(1005X4)
RB133	1-234-371-21	RES, NETWORK 47	(1005X4)
RB134	1-234-370-21	RES, NETWORK 22	(1005X4)
RB135	1-234-370-21	RES, NETWORK 22	(1005X4)
RB136	1-234-370-21	RES, NETWORK 22	(1005X4)
RB137	1-234-370-21	RES, NETWORK 22	(1005X4)
RB138	1-234-371-21	RES, NETWORK 47	(1005X4)
< VARIABLE RESISTOR >			
RV301	1-223-583-41	RES, ADJ, CARBON (3 TYPE) 1K	
RV302	1-223-583-41	RES, ADJ, CARBON (3 TYPE) 1K	
< SWITCH >			
S401	1-771-337-21	SWITCH, SLIDE (NOM/DL)	
< VARISTOR >			
VDR201	1-805-774-11	VARISTOR, CHIP	
VDR202	1-805-774-11	VARISTOR, CHIP	
VDR203	1-805-774-11	VARISTOR, CHIP	
VDR204	1-805-774-11	VARISTOR, CHIP	
VDR205	1-805-774-11	VARISTOR, CHIP	
VDR206	1-805-774-11	VARISTOR, CHIP	
VDR207	1-805-774-11	VARISTOR, CHIP	
VDR208	1-805-774-11	VARISTOR, CHIP	
VDR209	1-805-774-11	VARISTOR, CHIP	
VDR210	1-805-774-11	VARISTOR, CHIP	
< VIBRATOR >			
X401	1-813-430-11	PIEZOELECTRIC OSCILLATOR(8MHz)	
* A-1129-278-A RD-058 (BS) COMPL *****			
< CAPACITOR >			
C104	1-126-208-21	ELECT CHIP 47uF	20% 4V
C107	1-164-943-81	CERAMIC CHIP 0.01uF	10% 16V
C110	1-126-208-21	ELECT CHIP 47uF	20% 4V
C112	1-124-779-00	ELECT CHIP 10uF	20% 16V
C113	1-124-779-00	ELECT CHIP 10uF	20% 16V
C114	1-125-777-11	CERAMIC CHIP 0.1uF	10% 10V
C115	1-164-848-11	CERAMIC CHIP 8PF	0.5PF 50V
C116	1-164-848-11	CERAMIC CHIP 8PF	0.5PF 50V
C117	1-125-777-11	CERAMIC CHIP 0.1uF	10% 10V
C118	1-125-777-11	CERAMIC CHIP 0.1uF	10% 10V
C119	1-125-777-11	CERAMIC CHIP 0.1uF	10% 10V
C120	1-125-777-11	CERAMIC CHIP 0.1uF	10% 10V
C121	1-125-777-11	CERAMIC CHIP 0.1uF	10% 10V
C122	1-125-777-11	CERAMIC CHIP 0.1uF	10% 10V
C123	1-124-779-00	ELECT CHIP 10uF	20% 16V

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
C124	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C336	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C126	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C337	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C127	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C338	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C128	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C339	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C129	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C340	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C130	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C342	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C131	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C343	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C132	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C344	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C133	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C345	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C134	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C401	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C135	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C402	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C136	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C403	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C137	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C508	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C138	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C509	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C139	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C511	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C140	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C512	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C141	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C513	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C142	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C514	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C143	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C515	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C144	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C516	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C202	1-164-874-11	CERAMIC CHIP	100PF	5%	50V	C517	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C203	1-126-208-21	ELECT CHIP	47uF	20%	4V	C602	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C204	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C603	1-124-779-00	ELECT CHIP	10uF	20%	16V
C205	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C604	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C206	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C605	1-124-779-00	ELECT CHIP	10uF	20%	16V
C207	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C606	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C208	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C607	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C209	1-124-779-00	ELECT CHIP	10uF	20%	16V	C608	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C302	1-164-850-11	CERAMIC CHIP	10PF	0.5PF	50V	C609	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C303	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C610	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C304	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C611	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C305	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C612	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C306	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C613	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C307	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C614	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C308	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C615	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C309	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C616	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C310	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C617	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C311	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C618	1-126-208-21	ELECT CHIP	47uF	20%	4V
C312	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C619	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C313	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C620	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C314	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C621	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C317	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C626	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C318	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C627	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C319	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C628	1-124-779-00	ELECT CHIP	10uF	20%	16V
C320	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C629	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C321	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C630	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C322	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C631	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C323	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C632	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C324	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C633	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C325	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C634	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C326	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C635	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C327	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C636	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C328	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C637	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C329	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C638	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C330	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C641	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C331	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C642	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C332	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C643	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C333	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C644	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C334	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C645	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C335	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C646	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V

RD-058

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
C655	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C849	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C656	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C850	1-126-208-21	ELECT CHIP	47uF	20%	4V
C657	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C852	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C658	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C853	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C660	1-164-874-11	CERAMIC CHIP	100PF	5%	50V	C901	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C704	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C902	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C705	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C903	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C706	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C904	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C707	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C905	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C708	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C906	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C709	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C907	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C710	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C908	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C711	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C909	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C712	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C910	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C713	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C911	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C714	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C912	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C715	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1001	1-124-779-00	ELECT CHIP	10uF	20%	16V
C716	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1002	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C717	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1003	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C718	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	C1004	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C719	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	C1005	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C720	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1006	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C721	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1007	1-164-850-11	CERAMIC CHIP	10PF	0.5PF	50V
C722	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1008	1-164-850-11	CERAMIC CHIP	10PF	0.5PF	50V
C723	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1010	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C724	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1107	1-165-908-11	CERAMIC CHIP	1uF	10%	10V
C725	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1108	1-165-908-11	CERAMIC CHIP	1uF	10%	10V
C726	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1109	1-126-209-11	ELECT CHIP	100uF	20%	4V
C727	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1201	1-126-208-21	ELECT CHIP	47uF	20%	4V
C808	1-126-208-21	ELECT CHIP	47uF	20%	4V	C1202	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C809	1-126-208-21	ELECT CHIP	47uF	20%	4V	C1203	1-165-908-11	CERAMIC CHIP	1uF	10%	10V
C810	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1204	1-126-208-21	ELECT CHIP	47uF	20%	4V
C811	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1205	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C814	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1206	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C815	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1207	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C816	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1208	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C817	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1209	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C818	1-218-990-81	SHORT CHIP	0			C1210	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C820	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1211	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C822	1-218-990-81	SHORT CHIP	0			C1212	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C824	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1213	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C829	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1214	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C830	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1215	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C831	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1217	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C832	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1218	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C833	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1219	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C834	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1220	1-126-208-21	ELECT CHIP	47uF	20%	4V
C835	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1221	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C836	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1222	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C837	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1223	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C838	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1224	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C839	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1226	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C840	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1227	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C841	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1229	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C842	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1230	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C843	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1231	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C844	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1232	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C845	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	C1233	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C846	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1234	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C847	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	C1235	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
C1241	1-126-205-11	ELECT CHIP 47uF 20%	6.3V	C1916	1-125-837-91	CERAMIC CHIP 1uF 10%	6.3V
C1242	1-126-208-21	ELECT CHIP 47uF 20%	4V	C1917	1-164-388-91	CERAMIC CHIP 270PF 5%	50V
C1244	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	C2101	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1401	1-124-779-00	ELECT CHIP 10uF 20%	16V	C2102	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1402	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	C2103	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1403	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C2104	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1404	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	C2105	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1405	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C2106	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1406	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V	C2107	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1407	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	C2108	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1408	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	< CONNECTOR >			
C1411	1-127-715-91	CERAMIC CHIP 0.22uF 10%	16V	CN101	1-764-177-11	PIN, CONNECTOR (SMD)(1.5MM) 7P	
C1412	1-126-206-11	ELECT CHIP 100uF 20%	6.3V	CN602	1-818-857-51	CONNECTOR, FFC/FPC 40P	
C1601	1-124-779-00	ELECT CHIP 10uF 20%	16V	CN603	1-818-857-51	CONNECTOR, FFC/FPC 40P	
C1602	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	CN1701	1-818-858-11	CONNECTOR, BOAD TO BOAD 42P	
C1603	1-124-779-00	ELECT CHIP 10uF 20%	16V	CN1702	1-818-858-11	CONNECTOR, BOAD TO BOAD 42P	
C1604	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	CN1901	1-573-806-21	PIN, CONNECTOR (1.5MM) (SMD)6P	
C1606	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	CN2101	1-818-857-51	CONNECTOR, FFC/FPC 40P	
C1607	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	< DIODE >			
C1608	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	D101	8-719-066-17	DIODE FTZ6.8E-T148	
C1609	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	D202	8-719-988-61	DIODE 1SS355TE-17	
C1610	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	D1201	8-719-988-61	DIODE 1SS355TE-17	
C1611	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	D1401	8-719-046-91	DIODE MA2S111	
C1612	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	D1401	8-719-056-23	DIODE MA2S111-(K8).SO	
C1613	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	D1402	8-719-083-15	DIODE 1SS389(TPL3)	
C1614	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	D1601	8-719-027-95	DIODE HSM88WK	
C1615	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	D1602	8-719-081-96	DIODE KV1870STL-G	
C1616	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	< FERRITE BADE >			
C1617	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	FB1701	1-469-083-21	FERRITE 0uH	
C1618	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	< FILTER >			
C1619	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	FL101	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1620	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	FL103	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1623	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	FL201	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1624	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	FL301	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1625	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	FL302	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1626	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	FL501	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1627	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	FL601	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1628	1-126-209-11	ELECT CHIP 100uF 20%	4V	FL602	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1629	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	FL603	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1630	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	FL802	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1631	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	FL803	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1632	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	FL804	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1633	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	FL805	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1638	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	FL806	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1701	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	FL1001	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1702	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	FL1401	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1703	1-164-874-11	CERAMIC CHIP 100PF 5%	50V	FL1601	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1901	1-124-779-00	ELECT CHIP 10uF 20%	16V	FL1602	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1903	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	FL1902	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1904	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	FL2101	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1905	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	FL2102	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1906	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	FL2103	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1907	1-164-848-11	CERAMIC CHIP 8PF 0.5PF	50V	FL2104	1-234-867-11	FILTER, EMI REMOVAL (SMD)	
C1908	1-164-848-11	CERAMIC CHIP 8PF 0.5PF	50V				
C1909	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V				
C1911	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V				
C1912	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V				
C1913	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V				
C1914	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V				
C1915	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V				

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
< IC >				< COIL >			
IC101	6-704-573-01	IC M24C32-WMN6T(B)		L1101	1-424-918-21	INDUCTOR 10uH	
IC104	6-707-917-01	IC HD6417306BL200AV		L1201	1-412-951-11	INDUCTOR 10uH	
IC105	8-759-573-97	IC SN74LVC541APWR		L1601	1-410-371-41	INDUCTOR 1.5uH	
IC106	8-759-680-48	IC TC7WH157FK(TE85R)		LF1901	1-469-972-21	INDUCTOR 0uH	
IC107	8-759-679-58	IC SN74AHCT541PWR		< TRANSISTOR >			
IC108	6-705-755-01	IC K4S561632E-UC75T		Q1201	8-729-010-05	TRANSISTOR MSB709-RT1	
IC108	6-706-007-01	IC HY57V561620CTP-HDR		Q1601	1-801-806-11	TRANSISTOR DTC144EKA	
IC108	6-708-508-01	IC EDS2516ADTA-75-E		< RESISTOR >			
IC109	6-705-755-01	IC K4S561632E-UC75T		R102	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC109	6-706-007-01	IC HY57V561620CTP-HDR		R103	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC109	6-708-508-01	IC EDS2516ADTA-75-E		R105	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC110	6-703-875-01	IC CDCVF2505PWR		R107	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC201	6-705-297-01	IC MBM29Z0003PCN-KE1		R112	1-218-941-81	RES-CHIP 100 5%	1/16W
IC202	6-705-297-01	IC MBM29Z0003PCN-KE1		R113	1-218-941-81	RES-CHIP 100 5%	1/16W
IC301	6-701-025-01	IC SN74LVC16244ADGGR		R114	1-218-941-81	RES-CHIP 100 5%	1/16W
IC302	8-759-392-81	IC SN74LVC16245ADGGR		R117	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC303	6-701-025-01	IC SN74LVC16244ADGGR		R119	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC304	8-759-392-81	IC SN74LVC16245ADGGR		R147	1-218-961-11	RES-CHIP 4.7K 5%	1/16W
IC305	6-701-025-01	IC SN74LVC16244ADGGR		R148	1-218-961-11	RES-CHIP 4.7K 5%	1/16W
IC306	6-701-025-01	IC SN74LVC16244ADGGR		R152	1-216-864-11	SHORT CHIP 0	
IC307	8-759-392-81	IC SN74LVC16245ADGGR		R154	1-218-990-81	SHORT CHIP 0	
IC308	6-701-025-01	IC SN74LVC16244ADGGR		R156	1-218-961-11	RES-CHIP 4.7K 5%	1/16W
IC309	6-701-025-01	IC SN74LVC16244ADGGR		R157	1-218-961-11	RES-CHIP 4.7K 5%	1/16W
IC310	8-759-392-81	IC SN74LVC16245ADGGR		R158	1-218-990-81	SHORT CHIP 0	
IC401	8-759-680-48	IC TC7WH157FK(TE85R)		R159	1-218-961-11	RES-CHIP 4.7K 5%	1/16W
IC402	6-705-336-01	IC K9F2808U0C-PCB0T		R161	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC501	6-706-603-01	IC CXD9830Q		R162	1-218-957-11	RES-CHIP 2.2K 5%	1/16W
IC601	8-753-208-36	IC CXD4702GB		R163	1-218-938-11	RES-CHIP 56 5%	1/16W
IC606	8-759-679-55	IC SN74LVC08APWR		R164	1-218-929-11	RES-CHIP 10 5%	1/16W
IC701	6-706-691-01	IC EM6A9320BI-5MGD		R165	1-218-929-11	RES-CHIP 10 5%	1/16W
IC701	6-706-784-01	IC HY5DU283222AFP-36		R166	1-218-957-11	RES-CHIP 2.2K 5%	1/16W
IC701	6-708-783-01	IC EDD1232AABH-7A-E		R167	1-218-938-11	RES-CHIP 56 5%	1/16W
IC702	6-705-764-01	IC K4H511638B-UCB0T		R168	1-218-938-11	RES-CHIP 56 5%	1/16W
IC702	6-707-410-01	IC HY5DU121622BTP-JDR		R170	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC702	6-708-305-01	IC K4H511638C-UCB3T		R172	1-218-941-81	RES-CHIP 100 5%	1/16W
IC702	6-708-431-01	IC EDD5116ADTA-7A-E		R173	1-218-938-11	RES-CHIP 56 5%	1/16W
IC802	8-753-217-76	IC CXD4705GB		R175	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC901	6-706-691-01	IC EM6A9320BI-5MGD		R176	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC901	6-706-784-01	IC HY5DU283222AFP-36		R177	1-218-949-11	RES-CHIP 470 5%	1/16W
IC901	6-708-783-01	IC EDD1232AABH-7A-E		R178	1-218-957-11	RES-CHIP 2.2K 5%	1/16W
IC1001	6-706-693-01	IC BU2357FV-E2		R182	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC1003	6-704-351-01	IC SN74LVC2G08DCUR		R183	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC1102	6-706-741-01	IC BA00HC5FP-E2		R184	1-218-929-11	RES-CHIP 10 5%	1/16W
IC1201	6-704-531-01	IC MM1591JFBEG		R185	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC1202	8-753-217-41	IC CXD3805R		R188	1-218-953-11	RES-CHIP 1K 5%	1/16W
IC1401	6-703-644-01	IC AD1895AYRSZRL		R190	1-218-957-11	RES-CHIP 2.2K 5%	1/16W
IC1402	6-705-515-01	IC AK4385VT-E2		R191	1-218-938-11	RES-CHIP 56 5%	1/16W
IC1403	8-759-546-74	IC TC7WH157FU(TE12R)		R192	1-218-937-11	RES-CHIP 47 5%	1/16W
IC1601	6-707-201-01	IC UPD72893BF1-FN3-A		R194	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC1602	6-705-992-11	IC IC42S16100-7TG-A		R197	1-218-965-11	RES-CHIP 10K 5%	1/16W
* IC1604	6-703-108-01	IC SN74LVC2G04DCKR		R198	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC1605	8-759-083-94	IC TC7W74FU(TE12R)		R199	1-218-938-11	RES-CHIP 56 5%	1/16W
IC1606	6-701-877-01	IC SM8707EV-G-E2		R232	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC1607	6-702-302-01	IC TK11133CSCL-G					
IC1901	6-706-365-01	IC UPD72852AGB-8EU-A					

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R302	1-218-990-81	SHORT CHIP	0			R536	1-218-965-11	RES-CHIP	10K	5%	1/16W
R304	1-218-938-11	RES-CHIP	56	5%	1/16W	R537	1-218-965-11	RES-CHIP	10K	5%	1/16W
R306	1-218-935-11	RES-CHIP	33	5%	1/16W	R538	1-218-929-11	RES-CHIP	10	5%	1/16W
R307	1-218-938-11	RES-CHIP	56	5%	1/16W	R541	1-218-965-11	RES-CHIP	10K	5%	1/16W
R308	1-218-939-11	RES-CHIP	68	5%	1/16W	R571	1-218-965-11	RES-CHIP	10K	5%	1/16W
R309	1-218-939-11	RES-CHIP	68	5%	1/16W	R576	1-218-965-11	RES-CHIP	10K	5%	1/16W
R311	1-218-941-81	RES-CHIP	100	5%	1/16W	R584	1-218-965-11	RES-CHIP	10K	5%	1/16W
R312	1-218-937-11	RES-CHIP	47	5%	1/16W	R585	1-218-965-11	RES-CHIP	10K	5%	1/16W
R313	1-218-941-81	RES-CHIP	100	5%	1/16W	R598	1-218-990-81	SHORT CHIP	0		
R314	1-218-937-11	RES-CHIP	47	5%	1/16W	R603	1-218-935-11	RES-CHIP	33	5%	1/16W
R315	1-218-941-81	RES-CHIP	100	5%	1/16W	R604	1-218-935-11	RES-CHIP	33	5%	1/16W
R316	1-218-937-11	RES-CHIP	47	5%	1/16W	R605	1-218-935-11	RES-CHIP	33	5%	1/16W
R317	1-218-940-11	RES-CHIP	82	5%	1/16W	R606	1-218-935-11	RES-CHIP	33	5%	1/16W
R318	1-218-937-11	RES-CHIP	47	5%	1/16W	R607	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R319	1-218-940-11	RES-CHIP	82	5%	1/16W	R608	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R320	1-218-935-11	RES-CHIP	33	5%	1/16W	R609	1-218-933-11	RES-CHIP	22	5%	1/16W
R322	1-218-933-11	RES-CHIP	22	5%	1/16W	R610	1-218-933-11	RES-CHIP	22	5%	1/16W
R323	1-218-935-11	RES-CHIP	33	5%	1/16W	R611	1-218-933-11	RES-CHIP	22	5%	1/16W
R324	1-218-940-11	RES-CHIP	82	5%	1/16W	R612	1-218-933-11	RES-CHIP	22	5%	1/16W
R325	1-218-935-11	RES-CHIP	33	5%	1/16W	R613	1-218-933-11	RES-CHIP	22	5%	1/16W
R326	1-218-938-11	RES-CHIP	56	5%	1/16W	R614	1-218-933-11	RES-CHIP	22	5%	1/16W
R327	1-218-938-11	RES-CHIP	56	5%	1/16W	R615	1-218-990-81	SHORT CHIP	0		
R328	1-218-938-11	RES-CHIP	56	5%	1/16W	R616	1-218-939-11	RES-CHIP	68	5%	1/16W
R330	1-218-965-11	RES-CHIP	10K	5%	1/16W	R618	1-218-938-11	RES-CHIP	56	5%	1/16W
R337	1-218-965-11	RES-CHIP	10K	5%	1/16W	R619	1-218-938-11	RES-CHIP	56	5%	1/16W
R339	1-218-965-11	RES-CHIP	10K	5%	1/16W	R620	1-218-933-11	RES-CHIP	22	5%	1/16W
R340	1-218-940-11	RES-CHIP	82	5%	1/16W	R621	1-218-933-11	RES-CHIP	22	5%	1/16W
R341	1-218-935-11	RES-CHIP	33	5%	1/16W	R622	1-218-933-11	RES-CHIP	22	5%	1/16W
R347	1-218-938-11	RES-CHIP	56	5%	1/16W	R623	1-218-933-11	RES-CHIP	22	5%	1/16W
R348	1-218-938-11	RES-CHIP	56	5%	1/16W	R624	1-218-933-11	RES-CHIP	22	5%	1/16W
R353	1-218-937-11	RES-CHIP	47	5%	1/16W	R625	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R354	1-218-938-11	RES-CHIP	56	5%	1/16W	R626	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R355	1-218-938-11	RES-CHIP	56	5%	1/16W	R627	1-218-938-11	RES-CHIP	56	5%	1/16W
R356	1-218-938-11	RES-CHIP	56	5%	1/16W	R631	1-218-990-81	SHORT CHIP	0		
R359	1-218-990-81	SHORT CHIP	0			R632	1-218-937-11	RES-CHIP	47	5%	1/16W
R361	1-218-929-11	RES-CHIP	10	5%	1/16W	R635	1-218-990-81	SHORT CHIP	0		
R362	1-218-935-11	RES-CHIP	33	5%	1/16W	R637	1-218-990-81	SHORT CHIP	0		
R363	1-218-935-11	RES-CHIP	33	5%	1/16W	R647	1-218-990-81	SHORT CHIP	0		
R364	1-218-937-11	RES-CHIP	47	5%	1/16W	R654	1-218-965-11	RES-CHIP	10K	5%	1/16W
R365	1-218-935-11	RES-CHIP	33	5%	1/16W	R660	1-218-933-11	RES-CHIP	22	5%	1/16W
R366	1-218-935-11	RES-CHIP	33	5%	1/16W	R661	1-218-933-11	RES-CHIP	22	5%	1/16W
R367	1-218-937-11	RES-CHIP	47	5%	1/16W	R662	1-218-933-11	RES-CHIP	22	5%	1/16W
R369	1-218-933-11	RES-CHIP	22	5%	1/16W	R666	1-218-990-81	SHORT CHIP	0		
R370	1-218-939-11	RES-CHIP	68	5%	1/16W	R667	1-218-990-81	SHORT CHIP	0		
R371	1-218-937-11	RES-CHIP	47	5%	1/16W	R668	1-218-990-81	SHORT CHIP	0		
R372	1-218-937-11	RES-CHIP	47	5%	1/16W	R669	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R374	1-218-939-11	RES-CHIP	68	5%	1/16W	R671	1-218-990-81	SHORT CHIP	0		
R375	1-218-937-11	RES-CHIP	47	5%	1/16W	R672	1-218-990-81	SHORT CHIP	0		
R377	1-218-965-11	RES-CHIP	10K	5%	1/16W	R674	1-218-990-81	SHORT CHIP	0		
R379	1-218-990-81	SHORT CHIP	0			R675	1-218-933-11	RES-CHIP	22	5%	1/16W
R402	1-218-965-11	RES-CHIP	10K	5%	1/16W	R676	1-218-933-11	RES-CHIP	22	5%	1/16W
R404	1-218-953-11	RES-CHIP	1K	5%	1/16W	R677	1-218-933-11	RES-CHIP	22	5%	1/16W
R407	1-218-965-11	RES-CHIP	10K	5%	1/16W	R678	1-218-933-11	RES-CHIP	22	5%	1/16W
R509	1-218-965-11	RES-CHIP	10K	5%	1/16W	R679	1-218-933-11	RES-CHIP	22	5%	1/16W
R513	1-218-977-11	RES-CHIP	100K	5%	1/16W	R680	1-218-933-11	RES-CHIP	22	5%	1/16W
R515	1-218-965-11	RES-CHIP	10K	5%	1/16W	R681	1-218-933-11	RES-CHIP	22	5%	1/16W
R516	1-218-965-11	RES-CHIP	10K	5%	1/16W	R682	1-218-933-11	RES-CHIP	22	5%	1/16W
R524	1-218-965-11	RES-CHIP	10K	5%	1/16W	R683	1-218-933-11	RES-CHIP	22	5%	1/16W
R525	1-218-965-11	RES-CHIP	10K	5%	1/16W	R684	1-218-933-11	RES-CHIP	22	5%	1/16W
R532	1-218-965-11	RES-CHIP	10K	5%	1/16W	R685	1-218-933-11	RES-CHIP	22	5%	1/16W

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R686	1-218-933-11	RES-CHIP	22	5%	1/16W	R1108	1-216-295-91	SHORT CHIP	0		
R687	1-218-933-11	RES-CHIP	22	5%	1/16W	R1119	1-216-864-11	SHORT CHIP	0		
R688	1-218-937-11	RES-CHIP	47	5%	1/16W	R1124	1-216-295-91	SHORT CHIP	0		
R689	1-218-937-11	RES-CHIP	47	5%	1/16W	R1125	1-216-296-11	SHORT CHIP	0		
R690	1-218-937-11	RES-CHIP	47	5%	1/16W	R1201	1-216-864-11	SHORT CHIP	0		
R691	1-218-937-11	RES-CHIP	47	5%	1/16W	R1203	1-218-990-81	SHORT CHIP	0		
R692	1-218-990-81	SHORT CHIP	0			R1205	1-218-990-81	SHORT CHIP	0		
R702	1-218-990-81	SHORT CHIP	0			R1207	1-218-990-81	SHORT CHIP	0		
R703	1-218-990-81	SHORT CHIP	0			R1208	1-218-990-81	SHORT CHIP	0		
R704	1-218-935-11	RES-CHIP	33	5%	1/16W	R1209	1-218-933-11	RES-CHIP	22	5%	1/16W
R705	1-218-935-11	RES-CHIP	33	5%	1/16W	R1210	1-218-933-11	RES-CHIP	22	5%	1/16W
R706	1-218-935-11	RES-CHIP	33	5%	1/16W	R1211	1-218-933-11	RES-CHIP	22	5%	1/16W
R707	1-218-935-11	RES-CHIP	33	5%	1/16W	R1216	1-218-965-11	RES-CHIP	10K	5%	1/16W
R708	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R1221	1-218-990-81	SHORT CHIP	0		
R709	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R1223	1-218-990-81	SHORT CHIP	0		
R710	1-218-935-11	RES-CHIP	33	5%	1/16W	R1233	1-218-945-11	RES-CHIP	220	5%	1/16W
R711	1-218-990-81	SHORT CHIP	0			R1234	1-218-990-81	SHORT CHIP	0		
R712	1-218-990-81	SHORT CHIP	0			R1235	1-218-990-81	SHORT CHIP	0		
R713	1-218-935-11	RES-CHIP	33	5%	1/16W	R1236	1-218-990-81	SHORT CHIP	0		
R827	1-218-937-11	RES-CHIP	47	5%	1/16W	R1237	1-218-990-81	SHORT CHIP	0		
R829	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1238	1-218-990-81	SHORT CHIP	0		
R832	1-218-990-81	SHORT CHIP	0			R1240	1-218-949-11	RES-CHIP	470	5%	1/16W
R836	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1241	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R843	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1243	1-218-953-11	RES-CHIP	1K	5%	1/16W
R846	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1248	1-218-990-81	SHORT CHIP	0		
R851	1-218-990-81	SHORT CHIP	0			R1249	1-218-990-81	SHORT CHIP	0		
R852	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R1250	1-218-977-11	RES-CHIP	100K	5%	1/16W
R853	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1402	1-218-990-81	SHORT CHIP	0		
R856	1-218-990-81	SHORT CHIP	0			R1408	1-218-973-11	RES-CHIP	47K	5%	1/16W
R861	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1409	1-218-990-81	SHORT CHIP	0		
R864	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1410	1-218-990-81	SHORT CHIP	0		
R872	1-218-938-11	RES-CHIP	56	5%	1/16W	R1411	1-218-990-81	SHORT CHIP	0		
R874	1-218-938-11	RES-CHIP	56	5%	1/16W	R1412	1-218-990-81	SHORT CHIP	0		
R876	1-218-938-11	RES-CHIP	56	5%	1/16W	R1413	1-218-990-81	SHORT CHIP	0		
R880	1-218-933-11	RES-CHIP	22	5%	1/16W	R1414	1-218-941-81	RES-CHIP	100	5%	1/16W
R881	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1415	1-218-933-11	RES-CHIP	22	5%	1/16W
R901	1-218-933-11	RES-CHIP	22	5%	1/16W	R1416	1-218-941-81	RES-CHIP	100	5%	1/16W
R902	1-218-933-11	RES-CHIP	22	5%	1/16W	R1417	1-218-941-81	RES-CHIP	100	5%	1/16W
R903	1-218-929-11	RES-CHIP	10	5%	1/16W	R1419	1-218-941-81	RES-CHIP	100	5%	1/16W
R904	1-218-929-11	RES-CHIP	10	5%	1/16W	R1420	1-218-990-81	SHORT CHIP	0		
R906	1-218-990-81	SHORT CHIP	0			R1421	1-218-990-81	SHORT CHIP	0		
R907	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R1422	1-218-990-81	SHORT CHIP	0		
R908	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R1424	1-216-864-11	SHORT CHIP	0		
R909	1-218-990-81	SHORT CHIP	0			R1450	1-218-990-81	SHORT CHIP	0		
R1003	1-218-939-11	RES-CHIP	68	5%	1/16W	R1451	1-218-990-81	SHORT CHIP	0		
R1004	1-218-939-11	RES-CHIP	68	5%	1/16W	R1452	1-218-990-81	SHORT CHIP	0		
R1005	1-218-939-11	RES-CHIP	68	5%	1/16W	R1602	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1006	1-218-935-11	RES-CHIP	33	5%	1/16W	R1603	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1011	1-218-951-11	RES-CHIP	680	5%	1/16W	R1604	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1015	1-218-947-11	RES-CHIP	330	5%	1/16W	R1605	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1016	1-218-939-11	RES-CHIP	68	5%	1/16W	R1607	1-218-990-81	SHORT CHIP	0		
R1017	1-218-939-11	RES-CHIP	68	5%	1/16W	R1608	1-218-935-11	RES-CHIP	33	5%	1/16W
R1018	1-218-939-11	RES-CHIP	68	5%	1/16W	R1609	1-218-941-81	RES-CHIP	100	5%	1/16W
R1019	1-218-939-11	RES-CHIP	68	5%	1/16W	R1610	1-218-990-81	SHORT CHIP	0		
R1022	1-218-990-81	SHORT CHIP	0			R1611	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1023	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1612	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1025	1-218-938-11	RES-CHIP	56	5%	1/16W	R1613	1-218-935-11	RES-CHIP	33	5%	1/16W
R1029	1-218-990-81	SHORT CHIP	0			R1614	1-218-935-11	RES-CHIP	33	5%	1/16W
R1105	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R1615	1-218-935-11	RES-CHIP	33	5%	1/16W
R1106	1-218-878-11	METAL CHIP	20K	0.5%	1/10W	R1616	1-218-935-11	RES-CHIP	33	5%	1/16W

Ref. No.	Part No.	Description				Remarks	Ref. No.	Part No.	Description				Remarks
R1617	1-218-965-11	RES-CHIP	10K	5%	1/16W		R1746	1-216-864-11	SHORT CHIP	0			
R1618	1-218-965-11	RES-CHIP	10K	5%	1/16W		R1749	1-218-949-11	RES-CHIP	470	5%	1/16W	
R1619	1-218-965-11	RES-CHIP	10K	5%	1/16W		R1810	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	
R1620	1-218-965-11	RES-CHIP	10K	5%	1/16W		R1820	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	
R1624	1-218-935-11	RES-CHIP	33	5%	1/16W		R1829	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1625	1-218-965-11	RES-CHIP	10K	5%	1/16W		R1843	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1626	1-218-935-11	RES-CHIP	33	5%	1/16W		R1845	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1627	1-218-965-11	RES-CHIP	10K	5%	1/16W		R1901	1-216-864-11	SHORT CHIP	0			
R1628	1-218-935-11	RES-CHIP	33	5%	1/16W		R1904	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1629	1-218-965-11	RES-CHIP	10K	5%	1/16W		R1905	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1630	1-218-965-11	RES-CHIP	10K	5%	1/16W		R1907	1-218-941-81	RES-CHIP	100	5%	1/16W	
R1631	1-208-943-11	METAL CHIP	220K	0.5%	1/16W		R1908	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1634	1-218-973-11	RES-CHIP	47K	5%	1/16W		R1909	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1635	1-218-973-11	RES-CHIP	47K	5%	1/16W		R1910	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1636	1-218-965-11	RES-CHIP	10K	5%	1/16W		R1911	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1638	1-208-927-11	METAL CHIP	47K	0.5%	1/16W		R1912	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1639	1-208-927-11	METAL CHIP	47K	0.5%	1/16W		R1913	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1640	1-208-927-11	METAL CHIP	47K	0.5%	1/16W		R1915	1-208-910-11	METAL CHIP	9.1K	0.5%	1/16W	
R1641	1-218-990-81	SHORT CHIP	0				R1916	1-218-938-11	METAL CHIP	56	0.5%	1/16W	
R1642	1-218-982-11	METAL CHIP	270K	0.5%	1/16W		R1917	1-218-938-11	METAL CHIP	56	0.5%	1/16W	
R1646	1-218-990-81	SHORT CHIP	0				R1919	1-218-938-11	METAL CHIP	56	0.5%	1/16W	
R1647	1-218-990-81	SHORT CHIP	0				R1920	1-218-938-11	METAL CHIP	56	0.5%	1/16W	
R1648	1-218-990-81	SHORT CHIP	0				R1921	1-218-864-11	METAL CHIP	5.1K	0.5%	1/16W	
R1649	1-218-990-81	SHORT CHIP	0				R2106	1-218-935-11	RES-CHIP	33	5%	1/16W	
R1654	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2107	1-218-990-81	SHORT CHIP	0			
R1655	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2108	1-218-990-81	SHORT CHIP	0			
R1656	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2111	1-218-929-11	RES-CHIP	10	5%	1/16W	
R1657	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2112	1-218-990-81	SHORT CHIP	0			
R1658	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2119	1-218-990-81	SHORT CHIP	0			
R1659	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2120	1-218-990-81	SHORT CHIP	0			
R1660	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2122	1-218-990-81	SHORT CHIP	0			
R1661	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2124	1-218-990-81	SHORT CHIP	0			
R1662	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2125	1-218-990-81	SHORT CHIP	0			
R1663	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2126	1-218-990-81	SHORT CHIP	0			
R1664	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2127	1-218-990-81	SHORT CHIP	0			
R1665	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2311	1-218-990-81	SHORT CHIP	0			
R1669	1-218-965-11	RES-CHIP	10K	5%	1/16W		R2443	1-218-990-81	SHORT CHIP	0			
R1670	1-218-965-11	RES-CHIP	10K	5%	1/16W		R3006	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1672	1-218-990-81	SHORT CHIP	0				R3014	1-218-939-11	RES-CHIP	68	5%	1/16W	
R1673	1-218-990-81	SHORT CHIP	0				R3015	1-218-937-11	RES-CHIP	47	5%	1/16W	
R1674	1-218-990-81	SHORT CHIP	0				R3017	1-218-938-11	RES-CHIP	56	5%	1/16W	
R1676	1-216-864-11	SHORT CHIP	0				R3018	1-218-938-11	RES-CHIP	56	5%	1/16W	
R1677	1-218-990-81	SHORT CHIP	0				R3019	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1679	1-218-935-11	RES-CHIP	33	5%	1/16W		R3021	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1680	1-218-929-11	RES-CHIP	10	5%	1/16W		R3022	1-218-938-11	RES-CHIP	56	5%	1/16W	
R1681	1-218-961-11	RES-CHIP	4.7K	5%	1/16W		R3023	1-218-938-11	RES-CHIP	56	5%	1/16W	
R1682	1-218-937-11	RES-CHIP	47	5%	1/16W		R3024	1-218-938-11	RES-CHIP	56	5%	1/16W	
R1683	1-218-937-11	RES-CHIP	47	5%	1/16W		R3025	1-218-937-11	RES-CHIP	47	5%	1/16W	
R1684	1-218-937-11	RES-CHIP	47	5%	1/16W		R3027	1-218-937-11	RES-CHIP	47	5%	1/16W	
R1685	1-218-965-11	RES-CHIP	10K	5%	1/16W		R3029	1-218-941-81	RES-CHIP	100	5%	1/16W	
R1686	1-218-965-11	RES-CHIP	10K	5%	1/16W		R3030	1-218-938-11	RES-CHIP	56	5%	1/16W	
R1688	1-218-977-11	RES-CHIP	100K	5%	1/16W		R3035	1-218-937-11	RES-CHIP	47	5%	1/16W	
R1689	1-218-990-81	SHORT CHIP	0				R3040	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1690	1-218-990-81	SHORT CHIP	0				R3044	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1701	1-218-935-11	RES-CHIP	33	5%	1/16W		R3045	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1702	1-218-935-11	RES-CHIP	33	5%	1/16W		R3048	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	
R1703	1-218-935-11	RES-CHIP	33	5%	1/16W		R3052	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R1714	1-218-990-81	SHORT CHIP	0				R3053	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	
R1723	1-216-295-91	SHORT CHIP	0				R3055	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	
R1725	1-216-295-91	SHORT CHIP	0				R3056	1-218-938-11	RES-CHIP	56	5%	1/16W	

RD-058

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R3057	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3132	1-218-937-11	RES-CHIP	47	5%	1/16W
R3058	1-218-937-11	RES-CHIP	47	5%	1/16W	R3133	1-218-937-11	RES-CHIP	47	5%	1/16W
R3059	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3134	1-218-864-11	SHORT CHIP	0		
R3061	1-218-938-11	RES-CHIP	56	5%	1/16W	R3141	1-218-935-11	RES-CHIP	33	5%	1/16W
R3063	1-218-938-11	RES-CHIP	56	5%	1/16W	R3142	1-218-935-11	RES-CHIP	33	5%	1/16W
R3064	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3143	1-218-939-11	RES-CHIP	68	5%	1/16W
R3065	1-218-937-11	RES-CHIP	47	5%	1/16W	R3144	1-218-939-11	RES-CHIP	68	5%	1/16W
R3066	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3145	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3068	1-218-938-11	RES-CHIP	56	5%	1/16W	R3146	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3070	1-218-938-11	RES-CHIP	56	5%	1/16W	R3147	1-218-990-81	SHORT CHIP	0		
R3071	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3148	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3074	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3170	1-218-937-11	RES-CHIP	47	5%	1/16W
R3075	1-218-939-11	RES-CHIP	68	5%	1/16W	R3601	1-218-990-81	SHORT CHIP	0		
R3076	1-218-937-11	RES-CHIP	47	5%	1/16W	R3619	1-218-933-11	RES-CHIP	22	5%	1/16W
R3077	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3620	1-218-933-11	RES-CHIP	22	5%	1/16W
R3078	1-218-938-11	RES-CHIP	56	5%	1/16W	R3629	1-218-939-11	RES-CHIP	68	5%	1/16W
R3079	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3630	1-218-933-11	RES-CHIP	22	5%	1/16W
R3080	1-218-937-11	RES-CHIP	47	5%	1/16W	R3631	1-218-933-11	RES-CHIP	22	5%	1/16W
R3081	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3637	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3082	1-218-938-11	RES-CHIP	56	5%	1/16W	R3638	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3083	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3639	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3084	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3650	1-218-935-11	RES-CHIP	33	5%	1/16W
R3088	1-218-939-11	RES-CHIP	68	5%	1/16W	R3651	1-218-940-11	RES-CHIP	82	5%	1/16W
R3089	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3652	1-218-933-11	RES-CHIP	22	5%	1/16W
R3092	1-218-937-11	RES-CHIP	47	5%	1/16W	R3653	1-218-940-11	RES-CHIP	82	5%	1/16W
R3093	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3654	1-218-933-11	RES-CHIP	22	5%	1/16W
R3094	1-218-938-11	RES-CHIP	56	5%	1/16W	R3655	1-218-933-11	RES-CHIP	22	5%	1/16W
R3095	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3656	1-218-940-11	RES-CHIP	82	5%	1/16W
R3096	1-218-937-11	RES-CHIP	47	5%	1/16W	R3657	1-218-935-11	RES-CHIP	33	5%	1/16W
R3097	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3658	1-218-943-11	RES-CHIP	150	5%	1/16W
R3098	1-218-937-11	RES-CHIP	47	5%	1/16W	R3659	1-218-945-11	RES-CHIP	220	5%	1/16W
R3099	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3660	1-218-933-11	RES-CHIP	22	5%	1/16W
R3100	1-218-938-11	RES-CHIP	56	5%	1/16W	R3661	1-218-945-11	RES-CHIP	220	5%	1/16W
R3101	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3662	1-218-933-11	RES-CHIP	22	5%	1/16W
R3106	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3663	1-218-933-11	RES-CHIP	22	5%	1/16W
R3107	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3664	1-218-940-11	RES-CHIP	82	5%	1/16W
R3108	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3665	1-218-935-11	RES-CHIP	33	5%	1/16W
R3109	1-218-938-11	RES-CHIP	56	5%	1/16W	R3672	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3110	1-218-938-11	RES-CHIP	56	5%	1/16W	R3673	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3111	1-218-933-11	RES-CHIP	22	5%	1/16W	R3674	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3112	1-218-935-11	RES-CHIP	33	5%	1/16W	R3675	1-218-962-11	RES-CHIP	5.6K	5%	1/16W
R3113	1-218-929-11	RES-CHIP	10	5%	1/16W	R3676	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3114	1-218-935-11	RES-CHIP	33	5%	1/16W	R3677	1-218-962-11	RES-CHIP	5.6K	5%	1/16W
R3115	1-218-929-11	RES-CHIP	10	5%	1/16W	R3678	1-218-990-81	SHORT CHIP	0		
R3116	1-218-929-11	RES-CHIP	10	5%	1/16W	R3679	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3117	1-218-938-11	RES-CHIP	56	5%	1/16W	R3680	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3118	1-218-938-11	RES-CHIP	56	5%	1/16W	R3681	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3119	1-218-938-11	RES-CHIP	56	5%	1/16W	R3682	1-218-938-11	RES-CHIP	56	5%	1/16W
R3120	1-218-938-11	RES-CHIP	56	5%	1/16W	R3683	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3121	1-218-938-11	RES-CHIP	56	5%	1/16W	R3803	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3122	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3805	1-218-990-81	SHORT CHIP	0		
R3123	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3810	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R3124	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3811	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R3125	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3814	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3126	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3817	1-218-990-81	SHORT CHIP	0		
R3127	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3818	1-218-935-11	RES-CHIP	33	5%	1/16W
R3128	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3819	1-218-935-11	RES-CHIP	33	5%	1/16W
R3129	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R3828	1-218-941-81	RES-CHIP	100	5%	1/16W
R3130	1-218-935-11	RES-CHIP	33	5%	1/16W	R3829	1-218-937-11	RES-CHIP	47	5%	1/16W
R3131	1-218-935-11	RES-CHIP	33	5%	1/16W	R3830	1-218-939-11	RES-CHIP	68	5%	1/16W

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
R3831	1-218-935-11	RES-CHIP 33	5% 1/16W	RB310	1-234-378-21	RES, NETWORK 10K	(1005X4)
R3832	1-218-937-11	RES-CHIP 47	5% 1/16W	RB311	1-234-714-11	RES, NETWORK 56	(1005X4)
R3833	1-218-937-11	RES-CHIP 47	5% 1/16W	RB312	1-234-702-11	RES, NETWORK 68	(1005X4)
R3834	1-218-941-81	RES-CHIP 100	5% 1/16W	RB313	1-234-714-11	RES, NETWORK 56	(1005X4)
R3835	1-218-941-81	RES-CHIP 100	5% 1/16W	RB315	1-234-378-21	RES, NETWORK 10K	(1005X4)
R3836	1-218-990-81	SHORT CHIP 0		RB316	1-234-378-21	RES, NETWORK 10K	(1005X4)
R3837	1-218-941-81	RES-CHIP 100	5% 1/16W	RB317	1-234-378-21	RES, NETWORK 10K	(1005X4)
R3838	1-218-941-81	RES-CHIP 100	5% 1/16W	RB318	1-234-378-21	RES, NETWORK 10K	(1005X4)
R3839	1-218-941-81	RES-CHIP 100	5% 1/16W	RB319	1-234-378-21	RES, NETWORK 10K	(1005X4)
R3840	1-218-941-81	RES-CHIP 100	5% 1/16W	RB320	1-234-702-11	RES, NETWORK 68	(1005X4)
R3841	1-218-941-81	RES-CHIP 100	5% 1/16W	RB321	1-234-702-11	RES, NETWORK 68	(1005X4)
R3842	1-218-941-81	RES-CHIP 100	5% 1/16W	RB322	1-234-702-11	RES, NETWORK 68	(1005X4)
R3843	1-218-941-81	RES-CHIP 100	5% 1/16W	RB323	1-234-702-11	RES, NETWORK 68	(1005X4)
R3845	1-218-939-11	RES-CHIP 68	5% 1/16W	RB324	1-242-963-21	RES, NETWORK 33	(1005X4)
R3846	1-218-937-11	RES-CHIP 47	5% 1/16W	RB325	1-242-963-21	RES, NETWORK 33	(1005X4)
R3847	1-218-935-11	RES-CHIP 33	5% 1/16W	RB326	1-234-702-11	RES, NETWORK 68	(1005X4)
R3848	1-218-965-11	RES-CHIP 10K	5% 1/16W	RB327	1-234-702-11	RES, NETWORK 68	(1005X4)
R3849	1-218-965-11	RES-CHIP 10K	5% 1/16W	RB329	1-234-378-21	RES, NETWORK 10K	(1005X4)
R3850	1-218-965-11	RES-CHIP 10K	5% 1/16W	RB330	1-234-378-21	RES, NETWORK 10K	(1005X4)
R3851	1-218-977-11	RES-CHIP 100K	5% 1/16W	RB331	1-234-378-21	RES, NETWORK 10K	(1005X4)
R3853	1-218-990-81	SHORT CHIP 0		RB332	1-234-378-21	RES, NETWORK 10K	(1005X4)
< COMPONENT CIRCUIT BLOCK >				RB333	1-234-714-11	RES, NETWORK 56	(1005X4)
RB101	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB334	1-234-714-11	RES, NETWORK 56	(1005X4)
RB102	1-234-372-21	RES, NETWORK 100	(1005X4)	RB335	1-242-963-21	RES, NETWORK 33	(1005X4)
RB103	1-234-372-21	RES, NETWORK 100	(1005X4)	RB336	1-242-963-21	RES, NETWORK 33	(1005X4)
RB104	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB337	1-242-963-21	RES, NETWORK 33	(1005X4)
RB105	1-242-963-21	RES, NETWORK 33	(1005X4)	RB338	1-242-963-21	RES, NETWORK 33	(1005X4)
RB106	1-234-714-11	RES, NETWORK 56	(1005X4)	RB339	1-242-963-21	RES, NETWORK 33	(1005X4)
RB107	1-234-371-21	RES, NETWORK 47	(1005X4)	RB340	1-242-963-21	RES, NETWORK 33	(1005X4)
RB108	1-234-371-21	RES, NETWORK 47	(1005X4)	RB341	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB109	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB342	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB110	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB343	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB111	1-234-371-21	RES, NETWORK 47	(1005X4)	RB344	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB112	1-234-371-21	RES, NETWORK 47	(1005X4)	RB345	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB113	1-242-963-21	RES, NETWORK 33	(1005X4)	RB346	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB114	1-242-963-21	RES, NETWORK 33	(1005X4)	RB347	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB115	1-242-963-21	RES, NETWORK 33	(1005X4)	RB348	1-234-702-11	RES, NETWORK 68	(1005X4)
RB116	1-242-963-21	RES, NETWORK 33	(1005X4)	RB349	1-234-702-11	RES, NETWORK 68	(1005X4)
RB117	1-234-371-21	RES, NETWORK 47	(1005X4)	RB350	1-234-702-11	RES, NETWORK 68	(1005X4)
RB118	1-234-371-21	RES, NETWORK 47	(1005X4)	RB351	1-234-702-11	RES, NETWORK 68	(1005X4)
RB119	1-234-371-21	RES, NETWORK 47	(1005X4)	RB401	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB120	1-234-371-21	RES, NETWORK 47	(1005X4)	RB402	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB121	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB601	1-234-370-21	RES, NETWORK 22	(1005X4)
RB122	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB602	1-234-370-21	RES, NETWORK 22	(1005X4)
RB123	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB603	1-234-370-21	RES, NETWORK 22	(1005X4)
RB124	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB604	1-234-370-21	RES, NETWORK 22	(1005X4)
RB125	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB605	1-234-370-21	RES, NETWORK 22	(1005X4)
RB126	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB606	1-234-370-21	RES, NETWORK 22	(1005X4)
RB301	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB607	1-234-370-21	RES, NETWORK 22	(1005X4)
RB302	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB608	1-234-370-21	RES, NETWORK 22	(1005X4)
RB303	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB609	1-234-371-21	RES, NETWORK 47	(1005X4)
RB304	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB610	1-234-371-21	RES, NETWORK 47	(1005X4)
RB305	1-234-702-11	RES, NETWORK 68	(1005X4)	RB611	1-234-371-21	RES, NETWORK 47	(1005X4)
RB306	1-234-702-11	RES, NETWORK 68	(1005X4)	RB612	1-234-371-21	RES, NETWORK 47	(1005X4)
RB307	1-234-714-11	RES, NETWORK 56	(1005X4)	RB613	1-234-714-11	RES, NETWORK 56	(1005X4)
RB308	1-234-714-11	RES, NETWORK 56	(1005X4)	RB614	1-234-714-11	RES, NETWORK 56	(1005X4)
RB309	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB615	1-234-714-11	RES, NETWORK 56	(1005X4)
				RB616	1-234-714-11	RES, NETWORK 56	(1005X4)
				RB617	1-234-714-11	RES, NETWORK 56	(1005X4)
				RB618	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
RB619	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB820	1-242-963-21	RES, NETWORK 33	(1005X4)
RB620	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB821	1-242-963-21	RES, NETWORK 33	(1005X4)
RB621	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB822	1-234-371-21	RES, NETWORK 47	(1005X4)
RB622	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB823	1-234-371-21	RES, NETWORK 47	(1005X4)
RB623	1-234-370-21	RES, NETWORK 22	(1005X4)	RB824	1-234-371-21	RES, NETWORK 47	(1005X4)
RB624	1-234-370-21	RES, NETWORK 22	(1005X4)	RB825	1-234-371-21	RES, NETWORK 47	(1005X4)
RB625	1-234-370-21	RES, NETWORK 22	(1005X4)	RB826	1-242-963-21	RES, NETWORK 33	(1005X4)
RB626	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB827	1-242-963-21	RES, NETWORK 33	(1005X4)
RB627	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB829	1-234-369-21	RES, NETWORK 10	(1005X4)
RB628	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB830	1-234-369-21	RES, NETWORK 10	(1005X4)
RB629	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB832	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB630	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB833	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB631	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB834	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB632	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB901	1-234-369-21	RES, NETWORK 10	(1005X4)
RB633	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	RB902	1-234-369-21	RES, NETWORK 10	(1005X4)
RB636	1-234-370-21	RES, NETWORK 22	(1005X4)	RB903	1-234-370-21	RES, NETWORK 22	(1005X4)
RB637	1-234-370-21	RES, NETWORK 22	(1005X4)	RB904	1-234-370-21	RES, NETWORK 22	(1005X4)
RB654	1-242-963-21	RES, NETWORK 33	(1005X4)	RB905	1-234-370-21	RES, NETWORK 22	(1005X4)
RB655	1-234-373-21	RES, NETWORK 220	(1005X4)	RB906	1-234-370-21	RES, NETWORK 22	(1005X4)
RB656	1-234-373-21	RES, NETWORK 220	(1005X4)	RB907	1-234-369-21	RES, NETWORK 10	(1005X4)
RB657	1-234-373-21	RES, NETWORK 220	(1005X4)	RB908	1-234-369-21	RES, NETWORK 10	(1005X4)
RB658	1-234-373-21	RES, NETWORK 220	(1005X4)	RB1201	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB659	1-234-791-21	RES, NETWORK 150X4	(2010)	RB1202	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB660	1-234-373-21	RES, NETWORK 220	(1005X4)	RB1203	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB661	1-234-373-21	RES, NETWORK 220	(1005X4)	RB1204	1-234-370-21	RES, NETWORK 22	(1005X4)
RB662	1-234-373-21	RES, NETWORK 220	(1005X4)	RB1205	1-234-370-21	RES, NETWORK 22	(1005X4)
RB663	1-234-373-21	RES, NETWORK 220	(1005X4)	RB1601	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB701	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1603	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB702	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1605	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB703	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1606	1-234-702-11	RES, NETWORK 68	(1005X4)
RB704	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1607	1-234-702-11	RES, NETWORK 68	(1005X4)
RB705	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1608	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB706	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1609	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB707	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1610	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB708	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1611	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB709	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1612	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB710	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1613	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB711	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1614	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB712	1-242-963-21	RES, NETWORK 33	(1005X4)	RB1615	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB713	1-234-373-21	RES, NETWORK 220	(1005X4)	RB1616	1-234-714-11	RES, NETWORK 56	(1005X4)
RB714	1-234-373-21	RES, NETWORK 220	(1005X4)	RB1617	1-234-714-11	RES, NETWORK 56	(1005X4)
RB715	1-234-373-21	RES, NETWORK 220	(1005X4)	RB1618	1-234-714-11	RES, NETWORK 56	(1005X4)
RB716	1-234-373-21	RES, NETWORK 220	(1005X4)	RB1619	1-234-714-11	RES, NETWORK 56	(1005X4)
RB717	1-234-373-21	RES, NETWORK 220	(1005X4)	RB1620	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB718	1-234-373-21	RES, NETWORK 220	(1005X4)	RB1621	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB719	1-234-373-21	RES, NETWORK 220	(1005X4)	RB2103	1-234-372-21	RES, NETWORK 100	(1005X4)
RB720	1-234-373-21	RES, NETWORK 220	(1005X4)	RB2104	1-234-372-21	RES, NETWORK 100	(1005X4)
RB806	1-234-714-11	RES, NETWORK 56	(1005X4)	RB2303	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB807	1-234-714-11	RES, NETWORK 56	(1005X4)	RB2304	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB808	1-234-714-11	RES, NETWORK 56	(1005X4)	RB2305	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB809	1-234-714-11	RES, NETWORK 56	(1005X4)	RB2306	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB810	1-234-714-11	RES, NETWORK 56	(1005X4)	RB2307	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB811	1-234-371-21	RES, NETWORK 47	(1005X4)	RB2308	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)
RB812	1-234-371-21	RES, NETWORK 47	(1005X4)			< VIBRATOR >	
RB813	1-234-371-21	RES, NETWORK 47	(1005X4)				
RB814	1-234-371-21	RES, NETWORK 47	(1005X4)	X102	1-795-885-21	VIBRATOR, CRYSTAL (SMD)(33MHz)	
RB815	1-234-400-21	CONDUCTOR, NETWORK	(2010X4)	X1001	1-781-867-21	VIBRATOR, CRYSTAL(27MHz)	
RB817	1-234-372-21	RES, NETWORK 100	(1005X4)	X1901	1-795-886-21	VIBRATOR, CRYSTAL (SMD)(24.576MHz)	
RB818	1-234-372-21	RES, NETWORK 100	(1005X4)				
RB819	1-234-372-21	RES, NETWORK 100	(1005X4)				

Ref. No.	Part No.	Description	Remarks
△	1-468-930-11	POWER BLOCK (SRV1194EK) *****	
		< CAPACITOR >	
△ C101		METALLIZED 0.1uF 250V	
△ C103		CERAMIC 100pF 50V	
△ C104		CERAMIC 100pF 50V	
△ C112		CERAMIC 680pF 50V	
△ C114		CERAMIC 680pF 50V	
		< CONNECTOR >	
△ CN101		AC INLET	
		< FUSE >	
△ F101		FUSE T3.15A/250V	
		< IC >	
△ IC101		MIP-3E7	
		< COIL >	
△ L101		LFT	
△ L102		LFT	
		< CHIP FUSE >	
△ P301		CHIP 1.25A	
△ P401		CHIP 2.5A	
△ P601		CHIP 0.8A	
△ P602		CHIP 5A	
△ P501		CHIP 3.15A	
△ P502		CHIP 2A	
		< PHOTO COUPLER >	
△ PC101		PHOTO COUPLER PC123	
		< RESISTOR >	
△ R101		CARBON 4.7MΩ 1/2W	
		< TRANSFORMER >	
△ T101		SWITCHING TRANSFORMER	
		< VARISTOR >	
△ Z101		ERZV10DK471	

ACCESSORIES

1-575-131-82	CORD, POWER
1-696-593-11	CORD, CONNECTION
1-479-289-11	REMOTE COMMANDER (RMT-D217)
2-635-893-11	MANUAL, INSTRUCTION (French) (AEP1)
2-635-893-21	MANUAL, INSTRUCTION (German) (AEP1)
2-635-893-31	MANUAL, INSTRUCTION (Italian) (AEP1)
2-635-893-41	MANUAL, INSTRUCTION (Dutch) (AEP1)
2-635-893-51	MANUAL, INSTRUCTION (Spanish) (AEP2)
2-635-893-61	MANUAL, INSTRUCTION (Portuguese) (AEP2)
2-635-893-71	MANUAL, INSTRUCTION (Danish) (AEP2)
2-635-893-81	MANUAL, INSTRUCTION (Swedish) (AEP2)
2-635-893-91	MANUAL, INSTRUCTION (Finnish) (AEP2)

Note : The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

