

STR-DH810

SECTION 6

EXPLODED VIEWS

Note:

- -XX and -X mean standardized parts, so they may have some difference from the original one.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.
- Color Indication of Appearance Parts Example:
 KNOB, BALANCE (WHITE) . . . (RED)


↑
 Parts Color

↑
 Cabinet's Color

The components identified by mark  or dotted line with mark  are critical for safety.
Replace only with part number specified.


The components identified by mark  contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

6-1. CASE SECTION

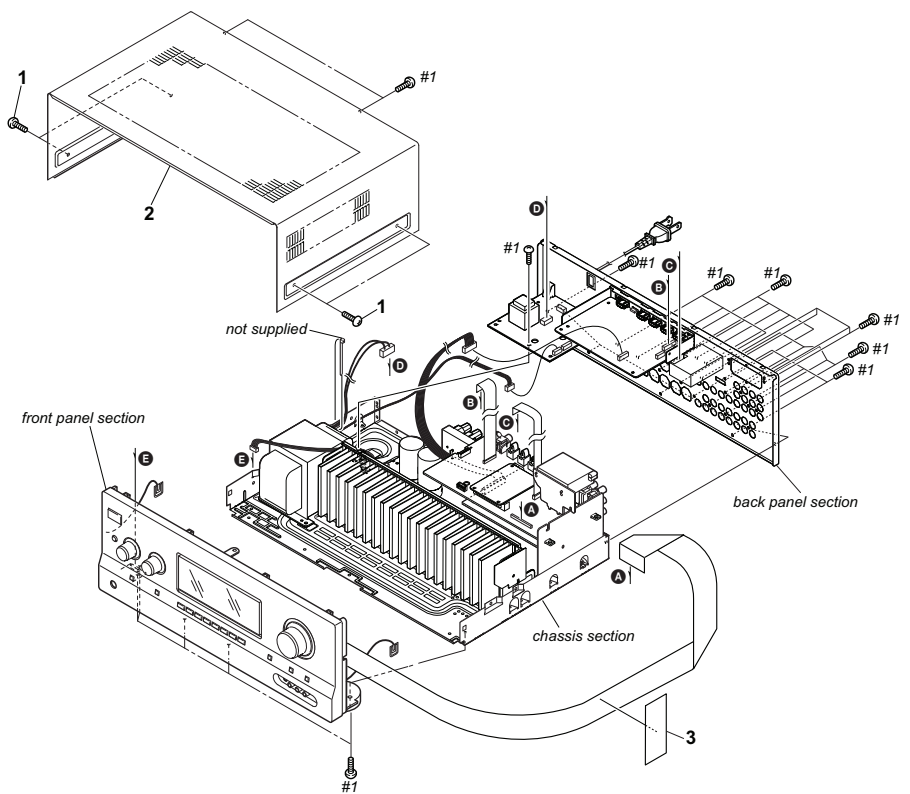

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Remark</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Remark</u>
1	2-580-630-01	SCREW, +BVST 4X8		3	3-831-441-11	CUSHION, SARANET	
2	4-160-845-31	CASE		#1	7-685-646-71	SCREW +BVTP 3X8 TYPE2 IT-3	

6-2. FRONT PANEL SECTION

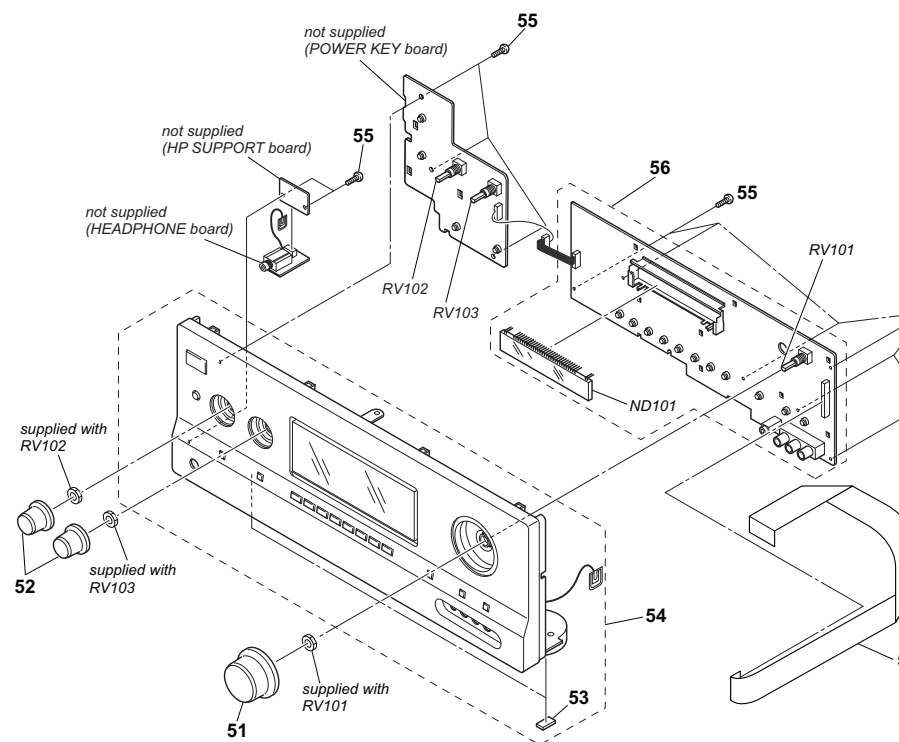


Note: If wire (flat type) is replaced, install it after ben
it in the same form as that before replacemen

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	4-124-321-01	KNOB, VOLUME (G53)		57	1-828-413-51	WIRE (FLAT TYPE) (29 CORE)	
52	4-125-404-01	KNOB, MENU (G73)		ND101	1-483-118-11	VACUUM FLOURESCENT DISPLAY	
53	4-977-358-01	CUSHION		RV101	1-418-725-41	ENCODER, ROTARY (12 TYPE)	(MASTER VO
54	X-2515-712-1	FRONT PANEL ASSY (US)					
54	X-2515-713-1	FRONT PANEL ASSY (EXCEPT US)					
55	3-087-053-01	+BVTP2.6 (3CR)		RV102	1-418-817-21	ENCODER, ROTARY (- TONE +)	
56	A-1748-024-A	DISPLAY BOARD, COMPLETE		RV103	1-418-817-21	ENCODER, ROTARY (INPUT SELECTOR)	

STR-DH810
Ver. 1.1


6-3. BACK PANEL SECTION

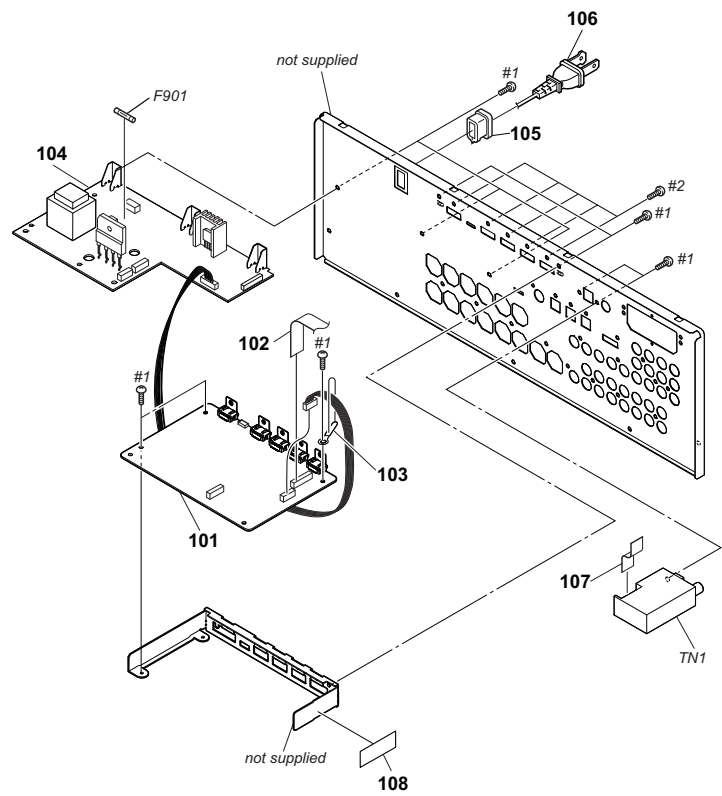

Note: If wire (flat type) is replaced, install it after bending it in the same form as that before replacement.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	A-1772-453-A	D-VIDEO BOARD, COMPLETE		107	1-828-964-11	WIRE (FLAT TYPE) (11 CORE) (EXCEPT US)	
102	1-828-359-51	WIRE (FLAT TYPE) (19 CORE)		108	3-831-441-11	CUSHION, SARANET	
* 103	3-703-150-11	CLAMP		△ F901	1-532-465-33	FUSE, T3.15AL 250V (EXCEPT US)	
104	A-1748-026-A	SUPPLY BOARD, COMPLETE (US)		△ F901	1-533-311-12	FUSE, GLASS (DIA.5) 8A 125V (US)	
104	A-1748-063-A	SUPPLY BOARD, COMPLETE (EXCEPT US)		TN1	1-693-737-21	TUNER (FM/AM) (EXCEPT US)	
105	4-966-267-12	BUSHING (FBS001), CORD		TN1	1-693-779-11	TUNER (FM/AM) (US)	
△ 106	1-777-071-83	CORD, POWER (AEP, UK)		#1	7-685-646-71	SCREW +BVTP 3X8 TYPE2 IT-3	
△ 106	1-833-566-21	POWER-SUPPLY CORD (AUS)		#2	7-685-871-01	SCREW +BVTT 3X6 (S)	
△ 106	1-834-270-11	CORD, POWER (US)					
107	1-828-954-11	WIRE (FLAT TYPE) (9 CORE) (US)					

6-4. CHASSIS SECTION

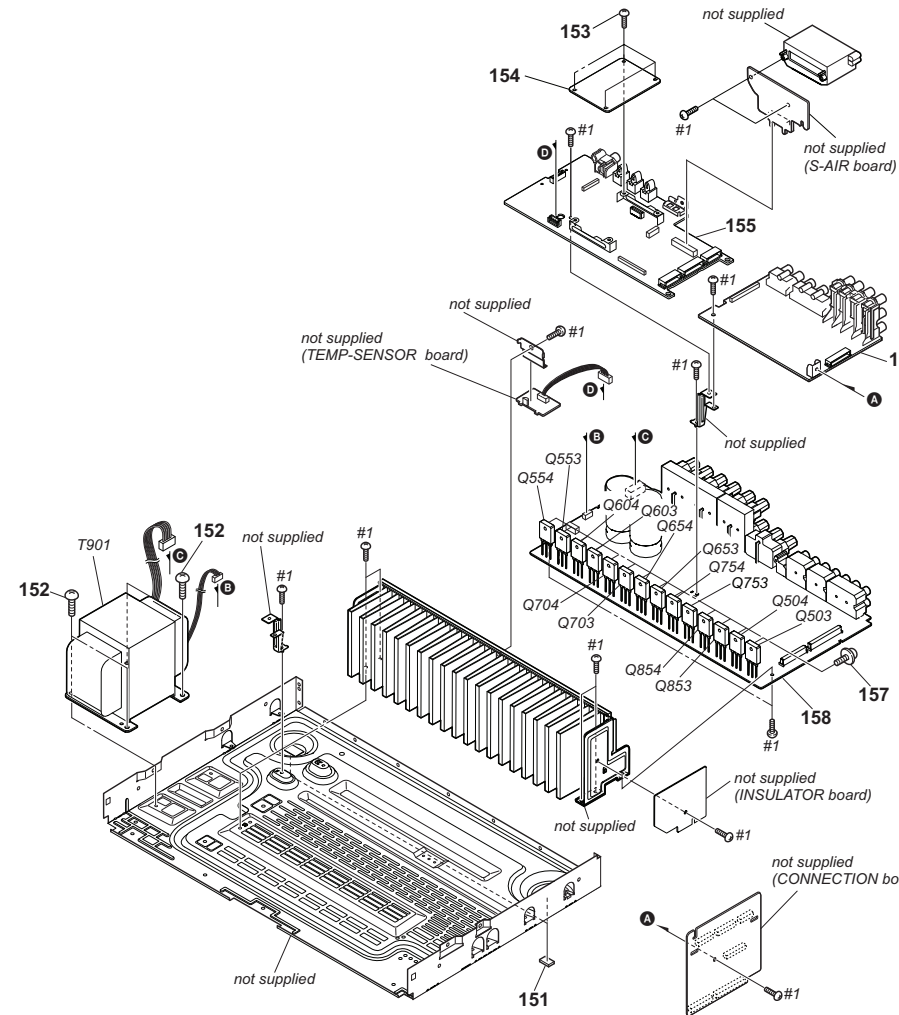

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
151	4-977-358-01	CUSHION		Q603	6-702-390-01	IC MN2488-OPY-MK	
152	4-249-675-01	+BV SUMITITE S 4X6 ROUND		Q604	6-702-391-01	IC MP1620-OPY-MK	
153	3-087-053-01	+BVTP2.6 (3CR)		Q653	6-702-390-01	IC MN2488-OPY-MK	
154	A-1767-378-A	DSP BOARD, COMPLETE		Q654	6-702-391-01	IC MP1620-OPY-MK	
155	A-1748-031-A	DIGITAL BOARD, COMPLETE (US)		Q703	6-702-390-01	IC MN2488-OPY-MK	
				Q704	6-702-391-01	IC MP1620-OPY-MK	
155	A-1748-064-A	DIGITAL BOARD, COMPLETE (EXCEPT US)		Q753	6-702-390-01	IC MN2488-OPY-MK	
156	A-1748-025-A	ANALOG VIDEO BOARD, COMPLETE		Q754	6-702-391-01	IC MP1620-OPY-MK	
157	3-905-609-31	SCREW (TRANSISTOR)		Q853	6-702-390-01	IC MN2488-OPY-MK	
158	A-1748-003-A	MAIN BOARD, COMPLETE (US)		Q854	6-702-391-01	IC MP1620-OPY-MK	
158	A-1748-060-A	MAIN BOARD, COMPLETE (EXCEPT US)		△ T900	1-445-652-21	POWER TRANSFORMER (MAIN) (EXCEPT US)	
Q503	6-702-390-01	IC MN2488-OPY-MK		△ T900	1-445-797-11	POWER TRANSFORMER (MAIN) (US)	
Q504	6-702-391-01	IC MP1620-OPY-MK		#1	7-685-646-71	SCREW +BVTP 3X8 TYPE2 IT-3	
Q553	6-702-390-01	IC MN2488-OPY-MK					
Q554	6-702-391-01	IC MP1620-OPY-MK					

STR-DH810

Ver. 1.1

ANALOG VIDEO

SECTION 7 ELECTRICAL PARTS LIST

Note:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- XX and -X mean standardized parts, so they may have some difference from the original one.
- Items marked "a" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- RESISTORS
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable
- CAPACITORS
uF: μ F
- COILS
uH: μ H

SEMICONDUCTORS

In each case, u: μ , for example:

uA. . : μ A. . , uPA. . , μ PA. . ,
uPB. . : μ PB. . , uPC. . , μ PC. . ,
uPD. . : μ PD. .

When indicating parts by reference number, please include the board name.

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
Replace only with part number specified.

The components identified by mark Δ contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
	A-1748-025-A	ANALOG VIDEO BOARD, COMPLETE *****		C243	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
	7-685-646-71	SCREW +BVTP 3X8 TYPE2 IT-3		C244	1-126-947-11	ELECT 47uF 20%	35V
		< CAPACITOR >		C245	1-126-947-11	ELECT 47uF 20%	35V
C201	1-126-964-11	ELECT 10uF 20%	50V	C246	1-126-964-11	ELECT 10uF 20%	50V
C202	1-126-964-11	ELECT 10uF 20%	50V	C247	1-162-923-11	CERAMIC CHIP 47PF 5%	50V
C203	1-126-964-11	ELECT 10uF 20%	50V			< CONNECTOR >	
C204	1-126-964-11	ELECT 10uF 20%	50V	CN201	1-764-865-41	CONNECTOR, BOARD TO BOARD 13P	
C205	1-126-964-11	ELECT 10uF 20%	50V			< DIODE >	
C206	1-126-964-11	ELECT 10uF 20%	50V	D200	6-502-218-01	DI RB060M-30TR	
C207	1-126-964-11	ELECT 10uF 20%	50V	D201	6-501-817-01	DIODE MA2J1110GLS0	
C208	1-126-964-11	ELECT 10uF 20%	50V	D202	6-501-817-01	DIODE MA2J1110GLS0	
C209	1-126-964-11	ELECT 10uF 20%	50V	D203	6-500-335-01	DIODE MC2838-T112-1	
C210	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V			< FERRITE BEAD >	
C211	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	FB201	1-469-152-11	FERRITE, EMI (SMD) (2012)	
C212	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	FB202	1-469-152-11	FERRITE, EMI (SMD) (2012)	
C213	1-126-947-11	ELECT 47uF 20%	35V			< IC >	
C214	1-126-947-11	ELECT 47uF 20%	35V	IC200	6-706-767-01	IC NJM2586AM	
C220	1-126-962-11	ELECT 3.3uF 20%	50V	IC201	8-759-822-05	IC LA7213	
C221	1-126-962-11	ELECT 3.3uF 20%	50V	IC202	8-759-822-05	IC LA7213	
C222	1-126-933-11	ELECT 100uF 20%	16V	IC203	6-704-199-01	IC NJM2595M-TE2	
C223	1-126-933-11	ELECT 100uF 20%	16V	IC204	6-713-031-01	IC KIA7805API-UJ/PF	
C224	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	IC205	6-711-998-01	IC KIA7905PI	
C225	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V			< JACK >	
C226	1-126-916-11	ELECT 1000uF 20%	6.3V	J201	1-816-592-11	JACK, PIN 9P (COMPONENT VIDEO ASSIGNABLE (INPUT ONLY) IN 1/IN 2/MONITOR OUT)	
C227	1-126-916-11	ELECT 1000uF 20%	6.3V	J202	1-821-278-12	JACK 3P (COMPONENT VIDEO ASSIGNABLE (INPUT ONLY) IN 3)	
C228	1-126-933-11	ELECT 100uF 20%	16V	J203	1-815-043-11	JACK, PIN 2P (VIDEO 1 VIDEO IN, MONITOR VIDEO OUT)	
C229	1-100-597-91	CERAMIC CHIP 0.1uF 10%	25V	J204	1-794-978-11	JACK, PIN 3P (SAT/CATV VIDEO IN, BD VIDEO IN, VIDEO 1 VIDEO OUT)	
C230	1-100-597-91	CERAMIC CHIP 0.1uF 10%	25V			< TRANSISTOR >	
C232	1-126-964-11	ELECT 10uF 20%	50V	Q201	8-729-038-28	TRANSISTOR RT1N441C-TP-1	
C233	1-126-964-11	ELECT 10uF 20%	50V				
C234	1-126-964-11	ELECT 10uF 20%	50V				
C235	1-126-964-11	ELECT 10uF 20%	50V				
C236	1-162-927-11	CERAMIC CHIP 100PF 5%	50V				
C237	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V				
C238	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V				
C239	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V				
C240	1-162-927-11	CERAMIC CHIP 100PF 5%	50V				
C241	1-162-927-11	CERAMIC CHIP 100PF 5%	50V				
C242	1-162-927-11	CERAMIC CHIP 100PF 5%	50V				

Ref. No.	Part No.	Description	Remark		
Q202	8-729-038-28	TRANSISTOR	RT1N441C-TP-1		
Q203	8-729-620-07	TRANSISTOR	2SC3052EF-T1-L-LEF		
Q204	8-729-620-07	TRANSISTOR	2SC3052EF-T1-L-LEF		
< RESISTOR >					
R200	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R201	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R202	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R203	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R204	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R205	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R206	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R207	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R208	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R209	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R210	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R211	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R212	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R213	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R214	1-216-864-11	SHORT CHIP	0		
R216	1-211-985-11	METAL CHIP	47	0.5%	1/10W
R217	1-211-985-11	METAL CHIP	47	0.5%	1/10W
R218	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R219	1-211-985-11	METAL CHIP	47	0.5%	1/10W
R220	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R221	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R223	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R226	1-216-815-11	METAL CHIP	330	5%	1/10W
R227	1-216-815-11	METAL CHIP	330	5%	1/10W
R228	1-216-815-11	METAL CHIP	330	5%	1/10W
R229	1-216-815-11	METAL CHIP	330	5%	1/10W
R230	1-216-847-11	METAL CHIP	150K	5%	1/10W
R231	1-216-847-11	METAL CHIP	150K	5%	1/10W
R232	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R233	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R234	1-216-821-11	METAL CHIP	1K	5%	1/10W
R235	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R236	1-216-821-11	METAL CHIP	1K	5%	1/10W
R237	1-216-825-11	METAL CHIP	2.2K	5%	1/10W

CONNECTION BOARD					

< CONNECTOR >					
CN1001	1-770-383-11	CONNECTOR, BOARD TO BOARD 14P			
CN1002	1-573-845-11	CONNECTOR, BOARD TO BOARD 13P			
CN1003	1-770-386-11	CONNECTOR, BOARD TO BOARD 20P			
CN1004	1-764-867-41	CONNECTOR, BOARD TO BOARD 20P			
CN1005	1-770-384-11	CONNECTOR, BOARD TO BOARD 16P			
CN1006	1-573-829-11	CONNECTOR, BOARD TO BOARD 15P			
< JUMPER RESISTOR >					
JR100	1-216-864-11	SHORT CHIP	0		
JR101	1-216-864-11	SHORT CHIP	0		
JR102	1-216-864-11	SHORT CHIP	0		
JR103	1-216-864-11	SHORT CHIP	0		
JR104	1-216-864-11	SHORT CHIP	0		
JR105	1-216-864-11	SHORT CHIP	0		
JR106	1-216-864-11	SHORT CHIP	0		
JR107	1-216-864-11	SHORT CHIP	0		

Ref. No.	Part No.	Description	Remark		
JR108	1-216-864-11	SHORT CHIP	0		
JR109	1-216-864-11	SHORT CHIP	0		
JR110	1-216-864-11	SHORT CHIP	0		
JR111	1-216-864-11	SHORT CHIP	0		
JR112	1-216-864-11	SHORT CHIP	0		
JR113	1-216-864-11	SHORT CHIP	0		
JR114	1-216-864-11	SHORT CHIP	0		
JR115	1-216-864-11	SHORT CHIP	0		
JR116	1-216-864-11	SHORT CHIP	0		
JR117	1-216-864-11	SHORT CHIP	0		

	A-1748-031-A	DIGITAL BOARD, COMPLETE (US)			
	A-1748-064-A	DIGITAL BOARD, COMPLETE (EXCEPT US)			

	3-087-053-01	+BVTP2.6 (3CR)			
< CAPACITOR >					
C2000	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2002	1-112-300-91	CERAMIC CHIP	4.7uF	10%	10V
C2003	1-112-300-91	CERAMIC CHIP	4.7uF	10%	10V
C2004	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C2005	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2006	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2007	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2008	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2010	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2012	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2013	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2015	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2016	1-112-300-91	CERAMIC CHIP	4.7uF	10%	10V
C2017	1-135-372-31	ELECT	470uF	20%	10V
C2018	1-137-980-91	CERAMIC CHIP	0.47uF	10%	50V
C2019	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2020	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2021	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2023	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C2024	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2025	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2026	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2027	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2030	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C2031	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C2032	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2033	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2034	1-137-980-91	CERAMIC CHIP	0.47uF	10%	50V
C2035	1-126-947-11	ELECT	47uF	20%	35V
C2044	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2045	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2046	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2047	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C2048	1-126-947-11	ELECT	47uF	20%	35V
C2048	1-112-089-11	ELECT	47uF	20%	25V
(EXCEPT JAPAN)					
C2049	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C2050	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C2051	1-126-947-11	ELECT	47uF	20%	35V
C2051	1-112-089-11	ELECT	47uF	20%	25V
(EXCEPT JAPAN)					
C2052	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V

STR-DH810

Ver. 1.1

DIGITAL

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C2054	1-112-080-11	ELECT	470uF 20% 10V (EXCEPT US)	C2102	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2054	1-126-925-91	ELECT	470uF 20% 10V (US)	C2103	1-165-722-11	ELECT	100uF 20% 10V
C2055	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2104	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2056	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C2105	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2057	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C2106	1-126-933-11	ELECT	100uF 20% 16V
C2058	1-164-847-11	CERAMIC CHIP	7PF 0.5PF 50V	C2107	1-126-933-11	ELECT	100uF 20% 16V
C2059	1-164-847-11	CERAMIC CHIP	7PF 0.5PF 50V	C2108	1-112-114-11	ELECT	22uF 20% 50V
C2060	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C2109	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2061	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C2113	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2062	1-112-089-11	ELECT	47uF 20% 25V (EXCEPT US)	C2114	1-165-722-11	ELECT	100uF 20% 10V
C2062	1-126-925-91	ELECT	470uF 20% 10V (US)	C2116	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2063	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C2121	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2064	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C2122	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2065	1-112-089-11	ELECT	47uF 20% 25V (EXCEPT US)	C2123	1-112-121-11	ELECT	100uF 20% 16V (EXCEPT US)
C2065	1-126-933-11	ELECT	100uF 20% 16V (US)	C2123	1-126-933-11	ELECT	100uF 20% 16V (US)
C2066	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V	C2124	1-112-300-91	CERAMIC CHIP	4.7uF 10% 10V
C2067	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2125	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2068	1-128-590-11	ELECT CHIP	100uF 20% 6.3V	C2126	1-112-300-91	CERAMIC CHIP	4.7uF 10% 10V
C2069	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C2127	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2070	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2128	1-100-152-91	CERAMIC CHIP	100PF 5% 100V
C2071	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2129	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2072	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2132	1-126-947-11	ELECT	47uF 20% 35V
C2073	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2133	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2074	1-112-080-11	ELECT	470uF 20% 10V (EXCEPT US)	C2134	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2074	1-126-925-91	ELECT	470uF 20% 10V (US)	C2139	1-126-947-11	ELECT	47uF 20% 35V
C2075	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C2140	1-124-261-00	ELECT	10uF 20% 50V
C2076	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2141	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2077	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2142	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2079	1-112-083-11	ELECT	100uF 20% 16V (EXCEPT US)	C2143	1-165-722-11	ELECT	100uF 20% 10V
C2079	1-126-933-11	ELECT	100uF 20% 16V (US)	C2144	1-126-176-11	ELECT	220uF 20% 10V
C2080	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2145	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2081	1-112-121-11	ELECT	100uF 20% 16V (EXCEPT US)	C2146	1-112-100-11	ELECT	10uF 20% 50V (EXCEPT US)
C2081	1-126-933-11	ELECT	100uF 20% 16V (US)	C2146	1-126-964-11	ELECT	10uF 20% 50V (US)
C2082	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2147	1-112-083-11	ELECT	100uF 20% 16V (EXCEPT US)
C2083	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C2147	1-126-933-11	ELECT	100uF 20% 16V (US)
C2084	1-126-947-11	ELECT	47uF 20% 35V (US)	C2148	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C2084	1-112-089-11	ELECT	47uF 20% 25V (EXCEPT US)	C2149	1-112-100-11	ELECT	10uF 20% 50V
C2085	1-126-965-91	ELECT	22uF 20% 50V (US)	C2150	1-112-100-11	ELECT	10uF 20% 50V
C2086	1-112-121-11	ELECT	100uF 20% 16V (EXCEPT US)	C2151	1-112-100-11	ELECT	10uF 20% 50V
C2086	1-126-933-11	ELECT	100uF 20% 16V (US)	C2152	1-112-100-11	ELECT	10uF 20% 50V
C2087	1-112-080-11	ELECT	470uF 20% 10V (EXCEPT US)	C2153	1-112-100-11	ELECT	10uF 20% 50V
C2087	1-126-925-91	ELECT	470uF 20% 10V (US)	C2154	1-112-100-11	ELECT	10uF 20% 50V
C2088	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2155	1-112-100-11	ELECT	10uF 20% 50V
C2089	1-100-152-91	CERAMIC CHIP	100PF 5% 100V	C2156	1-112-100-11	ELECT	10uF 20% 50V
C2092	1-162-960-11	CERAMIC CHIP	220PF 10% 50V	C2157	1-114-587-91	CERAMIC CHIP	0.0022uF 5% 50V
C2093	1-162-962-11	CERAMIC CHIP	470PF 10% 50V	C2158	1-114-587-91	CERAMIC CHIP	0.0022uF 5% 50V
C2094	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2159	1-114-587-91	CERAMIC CHIP	0.0022uF 5% 50V
C2095	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C2160	1-114-587-91	CERAMIC CHIP	0.0022uF 5% 50V
C2096	1-112-080-11	ELECT	470uF 20% 10V (EXCEPT US)	C2161	1-114-587-91	CERAMIC CHIP	0.0022uF 5% 50V
C2096	1-126-925-91	ELECT	470uF 20% 10V (US)	C2162	1-114-587-91	CERAMIC CHIP	0.0022uF 5% 50V
C2098	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2163	1-114-587-91	CERAMIC CHIP	0.0022uF 5% 50V
C2099	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C2164	1-114-587-91	CERAMIC CHIP	0.0022uF 5% 50V
				C2187	1-165-989-11	CERAMIC CHIP	10uF 10% 6.3V
				C2189	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V
				C2198	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V
				C2199	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
				C2201	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
				C2203	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C2204	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	FB2006	1-400-862-11	BEAD, FERRITE	
C2212	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	FB2007	1-469-139-21	FERRITE, EMI (SMD) (2012)	
C2226	1-126-923-91	ELECT	220uF 20% 10V	FB2008	1-400-862-11	BEAD, FERRITE	
C2227	1-112-080-11	ELECT	470uF 20% 10V	FB2009	1-400-862-11	BEAD, FERRITE	
C2228	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	FB2011	1-400-862-11	BEAD, FERRITE	
C2229	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	FB2012	1-400-862-11	BEAD, FERRITE	
C2230	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	FB2014	1-400-862-11	BEAD, FERRITE	
C2233	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	FB2015	1-400-862-11	BEAD, FERRITE	
C2235	1-124-259-11	ELECT	4.7uF 20% 50V	* FB2016	1-400-973-21	INDUCTOR (EMI FERRITE)	
C2236	1-100-152-91	CERAMIC CHIP	100PF 5% 100V	FB2017	1-400-862-11	BEAD, FERRITE	
C2237	1-100-152-91	CERAMIC CHIP	100PF 5% 100V	FB2018	1-400-862-11	BEAD, FERRITE	
C2238	1-100-152-91	CERAMIC CHIP	100PF 5% 100V	FB2019	1-400-862-11	BEAD, FERRITE	
C2239	1-100-152-91	CERAMIC CHIP	100PF 5% 100V	* FB2020	1-400-973-21	INDUCTOR (EMI FERRITE)	
C2240	1-124-259-11	ELECT	4.7uF 20% 50V	FB2021	1-400-862-11	BEAD, FERRITE	
C2241	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	FB2022	1-400-862-11	BEAD, FERRITE	
C2242	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	FB2023	1-469-152-11	FERRITE, EMI (SMD) (2012)	
C2243	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	FB2024	1-469-152-11	FERRITE, EMI (SMD) (2012)	
C2244	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	FB2025	1-469-152-11	FERRITE, EMI (SMD) (2012)	
C2245	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	FB2026	1-400-862-11	BEAD, FERRITE	
C2246	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	FB2027	1-400-862-11	BEAD, FERRITE	
C2247	1-100-152-91	CERAMIC CHIP	100PF 5% 100V	FB2028	1-469-139-21	FERRITE, EMI (SMD) (2012)	
C2248	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	FB2029	1-469-139-21	FERRITE, EMI (SMD) (2012)	
C2259	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V (EXCEPT US)	FB2030	1-469-139-21	FERRITE, EMI (SMD) (2012)	
< CONNECTOR >				FB2031	1-469-139-21	FERRITE, EMI (SMD) (2012)	
CN2001	1-784-861-51	CONNECTOR, FFC (LIF (NON-ZIF)) 9P		FB2032	1-469-139-21	FERRITE, EMI (SMD) (2012)	
CN2002	1-568-830-11	CONNECTOR, FFC 11P (EXCEPT US)		< IC >			
CN2003	1-784-770-11	CONNECTOR, FFC 9P (US)		IC2000	6-705-468-01	IC BA33BC0FP-E2	
CN2004	1-770-386-11	CONNECTOR, BOARD TO BOARD 20P		IC2001	6-713-032-01	IC KIA7809API-U/PF	
CN2005	1-817-615-21	CONNECTOR, SQUARE TYPE (RECE) (DMPORT)		IC2002	6-600-466-01	IC TORX147L (SONY) (DIGITAL (ASSIGNABLE) OPTICAL SAT/C	
CN2006	1-785-910-21	CONNECTOR, BOARD TO BOARD 50P		IC2003	6-600-466-01	IC TORX147L (SONY) (DIGITAL (ASSIGNABLE) OPTICAL IN)	
CN2007	1-820-117-51	CONNECTOR, FFC/FPC 19P		IC2004	6-600-466-01	IC TORX147L (SONY) (TV OPTICAL IN)	
CN2008	1-770-408-11	CONNECTOR, BOARD TO BOARD 14P		IC2005	6-712-613-01	IC SI-3010KM-TLS	
CN2009	1-770-409-11	CONNECTOR, BOARD TO BOARD 16P		IC2006	6-713-642-01	IC LC89058W-E	
CN2010	1-770-411-11	CONNECTOR, BOARD TO BOARD 20P		IC2007	8-759-524-48	IC TC74VHC393FT (EL)	
CN2012	1-820-125-51	CONNECTOR, FFC/FPC 29P		IC2008	8-759-524-10	IC TC74VHC157FT (EL)	
* CN2014	1-564-507-11	PLUG, CONNECTOR 4P		IC2009	8-759-447-77	IC TC7WH74FU (TE12R)	
* CN2017	1-564-510-11	PLUG, CONNECTOR 7P		IC2010	6-705-337-01	IC TK11150CSCL-G	
< DIODE >				IC2011	8-759-523-81	IC TC74VHC08FT (EL)	
D2000	6-501-817-01	DIODE MA2J1110GLS0		IC2012	6-710-554-01	IC PCM1808PWR	
D2001	6-501-817-01	DIODE MA2J1110GLS0		IC2013	8-759-082-61	IC TC4W53FU	
D2002	6-501-817-01	DIODE MA2J1110GLS0		IC2014	6-706-487-01	IC TC7SH08FU (T5RSOYF)	
D2004	8-719-060-48	DIODE RB751V-40TE-17		IC2015	8-759-096-87	IC TC7WU04FU (TE12R)	
D2005	6-501-817-01	DIODE MA2J1110GLS0		IC2016	6-712-614-01	IC SI-3050KM-TLS	
D2013	8-719-049-09	DIODE 1SS367-T3SONY		IC2017	6-712-616-01	IC SI-3033KM-TLS	
D2014	8-719-049-09	DIODE 1SS367-T3SONY		IC2019	8-759-058-62	IC TC7SH08FU (TE85R)	
D2017	8-719-049-09	DIODE 1SS367-T3SONY		IC2020	6-702-913-01	IC S-80929CNMC-G8ZT2G	
D2018	8-719-049-09	DIODE 1SS367-T3SONY		IC2022	(Not supplied)	IC CAT24C64WI-GT3	
D2019	6-501-817-01	DIODE MA2J1110GLS0		IC2023	6-707-870-01	IC TC74VHC157FT (EKJ)	
D2301	8-719-989-03	DIODE DAN222		IC2024	6-711-874-01	IC WM8768GEDS/R	
D2302	8-719-989-03	DIODE DAN222		IC2032	6-707-870-01	IC TC74VHC157FT (EKJ)	
D2382	6-502-395-01	DI SL-194S-WS-SD-T		IC2033	6-709-861-01	IC TC7SH126FU (T5RSOYF)	
D2383	6-501-817-01	DIODE MA2J1110GLS0		IC2034	6-702-913-01	IC S-80929CNMC-G8ZT2G	
< FERRITE BEAD >				IC2035	A-1748-041-A	IC MB90F058PF-G-JNE1 (for SERVICE)	
FB2000	1-400-862-11	BEAD, FERRITE		IC2036	8-759-186-23	IC TC74VHC595F (EL)	
FB2001	1-400-862-11	BEAD, FERRITE		IC2037	8-759-710-97	IC NJM4565M-D	
FB2004	1-469-139-21	FERRITE, EMI (SMD) (2012)		IC2038	8-759-186-23	IC TC74VHC595F (EL)	
FB2005	1-469-139-21	FERRITE, EMI (SMD) (2012)		Note: IC2022 cannot exchange with single. When this is damaged, exchange the entire mounted board.			

STR-DH810

Ver. 1.1

DIGITAL

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
J2000	1-784-431-11	< JACK >				R2058	1-216-809-11	METAL CHIP	100	5%	1/10W
		JACK, PIN 1P				R2059	1-208-774-11	METAL CHIP	470	0.5%	1/10W
		(DIGITAL ASSIGNABLE) COAXIAL DVD IN)				R2060	1-208-550-41	RES-CHIP	470K	2%	1/10W
						R2061	1-208-526-41	RES-CHIP	47K	2%	1/10W
* L2000	1-400-973-21	< COIL >				R2062	1-216-833-11	METAL CHIP	10K	5%	1/10W
		INDUCTOR (EMI FERRITE)				R2063	1-216-833-11	METAL CHIP	10K	5%	1/10W
		< TRANSISTOR >				R2064	1-216-833-11	METAL CHIP	10K	5%	1/10W
						R2065	1-216-833-11	METAL CHIP	10K	5%	1/10W
Q2002	6-551-696-01	TRANSISTOR	ISA1235AC1TP-1EF			R2066	1-216-857-11	METAL CHIP	1M	5%	1/10W
Q2003	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF			R2067	1-216-813-11	METAL CHIP	220	5%	1/10W
Q2004	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF			R2068	1-216-816-11	METAL CHIP	390	5%	1/10W
Q2005	8-729-027-43	TRANSISTOR	DTC114EKA-T146			R2070	1-216-835-11	METAL CHIP	220	0.5%	1/10W
Q2006	8-729-027-43	TRANSISTOR	DTC114EKA-T146			R2071	1-216-817-11	METAL CHIP	470	5%	1/10W
Q2382	8-729-027-43	TRANSISTOR	DTC114EKA-T146			R2072	1-216-833-11	METAL CHIP	10K	5%	1/10W
Q2383	6-551-690-01	TRANSISTOR	RT3N11M-TP-1			R2073	1-216-809-11	METAL CHIP	100	5%	1/10W
R2002	1-216-825-11	< RESISTOR >				R2074	1-216-809-11	METAL CHIP	100	5%	1/10W
		METAL CHIP	2.2K	5%	1/10W (EXCEPT US)	R2075	1-216-815-11	METAL CHIP	330	5%	1/10W
						R2076	1-216-805-11	METAL CHIP	47	5%	1/10W
						R2077	1-216-817-11	METAL CHIP	470	5%	1/10W
R2002	1-216-864-11	SHORT CHIP	0 (US)			R2078	1-216-817-11	METAL CHIP	470	5%	1/10W
R2003	1-216-841-11	METAL CHIP	47K	5%	1/10W (EXCEPT US)	R2079	1-216-815-11	METAL CHIP	330	5%	1/10W
R2004	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2080	1-216-809-11	METAL CHIP	100	5%	1/10W
R2006	1-216-817-11	METAL CHIP	470	5%	1/10W	R2081	1-216-815-11	METAL CHIP	330	5%	1/10W
R2007	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2082	1-216-816-11	METAL CHIP	390	5%	1/10W
R2008	1-216-809-11	METAL CHIP	100	5%	1/10W	R2083	1-216-809-11	METAL CHIP	100	5%	1/10W
R2009	1-216-815-11	METAL CHIP	330	5%	1/10W	R2084	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2010	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2085	1-216-809-11	METAL CHIP	100	5%	1/10W
R2011	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2087	1-216-809-11	METAL CHIP	100	5%	1/10W
R2012	1-216-864-11	SHORT CHIP	0			R2090	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2014	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2091	1-216-815-11	METAL CHIP	330	5%	1/10W
R2016	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R2092	1-216-815-11	METAL CHIP	330	5%	1/10W
R2017	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R2093	1-216-815-11	METAL CHIP	330	5%	1/10W
R2019	1-216-809-11	METAL CHIP	100	5%	1/10W	R2094	1-216-815-11	METAL CHIP	330	5%	1/10W
R2020	1-216-841-11	METAL CHIP	47K	5%	1/10W	R2095	1-216-809-11	METAL CHIP	100	5%	1/10W
R2021	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2096	1-216-815-11	METAL CHIP	330	5%	1/10W
R2023	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2097	1-216-817-11	METAL CHIP	470	5%	1/10W
R2024	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2098	1-216-817-11	METAL CHIP	470	5%	1/10W
R2025	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2100	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2026	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2101	1-216-809-11	METAL CHIP	100	5%	1/10W
R2027	1-216-809-11	METAL CHIP	100	5%	1/10W	R2102	1-216-809-11	METAL CHIP	100	5%	1/10W
R2028	1-216-805-11	METAL CHIP	47	5%	1/10W	R2103	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2030	1-216-809-11	METAL CHIP	100	5%	1/10W	R2104	1-216-821-11	METAL CHIP	1K	5%	1/10W
R2031	1-216-809-11	METAL CHIP	100	5%	1/10W	R2105	1-216-857-11	METAL CHIP	1M	5%	1/10W
R2033	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2106	1-216-805-11	METAL CHIP	47	5%	1/10W
R2036	1-216-809-11	METAL CHIP	100	5%	1/10W	R2107	1-216-809-11	METAL CHIP	100	5%	1/10W
R2037	1-216-809-11	METAL CHIP	100	5%	1/10W	R2108	1-216-864-11	SHORT CHIP	0		
R2038	1-216-809-11	METAL CHIP	100	5%	1/10W	R2109	1-216-864-11	SHORT CHIP	0		
R2040	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2110	1-216-815-11	METAL CHIP	330	5%	1/10W
R2042	1-216-809-11	METAL CHIP	100	5%	1/10W	R2111	1-216-809-11	METAL CHIP	100	5%	1/10W
R2043	1-216-809-11	METAL CHIP	100	5%	1/10W	R2112	1-216-833-11	METAL CHIP	10K	5%	1/10W
R2044	1-216-809-11	METAL CHIP	100	5%	1/10W	R2113	1-216-864-11	SHORT CHIP	0		
R2045	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2114	1-216-809-11	METAL CHIP	100	5%	1/10W
R2050	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2115	1-216-864-11	SHORT CHIP	0		
R2052	1-208-755-11	METAL CHIP	75	0.5%	1/10W	R2116	1-216-809-11	METAL CHIP	100	5%	1/10W
R2053	1-216-809-11	METAL CHIP	100	5%	1/10W	R2117	1-216-864-11	SHORT CHIP	0		
R2055	1-216-809-11	METAL CHIP	100	5%	1/10W	R2118	1-216-864-11	SHORT CHIP	0		
R2056	1-216-809-11	METAL CHIP	100	5%	1/10W	R2119	1-216-809-11	METAL CHIP	100	5%	1/10W
R2057	1-216-809-11	METAL CHIP	100	5%	1/10W	R2124	1-216-809-11	METAL CHIP	100	5%	1/10W
						R2125	1-216-833-11	METAL CHIP	10K	5%	1/10W
						R2126	1-216-809-11	METAL CHIP	100	5%	1/10W

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Re
R2127	1-216-809-11	METAL CHIP	100	5%	1/10W	R2222	1-216-845-11	METAL CHIP	100K	5%	1/1
R2128	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2248	1-216-833-11	METAL CHIP	10K	5%	1/1
R2131	1-216-805-11	METAL CHIP	47	5%	1/10W	R2249	1-216-833-11	METAL CHIP	10K	5%	1/1
R2132	1-216-809-11	METAL CHIP	100	5%	1/10W	R2250	1-216-833-11	METAL CHIP	10K	5%	1/1
R2134	1-216-801-11	METAL CHIP	22	5%	1/10W	R2251	1-216-833-11	METAL CHIP	10K	5%	1/1
R2135	1-216-801-11	METAL CHIP	22	5%	1/10W	R2252	1-216-833-11	METAL CHIP	10K	5%	1/1
R2136	1-216-801-11	METAL CHIP	22	5%	1/10W	R2259	1-216-809-11	METAL CHIP	100	5%	1/1
R2137	1-216-809-11	METAL CHIP	100	5%	1/10W	R2260	1-216-809-11	METAL CHIP	100	5%	1/1
R2138	1-216-809-11	METAL CHIP	100	5%	1/10W	R2261	1-216-809-11	METAL CHIP	100	5%	1/1
R2139	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2262	1-216-809-11	METAL CHIP	100	5%	1/1
R2140	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2270	1-216-864-11	SHORT CHIP	0		
R2141	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2271	1-216-864-11	SHORT CHIP	0		
R2142	1-216-837-11	METAL CHIP	22K	5%	1/10W	R2274	1-216-864-11	SHORT CHIP	0		
R2143	1-216-837-11	METAL CHIP	22K	5%	1/10W	R2275	1-216-825-11	METAL CHIP	2.2K	5%	1/1
R2145	1-216-685-11	METAL CHIP	27K	0.5%	1/10W	R2276	1-216-809-11	METAL CHIP	100	5%	1/1
R2146	1-216-813-11	METAL CHIP	220	5%	1/10W	R2277	1-216-809-11	METAL CHIP	100	5%	1/1
R2147	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2281	1-216-821-11	METAL CHIP	1K	5%	1/1
R2148	1-216-809-11	METAL CHIP	100	5%	1/10W	R2282	1-216-821-11	METAL CHIP	1K	5%	1/1
R2149	1-216-809-11	METAL CHIP	100	5%	1/10W	R2283	1-216-833-11	METAL CHIP	10K	5%	1/1
R2153	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R2284	1-216-817-11	METAL CHIP	470	5%	1/1
R2154	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2285	1-216-817-11	METAL CHIP	470	5%	1/1
R2156	1-216-809-11	METAL CHIP	100	5%	1/10W	R2286	1-216-809-11	METAL CHIP	100	5%	1/1
R2159	1-216-809-11	METAL CHIP	100	5%	1/10W	R2287	1-216-801-11	METAL CHIP	22	5%	1/1
R2163	1-216-809-11	METAL CHIP	100	5%	1/10W	R2288	1-216-801-11	METAL CHIP	22	5%	1/1
R2167	1-216-809-11	METAL CHIP	100	5%	1/10W	R2289	1-216-801-11	METAL CHIP	22	5%	1/1
R2172	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R2290	1-216-801-11	METAL CHIP	22	5%	1/1
R2173	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R2291	1-216-817-11	METAL CHIP	470	5%	1/1
R2175	1-216-809-11	METAL CHIP	100	5%	1/10W	R2293	1-216-833-11	METAL CHIP	10K	5%	1/1
R2176	1-216-809-11	METAL CHIP	100	5%	1/10W	R2300	1-216-833-11	METAL CHIP	10K	5%	1/1
R2177	1-216-809-11	METAL CHIP	100	5%	1/10W	R2308	1-216-821-11	METAL CHIP	1K	5%	1/1
R2178	1-216-809-11	METAL CHIP	100	5%	1/10W	R2309	1-216-821-11	METAL CHIP	1K	5%	1/1
R2179	1-216-809-11	METAL CHIP	100	5%	1/10W	R2311	1-216-809-11	METAL CHIP	100	5%	1/1
R2180	1-216-809-11	METAL CHIP	100	5%	1/10W	R2323	1-216-809-11	METAL CHIP	100	5%	1/1
R2181	1-216-809-11	METAL CHIP	100	5%	1/10W	R2326	1-216-809-11	METAL CHIP	100	5%	1/1
R2182	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2327	1-216-825-11	METAL CHIP	2.2K	5%	1/1
R2184	1-216-833-11	METAL CHIP	10K	5%	1/10W	R2330	1-216-809-11	METAL CHIP	100	5%	1/1
R2185	1-216-864-11	SHORT CHIP	0			R2335	1-216-823-11	METAL CHIP	1.5K	5%	1/1
R2187	1-216-864-11	SHORT CHIP	0			R2336	1-216-833-11	METAL CHIP	10K	5%	1/1
R2189	1-216-864-11	SHORT CHIP	0			R2338	1-216-833-11	METAL CHIP	10K	5%	1/1
R2193	1-216-803-11	METAL CHIP	33	5%	1/10W	R2339	1-216-833-11	METAL CHIP	10K	5%	1/1
R2194	1-211-990-11	METAL CHIP	75	0.5%	1/10W	R2348	1-216-833-11	METAL CHIP	10K	5%	1/1
R2200	1-216-809-11	METAL CHIP	100	5%	1/10W	R2349	1-216-845-11	METAL CHIP	100K	5%	1/1
R2201	1-216-809-11	METAL CHIP	100	5%	1/10W	R2350	1-216-845-11	METAL CHIP	100K	5%	1/1
R2202	1-216-815-11	METAL CHIP	330	5%	1/10W	R2355	1-216-841-11	METAL CHIP	47K	5%	1/1
R2203	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2356	1-216-841-11	METAL CHIP	47K	5%	1/1
R2207	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2357	1-216-841-11	METAL CHIP	47K	5%	1/1
R2208	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2358	1-216-841-11	METAL CHIP	47K	5%	1/1
R2209	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2359	1-218-879-11	METAL CHIP	22K	0.5%	1/1
R2210	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2360	1-218-879-11	METAL CHIP	22K	0.5%	1/1
R2211	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2361	1-218-879-11	METAL CHIP	22K	0.5%	1/1
R2212	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2362	1-218-879-11	METAL CHIP	22K	0.5%	1/1
R2213	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2370	1-216-833-11	METAL CHIP	10K	5%	1/1
R2214	1-216-821-11	METAL CHIP	1K	5%	1/10W	R2376	1-216-864-11	SHORT CHIP	0		
R2215	1-216-845-11	METAL CHIP	100K	5%	1/10W	R2377	1-216-797-11	METAL CHIP	10	5%	1/1
R2216	1-216-845-11	METAL CHIP	100K	5%	1/10W	R2378	1-216-809-11	METAL CHIP	100	5%	1/1
R2217	1-216-845-11	METAL CHIP	100K	5%	1/10W	R2379	1-216-809-11	METAL CHIP	100	5%	1/1
R2218	1-216-845-11	METAL CHIP	100K	5%	1/10W	R2380	1-216-864-11	SHORT CHIP	0		
R2219	1-216-845-11	METAL CHIP	100K	5%	1/10W	R2382	1-216-809-11	METAL CHIP	100	5%	1/1
R2220	1-216-845-11	METAL CHIP	100K	5%	1/10W	R2383	1-216-864-11	SHORT CHIP	0		
R2221	1-216-845-11	METAL CHIP	100K	5%	1/10W	R2384	1-216-833-11	METAL CHIP	10K	5%	1/1

STR-DH810

Ver. 1.2

DIGITAL DISPLAY

Ref. No.	Part No.	Description				Remark	Ref. No.	Part No.	Description				Remark
R2385	1-216-825-11	METAL CHIP	2.2K	5%	1/10W		C155	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	
R2386	1-216-833-11	METAL CHIP	10K	5%	1/10W		C157	1-126-795-11	ELECT	10uF	20%	50V	
R2392	1-216-845-11	METAL CHIP	100K	5%	1/10W		C158	1-126-795-11	ELECT	10uF	20%	50V	
R2393	1-216-809-11	METAL CHIP	100	5%	1/10W								
R2395	1-216-829-11	METAL CHIP	4.7K	5%	1/10W		C172	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
							C174	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	
R2396	1-216-815-11	METAL CHIP	330	5%	1/10W		C175	1-126-795-11	ELECT	10uF	20%	50V	
R2398	1-216-864-11	SHORT CHIP	0				C176	1-126-786-11	ELECT	47uF	20%	16V	
		< COMPOSITION CIRCUIT BLOCK >					C177	1-100-597-91	CERAMIC CHIP	0.1uF	10%	25V	
RB2001	1-234-372-11	RES, NETWORK 100 (1005X4)					C180	1-126-786-11	ELECT	47uF	20%	16V	
RB2002	1-234-372-11	RES, NETWORK 100 (1005X4)					C181	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
RB2003	1-234-372-11	RES, NETWORK 100 (1005X4)					C182	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
RB2004	1-234-372-11	RES, NETWORK 100 (1005X4)							< CONNECTOR >				
RB2005	1-234-372-11	RES, NETWORK 100 (1005X4)					CN102	1-779-297-11	CONNECTOR, FFC (LIF (NON-ZIF)) 29P				
									< DIODE >				
RB2006	1-234-372-11	RES, NETWORK 100 (1005X4)					D100	8-719-049-09	DIODE 1SS367-T3SONY				
RB2007	1-234-372-11	RES, NETWORK 100 (1005X4)					D101	8-719-049-09	DIODE 1SS367-T3SONY				
RB2008	1-234-372-11	RES, NETWORK 100 (1005X4)					D102	8-719-049-09	DIODE 1SS367-T3SONY				
RB2009	1-234-372-11	RES, NETWORK 100 (1005X4)					D103	6-501-818-01	DIODE MA2J1130GLS0				
RB2010	1-234-376-11	RES, NETWORK 2.2K (1005X4)					D104	6-501-818-01	DIODE MA2J1130GLS0				
RB2011	1-234-372-11	RES, NETWORK 100 (1005X4)					D105	6-501-818-01	DIODE MA2J1130GLS0				
RB2012	1-234-372-11	RES, NETWORK 100 (1005X4)					D106	6-501-818-01	DIODE MA2J1130GLS0				
RB2013	1-234-372-11	RES, NETWORK 100 (1005X4)					D107	6-502-968-01	DI D2ZJ062MOL				
RB2015	1-234-372-11	RES, NETWORK 100 (1005X4)					D109	6-501-817-01	DIODE MA2J1110GLS0				
RB2016	1-234-371-21	RES, NETWORK 47 (1005X4)					D110	8-719-049-09	DIODE 1SS367-T3SONY (EXCEPT US)				
		< VIBRATOR >											
X2000	1-781-646-21	VIBRATOR, CERAMIC (4 MHz)					D111	8-719-049-09	DIODE 1SS367-T3SONY (EXCEPT US)				
X2001	1-814-350-11	QUARTZ CRYSTAL UNITS (24.576 MHz)							< FERRITE BEAD >				

A-1748-024-A	DISPLAY BOARD, COMPLETE						FB101	1-469-152-11	FERRITE, EMI (SMD) (2012)				
		*****							< IC >				
		< CAPACITOR >					IC101	6-600-768-01	IC PNA4823M03S0				
C105	1-126-786-11	ELECT	47uF	20%	16V		IC102	6-712-613-01	IC SI-3010KM-TLS				
C106	1-165-319-11	CERAMIC CHIP	0.1uF		50V		IC105	8-759-701-01	IC NJM2904M				
C107	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V		IC106	8-759-710-97	IC NJM4565M-D				
C108	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V				< JACK >				
C110	1-119-943-91	ELECT	47uF	20%	50V		J101	1-822-453-11	SMALL TYPE JACK (3.5MM) (AUTO CAL MIC)				
C111	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V		J103	1-819-189-11	PIN JACK 3P (VIDEO 2 IN VIDEO/L AUDIO R)				
C112	1-119-943-91	ELECT	47uF	20%	50V				< JUMPER RESISTOR >				
C113	1-114-910-91	FILM	0.0039uF	5%	250V		JR100	1-216-864-11	SHORT CHIP	0			
C120	1-128-126-11	ELECT	100uF	20%	25V		JR101	1-216-864-11	SHORT CHIP	0			
C122	1-126-796-11	ELECT	22uF	20%	50V				< COIL >				
C131	1-162-927-11	CERAMIC CHIP	100PF	5%	50V		L101	1-421-967-11	INDUCTOR	100UH			
C132	1-100-597-91	CERAMIC CHIP	0.1uF	10%	25V				< FLUORESCENT INDICATOR TUBE >				
C133	1-126-786-11	ELECT	47uF	20%	16V		ND101	1-483-118-11	VACUUM FLOURESCENT DISPLAY				
C134	1-126-795-11	ELECT	10uF	20%	50V				< TRANSISTOR >				
C138	1-115-871-11	ELECT	1uF	20%	50V		Q105	8-729-808-42	TRANSISTOR	2SD1624-T			
							Q106	8-729-808-42	TRANSISTOR	2SD1624-T			
C139	1-126-514-11	ELECT	22uF	20%	16V		Q113	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF			
C140	1-162-921-11	CERAMIC CHIP	33PF	5%	50V		Q114	6-551-693-01	TRANSISTOR	RT3T11M-TP-1			
C141	1-162-921-11	CERAMIC CHIP	33PF	5%	50V								
C142	1-126-514-11	ELECT	22uF	20%	16V								
C144	1-115-871-11	ELECT	1uF	20%	50V								
C145	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V								
C146	1-164-227-11	CERAMIC CHIP	0.022uF	10%	25V								
C150	1-100-597-91	CERAMIC CHIP	0.1uF	10%	25V								
C151	1-100-597-91	CERAMIC CHIP	0.1uF	10%	25V								
C152	1-164-733-11	CERAMIC CHIP	820PF	10%	50V								
C153	1-164-733-11	CERAMIC CHIP	820PF	10%	50V								
C154	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V								

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
		< RESISTOR >		S105	1-771-410-21	SWITCH, TACTILE (2CH/A.DIRECT)	
R101	1-216-829-11	METAL CHIP 4.7K 5%	1/10W	S106	1-771-410-21	SWITCH, TACTILE (A.F.D.)	
R102	1-216-825-11	METAL CHIP 2.2K 5%	1/10W	S107	1-771-410-21	SWITCH, TACTILE (MOVIE)	
R103	1-216-825-11	METAL CHIP 2.2K 5%	1/10W	S108	1-771-410-21	SWITCH, TACTILE (MUSIC)	
R104	1-216-821-11	METAL CHIP 1K 5%	1/10W	S109	1-771-410-21	SWITCH, TACTILE (DISPLAY)	
R105	1-216-837-11	METAL CHIP 22K 5%	1/10W	S110	1-771-410-21	SWITCH, TACTILE (DIMMER)	
R106	1-216-833-11	METAL CHIP 10K 5%	1/10W	S111	1-771-410-21	SWITCH, TACTILE (MUTING)	
R107	1-216-829-11	METAL CHIP 4.7K 5%	1/10W	S112	1-771-410-21	SWITCH, TACTILE (MEMORY/ENTER)	
R109	1-216-825-11	METAL CHIP 2.2K 5%	1/10W			< TRANSFORMER >	
R110	1-216-825-11	METAL CHIP 2.2K 5%	1/10W	T101	1-445-015-11	TRANSFORMER, DC-DC CONVERTER	
R111	1-216-838-11	METAL CHIP 27K 5%	1/10W			< LEAD >	
R113	1-216-830-11	METAL CHIP 5.6K 5%	1/10W	* TP102	1-690-880-31	LEAD (WITH CONNECTOR)	
R118	1-216-809-11	METAL CHIP 100 5%	1/10W	*****			
R120	1-218-895-11	METAL CHIP 100K 0.5%	1/10W		A-1767-378-A	DSP BOARD, COMPLETE (for SERVICE)	
R121	1-218-871-11	METAL CHIP 10K 0.5%	1/10W			*****	
R122	1-216-833-11	METAL CHIP 10K 5%	1/10W			< CAPACITOR >	
R130	1-216-809-11	METAL CHIP 100 5%	1/10W	C5002	1-165-908-11	CERAMIC CHIP 1uF 10%	10V
R131	1-216-829-11	METAL CHIP 4.7K 5%	1/10W	C5004	1-126-208-21	ELECT CHIP 47uF 20%	4V
R132	1-216-829-11	METAL CHIP 4.7K 5%	1/10W	C5005	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R133	1-216-829-11	METAL CHIP 4.7K 5%	1/10W	C5006	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R134	1-216-829-11	METAL CHIP 4.7K 5%	1/10W	C5007	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R135	1-216-841-11	METAL CHIP 47K 5%	1/10W	C5008	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R136	1-216-821-11	METAL CHIP 1K 5%	1/10W	C5009	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R137	1-216-841-11	METAL CHIP 47K 5%	1/10W	C5010	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R139	1-216-833-11	METAL CHIP 10K 5%	1/10W	C5011	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R140	1-216-841-11	METAL CHIP 47K 5%	1/10W	C5012	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R141	1-216-842-11	METAL CHIP 56K 5%	1/10W	C5013	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R142	1-218-866-11	METAL CHIP 6.2K 0.5%	1/10W	C5014	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R143	1-218-867-11	METAL CHIP 6.8K 0.5%	1/10W	C5015	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R144	1-216-821-11	METAL CHIP 1K 5%	1/10W	C5016	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R145	1-216-845-11	METAL CHIP 100K 5%	1/10W	C5017	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R146	1-216-845-11	METAL CHIP 100K 5%	1/10W	C5018	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R147	1-216-833-11	METAL CHIP 10K 5%	1/10W	C5019	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R149	1-216-833-11	METAL CHIP 10K 5%	1/10W	C5020	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R150	1-218-285-11	METAL CHIP 75 5%	1/10W	C5021	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R152	1-216-825-11	METAL CHIP 2.2K 5%	1/10W	C5022	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R153	1-216-825-11	METAL CHIP 2.2K 5%	1/10W	C5023	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R154	1-216-841-11	METAL CHIP 47K 5%	1/10W	C5024	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R155	1-216-841-11	METAL CHIP 47K 5%	1/10W	C5025	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R162	1-216-821-11	METAL CHIP 1K 5%	1/10W	C5026	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R165	1-216-833-11	METAL CHIP 10K 5%	1/10W	C5027	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R172	1-216-837-11	METAL CHIP 22K 5%	1/10W	C5028	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R180	1-249-401-11	CARBON 47 5%	1/4W	C5029	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R181	1-216-825-11	METAL CHIP 2.2K 5%	1/10W	C5030	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R182	1-216-821-11	METAL CHIP 1K 5%	1/10W	C5031	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R183	1-216-815-11	METAL CHIP 330 5%	1/10W	C5032	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R184	1-216-809-11	METAL CHIP 100 5%	1/10W	C5033	1-114-385-11	ELECT CHIP 470uF 20%	6.3V
R185	1-240-855-91	CARBON 6.2K 5%	1/4W	C5035	1-165-989-11	CERAMIC CHIP 10uF 10%	6.3V
R186	1-240-855-91	CARBON 6.2K 5%	1/4W	C5036	1-165-989-11	CERAMIC CHIP 10uF 10%	6.3V
R198	1-249-383-11	CARBON 1.5 5%	1/4W	C5037	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
R199	1-249-383-11	CARBON 1.5 5%	1/4W	C5038	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
		< ROTARY ENCODER >		C5039	1-114-385-11	ELECT CHIP 470uF 20%	6.3V
RV101	1-418-725-41	ENCODER, ROTARY (12 TYPE) (MASTER VOLUME)		C5040	1-165-989-11	CERAMIC CHIP 10uF 10%	6.3V
		< SWITCH >		C5041	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
S102	1-771-410-21	SWITCH, TACTILE (TUNING MODE)		C5042	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
S103	1-771-410-21	SWITCH, TACTILE (TUNING -)		C5043	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
S104	1-771-410-21	SWITCH, TACTILE (TUNING +)					

STR-DH810

Ver. 1.2

DSP

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
C5044	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	R5029	1-216-845-11	METAL CHIP	100K	5%	1/10W
C5045	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	R5030	1-216-821-11	METAL CHIP	1K	5%	1/10W
C5046	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	R5031	1-216-809-11	METAL CHIP	100	5%	1/10W
C5047	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	R5032	1-216-809-11	METAL CHIP	100	5%	1/10W
C5048	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	R5033	1-216-809-11	METAL CHIP	100	5%	1/10W
C5049	1-164-315-11	CERAMIC CHIP	470PF	5%	50V	R5034	1-216-809-11	METAL CHIP	100	5%	1/10W
C5050	1-164-315-11	CERAMIC CHIP	470PF	5%	50V	R5035	1-216-809-11	METAL CHIP	100	5%	1/10W
C5051	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V	R5039	1-216-801-11	METAL CHIP	22	5%	1/10W
C5052	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V	R5041	1-216-801-11	METAL CHIP	22	5%	1/10W
C5053	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	R5042	1-216-801-11	METAL CHIP	22	5%	1/10W
C5054	1-165-989-11	CERAMIC CHIP	10uF	10%	6.3V	R5043	1-216-801-11	METAL CHIP	22	5%	1/10W
C5055	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	R5044	1-216-801-11	METAL CHIP	22	5%	1/10W
C5056	1-165-989-11	CERAMIC CHIP	10uF	10%	6.3V	R5045	1-216-801-11	METAL CHIP	22	5%	1/10W
C5057	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	R5046	1-216-801-11	METAL CHIP	22	5%	1/10W
C5058	1-114-385-11	ELECT CHIP	470uF	20%	6.3V	R5047	1-216-801-11	METAL CHIP	22	5%	1/10W
C5059	1-165-989-11	CERAMIC CHIP	10uF	10%	6.3V	R5048	1-216-801-11	METAL CHIP	22	5%	1/10W
		< CONNECTOR >									
CN5001	1-815-136-21	CONNECTOR, BOARD TO BOARD									
CN5002	1-785-125-21	CONNECTOR 6P									
CN5003	1-784-254-11	CONNECTOR 10P									
		< EARTH TERMINAL >									
* ET001	1-780-408-11	TERMINAL, LUG									
		< FERRITE BEAD >									
FB5001	1-400-862-11	BEAD, FERRITE									
		< FILTER >									
FL5003	1-400-874-11	FILTER, EMI REMOVAL (SMD)									
FL5004	1-400-874-11	FILTER, EMI REMOVAL (SMD)									
		< IC >									
IC5001	6-714-011-01	IC D788E002BRFP266									
IC5002	6-713-754-01	IC W9864G8H-6J-ER10									
IC5003	A-1748-042-A	IC SST25VF016B-75-4I-S2AF (for SERVICE)									
IC5004	6-712-613-01	IC SI-3010KM-TLS									
		< RESISTOR >									
R5002	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W	R5386	1-216-864-11	SHORT CHIP	0		
R5003	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R5387	1-216-864-11	SHORT CHIP	0		
R5004	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R5388	1-218-946-11	METAL CHIP	270	5%	1/16W
R5005	1-218-837-11	METAL CHIP	390	0.5%	1/10W	R5389	1-218-946-11	METAL CHIP	270	5%	1/16W
R5008	1-216-864-11	SHORT CHIP	0			R5390	1-218-946-11	METAL CHIP	270	5%	1/16W
R5009	1-216-857-11	METAL CHIP	1M	5%	1/10W	R5391	1-218-946-11	METAL CHIP	270	5%	1/16W
R5012	1-216-801-11	METAL CHIP	22	5%	1/10W	R5392	1-218-946-11	METAL CHIP	270	5%	1/16W
R5013	1-216-801-11	METAL CHIP	22	5%	1/10W	R5393	1-218-946-11	METAL CHIP	270	5%	1/16W
R5014	1-216-801-11	METAL CHIP	22	5%	1/10W	R5394	1-218-946-11	METAL CHIP	270	5%	1/16W
R5015	1-216-801-11	METAL CHIP	22	5%	1/10W	R5395	1-218-946-11	METAL CHIP	270	5%	1/16W
R5016	1-216-801-11	METAL CHIP	22	5%	1/10W	R5396	1-218-946-11	METAL CHIP	270	5%	1/16W
R5017	1-216-801-11	METAL CHIP	22	5%	1/10W	R5397	1-218-946-11	METAL CHIP	270	5%	1/16W
R5018	1-216-809-11	METAL CHIP	100	5%	1/10W	R5398	1-218-946-11	METAL CHIP	270	5%	1/16W
R5020	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5399	1-218-946-11	METAL CHIP	270	5%	1/16W
R5022	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5400	1-218-946-11	METAL CHIP	270	5%	1/16W
R5023	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5401	1-218-946-11	METAL CHIP	270	5%	1/16W
R5024	1-216-801-11	METAL CHIP	22	5%	1/10W	R5402	1-218-946-11	METAL CHIP	270	5%	1/16W
R5025	1-216-801-11	METAL CHIP	22	5%	1/10W	R5403	1-218-946-11	METAL CHIP	270	5%	1/16W
R5026	1-216-833-11	METAL CHIP	10K	5%	1/10W	R5404	1-218-946-11	METAL CHIP	270	5%	1/16W
R5028	1-216-801-11	METAL CHIP	22	5%	1/10W	R5405	1-218-946-11	METAL CHIP	270	5%	1/16W

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Re		
R5406	1-218-946-11	METAL CHIP	270	5%	1/16W	C3233	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
R5407	1-218-946-11	METAL CHIP	270	5%	1/16W						
R5408	1-218-946-11	METAL CHIP	270	5%	1/16W	C3234	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
R5409	1-216-833-11	METAL CHIP	10K	5%	1/10W	C3235	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
R5410	1-216-833-11	METAL CHIP	10K	5%	1/10W	C3236	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
						C3237	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
R5411	1-216-833-11	METAL CHIP	10K	5%	1/10W	C3238	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
R5414	1-216-833-11	METAL CHIP	10K	5%	1/10W						
< COMPOSITION CIRCUIT BLOCK >						C3239	1-165-708-11	ELECT CHIP	47uF	20%	6.3V
						C3240	1-165-708-11	ELECT CHIP	47uF	20%	6.3V
RB5001	1-200-051-21	RES, NETWORK 150 (1005X4)				C3241	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
RB5002	1-200-051-21	RES, NETWORK 150 (1005X4)				C3242	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
RB5003	1-200-051-21	RES, NETWORK 150 (1005X4)				C3402	1-124-779-00	ELECT CHIP	10uF	20%	16V
RB5004	1-200-051-21	RES, NETWORK 150 (1005X4)									
< VIBRATOR >						C3403	1-165-492-21	ELECT CHIP	100uF	20%	10V
X5001	1-814-271-11	QUARTS CRYSTAL UNIT (25 MHz)				C3481	1-112-717-91	CERAMIC CHIP	1uF	10%	6.3V
*****						C3483	1-112-717-91	CERAMIC CHIP	1uF	10%	6.3V
						C3500	1-100-354-21	ELECT CHIP	220uF	20%	6.3V
						C3501	1-165-708-11	ELECT CHIP	47uF	20%	6.3V
	A-1772-453-A	D-VIDEO BOARD, COMPLETE (for SERVICE)				C3523	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
		*****				C3524	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
						C3525	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
						C3526	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
						C3527	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
						C3528	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3000	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3529	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3001	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3530	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3002	1-165-708-11	ELECT CHIP	47uF	20%	6.3V	C3531	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3003	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3532	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3004	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V						
						C3533	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3005	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3534	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3006	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3535	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3201	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3536	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3202	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3537	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3203	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V						
						C3538	1-164-852-11	CERAMIC CHIP	12PF	5%	50V
C3204	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3539	1-164-866-11	CERAMIC CHIP	47PF	5%	50V
C3205	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3540	1-164-850-11	CERAMIC CHIP	10PF	0.5PF	50V
C3206	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3541	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3207	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3542	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3208	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V						
						C3543	1-164-866-11	CERAMIC CHIP	47PF	5%	50V
C3209	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3547	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3210	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3549	1-112-746-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3211	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3550	1-112-746-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3212	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3551	1-112-746-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3213	1-100-567-81	CERAMIC CHIP	0.01uF	10%	25V						
						C3552	1-112-746-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3214	1-100-899-81	CERAMIC CHIP	0.082uF	10%	10V	C3555	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3215	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3556	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3216	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3557	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3217	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3558	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3218	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V						
						C3559	1-164-850-11	CERAMIC CHIP	10PF	0.5PF	50V
C3219	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3561	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3220	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3562	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3221	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3563	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3222	1-112-717-91	CERAMIC CHIP	1uF	10%	6.3V	C3564	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3223	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V						
						C3566	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3224	1-165-708-11	ELECT CHIP	47uF	20%	6.3V	C3567	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3225	1-165-708-11	ELECT CHIP	47uF	20%	6.3V	C3568	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3226	1-165-708-11	ELECT CHIP	47uF	20%	6.3V	C3569	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3227	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3570	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C3228	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V						
						C3571	1-165-708-11	ELECT CHIP	47uF	20%	6.3V
C3229	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3572	1-165-708-11	ELECT CHIP	47uF	20%	6.3V
C3230	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3573	1-165-708-11	ELECT CHIP	47uF	20%	6.3V
C3231	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C3574	1-165-492-21	ELECT CHIP	100uF	20%	10V
C3232	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V						

STR-DH810

Ver. 1.2

D-VIDEO

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C3575	1-165-492-21	ELECT CHIP	100uF 20% 10V	D3516	6-502-398-01	DI SA10QA04	
C3578	1-164-935-11	CERAMIC CHIP	470PF 10% 50V			< EARTH TERMINAL >	
C3580	1-164-935-11	CERAMIC CHIP	470PF 10% 50V	* ET3500	1-780-408-11	TERMINAL, LUG	
C3583	1-112-717-91	CERAMIC CHIP	1uF 10% 6.3V	* ET3504	1-780-408-11	TERMINAL, LUG	
C3584	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V			< FERRITE BEAD >	
C3585	1-112-717-91	CERAMIC CHIP	1uF 10% 6.3V	FB3000	1-469-152-11	FERRITE, EMI (SMD) (2012)	
C3590	1-112-717-91	CERAMIC CHIP	1uF 10% 6.3V	FB3201	1-400-862-11	BEAD, FERRITE	
C3591	1-112-717-91	CERAMIC CHIP	1uF 10% 6.3V	FB3202	1-400-862-11	BEAD, FERRITE	
C3592	1-112-717-91	CERAMIC CHIP	1uF 10% 6.3V	FB3203	1-400-862-11	BEAD, FERRITE	
C3593	1-112-717-91	CERAMIC CHIP	1uF 10% 6.3V	FB3204	1-400-862-11	BEAD, FERRITE	
C3594	1-112-717-91	CERAMIC CHIP	1uF 10% 6.3V				
C3595	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	FB3205	1-216-295-91	SHORT CHIP 0	
C3596	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	FB3211	1-216-864-11	SHORT CHIP 0	
C3597	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	FB3423	1-216-864-11	SHORT CHIP 0	
C3598	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	FB3502	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3599	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	FB3503	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3600	1-112-746-11	CERAMIC CHIP	4.7uF 10% 6.3V	* FB3504	1-400-973-21	INDUCTOR (EMI FERRITE)	
C3601	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	FB3505	1-400-862-11	BEAD, FERRITE	
C3602	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	FB3507	1-469-139-21	FERRITE, EMI (SMD) (2012)	
C3603	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	FB3510	1-400-862-11	BEAD, FERRITE	
C3643	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	FB3512	1-469-139-21	FERRITE, EMI (SMD) (2012)	
C3646	1-112-717-91	CERAMIC CHIP	1uF 10% 6.3V	FB3513	1-469-152-11	FERRITE, EMI (SMD) (2012)	
C3716	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	FB3514	1-400-862-11	BEAD, FERRITE	
C3749	1-165-708-11	ELECT CHIP	47uF 20% 6.3V	FB3558	1-469-139-21	FERRITE, EMI (SMD) (2012)	
C3781	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V			< COIL >	
C3805	1-112-717-91	CERAMIC CHIP	1uF 10% 6.3V	* FL3501	1-457-685-11	COMMON MODE CHOKE COIL	
C3806	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	* FL3502	1-457-685-11	COMMON MODE CHOKE COIL	
C3818	1-112-717-91	CERAMIC CHIP	1uF 10% 6.3V			< IC >	
C3819	1-112-717-91	CERAMIC CHIP	1uF 10% 6.3V	IC3000	A-1772-454-A	IC R5F3640DDFBR-128 (for SERVICE)	
C3820	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	IC3201	(Not supplied)	IC ADV7180BSTZ-REEL	
C3853	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	IC3202	(Not supplied)	IC ABT1012LQ100	
C3872	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	IC3203	6-711-239-01	IC NJM2878F3-18 (TE2)	
C3996	1-165-492-21	ELECT CHIP	100uF 20% 10V	IC3500	(Not Supplied)	IC SII9233ACTU	
C3997	1-165-708-11	ELECT CHIP	47uF 20% 6.3V	IC3501	(Not Supplied)	IC SII9134CTU	
C3998	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	IC3515	6-706-838-01	IC MM1661JHBE	
		< CONNECTOR >		IC3516	6-711-116-01	IC NJM2878F3-05 (TE2)	
CN3000	1-784-859-51	CONNECTOR, FFC (LIF (NON-ZIF)) 7P		IC3517	6-708-913-01	IC TK73400AU3GOL-C	
CN3200	1-779-992-11	PIN, CONNECTOR (PWB) 8P		IC3519	6-714-020-01	IC TK63812AMHGH-L-C	
CN3500	1-820-735-31	HDMI CONNECTOR		IC3520	6-706-838-01	IC MM1661JHBE	
		(HDMI ASSIGNABLE (INPUT ONLY) TV OUT)		IC3521	6-711-116-01	IC NJM2878F3-05 (TE2)	
CN3501	1-820-735-31	HDMI CONNECTOR		IC3522	8-759-698-31	IC TC7WH74FK (TE85R)	
		(HDMI ASSIGNABLE (INPUT ONLY) IN 1)		IC3524	6-707-879-01	IC TC74VHC541FT (EKJ)	
CN3502	1-820-735-31	HDMI CONNECTOR		IC3531	6-709-888-01	IC TC7WHU04FK (T5RSOYF)	
		(HDMI ASSIGNABLE (INPUT ONLY) IN 2)		IC3801	6-709-888-01	IC TC7WHU04FK (T5RSOYF)	
CN3503	1-820-735-31	HDMI CONNECTOR				< COIL >	
		(HDMI ASSIGNABLE (INPUT ONLY) IN 3)		L3501	1-469-525-91	INDUCTOR 10UH	
CN3504	1-820-735-31	HDMI CONNECTOR		L3505	1-469-525-91	INDUCTOR 10UH	
		(HDMI ASSIGNABLE (INPUT ONLY) IN 4)		L3506	1-469-525-91	INDUCTOR 10UH	
CN3510	1-779-993-11	PIN, CONNECTOR (PWB) 5P		L3507	1-469-525-91	INDUCTOR 10UH	
CN3512	1-820-117-51	CONNECTOR, FFC/FPC 19P		L3508	1-469-525-91	INDUCTOR 10UH	
		< DIODE >		L3509	1-469-525-91	INDUCTOR 10UH	
D3201	6-502-398-01	DI SA10QA04		L3510	1-469-525-91	INDUCTOR 10UH	
D3202	6-502-398-01	DI SA10QA04		L3617	1-469-525-91	INDUCTOR 10UH	
D3502	8-719-049-09	DIODE 1SS367-T3SONY					
D3511	6-502-398-01	DI SA10QA04					
D3512	8-719-049-09	DIODE 1SS367-T3SONY					
D3513	6-502-398-01	DI SA10QA04					
D3514	6-502-398-01	DI SA10QA04					
D3515	6-502-398-01	DI SA10QA04					

Note: IC3201, IC3202, IC3500 and IC3501 cannot exchange with single.
When these parts are damaged, exchange the entire mounted board.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
		< RESISTOR >					
				R3233	1-218-961-11	METAL CHIP	4.7K 5% 1/16W
R3001	1-218-937-11	METAL CHIP	47 5% 1/16W	R3234	1-218-961-11	METAL CHIP	4.7K 5% 1/16W
R3002	1-218-949-11	METAL CHIP	470 5% 1/16W	R3235	1-218-933-11	METAL CHIP	22 5% 1/16W
R3003	1-218-990-81	SHORT CHIP	0 5% 1/16W	R3236	1-218-933-11	METAL CHIP	22 5% 1/16W
R3004	1-218-965-11	METAL CHIP	10K 5% 1/16W	R3237	1-218-933-11	METAL CHIP	22 5% 1/16W
R3005	1-218-965-11	METAL CHIP	10K 5% 1/16W	R3238	1-218-965-11	METAL CHIP	10K 5% 1/16W
				R3239	1-218-933-11	METAL CHIP	22 5% 1/16W
R3006	1-218-959-11	METAL CHIP	3.3K 5% 1/16W	R3240	1-218-933-11	METAL CHIP	22 5% 1/16W
R3007	1-218-937-11	METAL CHIP	47 5% 1/16W	R3241	1-208-695-11	METAL CHIP	3.3K 0.5% 1/16W
R3008	1-218-973-11	METAL CHIP	47K 5% 1/16W	R3242	1-208-695-11	METAL CHIP	3.3K 0.5% 1/16W
R3009	1-218-957-11	METAL CHIP	2.2K 5% 1/16W	R3243	1-208-695-11	METAL CHIP	3.3K 0.5% 1/16W
R3010	1-218-937-11	METAL CHIP	47 5% 1/16W				
				R3244	1-208-695-11	METAL CHIP	3.3K 0.5% 1/16W
R3011	1-218-957-11	METAL CHIP	2.2K 5% 1/16W	R3245	1-218-989-11	METAL CHIP	1M 5% 1/16W
R3012	1-218-937-11	METAL CHIP	47 5% 1/16W	R3246	1-218-990-81	SHORT CHIP	0 5% 1/16W
R3013	1-218-933-11	METAL CHIP	22 5% 1/16W	R3247	1-218-961-11	METAL CHIP	4.7K 5% 1/16W
R3014	1-218-933-11	METAL CHIP	22 5% 1/16W	R3248	1-218-961-11	METAL CHIP	4.7K 5% 1/16W
R3016	1-218-965-11	METAL CHIP	10K 5% 1/16W				
				R3249	1-218-961-11	METAL CHIP	4.7K 5% 1/16W
R3018	1-218-937-11	METAL CHIP	47 5% 1/16W	R3250	1-218-961-11	METAL CHIP	4.7K 5% 1/16W
R3019	1-218-965-11	METAL CHIP	10K 5% 1/16W	R3251	1-218-961-11	METAL CHIP	4.7K 5% 1/16W
R3021	1-218-937-11	METAL CHIP	47 5% 1/16W	R3252	1-218-941-81	METAL CHIP	100 5% 1/16W
R3022	1-218-965-11	METAL CHIP	10K 5% 1/16W	R3265	1-218-953-11	METAL CHIP	1K 5% 1/16W
R3026	1-218-965-11	METAL CHIP	10K 5% 1/16W				
				R3296	1-218-933-11	METAL CHIP	22 5% 1/16W
R3027	1-218-937-11	METAL CHIP	47 5% 1/16W	R3300	1-218-973-11	METAL CHIP	47K 5% 1/16W
R3028	1-218-990-81	SHORT CHIP	0 5% 1/16W	R3301	1-218-937-11	METAL CHIP	47 5% 1/16W
R3029	1-218-965-11	METAL CHIP	10K 5% 1/16W	R3302	1-218-937-11	METAL CHIP	47 5% 1/16W
R3030	1-218-937-11	METAL CHIP	47 5% 1/16W	R3331	1-218-965-11	METAL CHIP	10K 5% 1/16W
R3031	1-218-937-11	METAL CHIP	47 5% 1/16W				
				R3404	1-218-990-81	SHORT CHIP	0 5% 1/16W
R3032	1-218-937-11	METAL CHIP	47 5% 1/16W	R3405	1-218-929-11	METAL CHIP	10 5% 1/16W
R3037	1-218-965-11	METAL CHIP	10K 5% 1/16W	R3406	1-218-929-11	METAL CHIP	10 5% 1/16W
R3038	1-218-937-11	METAL CHIP	47 5% 1/16W	R3407	1-218-929-11	METAL CHIP	10 5% 1/16W
R3201	1-208-860-81	METAL CHIP	75 0.5% 1/16W	R3408	1-218-929-11	METAL CHIP	10 5% 1/16W
R3202	1-208-860-81	METAL CHIP	75 0.5% 1/16W				
				R3409	1-218-929-11	METAL CHIP	10 5% 1/16W
R3203	1-208-663-11	METAL CHIP	150 0.5% 1/16W	R3410	1-218-929-11	METAL CHIP	10 5% 1/16W
R3204	1-208-860-81	METAL CHIP	75 0.5% 1/16W	R3411	1-218-929-11	METAL CHIP	10 5% 1/16W
R3205	1-208-860-81	METAL CHIP	75 0.5% 1/16W	R3412	1-218-953-11	METAL CHIP	1K 5% 1/16W
R3206	1-208-860-81	METAL CHIP	75 0.5% 1/16W	R3511	1-218-953-11	METAL CHIP	1K 5% 1/16W
R3207	1-208-860-81	METAL CHIP	75 0.5% 1/16W				
				R3514	1-218-973-11	METAL CHIP	47K 5% 1/16W
R3208	1-208-663-11	METAL CHIP	150 0.5% 1/16W	R3521	1-218-941-81	METAL CHIP	100 5% 1/16W
R3209	1-208-695-11	METAL CHIP	3.3K 0.5% 1/16W	R3522	1-218-941-81	METAL CHIP	100 5% 1/16W
R3210	1-208-695-11	METAL CHIP	3.3K 0.5% 1/16W	R3530	1-218-933-11	METAL CHIP	22 5% 1/16W
R3211	1-218-935-11	METAL CHIP	33 5% 1/16W	R3531	1-218-933-11	METAL CHIP	22 5% 1/16W
R3212	1-218-935-11	METAL CHIP	33 5% 1/16W				
				R3536	1-218-933-11	METAL CHIP	22 5% 1/16W
R3213	1-218-941-81	METAL CHIP	100 5% 1/16W	R3540	1-218-933-11	METAL CHIP	22 5% 1/16W
R3214	1-218-935-11	METAL CHIP	33 5% 1/16W	R3544	1-218-929-11	METAL CHIP	10 5% 1/16W
R3215	1-218-933-11	METAL CHIP	22 5% 1/16W	R3545	1-218-941-81	METAL CHIP	100 5% 1/16W
R3217	1-218-933-11	METAL CHIP	22 5% 1/16W	R3546	1-218-989-11	METAL CHIP	1M 5% 1/16W
R3218	1-218-933-11	METAL CHIP	22 5% 1/16W				
				R3548	1-216-805-11	METAL CHIP	47 5% 1/16W
R3219	1-218-933-11	METAL CHIP	22 5% 1/16W	R3554	1-216-805-11	METAL CHIP	47 5% 1/16W
R3220	1-218-933-11	METAL CHIP	22 5% 1/16W	R3556	1-216-813-11	METAL CHIP	220 5% 1/16W
R3221	1-216-864-11	SHORT CHIP	0 5% 1/16W	R3557	1-216-813-11	METAL CHIP	220 5% 1/16W
R3222	1-218-941-81	METAL CHIP	100 5% 1/16W	R3563	1-218-941-81	METAL CHIP	100 5% 1/16W
R3223	1-218-935-11	METAL CHIP	33 5% 1/16W				
				R3564	1-216-797-11	METAL CHIP	10 5% 1/16W
R3224	1-218-935-11	METAL CHIP	33 5% 1/16W	R3565	1-218-929-11	METAL CHIP	10 5% 1/16W
R3225	1-218-933-11	METAL CHIP	22 5% 1/16W	R3566	1-218-929-11	METAL CHIP	10K 5% 1/16W
R3226	1-218-973-11	METAL CHIP	47K 5% 1/16W	R3567	1-218-929-11	METAL CHIP	10 5% 1/16W
R3227	1-218-933-11	METAL CHIP	22 5% 1/16W	R3569	1-218-945-11	METAL CHIP	220 5% 1/16W
R3228	1-218-933-11	METAL CHIP	22 5% 1/16W				
				R3570	1-218-949-11	METAL CHIP	470 5% 1/16W
R3229	1-218-933-11	METAL CHIP	22 5% 1/16W	R3574	1-218-941-81	METAL CHIP	100 5% 1/16W
R3230	1-218-933-11	METAL CHIP	22 5% 1/16W	R3575	1-218-941-81	METAL CHIP	100 5% 1/16W
R3231	1-218-961-11	METAL CHIP	4.7K 5% 1/16W	R3576	1-218-929-11	METAL CHIP	10 5% 1/16W
R3232	1-218-933-11	METAL CHIP	22 5% 1/16W				

STR-DH810

Ver. 1.2

D-VIDEO HEADPHONE MAIN

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
R3577	1-218-929-11	METAL CHIP	10	5%	1/16W	RB3512	1-234-400-21	CONDUCTOR, NETWORK (1005X4)			
R3578	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	RB3513	1-234-400-21	CONDUCTOR, NETWORK (1005X4)			
R3579	1-218-973-11	METAL CHIP	47K	5%	1/16W	RB3514	1-234-369-21	RES, NETWORK 10 (1005X4)			
R3580	1-208-883-81	METAL CHIP	680	0.5%	1/16W	RB3515	1-234-369-21	RES, NETWORK 10 (1005X4)			
R3581	1-218-941-81	METAL CHIP	100	5%	1/16W	RB3516	1-234-369-21	RES, NETWORK 10 (1005X4)			
R3582	1-220-876-81	METAL CHIP	18	0.5%	1/16W	RB3517	1-234-369-21	RES, NETWORK 10 (1005X4)			
R3583	1-218-929-11	METAL CHIP	10	5%	1/16W	RB3518	1-234-373-21	RES, NETWORK 220 (1005X4)			
R3584	1-218-929-11	METAL CHIP	10	5%	1/16W	RB3519	1-234-371-21	RES, NETWORK 47 (1005X4)			
R3585	1-218-973-11	METAL CHIP	47K	5%	1/16W						
R3593	1-218-965-11	METAL CHIP	10K	5%	1/16W			< VIBRATOR >			
R3594	1-218-973-11	METAL CHIP	47K	5%	1/16W						
R3597	1-218-990-81	SHORT CHIP	0			X3000	1-795-244-11	VIBRATOR, CERAMIC (10 MHz)			
R3599	1-218-956-11	METAL CHIP	1.8K	5%	1/16W	X3501	1-814-023-11	QUARTS CRYSTAL UNIT (27 MHz)			
R3600	1-218-956-11	METAL CHIP	1.8K	5%	1/16W	X3502	1-814-372-11	QUARTZ CRYSTAL UNIT (28.63636 MHz)			
R3634	1-218-939-11	METAL CHIP	68	5%	1/16W	*****					
R3656	1-218-933-11	METAL CHIP	22	5%	1/16W			HEADPHONE BOARD			

R3657	1-218-933-11	METAL CHIP	22	5%	1/16W			< CAPACITOR >			
R3658	1-218-953-11	METAL CHIP	1K	5%	1/16W						
R3673	1-218-939-11	METAL CHIP	68	5%	1/16W						
R3676	1-218-990-81	SHORT CHIP	0			C301	1-100-597-91	CERAMIC CHIP 0.1uF	10%	25V (US)	
R3678	1-218-949-11	METAL CHIP	470	5%	1/16W	C302	1-162-962-11	CERAMIC CHIP 470PF	10%	50V	
						C303	1-162-962-11	CERAMIC CHIP 470PF	10%	50V	
R3680	1-218-965-11	METAL CHIP	10K	5%	1/16W			< CONNECTOR >			
R3681	1-218-937-11	METAL CHIP	47	5%	1/16W						
R3684	1-218-981-91	METAL CHIP	220K	5%	1/16W						
R3697	1-469-139-21	FERRITE, EMI (SMD) (2012)				* CNP300	1-564-507-11	PLUG, CONNECTOR 4P			
R3741	1-218-953-11	METAL CHIP	1K	5%	1/16W			< DIODE >			
R3759	1-218-953-11	METAL CHIP	1K	5%	1/16W						
R3800	1-218-933-11	METAL CHIP	22	5%	1/16W	D300	8-719-049-09	DIODE 1SS367-T3SONY (EXCEPT US)			
R3913	1-218-937-11	METAL CHIP	47	5%	1/16W	D301	8-719-049-09	DIODE 1SS367-T3SONY (EXCEPT US)			
R3914	1-218-937-11	METAL CHIP	47	5%	1/16W			< JACK >			
R3915	1-218-941-81	METAL CHIP	100	5%	1/16W						
R3940	1-219-600-11	METAL CHIP	56K	0.5%	1/16W	J300	1-822-967-12	JACK (PHONES)			
R3941	1-208-923-11	METAL CHIP	33K	0.5%	1/16W			< RESISTOR >			
R3990	1-216-805-11	METAL CHIP	47	5%	1/10W						
R3992	1-218-961-11	METAL CHIP	4.7K	5%	1/16W						
R3993	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	R300	1-216-789-11	METAL CHIP 2.2	5%	1/10W (US)	
R3994	1-208-943-11	METAL CHIP	220K	0.5%	1/16W			< LEAD >			
R3996	1-208-947-11	METAL CHIP	330K	0.5%	1/16W						
R3999	1-216-295-91	SHORT CHIP	0			* TP300	1-690-880-31	LEAD (WITH CONNECTOR)			
		< COMPOSITION CIRCUIT BLOCK >				*****					
RB3201	1-234-370-21	RES, NETWORK 22 (1005X4)				A-1748-003-A	MAIN BOARD, COMPLETE (US)				
RB3202	1-234-370-21	RES, NETWORK 22 (1005X4)				A-1748-060-A	MAIN BOARD, COMPLETE (EXCEPT US)				
RB3205	1-234-400-21	CONDUCTOR, NETWORK (1005X4)				*****					
RB3206	1-234-400-21	CONDUCTOR, NETWORK (1005X4)									
RB3207	1-234-400-21	CONDUCTOR, NETWORK (1005X4)				7-685-646-71	SCREW +BVTP 3X8 TYPE2 IT-3				
RB3208	1-234-400-21	CONDUCTOR, NETWORK (1005X4)						< CAPACITOR >			
RB3212	1-234-377-21	RES, NETWORK 4.7K (1005X4)				C320	1-126-923-91	ELECT 220uF	20%	10V	
RB3213	1-234-370-21	RES, NETWORK 22 (1005X4)				C323	1-126-923-91	ELECT 220uF	20%	10V	
RB3214	1-234-377-21	RES, NETWORK 4.7K (1005X4)				C325	1-126-964-11	ELECT 10uF	20%	50V	
RB3501	1-242-963-21	RES, NETWORK 33 (1005X4)				C350	1-137-980-91	CERAMIC CHIP 0.47uF	10%	50V	
RB3502	1-234-371-21	RES, NETWORK 47 (1005X4)				C351	1-112-083-11	ELECT 100uF	20%	16V	
RB3503	1-234-371-21	RES, NETWORK 47 (1005X4)				C352	1-137-980-91	CERAMIC CHIP 0.47uF	10%	50V	
RB3505	1-234-371-21	RES, NETWORK 47 (1005X4)				C353	1-112-083-11	ELECT 100uF	20%	16V	
RB3506	1-234-370-21	RES, NETWORK 22 (1005X4)				C400	1-162-966-11	CERAMIC CHIP 0.0022uF	10%	50V	
RB3507	1-242-963-21	RES, NETWORK 33 (1005X4)				C403	1-162-966-11	CERAMIC CHIP 0.0022uF	10%	50V	
						C405	1-162-966-11	CERAMIC CHIP 0.0022uF	10%	50V	
RB3508	1-234-370-21	RES, NETWORK 22 (1005X4)				C408	1-126-963-11	ELECT 4.7uF	20%	50V	
RB3509	1-234-370-21	RES, NETWORK 22 (1005X4)				C409	1-126-963-11	ELECT 4.7uF	20%	50V	
RB3510	1-234-400-21	CONDUCTOR, NETWORK (1005X4)									
RB3511	1-234-400-21	CONDUCTOR, NETWORK (1005X4)									

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Re
C449	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C758	1-114-989-81	CERAMIC	47PF	5%	1KV
C450	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C759	1-114-989-81	CERAMIC	47PF	5%	1KV
C458	1-126-963-11	ELECT	4.7uF	20%	50V	C760	1-112-100-11	ELECT	10uF	20%	50V
C459	1-126-963-11	ELECT	4.7uF	20%	50V	C761	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
C471	1-126-964-11	ELECT	10uF	20%	50V	C762	1-112-079-11	ELECT	220uF	20%	10V
C488	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V	C770	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C489	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C779	1-136-157-00	FILM	0.022uF	5%	50V
C499	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C802	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C545	1-126-947-11	ELECT	47uF	20%	35V	C803	1-109-879-11	CERAMIC	22PF	5%	2KV
C546	1-126-964-11	ELECT	10uF	20%	50V	C805	1-116-177-21	CERAMIC	3PF		1KV
C547	1-126-964-11	ELECT	10uF	20%	50V	C807	1-112-089-11	ELECT	47uF	20%	25V
C548	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V	C808	1-114-989-81	CERAMIC	47PF	5%	1KV
C550	1-136-157-00	FILM	0.022uF	5%	50V	C809	1-114-989-81	CERAMIC	47PF	5%	1KV
C551	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	C810	1-112-100-11	ELECT	10uF	20%	50V
C552	1-114-989-81	CERAMIC	47PF	5%	1KV	C811	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
C553	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C812	1-112-079-11	ELECT	220uF	20%	10V
C554	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C820	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C555	1-112-100-11	ELECT	10uF	20%	50V	C829	1-136-157-00	FILM	0.022uF	5%	50V
C557	1-112-079-11	ELECT	220uF	20%	10V	C852	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C558	1-112-089-11	ELECT	47uF	20%	25V	C853	1-109-879-11	CERAMIC	22PF	5%	2KV
C559	1-116-177-21	CERAMIC	3PF		1KV	C855	1-116-177-21	CERAMIC	3PF		1KV
C560	1-109-879-11	CERAMIC	22PF	5%	2KV	C857	1-112-089-11	ELECT	47uF	20%	25V
C561	1-114-989-81	CERAMIC	47PF	5%	1KV	C858	1-114-989-81	CERAMIC	47PF	5%	1KV
C602	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C859	1-114-989-81	CERAMIC	47PF	5%	1KV
C603	1-109-879-11	CERAMIC	22PF	5%	2KV	C860	1-112-100-11	ELECT	10uF	20%	50V
C605	1-116-177-21	CERAMIC	3PF		1KV	C861	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
C607	1-112-089-11	ELECT	47uF	20%	25V	C862	1-112-079-11	ELECT	220uF	20%	10V
C608	1-114-989-81	CERAMIC	47PF	5%	1KV	C870	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C609	1-114-989-81	CERAMIC	47PF	5%	1KV	C879	1-136-157-00	FILM	0.022uF	5%	50V
C610	1-112-100-11	ELECT	10uF	20%	50V	C910	1-104-329-11	CERAMIC CHIP	0.1uF	10%	50V
C611	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	C911	1-104-329-11	CERAMIC CHIP	0.1uF	10%	50V
C612	1-112-079-11	ELECT	220uF	20%	10V	C912	1-112-093-11	ELECT	2200uF	20%	25V
C620	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C912	1-126-943-11	ELECT	2200uF	20%	25V
C629	1-136-157-00	FILM	0.022uF	5%	50V	C913	1-112-092-11	ELECT	1000uF	20%	25V
C652	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C913	1-126-942-61	ELECT	1000uF	20%	25V
C653	1-109-879-11	CERAMIC	22PF	5%	2KV	C914	1-137-958-91	MYLAR	0.22uF	5%	100V
C655	1-116-177-21	CERAMIC	3PF		1KV	C915	1-137-958-91	MYLAR	0.22uF	5%	100V
C657	1-112-089-11	ELECT	47uF	20%	25V	C922	1-109-932-15	ELECT (BLOCK)	10000uF	20%	71V
C658	1-114-989-81	CERAMIC	47PF	5%	1KV	C923	1-109-932-15	ELECT (BLOCK)	10000uF	20%	71V
C659	1-114-989-81	CERAMIC	47PF	5%	1KV	C932	1-112-111-11	ELECT	100uF	20%	10V
C660	1-112-100-11	ELECT	10uF	20%	50V	C933	1-112-111-11	ELECT	100uF	20%	10V
C661	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	CC01	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C662	1-112-079-11	ELECT	220uF	20%	10V	CC02	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C670	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	CC03	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C679	1-136-157-00	FILM	0.022uF	5%	50V	CC04	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C702	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	CC05	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C703	1-109-879-11	CERAMIC	22PF	5%	2KV	CC08	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C705	1-116-177-21	CERAMIC	3PF		1KV	CC09	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C707	1-112-089-11	ELECT	47uF	20%	25V	CC11	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C708	1-114-989-81	CERAMIC	47PF	5%	1KV						(EXCE
C709	1-114-989-81	CERAMIC	47PF	5%	1KV						(EXCE
C710	1-112-100-11	ELECT	10uF	20%	50V						(EXCE
C711	1-162-960-11	CERAMIC CHIP	220PF	10%	50V						(EXCE
C712	1-112-079-11	ELECT	220uF	20%	10V						(EXCE
C720	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V						(EXCE
C729	1-136-157-00	FILM	0.022uF	5%	50V						(EXCE
C752	1-162-927-11	CERAMIC CHIP	100PF	5%	50V						(EXCE
C753	1-109-879-11	CERAMIC	22PF	5%	2KV						(EXCE
C755	1-116-177-21	CERAMIC	3PF		1KV						(EXCE
C757	1-112-089-11	ELECT	47uF	20%	25V						(EXCE

STR-DH810

Ver. 1.2

MAIN

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
CC12	1-162-970-11	CERAMIC CHIP 0.01uF	10% 25V (EXCEPT US)	D820	6-501-817-01	DIODE MA2J1110GLS0	
CC13	1-162-970-11	CERAMIC CHIP 0.01uF	10% 25V (EXCEPT US)	D861	6-501-817-01	DIODE MA2J1110GLS0	
CC14	1-162-970-11	CERAMIC CHIP 0.01uF	10% 25V (EXCEPT US)	D870	6-501-817-01	DIODE MA2J1110GLS0	
CC15	1-162-970-11	CERAMIC CHIP 0.01uF	10% 25V (EXCEPT US)	D910	8-719-053-18	DIODE 1SR154-400TE-25	
CC17	1-162-970-11	CERAMIC CHIP 0.01uF	10% 25V (EXCEPT US)	D911	8-719-053-18	DIODE 1SR154-400TE-25	
CC18	1-162-970-11	CERAMIC CHIP 0.01uF	10% 25V (EXCEPT US)	D912	8-719-053-18	DIODE 1SR154-400TE-25	
CC51	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US)	D913	8-719-053-18	DIODE 1SR154-400TE-25	
CC52	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US)	D920	6-501-817-01	DIODE MA2J1110GLS0	
CC53	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US)	D921	8-719-061-07	DIODE D5SBA60-F	
CC54	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US)	< FUSE >			
CC55	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US)	△ F910	1-523-085-11	FUSE 2.5A 250V	
CC58	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US)	△ F911	1-523-085-11	FUSE 2.5A 250V	
CC59	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US)	△ F912	1-523-080-11	FUSE 6.3A 250V	
CC60	1-162-964-11	CERAMIC CHIP 0.001uF	10% 50V (EXCEPT US)	△ F913	1-523-080-11	FUSE 6.3A 250V	
CC61	1-162-964-11	CERAMIC CHIP 0.001uF	10% 50V (EXCEPT US)	< IC >			
CC62	1-162-964-11	CERAMIC CHIP 0.001uF	10% 50V (EXCEPT US)	IC350	6-712-294-01	IC KIA7807API-U/PF	
CC63	1-162-964-11	CERAMIC CHIP 0.001uF	10% 50V (EXCEPT US)	IC352	6-712-295-01	IC KIA7907PI	
< CONNECTOR >				IC400	6-711-760-01	IC BD3471KS2	
CNP410	1-573-847-11	CONNECTOR, BOARD TO BOARD 15P		IC601	6-715-129-01	IC STK350-630T-E	
CNP411	1-573-852-11	CONNECTOR, BOARD TO BOARD 20P		IC701	6-715-129-01	IC STK350-630T-E	
CNP920	1-564-242-00	PIN, CONNECTOR (3.96mm PITCH) 5P		IC801	6-715-129-01	IC STK350-630T-E	
CNP930	1-564-506-11	PLUG, CONNECTOR 3P		IC901	6-715-129-01	IC STK350-630T-E	
< DIODE >				< JACK >			
D301	6-501-817-01	DIODE MA2J1110GLS0		J401	1-774-411-11	JACK, PIN 6P (SA-CD/CD/CD-R AUDIO OUT/IN, TV AUDIO IN)	
D326	6-500-335-01	DIODE MC2838-T112-1		J403	1-794-981-11	JACK, PIN 4P (SAT/CATV AUDIO IN,BD AUDIO IN)	
D327	6-500-335-01	DIODE MC2838-T112-1		J404	1-794-981-11	JACK, PIN 4P (VIDEO 1 AUDIO IN/OUT)	
D350	6-501-817-01	DIODE MA2J1110GLS0		J405	1-774-785-11	JACK, PIN 1P (SUBWOOFER AUDIO OUT)	
D352	8-719-053-18	DIODE 1SR154-400TE-25		< JUMPER RESISTOR >			
D355	6-501-817-01	DIODE MA2J1110GLS0		JR531	1-216-864-11	SHORT CHIP 0 (US)	
D360	6-501-817-01	DIODE MA2J1110GLS0		JR600	1-216-864-11	SHORT CHIP 0	
D365	6-501-817-01	DIODE MA2J1110GLS0		JR601	1-216-864-11	SHORT CHIP 0	
D375	6-501-817-01	DIODE MA2J1110GLS0		JR602	1-216-864-11	SHORT CHIP 0	
D536	6-501-734-01	DIODE MAZ8056GMLS0		JR631	1-216-864-11	SHORT CHIP 0 (US)	
D550	6-501-817-01	DIODE MA2J1110GLS0		JR681	1-216-864-11	SHORT CHIP 0 (US)	
D551	6-501-817-01	DIODE MA2J1110GLS0		JR700	1-216-864-11	SHORT CHIP 0	
D611	6-501-817-01	DIODE MA2J1110GLS0		JR701	1-216-864-11	SHORT CHIP 0	
D620	6-501-817-01	DIODE MA2J1110GLS0		JR702	1-216-864-11	SHORT CHIP 0	
D661	6-501-817-01	DIODE MA2J1110GLS0		JR703	1-216-864-11	SHORT CHIP 0	
D670	6-501-817-01	DIODE MA2J1110GLS0		JR704	1-216-864-11	SHORT CHIP 0	
D711	6-501-817-01	DIODE MA2J1110GLS0		JR705	1-216-864-11	SHORT CHIP 0	
D720	6-501-817-01	DIODE MA2J1110GLS0		JR706	1-216-864-11	SHORT CHIP 0	
D761	6-501-817-01	DIODE MA2J1110GLS0		JR707	1-216-864-11	SHORT CHIP 0	
D770	6-501-817-01	DIODE MA2J1110GLS0		JR731	1-216-864-11	SHORT CHIP 0 (US)	
D811	6-501-817-01	DIODE MA2J1110GLS0		JR781	1-216-864-11	SHORT CHIP 0 (US)	
				JR831	1-216-864-11	SHORT CHIP 0 (US)	
				JR881	1-216-864-11	SHORT CHIP 0 (US)	
< COIL >				< COIL >			
				L550	1-420-872-52	COIL, AIR-CORE	
				L628	1-420-872-52	COIL, AIR-CORE	
				L678	1-420-872-52	COIL, AIR-CORE	
				L728	1-420-872-52	COIL, AIR-CORE	
				L778	1-420-872-52	COIL, AIR-CORE	
				L828	1-420-872-52	COIL, AIR-CORE	
				L878	1-420-872-52	COIL, AIR-CORE	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description			Re		
< TRANSISTOR >				R361	1-249-399-11	CARBON	33	5%	1/4		
				R363	1-216-841-11	METAL CHIP	47K	5%	1/1		
				R365	1-249-399-11	CARBON	33	5%	1/4		
Q301	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF								
Q320	6-550-327-01	TR	2SA1514KT146S	R366	1-216-841-11	METAL CHIP	47K	5%	1/1		
Q321	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF	R367	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q323	6-550-327-01	TR	2SA1514KT146S	R375	1-216-825-11	METAL CHIP	2.2K	5%	1/1		
Q324	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF	R377	1-249-404-00	CARBON	82	5%	1/4		
				R378	1-216-841-11	METAL CHIP	47K	5%	1/1		
Q325	8-729-271-31	TRANSISTOR	2SC2713-G								
Q350	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF	R392	1-215-891-11	METAL OXIDE	680	5%	2W		
Q355	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF	R393	1-215-891-11	METAL OXIDE	680	5%	2W		
Q360	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF	R401	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q365	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF	R402	1-216-821-11	METAL CHIP	1K	5%	1/1		
				R403	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q375	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF								
Q550	6-550-327-01	TR	2SA1514KT146S	R404	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q551	8-729-119-76	TRANSISTOR	2SA1175-HFE	R405	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q552	8-729-922-39	TRANSISTOR	2SD2144S-V	R408	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q555	6-550-327-01	TR	2SA1514KT146S	R409	1-216-821-11	METAL CHIP	1K	5%	1/1		
				R449	1-216-813-11	METAL CHIP	220	5%	1/1		
Q601	8-729-119-76	TRANSISTOR	2SA1175-HFE								
Q602	8-729-922-39	TRANSISTOR	2SD2144S-V	R450	1-216-813-11	METAL CHIP	220	5%	1/1		
Q611	6-550-327-01	TR	2SA1514KT146S	R451	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q612	6-550-327-01	TR	2SA1514KT146S	R452	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q651	8-729-119-76	TRANSISTOR	2SA1175-HFE	R453	1-216-821-11	METAL CHIP	1K	5%	1/1		
				R454	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q652	8-729-922-39	TRANSISTOR	2SD2144S-V								
Q661	6-550-327-01	TR	2SA1514KT146S	R455	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q662	6-550-327-01	TR	2SA1514KT146S	R458	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q701	8-729-119-76	TRANSISTOR	2SA1175-HFE	R459	1-216-821-11	METAL CHIP	1K	5%	1/1		
Q702	8-729-922-39	TRANSISTOR	2SD2144S-V	R466	1-216-821-11	METAL CHIP	1K	5%	1/1		
				R467	1-216-845-11	METAL CHIP	100K	5%	1/1		
Q711	6-550-327-01	TR	2SA1514KT146S								
Q712	6-550-327-01	TR	2SA1514KT146S	R470	1-216-841-11	METAL CHIP	47K	5%	1/1		
Q751	8-729-119-76	TRANSISTOR	2SA1175-HFE	R513	1-234-182-11	ENCAPSULATED COMPONENT					
Q752	8-729-922-39	TRANSISTOR	2SD2144S-V	R531	1-247-758-11	CARBON	3.3K	5%	1/2		
Q761	6-550-327-01	TR	2SA1514KT146S						(EXCE		
Q762	6-550-327-01	TR	2SA1514KT146S	R532	1-247-758-11	CARBON	3.3K	5%	1/2		
Q801	8-729-119-76	TRANSISTOR	2SA1175-HFE						(EXCE		
Q802	8-729-922-39	TRANSISTOR	2SD2144S-V	R542	1-216-377-11	METAL OXIDE	4.7	5%	2W		
Q811	6-550-327-01	TR	2SA1514KT146S						(EXCE		
Q812	6-550-327-01	TR	2SA1514KT146S								
				R543	1-216-377-11	METAL OXIDE	4.7	5%	2W		
Q851	8-729-119-76	TRANSISTOR	2SA1175-HFE						(EXCE		
Q852	8-729-922-39	TRANSISTOR	2SD2144S-V	R544	1-216-864-11	SHORT CHIP	0				
Q861	6-550-327-01	TR	2SA1514KT146S	R545	1-249-377-11	CARBON	0.47	5%	1/4		
Q862	6-550-327-01	TR	2SA1514KT146S	R546	1-249-377-11	CARBON	0.47	5%	1/4		
Q920	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF	R547	1-216-069-00	METAL CHIP	6.8K	5%	1/1		
< RESISTOR >				R548	1-216-081-00	METAL CHIP	22K	5%	1/1		
				R549	1-216-081-00	METAL CHIP	22K	5%	1/1		
R301	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R550	1-249-389-11	CARBON	4.7	5%	1/4
R302	1-249-405-11	CARBON	100	5%	1/4W	R551	1-249-393-11	CARBON	10	5%	1/4
R304	1-216-841-11	METAL CHIP	47K	5%	1/10W	R552	1-216-214-00	RES-CHIP	4.7K	2%	1/8
R320	1-216-845-11	METAL CHIP	100K	5%	1/10W						
R323	1-216-845-11	METAL CHIP	100K	5%	1/10W	R553	1-249-405-11	CARBON	100	5%	1/4
				R554	1-216-843-11	METAL CHIP	68K	5%	1/1		
R325	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R555	1-216-844-11	METAL CHIP	82K	5%	1/1
R326	1-216-840-11	METAL CHIP	39K	5%	1/10W	R556	1-216-825-11	METAL CHIP	2.2K	5%	1/1
R327	1-216-833-11	METAL CHIP	10K	5%	1/10W	R557	1-216-841-11	METAL CHIP	47K	5%	1/1
R328	1-216-821-11	METAL CHIP	1K	5%	1/10W						
R350	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R558	1-240-855-91	CARBON	6.2K	5%	1/4
				R559	1-216-845-11	METAL CHIP	100K	5%	1/1		
R351	1-249-399-11	CARBON	33	5%	1/4W	R560	1-216-821-11	METAL CHIP	1K	5%	1/1
R353	1-216-841-11	METAL CHIP	47K	5%	1/10W	R562	1-216-823-11	METAL CHIP	1.5K	5%	1/1
R354	1-216-864-11	SHORT CHIP	0			R563	1-208-445-41	RES-CHIP	2.2K	2%	1/1
R355	1-216-821-11	METAL CHIP	1K	5%	1/10W						
R356	1-249-399-11	CARBON	33	5%	1/4W	R564	1-216-835-11	METAL CHIP	15K	5%	1/1
				R565	1-208-826-11	METAL CHIP	68K	0.5%	1/1		
R358	1-216-841-11	METAL CHIP	47K	5%	1/10W	R566	1-216-818-11	METAL CHIP	560	5%	1/1
R360	1-216-821-11	METAL CHIP	1K	5%	1/10W	R567	1-249-405-11	CARBON	100	5%	1/4

STR-DH810

Ver. 1.2

MAIN

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
R568	1-216-841-11	METAL CHIP	47K	5%	1/10W	R712	1-240-855-91	CARBON	6.2K	5%	1/4W
R569	1-216-843-11	METAL CHIP	68K	5%	1/10W	R713	1-234-182-11	ENCAPSULATED COMPONENT			
R601	1-216-821-11	METAL CHIP	1K	5%	1/10W	R714	1-216-823-11	METAL CHIP	1.5K	5%	1/10W
R602	1-216-843-11	METAL CHIP	68K	5%	1/10W	R715	1-216-835-11	METAL CHIP	15K	5%	1/10W
R603	1-208-445-41	RES-CHIP	2.2K	2%	1/10W	R716	1-216-843-11	METAL CHIP	68K	5%	1/10W
R604	1-208-826-11	METAL CHIP	68K	0.5%	1/10W	R720	1-216-841-11	METAL CHIP	47K	5%	1/10W
R606	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R722	1-216-845-11	METAL CHIP	100K	5%	1/10W
R607	1-216-844-11	METAL CHIP	82K	5%	1/10W	R728	1-249-389-11	CARBON	4.7	5%	1/4W
R608	1-216-818-11	METAL CHIP	560	5%	1/10W	R729	1-249-393-11	CARBON	10	5%	1/4W
R609	1-249-405-11	CARBON	100	5%	1/4W	R730	1-216-841-11	METAL CHIP	47K	5%	1/10W
R610	1-249-405-11	CARBON	100	5%	1/4W	R731	1-247-758-11	CARBON	3.3K	5%	1/2W
R611	1-216-214-00	RES-CHIP	4.7K	2%	1/8W	R732	1-247-758-11	CARBON	3.3K	5%	(EXCEPT US)
R612	1-240-855-91	CARBON	6.2K	5%	1/4W	R751	1-216-821-11	METAL CHIP	1K	5%	1/10W
R613	1-234-182-11	ENCAPSULATED COMPONENT				R752	1-216-843-11	METAL CHIP	68K	5%	1/10W
R614	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R753	1-208-445-41	RES-CHIP	2.2K	2%	1/10W
R615	1-216-835-11	METAL CHIP	15K	5%	1/10W	R754	1-208-826-11	METAL CHIP	68K	0.5%	1/10W
R616	1-216-843-11	METAL CHIP	68K	5%	1/10W	R756	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R620	1-216-841-11	METAL CHIP	47K	5%	1/10W	R757	1-216-844-11	METAL CHIP	82K	5%	1/10W
R622	1-216-845-11	METAL CHIP	100K	5%	1/10W	R758	1-216-818-11	METAL CHIP	560	5%	1/10W
R628	1-249-389-11	CARBON	4.7	5%	1/4W	R759	1-249-405-11	CARBON	100	5%	1/4W
R629	1-249-393-11	CARBON	10	5%	1/4W	R760	1-249-405-11	CARBON	100	5%	1/4W
R630	1-216-841-11	METAL CHIP	47K	5%	1/10W	R761	1-216-214-00	RES-CHIP	4.7K	2%	1/8W
R631	1-247-758-11	CARBON	3.3K	5%	1/2W	R762	1-240-855-91	CARBON	6.2K	5%	1/4W
R632	1-247-758-11	CARBON	3.3K	5%	1/2W	R763	1-234-182-11	ENCAPSULATED COMPONENT			
R651	1-216-821-11	METAL CHIP	1K	5%	1/10W	R764	1-216-823-11	METAL CHIP	1.5K	5%	1/10W
R652	1-216-843-11	METAL CHIP	68K	5%	1/10W	R765	1-216-835-11	METAL CHIP	15K	5%	1/10W
R653	1-208-445-41	RES-CHIP	2.2K	2%	1/10W	R766	1-216-843-11	METAL CHIP	68K	5%	1/10W
R654	1-208-826-11	METAL CHIP	68K	0.5%	1/10W	R770	1-216-841-11	METAL CHIP	47K	5%	1/10W
R656	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R772	1-216-845-11	METAL CHIP	100K	5%	1/10W
R657	1-216-844-11	METAL CHIP	82K	5%	1/10W	R778	1-249-389-11	CARBON	4.7	5%	1/4W
R658	1-216-818-11	METAL CHIP	560	5%	1/10W	R779	1-249-393-11	CARBON	10	5%	1/4W
R659	1-249-405-11	CARBON	100	5%	1/4W	R780	1-216-841-11	METAL CHIP	47K	5%	1/10W
R660	1-249-405-11	CARBON	100	5%	1/4W	R781	1-247-758-11	CARBON	3.3K	5%	1/2W
R661	1-216-214-00	RES-CHIP	4.7K	2%	1/8W	R782	1-247-758-11	CARBON	3.3K	5%	1/2W
R662	1-240-855-91	CARBON	6.2K	5%	1/4W	R801	1-216-821-11	METAL CHIP	1K	5%	(EXCEPT US)
R663	1-234-182-11	ENCAPSULATED COMPONENT				R802	1-216-843-11	METAL CHIP	68K	5%	1/10W
R664	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R803	1-208-445-41	RES-CHIP	2.2K	2%	1/10W
R665	1-216-835-11	METAL CHIP	15K	5%	1/10W	R804	1-208-826-11	METAL CHIP	68K	0.5%	1/10W
R666	1-216-843-11	METAL CHIP	68K	5%	1/10W	R806	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R670	1-216-841-11	METAL CHIP	47K	5%	1/10W	R807	1-216-844-11	METAL CHIP	82K	5%	1/10W
R672	1-216-845-11	METAL CHIP	100K	5%	1/10W	R808	1-216-818-11	METAL CHIP	560	5%	1/10W
R678	1-249-389-11	CARBON	4.7	5%	1/4W	R809	1-249-405-11	CARBON	100	5%	1/4W
R679	1-249-393-11	CARBON	10	5%	1/4W	R810	1-249-405-11	CARBON	100	5%	1/4W
R680	1-216-841-11	METAL CHIP	47K	5%	1/10W	R811	1-216-214-00	RES-CHIP	4.7K	2%	1/8W
R681	1-247-758-11	CARBON	3.3K	5%	1/2W	R812	1-240-855-91	CARBON	6.2K	5%	1/4W
R682	1-247-758-11	CARBON	3.3K	5%	1/2W	R813	1-234-182-11	ENCAPSULATED COMPONENT			
R701	1-216-821-11	METAL CHIP	1K	5%	1/10W	R814	1-216-823-11	METAL CHIP	1.5K	5%	1/10W
R702	1-216-843-11	METAL CHIP	68K	5%	1/10W	R815	1-216-835-11	METAL CHIP	15K	5%	1/10W
R703	1-208-445-41	RES-CHIP	2.2K	2%	1/10W	R816	1-216-843-11	METAL CHIP	68K	5%	1/10W
R704	1-208-826-11	METAL CHIP	68K	0.5%	1/10W	R820	1-216-841-11	METAL CHIP	47K	5%	1/10W
R706	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R822	1-216-845-11	METAL CHIP	100K	5%	1/10W
R707	1-216-844-11	METAL CHIP	82K	5%	1/10W	R828	1-249-389-11	CARBON	4.7	5%	1/4W
R708	1-216-818-11	METAL CHIP	560	5%	1/10W	R829	1-249-393-11	CARBON	10	5%	1/4W
R709	1-249-405-11	CARBON	100	5%	1/4W	R830	1-216-841-11	METAL CHIP	47K	5%	1/10W
R710	1-249-405-11	CARBON	100	5%	1/4W	R831	1-247-758-11	CARBON	3.3K	5%	1/2W
R711	1-216-214-00	RES-CHIP	4.7K	2%	1/8W						(EXCEPT US)

Ref. No.	Part No.	Description	Remark		
R832	1-247-758-11	CARBON	3.3K	5%	1/2W (EXCEPT US)
R851	1-216-821-11	METAL CHIP	1K	5%	1/10W
R852	1-216-843-11	METAL CHIP	68K	5%	1/10W
R853	1-208-445-41	RES-CHIP	2.2K	2%	1/10W
R854	1-208-826-11	METAL CHIP	68K	0.5%	1/10W
R856	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R857	1-216-844-11	METAL CHIP	82K	5%	1/10W
R858	1-216-818-11	METAL CHIP	560	5%	1/10W
R859	1-249-405-11	CARBON	100	5%	1/4W
R860	1-249-405-11	CARBON	100	5%	1/4W
R861	1-216-214-00	RES-CHIP	4.7K	2%	1/8W
R862	1-240-855-91	CARBON	6.2K	5%	1/4W
R863	1-234-182-11	ENCAPSULATED COMPONENT			
R864	1-216-823-11	METAL CHIP	1.5K	5%	1/10W
R865	1-216-835-11	METAL CHIP	15K	5%	1/10W
R866	1-216-843-11	METAL CHIP	68K	5%	1/10W
R870	1-216-841-11	METAL CHIP	47K	5%	1/10W
R872	1-216-845-11	METAL CHIP	100K	5%	1/10W
R878	1-249-389-11	CARBON	4.7	5%	1/4W
R879	1-249-393-11	CARBON	10	5%	1/4W
R880	1-216-841-11	METAL CHIP	47K	5%	1/10W
R881	1-247-758-11	CARBON	3.3K	5%	1/2W (EXCEPT US)
R882	1-247-758-11	CARBON	3.3K	5%	1/2W (EXCEPT US)
R920	1-249-399-11	CARBON	33	5%	1/4W
R921	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R925	1-216-841-11	METAL CHIP	47K	5%	1/10W
RR11	1-249-393-11	CARBON	10	5%	1/4W (EXCEPT US)
RR12	1-249-393-11	CARBON	10	5%	1/4W (EXCEPT US)
RR13	1-249-393-11	CARBON	10	5%	1/4W (EXCEPT US)
RR14	1-249-393-11	CARBON	10	5%	1/4W (EXCEPT US)
RR15	1-249-393-11	CARBON	10	5%	1/4W (EXCEPT US)
RR17	1-249-393-11	CARBON	10	5%	1/4W (EXCEPT US)
RR18	1-249-393-11	CARBON	10	5%	1/4W (EXCEPT US)
< RELAY >					
RY301	1-755-267-11	RELAY			
RY350	1-755-307-21	RELAY			
RY355	1-755-307-21	RELAY			
RY360	1-755-307-21	RELAY			
RY365	1-755-307-21	RELAY			
RY375	1-755-307-21	RELAY			
RY920	1-755-593-11	RELAY			
< TERMINAL >					
TB502	1-780-214-11	TERMINAL BOARD (SP) (2P) (SPEAKERS SURROUND BACK/ FRONT HIGH/BI-AMP/FRONT B)			
TB503	1-780-215-11	TERMINAL BOARD (SP) (4P) (SPEAKERS CENTER/SURROUND BACK/ FRONT HIGH/BI-AMP/FRONT B)			
TB504	1-780-364-11	TERMINAL BOARD (SP) (8P) (SPEAKERS FRONT A/SURROUND)			

Ref. No.	Part No.	Description	Remark		
		POWER KEY BOARD *****			
< CAPACITOR >					
C101	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C102	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C103	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C104	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
< CONNECTOR >					
* CNP102	1-564-508-11	PLUG, CONNECTOR 5P			
< RESISTOR >					
R163	1-216-837-11	METAL CHIP	22K	5%	1/1W
R164	1-216-833-11	METAL CHIP	10K	5%	1/1W
R167	1-216-833-11	METAL CHIP	10K	5%	1/1W
R169	1-216-833-11	METAL CHIP	10K	5%	1/1W
R170	1-216-837-11	METAL CHIP	22K	5%	1/1W
R171	1-216-837-11	METAL CHIP	22K	5%	1/1W
< ROTARY ENCODER >					
RV102	1-418-817-21	ENCODER, ROTARY (- TONE +)			
RV103	1-418-817-21	ENCODER, ROTARY (INPUT SELECTOR)			
< SWITCH >					
S101	1-771-410-21	SWITCH, TACTILE (INPUT MODE)			
S113	1-771-410-21	SWITCH, TACTILE (TONE MODE)			
S114	1-771-410-21	SWITCH, TACTILE (SPEAKERS)			
S115	1-771-410-21	SWITCH, TACTILE (U/C)			

S-AIR BOARD *****					
< CAPACITOR >					
C1250	1-126-964-11	ELECT	10uF	20%	50V
C1251	1-126-964-11	ELECT	10uF	20%	50V
< CONNECTOR >					
CN1201	1-770-411-11	CONNECTOR, BOARD TO BOARD 20P			
CN1202	1-821-744-21	CONNECTOR, CARD EDGE 30P			
< RESISTOR >					
R1262	1-216-864-11	SHORT CHIP	0		
R1263	1-216-864-11	SHORT CHIP	0		
R1264	1-216-864-11	SHORT CHIP	0		
R1266	1-216-833-11	METAL CHIP	10K	5%	1/1W
R1267	1-216-833-11	METAL CHIP	10K	5%	1/1W
R1268	1-216-833-11	METAL CHIP	10K	5%	1/1W
R1269	1-216-864-11	SHORT CHIP	0		
R1270	1-216-864-11	SHORT CHIP	0		
R1271	1-216-825-11	METAL CHIP	2.2K	5%	1/1W
R1272	1-216-825-11	METAL CHIP	2.2K	5%	1/1W
R1273	1-216-825-11	METAL CHIP	2.2K	5%	1/1W
R1274	1-216-825-11	METAL CHIP	2.2K	5%	1/1W

STR-DH810

Ver. 1.2

SUPPLY TEMP-SENSOR

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
	A-1748-026-A	SUPPLY BOARD, COMPLETE (US)		L961	1-457-508-21	INDUCTOR	0.1MH
	A-1748-063-A	SUPPLY BOARD, COMPLETE (EXCEPT US)		L963	1-456-545-11	INDUCTOR	100UH
		*****				< TRANSISTOR >	
	7-685-646-71	SCREW +BVTP 3X8 TYPE2 IT-3		Q901	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF
		< CAPACITOR >		Q990	8-729-620-07	TRANSISTOR	2SC3052EF-T1-LEF
						< RESISTOR >	
C900	1-137-958-91	MYLAR	0.22uF 5% 100V	R902	1-249-394-11	CARBON	12 5% 1/4W (EXCEPT US)
C901	1-137-958-91	MYLAR	0.22uF 5% 100V	R902	1-249-396-11	CARBON	18 5% 1/4W (US)
C918	1-125-891-11	CERAMIC CHIP	0.47uF 10% 10V	R903	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
C919	1-125-891-11	CERAMIC CHIP	0.47uF 10% 10V	R904	1-216-841-11	METAL CHIP	47K 5% 1/10W
C920	1-126-946-11	ELECT	6800uF 20% 25V	R905	1-249-397-11	CARBON	22 5% 1/4W (US)
C921	1-126-942-61	ELECT	1000uF 20% 25V	R905	1-249-401-11	CARBON	47 5% 1/4W (EXCEPT US)
C943	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	R951	1-218-835-11	METAL CHIP	330 0.5% 1/10W
C950	1-128-950-21	ELECT	1000uF 20% 16V	R952	1-218-839-11	METAL CHIP	470 0.5% 1/10W
C951	1-137-980-91	CERAMIC CHIP	0.47uF 10% 50V	R960	1-218-879-11	METAL CHIP	22K 0.5% 1/10W
C952	1-100-597-91	CERAMIC CHIP	0.1uF 10% 25V	R961	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W
C953	1-137-980-91	CERAMIC CHIP	0.47uF 10% 50V	R962	1-218-823-11	METAL CHIP	100 0.5% 1/10W
C954	1-128-954-11	ELECT	1000uF 20% 25V	R963	1-218-859-11	METAL CHIP	3.3K 0.5% 1/10W
C955	1-126-936-11	ELECT	3300uF 20% 16V	R990	1-216-835-11	METAL CHIP	15K 5% 1/10W
C960	1-128-950-21	ELECT	1000uF 20% 16V	R991	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W
C961	1-100-597-91	CERAMIC CHIP	0.1uF 10% 25V	R993	1-216-833-11	METAL CHIP	10K 5% 1/10W
C962	1-128-954-11	ELECT	1000uF 20% 25V	R994	1-218-835-11	METAL CHIP	330 0.5% 1/10W
C992	1-126-960-11	ELECT	1uF 20% 50V			< RELAY >	
C994	1-100-597-91	CERAMIC CHIP	0.1uF 10% 25V	△ RY901	1-755-541-11	RELAY	
C995	1-100-597-91	CERAMIC CHIP	0.1uF 10% 25V			< TRANSFORMER >	
C996	1-100-597-91	CERAMIC CHIP	0.1uF 10% 25V	△ T901	1-443-517-11	POWER TRANSFORMER (SUB) (EXCEPT US)	
C997	1-100-597-91	CERAMIC CHIP	0.1uF 10% 25V	△ T902	1-445-635-11	POWER TRANSFORMER (SUB) (US)	
		< CONNECTOR >				*****	
* CNP901	1-793-660-11	PIN, CONNECTOR (PC BOARD) 3P				TEMP-SENSOR BOARD	
* CNP902	1-565-792-11	PIN, CONNECTOR (3.96mm PITCH) 2P				*****	
* CNP910	1-564-507-11	PLUG, CONNECTOR 4P				< CAPACITOR >	
* CNP911	1-564-508-11	PLUG, CONNECTOR 5P					
		< DIODE >				C250	1-107-826-11 CERAMIC CHIP 0.1uF 10% 16V
D900	8-719-061-07	DIODE D5SBA60-F				C251	1-165-908-11 CERAMIC CHIP 1uF 10% 10V
D901	6-501-817-01	DIODE MA2J1110GLS0				C252	1-165-908-11 CERAMIC CHIP 1uF 10% 10V
D950	6-501-361-01	DIODE RB051LA-40TR					< IC >
D960	6-501-361-01	DIODE RB051LA-40TR		△ IC250	6-710-072-01	IC LM61CIZ/LFT2 (EXCEPT US)	
D990	6-500-335-01	DIODE MC2838-T112-1		△ IC251	6-710-072-01	IC LM61CIZ/LFT2 (EXCEPT US)	
				△ IC252	6-710-072-01	IC LM61CIZ/LFT2 (US)	
D992	8-719-053-18	DIODE 1SR154-400TE-25				< JUMPER RESISTOR >	
D993	6-500-848-01	DIODE MC2840-T112-1		JR250	1-216-864-11	SHORT CHIP	0
D994	6-500-848-01	DIODE MC2840-T112-1		JR251	1-216-864-11	SHORT CHIP	0 (US)
		< FUSE >				*****	
△ F902	1-523-086-11	FUSE 3.15A 250V				MISCELLANEOUS	
△ F903	1-523-086-11	FUSE 3.15A 250V				*****	
		< FUSE HOLDER >				57	1-828-413-51 WIRE (FLAT TYPE) (29 CORE)
FH901	1-533-217-41	HOLDER, FUSE				102	1-828-359-51 WIRE (FLAT TYPE) (19 CORE)
FH902	1-533-217-41	HOLDER, FUSE				△ 106	1-777-071-83 CORD, POWER (AEP, UK)
		< IC >				△ 106	1-833-566-21 POWER-SUPPLY CORD (AUS)
IC950	6-712-617-01	IC SI-8008TM-TLS				△ 106	1-834-270-11 CORD, POWER (US)
IC960	8-759-659-28	IC SI-8033S					
		< COIL >					
L950	1-457-508-21	INDUCTOR	0.1MH				
L952	1-456-545-11	INDUCTOR	100UH				

Note: If wire (flat type) is replaced, install it after bending it in the same form as that before replacement.

Ref. No.	Part No.	Description	Remark
107	1-828-954-11	WIRE (FLAT TYPE) (9 CORE) (US)	
107	1-828-964-11	WIRE (FLAT TYPE) (11 CORE) (EXCEPT US)	
△ F901	1-532-465-33	FUSE, T3.15AL 250V (EXCEPT US)	
△ F901	1-533-311-12	FUSE, GLASS (DIA.5) 8A 125V (US)	
Q503	6-702-390-01	IC MN2488-OPY-MK	
Q504	6-702-391-01	IC MP1620-OPY-MK	
Q553	6-702-390-01	IC MN2488-OPY-MK	
Q554	6-702-391-01	IC MP1620-OPY-MK	
Q603	6-702-390-01	IC MN2488-OPY-MK	
Q604	6-702-391-01	IC MP1620-OPY-MK	
Q653	6-702-390-01	IC MN2488-OPY-MK	
Q654	6-702-391-01	IC MP1620-OPY-MK	
Q703	6-702-390-01	IC MN2488-OPY-MK	
Q704	6-702-391-01	IC MP1620-OPY-MK	
Q753	6-702-390-01	IC MN2488-OPY-MK	
Q754	6-702-391-01	IC MP1620-OPY-MK	
Q853	6-702-390-01	IC MN2488-OPY-MK	
Q854	6-702-391-01	IC MP1620-OPY-MK	
△ T900	1-445-652-21	POWER TRANSFORMER (MAIN) (EXCEPT US)	
△ T900	1-445-797-11	POWER TRANSFORMER (MAIN) (US)	
TN1	1-693-737-21	TUNER (FM/AM) (EXCEPT US)	
TN1	1-693-779-11	TUNER (FM/AM) (US)	

ACCESSORIES			

1-126-947-11	CAP. ELECT 47MF (EXCEPT AUS)		
1-487-847-11	REMOTE COMMANDER RM-AAP050		
	(including BATTERY LID) (EXCEPT US)		
1-487-848-11	REMOTE COMMANDER RM-AAP049		
	(including BATTERY LID) (US)		
1-501-374-12	ANTENNA, LOOP (AM loop antenna (aerial))		
1-542-774-21	MEASUREMENT MIC (MONO)		
	(optimizer microphone (ECM-AC2))		
1-770-019-71	ADAPTOR, CONVERSION PLUG 3P (UK)		
1-793-184-51	CONNECTOR (F TYPE ADAPTOR)		
	(FM wire antenna (aerial))		
3-254-070-11	SCREW (EXCEPT AUS)		
4-168-075-13	INSTRUCTION MANUAL (ENGLISH)		
4-168-075-23	INSTRUCTION MANUAL (SPANISH) (US, AEP)		
4-168-075-32	INSTRUCTION MANUAL (FRENCH, GERMAN)		
	(AEP)		
4-168-075-42	INSTRUCTION MANUAL (DUTCH, SWEDISH)		
	(AEP)		
4-168-075-52	INSTRUCTION MANUAL (ITALIAN, POLISH) (AEP)		
4-168-075-62	INSTRUCTION MANUAL (DANISH, FINNISH)		
	(AEP)		
4-168-075-72	INSTRUCTION MANUAL (PORTUGUESE)(AEP)		
4-174-046-12	INSTRUCTION MANUAL (GREEK)(AEP)		
4-174-046-22	INSTRUCTION MANUAL (TURKISH)(AEP)		
4-174-046-32	INSTRUCTION MANUAL (HUNGARIAN, CZECH)		
	(AEP)		
4-174-046-42	INSTRUCTION MANUAL (SLOVAKIAN)(AEP)		
4-257-258-22	INSTRUCTION MANUAL (TD) (US)		

STR-DH810

REVISION HISTORY

Checking the version allows you to jump to the revised page.

Also, clicking the version at the top of the revised page allows you to jump to the next revised page.

[illegible]