



13 Exploded View and Replacement Parts List

13.1. Exploded View and Mechanical Replacement Parts List

13.1.1. Exploded View

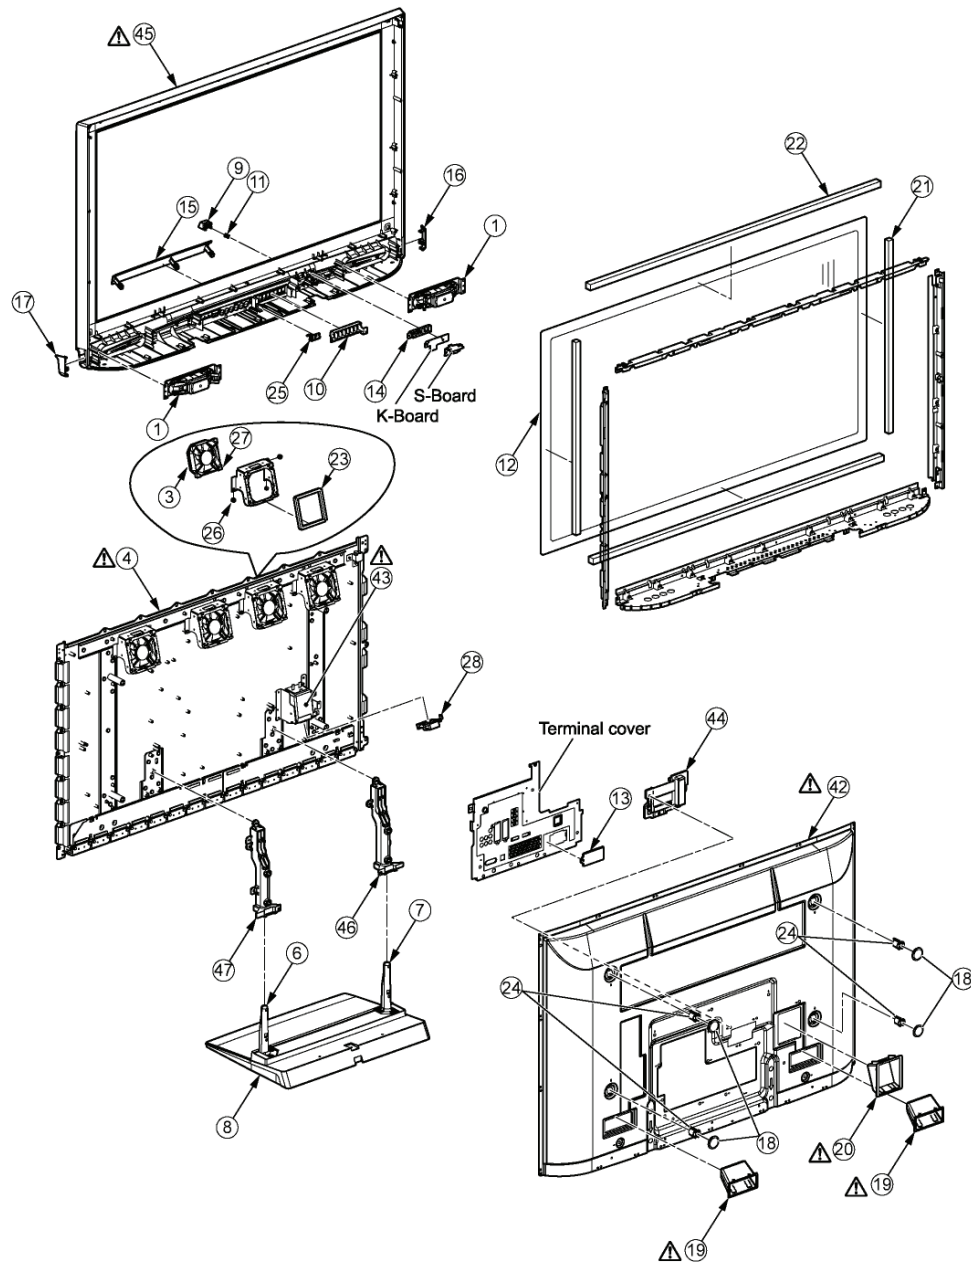

13.1.2. Packing

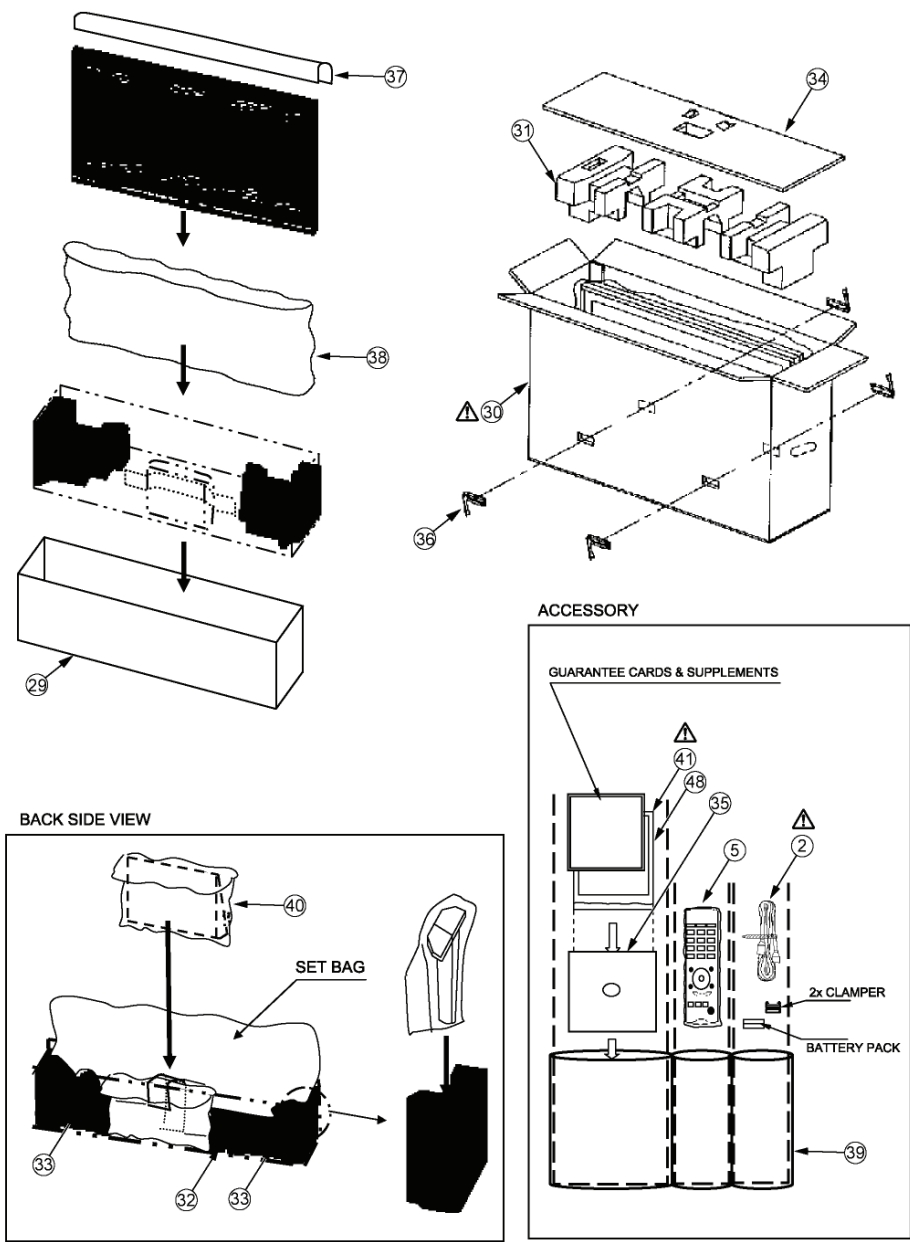

13.1.3. Mechanical Replacement Parts List

Note: Important Safety Notice

Components identified by  mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.

Note: All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by PAVC-CSG.
Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	1	EAS16S06A	SPEAKER	2	
	2	K2CN3DH00006	AC CORD	1	
	3	L6FAYYYH0050	FAN (80MM-T25)	3	
	4	MD46F11A1J	PLASMA DISPLAY PANEL	1	
	5	N2QAYB000239	REMOTE CONTROL	1	PAVCCZ
	6	TBLA3614	STAND POLE RIGHT	1	
	7	TBLA3615	STAND POLE LEFT	1	
	8	TBLX0045	PEDESTAL STAND	1	PAVCCZ
	9	TBX0E85104	POWER BUTTON	1	PAVCCZ
	10	TBX0E85201	CONTROL BUTTON	1	PAVCCZ
	11	TES0E201	POWER BUTTON SPRING	1	PAVCCZ
		THEC118N	STEP SCREW	2	
		THEJ006J	SCREW	2	
		THEJ016J	SCREW (AC INRET:2)	2	
		THEL037N	SCREW	30	
		THEL0429	SCREW	16	
		THEL052Z	SCREW (BC TOP:4)	5	
		THEL060N	SCREW (STAND-TV)	4	
		THTD013N	SCREW	9	
		THTF011N	SCREW	65	
	12	TKGA5470	FRONT GLASS	1	PAVCCZ
	13	TKK0E9520	ADJUSTMENT COVER	1	PAVCCZ
	14	TKKC5326	LED PANEL	1	PAVCCZ
	15	TKP0E34505	DOOR	1	PAVCCZ
	16	TKP0E34802	SIDE COVER (LEFT)	1	PAVCCZ
	17	TKP0E34902	SIDE COVER (RIGHT)	1	PAVCCZ
	18	TKR0E0202	M8 SPACER CAP	4	PAVCCZ
	19	TKR0E0302	REAR COVER HANDLE	2	PAVCCZ
	20	TKR0E1301	INLET COVER	1	PAVCCZ
	21	TMK0EG007	SPONGE (TKG/LEFT/RIGHT)	2	PAVCCZ
	22	TMK0EG008	SPONGE (TKG/UPPER/BOTTOM)	2	PAVCCZ
	23	TMKG670	SPONGE (FAN)	3	
	24	TMM0E313	M8 SPACER	4	PAVCCZ
		TMM0E903	INSULATION SPACER A	6	PAVCCZ
		TMM0E904	INSULATION SPACER B	6	PAVCCZ
	25	TMM0E906	DOOR SPRING	1	PAVCCZ
		TMM17499	CLAMPER	2	
		TMM7464-2	CLAMPER	2	
		TMM7468-1	CLAMPER	1	
		TMME061	CLAMPER	2	
		TMME084	CLAMPER	1	
		TMME088	CLAMPER	2	
		TMME190	CLAMPER	1	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
		TMME260	CLAMPER	1	
		TMME261	CLAMPER	1	
		TMME285	CLAMPER	1	
		TMME287	CLAMPER	8	
		TMME289	CLAMPER	2	
		TMME292	CLAMPER	18	
	26	TMMJ068	RUBBER (FAN)	9	
	27	TMMJ082	SPONGE (FAN CORNER)	12	
	28	TMXX045	AC CORD HOLDER	1	
		TMXX054	AC CORD CLAMPER	2	PAVCCZ
	29	TPC0E47400	CARTON BOX BOTTOM	1	PAVCCZ
	30	TPC0E50400	CARTON BOX TOP	1	PAVCCZ
	31	TPD0E1053	CUSHION TOP SIDE	1	PAVCCZ
	32	TPD0E2008	PEDESTAL CUSHION	1	PAVCCZ
	33	TPD0E2017	CUSHION BOTTOM SIDE	1	PAVCCZ
	34	TPD0E9122	TOP PAD	1	PAVCCZ
	35	TPD0E9137	ACCESSORIES PAD	1	PAVCCZ
	36	TPD169487	JOINT	4	
	37	TPE0E4013	TOP PROTECT SHEET	1	PAVCCZ
	38	TPE0E4020	BAG	1	PAVCCZ
	39	TPE0E9001	ACCESSORIES BAG	1	PAVCCZ
	40	TPEB331-1	BAG (PEDESTAL STAND)	1	
		TPEB340	SCREW BAG (STAND-TV)	1	
		TQB0E0679A	INSTRUCTION BOOK (GERMAN)	1	PAVCCZ
		TQB0E0679B	INSTRUCTION BOOK (DUTCH)	1	PAVCCZ
		TQB0E0679C	INSTRUCTION BOOK (ITALIAN)	1	PAVCCZ
		TQB0E0679D	INSTRUCTION BOOK (FRENCH)	1	PAVCCZ
		TQB0E0679E	INSTRUCTION BOOK (SPANISH)	1	PAVCCZ
		TQB0E0679F	INSTRUCTION BOOK (SWEDISH)	1	PAVCCZ
		TQB0E0679G	INSTRUCTION BOOK (NORWEGIAN)	1	PAVCCZ
		TQB0E0679H	INSTRUCTION BOOK (FINNISH)	1	PAVCCZ
		TQB0E0679I	INSTRUCTION BOOK (LITHUANIAN)	1	PAVCCZ
		TQB0E0679J	INSTRUCTION BOOK (PORTUGUESE)	1	PAVCCZ
		TQB0E0679K	INSTRUCTION BOOK (DANISH)	1	PAVCCZ
		TQB0E0679M	INSTRUCTION BOOK (BULGARIAN)	1	PAVCCZ
		TQB0E0679N	INSTRUCTION BOOK (ROMANIAN)	1	PAVCCZ
		TQB0E0679O	INSTRUCTION BOOK (LATVIAN)	1	PAVCCZ
		TQB0E0679P	INSTRUCTION BOOK (POLISH)	1	PAVCCZ
		TQB0E0679Q	INSTRUCTION BOOK (HUNGARIAN)	1	PAVCCZ
		TQB0E0679R	INSTRUCTION BOOK (CZECH)	1	PAVCCZ
		TQB0E0679S	INSTRUCTION BOOK (GREEK)	1	PAVCCZ
		TQB0E0679T	INSTRUCTION BOOK (TURKISH)	1	PAVCCZ
		TQB0E0679U	INSTRUCTION BOOK (ENGLISH)	1	PAVCCZ

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
		TQB0E0679W	INSTRUCTION BOOK (SLOVAKIAN)	1	PAVCCZ
	41	TQB0E0679X	INSTRUCTION BOOK (CD-ROM)	1	PAVCCZ
		TQB0E0679Z	INSTRUCTION BOOK (ESTONIAN)	1	PAVCCZ
		TQZH983	SCREW USE HANDBILL	1	
		TSXL519	CABLE (C10-C20/SU11-SD11)	2	
		TSXL658	CABLE (D20-SC20)	1	
		TSXL660	CABLE (D31-C11/D32-C21/D33-C22)	3	
		TSXL661	CABLE (C26-C36)	1	
	42	TTU0E0304	REAR COVER	1	PAVCCZ
	43	TXAJS01RJTU	AC INLET ASSY	1	PAVCCZ
	44	TXFKR01SLTB	CI COVER ASSY	1	PAVCCZ
	45	TXFKY01SKTDA	CABINET ASSY	1	PAVCCZ
	46	TXFMZ01RMTB	STAND BRACKET ASSY LEFT	1	PAVCCZ
	47	TXFMZ02RMTB	STAND BRACKET ASSY RIGHT	1	PAVCCZ
		TXFPE01RLTB	CLEANING CLOTH ASSY	1	PAVCCZ
		TXJH12SKTD	SPEAKER LEAD (H12-SP)	1	PAVCCZ
		TXJSWRRNTB	SPEAKER LEAD (SP-SPR/L)	2	PAVCCZ
		XSB3+6FJ	SCREW (LCD MTG)	3	
		XTB4+12GFJ	SCREW	40	
		XTB4+12GFJK	SCREW	19	
		XTB4+12GFN	TAPS CREW	8	
		XTB4+5FFN	SCREW	4	
		XTS4+12GFN	SCREW	6	
		XTV3+10JFJK	SCREW	4	
		XTW3+10TFJ	SCREW	1	
		XTW4+15DFJ	SCREW (FOR DUMMY ESC)	12	
		XYN3+F8FJ	SCREW	24	
		XYN3+J12FJ	SCREW	44	
		XYN4+E8FJ	SCREW	1	
		XYN4+F10FJ	SCREW	16	
		XYN4+F14FJ	SCREW	6	
		XYN5+C15FJ	SCREW	8	
		XYN5+F18FN	SCREW (STAND POLE)	4	
		XZB17X19C03	POLY BAG (STAND POLE)	1	
	48	XZBT6506	POLY BAG (INSTRUCTION BOOK)	1	

13.2. Electrical Replacement Parts List

13.2.1. Replacement Parts List Notes

Important Safety Notice

*Components identified by $\triangle$ mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.*

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.
After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.
After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 $\triangle$ 100KOHM, $\triangle$ 1/4W

Type Allowance

2. Capacitor

Example:

ECKF1H103ZF $\triangle$ 0.01UF, $\triangle$ 50V

Type Allowance

Type	Allowance
C : Carbon	F : $\pm 1\%$
F : Fuse	G : $\pm 2\%$
M : Metal Oxide	J : $\pm 5\%$
Metal Film	K : $\pm 10\%$
S : Solid	M : $\pm 20\%$
W : Wire Wound	

Type	Allowance
C : Ceramic	C : $\pm 0.25\text{pF}$
E : Electrolytic	D : $\pm 0.5\text{pF}$
P : Polyester	F : $\pm 1\text{pF}$
Polyprop	G : $\pm 3\text{pF}$
lene	J : $\pm 5\text{pF}$
T : Tantalum	K : $\pm 10\text{pF}$
	L : $\pm 15\text{pF}$
	M : $\pm 20\text{pF}$
	P : +100%, -0%
	Z : +80%, -20%

13.2.2. Electrical Replacement Parts List

Note: All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by PAVC-CSG.
Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	A1	K1KA12A00317	12P CONNECTOR	1	
	A3	K1KA14A00248	14P CONNECTOR	1	
	A5	K1KB31AA0140	31P CONNECTOR	1	
	A6	K1KA20AA0009	20P CONNECTOR	1	
	A7	K1KA11AA0715	11P CONNECTOR	1	
	A8	K1KA06AA0714	6P CONNECTOR	1	
	A9	K1KA06AA0508	6P CONNECTOR	1	
	A11	K1KA30AA0009	30P CONNECTOR	1	
	A12	K1KY15AA0607	15P CONNECTOR	1	
	A13	K1KY23AA0607	23P CONNECTOR	1	
	A14	K1KY23AA0607	23P CONNECTOR	1	
	A51	K1KY20AA0015	20P CONNECTOR	1	
	A52	K1KA13AA0666	13P CONNECTOR	1	
	A53	K1KA02AA0150	2P CONNECTOR	1	
	A70	K1KA04AA0104	4P CONNECTOR	1	
	C858	FIJ1E104A227	C 0.10UF, Z, 25V	1	
	C859	FIJ1E104A227	C 0.10UF, Z, 25V	1	
	C860	F2A1E101A599	E 100UF, 25V	1	
	C861	FIJ1E104A227	C 0.10UF, Z, 25V	1	
	C862	FIJ1E104A227	C 0.10UF, Z, 25V	1	
	C869	ECA1EHG471	E 470UF, 25V	1	
	C1102	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C1103	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1104	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1106	FI1G1H270A731	C 27UF, 50V	1	
	C1107	FI1G1H220A731	C 22UF, 50V	1	
	C1108	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1109	FI1H1A1050032	C 10UF, 50V	1	
	C1111	FI1H1A1050032	C 10UF, 50V	1	
	C1112	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1114	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1117	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C1122	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C1123	FI1H1A1050032	C 10UF, 50V	1	
	C2023	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2048	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2049	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2050	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2052	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2053	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2054	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C2055	FI1G1H150A731	C 15UF, 50V	1	
	C2056	FI1G1H150A731	C 15UF, 50V	1	
	C2057	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2058	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2059	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C2091	FI1G1H220A731	C 22UF, 50V	1	
	C2092	FI1G1H220A731	C 22UF, 50V	1	
	C2096	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2098	F2G0J2210013	E 220UF 6.3V	1	
	C2099	F2G0J2210013	E 220UF 6.3V	1	
	C2100	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2101	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C2102	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2105	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2106	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2107	F2G0J470A019	E 47UF 6.3V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2108	F2G0J470A019	E 47UF 6.3V	1	
	C2109	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2110	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2111	FI1H0J2250008	C 2.2UF, K, 16V	1	
	C2112	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C2113	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C2114	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2115	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2116	FI1G1H471A731	C 470UF, 50V	1	
	C2117	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2118	FI1H1A1050032	C 10UF, 50V	1	
	C2119	EEH1A221P	C 220PF, J, 10V	1	
	C2120	FI1G1H560A731	C 56UF, 50V	1	
	C2121	FI1G1H560A731	C 56UF, 50V	1	
	C2122	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2123	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2124	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2125	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2126	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C2127	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2128	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2129	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2135	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2136	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2137	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C2138	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2145	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2146	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2151	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C2174	FI1H1A1050032	C 10UF, 50V	1	
	C2175	F2G0J470A019	E 47UF 6.3V	1	
	C2176	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C2179	F2G0J470A019	E 47UF 6.3V	1	
	C2180	FI1H1A1050032	C 10UF, 50V	1	
	C2184	FI1G1H102A730	C 1000UF, 50V	1	
	C2187	FI1H0J2250008	C 2.2UF, K, 16V	1	
	C2188	FI1G1H471A730	C 470UF, 50V	1	
	C2189	FI1H1A1050032	C 10UF, 50V	1	
	C2191	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C2192	F2G0J470A019	E 47UF 6.3V	1	
	C2195	FI1G1H102A730	C 1000UF, 50V	1	
	C2197	FI1H1E333A129	C 0.033UF, 25V	1	
	C2198	FI1H1E333A129	C 0.033UF, 25V	1	
	C2201	FI1G1A473A053	C 0.47UF, 10V	1	
	C2202	FI1H0J2250008	C 2.2UF, K, 16V	1	
	C2203	FI1H1A1050032	C 10UF, 50V	1	
	C2204	FI1H1C105A008	C 1UF, K, 16V	1	
	C2213	FI1G1H102A730	C 1000UF, 50V	1	
	C2216	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2244	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C2245	FI1G1H102A730	C 1000UF, 50V	1	
	C2246	FIJ1A106A043	C 0.010UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2251	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2261	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2262	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2263	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2264	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2301	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2393	F1K1C1060004	C 0.010UF, 16V	1	
	C2394	F1J1H474A757	C 0.47UF, 50V	1	
	C2395	F1J1H474A757	C 0.47UF, 50V	1	
	C2400	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2401	F1G1H181A731	C 180UF, 50V	1	
	C2402	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2403	F2G1V220A020	E 22UF, 35V	1	
	C2404	F1G1H102A730	C 1000UF, 50V	1	
	C2407	F2H0J1010009	C 100UF, 6.3V	1	
	C2408	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2409	F2G0J1020022	E 1100PF, J, 6.3V	1	
	C2410	F1H0J2250008	C 2.2UF, K, 16V	1	
	C2411	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C2412	F2G1H100A031	E 10UF, 50V	1	
	C2413	F1H1A1050032	C 10UF, 50V	1	
	C2414	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2415	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2418	F1G1E103A123	C 0.010UF, K, 16V	1	
	C2419	F1G1H101A731	C 100PF, K, 50V	1	
	C2420	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2427	F1H1A1050032	C 10UF, 50V	1	
	C2430	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C2431	F1G1H101A731	C 100PF, K, 50V	1	
	C2432	F1G1H471A731	C 470UF, 50V	1	
	C2433	F1G1H471A731	C 470UF, 50V	1	
	C2434	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2437	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2510	F1K0J1060020	C 10UF, K, 6.3V	1	
	C2511	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2512	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2515	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2517	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2521	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2522	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C2523	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C2524	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C2526	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C2527	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C2601	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2602	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2603	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2604	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2605	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2608	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2609	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2610	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2611	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2612	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2613	F1G1H180A731	C 18UF, 50V	1	
	C2614	F1G1H120A731	C 12UF, 50V	1	
	C2615	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2616	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2617	F1G1A104A012	C 0.01UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2618	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2619	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2620	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2621	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2622	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2623	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2624	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2625	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2626	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2627	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2628	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2629	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2630	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2631	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2632	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2633	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2634	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2635	ECJ1VB1H473K	C 0.047UF, K, 50V	1	
	C2637	EEHBOG221P	C 220PF, J, 4V	1	
	C2638	EEHBOG470R	C 47PF, J, 4V	1	
	C2639	F2G1C2200036	E 22UF, 16V	1	PAVCCZ
	C2640	F2G1C2200036	E 22UF, 16V	1	PAVCCZ
	C2641	F2G1C2200036	E 22UF, 16V	1	PAVCCZ
	C2642	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2643	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2644	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2645	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2646	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2647	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2648	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2649	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2650	F2G1C2200036	E 22UF, 16V	1	PAVCCZ
	C2651	F1G1H100A565	C 100PF, K, 50V	1	
	C2652	ECGRLO680ER	C 68PF, J, 4V	1	
	C2657	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2658	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
	C2661	F1H1A1050032	C 10UF, 50V	1	
	C3099	F2G1C220A022	E 22UF, 16V	1	
	C3104	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3107	F1H1H470A971	C 47UF, K, 50V	1	PAVCCZ
	C3109	F1G1H222A730	C 2200UF, 50V	1	
	C3110	F2G1C1010034	E 100PF, J, 16V	1	
	C3115	F1G1H222A730	C 2200UF, 50V	1	
	C3116	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3117	F1H1H561A971	C 560UF, 50V	1	
	C3122	F1H1A1050032	C 10UF, 50V	1	
	C3123	F1H1A1050032	C 10UF, 50V	1	
	C3124	F1H1A1050032	C 10UF, 50V	1	
	C3128	F1H1H561A971	C 560UF, 50V	1	
	C3136	F1H1H561A971	C 560UF, 50V	1	
	C3137	F1H1H561A971	C 560UF, 50V	1	
	C3138	F1H1H561A971	C 560UF, 50V	1	
	C3139	F1H1H561A971	C 560UF, 50V	1	
	C3140	F1H1H561A971	C 560UF, 50V	1	
	C3141	F1H1H561A971	C 560UF, 50V	1	
	C3142	F1H1H561A971	C 560UF, 50V	1	
	C3143	F1H1H561A971	C 560UF, 50V	1	
	C3144	F1H1H561A971	C 560UF, 50V	1	
	C3145	F1H1H561A971	C 560UF, 50V	1	
	C3148	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3149	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3150	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3151	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3152	ECJ1VB1C105K	C 0.01UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C3154	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3172	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3173	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3180	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3181	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3221	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3222	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3223	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3225	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3226	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3245	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3246	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3247	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3248	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3249	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3250	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3253	FIH1A1050032	C 10UF, 50V	1	
	C3256	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C3257	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C3258	FIH1A1050032	C 10UF, 50V	1	
	C3259	FIH1A1050032	C 10UF, 50V	1	
	C3260	FIH1A1050032	C 10UF, 50V	1	
	C3261	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3262	FIH1A1050032	C 10UF, 50V	1	
	C3263	FIH1A1050032	C 10UF, 50V	1	
	C3264	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3265	EEH1B1C221UP	C 220PF, J, 16V	1	
	C3266	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3267	FIH1A1050032	C 10UF, 50V	1	
	C3268	FIH1A1050032	C 10UF, 50V	1	
	C3269	FIH1A1050032	C 10UF, 50V	1	
	C3270	FIH1A1050032	C 10UF, 50V	1	
	C3271	FIH1A1050032	C 10UF, 50V	1	
	C3272	FIH1A1050032	C 10UF, 50V	1	
	C3273	FIH1A1050032	C 10UF, 50V	1	
	C3274	FIH1A1050032	C 10UF, 50V	1	
	C3275	FIH1A1050032	C 10UF, 50V	1	
	C3276	FIH1A1050032	C 10UF, 50V	1	
	C3277	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3278	F2G1A221A149	E 220UF, 10V	1	
	C3279	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3280	F2G1A221A149	E 220UF, 10V	1	
	C3284	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3297	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3298	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3299	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3300	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C3302	EEH1B1C221UP	C 220PF, J, 16V	1	
	C3308	F2G1C100A022	C 10UF J 16V	1	
	C3310	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3311	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3319	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3320	F2G1C470A022	E 47UF, 16V	1	
	C3323	FIH1A1050032	C 10UF, 50V	1	
	C3701	ECJ2XC1H561K	C 560PF, K, 50V	1	
	C3703	ECJ2XC1H561K	C 560PF, K, 50V	1	
	C3711	ECJ2VF1H333Z	C 0.033UF, Z, 50V	1	
	C3712	ECJ2VF1H333Z	C 0.033UF, Z, 50V	1	
	C3750	FIJ1H102A721	C 1000UF, 50V	1	
	C3801	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3802	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3803	FIH1A1050032	C 10UF, 50V	1	
	C3804	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3806	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3807	FI1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C3808	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3809	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3810	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3811	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3812	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3813	FIJ0J106A004	C 0.010UF, K, 16V	1	
	C3814	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3815	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3816	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3817	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3818	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3819	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3820	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3823	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C3827	FIJ1A475A039	C 4.7UF, K, 10V	1	
	C3829	FIH1A1050032	C 10UF, 50V	1	
	C4005	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4006	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4008	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4010	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4011	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4013	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4014	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4015	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4016	FIJ1C475A170	C 4.7UF, K, 16V	1	
	C4018	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4019	FIJ1H474A757	C 0.47UF, 50V	1	
	C4020	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4021	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4022	FIJ1H474A757	C 0.47UF, 50V	1	
	C4023	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4024	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4025	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4027	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4028	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4030	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4032	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4033	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4034	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4035	FIH1A1050032	C 10UF, 50V	1	
	C4036	FIH1A1050032	C 10UF, 50V	1	
	C4038	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4039	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C4040	FI1G1H150A731	C 15UF, 50V	1	
	C4045	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4047	FIH1A1050032	C 10UF, 50V	1	
	C4049	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4050	FIH1A1050032	C 10UF, 50V	1	
	C4051	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4052	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4053	FI1G1C104A081	C 0.10UF, K, 16V	1	
	C4054	FIK1C1060004	C 0.010UF, 16V	1	
	C4055	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4056	F2G1C470A022	E 47UF, 16V	1	
	C4101	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4255	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4256	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4257	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4258	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4259	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4260	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4261	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4262	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4263	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4264	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4265	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C4266	FIH0J1050012	C 1UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4267	F1G1H1020008	C 1000UF, 50V	1	
	C4268	F1G1H1020008	C 1000UF, 50V	1	
	C4270	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4271	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4272	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4273	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4274	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4275	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4276	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4277	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4278	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4279	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4280	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4281	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4282	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4283	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4284	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4285	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4286	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4287	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4288	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4289	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4290	F1G1H1020008	C 1000UF, 50V	1	
	C4291	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4292	F1G1H1020008	C 1000UF, 50V	1	
	C4293	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4294	F1G1H1020008	C 1000UF, 50V	1	
	C4295	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4296	F1G1H1020008	C 1000UF, 50V	1	
	C4297	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4298	F1G1H1020008	C 1000UF, 50V	1	
	C4299	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4300	F2G0J470A019	E 47UF 6.3V	1	
	C4301	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4302	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4313	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4314	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4315	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4316	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4317	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4318	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4319	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4320	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4321	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4323	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4325	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4326	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4328	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4329	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4500	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4501	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4502	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4503	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4510	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4511	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4513	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4514	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4517	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4520	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4521	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4533	F1G1H680A731	C 68UF, 50V	1	
	C4534	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4535	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4537	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4547	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4548	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4549	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4550	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4551	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4552	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4553	F1G1H102A730	C 1000UF, 50V	1	
	C4554	F2G1C470A022	E 47UF, 16V	1	
	C4555	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4567	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4574	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4575	F1H1A1050032	C 10UF, 50V	1	
	C4580	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4585	F1H1A1050032	C 10UF, 50V	1	
	C4595	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4596	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4598	F1H1A1050032	C 10UF, 50V	1	
	C4599	F2G0J470A019	E 47UF 6.3V	1	
	C4600	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4601	F2G0J470A019	E 47UF 6.3V	1	
	C4602	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4603	F1H0J2250008	C 2.2UF, K, 16V	1	
	C4604	F1G1H471A730	C 470UF, 50V	1	
	C4605	F1H1A1050032	C 10UF, 50V	1	
	C4606	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4607	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4612	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4613	F1H1A1050032	C 10UF, 50V	1	
	C4614	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4616	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4617	F1J0G2260001	C 0.001UF, 6.3V	1	
	C4619	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4624	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4625	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4628	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4630	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4632	F1H1A1050032	C 10UF, 50V	1	
	C4634	F1H1A1050032	C 10UF, 50V	1	
	C4636	F1H1A1050032	C 10UF, 50V	1	
	C4638	F1H1A1050032	C 10UF, 50V	1	
	C4640	F1H1A1050032	C 10UF, 50V	1	
	C4642	F1H1A1050032	C 10UF, 50V	1	
	C4643	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4644	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4645	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4646	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4647	F1K1C1060004	C 0.010UF, 16V	1	
	C5001	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5002	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5003	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5004	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5005	F1H0J1050012	C 1UF, K, 16V	1	
	C5006	F1H0J1050012	C 1UF, K, 16V	1	
	C5007	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5008	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5009	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5010	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5011	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5012	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5013	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5014	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5015	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5016	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5017	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5018	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5019	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5020	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5021	F1H0J1050012	C 1UF, K, 16V	1	
	C5022	F1H0J1050012	C 1UF, K, 16V	1	
	C5023	F1H0J1050012	C 1UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5024	FIH0J1050012	C 1UF, K, 16V	1	
	C5025	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5026	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5027	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5028	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5029	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5030	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5031	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5032	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5033	FIH0J1050012	C 1UF, K, 16V	1	
	C5034	FIH0J1050012	C 1UF, K, 16V	1	
	C5035	FIH0J1050012	C 1UF, K, 16V	1	
	C5036	FIH0J1050012	C 1UF, K, 16V	1	
	C5037	FIH0J1050012	C 1UF, K, 16V	1	
	C5038	FIH0J1050012	C 1UF, K, 16V	1	
	C5039	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5040	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5041	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5042	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5043	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5044	FIH0J1050012	C 1UF, K, 16V	1	
	C5045	FIH0J1050012	C 1UF, K, 16V	1	
	C5046	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5047	FIH0J1050012	C 1UF, K, 16V	1	
	C5048	FIH0J2250008	C 2.2UF, K, 16V	1	
	C5049	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5050	FIH0J1050012	C 1UF, K, 16V	1	
	C5051	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5052	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5053	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5054	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5055	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5056	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5057	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5058	ECGRLOG680ER	C 68PF, J, 4V	1	
	C5059	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5060	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5061	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5062	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5063	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5064	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5065	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5066	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5067	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5073	FIH0J2250008	C 2.2UF, K, 16V	1	
	C5200	FIH1H180A971	C 18PF, K, 50V	1	
	C5201	FIH1H180A971	C 18PF, K, 50V	1	
	C5301	FIH1A1050032	C 10UF, 50V	1	
	C5302	FIg1C104A081	C 0.10UF, K, 16V	1	
	C5303	FIH1A1050032	C 10UF, 50V	1	
	C5311	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5312	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5316	FIg1A473A053	C 0.47UF, 10V	1	
	C5317	FIH1A1050032	C 10UF, 50V	1	
	C5320	FIH1E104A129	C 0.1UF, 25V	1	
	C5321	FIg1E103A123	C 0.010UF, K, 16V	1	
	C5322	FIJ1A475A039	C 4.7UF, K, 10V	1	
	C5323	FIg1H471A730	C 470UF, 50V	1	
	C5324	FIg1H221A730	C 220UF, 50V	1	
	C5325	FIg1E103A123	C 0.010UF, K, 16V	1	
	C5326	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5327	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5328	ECGRLOG680ER	C 68PF, J, 4V	1	
	C5329	ECGRLOG680ER	C 68PF, J, 4V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5341	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5395	FIJ1E105A171	C 1 UF 25V	1	
	C5396	EEHBI470P	C 47PF, J, 25V	1	
	C5397	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5399	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5432	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5433	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5434	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5435	FIg1E103A123	C 0.010UF, K, 16V	1	
	C5436	FIH1E104A129	C 0.1UF, 25V	1	
	C5441	FIH1E104A129	C 0.1UF, 25V	1	
	C5442	FIH1H682A970	C 6800PF, K, 50V	1	PAVCCZ
	C5443	F2G0J2210013	E 220UF 6.3V	1	
	C5452	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5453	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5454	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5455	FIg1E103A123	C 0.010UF, K, 16V	1	
	C5456	FIH1E104A129	C 0.1UF, 25V	1	
	C5461	FIH1E104A129	C 0.1UF, 25V	1	
	C5462	FIH1H392A970	C 3900PF, K, 50V	1	
	C5463	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5464	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5465	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5466	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5467	FIg1C104A081	C 0.10UF, K, 16V	1	
	C5468	F2G0G101A007	E 100UF 6.3V	1	
	C5469	F2G0G101A007	E 100UF 6.3V	1	
	C5470	FIJ0J106A020	C 0.010UF, K, 16V	1	
	C5471	FIJ0J106A020	C 0.010UF, K, 16V	1	
	C5472	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5473	F2H0J1010009	C 100UF, 6.3V	1	
	C5474	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5475	F2G1C1010034	E 100PF, J, 16V	1	
	C5476	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5477	F2H0J1010009	C 100UF, 6.3V	1	
	C5478	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5501	F2A1C471A537	E 470UF, 16V	1	
	C5502	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
	C5503	F2A1C471A537	E 470UF, 16V	1	
	C5504	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
	C5505	F2A1E102A220	E 1000UF, 25V	1	
	C5506	ECJ2VB1E104K	C 0.1UF, K, 25V	1	
	C5521	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5522	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5531	FIH1A1050032	C 10UF, 50V	1	
	C5533	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5541	FIH1E104A129	C 0.1UF, 25V	1	
	C5542	FIH1A1050032	C 10UF, 50V	1	
	C5543	FIg1H471A731	C 470UF, 50V	1	
	C5544	FIJ0J106A020	C 0.010UF, K, 16V	1	
	C5545	FIg1A104A012	C 0.01UF, K, 10V	1	
	C5546	F2G0G101A007	E 100UF 6.3V	1	
	C5595	F2G1C2200036	E 22UF, 16V	1	PAVCCZ
	C5600	FIH1A1050032	C 10UF, 50V	1	
	C5601	FIg1C104A116	C 0.10UF, K, 16V	1	
	C5602	ECGRLOG680ER	C 68PF, J, 4V	1	
	C5603	FIg1E103A123	C 0.010UF, K, 16V	1	
	C5604	FIg1C223A116	C 0.022UF, K, 16V	1	
	C5605	FIJ1A475A039	C 4.7UF, K, 10V	1	
	C5606	FIg1H471A730	C 470UF, 50V	1	
	C5607	FIg1H221A731	C 220UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5611	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5612	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5615	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5616	F1G1C223A116	C 0.022UF, K, 16V	1	
	C5617	F1H1A1050032	C 10UF, 50V	1	
	C5618	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5619	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5620	F1H1E104A129	C 0.1UF, 25V	1	
	C5621	F1G1A473A053	C 0.47UF, 10V	1	
	C5622	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5623	F1G1H221A730	C 220UF, 50V	1	
	C5624	F1G1H221A730	C 220UF, 50V	1	
	C5625	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5626	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5627	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5628	ECGRLO680ER	C 68PF, J, 4V	1	
	C5629	ECGRLO680ER	C 68PF, J, 4V	1	
	C5631	EEHBE1E470P	C 47PF, J, 25V	1	
	C5632	F1J1E105A171	C 1 UF 25V	1	
	C5636	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5637	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5638	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5639	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5640	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5641	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5642	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5643	F1H1E104A129	C 0.1UF, 25V	1	
	C5644	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5661	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5662	F1G1A473A053	C 0.47UF, 10V	1	
	C5663	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5688	F1H1A225A051	C 22UF, 50V	1	
	C5691	EEHBE1C220UR	C 22PF, J, 16V	1	
	C5695	F2G0J470A019	E 47UF 6.3V	1	
	C5730	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5731	F2G0J470A019	E 47UF 6.3V	1	
	C7700	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7701	F1H1A225A051	C 22UF, 50V	1	
	C7702	F2G0G101A007	E 100UF 6.3V	1	
	C7704	F1H1A1050032	C 10UF, 50V	1	
	C7705	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7706	F1H1A1050032	C 10UF, 50V	1	
	C7708	F1H1A1050032	C 10UF, 50V	1	
	C7709	F1H1A225A051	C 22UF, 50V	1	
	C7710	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7711	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7712	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7713	F1H1H150A971	C 15PF, K, 50V	1	
	C7714	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7715	F1H1H180A971	C 18PF, K, 50V	1	
	C7716	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7717	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7718	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7719	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7720	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7721	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7724	F1H1H150A971	C 15PF, K, 50V	1	
	C7725	F1H1H150A971	C 15PF, K, 50V	1	
	C7729	F1H1H150A971	C 15PF, K, 50V	1	
	C7731	F1H1H150A971	C 15PF, K, 50V	1	
	C7732	F1H1C104A144	C 0.1UF, K, 16V	1	
	C7733	F1H1C104A144	C 0.1UF, K, 16V	1	
	C7736	F1H1C104A144	C 0.1UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C7737	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7738	F2G0G101A007	E 100UF 6.3V	1	
	C7742	F1J0J106A020	C 0.010UF, K, 16V	1	
	C8001	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8002	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8003	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8004	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8005	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8006	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8007	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8008	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8009	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8010	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8011	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8012	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8014	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8015	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8016	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8017	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8018	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8019	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8020	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8021	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8022	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8023	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8024	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8025	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8026	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8027	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8028	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8029	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8030	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8031	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8032	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8033	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8034	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8035	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8036	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8037	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8038	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8039	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8040	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8041	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8042	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8043	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8044	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8045	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8046	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8047	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8048	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8049	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8050	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8051	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8052	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8053	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8054	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8055	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8056	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8057	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8058	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8059	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8060	F1H0J1050012	C 1UF, K, 16V	1	
	C8061	F1H0J1050012	C 1UF, K, 16V	1	
	C8062	F1G1A104A012	C 0.01UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8070	FIH0J1050012	C 1UF, K, 16V	1	
	C8071	FIH0J1050012	C 1UF, K, 16V	1	
	C8072	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8073	FIH0J1050012	C 1UF, K, 16V	1	
	C8074	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8075	FIH0J1050012	C 1UF, K, 16V	1	
	C8076	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8077	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8078	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8079	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8080	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8081	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8082	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8083	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8084	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8085	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8101	FI1G1H180A731	C 18UF, 50V	1	
	C8102	FI1G1H7R0A732	C 7.0UF, 50V	1	
	C8103	FIH0J1050012	C 1UF, K, 16V	1	
	C8104	FI1G1C1030008	C 0.010UF, K, 16V	1	
	C8105	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8106	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8107	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8201	FI1G1A105A047	C 1UF, K, 10V	1	
	C8202	ECGMX0E101R	E 100UF, 10V	1	
	C8203	FI1G1A105A047	C 1UF, K, 10V	1	
	C8204	FI1G1A105A047	C 1UF, K, 10V	1	
	C8205	FI1G1A105A047	C 1UF, K, 10V	1	
	C8206	FI1G1A105A047	C 1UF, K, 10V	1	
	C8208	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8209	FI1G1A105A047	C 1UF, K, 10V	1	
	C8210	FI1G1A105A047	C 1UF, K, 10V	1	
	C8211	FI1G1A105A047	C 1UF, K, 10V	1	
	C8212	FI1G1A105A047	C 1UF, K, 10V	1	
	C8213	FI1G1A105A047	C 1UF, K, 10V	1	
	C8214	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8215	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8216	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8217	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8218	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8219	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8220	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8221	FI1G1A105A047	C 1UF, K, 10V	1	
	C8222	FI1G1A105A047	C 1UF, K, 10V	1	
	C8223	FI1G1A105A047	C 1UF, K, 10V	1	
	C8224	FI1G1A105A047	C 1UF, K, 10V	1	
	C8225	FI1G1A105A047	C 1UF, K, 10V	1	
	C8226	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8227	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8228	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8229	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8230	FI1G1A105A047	C 1UF, K, 10V	1	
	C8231	ECGMX0E101R	E 100UF, 10V	1	
	C8232	FI1G1A105A047	C 1UF, K, 10V	1	
	C8233	FI1G1A105A047	C 1UF, K, 10V	1	
	C8234	FI1G1A105A047	C 1UF, K, 10V	1	
	C8235	FI1G1A105A047	C 1UF, K, 10V	1	
	C8306	FI1G1H102A730	C 1000UF, 50V	1	
	C8307	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8309	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8310	F2G0G101A007	E 100UF 6.3V	1	
	C8311	FI1G1H180A731	C 18UF, 50V	1	
	C8312	FI1G1H120A731	C 12UF, 50V	1	
	C8313	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8314	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8319	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8320	FI1G1E103A123	C 0.010UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8321	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8327	FI1H1A1050032	C 10UF, 50V	1	
	C8328	FI1H1A1050032	C 10UF, 50V	1	
	C8329	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8330	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8331	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8332	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8333	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8334	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8335	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8336	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8338	FI1G1H220A731	C 22UF, 50V	1	
	C8339	FI1G1H220A731	C 22UF, 50V	1	
	C8340	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8402	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8404	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8408	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8410	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8411	F2G1A101A019	E 100UF, 10V	1	
	C8412	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8413	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8414	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8416	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8417	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C8418	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8419	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8420	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8421	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8422	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8423	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8424	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8426	F2G1A101A019	E 100UF, 10V	1	
	C8501	F2G0J470A019	E 47UF 6.3V	1	
	C8580	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8581	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8601	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8620	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8621	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8622	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8623	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8624	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8625	FI1G1H5R0A732	C 5.0PF, K, 50V	1	
	C8626	FI1G1H5R0A732	C 5.0PF, K, 50V	1	
	C8627	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8628	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8629	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8630	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8631	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8632	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8633	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8634	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8635	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8637	F2G0J101A019	E 100UF 6.3V	1	
	C8638	FI1H0J1050012	C 1UF, K, 16V	1	
	C8639	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8640	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8641	FI1G1A104A012	C 0.01UF, K, 10V	1	
	C8642	FI1J1A106A043	C 0.010UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8643	ECUV1A335KBN	C 33UF 10V	1	
	C8644	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8645	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8646	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8647	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8648	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8649	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8650	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8651	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8652	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8653	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8654	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8851	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8852	F1G1H680A731	C 68UF, 50V	1	
	C8853	F1G1H680A731	C 68UF, 50V	1	
	C8854	F1G1H680A731	C 68UF, 50V	1	
	C8855	F1G1H680A731	C 68UF, 50V	1	
	C8856	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8951	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8952	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C8953	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8954	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8955	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8956	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9001	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9033	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9034	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9035	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9036	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9037	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9055	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9056	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9057	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9058	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9067	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9068	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9069	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9096	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9097	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9098	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9099	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9100	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9101	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9102	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9103	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9104	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9105	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9106	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9107	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9108	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9109	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9110	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9111	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9112	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9113	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9115	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9116	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9119	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9120	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9121	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9122	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9123	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9124	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9125	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9126	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9127	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9128	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9129	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9130	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9131	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9132	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9133	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9135	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9136	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9142	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9143	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9144	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9145	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9146	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9147	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9148	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9149	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9150	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9152	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9153	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9154	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9155	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9156	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9157	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9158	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9159	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9160	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9161	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9162	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9163	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9164	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9165	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9168	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9169	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9170	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9171	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9172	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9173	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9174	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9175	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9176	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9177	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9178	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9179	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9180	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9181	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9182	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9183	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9184	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9185	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9186	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9187	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9188	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9189	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9190	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9191	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9192	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9193	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9194	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9195	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9196	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9198	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9199	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9200	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9201	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9202	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9203	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9204	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9205	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9206	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9207	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9208	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9209	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9210	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9211	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9212	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9213	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9214	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9215	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9216	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9217	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9218	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9219	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9220	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9221	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9222	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9223	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9224	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9226	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9227	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9228	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9230	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9231	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9232	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9233	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9234	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9235	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9236	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9237	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9239	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9240	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9241	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9242	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9243	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9244	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9245	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9246	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9247	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9248	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9249	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9250	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9303	FlJ1E105A171	C 1 UF 25V	1	
	C9305	FlJ1E105A171	C 1 UF 25V	1	
	C9307	FlJ1E105A171	C 1 UF 25V	1	
	C9309	FlJ1E105A171	C 1 UF 25V	1	
	C9313	FlH1A1050032	C 10UF, 50V	1	
	C9317	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9319	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9321	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9323	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9333	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9335	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9337	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9339	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9341	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9343	FlJ1E3340003	C 0.33UF, Z, 25V	1	
	C9345	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9347	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9353	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9359	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9361	EEEFGL471P	E 470UF, 25V	1	
	C9363	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9364	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9375	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9377	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9379	FlH1H223A970	C 0.22UF, K, 50V	1	
	C9381	FlH1H223A970	C 0.22UF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9383	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9385	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9387	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9389	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9406	EEH1B1E470P	C 47PF, J, 25V	1	
	C9407	FlH1C104A143	C 0.1UF, K, 16V	1	
	C9408	FlJ1E105A171	C 1 UF 25V	1	
	C9469	FlG1C104A119	C 0.10UF, K, 16V	1	
	C9535	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9536	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9537	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9538	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9539	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9540	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9541	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9542	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9543	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9544	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9545	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9546	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9547	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9548	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9549	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9550	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9551	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9552	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9553	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9823	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9825	FlG1H101A731	C 100PF, K, 50V	1	
	C9832	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9837	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9840	FlG1E103A123	C 0.010UF, K, 16V	1	
	C9841	FlG1C104A119	C 0.10UF, K, 16V	1	
	C9842	FlG1C104A119	C 0.10UF, K, 16V	1	
	C9844	FlG1E103A123	C 0.010UF, K, 16V	1	
	C9845	FlG1C104A119	C 0.10UF, K, 16V	1	
	C9846	FlG1C104A119	C 0.10UF, K, 16V	1	
	C9858	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9859	FlG1E103A123	C 0.010UF, K, 16V	1	
	C9860	FlJ0J475A035	C 4.7UF, K, 16V	1	
	C9861	FlH1E104A129	C 0.1UF, 25V	1	
	C9862	FlH1E104A129	C 0.1UF, 25V	1	
	C9863	FlJ0J475A035	C 4.7UF, K, 16V	1	
	C9864	FlH1E104A129	C 0.1UF, 25V	1	
	C9865	ECGR10G680ER	C 68PF, J, 4V	1	
	C9866	ECGR10G680ER	C 68PF, J, 4V	1	
	C9867	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9868	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9869	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9870	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9871	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9872	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9873	ECGR10G680ER	C 68PF, J, 4V	1	
	C9874	FlG1H680A731	C 68UF, 50V	1	
	C9877	FlG1H680A731	C 68UF, 50V	1	
	C9878	FlG1E103A123	C 0.010UF, K, 16V	1	
	C9879	FlG1C153A116	C 0.015UF, K, 16V	1	
	C9880	FlG1A563A032	C 0.56UF, 10V	1	
	C9881	FlG1E103A123	C 0.010UF, K, 16V	1	
	C9882	FlG1C822A116	C 8200UF, K, 16V	1	
	C9883	FlG1H101A731	C 100PF, K, 50V	1	
	C9884	FlG1H102A730	C 1000UF, 50V	1	
	C9885	FlG1H102A730	C 1000UF, 50V	1	
	C9886	FlH1E104A129	C 0.1UF, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9887	F1H1E104A129	C 0.1UF, 25V	1	
	C9888	F1G1H361A731	C 360UF, 50V	1	
	C9927	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9928	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9929	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9930	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9931	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9932	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9933	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9934	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9935	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9936	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9937	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9938	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9939	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9940	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9941	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9942	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9943	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9944	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9945	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9946	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9947	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9948	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9951	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9961	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9966	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9971	F1G1H180A731	C 18UF, 50V	1	
	C9972	F1G1H150A731	C 15UF, 50V	1	
	D3	K1KA14B00129	14P CONNECTOR	1	
	D5	K1KB31BA0064	31P CONNECTOR	1	
	D6	K1KA20AA0009	20P CONNECTOR	1	
	D20	K1MN35BA0266	35P CONNECTOR	1	
	D25	K1KA13B00069	13P CONNECTOR	1	
	D31	K1MN68BA0266	68P CONNECTOR	1	
	D32	K1MN68BA0266	68P CONNECTOR	1	
	D33	K1MN68BA0266	68P CONNECTOR	1	
	D853	MA2J11100L	DIODE	1	
	D855	MA2J11100L	DIODE	1	
	D856	MA2J11100L	DIODE	1	
	D857	MA2J11100L	DIODE	1	
	D859	B0JCME000037	DIODE	1	
	D860	MAZ81100ML	ZENER DIODE	1	
	D861	MA2J11100L	DIODE	1	
	D862	MAZ80330LL	ZENER DIODE	1	
	D1107	MA704A	DIODE	1	
	D1112	MA2J72800L	ZENER DIODE	1	
	D2004	MA2J11100L	DIODE	1	
	D2005	MA2J11100L	DIODE	1	
	D2006	MA2J11100L	DIODE	1	
	D2007	MA2J11100L	DIODE	1	
	D2009	MA2J11100L	DIODE	1	
	D2010	MA2J11100L	DIODE	1	
	D2013	MA2J11100L	DIODE	1	
	D2020	MA3X78900L	ZENER DIODE	1	
	D2024	B0BC03900015	ZENER DIODE	1	
	D2201	MA704A	DIODE	1	
	D2300	MA2J11100L	DIODE	1	
	D2301	B0HCMM000014	DIODE	1	
	D2302	B0HCMM000014	DIODE	1	
	D2512	MAZ80560ML	ZENER DIODE	1	
	D2520	LNJ107W5PRW	LED	1	
	D2524	MAZ80560ML	ZENER DIODE	1	
	D2525	LN1471YTR	LED	1	
	D2526	MAZ80560ML	ZENER DIODE	1	
	D3057	B0BC01100001	ZENER DIODE	1	
	D3068	MAZ81400ML	ZENER DIODE	1	
	D3069	MAZ81400ML	ZENER DIODE	1	
	D3077	MAZ81400ML	ZENER DIODE	1	
	D3078	MAZ81400ML	ZENER DIODE	1	
	D3082	B0BC01100001	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D3095	MA704A	DIODE	1	
	D3096	MA704A	DIODE	1	
	D3701	MAZ81400ML	ZENER DIODE	1	
	D3702	MAZ81400ML	ZENER DIODE	1	
	D3709	MAZ81400ML	ZENER DIODE	1	
	D3710	MAZ81400ML	ZENER DIODE	1	
	D3711	MAZ81400ML	ZENER DIODE	1	
	D3801	EZAEG2A50AX	DIODE	1	
	D3802	EZAEG2A50AX	DIODE	1	
	D3803	EZAEG2A50AX	DIODE	1	
	D3804	EZAEG2A50AX	DIODE	1	
	D3805	EZAEG2A50AX	DIODE	1	
	D3806	EZAEG2A50AX	DIODE	1	
	D3807	EZJZ0V80008B	VARISTOR	1	
	D3808	EZJZ0V80008B	VARISTOR	1	
	D3809	EZAEG2A50AX	DIODE	1	
	D3810	EZAEG2A50AX	DIODE	1	
	D3811	EZJZ0V80008B	VARISTOR	1	
	D3813	B0HCMM000014	DIODE	1	
	D3814	B0HCMM000014	DIODE	1	
	D3815	EZJZ0V120JA	VARISTOR	1	
	D4502	EZAEG2A50AX	DIODE	1	
	D4503	EZAEG2A50AX	DIODE	1	
	D4504	EZAEG2A50AX	DIODE	1	
	D4505	EZAEG2A50AX	DIODE	1	
	D4506	EZAEG2A50AX	DIODE	1	
	D4507	EZAEG2A50AX	DIODE	1	
	D4508	EZAEG2A50AX	DIODE	1	
	D4509	EZAEG2A50AX	DIODE	1	
	D4510	EZAEG2A50AX	DIODE	1	
	D4511	EZAEG2A50AX	DIODE	1	
	D4512	EZAEG2A50AX	DIODE	1	
	D4513	B0BC5R6A0275	DIODE	1	
	D4514	EZAEG2A50AX	DIODE	1	
	D4515	B0BC5R6A0275	DIODE	1	
	D4516	EZAEG2A50AX	DIODE	1	
	D4517	EZAEG2A50AX	DIODE	1	
	D4518	EZAEG2A50AX	DIODE	1	
	D4519	EZAEG2A50AX	DIODE	1	
	D4520	EZAEG2A50AX	DIODE	1	
	D4521	EZAEG2A50AX	DIODE	1	
	D4522	EZAEG2A50AX	DIODE	1	
	D4523	EZAEG2A50AX	DIODE	1	
	D4541	MA2J11100L	DIODE	1	
	D4542	MA2J11100L	DIODE	1	
	D4561	MA2J11100L	DIODE	1	
	D4562	MA2J11100L	DIODE	1	
	D4564	MA2J11100L	DIODE	1	
	D4565	MA2J11100L	DIODE	1	
	D4566	B0HCMM000014	DIODE	1	
	D5201	MA2J72800L	ZENER DIODE	1	
	D5301	MA22D3900L	DIODE	1	
	D5302	MA22D3900L	DIODE	1	
	D5303	B0JCDD000002	DIODE	1	
	D5304	B0JCDD000002	DIODE	1	
	D5307	B0BC4R000002	ZENER DIODE	1	
	D5308	B0BC4R000002	ZENER DIODE	1	
	D5406	B0JCME000037	DIODE	1	
	D5407	B0BC4R700007	ZENER DIODE	1	
	D5408	B0BC4R700007	ZENER DIODE	1	
	D5409	B0JCME000037	DIODE	1	
	D5410	B0BC4R700007	ZENER DIODE	1	
	D5411	B0BC4R700007	ZENER DIODE	1	
	D5502	B0BC01000035	ZENER DIODE	1	
	D5503	B0BC01100001	ZENER DIODE	1	
	D5504	B0BC6R600005	ZENER DIODE	1	
	D5521	B0ADEJ000035	ZENER DIODE	1	PAVCCZ
	D5522	B0ADEJ000035	ZENER DIODE	1	PAVCCZ
	D5574	B0BC3R700006	ZENER DIODE	1	
	D5575	B0BC3R700006	ZENER DIODE	1	
	D5576	MA3X152E0L	ZENER DIODE	1	
	D5577	MAZ80680LL	ZENER DIODE	1	
	D5578	MA8120M	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D5579	MAZ80680LL	ZENER DIODE	1	
	D5580	MA2J11100L	DIODE	1	
	D5600	B0BC4R700007	ZENER DIODE	1	
	D5601	MA22D3900L	DIODE	1	
	D5602	MA22D3900L	DIODE	1	
	D5603	B0JCDD000002	DIODE	1	
	D5604	B0JCDD000002	DIODE	1	
	D5605	MA22D3900L	DIODE	1	
	D5606	B0JCDD000002	DIODE	1	
	D5607	B0BC4R700007	ZENER DIODE	1	
	D5608	B0BC4R700007	ZENER DIODE	1	
	D5691	B0BC6R600005	ZENER DIODE	1	
	D5692	MAZ80560LL	ZENER DIODE	1	
	D8901	MA2J72800L	ZENER DIODE	1	
	D8952	MA2J72800L	ZENER DIODE	1	
	D9002	K7AAAY000003	PHOTO LINK	1	
	D9014	MA2J11100L	DIODE	1	
	D9017	MA2J11100L	DIODE	1	
	D9024	B0JCCE000008	DIODE	1	
	D9025	B0JCCE000008	DIODE	1	
	D9026	B0JCCE000008	DIODE	1	
	D9027	B0BC3R3A0273	ZENER DIODE	1	
	D9028	B0BC3R3A0273	ZENER DIODE	1	
	D9029	B0BC3R3A0273	ZENER DIODE	1	
	D9110	B0JCGD000002	DIODE	1	
	D9807	B0JCCE000008	DIODE	1	
	D9808	B0JCCE000008	DIODE	1	
	D9812	MA22D3900L	DIODE	1	
	D9813	B0JCGD000002	DIODE	1	
	D9814	B0JCGD000002	DIODE	1	
	D9815	B0JCGD000002	DIODE	1	
	D9816	MA22D3900L	DIODE	1	
	D9817	MA22D3900L	DIODE	1	
	FL3710	J0ZZA0000091	FILTER	1	
	FL3711	J0ZZA0000091	FILTER	1	
	FL3712	J0ZZA0000091	FILTER	1	
	FL3713	J0ZZA0000091	FILTER	1	
	FL3714	J0ZZA0000091	FILTER	1	
	FL4206	ECJ1VB0J474K	C 0.47UF, K, 6.3V	1	
	FL5015	J0JAD0000028	CHIP INDUCTOR	1	
	FL5016	J0JAD0000028	CHIP INDUCTOR	1	
	FL5017	J0JAD0000028	CHIP INDUCTOR	1	
	FL5018	J0JAD0000028	CHIP INDUCTOR	1	
	FL5019	J0JAD0000028	CHIP INDUCTOR	1	
	FL5020	J0JAD0000028	CHIP INDUCTOR	1	
	FL5731	J0HABH000013	LC FILTER	1	
	FL5732	J0HABH000013	LC FILTER	1	
	FL5733	J0HABH000013	LC FILTER	1	
	FL5734	J0HABH000013	LC FILTER	1	
	FL9001	J0HABB000003	LC FILTER	1	
	FL9002	J0HABB000003	LC FILTER	1	
	FL9003	J0HABB000004	LC FILTER	1	
	FL9004	J0HABB000004	LC FILTER	1	
	FL9005	J0HABB000004	LC FILTER	1	
	FL9803	FIJ1E104A148	C 0.10UF, Z, 25V	1	
	FL9805	FIJ1E104A148	C 0.10UF, Z, 25V	1	
	FL9806	FIJ1E104A148	C 0.10UF, Z, 25V	1	
	G51	K1KY16BA0192	16P CONNECTOR	1	
	GH10	K1FY121E0001	CONNECTOR	1	
	GH11	K1KA30AA0009	30P CONNECTOR	1	
	GS09	K1KA06A00508	6P CONNECTOR	1	
	H12	K1KA04AA0190	4P CONNECTOR	1	
	HC12	K1KY15AA0606	15P CONNECTOR	1	
	HC13	K1KY23AA0606	23P CONNECTOR	1	
	HC14	K1KY23AA0606	23P CONNECTOR	1	
	HC15	K1KA11AA0715	11P CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	HC16	K1KA20AA0009	20P CONNECTOR	1	
	IC850	C0DBAZF00003	IC	1	
	IC1100	MNZSFG3GP53	IC	1	
	IC1101	TVRP987-1	IC	1	PAVCCZ
	IC2008	C0CBCBE00001	IC	1	
	IC2012	C1BB00000947	IC	1	
	IC2013	C0DBGYY00281	IC	1	
	IC2106	C1AB00002909	IC	1	
	IC2107	C0DBFFD00003	IC	1	
	IC2109	C0DBGHF00001	IC	1	
	IC2110	C0DBGHF00001	IC	1	
	IC2403	C1AB00002877	IC	1	
	IC2602	C3ABRY000037	IC	1	PAVCCZ
	IC2603	C0DBEFH00002	IC	1	PAVCCZ
	IC2604	C1AB00002930	IC	1	PAVCCZ
	IC3007	AN15876A-VT	IC	1	
	IC3009	AN15862A-VT	IC	1	
	IC3801	C1AB00002835	IC	1	
	IC3802	TVRP984	IC	1	PAVCCZ
	IC4001	C1AB00002687	IC	1	
	IC4002	C0CBCAC00358	IC	1	
	IC4005	C0CBCBC00227	IC	1	
	IC4013	C0JBAZ002060	IC	1	
	IC4200	C1AB00002886	IC	1	
	IC4503	C1AB00002929	IC	1	
	IC4510	C1AB00002966	IC	1	
	IC4511	C0CBCBE00001	IC	1	
	IC4512	C0DBGYY00477	IC	1	
	IC4513	C0DBGYY00477	IC	1	
	IC5001	C3ABRY000015	IC	1	
	IC5002	C3ABRY000015	IC	1	
	IC5100	MN84527	IC	1	
	IC5300	C0CBCBD00062	IC	1	
	IC5301	C0DBAYY00274	IC	1	
	IC5402	C0DBAYY00183	IC	1	
	IC5403	C0DBAYY00183	IC	1	
	IC5404	C0DBEHG00006	IC	1	
	IC5405	C0DBGYY00204	IC	1	
	IC5501	EHMDD9851	LINEAR IC	1	
	IC5562	C0CBCAC00282	IC	1	
	IC5563	C0CBCAF00032	IC	1	PAVCCZ
	IC5600	C0DBAYY00273	IC	1	
	IC5601	C0DBAYY00274	IC	1	
	IC5660	C0EBM0000026	IC	1	
	IC7700	TVRP965	IC	1	PAVCCZ
	IC7701	C0DBEHG00006	IC	1	
	IC7702	C1CB00002668	IC	1	
	IC8001	MN2WS0031CTY	IC	1	
	IC8101	C0ZBZ0001567	IC	1	
	IC8201	C3ABSY000010	IC	1	
	IC8202	C3ABSY000010	IC	1	
	IC8203	C3ABRY000015	IC	1	
	IC8204	C3ABRY000015	IC	1	
	IC8301	C1AB00002710	IC	1	
	IC8302	C0DBGFD00004	IC	1	
	IC8401	C0JBAZ002800	IC	1	
	IC8402	C1ZBZ0003811	IC	1	PAVCCZ
	IC8403	C0ZBZ0001584	IC	1	PAVCCZ
	IC8406	C0JBAZ002684	IC	1	PAVCCZ
	IC8407	C0JBAZ002684	IC	1	PAVCCZ
	IC8408	C0JBAE000354	IC	1	
	IC8580	TVRQ048-1	IC	1	PAVCCZ
	IC8601	TVRQ099-2	IC	1	PAVCCZ
	IC8620	C1CB00002607	IC	1	
	IC8621	C0DBZYY00266	IC	1	
	IC8950	C0DBEJG00001	IC	1	
	IC9001	C1AB00002875	IC	1	(HC)
	IC9001	TVRP848-2	IC	1	PAVCCZ (D)
	IC9002	C1ZBZ0003577	IC	1	
	IC9003	C1ZBZ0003775	IC	1	(HC)
	IC9003	MNZSFG4GPF2	IC	1	(D)

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC9011	C0EBF0000431	IC	1	
	IC9013	C0JBAZ002060	IC	1	
	IC9019	C0JBAZ001120	IC	1	
	IC9300	MN84526	IC	1	
	IC9301	C3ABQJ000055	IC	1	
	IC9303	TVRP849-2	IC	1	PAVCCZ
	IC9400	MN84526	IC	1	
	IC9401	C3ABQJ000055	IC	1	
	IC9500	C12BZ0003760	IC	1	
	IC9802	C0JBAZ001120	IC	1	
	IC9803	C0JBAZ001120	IC	1	
	IC9805	C0DBAYY00274	IC	1	
	IC9806	C0DBAYY00273	IC	1	
	JA3701	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3702	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3703	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3704	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3705	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3706	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3707	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3751	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3753	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3754	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3755	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3756	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3757	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3758	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3759	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3760	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3761	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JK3002A	K1FY121A0006	CONNECTOR	1	PAVCCZ
	JK3003A	K1FY121A0006	CONNECTOR	1	PAVCCZ
	JK3100A	K2HA7YYA0001	JACK	1	PAVCCZ
	JK3701	K4AK18B00007	TERMINAL	1	
	JK4500	K1FY119D0003	CONNECTOR	1	
	JK4501	K1FY119D0003	CONNECTOR	1	
	JK7702	K1NA09E00080	9P CONNECTOR	1	
	JK8401	K1NA68B00051	68P CONNECTOR	1	PAVCCZ
	JK9001	K1FB315A0006	CONNECTOR	1	
	JS851	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS852	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS1101	D0YAR0000007	M 0 OHM 1/4W	1	
	JS1106	D0YAR0000007	M 0 OHM 1/4W	1	
	JS2059	D0YAR0000007	M 0 OHM 1/4W	1	
	JS2060	D0YAR0000007	M 0 OHM 1/4W	1	
	JS2061	D0YAR0000007	M 0 OHM 1/4W	1	
	JS2320	D0YAR0000007	M 0 OHM 1/4W	1	
	JS3039	D0YAR0000007	M 0 OHM 1/4W	1	
	JS3704	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3705	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3707	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3708	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3712	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3713	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS4002	D0YAR0000007	M 0 OHM 1/4W	1	
	JS7700	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS9325	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS9326	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	K1	K1KY12B00001	12P CONNECTOR	1	
	L852	G0C150MA0056	PEAKING COIL	1	
	L1100	J0JYC0000068	CHIP INDUCTOR	1	
	L2001	G1C150KA0038	INDUCTION COIL	1	
	L2005	J0JCC0000284	CHIP INDUCTOR	1	
	L2006	J0JCC0000284	CHIP INDUCTOR	1	
	L2021	G1C470MA0291	INDUCTION COIL	1	
	L2022	G1C100MA0072	INDUCTION COIL	1	
	L2025	J0JCC0000059	CHIP INDUCTOR	1	
	L2026	J0JCC0000059	CHIP INDUCTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L2029	J0JCC0000059	CHIP INDUCTOR	1	
	L2030	J0JYC0000068	CHIP INDUCTOR	1	
	L2031	J0JYC0000068	CHIP INDUCTOR	1	
	L2032	J0JYC0000068	CHIP INDUCTOR	1	
	L2036	J0JYC0000068	CHIP INDUCTOR	1	
	L2300	J0JYC0000068	CHIP INDUCTOR	1	
	L3032	J0JCC0000100	CHIP INDUCTOR	1	
	L3033	J0JCC0000100	CHIP INDUCTOR	1	
	L3034	J0JCC0000100	CHIP INDUCTOR	1	
	L3035	J0JCC0000100	CHIP INDUCTOR	1	
	L3036	J0JCC0000100	CHIP INDUCTOR	1	
	L3037	J0JCC0000100	CHIP INDUCTOR	1	
	L3038	J0JCC0000100	CHIP INDUCTOR	1	
	L3039	J0JCC0000100	CHIP INDUCTOR	1	
	L3040	J0JCC0000100	CHIP INDUCTOR	1	
	L3041	J0JCC0000100	CHIP INDUCTOR	1	
	L3042	J0JCC0000100	CHIP INDUCTOR	1	
	L3043	J0JCC0000100	CHIP INDUCTOR	1	
	L3044	J0JCC0000100	CHIP INDUCTOR	1	
	L3045	J0JCC0000100	CHIP INDUCTOR	1	
△	L3049	G1C101M00018	INDUCTION COIL	1	
△	L3050	G1C101M00018	INDUCTION COIL	1	
	L3700	J0JCC0000364	CHIP INDUCTOR	1	
	L3701	J0JCC0000364	CHIP INDUCTOR	1	
	L3707	J0JCC0000100	CHIP INDUCTOR	1	
	L3708	J0JCC0000100	CHIP INDUCTOR	1	
	L3801	J0JHC0000078	CHIP INDUCTOR	1	
	L3804	J0JHC0000078	CHIP INDUCTOR	1	
	L3805	J0JHC0000078	CHIP INDUCTOR	1	
	L4002	J0JHC0000045	CHIP INDUCTOR	1	
	L4004	J0JYC0000068	CHIP INDUCTOR	1	
	L4006	J0JHC0000045	CHIP INDUCTOR	1	
	L4008	J0JYC0000068	CHIP INDUCTOR	1	
	L4009	J0JYC0000068	CHIP INDUCTOR	1	
	L4212	J0JYC0000068	CHIP INDUCTOR	1	
	L4216	J0JYC0000068	CHIP INDUCTOR	1	
	L4217	J0JYC0000068	CHIP INDUCTOR	1	
	L4219	J0JYC0000068	CHIP INDUCTOR	1	
	L4220	J0JYC0000068	CHIP INDUCTOR	1	
	L4502	J0JYC0000068	CHIP INDUCTOR	1	
	L4503	J0JYC0000068	CHIP INDUCTOR	1	
	L4504	J0JYC0000068	CHIP INDUCTOR	1	
	L4505	J0JYC0000068	CHIP INDUCTOR	1	
	L4506	J0JYC0000068	CHIP INDUCTOR	1	
	L4507	J0JYC0000068	CHIP INDUCTOR	1	
	L4508	J0JYC0000068	CHIP INDUCTOR	1	
	L4511	J0JYC0000068	CHIP INDUCTOR	1	
	L4512	J0JYC0000068	CHIP INDUCTOR	1	
	L4513	J0JYC0000068	CHIP INDUCTOR	1	
	L4514	J0JYC0000068	CHIP INDUCTOR	1	
	L4515	J0JYC0000068	CHIP INDUCTOR	1	
	L4516	J0JYC0000068	CHIP INDUCTOR	1	
	L4517	J0JYC0000068	CHIP INDUCTOR	1	
	L4518	J0JYC0000068	CHIP INDUCTOR	1	
	L5001	J0JHC0000045	CHIP INDUCTOR	1	
	L5002	J0JHC0000045	CHIP INDUCTOR	1	
	L5004	J0JHC0000045	CHIP INDUCTOR	1	
	L5005	J0JHC0000045	CHIP INDUCTOR	1	
	L5006	J0JHC0000045	CHIP INDUCTOR	1	
	L5300	G1C2R2Z00007	INDUCTION COIL	1	
	L5301	G1C2R2Z00007	INDUCTION COIL	1	
	L5302	J0JYC0000068	CHIP INDUCTOR	1	
	L5304	G1C100MA0203	INDUCTION COIL	1	
	L5305	J0JHC0000075	CHIP INDUCTOR	1	
	L5407	G1C330M00027	INDUCTION COIL	1	
	L5409	G1C100MA0291	INDUCTION COIL	1	
	L5410	G1C330M00027	INDUCTION COIL	1	
	L5412	J0JYC0000068	CHIP INDUCTOR	1	
	L5414	G1C100MA0291	INDUCTION COIL	1	
	L5415	J0JYC0000068	CHIP INDUCTOR	1	
	L5501	G0A2R7HA0011	CHOKE COIL	1	PAVCCZ
	L5502	G0C150MA0056	PEAKING COIL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L5503	G0C330MA0056	PEAKING COIL	1	
	L5504	G0A2R7HA0011	CHOKE COIL	1	PAVCCZ
	L5505	G0A2R7HA0011	CHOKE COIL	1	PAVCCZ
	L5600	G1C3R9Z00003	INDUCTION COIL	1	
	L5601	G1C3R9Z00003	INDUCTION COIL	1	
	L5602	G1C2R2Z00007	INDUCTION COIL	1	
	L5604	G1C100MA0203	INDUCTION COIL	1	
	L5605	J0JHC0000075	CHIP INDUCTOR	1	
	L5606	G1C100MA0203	INDUCTION COIL	1	
	L5610	J0JHC0000035	CHIP INDUCTOR	1	
	L5611	J0JHC0000035	CHIP INDUCTOR	1	
	L5690	J0JYC0000068	CHIP INDUCTOR	1	
	L5691	J0JYC0000068	CHIP INDUCTOR	1	
	L5735	J0JYC0000068	CHIP INDUCTOR	1	
	L7704	J0JHC0000045	CHIP INDUCTOR	1	
	L7705	J0JHC0000045	CHIP INDUCTOR	1	
	L8030	J0JHC0000045	CHIP INDUCTOR	1	
	L8031	J0JHC0000045	CHIP INDUCTOR	1	
	L8032	J0JHC0000045	CHIP INDUCTOR	1	
	L8034	J0JHC0000045	CHIP INDUCTOR	1	
	L8035	J0JHC0000045	CHIP INDUCTOR	1	
	L8036	J0JHC0000045	CHIP INDUCTOR	1	
	L8101	J0JHC0000045	CHIP INDUCTOR	1	
	L8201	J0JHC0000045	CHIP INDUCTOR	1	
	L8301	J0JHC0000045	CHIP INDUCTOR	1	
	L8304	J0JHC0000045	CHIP INDUCTOR	1	
	L8401	J0JHC0000075	CHIP INDUCTOR	1	
	L8501	J0JHC0000045	CHIP INDUCTOR	1	
	L8580	J0JHC0000075	CHIP INDUCTOR	1	
	L8620	J0JHC0000045	CHIP INDUCTOR	1	
	L8621	J0JHC0000045	CHIP INDUCTOR	1	
	L8623	J0JHC0000045	CHIP INDUCTOR	1	
	L8950	J0JYC0000068	CHIP INDUCTOR	1	
	L9000	J0JHC0000078	CHIP INDUCTOR	1	
	L9001	J0JHC0000078	CHIP INDUCTOR	1	
	L9002	J0JHC0000078	CHIP INDUCTOR	1	
	L9003	J0JHC0000078	CHIP INDUCTOR	1	
	L9004	J0JHC0000078	CHIP INDUCTOR	1	
	L9005	J0JHC0000078	CHIP INDUCTOR	1	
	L9006	J0JHC0000078	CHIP INDUCTOR	1	
	L9007	J0JHC0000078	CHIP INDUCTOR	1	
	L9010	G1C220MA0291	INDUCTION COIL	1	
	L9012	G1C220MA0291	INDUCTION COIL	1	
	L9014	G1C220MA0291	INDUCTION COIL	1	
	L9016	G1C220MA0291	INDUCTION COIL	1	
	L9018	J0JHC0000042	CHIP INDUCTOR	1	
	L9023	G1C3R0ZA0156	INDUCTION COIL	1	
	L9800	G1C2R2Z00007	INDUCTION COIL	1	
	L9801	G1C1R5Z00006	INDUCTION COIL	1	
	L9802	G1C2R2Z00007	INDUCTION COIL	1	
	PA5	K1KA12AA0194	12P CONNECTOR	1	
	PA6	K1KA20AA0009	20P CONNECTOR	1	
	PA8	K1KA06A00452	6P CONNECTOR	1	
	PA33	K1KA04AA0192	4P CONNECTOR	1	
	PA35	K1KA03AA0192	3P CONNECTOR	1	
	PA36	K1KA04AA0192	4P CONNECTOR	1	
	PA37	K1KA03AA0192	3P CONNECTOR	1	
⚠	PA5200	K5H5022A0023	FUSE	1	
	PA5400	K5H5022A0023	FUSE	1	
⚠	PA5402	K5H1022A0031	FUSE	1	PAVCCZ
⚠	PA5403	K5H1022A0031	FUSE	1	PAVCCZ
⚠	PA5600	K5H5022A0023	FUSE	1	
	PA9800	K5H4022A0031	FUSE	1	
	PA9900	K5H5022A0031	FUSE	1	
⚠	PCB	TXN/A1SLTD	CIRCUIT BOARD A	1	PAVCCZ
⚠	PCB	TXNHCI1SLTD	CIRCUIT BOARD HC	1	PAVCCZ
⚠	PCB	TXNPA1RFTB	CIRCUIT BOARD PA	1	PAVCCZ
⚠	PCB	ETX2MM704MGB	CIRCUIT BOARD P (AC)	1	PAVCCZ
⚠	PCB	ETX2MM704MGH	CIRCUIT BOARD P (MAIN)	1	PAVCCZ

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
⚠	PCB	TZTNP01RKTB	CIRCUIT BOARD D	1	PAVCCZ
⚠	PCB	TXN/G1SLTD	CIRCUIT BOARD G	1	PAVCCZ
⚠	PCB	TXNGH1RPTB	CIRCUIT BOARD GH	1	PAVCCZ
⚠	PCB	TXNGS1SLTD	CIRCUIT BOARD GS	1	PAVCCZ
⚠	PCB	TXN/K1RPTB	CIRCUIT BOARD K	1	PAVCCZ
⚠	PCB	TXN/S1SLTD	CIRCUIT BOARD S	1	PAVCCZ
	Q2001	2SD0601ARL	TRANSISTOR	1	
	Q2022	2SB0709ARL	TRANSISTOR	1	
	Q2027	B1CFNG000001	FET	1	
	Q2028	B1CBHD000002	FET	1	
	Q2029	B1CBHD000002	FET	1	
	Q2030	2SB0709ARL	TRANSISTOR	1	
	Q2033	2SB0709ARL	TRANSISTOR	1	
	Q2510	2SD0601ARL	TRANSISTOR	1	
	Q2511	2SD0601ASL	TRANSISTOR	1	
	Q2513	2SD0601ARL	TRANSISTOR	1	
	Q2518	2SD0601ARL	TRANSISTOR	1	
	Q3022	2SD0601ARL	TRANSISTOR	1	
	Q3023	2SD0601ARL	TRANSISTOR	1	
	Q3024	2SD0601ARL	TRANSISTOR	1	
	Q3025	2SD0601ARL	TRANSISTOR	1	
	Q3026	2SD0601ARL	TRANSISTOR	1	
	Q3027	2SD0601ARL	TRANSISTOR	1	
	Q3028	2SB0709ARL	TRANSISTOR	1	
	Q3029	2SB0709ARL	TRANSISTOR	1	
	Q3801	2SD0601ARL	TRANSISTOR	1	
	Q3802	2SD0601ARL	TRANSISTOR	1	
	Q3804	2SD0601ARL	TRANSISTOR	1	
	Q4000	2SA207700L	TRANSISTOR	1	
	Q4001	2SA207700L	TRANSISTOR	1	
	Q4002	2SA207700L	TRANSISTOR	1	
	Q4017	2SD0601ASL	TRANSISTOR	1	
	Q4502	2SD0601ARL	TRANSISTOR	1	
	Q4503	2SD0601ARL	TRANSISTOR	1	
	Q4514	2SB0709ARL	TRANSISTOR	1	
	Q4515	2SB0709ARL	TRANSISTOR	1	
	Q4516	2SB0709ARL	TRANSISTOR	1	
	Q4517	2SB0709ARL	TRANSISTOR	1	
	Q4519	2SB0709ARL	TRANSISTOR	1	
	Q4523	2SD0601ASL	TRANSISTOR	1	
	Q4524	2SD0601ASL	TRANSISTOR	1	
	Q4528	2SB0709ARL	TRANSISTOR	1	
	Q4529	2SB0709ARL	TRANSISTOR	1	
	Q4530	2SB0709ARL	TRANSISTOR	1	
	Q4531	2SB0709ARL	TRANSISTOR	1	
	Q4801	2SD0601ASL	TRANSISTOR	1	
	Q4802	2SD0601ASL	TRANSISTOR	1	
	Q4803	2SD0601ASL	TRANSISTOR	1	
	Q4831	2SD0601ASL	TRANSISTOR	1	
	Q4832	2SD0601ASL	TRANSISTOR	1	
	Q5301	B1MBEDA00015	FET	1	
	Q5302	B1MBEDA00015	FET	1	
	Q5501	2SD0601ASL	TRANSISTOR	1	
	Q5522	2SB0709ARL	TRANSISTOR	1	
	Q5531	2SD0601ARL	TRANSISTOR	1	
	Q5532	2SD0601ARL	TRANSISTOR	1	
	Q5533	2SD0601ARL	TRANSISTOR	1	
	Q5534	2SD0601ARL	TRANSISTOR	1	
	Q5561	B1DHDC000028	FET	1	
	Q5562	2SD0601ARL	TRANSISTOR	1	
	Q5563	2SD0601ARL	TRANSISTOR	1	
	Q5564	2SD0601ARL	TRANSISTOR	1	
	Q5565	2SD0601ASL	TRANSISTOR	1	
	Q5600	B1MBEDA00015	FET	1	
	Q5601	B1MBDDA00003	FET	1	
	Q5602	B1MBDDA00003	FET	1	
	Q5603	2SD0601ARL	TRANSISTOR	1	
	Q5604	2SD0601ARL	TRANSISTOR	1	
	Q5691	2SD0601ARL	TRANSISTOR	1	
	Q5693	B1DHDC000028	FET	1	
	Q8401	2SD0601ASL	TRANSISTOR	1	
	Q8402	2SD0601ASL	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q8850	2SD0601ARL	TRANSISTOR	1	
	Q8852	2SD0601ARL	TRANSISTOR	1	
	Q8853	2SD0601ASL	TRANSISTOR	1	
	Q9010	2SD0601ARL	TRANSISTOR	1	
	Q9058	2SD0601ARL	TRANSISTOR	1	
	Q9059	2SD0601ARL	TRANSISTOR	1	
	Q9060	2SD0601ARL	TRANSISTOR	1	
	Q9061	2SD0601ARL	TRANSISTOR	1	
	Q9805	2SD0601ARL	TRANSISTOR	1	
	Q9806	2SD0601ARL	TRANSISTOR	1	
	Q9807	B1MBDDA00003	FET	1	
	Q9808	B1MBDDA00015	FET	1	
	Q9809	B1MBDDA00003	FET	1	
	R853	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R855	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R856	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R857	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R859	ERJ6ENF2101	M2.10KOHM, 1/10W	1	
	R861	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R864	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R869	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R871	ERJ6ENF1302	M 13KOHM, 1/10W	1	
	R872	ERJ6ENF4020	M 402 OHM, 1/10W	1	
	R874	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	R880	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R883	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R884	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R887	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R1100	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1101	D0YAR0000007	M 0 OHM 1/4W	1	
	R1102	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1103	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R1104	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1105	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1106	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1107	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1108	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1109	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1110	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1124	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1125	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1134	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1139	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1146	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1147	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1148	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1153	ERJ2GEJ821	M 820 OHM, J,0.063W	1	
	R1157	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1162	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1164	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1166	ERJ2GEJ104	M 100KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R1169	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1170	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R1171	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1172	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R1173	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R1174	D0YAR0000007	M 0 OHM 1/4W	1	
	R1175	D0YAR0000007	M 0 OHM 1/4W	1	
	R1179	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1181	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1182	ERJ2GED273X	M 27KOHM, J,0.063W	1	
	R1183	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1184	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1194	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1196	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1197	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1200	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1201	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1203	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1205	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1206	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1208	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1209	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1210	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1211	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1216	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1217	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R1218	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1219	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1220	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1221	D1BB7151A055	M7.15KOHM, 1/10W	1	
	R1222	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1229	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1230	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1236	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1237	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1238	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1239	D0YAR0000007	M 0 OHM 1/4W	1	
	R1243	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1251	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1255	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2000	D0YAR0000007	M 0 OHM 1/4W	1	
	R2001	D0YAR0000007	M 0 OHM 1/4W	1	
	R2002	ERJ2GEJ681	M 680 OHM, J,0.063W	1	
	R2003	ERJ2GEJ105	M 1MOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2006	ERJ2GEJ471	M 470 OHM, J, 0.063W	1	
	R2007	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2008	ERJ2GEJ471	M 470 OHM, J, 0.063W	1	
	R2015	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2016	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2017	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2018	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2019	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2020	D1BB2001A055	M 2KOHM, 1/10W	1	
	R2023	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2026	D1BB1203A055	M 120KOHM, 1/10W	1	
	R2027	D1BB7502A055	M 75KOHM, 1/10W	1	
	R2047	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2048	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2050	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2051	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2052	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R2053	D0YAR0000007	M 0 OHM 1/4W	1	
	R2057	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2058	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2063	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R2064	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R2065	ERJ2GEJ823	M 82KOHM, J, 0.063W	1	
	R2068	D0YAR0000007	M 0 OHM 1/4W	1	
	R2071	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R2072	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R2073	ERJ6GEYG681	M 680 OHM, J, 1/10W	1	
	R2074	D1BB6802A055	M 68KOHM, 1/10W	1	
	R2075	D1BB1583A055	M 158KOHM, 1/10W	1	
	R2089	ERJ2GEJ153	M 15KOHM, J, 0.063W	1	
	R2090	ERJ2GEJ153	M 15KOHM, J, 0.063W	1	
	R2092	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2093	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2095	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R2096	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R2097	ERJ2GEJ105	M 1MOHM, J, 0.063W	1	
	R2098	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2108	ERJ6GEYJ150V	M 15 OHM, J, 1/10W	1	
	R2111	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2114	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R2115	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R2132	ERJ2GEJ471	M 470 OHM, J, 0.063W	1	
	R2141	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2142	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R2148	ERJ2RHD682X	M 22KOHM, J, 2W	1	
	R2149	ERJ2RHD682X	M 22KOHM, J, 2W	1	
	R2164	D1BB1003A055	M 100KOHM, 1/10W	1	
	R2165	D1BB3401A055	M 3.4KOHM, 1/10W	1	
	R2166	ERJ6GEYJ153V	M 15KOHM, J, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2172	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2174	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2175	D1BB5600A055	M 600 OHM, 1/10W	1	PAVCCZ
	R2176	ERJ6GEYJ271V	M 270 OHM J 1/10W	1	
	R2179	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2191	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2193	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2194	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2204	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2205	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2206	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2208	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2209	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2211	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2271	EXB28V220J	RESISTOR ARRAY	1	
	R2300	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R2506	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R2507	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R2516	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
	R2517	ERJ6GEYJ470V	M 47 OHM, J, 1/10W	1	
	R2520	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
	R2521	ERJ6GEYJ470V	M 47 OHM, J, 1/10W	1	
	R2524	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
	R2525	D1BB5760A055	M 576 OHM, 1/10W	1	
	R2530	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
	R2531	D1BB2700A055	M 270 OHM, 1/10W	1	
	R2539	D0GB473JA057	M 47KOHM, J, 1/16W	1	
	R2540	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
	R2542	D0GB473JA057	M 47KOHM, J, 1/16W	1	
	R2554	ERJ6RED750	M 75 OHM, 1/10W	1	
	R2556	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
	R2557	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
	R2579	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2601	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2602	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2603	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2605	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2606	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2607	EXB2HV560JV	RESISTOR ARRAY	1	
	R2608	EXB2HV560JV	RESISTOR ARRAY	1	
	R2609	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2610	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2611	EXB2HV560JV	RESISTOR ARRAY	1	
	R2612	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2613	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R2614	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2619	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2620	D0YAR0000007	M 0 OHM 1/4W	1	
	R2621	D0YAR0000007	M 0 OHM 1/4W	1	
	R2622	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2623	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2624	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2625	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2626	EXB2HV330JV	RESISTOR ARRAY	1	
	R2631	ERJ2RKD330	M 33 OHM, J, 2W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2632	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2633	EXB2HV330JV	RESISTOR ARRAY	1	
	R2634	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2635	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2636	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2637	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2638	EXB2HV330JV	RESISTOR ARRAY	1	
	R2644	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2645	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2646	EXB28V470JX	RESISTOR ARRAY	1	
	R2647	EXB28V470JX	RESISTOR ARRAY	1	
	R2648	EXB28V470JX	RESISTOR ARRAY	1	
	R2649	EXB28V470JX	RESISTOR ARRAY	1	
	R2650	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R2651	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R2652	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2653	ERJ2GEJ240	M 24 OHM, J, 0.063W	1	PAVCCZ
	R2654	ERJ2GEJ240	M 24 OHM, J, 0.063W	1	PAVCCZ
	R2655	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R2656	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R2657	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2658	EXB28V330J	RESISTOR ARRAY	1	
	R2659	EXB28V330J	RESISTOR ARRAY	1	
	R2660	EXB28V330J	RESISTOR ARRAY	1	
	R2661	EXB28V330J	RESISTOR ARRAY	1	
	R2662	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2663	EXB28V680JX	RESISTOR ARRAY	1	
	R2664	EXB28V680JX	RESISTOR ARRAY	1	
	R2665	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2666	EXB28V680JX	RESISTOR ARRAY	1	
	R2667	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2669	EXB28V680JX	RESISTOR ARRAY	1	
	R2670	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2671	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2672	EXB28V680JX	RESISTOR ARRAY	1	
	R2673	EXB28V680JX	RESISTOR ARRAY	1	
	R2674	EXB28V680JX	RESISTOR ARRAY	1	
	R2675	EXB28V680JX	RESISTOR ARRAY	1	
	R2676	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R2677	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R2703	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2704	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2705	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R2709	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2710	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2711	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R2712	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2715	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2733	D0YAR0000007	M 0 OHM 1/4W	1	
	R3099	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R3100	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R3103	EXB28VR000X	RESISTOR ARRAY	1	
	R3104	EXB28VR000X	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3105	D0YAR0000007	M 0 OHM 1/4W	1	
	R3106	D0YAR0000007	M 0 OHM 1/4W	1	
	R3107	D0YAR0000007	M 0 OHM 1/4W	1	
	R3108	D0YAR0000007	M 0 OHM 1/4W	1	
	R3110	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
	R3111	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
	R3112	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
	R3113	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
	R3114	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
	R3115	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
	R3116	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3117	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3118	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3119	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3120	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3121	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3122	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3123	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3124	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3125	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3126	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3127	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R3130	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3131	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3133	D0YAR0000007	M 0 OHM 1/4W	1	
	R3134	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R3135	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R3136	D0YAR0000007	M 0 OHM 1/4W	1	
	R3137	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R3138	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3139	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3140	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3141	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3142	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R3143	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R3144	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3145	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3146	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3147	D0YAR0000007	M 0 OHM 1/4W	1	
	R3148	D0YAR0000007	M 0 OHM 1/4W	1	
	R3150	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3151	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3152	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3154	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3155	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R3170	ERJ2GED273X	M 27KOHM, J, 0.063W	1	
	R3171	ERJ2GED273X	M 27KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3175	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3176	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3187	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3189	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3208	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3212	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3213	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3217	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3218	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3219	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3223	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3225	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3236	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3237	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3238	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3239	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3240	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3245	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3255	ERJ6GEYJ680V	M 68 OHM, J,1/10W	1	
	R3256	ERJ6ENF2152	M21.5KOHM, 1/10W	1	
	R3262	ERJ6ENF2152	M21.5KOHM, 1/10W	1	
	R3265	ERJ6ENF1302	M 13KOHM, 1/10W	1	
	R3343	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3344	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3364	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3366	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3369	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3371	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3377	DOYAR0000007	M 0 OHM 1/4W	1	
	R3383	DOYAR0000007	M 0 OHM 1/4W	1	
	R3384	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3385	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3387	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3388	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3389	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3390	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3391	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3392	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3393	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3395	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3397	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3400	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3401	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3402	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3403	DOYAR0000007	M 0 OHM 1/4W	1	
	R3404	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3405	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3406	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3407	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3408	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3409	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3410	ERJ2GEJ473	M 47KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3411	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3412	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3413	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3414	ERJ2GEJ274	M 270KOHM, J,0.063W	1	
	R3415	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3418	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3425	ERJ6GEYJ680V	M 68 OHM, J,1/10W	1	
	R3439	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3440	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3441	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3442	ERJ3GEYJ361V	M 360 OHM, J,1/16W	1	PAVCCZ
	R3443	ERJ3GEYJ361V	M 360 OHM, J,1/16W	1	PAVCCZ
	R3444	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3445	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3446	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3447	ERJ3GEYJ361V	M 360 OHM, J,1/16W	1	PAVCCZ
	R3448	ERJ3GEYJ361V	M 360 OHM, J,1/16W	1	PAVCCZ
	R3449	DOYAR0000007	M 0 OHM 1/4W	1	
	R3450	DOYAR0000007	M 0 OHM 1/4W	1	
	R3451	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3452	ERJ2GEJ274	M 270KOHM, J,0.063W	1	
	R3454	ERJ6ENF1302	M 13KOHM, 1/10W	1	
	R3457	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3458	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3459	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3460	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3461	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3462	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3463	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3465	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3470	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3475	DOYAR0000007	M 0 OHM 1/4W	1	
	R3476	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3477	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3480	DOYAR0000007	M 0 OHM 1/4W	1	
	R3481	DOYAR0000007	M 0 OHM 1/4W	1	
	R3482	DOYAR0000007	M 0 OHM 1/4W	1	
	R3484	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3485	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3489	DOYAR0000007	M 0 OHM 1/4W	1	
	R3490	DOYAR0000007	M 0 OHM 1/4W	1	
	R3491	DOYAR0000007	M 0 OHM 1/4W	1	
	R3492	DOYAR0000007	M 0 OHM 1/4W	1	
	R3495	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3497	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3508	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3509	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3510	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3511	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3512	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3513	ERJ2GEJ473	M 47KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3514	D0YAR0000007	M 0 OHM 1/4W	1	
	R3515	D0YAR0000007	M 0 OHM 1/4W	1	
	R3518	D0YAR0000007	M 0 OHM 1/4W	1	
	R3520	D0YAR0000007	M 0 OHM 1/4W	1	
	R3716	ERJ6GEYJ184	M 180KOHM,J,1/10W	1	
	R3717	ERJ6GEYJ184	M 180KOHM,J,1/10W	1	
	R3721	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R3751	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
	R3753	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
	R3758	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
	R3767	ERJ6ENF7151	M7.15KOHM, 1/10W	1	
	R3801	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3802	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3803	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R3804	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3805	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3806	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3807	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3808	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3809	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3810	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3811	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R3812	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3814	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3815	D0YAR0000007	M 0 OHM 1/4W	1	
	R3818	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3821	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R3822	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3823	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3824	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3825	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3826	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3827	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3828	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3829	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3830	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3831	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3832	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3834	D1BB49R90002	M 49 OHM, 1/10W	1	
	R3840	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3841	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3845	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3847	D0YAR0000007	M 0 OHM 1/4W	1	
	R4029	EXB2HV680J	RESISTOR ARRAY	1	
	R4030	EXB2HV680J	RESISTOR ARRAY	1	
	R4031	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4032	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4033	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4034	D1BB7500A055	M 750 OHM, 1/10W	1	
	R4035	D1BB1241A055	M1.24KOHM, 1/10W	1	PAVCCZ

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4036	D0YAR0000007	M 0 OHM 1/4W	1	
	R4037	D0YAR0000007	M 0 OHM 1/4W	1	
	R4038	ERJ2GEJ681	M 680 OHM, J,0.063W	1	
	R4039	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4040	ERJ2GEJ681	M 680 OHM, J,0.063W	1	
	R4041	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4042	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4043	D0GB202JA057	M 2KOHM,J,1/16W	1	
	R4046	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4047	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4048	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4049	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4153	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4154	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4155	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4158	D0YAR0000007	M 0 OHM 1/4W	1	
	R4274	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4275	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4277	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4278	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4279	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4281	D0YAR0000007	M 0 OHM 1/4W	1	
	R4282	D0YAR0000007	M 0 OHM 1/4W	1	
	R4283	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4303	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4306	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4335	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R4338	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4500	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4501	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4502	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4503	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4506	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4507	D0YAR0000007	M 0 OHM 1/4W	1	
	R4526	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4527	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4528	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4530	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4538	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4540	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4552	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4567	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R4587	D1BB1241A055	M1.24KOHM, 1/10W	1	PAVCCZ
	R4588	D1BB7150A055	M 715 OHM, 1/10W	1	PAVCCZ
	R4589	D1BB7150A055	M 715 OHM, 1/10W	1	PAVCCZ
	R4592	D1BB7150A055	M 715 OHM, 1/10W	1	PAVCCZ
	R4593	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4596	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4597	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4598	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4600	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4601	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4603	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4604	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4605	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4606	D1BB9101A055	M 9.1KOHM, 1/10W	1	
	R4608	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4609	ERJ2GEJ122	M 1.2KOHM, J, 0.063W	1	
	R4610	DOYAR0000007	M 0 OHM 1/4W	1	
	R4611	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R4613	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4619	DOYAR0000007	M 0 OHM 1/4W	1	
	R4621	DOYAR0000007	M 0 OHM 1/4W	1	
	R4622	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4626	ERJ3EKF3160	M 316 OHM, 1/16W	1	
	R4627	ERJ3EKF3160	M 316 OHM, 1/16W	1	
	R4628	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R4629	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R4631	D1BB4990A055	M 499 OHM, 1/10W	1	
	R4634	ERJ3EKF3160	M 316 OHM, 1/16W	1	
	R4635	EXB28V680JX	RESISTOR ARRAY	1	
	R4636	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4637	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4638	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4639	EXB28V680JX	RESISTOR ARRAY	1	
	R4640	EXB28V680JX	RESISTOR ARRAY	1	
	R4641	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4643	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4644	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R4645	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4646	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4647	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4648	EXB28V330J	RESISTOR ARRAY	1	
	R4650	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4651	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4652	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4653	DOYAR0000007	M 0 OHM 1/4W	1	
	R4656	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R4657	DOYAR0000007	M 0 OHM 1/4W	1	
	R4658	DOYAR0000007	M 0 OHM 1/4W	1	
	R4661	DOYAR0000007	M 0 OHM 1/4W	1	
	R4663	DOYAR0000007	M 0 OHM 1/4W	1	
	R4664	D1BB1241A055	M1.24KOHM, 1/10W	1	PAVCCZ
	R4665	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4666	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4673	DOYAR0000007	M 0 OHM 1/4W	1	
	R4678	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4679	EXB28V680JX	RESISTOR ARRAY	1	
	R4690	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R4691	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4692	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4693	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4694	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4696	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4698	DOYAR0000007	M 0 OHM 1/4W	1	
	R4699	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4700	EXB28V680JX	RESISTOR ARRAY	1	
	R4701	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4704	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4705	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4706	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4707	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4708	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4728	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4729	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4731	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4732	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4733	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4736	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4738	DOYAR0000007	M 0 OHM 1/4W	1	
	R4742	DOYAR0000007	M 0 OHM 1/4W	1	
	R4743	DOYAR0000007	M 0 OHM 1/4W	1	
	R4755	ERJ2RHD272	M 27KOHM, J, 2W	1	
	R4756	ERJ2RHD272	M 27KOHM, J, 2W	1	
	R4757	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4758	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4759	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4760	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4761	ERJ2RHD272	M 27KOHM, J, 2W	1	
	R4762	ERJ2RHD272	M 27KOHM, J, 2W	1	
	R4763	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4764	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4765	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4766	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4810	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4811	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4812	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4813	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4814	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4817	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4832	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R4833	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4834	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4841	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4842	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4844	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4853	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4854	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4856	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4857	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5024	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R5025	D1BB2700A055	M 270 OHM, 1/10W	1	
	R5026	D1BB2700A055	M 270 OHM, 1/10W	1	
	R5049	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5050	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5051	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5052	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5053	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5054	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5055	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5056	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5057	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5058	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5059	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5060	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5061	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5062	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5063	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5064	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5065	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5066	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5067	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R5068	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5070	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5071	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R5074	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5075	D1BA75R0A014	M0.75KOHM, 1/10W	1	
	R5076	ERJ2GEJ301	M 300 OHM, J, 0.063W	1	
	R5077	D0YAR0000007	M 0 OHM 1/4W	1	
	R5078	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R5079	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5080	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5082	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5088	ERJ3GEYJ680	M 68 OHM, J, 1/16W	1	
	R5092	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5200	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5201	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5202	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5203	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5204	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5205	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5206	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5207	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5208	ERJ2GEJ105	M 1MOHM, J, 0.063W	1	
	R5209	D0YAR0000007	M 0 OHM 1/4W	1	
	R5210	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5216	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5217	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5223	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R5225	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5226	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R5227	D0GB103JA041	M 10K OHM J 1/16W	1	
	R5229	D0GB103JA041	M 10K OHM J 1/16W	1	
	R5231	EXB2HV680J	RESISTOR ARRAY	1	
	R5232	EXB2HV680J	RESISTOR ARRAY	1	
	R5314	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5316	D0YAR0000007	M 0 OHM 1/4W	1	
	R5321	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5322	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5323	D1BB5602A055	M 56KOHM, 1/10W	1	
	R5324	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5325	D0YAR0000007	M 0 OHM 1/4W	1	
	R5326	D0YAR0000007	M 0 OHM 1/4W	1	
	R5327	D0YAR0000007	M 0 OHM 1/4W	1	
	R5328	D0YAR0000007	M 0 OHM 1/4W	1	
	R5329	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5330	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R5331	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5332	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5333	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5334	D1BB2402A055	M 24KOHM, 1/10W	1	
	R5335	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5337	D0YAR0000007	M 0 OHM 1/4W	1	
	R5431	D0YAR0000007	M 0 OHM 1/4W	1	
	R5433	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5434	D1BB2702A055	M 27KOHM, 1/10W	1	
	R5435	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R5441	D0YAR0000007	M 0 OHM 1/4W	1	
	R5443	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5444	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R5445	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5451	D1BB5602A055	M 56KOHM, 1/10W	1	
	R5452	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5453	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5456	D0YAR0000007	M 0 OHM 1/4W	1	
	R5459	D0YAR0000007	M 0 OHM 1/4W	1	
	R5503	ERJ6ENF2611	M2.61KOHM, 1/10W	1	
	R5504	ERJ6ENF1271	M1.27KOHM, 1/10W	1	
	R5506	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R5507	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R5508	ERJ6GEYF473	M 47KOHM, J, 1/10W	1	
	R5509	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R5515	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5516	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5535	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5536	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5537	ERJ2GEJ681	M 680 OHM, J, 0.063W	1	
	R5538	ERJ2GEJ122	M 1.2KOHM, J, 0.063W	1	
	R5542	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
	R5544	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R5550	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R5556	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5557	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5558	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5559	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
	R5560	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5561	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5565	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5566	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5567	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5569	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5570	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5571	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5572	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5573	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5574	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5575	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5576	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5577	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
	R5578	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5579	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5580	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R5581	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5582	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5583	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5587	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R5588	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R5589	ERJ6GEYJ104V	M 100KOHM, J, 1/10W	1	
	R5590	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5591	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5592	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5600	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5601	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5602	D0YAR0000007	M 0 OHM 1/4W	1	
	R5603	D0YAR0000007	M 0 OHM 1/4W	1	
	R5604	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5605	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5606	D0YAR0000007	M 0 OHM 1/4W	1	
	R5607	D0YAR0000007	M 0 OHM 1/4W	1	
	R5610	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5611	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5612	D1BB2402A055	M 24KOHM, 1/10W	1	
	R5614	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5616	D0YAR0000007	M 0 OHM 1/4W	1	
	R5620	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5621	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5622	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5623	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5625	D0YAR0000007	M 0 OHM 1/4W	1	
	R5626	D0YAR0000007	M 0 OHM 1/4W	1	
	R5627	D0YAR0000007	M 0 OHM 1/4W	1	
	R5628	D0YAR0000007	M 0 OHM 1/4W	1	
	R5629	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R5630	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5631	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5632	D1BB1272A055	M12.7KOHM, 1/10W	1	
	R5633	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5634	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5635	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R5636	ERJ2GEJ683	M 68KOHM, J, 0.063W	1	
	R5637	D0YAR0000007	M 0 OHM 1/4W	1	
	R5638	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5641	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5644	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5646	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5647	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5660	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5661	ERJ2GEJ123	M 12KOHM, J, 0.063W	1	
	R5662	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5663	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R5664	D0YAR0000007	M 0 OHM 1/4W	1	
	R5691	D0GB103JA041	M 10K OHM J 1/16W	1	
	R5693	D0GB473JA057	M 47KOHM, J, 1/16W	1	
	R5695	D1BB2001A055	M 2KOHM, 1/10W	1	
	R5697	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5698	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R5699	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R5702	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5732	ERJ2GEJ153	M 15KOHM, J, 0.063W	1	
	R5733	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
	R7701	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7705	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7709	D0GB104JA041	M 100KOHM J 1/16W	1	
	R7711	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
	R7712	D0GB104JA041	M 100KOHM J 1/16W	1	
	R7713	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
	R7714	D1BB1202A055	M 12KOHM, 1/10W	1	
	R7715	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
	R7716	D0GB105JA041	M 1M OHM F 1/16W	1	
	R7717	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7718	D0GB103JA041	M 10K OHM J 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R7719	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7725	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7726	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7727	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7733	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7734	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7735	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7737	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7738	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7742	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7744	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7749	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7750	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7751	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7754	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7777	D1BB3402A055	M 34KOHM, 1/10W	1	
	R7778	D1BB1002A055	M 10KOHM, 1/10W	1	
	R7779	EXB38VR000V	RESISTOR ARRAY	1	
	R7781	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7782	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8001	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R8002	D1BB2402A055	M 24KOHM, 1/10W	1	
	R8003	D1BB1002A055	M 10KOHM, 1/10W	1	
	R8004	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R8005	ERJ2GEJ181	M 180 OHM, J,0.063W	1	
	R8006	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8007	ERJ2GEJ181	M 180 OHM, J,0.063W	1	
	R8008	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8016	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R8017	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R8080	EXB2HV103JV	RESISTOR ARRAY	1	
	R8081	EXB28V103JX	RESISTOR ARRAY	1	
	R8082	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8083	D0YAR0000007	M 0 OHM 1/4W	1	
	R8084	D0YAR0000007	M 0 OHM 1/4W	1	
	R8086	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8087	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8088	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8089	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8090	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8091	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8092	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8093	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8094	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8098	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R8101	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8102	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8105	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8106	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8108	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8110	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8111	ERJ2GEJ820	M 82 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8112	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8117	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8118	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8126	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8132	D0YAR0000007	M 0 OHM 1/4W	1	
	R8133	D0YAR0000007	M 0 OHM 1/4W	1	
	R8134	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8135	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8136	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8139	D0YAR0000007	M 0 OHM 1/4W	1	
	R8140	D0YAR0000007	M 0 OHM 1/4W	1	
	R8141	D0YAR0000007	M 0 OHM 1/4W	1	
	R8142	D0YAR0000007	M 0 OHM 1/4W	1	
	R8143	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8144	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8145	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8149	D0YAR0000007	M 0 OHM 1/4W	1	
	R8150	D0YAR0000007	M 0 OHM 1/4W	1	
	R8151	D0YAR0000007	M 0 OHM 1/4W	1	
	R8152	D0YAR0000007	M 0 OHM 1/4W	1	
	R8153	D0YAR0000007	M 0 OHM 1/4W	1	
	R8154	D0YAR0000007	M 0 OHM 1/4W	1	
	R8155	D0YAR0000007	M 0 OHM 1/4W	1	
	R8156	D0YAR0000007	M 0 OHM 1/4W	1	
	R8157	D0YAR0000007	M 0 OHM 1/4W	1	
	R8158	D0YAR0000007	M 0 OHM 1/4W	1	
	R8159	D0YAR0000007	M 0 OHM 1/4W	1	
	R8160	D0YAR0000007	M 0 OHM 1/4W	1	
	R8161	D0YAR0000007	M 0 OHM 1/4W	1	
	R8162	D0YAR0000007	M 0 OHM 1/4W	1	
	R8163	D0YAR0000007	M 0 OHM 1/4W	1	
	R8164	D0YAR0000007	M 0 OHM 1/4W	1	
	R8165	D0YAR0000007	M 0 OHM 1/4W	1	
	R8166	D0YAR0000007	M 0 OHM 1/4W	1	
	R8167	D0YAR0000007	M 0 OHM 1/4W	1	
	R8168	D0YAR0000007	M 0 OHM 1/4W	1	
	R8169	D0YAR0000007	M 0 OHM 1/4W	1	
	R8170	D0YAR0000007	M 0 OHM 1/4W	1	
	R8171	D0YAR0000007	M 0 OHM 1/4W	1	
	R8172	D0YAR0000007	M 0 OHM 1/4W	1	
	R8173	D0YAR0000007	M 0 OHM 1/4W	1	
	R8174	D0YAR0000007	M 0 OHM 1/4W	1	
	R8175	D0YAR0000007	M 0 OHM 1/4W	1	
	R8176	D0YAR0000007	M 0 OHM 1/4W	1	
	R8177	D0YAR0000007	M 0 OHM 1/4W	1	
	R8178	D0YAR0000007	M 0 OHM 1/4W	1	
	R8179	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8180	ERJ3GEYJ301	M 300 OHM,J,1/16W	1	
	R8181	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8182	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8183	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8184	ERJ3GEYJ301	M 300 OHM,J,1/16W	1	
	R8185	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8186	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8187	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8188	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8189	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8190	D0YAR0000007	M 0 OHM 1/4W	1	
	R8191	D0YAR0000007	M 0 OHM 1/4W	1	
	R8192	D0YAR0000007	M 0 OHM 1/4W	1	
	R8193	D0YAR0000007	M 0 OHM 1/4W	1	
	R8196	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8197	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8198	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8199	DOYAR0000007	M 0 OHM 1/4W	1	
	R8201	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8202	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8203	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8204	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8205	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8206	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8207	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8208	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8209	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8210	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8211	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8212	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8213	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8214	DOYAR0000007	M 0 OHM 1/4W	1	
	R8215	DOYAR0000007	M 0 OHM 1/4W	1	
	R8216	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8217	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8218	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8219	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8220	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8221	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8222	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8223	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8224	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8225	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8226	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8227	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8228	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8229	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8230	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8231	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8232	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8233	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8234	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8235	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8236	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8237	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8238	DOYAR0000007	M 0 OHM 1/4W	1	
	R8239	DOYAR0000007	M 0 OHM 1/4W	1	
	R8240	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8241	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8242	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8243	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8244	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8245	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8246	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8247	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8248	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8249	DOYAR0000007	M 0 OHM 1/4W	1	
	R8250	DOYAR0000007	M 0 OHM 1/4W	1	
	R8251	DOYAR0000007	M 0 OHM 1/4W	1	
	R8252	DOYAR0000007	M 0 OHM 1/4W	1	
	R8253	DOYAR0000007	M 0 OHM 1/4W	1	
	R8254	DOYAR0000007	M 0 OHM 1/4W	1	
	R8255	DOYAR0000007	M 0 OHM 1/4W	1	
	R8256	DOYAR0000007	M 0 OHM 1/4W	1	
	R8257	DOYAR0000007	M 0 OHM 1/4W	1	
	R8258	DOYAR0000007	M 0 OHM 1/4W	1	
	R8259	DOYAR0000007	M 0 OHM 1/4W	1	
	R8260	DOYAR0000007	M 0 OHM 1/4W	1	
	R8261	DOYAR0000007	M 0 OHM 1/4W	1	
	R8262	DOYAR0000007	M 0 OHM 1/4W	1	
	R8263	DOYAR0000007	M 0 OHM 1/4W	1	
	R8264	DOYAR0000007	M 0 OHM 1/4W	1	
	R8265	DOYAR0000007	M 0 OHM 1/4W	1	
	R8266	DOYAR0000007	M 0 OHM 1/4W	1	
	R8267	DOYAR0000007	M 0 OHM 1/4W	1	
	R8268	DOYAR0000007	M 0 OHM 1/4W	1	
	R8269	DOYAR0000007	M 0 OHM 1/4W	1	
	R8270	DOYAR0000007	M 0 OHM 1/4W	1	
	R8271	DOYAR0000007	M 0 OHM 1/4W	1	
	R8272	DOYAR0000007	M 0 OHM 1/4W	1	
	R8273	DOYAR0000007	M 0 OHM 1/4W	1	
	R8274	DOYAR0000007	M 0 OHM 1/4W	1	
	R8275	DOYAR0000007	M 0 OHM 1/4W	1	
	R8276	DOYAR0000007	M 0 OHM 1/4W	1	
	R8277	DOYAR0000007	M 0 OHM 1/4W	1	
	R8278	DOYAR0000007	M 0 OHM 1/4W	1	
	R8279	DOYAR0000007	M 0 OHM 1/4W	1	
	R8280	DOYAR0000007	M 0 OHM 1/4W	1	
	R8281	DOYAR0000007	M 0 OHM 1/4W	1	
	R8282	DOYAR0000007	M 0 OHM 1/4W	1	
	R8283	DOYAR0000007	M 0 OHM 1/4W	1	
	R8284	DOYAR0000007	M 0 OHM 1/4W	1	
	R8285	DOYAR0000007	M 0 OHM 1/4W	1	
	R8286	DOYAR0000007	M 0 OHM 1/4W	1	
	R8287	DOYAR0000007	M 0 OHM 1/4W	1	
	R8288	DOYAR0000007	M 0 OHM 1/4W	1	
	R8289	DOYAR0000007	M 0 OHM 1/4W	1	
	R8290	DOYAR0000007	M 0 OHM 1/4W	1	
	R8291	DOYAR0000007	M 0 OHM 1/4W	1	
	R8292	DOYAR0000007	M 0 OHM 1/4W	1	
	R8293	DOYAR0000007	M 0 OHM 1/4W	1	
	R8294	DOYAR0000007	M 0 OHM 1/4W	1	
	R8295	DOYAR0000007	M 0 OHM 1/4W	1	
	R8296	DOYAR0000007	M 0 OHM 1/4W	1	
	R8297	DOYAR0000007	M 0 OHM 1/4W	1	
	R8298	DOYAR0000007	M 0 OHM 1/4W	1	
	R8299	DOYAR0000007	M 0 OHM 1/4W	1	
	R8305	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R8306	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8307	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8308	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8310	D0YAR0000007	M 0 OHM 1/4W	1	
	R8311	D0YAR0000007	M 0 OHM 1/4W	1	
	R8314	D0YAR0000007	M 0 OHM 1/4W	1	
	R8315	D0YAR0000007	M 0 OHM 1/4W	1	
	R8318	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8321	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8322	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R8323	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8324	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8325	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8326	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8327	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8328	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8329	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8330	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8353	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8354	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8356	D0YAR0000007	M 0 OHM 1/4W	1	
	R8359	D0YAR0000007	M 0 OHM 1/4W	1	
	R8370	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8385	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8396	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8401	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	R8402	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R8403	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8404	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8405	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8406	D0GFR10JA020	M 1 OHM,J,0.33W	1	PAVCCZ
	R8407	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8409	D0YAR0000007	M 0 OHM 1/4W	1	
	R8410	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R8411	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R8412	EXB2HV473JV	RESISTOR ARRAY	1	
	R8413	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8414	EXB2HV101J	RESISTOR ARRAY	1	
	R8415	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	R8416	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R8417	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8418	ERJ2GEJ681	M 680 OHM, J,0.063W	1	
	R8419	EXB2HV101J	RESISTOR ARRAY	1	
	R8420	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	R8421	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8422	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8423	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8424	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8425	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8426	ERJ2GEJ223	M 22KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8427	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8428	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8429	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8430	EXB2HV680J	RESISTOR ARRAY	1	
	R8431	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R8432	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8433	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R8434	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8435	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8436	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8437	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8438	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8439	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8440	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8441	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8442	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8443	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R8444	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R8445	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8446	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8447	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8448	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8449	EXB2HV103JV	RESISTOR ARRAY	1	
	R8450	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8454	D0YAR0000007	M 0 OHM 1/4W	1	
	R8455	D0YAR0000007	M 0 OHM 1/4W	1	
	R8456	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8457	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8458	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8459	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8460	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8461	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8462	D0YAR0000007	M 0 OHM 1/4W	1	
	R8463	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8464	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8465	D0YAR0000007	M 0 OHM 1/4W	1	
	R8466	D0YAR0000007	M 0 OHM 1/4W	1	
	R8467	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8468	EXB2HV101J	RESISTOR ARRAY	1	
	R8469	D0YAR0000007	M 0 OHM 1/4W	1	
	R8470	D0YAR0000007	M 0 OHM 1/4W	1	
	R8471	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8472	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8473	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8474	ERJ2GEJ221	M 220 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8475	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8476	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8477	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8478	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8479	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8480	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8481	ERJ2GEJ151	M 150 OHM, J,0.063W	1	
	R8482	ERJ2GEJ151	M 150 OHM, J,0.063W	1	
	R8483	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8484	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8486	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8487	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8488	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8489	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8490	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8492	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8493	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8494	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8495	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8496	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8497	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8498	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8499	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8525	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8526	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8527	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8528	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8529	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8530	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8531	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8532	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8533	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8534	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8535	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8536	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8537	D1HG1218A002	NETWORK RESISTER	1	
	R8538	D1HG1218A002	NETWORK RESISTER	1	
	R8539	D1HG1218A002	NETWORK RESISTER	1	
	R8540	D1HG1218A002	NETWORK RESISTER	1	
	R8541	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8542	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8543	ERJ2GEJ121	M 120 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8544	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8545	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8546	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8547	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8548	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8549	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8550	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8551	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8552	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8553	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8554	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8555	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8556	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8557	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8558	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8559	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R8560	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8561	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8562	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8563	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8564	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8565	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8566	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8567	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8569	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8581	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8583	DOYAR0000007	M 0 OHM 1/4W	1	
	R8601	DOYAR0000007	M 0 OHM 1/4W	1	
	R8602	DOYAR0000007	M 0 OHM 1/4W	1	
	R8603	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8604	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R8620	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8621	ERJ2GEJ153	M 15KOHM, J,0.063W	1	
	R8622	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8623	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8625	D1BA1601A026	M 1.6KOHM, 1/10W	1	
	R8626	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8627	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8628	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8629	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8630	ERJ2GEJ153	M 15KOHM, J,0.063W	1	
	R8631	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8632	DOYAR0000007	M 0 OHM 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8650	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8651	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8661	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8663	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8701	EXB2HV680J	RESISTOR ARRAY	1	
	R8702	EXB2HV680J	RESISTOR ARRAY	1	
	R8703	EXB2HV101J	RESISTOR ARRAY	1	
	R8704	EXB2HV101J	RESISTOR ARRAY	1	
	R8705	EXB2HV101J	RESISTOR ARRAY	1	
	R8706	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8707	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8709	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8710	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R8711	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8715	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8716	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8718	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8719	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8720	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8721	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8722	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8723	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8724	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8725	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8726	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8727	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8728	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8730	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R8732	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8733	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8734	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8735	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R8736	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R8737	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R8738	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R8739	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8740	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8741	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8742	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8743	EXB38V560JV	RESISTOR ARRAY	1	
	R8744	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8745	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8746	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8747	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8748	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8749	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8750	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8751	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8752	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8753	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8754	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8757	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8758	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8759	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8760	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8761	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8762	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8764	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8765	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8766	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8767	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8768	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8769	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8770	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8771	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8772	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8773	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8774	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R8775	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8776	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8777	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8778	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8779	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8781	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8782	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8783	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8785	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8786	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8787	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8788	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8789	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8790	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8791	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8792	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8795	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8796	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8798	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8799	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8806	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8807	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8809	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8811	D0YAR0000007	M 0 OHM 1/4W	1	
	R8812	D0YAR0000007	M 0 OHM 1/4W	1	
	R8813	D0YAR0000007	M 0 OHM 1/4W	1	
	R8816	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R8817	ERJ2GEJ562	M 5.6KOHM, J, 0.063W	1	
	R8818	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8821	ERJ8GEYJ472V	M 4.7KOHM, J, 1/8W	1	
	R8823	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8824	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R8825	D0YAR0000007	M 0 OHM 1/4W	1	
	R8826	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8829	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8830	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8831	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8832	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8833	D0YAR0000007	M 0 OHM 1/4W	1	
	R8834	D0YAR0000007	M 0 OHM 1/4W	1	
	R8835	D0YAR0000007	M 0 OHM 1/4W	1	
	R8837	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8838	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8839	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8850	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R8851	EXB38V103JV	RESISTOR ARRAY	1	
	R8852	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8853	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8855	EXB38VR000V	RESISTOR ARRAY	1	
	R8856	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8857	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8859	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8860	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8861	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8864	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8865	EXB2HV103JV	RESISTOR ARRAY	1	
	R8866	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
	R8869	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8901	EXB2HV103JV	RESISTOR ARRAY	1	
	R8902	EXB2HV103JV	RESISTOR ARRAY	1	
	R8903	EXB2HV103JV	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8904	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8905	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8906	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8907	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8910	EXB2HV103JV	RESISTOR ARRAY	1	
	R8911	EXB2HV103JV	RESISTOR ARRAY	1	
	R8912	EXB2HV103JV	RESISTOR ARRAY	1	
	R8913	ERJ2RHD272	M 27KOHM, J, 2W	1	
	R8914	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8915	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8916	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8917	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8918	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8920	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8921	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8922	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8923	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8924	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8925	D0YAR0000007	M 0 OHM 1/4W	1	
	R8926	D0YAR0000007	M 0 OHM 1/4W	1	
	R8927	D0YAR0000007	M 0 OHM 1/4W	1	
	R8928	D0YAR0000007	M 0 OHM 1/4W	1	
	R8929	D0YAR0000007	M 0 OHM 1/4W	1	
	R8930	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8931	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8932	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8933	EXB2HV560JV	RESISTOR ARRAY	1	
	R8934	EXB2HV560JV	RESISTOR ARRAY	1	
	R8940	D1BB91R0A055	M 91 OHM, 1/10W	1	
	R8941	D1BB91R0A055	M 91 OHM, 1/10W	1	
	R8942	D1BB91R0A055	M 91 OHM, 1/10W	1	
	R8950	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8951	D1BB4702A055	M 47KOHM, 1/10W	1	
	R8952	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R8954	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8955	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8956	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8957	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8959	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8960	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8961	EXB2HV330JV	RESISTOR ARRAY	1	
	R8962	EXB2HV330JV	RESISTOR ARRAY	1	
	R8963	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
	R8964	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8965	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8966	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8967	D1BB1203A055	M 120KOHM, 1/10W	1	
	R8968	D1BB2202A055	M 22KOHM, 1/10W	1	PAVCCZ
	R8970	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8972	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8973	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R8974	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R9001	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9002	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9007	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9013	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R9014	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R9015	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9016	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9023	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9027	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9028	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9029	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9101	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9103	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9105	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9107	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R9110	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9112	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9113	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9114	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9115	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9116	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9117	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9118	D0GDR00Z0002	M 0 OHM, 1/10W	1	(D)
	R9118	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	(HC)
	R9119	EXB38V470J	RESISTOR ARRAY	1	
	R9120	EXB2HV103JV	RESISTOR ARRAY	1	
	R9121	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	(D)
	R9121	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	(HC)
	R9122	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R9123	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	(HC)
	R9123	EXB2HV470JV	RESISTOR ARRAY	1	(D)
	R9124	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9125	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	(D)
	R9125	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	(HC)
	R9126	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9127	D0YAR0000007	M 0 OHM 1/4W	1	(D)
	R9127	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	(HC)
	R9129	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9129	ERJ2GEJ683	M 68KOHM, J, 0.063W	1	(D)
	R9130	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9131	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9132	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9133	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9133	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	(D)
	R9134	D0YAR0000007	M 0 OHM 1/4W	1	
	R9135	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9136	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9137	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9137	EXB2HV220JV	RESISTOR ARRAY	1	(D)
	R9138	EXB2HV220JV	RESISTOR ARRAY	1	
	R9139	EXB2HV220JV	RESISTOR ARRAY	1	
	R9140	EXB2HV220JV	RESISTOR ARRAY	1	
	R9141	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9142	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9143	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9144	D0YAR0000007	M 0 OHM 1/4W	1	
	R9145	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9146	EXB2HV220JV	RESISTOR ARRAY	1	
	R9147	EXB2HV220JV	RESISTOR ARRAY	1	
	R9148	EXB38VR000V	RESISTOR ARRAY	1	
	R9149	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9150	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9151	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9154	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9155	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9156	D0YAR0000007	M 0 OHM 1/4W	1	
	R9157	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9158	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9159	ERJ2GEJ393	M 39KOHM, J, 0.063W	1	
	R9160	ERJ2GEJ393	M 39KOHM, J, 0.063W	1	
	R9161	ERJ2GEJ393	M 39KOHM, J, 0.063W	1	
	R9162	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9163	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9164	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9166	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9167	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9168	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9170	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9171	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9172	D0YAR0000007	M 0 OHM 1/4W	1	
	R9174	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9175	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9177	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9178	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9179	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9180	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9181	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9182	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9185	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R9186	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
	R9187	ERJ2GED563X	M 56KOHM, J, 0.063W	1	
	R9188	ERJ2GEJ243	M 24KOHM, J, 0.063W	1	
	R9189	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9190	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9191	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9192	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9193	EXB2HV220JV	RESISTOR ARRAY	1	
	R9195	EXB2HV220JV	RESISTOR ARRAY	1	
	R9197	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9198	D0YAR0000007	M 0 OHM 1/4W	1	
	R9199	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9200	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R9201	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R9202	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9204	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R9205	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R9206	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9207	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9208	EXB2HV220JV	RESISTOR ARRAY	1	
	R9209	EXB2HV220JV	RESISTOR ARRAY	1	
	R9210	EXB2HV220JV	RESISTOR ARRAY	1	
	R9211	EXB2HV220JV	RESISTOR ARRAY	1	
	R9212	EXB2HV470JV	RESISTOR ARRAY	1	
	R9213	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9214	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9215	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9216	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9217	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9218	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9219	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9223	ERJ2RHD272	M 27KOHM, J, 2W	1	
	R9224	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9225	ERJ2RHD272	M 27KOHM, J, 2W	1	
	R9226	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9229	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9230	EXB38V470J	RESISTOR ARRAY	1	
	R9231	D0YAR0000007	M 0 OHM 1/4W	1	
	R9232	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9233	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9234	EXB2HV470JV	RESISTOR ARRAY	1	
	R9235	EXB2HV470JV	RESISTOR ARRAY	1	
	R9236	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9237	EXB38V470J	RESISTOR ARRAY	1	
	R9238	ERJ2GEJ151	M 150 OHM, J, 0.063W	1	
	R9245	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9246	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9247	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9248	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9249	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9250	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9251	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9252	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9253	EXB2HV103JV	RESISTOR ARRAY	1	
	R9254	EXB2HV103JV	RESISTOR ARRAY	1	
	R9255	EXB2HV103JV	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9256	EXB38V470J	RESISTOR ARRAY	1	
	R9257	EXB38V470J	RESISTOR ARRAY	1	
	R9258	EXB38V470J	RESISTOR ARRAY	1	
	R9259	EXB38V470J	RESISTOR ARRAY	1	
	R9260	EXB38V470J	RESISTOR ARRAY	1	
	R9261	EXB38V470J	RESISTOR ARRAY	1	
	R9262	EXB38V470J	RESISTOR ARRAY	1	
	R9263	EXB38V470J	RESISTOR ARRAY	1	
	R9264	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9265	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9266	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9267	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9270	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9271	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9272	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9273	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9279	D0YAR0000007	M 0 OHM 1/4W	1	
	R9280	EXB2HV103JV	RESISTOR ARRAY	1	
	R9281	EXB2HV103JV	RESISTOR ARRAY	1	
	R9282	EXB2HV103JV	RESISTOR ARRAY	1	
	R9283	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9286	D0YAR0000007	M 0 OHM 1/4W	1	
	R9287	D0YAR0000007	M 0 OHM 1/4W	1	
	R9288	D0YAR0000007	M 0 OHM 1/4W	1	
	R9292	EXB2HVR000	RESISTOR ARRAY	1	
	R9293	EXB2HV470JV	RESISTOR ARRAY	1	
	R9295	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9296	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9297	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9298	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9299	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9300	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9301	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9302	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9303	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9304	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9308	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9309	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9310	EXB38V103JV	RESISTOR ARRAY	1	
	R9311	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9312	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R9315	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9317	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9319	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9321	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9323	D0GBR00Z0002	M 0 OHM J 1/16W	1	(HC)
	R9323	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	(D)
	R9324	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9325	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9326	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9327	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9333	EXB38V103JV	RESISTOR ARRAY	1	
	R9334	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9335	EXB2HV103JV	RESISTOR ARRAY	1	
	R9337	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9341	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9342	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9343	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9344	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9345	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9348	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9350	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9351	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9352	EXB2HV470JV	RESISTOR ARRAY	1	
	R9353	EXB38V470J	RESISTOR ARRAY	1	
	R9354	EXB2HV103JV	RESISTOR ARRAY	1	
	R9355	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9358	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9362	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9385	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9419	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R9420	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R9421	D0GB103JA041	M 10K OHM J 1/16W	1	
	R9578	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9599	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9600	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9611	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9824	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9825	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9826	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9839	EXB38V101JV	RESISTOR ARRAY	1	
	R9840	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9846	EXB2HV103JV	RESISTOR ARRAY	1	
	R9847	EXB2HV103JV	RESISTOR ARRAY	1	
	R9848	EXB2HV470JV	RESISTOR ARRAY	1	
	R9849	EXB2HV470JV	RESISTOR ARRAY	1	
	R9854	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9859	EXB38V101JV	RESISTOR ARRAY	1	
	R9868	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9869	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9870	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9871	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9878	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9879	D1BB1302A055	M 13KOHM, 1/10W	1	
	R9886	D1BB4702A055	M 47KOHM, 1/10W	1	
	R9887	D1BB5102A055	M 51KOHM, 1/10W	1	
	R9888	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9889	D1BB1822A055	M18.2KOHM, 1/10W	1	
	R9890	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R9891	D1BB1272A055	M12.7KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9892	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9893	D1BB4302A055	M 43KOHM, 1/10W	1	
	R9894	D1BB2002A055	M 20KOHM, 1/10W	1	
	R9895	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9896	D1BB1822A055	M18.2KOHM, 1/10W	1	
	R9897	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R9901	D0YAR0000007	M 0 OHM 1/4W	1	
	R9905	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9907	ERJ2GEJ151	M 150 OHM, J, 0.063W	1	
	R9936	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9937	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9938	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9939	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9940	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9944	EXB38V470J	RESISTOR ARRAY	1	
	R9945	EXB38V470J	RESISTOR ARRAY	1	
	R9946	EXB38V470J	RESISTOR ARRAY	1	
	R9947	EXB38V470J	RESISTOR ARRAY	1	
	R9948	EXB38V470J	RESISTOR ARRAY	1	
	R9949	EXB38V470J	RESISTOR ARRAY	1	
	R9950	EXB38V470J	RESISTOR ARRAY	1	
	R9951	EXB38V470J	RESISTOR ARRAY	1	
	R9952	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9953	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9954	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9955	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9966	ERJ2GEJ471	M 470 OHM, J, 0.063W	1	
	R9969	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9972	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9973	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9974	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9975	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9980	D0YAR0000007	M 0 OHM 1/4W	1	
	RM2501	PNA4701M07TV	REMOCON RECEIVER	1	
	S1	K1KA03BA0061	3P CONNECTOR	1	
	SN002	B3JB00000046	IC	1	
△	SW2500	K0F162B000002	SWITCH	1	
	SW3753	EVQPC105K	SWITCH	1	
	SW3754	EVQPC105K	SWITCH	1	
	SW3755	EVQPC105K	SWITCH	1	
	SW3756	EVQPC105K	SWITCH	1	
	SW3757	EVQPC105K	SWITCH	1	
△	TU8301	ENG37E09KF	TUNER	1	
	X1100	H0J100500035	CRYSTAL	1	
	X2010	H0J245500089	CRYSTAL	1	
	X2601	H0J202500019	CRYSTAL	1	PAVCCZ
	X5200	H0J270500113	CRYSTAL	1	
	X7700	H0J240500037	CRYSTAL	1	
	X8101	H0J270500061	CRYSTAL	1	
	X8301	H0J204500006	CRYSTAL	1	
	X8620	H0J300500026	CRYSTAL	1	
	X9000	H2D100500004	CRYSTAL	1	
	X9200	H0J200500076	CRYSTAL	1	
	ZA0001	K4AZ01D00004	TERMINAL	1	
	ZA0002	K4AZ01D00004	TERMINAL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ZA0003	K4AZ01D00004	TERMINAL	1	
	ZA0004	K4AZ01D00004	TERMINAL	1	
	ZA0005	K4AZ01D00004	TERMINAL	1	
	ZA0006	K4AZ01D00004	TERMINAL	1	
	ZA0007	K4AZ01D00004	TERMINAL	1	
	ZA0008	K4AZ01D00004	TERMINAL	1	
	ZA0010	TESA169	SHIELD CLIP	1	
	ZA0011	TESA169	SHIELD CLIP	1	
	ZA851	K4CZ01000027	AV TERMINAL	1	
	ZA852	K4CZ01000027	AV TERMINAL	1	
	ZA3701	K4CZ01000027	AV TERMINAL	1	
	ZA3801	K4AD01D00005	TERMINAL	1	
	ZA3802	K4AD01D00005	TERMINAL	1	
	ZA9000	K4CD01000011	AV TERMINAL	1	
	ZA9001	K4AZ01D00004	TERMINAL	1	
	ZA9002	K4AZ01D00004	TERMINAL	1	
	C10	K1MN20BA0231	20P CONNECTOR	1	
	C11	K1MN68BA0266	68P CONNECTOR	1	
	C20	K1MN20BA0266	20P CONNECTOR	1	
	C21	K1MN68BA0266	68P CONNECTOR	1	
	C22	K1MN68BA0266	68P CONNECTOR	1	
	C26	K1MN68BA0266	68P CONNECTOR	1	
	C33	K1KA10B00218	10P CONNECTOR	1	
	C35	K1KA04BA0107	4P CONNECTOR	1	
	C36	K1MN68BA0266	68P CONNECTOR	1	
	C14352	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14356	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14360	FIL2E104A028	E 1000UF, 25V	1	
	C14361	FIL2E104A028	E 1000UF, 25V	1	
	C14364	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14368	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14373	FLJ1H102A834	C 1000UF, 50V	1	
	C14901	FLJ1H102A834	C 1000UF, 50V	1	
	C14902	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14904	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14906	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14908	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14910	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14912	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14920	FIL2E104A028	E 1000UF, 25V	1	
	C14921	FIL2E104A028	E 1000UF, 25V	1	
	C14922	FIL2E104A028	E 1000UF, 25V	1	
	C14923	FIL2E104A028	E 1000UF, 25V	1	
	C14928	FIL2E104A028	E 1000UF, 25V	1	
	C14930	FIL2E104A028	E 1000UF, 25V	1	
	C14931	FLJ1H102A834	C 1000UF, 50V	1	
	C14932	FIL2E104A028	E 1000UF, 25V	1	
	C14934	FIL2E104A028	E 1000UF, 25V	1	
	C14936	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14937	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14938	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14939	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14940	FLJ1H102A834	C 1000UF, 50V	1	
	C14941	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14942	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14943	FIL1E4750012	C 4.7UF, 25V	1	
	C14944	FLJ1H102A836	C 1000UF, 50V	1	
	C14945	FLJ1H101A836	C 100PF, K, 50V	1	
	C14950	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14952	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14955	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14957	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14958	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14961	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14963	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14969	FLJ1H104A835	C 0.10UF, 50V	1	
	C14970	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14971	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14972	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14973	FLJ1H102A834	C 1000UF, 50V	1	
	C14974	FIL2E104A028	E 1000UF, 25V	1	
	C14975	FIL2E104A028	E 1000UF, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C14976	FLJ1H102A834	C 1000UF, 50V	1	
	C14981	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14982	FIL2E104A028	E 1000UF, 25V	1	
	C14983	FIL2E104A028	E 1000UF, 25V	1	
	C14984	FIL2E104A028	E 1000UF, 25V	1	
	C14985	FIL2E104A028	E 1000UF, 25V	1	
	C14987	FLJ1H104A835	C 0.10UF, 50V	1	
	C14988	FLJ1H104A835	C 0.10UF, 50V	1	
	C14989	FLJ1H471A721	C 470UF, 50V	1	PAVCCZ
	C14990	FLJ1H104A835	C 0.10UF, 50V	1	
	C14992	FLH1C105A008	C 1UF, K, 16V	1	
	C16003	FIL2J562A022	C 5600UF, K, 6.3V	1	
	C16011	F2A2T251A004	E 250UF, 220V	1	
	C16013	F0C2E225A230	E 0.022UF, 250V	1	
	C16014	F2A2T251A004	E 250UF, 220V	1	
	C16016	F2A2T251A004	E 250UF, 220V	1	
	C16023	FIL2J562A022	C 5600UF, K, 6.3V	1	
	C16042	FLH1H392A970	C 3900PF, K, 50V	1	
	C16071	FIL2J1020001	C 1000UF, K, 6.3V	1	
	C16092	FIL2J1020001	C 1000UF, K, 6.3V	1	
	C16131	FIL1E4750012	C 4.7UF, 25V	1	
	C16133	FIL1E4750012	C 4.7UF, 25V	1	
	C16135	FK1E105A029	C 1UF, Z, 25V	1	
	C16151	FK1E105A029	C 1UF, Z, 25V	1	
	C16152	FIL1E4750012	C 4.7UF, 25V	1	
	C16153	FIL1E4750012	C 4.7UF, 25V	1	
	C16154	FIL1E4750012	C 4.7UF, 25V	1	
	C16192	FIL1E4750012	C 4.7UF, 25V	1	
	C16194	FIL1E4750012	C 4.7UF, 25V	1	
	C16195	FIL1E4750012	C 4.7UF, 25V	1	
	C16197	FIL1E4750012	C 4.7UF, 25V	1	
	C16201	F0C2E405A230	E 0.040UF, 250V	1	
	C16202	F0C2E405A230	E 0.040UF, 250V	1	
	C16203	F0C2E405A230	E 0.040UF, 250V	1	
	C16241	F2A1A101A106	E 100UF, 10V	1	
	C16242	FLH1C105A008	C 1UF, K, 16V	1	
	C16243	FLJ1H103A834	C 0.01UF, K, 50V	1	
	C16251	FLH1C105A008	C 1UF, K, 16V	1	
	C16252	FK1E105A029	C 1UF, Z, 25V	1	
	C16261	F2A2A471A072	E 470UF, 100V	1	
	C16262	F2A2A471A072	E 470UF, 100V	1	
	C16263	F2A2A471A072	E 470UF, 100V	1	
	C16264	F2A2A471A072	E 470UF, 100V	1	
	C16265	F2A2A471A072	E 470UF, 100V	1	
	C16266	F2A2A471A072	E 470UF, 100V	1	
	C16272	F2A1E471A487	E 470UF, 25V	1	
	C16280	FK1E105A029	C 1UF, Z, 25V	1	
	C16284	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16285	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16286	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16287	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16301	F2A1E470A454	E 47UF, 25V	1	
	C16302	FLH1H471A219	C 470UF, 50V	1	
	C16310	F2A2T251A004	E 250UF, 220V	1	
	C16311	FLH1A1050032	C 10UF, 50V	1	
	C16312	FLH1H472A970	C 4700PF, K, 50V	1	
	C16313	FLH1C105A008	C 1UF, K, 16V	1	
	C16321	FIL2E224A028	E 2200UF, 25V	1	
	C16322	FIL2E224A028	E 2200UF, 25V	1	
	C16323	F2A1E470A454	E 47UF, 25V	1	
	C16324	F2A1E471A487	E 470UF, 25V	1	
	C16325	FIL1E4750012	C 4.7UF, 25V	1	
	C16326	FIL1E4750012	C 4.7UF, 25V	1	
	C16327	F0C2E225A230	E 0.022UF, 250V	1	
	C16328	F2A2D221A092	E 220UF, 200V	1	
	C16329	F2A2D221A092	E 220UF, 200V	1	
	C16336	FLH1H102A970	C 1000PF, K, 50V	1	
	C16337	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16403	FIL2J562A022	C 5600UF, K, 6.3V	1	
	C16413	F2A2T251A004	E 250UF, 220V	1	
	C16414	F2A2T251A004	E 250UF, 220V	1	
	C16416	F0C2E225A230	E 0.022UF, 250V	1	
	C16418	F2A2T251A004	E 250UF, 220V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16419	F2A2T251A004	E 250UF, 220V	1	
	C16424	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16441	F1H1H392A970	C 3900PF, K, 50V	1	
	C16442	F1H1H392A970	C 3900PF, K, 50V	1	
	C16471	F1L2J1020001	C 1000UF, K, 6.3V	1	
	C16472	F1K1E105A029	C 1UF, Z, 25V	1	
	C16480	F1J1H104A835	C 0.10UF, 50V	1	
	C16491	F1L2J1020001	C 1000UF, K, 6.3V	1	
	C16502	F1L1E4750012	C 4.7UF, 25V	1	
	C16504	F1L1E4750012	C 4.7UF, 25V	1	
	C16505	F1K1E105A029	C 1UF, Z, 25V	1	
	C16521	F1K1E105A029	C 1UF, Z, 25V	1	
	C16522	F1L1E4750012	C 4.7UF, 25V	1	
	C16524	F1L1E4750012	C 4.7UF, 25V	1	
	C16525	F1L1E4750012	C 4.7UF, 25V	1	
	C16562	F1H1C105A008	C 1UF, K, 16V	1	
	C16563	F2A1A101A106	E 100UF, 10V	1	
	C16564	F1H1C105A008	C 1UF, K, 16V	1	
	C16565	F1J1H103A834	C 0.01UF, K, 50V	1	
	C16566	F1J1H103A834	C 0.01UF, K, 50V	1	
	C16581	F1K1E105A029	C 1UF, Z, 25V	1	
	C16582	F1H1C105A008	C 1UF, K, 16V	1	
	C16593	F1J1H102A836	C 1000UF, 50V	1	
	C16603	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16604	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16605	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16606	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16608	F1H1H221A971	C 220UF, K, 50V	1	
	C16632	F0C2E405A230	E 0.040UF, 250V	1	
	C16633	F0C2E405A230	E 0.040UF, 250V	1	
	C16634	F0C2E405A230	E 0.040UF, 250V	1	
	C16641	ECQE2105RKB	P 1UF, 250V	1	
	C16661	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16662	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16664	F1J1H820A836	C 82UF, 50V	1	
	C16665	F1J1H820A836	C 82UF, 50V	1	
	C16666	F1J1H820A836	C 82UF, 50V	1	
	C16691	ECA2CM101	E 100UF, 160V	1	
	C16708	F1J1H104A835	C 0.10UF, 50V	1	
	C16721	F2A1H101A493	E 100UF, 50V	1	
	C16723	F1L1E4750012	C 4.7UF, 25V	1	
	C16724	F1L1E4750012	C 4.7UF, 25V	1	
	C16725	F1L1E4750012	C 4.7UF, 25V	1	
	C16752	F1K1E105A029	C 1UF, Z, 25V	1	
	C16753	F1L1E4750012	C 4.7UF, 25V	1	
	C16755	F1L1E4750012	C 4.7UF, 25V	1	
	C16756	F1L1E4750012	C 4.7UF, 25V	1	
	C16773	F1L1E4750012	C 4.7UF, 25V	1	
	C16775	F1L1E4750012	C 4.7UF, 25V	1	
	C16791	F2A1E221A487	E 220UF, 25V	1	
	C16795	F2A1E471A487	E 470UF, 25V	1	
	C16797	F1J1H104A835	C 0.10UF, 50V	1	
	C16798	F1L2E1040002	E 1000UF, 25V	1	
	C16806	ECA2CM101	E 100UF, 160V	1	
	C16811	ECJ3VC1H472J	C 4700PF, J, 50V	1	
	C16813	ECA2CM101	E 100UF, 160V	1	
	C16821	F1J1H104A835	C 0.10UF, 50V	1	
	C16822	F2A2G470A018	E 470UF, 400V	1	
	C16823	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16832	F1J1H392A834	C 3900UF, 50V	1	
	C16842	ECA2CM101	E 100UF, 160V	1	
	C16843	F1J1H104A835	C 0.10UF, 50V	1	
	C16844	F1J1H104A835	C 0.10UF, 50V	1	
	C16855	F1H1C105A008	C 1UF, K, 16V	1	
	C16856	F1H1A1050032	C 10UF, 50V	1	
	C16857	F1H1H472A970	C 4700PF, K, 50V	1	
	C16858	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16860	F1H1A1050032	C 10UF, 50V	1	
	C16861	F1H1H472A970	C 4700PF, K, 50V	1	
	C16862	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16863	F1J1H103A834	C 0.01UF, K, 50V	1	
	C16864	F1J1H104A835	C 0.10UF, 50V	1	
	C16866	F1H1A1050032	C 10UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16867	F1H1H472A970	C 4700PF, K, 50V	1	
	C16868	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16869	F1J1H104A835	C 0.10UF, 50V	1	
	C17113	F1H1A1050032	C 10UF, 50V	1	
	C17131	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17132	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17133	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17134	F1L2E154A009	E 1500UF, 25V	1	
	C17135	F1L2E154A009	E 1500UF, 25V	1	
	C17136	F1L2E154A009	E 1500UF, 25V	1	
	C17137	F1L2E154A009	E 1500UF, 25V	1	
	C17138	F1L2E154A009	E 1500UF, 25V	1	
	C17139	F1L2E154A009	E 1500UF, 25V	1	
	C17140	F1L2E154A009	E 1500UF, 25V	1	
	C17141	F1L2E154A009	E 1500UF, 25V	1	
	C17142	F1L2E154A009	E 1500UF, 25V	1	
	C17143	F1L2E154A009	E 1500UF, 25V	1	
	C17144	F1L2E154A009	E 1500UF, 25V	1	
	C17145	F1L2E154A009	E 1500UF, 25V	1	
	C17146	F1H1A1050032	C 10UF, 50V	1	
	C17147	F1H1A1050032	C 10UF, 50V	1	
	C17148	F1H1A1050032	C 10UF, 50V	1	
	C17149	F1H1A1050032	C 10UF, 50V	1	
	C17151	F1H1A1050032	C 10UF, 50V	1	
	C17158	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17159	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17160	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17201	F1H1A1050032	C 10UF, 50V	1	
	C17207	F1H1A1050032	C 10UF, 50V	1	
	C17208	F1H1A1050032	C 10UF, 50V	1	
	C17213	F1H1A1050032	C 10UF, 50V	1	
	C17221	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17222	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17223	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17224	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17226	F1L2E154A009	E 1500UF, 25V	1	
	C17227	F1L2E154A009	E 1500UF, 25V	1	
	C17228	F1L2E154A009	E 1500UF, 25V	1	
	C17229	F1L2E154A009	E 1500UF, 25V	1	
	C17230	F1L2E154A009	E 1500UF, 25V	1	
	C17231	F1L2E154A009	E 1500UF, 25V	1	
	C17232	F1L2E154A009	E 1500UF, 25V	1	
	C17233	F1L2E154A009	E 1500UF, 25V	1	
	C17234	F1L2E154A009	E 1500UF, 25V	1	
	C17235	F1L2E154A009	E 1500UF, 25V	1	
	C17241	F1H1A1050032	C 10UF, 50V	1	
	C17307	F1H1A1050032	C 10UF, 50V	1	
	C17310	F1H1A1050032	C 10UF, 50V	1	
	C17313	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17314	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17315	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17316	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17317	F1K2A105A006	C 1UF, 100V	1	
	C17318	F1L2E154A009	E 1500UF, 25V	1	
	C17319	F1L2E154A009	E 1500UF, 25V	1	
	C17320	F1L2E154A009	E 1500UF, 25V	1	
	C17321	F1L2E154A009	E 1500UF, 25V	1	
	C17323	F1L2E154A009	E 1500UF, 25V	1	
	C17324	F1L2E154A009	E 1500UF, 25V	1	
	C17325	F1L2E154A009	E 1500UF, 25V	1	
	C17326	F1L2E154A009	E 1500UF, 25V	1	
	C17327	F1H1A1050032	C 10UF, 50V	1	
	C17328	F1H1A1050032	C 10UF, 50V	1	
	CB1	K1MN68BA0052	68P CONNECTOR	1	
	CB2	K1MN68BA0052	68P CONNECTOR	1	
	CB3	K1MN68BA0052	68P CONNECTOR	1	
	CB4	K1MN68BA0052	68P CONNECTOR	1	
	CB5	K1MN68BA0052	68P CONNECTOR	1	
	CB6	K1MN68BA0052	68P CONNECTOR	1	
	CB7	K1MN68BA0052	68P CONNECTOR	1	
	CB8	K1MN68BA0052	68P CONNECTOR	1	
	CB9	K1MN68BA0052	68P CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	CB10	K1MN68BA0052	68P CONNECTOR	1	
	CB11	K1MN68BA0052	68P CONNECTOR	1	
	CB12	K1MN68BA0052	68P CONNECTOR	1	
	CB13	K1MN68BA0052	68P CONNECTOR	1	
	CB14	K1MN68BA0052	68P CONNECTOR	1	
	CB15	K1MN68BA0052	68P CONNECTOR	1	
	D14903	B0HCMM000013	DIODE	1	
	D14904	B0HCMM000013	DIODE	1	
	D14905	B0HCMM000013	DIODE	1	
	D14906	B0HCMM000013	DIODE	1	
	D14907	B0HCMM000013	DIODE	1	
	D14908	B0HCMM000013	DIODE	1	
	D14909	MA3X152E0L	ZENER DIODE	1	
	D14910	MA2J11100L	DIODE	1	
	D14911	B0HCMM000013	DIODE	1	
	D14912	B0HCMM000013	DIODE	1	
	D14953	B0HCMM000013	DIODE	1	
	D14954	B0HCMM000013	DIODE	1	
	D14955	B0HCMM000013	DIODE	1	
	D14956	B0HCMM000013	DIODE	1	
	D14957	B0HCMM000013	DIODE	1	
	D14958	B0HCMM000013	DIODE	1	
	D14961	MA8056H	ZENER DIODE	1	
	D14974	MA3X152E0L	ZENER DIODE	1	
	D14975	MA2J11100L	DIODE	1	
	D14976	MA2J11100L	DIODE	1	
	D14977	B0HCMM000013	DIODE	1	
	D14978	B0HCMM000013	DIODE	1	
	D14979	MA2J11100L	DIODE	1	
	D16001	B0FBCN000005	DIODE	1	
	D16002	B0FBCN000005	DIODE	1	
	D16021	MA3DF30000LW	ZENER DIODE	1	
	D16022	MA3DF30000LW	ZENER DIODE	1	
	D16032	MA2J11100L	DIODE	1	
	D16041	MA3DF46000LW	ZENER DIODE	1	
	D16043	MA3DF46000LW	ZENER DIODE	1	
	D16050	B0ECKP000047	DIODE	1	
	D16051	B0FBCN000005	DIODE	1	
	D16053	B0FBCN000005	DIODE	1	
	D16102	MA22D3900L	DIODE	1	
	D16104	MA22D3900L	DIODE	1	
	D16131	B0ECHKP000003	DIODE	1	
	D16132	B0ECHKP000047	DIODE	1	
	D16151	B0ECHKP000003	DIODE	1	
	D16152	B0ECHKP000047	DIODE	1	
	D16153	B0ECHKP000047	DIODE	1	
	D16191	B0ECHKP000047	DIODE	1	
	D16192	B0ECHKP000047	DIODE	1	
	D16253	LNJ301MPUJA	LED	1	
	D16255	MA2J11100L	DIODE	1	
	D16280	MA2J11100L	DIODE	1	
	D16281	MAZ80510LL	ZENER DIODE	1	
	D16282	MAZ80680ML	ZENER DIODE	1	
	D16284	MA3X152D0L	DIODE	1	
	D16285	MA3X152D0L	DIODE	1	
	D16300	B0ECKP000047	DIODE	1	
	D16301	MA3X152E0L	ZENER DIODE	1	
	D16302	MA2J11100L	DIODE	1	
	D16311	MAZ81500ML	ZENER DIODE	1	
	D16313	B0ECKP000047	DIODE	1	
	D16321	B0ECKP000047	DIODE	1	
	D16324	MA3X152D0L	DIODE	1	
	D16331	B0ECHKP000003	DIODE	1	
	D16335	B0ECLM000006	DIODE	1	
	D16336	B0ECLM000006	DIODE	1	
	D16401	B0FBCN000005	DIODE	1	
	D16402	B0FBCN000005	DIODE	1	
	D16407	MA22D3900L	DIODE	1	
	D16408	MA22D3900L	DIODE	1	
	D16421	MA3DF40000LW	ZENER DIODE	1	
	D16422	MA3DF40000LW	ZENER DIODE	1	
	D16451	B0ECKP000047	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16461	MA3DF46000LW	ZENER DIODE	1	
	D16462	MA3DF46000LW	ZENER DIODE	1	
	D16466	MA2J11100L	DIODE	1	
	D16473	MA3X152D0L	DIODE	1	
	D16475	MAZ80510LL	ZENER DIODE	1	
	D16477	MA2J11100L	DIODE	1	
	D16478	B0HCKS000002	DIODE	1	
	D16480	MA2J11100L	DIODE	1	
	D16481	B0FBCN000005	DIODE	1	
	D16482	B0FBCN000005	DIODE	1	
	D16497	B0ECKP000047	DIODE	1	
	D16501	B0ECHKP000003	DIODE	1	
	D16503	B0ECKP000047	DIODE	1	
	D16521	B0ECHKP000003	DIODE	1	
	D16522	B0ECKP000047	DIODE	1	
	D16523	B0ECKP000047	DIODE	1	
	D16583	LNJ301MPUJA	LED	1	
	D16585	MA2J11100L	DIODE	1	
	D16602	MAZ81500ML	ZENER DIODE	1	
	D16604	MA2J11100L	DIODE	1	
	D16605	MAZ80510LL	ZENER DIODE	1	
	D16606	B0ECKM000038	DIODE	1	
	D16607	MA2J11100L	DIODE	1	
	D16608	MA8120M	ZENER DIODE	1	
	D16609	MA2J11100L	DIODE	1	
	D16610	MA2J11100L	DIODE	1	
	D16618	B0ECKP000047	DIODE	1	
	D16619	B0ECKP000047	DIODE	1	
	D16631	MAZ81500ML	ZENER DIODE	1	
	D16632	MAZ81500ML	ZENER DIODE	1	
	D16633	MAZ81500ML	ZENER DIODE	1	
	D16642	B0HCKS000002	DIODE	1	
	D16643	MA2J11100L	DIODE	1	
	D16645	MA2J11100L	DIODE	1	
	D16659	B0HCMM000014	DIODE	1	
	D16661	MA2J11100L	DIODE	1	
	D16662	MAZ81500ML	ZENER DIODE	1	
	D16664	MAZ81500ML	ZENER DIODE	1	
	D16665	MAZ80510LL	ZENER DIODE	1	
	D16667	MA2J11100L	DIODE	1	
	D16668	MA3X152D0L	DIODE	1	
	D16669	MA2J11100L	DIODE	1	
	D16671	MA2J11100L	DIODE	1	
	D16710	MAZ81500ML	ZENER DIODE	1	
	D16711	B0HCMR000002	DIODE	1	
	D16712	MAZ81500ML	ZENER DIODE	1	
	D16713	B0HCMR000002	DIODE	1	
	D16714	MAZ81500ML	ZENER DIODE	1	
	D16715	B0HCMR000002	DIODE	1	
	D16717	MA8330M	ZENER DIODE	1	
	D16718	MA2J11100L	DIODE	1	
	D16719	B0ECKP000047	DIODE	1	
	D16720	B0ECKP000047	DIODE	1	
	D16721	B0HCKS000002	DIODE	1	
	D16722	MA2J11100L	DIODE	1	
	D16725	MA2J11100L	DIODE	1	
	D16761	MA2J11100L	DIODE	1	
	D16762	MA2J11100L	DIODE	1	
	D16763	B0ECKP000047	DIODE	1	
	D16764	B0HCKS000002	DIODE	1	
	D16765	B0ECKP000047	DIODE	1	
	D16766	B0ECKP000047	DIODE	1	
	D16771	MAZ80510LL	ZENER DIODE	1	
	D16791	MAZ82000ML	ZENER DIODE	1	
	D16792	MA2J11100L	DIODE	1	
	D16793	B0HCKS000002	DIODE	1	
	D16794	MA2J11100L	DIODE	1	
	D16820	MA3X152E0L	ZENER DIODE	1	
	D16821	MAZ82000ML	ZENER DIODE	1	
	D16822	MA2J11100L	DIODE	1	
	D16824	MA8330M	ZENER DIODE	1	
	D16825	MA8330M	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16830	MA8056H	ZENER DIODE	1	
	D16836	MAZ81500ML	ZENER DIODE	1	
	D16837	MA2J11100L	DIODE	1	
	D16838	B0BC027A0234	ZENER DIODE	1	
	D16839	B0ECKP000047	DIODE	1	
	D16859	B0HCKS000002	DIODE	1	
	D16860	B0HCKS000002	DIODE	1	
	D16861	MA8330M	ZENER DIODE	1	
	D16862	MA8330M	ZENER DIODE	1	
	D16871	MAZ82000ML	ZENER DIODE	1	
	D16872	MA2J11100L	DIODE	1	
	D16873	MAZ82000ML	ZENER DIODE	1	
	D16874	MAZ80510LL	ZENER DIODE	1	
	D16875	MA2J11100L	DIODE	1	
	FL17101	J0HABH000013	LC FILTER	1	
	FL17201	J0HABH000013	LC FILTER	1	
	FL17202	J0HABH000013	LC FILTER	1	
	FL17301	J0HABH000013	LC FILTER	1	
	IC14901	AN16182A-VT	IC	1	
	IC14902	AN16182A-VT	IC	1	
	IC14903	AN16182A-VT	IC	1	
	IC14904	AN16182A-VT	IC	1	
	IC14905	AN16182A-VT	IC	1	
	IC14906	AN16182A-VT	IC	1	
	IC14907	AN16182A-VT	IC	1	
	IC14908	AN16182A-VT	IC	1	
	IC14951	AN16182A-VT	IC	1	
	IC14952	AN16182A-VT	IC	1	
	IC14953	AN16182A-VT	IC	1	
	IC14954	AN16182A-VT	IC	1	
	IC14955	AN16182A-VT	IC	1	
	IC14956	AN16182A-VT	IC	1	
	IC14957	AN16182A-VT	IC	1	
	IC14958	AN16182A-VT	IC	1	
	IC14961	C0JBAZ000994	IC	1	
	IC14962	C0JBAZ000994	IC	1	
	IC14963	C0JBAE000321	IC	1	
	IC14964	C0JBAA000174	IC	1	
	IC14965	C0JBAE000321	IC	1	
	IC16131	C0ZBZ0000895	IC	1	
	IC16151	C0ZBZ0001324	IC	1	
	IC16191	C0ZBZ0000895	IC	1	
	IC16241	C0JBAZ002811	IC	1	
	IC16251	C0BBBA000024	IC	1	
	IC16301	MIP9L02MBS	IC	1	
	IC16302	C0CBALC00012	IC	1	
	IC16303	C0JBAC000363	IC	1	
	IC16471	C0DBEKA00003	IC	1	
	IC16472	C0JBAA000377	IC	1	
	IC16501	C0ZBZ0000895	IC	1	
	IC16521	C0ZBZ0001324	IC	1	
	IC16561	C0JBAZ002811	IC	1	
	IC16562	C0JBAZ002811	IC	1	
	IC16563	C0JBAZ002811	IC	1	
	IC16564	C0JBAB000715	IC	1	
	IC16581	C0BBBA000024	IC	1	
	IC16724	C0CBADC00072	IC	1	
	IC16725	C0CBADC00072	IC	1	
	IC16752	C0ZBZ0001324	IC	1	
	IC16772	C0ZBZ0001325	IC	1	
	IC16784	MIP9L02MBS	IC	1	
	IC16786	MIP9L02MBS	IC	1	
	IC16787	C0DBEYY00078	IC	1	
	IC16788	MIP9L02MBS	IC	1	
	IC16789	C0DBEYY00078	IC	1	
	IC16791	EHMDD9878	LINEAR IC	1	
	IC16792	C0JBAA000377	IC	1	
	IC16801	C0DBEYY00078	IC	1	
	IC17101	C0JBAZ001120	IC	1	
	IC17102	C0JBAZ001120	IC	1	
	IC17103	C0JBAZ001120	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC17104	C0JBAZ001120	IC	1	
	IC17105	C0JBAZ001120	IC	1	
	IC17106	C0JBAZ001120	IC	1	
	IC17201	C0JBAZ001120	IC	1	
	IC17202	C0JBAZ001120	IC	1	
	IC17203	C0JBAZ001120	IC	1	
	IC17204	C0JBAZ001120	IC	1	
	IC17301	C0JBAZ001120	IC	1	
	IC17302	C0JBAZ001120	IC	1	
	IC17303	C0JBAZ001120	IC	1	
	IC17304	C0JBAZ001120	IC	1	
	L16001	G0C1R6KA0119	PEAKING COIL	1	
	L16002	G0C1R6KA0119	PEAKING COIL	1	
	L16003	G0C1R6KA0119	PEAKING COIL	1	
	L16004	G0C1R6KA0119	PEAKING COIL	1	
	L16005	G0C1R6KA0119	PEAKING COIL	1	
	L16011	G0C1R6KA0119	PEAKING COIL	1	
	L16012	G0C1R6KA0119	PEAKING COIL	1	
	L16013	G0C1R6KA0119	PEAKING COIL	1	
	L16014	G0C1R6KA0119	PEAKING COIL	1	
	L16015	G0C1R6KA0119	PEAKING COIL	1	
	L16102	J0JJC0000015	CHIP INDUCTOR	1	
	L16103	G0ZZ00002183	PEAKING COIL	1	
	L16104	J0JJC0000015	CHIP INDUCTOR	1	
	L16221	G0ZZ00002183	PEAKING COIL	1	
	L16262	G0ZZ00002183	PEAKING COIL	1	
	L16271	G0ZZ00002183	PEAKING COIL	1	
	L16301	J0JHC0000031	CHIP INDUCTOR	1	
	L16398	J0JJC0000015	CHIP INDUCTOR	1	
	L16399	J0JJC0000015	CHIP INDUCTOR	1	
	L16402	G0C1R6KA0119	PEAKING COIL	1	
	L16403	G0C1R6KA0119	PEAKING COIL	1	
	L16404	G0C1R6KA0119	PEAKING COIL	1	
	L16405	G0C1R6KA0119	PEAKING COIL	1	
	L16406	G0C1R6KA0119	PEAKING COIL	1	
	L16412	G0C1R6KA0119	PEAKING COIL	1	
	L16413	G0C1R6KA0119	PEAKING COIL	1	
	L16414	G0C1R6KA0119	PEAKING COIL	1	
	L16415	G0C1R6KA0119	PEAKING COIL	1	
	L16416	G0C1R6KA0119	PEAKING COIL	1	
	L16472	G0ZZ00002183	PEAKING COIL	1	
	L16591	G0ZZ00002183	PEAKING COIL	1	
	L16697	G0C102KA0187	PEAKING COIL	1	
	L16698	G0C681KA0187	PEAKING COIL	1	
	L16699	G0C331KA0187	PEAKING COIL	1	
	L16801	G0ZZ00002183	PEAKING COIL	1	
	PC14951	B3PBA0000457	IC	1	
	PC14952	B3PBA0000457	IC	1	
	PC14953	B3PBA0000456	IC	1	
	PC16480	B3PBA0000223	IC	1	
	PC16601	B3PBA0000223	IC	1	
	PC16602	B3PBA0000443	IC	1	
	PC16603	B3PBA0000223	IC	1	
	PC16705	B3PBA0000456	IC	1	
	PC16710	B3PBA0000223	IC	1	
	PC16896	B3PBA0000223	IC	1	
	PC16897	B3PBA0000223	IC	1	
	△	PCB	TNPA4443	CIRCUIT BOARD C1	1
	△	PCB	TNPA4444	CIRCUIT BOARD C2	1
	△	PCB	TNPA4445	CIRCUIT BOARD C3	1
	△	PCB	TNPA4410AB	CIRCUIT BOARD SC	1
	△	PCB	TNPA4404	CIRCUIT BOARD SD	1
	△	PCB	TNPA4411AB	CIRCUIT BOARD SS	1
	△	PCB	TNPA4403	CIRCUIT BOARD SU	1
	Q16002	B1JAEN000002	TRANSISTOR	1	
	Q16003	B1JAEN000002	TRANSISTOR	1	
	Q16004	B1JAEN000002	TRANSISTOR	1	
	Q16022	B1JAEN000002	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q16023	BIJAEN000002	TRANSISTOR	1	
	Q16024	BIJAEN000002	TRANSISTOR	1	
	Q16042	BIJAEN000003	TRANSISTOR	1	
	Q16051	BIJAEN000003	TRANSISTOR	1	
	Q16102	2SK399800L	FET	1	
	Q16104	2SK399800L	FET	1	
	Q16141	BIHFFPA000001	TRANSISTOR	1	
	Q16161	BIHFFPA000001	TRANSISTOR	1	
	Q16171	BIABRD000003	TRANSISTOR	1	
	Q16172	BIADRD000001	TRANSISTOR	1	
	Q16181	BIABRD000003	TRANSISTOR	1	
	Q16182	BIADRD000001	TRANSISTOR	1	
	Q16191	BIHFFPA000001	TRANSISTOR	1	
	Q16251	2SD0601ARL	TRANSISTOR	1	
	Q16280	2SD0601ARL	TRANSISTOR	1	
	Q16301	B1CBGD000001	FET	1	
	Q16302	B1CFNG000001	FET	1	
	Q16304	2SB0709ARL	TRANSISTOR	1	
	Q16331	B1CERL000012	FET	1	
	Q16335	B1CERL000012	FET	1	
	Q16339	2SK399500L	FET	1	
	Q16401	BIJAEN000002	TRANSISTOR	1	
	Q16403	BIJAEN000002	TRANSISTOR	1	
	Q16404	BIJAEN000002	TRANSISTOR	1	
	Q16421	BIJAEP000002	TRANSISTOR	1	
	Q16423	BIJAEP000002	TRANSISTOR	1	
	Q16424	BIJAEP000002	TRANSISTOR	1	
	Q16441	BIJAEN000003	TRANSISTOR	1	
	Q16442	BIJAEN000003	TRANSISTOR	1	
	Q16452	BIJAEP000003	TRANSISTOR	1	
	Q16471	BIABCF000231	TRANSISTOR	1	
	Q16501	BIHFFPA000001	TRANSISTOR	1	
	Q16521	BIHFFPA000001	TRANSISTOR	1	
	Q16531	BIABRD000003	TRANSISTOR	1	
	Q16532	BIADRD000001	TRANSISTOR	1	
	Q16551	BIABRD000003	TRANSISTOR	1	
	Q16552	BIADRD000001	TRANSISTOR	1	
	Q16581	BIABCF000231	TRANSISTOR	1	
	Q16601	B1DEET000002	FET	1	
	Q16602	2SD0601AQL	TRANSISTOR	1	
	Q16603	2SB0709ARL	TRANSISTOR	1	
	Q16604	B1CHPM000001	FET	1	
	Q16605	2SB0709ARL	TRANSISTOR	1	
	Q16606	2SD0601AQL	TRANSISTOR	1	
	Q16607	B1CBGD000001	FET	1	
	Q16608	BIABCF000231	TRANSISTOR	1	
	Q16622	B1CFRM000008	FET	1	
	Q16623	B1CFRM000008	FET	1	
	Q16624	B1CFRM000008	FET	1	
	Q16625	B1CFRM000008	FET	1	
	Q16627	B1CFRM000008	FET	1	
	Q16628	B1CFRM000008	FET	1	
	Q16629	B1CFRM000008	FET	1	
	Q16634	B1CFRM000008	FET	1	
	Q16641	2SK4175000LZ	FET	1	
	Q16642	2SK4175000LZ	FET	1	
	Q16643	2SK4175000LZ	FET	1	
	Q16644	2SK4175000LZ	FET	1	
	Q16647	2SK4175000LZ	FET	1	
	Q16648	2SK4175000LZ	FET	1	
	Q16649	2SK4175000LZ	FET	1	
	Q16650	2SK4175000LZ	FET	1	
	Q16661	BIJAER000004	TRANSISTOR	1	
	Q16662	2SD0601AQL	TRANSISTOR	1	
	Q16663	2SB0709ARL	TRANSISTOR	1	
	Q16664	BIHFFPA000001	TRANSISTOR	1	
	Q16665	BIABCF000231	TRANSISTOR	1	
	Q16743	2SD0601ARL	TRANSISTOR	1	
	Q16762	BIADNF000006	TRANSISTOR	1	
	Q16763	BIADNF000006	TRANSISTOR	1	
	Q16781	BIHFFPA000001	TRANSISTOR	1	
	Q16783	BIHFFPA000001	TRANSISTOR	1	
	Q16791	2SD0814A	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q16794	BIADCE000022	TRANSISTOR	1	
	Q16795	2SD0601ARL	TRANSISTOR	1	
	Q16796	2SC1473A	TRANSISTOR	1	
	Q16801	BIADCN000007	TRANSISTOR	1	
	Q16802	BIADCN000007	TRANSISTOR	1	
	Q16805	2SC3063000RL	TRANSISTOR	1	
	Q16806	2SC1473AEA	TRANSISTOR	1	
	Q16810	BIABCF000231	TRANSISTOR	1	
	Q16811	BIABCF000231	TRANSISTOR	1	
	Q16812	BIABCF000231	TRANSISTOR	1	
	Q16814	BIABCN000007	TRANSISTOR	1	
	Q16815	BIABCN000007	TRANSISTOR	1	
	Q16816	2SD0601AQL	TRANSISTOR	1	
	Q16817	2SD0601AQL	TRANSISTOR	1	
	Q16871	2SB0709ARL	TRANSISTOR	1	
	Q16872	2SB0709ARL	TRANSISTOR	1	
	Q16873	BIABCF000231	TRANSISTOR	1	
	Q16874	B1CBGD000001	FET	1	
	Q16875	BIABCF000231	TRANSISTOR	1	
	Q16876	BIABCF000231	TRANSISTOR	1	
	Q16879	BIABCF000231	TRANSISTOR	1	
	R14349	DOGD103JA036	M 10KOHM, J, 0.25W	1	
	R14350	DOGD101JA036	M 100 OHM, J, 0.25W	1	
	R14351	DOGD103JA036	M 10KOHM, J, 0.25W	1	
	R14353	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14354	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14356	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14357	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14359	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14360	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14362	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14363	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14365	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14366	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14368	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14369	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14371	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14372	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14374	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14375	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14376	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14378	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14380	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14381	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14382	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14384	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14386	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14387	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14388	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14390	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14392	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14393	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14394	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14398	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R14901	DOGD101JA036	M 100 OHM, J, 0.25W	1	
	R14902	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14903	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14904	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14905	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14906	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14907	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R14908	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14909	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14910	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14911	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14912	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14913	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14914	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14915	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14916	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14917	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14919	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14920	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14921	ERJ8GEYJ224V	M 220KOHM, J,1/8W	1	
	R14923	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14924	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14925	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14926	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14928	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14929	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14930	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14931	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R14932	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14934	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14935	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14936	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R14937	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R14939	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14940	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14942	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14943	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R14944	ERJ6GEYJ100V	M 10 OHM,J,1/10W	1	
	R14949	ERJ6GEYJ203	M 20KOHM,J,1/10W	1	
	R14950	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14951	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14952	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14953	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14954	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14955	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14956	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14957	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14958	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14959	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14960	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14961	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14962	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14963	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14964	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14965	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14966	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14967	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14971	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R14973	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14974	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14975	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14976	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14977	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14978	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14979	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14980	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14981	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14982	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14984	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14986	ERJ8GEYJ224V	M 220KOHM, J,1/8W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R14987	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14988	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14990	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14991	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14992	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14993	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14994	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14995	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14996	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14997	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14998	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14999	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16002	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16003	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16004	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16022	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16023	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16024	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16031	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16032	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16033	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16034	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16042	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16051	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16102	ERJT06J221V	M 220 OHM,F,0.25W	1	
	R16104	ERJT06J221V	M 220 OHM,F,0.25W	1	
	R16109	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16110	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16116	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16131	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16132	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16134	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16137	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16138	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16139	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16141	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16142	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16143	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16151	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16152	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16154	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16155	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16159	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16161	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16162	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16163	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16171	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16172	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16173	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16181	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16182	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16183	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16191	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16192	D0GD101JA036	M 100 OHM,J,0.25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16193	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16194	ERJT14J1R0U	C1.0 OHM, J,1/4W	1	
	R16195	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16220	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16221	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16230	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16231	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16241	EXB38V470J	RESISTOR ARRAY	1	
	R16242	EXB38V472JV	RESISTOR ARRAY	1	
	R16251	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
	R16252	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16253	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16254	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16255	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
	R16256	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
	R16257	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16258	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16260	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16261	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16280	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16281	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16282	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16283	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16284	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16289	ERJ6GEYJ623V	M 62KOHM,J,1/10W	1	
	R16290	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16291	ERJ6GEYJ623V	M 62KOHM,J,1/10W	1	
	R16292	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16293	ERJ6GEYJ623V	M 62KOHM,J,1/10W	1	
	R16294	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16295	ERJ6GEYJ623V	M 62KOHM,J,1/10W	1	
	R16296	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16300	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16301	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16302	ERJ8GEYJ105V	M 1MOHM, J,1/8W	1	
	R16303	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16304	ERJT08J681V	M 680 OHM,F,0.33W	1	
	R16305	ERJ6GEYJ271V	M 270 OHM J 1/10W	1	
	R16306	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16307	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16308	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16309	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16310	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R16311	ERJ6GEYJ124V	M 120KOHM,J,1/10W	1	
	R16312	ERJ6GEYJ124V	M 120KOHM,J,1/10W	1	
	R16313	ERJ6ENF5232	M52.3KOHM, 1/10W	1	
	R16314	ERJ6ENF6652	M66.5KOHM, 1/10W	1	
	R16315	ERJ6ENF1241	M1.24KOHM, 1/10W	1	
	R16317	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16321	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16322	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16323	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16324	D0GD103JA036	M 10KOHM,J,0.25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16325	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16331	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16333	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R16334	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16336	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16338	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16339	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R16340	ERJT06J152V	M 1.5KOHM,F,0.25W	1	
	R16401	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16403	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16404	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16421	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16423	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16424	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16441	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16442	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16452	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16465	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16466	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16467	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16468	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16471	ERJ6GEYG392	M 3.9KOHM,J,1/10W	1	
	R16472	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16473	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16474	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16475	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16476	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16477	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R16478	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R16479	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16480	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16501	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16502	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16503	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16504	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16506	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16507	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16508	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16509	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16510	ERJT14J1R0U	C1.0 OHM, J,1/4W	1	
	R16511	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16512	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16516	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16517	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16521	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16522	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16523	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16531	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16532	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16533	ERJ6GEYF473	M 47KOHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16541	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16543	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16551	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16552	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16553	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16561	EXB38V470J	RESISTOR ARRAY	1	
	R16562	EXB38V470J	RESISTOR ARRAY	1	
	R16563	EXB38V470J	RESISTOR ARRAY	1	
	R16564	EXB38V470J	RESISTOR ARRAY	1	
	R16565	EXB38V472JV	RESISTOR ARRAY	1	
	R16566	EXB38V472JV	RESISTOR ARRAY	1	
	R16567	EXB38V472JV	RESISTOR ARRAY	1	
	R16568	EXB38V472JV	RESISTOR ARRAY	1	
	R16570	EXB38V472JV	RESISTOR ARRAY	1	
	R16573	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R16579	EXB38V470J	RESISTOR ARRAY	1	
	R16580	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16582	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16583	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16584	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16585	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
	R16586	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
	R16587	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16588	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16590	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16591	EXB38V472JV	RESISTOR ARRAY	1	
	R16592	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16593	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
	R16600	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16601	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16602	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16603	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16604	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16605	ERJ6GEYG182	M 1.8KOHM,J,1/10W	1	
	R16606	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16607	ERJ6ENF7151	M7.15KOHM, 1/10W	1	
	R16608	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16609	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16610	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16611	ERG2FJS104D	M 100KOHM, J, 2W	1	
	R16612	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16613	ERJ8GEYJ473	M 47KOHM, J,1/8W	1	
	R16615	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
	R16616	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16617	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16619	ERJ6GEYJ124V	M 120KOHM,J,1/10W	1	
	R16622	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16623	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16624	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16625	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16627	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16628	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16629	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16630	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16632	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16633	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16634	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16635	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16636	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16637	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R16638	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	
	R16639	ERJT14J1R0U	C1.0 OHM, J,1/4W	1	
	R16641	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16642	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16643	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16644	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16647	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16648	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16649	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16650	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16657	ERJ6GEYG682	M 6.8KOHM,J,1/10W	1	
	R16658	D0D1101JA009	M 100 OHM,J,1W	1	
	R16659	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16660	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16661	ERJ6GEYG182	M 1.8KOHM,J,1/10W	1	
	R16662	ERJ6ENF2201	M 2.2KOHM, 1/10W	1	
	R16663	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R16664	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16665	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16666	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16667	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	R16668	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16669	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16670	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16671	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16672	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16673	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R16675	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16681	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16682	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16683	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16684	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16686	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16687	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16688	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16689	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16696	ERF5TK2R2	W 2.2 OHM, K, 5W	1	
	R16700	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16701	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16702	ERJ6GEYJ332V	M 3.3K OHM J 1/10W	1	
	R16703	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16704	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16705	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16706	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16707	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	R16717	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16719	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16720	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16721	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16722	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16723	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16729	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16730	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16731	ERG1FJS823D	M 82KOHM, J, 1W	1	
	R16732	ERJ6GEYG392	M 3.9KOHM,J,1/10W	1	
	R16733	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16734	ERJ6ENF4991	M4.99KOHM, 1/10W	1	
	R16735	ERJ6ENF2213	M 221KOHM, 1/10W	1	
	R16736	ERJ6ENF2213	M 221KOHM, 1/10W	1	
	R16737	ERJ6ENF2213	M 221KOHM, 1/10W	1	
	R16738	ERG1FJS823D	M 82KOHM, J, 1W	1	
	R16740	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16742	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16744	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16745	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
	R16746	ERJT06J103V	M 10KOHM,F,0.25W	1	
	R16747	ERJT06J103V	M 10KOHM,F,0.25W	1	
	R16749	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16750	ERJT06J223V	M 22 KOHM,F,0.25W	1	
	R16751	ERJT06J224V	M 220KOHM,F,0.25W	1	
	R16752	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16753	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16756	ERJT06J223V	M 22 KOHM,F,0.25W	1	
	R16757	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16761	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16762	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16763	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16764	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16765	ERJT08J1R0V	M 1.80OHM,J,0.33W	1	
	R16766	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16768	ERJT08J1R0V	M 1.80OHM,J,0.33W	1	
	R16769	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16771	ERJ6GEYG182	M 1.8KOHM,J,1/10W	1	
	R16774	ERG1SJ683		1	
	R16775	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16776	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16777	ERJT06J151V	M 150 OHM,F,0.25W	1	
	R16778	ERJ6GEYG182	M 1.8KOHM,J,1/10W	1	
	R16781	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16782	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16783	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16784	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16785	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16786	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16787	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16788	ERJT06J154V	M 150KOHM,F,0.25W	1	
	R16789	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16791	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16792	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16794	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16795	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16796	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16797	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R16798	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16799	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16801	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16802	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16804	ERJ8GEYJ224V	M 220KOHM, J,1/8W	1	
	R16805	ERJ8GEYJ224V	M 220KOHM, J,1/8W	1	
	R16807	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16808	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16810	ERJ6ENF1742	M17.4KOHM, 1/10W	1	
	R16811	ERJ6ENF1742	M17.4KOHM, 1/10W	1	
	R16813	ERJ8GEYJ102V	M 1KOHM, J,1/8W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16814	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
	R16815	D1BD1002A044	M10.0KOHM, 1/10W	1	
	R16816	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16818	ERJ6ENF6802	M 68KOHM, 1/10W	1	
	R16819	ERJ6ENF6802	M 68KOHM, 1/10W	1	
	R16820	ERJ6ENF7872	M78.7KOHM, 1/10W	1	
	R16821	ERJ6ENF1003	M 100KOHM, 1/10W	1	
	R16822	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16823	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16824	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16825	ERJT06J154V	M 150KOHM,F,0.25W	1	
	R16826	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16827	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16828	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16831	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16832	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16833	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16834	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16835	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16838	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16841	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16844	ERJ6ENF1241	M1.24KOHM, 1/10W	1	
	R16845	ERJ6ENF5622	M5.62KOHM, 1/10W	1	
	R16846	ERJ6ENF5762	M57.6KOHM, 1/10W	1	
	R16850	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16851	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16852	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16855	ERG1FJS103D	M 10KOHM, J, 1W	1	
	R16856	ERQ12AJW560E	F 56 OHM, J,1/2W	1	
	R16857	ERJ12YJ124U	M 120KOHM, 1/2W	1	
	R16860	D0D28R2JA021	M 8.2 OHM,J,2W	1	
	R16869	ERJ8GEYJ473	M 47KOHM, J,1/8W	1	
	R16870	ERG2FJS333D	M 33KOHM, J, 2W	1	
	R16871	ERJ6GEYG392	M 3.9KOHM,J,1/10W	1	
	R16872	ERJ6GEYJ332V	M 3.3K OHM J 1/10W	1	
	R16873	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
	R16874	ERJ6ENF7152	M71.5KOHM, 1/10W	1	
	R16875	ERJ6ENF7152	M71.5KOHM, 1/10W	1	
	R16878	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16879	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16880	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R16886	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16887	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16888	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17107	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17108	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17109	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17110	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17119	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17120	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17121	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17122	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17125	EXB38V471J	RESISTOR ARRAY	1	
	R17126	EXB38V471J	RESISTOR ARRAY	1	
	R17128	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17129	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17131	EXB38V471J	RESISTOR ARRAY	1	
	R17132	EXB38V471J	RESISTOR ARRAY	1	
	R17134	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17135	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17137	D0GF472JA047	M 4.7KOHM,J,0.33W	1	
	R17138	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17139	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R17140	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17151	EXB38V470J	RESISTOR ARRAY	1	
	R17152	EXB38V470J	RESISTOR ARRAY	1	
	R17153	EXB38V681J	RESISTOR ARRAY	1	
	R17154	EXB38V220JV	RESISTOR ARRAY	1	
	R17155	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
	R17156	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
	R17157	EXB38V220JV	RESISTOR ARRAY	1	
	R17158	EXB38V220JV	RESISTOR ARRAY	1	
	R17159	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
	R17160	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
	R17167	EXB38V470J	RESISTOR ARRAY	1	
	R17168	EXB38V470J	RESISTOR ARRAY	1	
	R17169	EXB38V471J	RESISTOR ARRAY	1	
	R17170	EXB38V471J	RESISTOR ARRAY	1	
	R17173	EXB38V470J	RESISTOR ARRAY	1	
	R17174	EXB38V470J	RESISTOR ARRAY	1	
	R17175	EXB38V471J	RESISTOR ARRAY	1	
	R17176	EXB38V471J	RESISTOR ARRAY	1	
	R17179	EXB38V470J	RESISTOR ARRAY	1	
	R17180	EXB38V470J	RESISTOR ARRAY	1	
	R17181	EXB38V471J	RESISTOR ARRAY	1	
	R17182	EXB38V471J	RESISTOR ARRAY	1	
	R17201	EXB38V471J	RESISTOR ARRAY	1	
	R17202	EXB38V471J	RESISTOR ARRAY	1	
	R17203	EXB38V471J	RESISTOR ARRAY	1	
	R17204	EXB38V471J	RESISTOR ARRAY	1	
	R17209	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17210	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17211	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17212	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17213	EXB38V471J	RESISTOR ARRAY	1	
	R17214	EXB38V471J	RESISTOR ARRAY	1	
	R17215	EXB38V471J	RESISTOR ARRAY	1	
	R17216	EXB38V471J	RESISTOR ARRAY	1	
	R17221	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17222	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17223	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17224	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17225	EXB38V471J	RESISTOR ARRAY	1	
	R17226	EXB38V471J	RESISTOR ARRAY	1	
	R17229	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17230	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17251	EXB38V470J	RESISTOR ARRAY	1	
	R17252	EXB38V470J	RESISTOR ARRAY	1	
	R17253	EXB38V681J	RESISTOR ARRAY	1	
	R17254	EXB38V470J	RESISTOR ARRAY	1	
	R17255	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
	R17256	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
	R17257	EXB38V220JV	RESISTOR ARRAY	1	
	R17258	EXB38V681J	RESISTOR ARRAY	1	
	R17259	EXB38V220JV	RESISTOR ARRAY	1	
	R17260	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17261	EXB38V470J	RESISTOR ARRAY	1	
	R17262	EXB38V470J	RESISTOR ARRAY	1	
	R17263	EXB38V681J	RESISTOR ARRAY	1	
	R17264	EXB38V681J	RESISTOR ARRAY	1	
	R17277	EXB38V471J	RESISTOR ARRAY	1	
	R17278	EXB38V471J	RESISTOR ARRAY	1	
	R17304	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17305	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17310	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17311	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17316	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17317	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17322	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17323	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17341	D0GF472JA047	M 4.7KOHM,J,0.33W	1	
	R17342	EXB38V470J	RESISTOR ARRAY	1	
	R17343	EXB38V470J	RESISTOR ARRAY	1	
	R17344	EXB38V471J	RESISTOR ARRAY	1	
	R17345	EXB38V471J	RESISTOR ARRAY	1	
	R17346	EXB38V470J	RESISTOR ARRAY	1	
	R17347	EXB38V470J	RESISTOR ARRAY	1	
	R17348	EXB38V471J	RESISTOR ARRAY	1	
	R17349	EXB38V471J	RESISTOR ARRAY	1	
	R17350	EXB38V470J	RESISTOR ARRAY	1	
	R17351	EXB38V470J	RESISTOR ARRAY	1	
	R17352	EXB38V471J	RESISTOR ARRAY	1	
	R17353	EXB38V471J	RESISTOR ARRAY	1	
	R17354	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R17355	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R17356	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17357	EXB38V220JV	RESISTOR ARRAY	1	
	R17358	EXB38V220JV	RESISTOR ARRAY	1	
	R17359	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
	R17360	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
	SC2	K1KA02A00676	2P CONNECTOR	1	
	SC20	K1MN35BA0266	35P CONNECTOR	1	
	SC30	K1KA08AA0190	8P CONNECTOR	1	
	SC41	K1KA23AA0733	23P CONNECTOR	1	
	SC42	K1KA23AA0733	23P CONNECTOR	1	
	SC46	K1KA09A00239	9P CONNECTOR	1	
	SCMM1	TMME047	CLAMPER	1	
	SCMM4	TMME292	CLAMPER	1	
	SCMM5	TMME260	CLAMPER	1	
	SD1	K1MND6BA0264	6P CONNECTOR	1	
	SD2	K1MND6BA0264	6P CONNECTOR	1	
	SD3	K1MND6BA0264	6P CONNECTOR	1	
	SD4	K1MND6BA0264	6P CONNECTOR	1	
	SD11	K1MN20BA0231	20P CONNECTOR	1	
	SD42	K1KB23AA0234	23P CONNECTOR	1	
	SD46	K1KY09AA0607	9P CONNECTOR	1	
	SS11	K1KA02A00676	2P CONNECTOR	1	
	SS12	K1KA10AA0194	10P CONNECTOR	1	
	SS33	K1KA10AA0416	10P CONNECTOR	1	
	SS34	K1KA03AA0193	3P CONNECTOR	1	
	SS35	K1KA04AA0193	4P CONNECTOR	1	
	SS61	K1MN13BA0258	13P CONNECTOR	1	
	SS63	K1MN13BA0258	13P CONNECTOR	1	
	SS64	K1MN13BA0258	13P CONNECTOR	1	
	SS66	K1MN13BA0258	13P CONNECTOR	1	
	SSMM3	TMME190	CLAMPER	1	
	SSMM4	TMME190	CLAMPER	1	
	SU1	K1MND6BA0264	6P CONNECTOR	1	
	SU2	K1MND6BA0264	6P CONNECTOR	1	
	SU3	K1MND6BA0264	6P CONNECTOR	1	
	SU4	K1MND6BA0264	6P CONNECTOR	1	
	SU11	K1MN20BA0266	20P CONNECTOR	1	
	SU41	K1KB23AA0234	23P CONNECTOR	1	
	T16301A	ETS19AB249AC	SWITCHING TRANS	1	
	VR16000	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
	VR16600	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
	VR16602	EVMEASA00B23	CONTROL 2KOHMB 0.3W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ZA14901	K4AD01Z00003	TERMINAL	1	
	ZA14902	K4AD01Z00003	TERMINAL	1	
	ZA14951	K4AD01Z00003	TERMINAL	1	
	ZA14952	K4AD01Z00003	TERMINAL	1	
	ZA16001	K4CD01000011	AV TERMINAL	1	
	ZA16002	K4CD01000011	AV TERMINAL	1	
	ZA16003	K4CD01000011	AV TERMINAL	1	
	ZA16401	K4CD01000011	AV TERMINAL	1	
	ZA16402	K4CD01000011	AV TERMINAL	1	
	ZA16403	K4CD01000011	AV TERMINAL	1	
	ZA17101	K4AD01Z00001	TERMINAL	1	
	ZA17102	K4AD01Z00001	TERMINAL	1	
	ZA17103	K4AD01Z00001	TERMINAL	1	
	ZA17104	K4AD01Z00001	TERMINAL	1	
	ZA17105	K4AD01Z00001	TERMINAL	1	
	ZA17201	K4AD01Z00001	TERMINAL	1	
	ZA17203	K4AD01Z00001	TERMINAL	1	
	ZA17204	K4AD01Z00001	TERMINAL	1	
	ZA17205	K4AD01Z00001	TERMINAL	1	
	ZA17301	K4AD01Z00001	TERMINAL	1	
	ZA17302	K4AD01Z00001	TERMINAL	1	
	ZA17303	K4AD01Z00001	TERMINAL	1	
	ZA17304	K4AD01Z00001	TERMINAL	1	
△	A601	AYRA652MSV8T	ARRESTOR	1	
	C407	ACRR3DD101K7	ELECTROLYTIC CAPACITOR	1	
△	C501	ECQU2A103MLA	P 0.01UF, M, 250V	1	
△	C503	ACKMQ2W560T	ELECTROLYTIC CAPACITOR	1	
	C505	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C506	ACKZE1H100T	ELECTROLYTIC CAPACITOR	1	
	C507	ACKZE1H221T	ELECTROLYTIC CAPACITOR	1	
	C508	ACKZE1H220T	ELECTROLYTIC CAPACITOR	1	
	C551	ACKZE1A102LC	ELECTROLYTIC CAPACITOR	1	
	C557	ECQV1473JM2	PLASTIC FILM CAPACITOR	1	
	C558	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C559	ECQV1H474JL	P 0.47UF, J, 50V	1	
△	C601	ECQU2A105MLA	PLASTIC FILM CAPACITOR	1	
△	D501	VDS1WBA80	DIODE	1	
	D504	VXST3D82BL3	POWER CLAMPER	1	
	D505	VDAG01AT	DIODE	1	
	D506	VDAG01AT	DIODE	1	
	D551	VDRK39A5	DIODE	1	
	D556	VDRF101A2S	DIODE	1	
△	F501	HU382T2C	MICRO FUSE	1	
△	F601	HU215010BEP	CARTRIDGE FUSE (LEADTYPE)	1	
△	F602	HU215010BEP	CARTRIDGE FUSE (LEADTYPE)	1	
△	IC501	MIP3E30MPSCF	IC	1	
	IC555	AN1431TBTA	INTEGRATED CIRCUIT	1	
	L501	EXCELSA35	BEAD CHOKE	1	
	L502	EXCELDLR35C	BEAD CHOKE	1	
	L503	EXCELDLR35C	BEAD CHOKE	1	
	L551	EXCELDLR35C	BEAD CHOKE	1	
△	L601	AYP3165208ZA	FILTER CHOKE	1	
△	L602	AYP3165208ZA	FILTER CHOKE	1	
△	L604	AYP3165208ZA	FILTER CHOKE	1	
△	MC401	MDPPSA103	MODULE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
△	MC501	MDPTZA101	MODULE	1	
△	P9	AKS02B-VT	CONNECTOR	1	
△	P51	AKB6P-VH	CONNECTOR	1	
△	P53	AKB2P-VH	CONNECTOR	1	
	P55	AKB4B-EH-A	CONNECTOR	1	
△	PC502	VPS2581AL1VH	OPTOISOLATOR	1	
	R501	ARR5B100JC2	WIREWOUND RESISTOR	1	
△	R502	ARRCR6J825M	METAL GLAZE FIXED RESISTOR	1	
	R505	ERDS2FJ561	C 560 OHM, J, 1/4W	1	
	R506	ARRCR2F1304T	METAL GLAZE FIXED RESISTOR	1	
	R507	ARRCR2F1184T	METAL GLAZE FIXED RESISTOR	1	
	R509	ARRCR2F1304T	METAL GLAZE FIXED RESISTOR	1	
	R510	ARRCR2F1184T	METAL GLAZE FIXED RESISTOR	1	
	R522	ERDS2FJ180	CARBON FILM RESISTOR	1	
	R555	ER0S2CKF1052	M10.5KOHM, F, 1/4W	1	
	R558	ER0S2CKF1503	M 150KOHM, F, 1/4W	1	
	R560	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
	R562	ERDS2FJ150	CARBON FILM RESISTOR	1	
	R563	ERDS2FJ121	CARBON FILM RESISTOR	1	
	R564	ER0S2THD1002	METAL FILM RESISTOR	1	
△	R601	ARRCR5J624M	METAL GLAZE FIXED RESISTOR	1	
△	T501	ETB25AH118BH	TRANSFORMER	1	
△	Z501	ERZVGAD471	VARISTOR	1	
△	Z601	ERZVGED751	VARISTOR	1	
△	Z602	ERZVGED751	VARISTOR	1	
△	Z603	ERZVGAD471	VARISTOR	1	
	ZD501	MA4300NMTA	ZENER DIODE	1	
	ZD502	MA4300NMTA	ZENER DIODE	1	
	ZD503	MA4082NM	ZENER DIODE	1	
	ZD555	MA4330NMTA	ZENER DIODE	1	
	C201	ACKZE1H220T	ELECTROLYTIC CAPACITOR	1	
	C202	ACCC3FD470JP	CERAMIC CAPACITOR	1	
	C203	ACCC3FD470JP	CERAMIC CAPACITOR	1	
	C204	ACMPEF12333H	PLASTIC FILM CAPACITOR	1	
	C205	ACMPEF12333H	PLASTIC FILM CAPACITOR	1	
△	C206	ECKENA101KBR	C 100P 250V	1	
	C207	ACDE1R681KP	CERAMIC CAPACITOR	1	
	C208	ACDE1R681KP	CERAMIC CAPACITOR	1	
	C251	ECQV1H104JL	P 0.1UF, J, 50V	1	
	C252	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C254	ECQE2223SKF	PLASTIC FILM CAPACITOR	1	
	C255	ECQE2223SKF	PLASTIC FILM CAPACITOR	1	
△	C256	ACKMQ220901Z	ELECTROLYTIC CAPACITOR	1	
△	C257	ACKMQ220901Z	ELECTROLYTIC CAPACITOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
△	C258	ACKMQ220901Z	ELECTROLYTIC CAPACITOR	1	
	C301	ACKZE1H220T	ELECTROLYTIC CAPACITOR	1	
	C302	ACRR3DD101K7	CERAMIC CAPACITOR	1	
	C303	ACRR3DD101K7	CERAMIC CAPACITOR	1	
	C304	ACMPEF12473H	PLASTIC FILM CAPACITOR	1	
	C305	ACCK1B331KP	CERAMIC CAPACITOR	1	
	C306	ACCK1B331KP	CERAMIC CAPACITOR	1	
	C352	ACKZE1E182ST	ELECTROLYTIC CAPACITOR	1	
	C354	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C355	ECQV1H823JL	PLASTIC FILM CAPACITOR	1	
	C357	ACKZE1E471LT	ELECTROLYTIC CAPACITOR	1	
	C358	ACKZE1E471LT	ELECTROLYTIC CAPACITOR	1	
	C401	ECQE2104SKF	PLASTIC FILM CAPACITOR	1	
	C402	ECQE2104SKF	PLASTIC FILM CAPACITOR	1	
△	C403	EETHC2C471HX	ELECTROLYTIC CAPACITOR	1	
	C404	ACKZE1H101T	ELECTROLYTIC CAPACITOR	1	
△	C406	EETHC2A122JJ	ELECTROLYTIC CAPACITOR	1	
	C409	ECQE2104SKF	PLASTIC FILM CAPACITOR	1	
	C451	ACKZE1A471C	ELECTROLYTIC CAPACITOR	1	
	C504	ACKZE1H220T	ELECTROLYTIC CAPACITOR	1	
	C555	ACKZE1E470T	ELECTROLYTIC CAPACITOR	1	
△	C602	ECQU2A105MLA	PLASTIC FILM CAPACITOR	1	
△	C603	ECKENA471KBR	CERAMIC CAPACITOR	1	
△	C604	ECKENA471KBR	CERAMIC CAPACITOR	1	
	C605	ACDE1R102K7	CERAMIC CAPACITOR	1	
	C606	AC4MPK105KA3	PLASTIC FILM CAPACITOR	1	
	C610	ECQV1H105JL	PLASTIC FILM CAPACITOR	1	
	C611	ACKZE1H220T	ELECTROLYTIC CAPACITOR	1	
△	C612	EETHD2W301LZ	ELECTROLYTIC CAPACITOR	1	
△	C613	EETHD2W301LZ	ELECTROLYTIC CAPACITOR	1	
△	C615	ECKENA221KBR	C 221P 250V	1	
	C625	ACRR3AD222KP	CERAMIC CAPACITOR	1	
	C701	ACKZE1A471C	ELECTROLYTIC CAPACITOR	1	
	C702	ECQV1H103JL2	P 0.01UF, J, 50V	1	
	D251	MA165TAKU	DIODE	1	
	D254	MA2DF3100S	DIODE	1	
	D255	MA2DF3100S	DIODE	1	
	D256	MA2DF3100S	DIODE	1	
	D257	MA2DF3100S	DIODE	1	
	D351	VDG865C08R	DIODE	1	
	D352	VDAG01AT	DIODE	1	
	D353	VDG865C08R	DIODE	1	
	D401	VDD6SBN20	DIODE	1	
	D402	VDAG01AT	DIODE	1	
	D403	VDYG901C3R	DIODE	1	
	D601	MA165TAKU	DIODE	1	
	D602	MA165TAKU	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D603	VDAP01CT	DIODE	1	
	D604	VDAP01CT	DIODE	1	
	D606	VDS3V60L1	DIODE	1	
	D702	VDERA83-004T	DIODE	1	
△	F201	HU216005BEP	CARTRIDGE FUSE (LEADTYPE)	1	
△	F301	HU216005BEP	CARTRIDGE FUSE (LEADTYPE)	1	
	IC251	AN1431TBTA	INTEGRATED CIRCUIT	1	
	IC352	AN1431TBTA	INTEGRATED CIRCUIT	1	
△	K601	ALKT329C93	RELAY	1	
△	K602	ALDJ5D2T8	RELAY	1	
	L401	AYLH8TB681K	CHOKE	1	
	L402	AYH221012HY	CHOKE	1	
	L603	ETB50CZ14GAD	CHOKE	1	
△	MC201	MDPPNB331	MODULE	1	
△	MC203	MP00R3A1	MODULE	1	
△	MC301	MDPPNB102	MODULE	1	
△	MC352	MDPJFB101	MODULE	1	
△	MC451	MDPLSB101	MODULE	1	
△	MC502	MDPHHA101	MODULE	1	
△	MC552	MDPPFC101	MODULE	1	
△	MC601	MDPLPA101	MODULE	1	
△	MC602	MP00P18	MODULE	1	
△	MC603	MP00P28	MODULE	1	
△	MC606	MP00P29	MODULE	1	
△	MC701	MDPZDA101	MODULE	1	
	P2	AKB2P3-VH-B	CONNECTOR	1	
	P6	AKB12B-EH-A	CONNECTOR	1	
	P7	AKB11B-EH-A	CONNECTOR	1	
	P11	AKB2P3-VH-B	CONNECTOR	1	
	P12	AKB10B-PH-KS	CONNECTOR	1	
	P25	AKB13B-PH-KS	CONNECTOR	1	
△	P52	AKB6P-VH	CONNECTOR	1	
△	P54	AKB2P-VH	CONNECTOR	1	
	P56	AKB4B-EH-A	CONNECTOR	1	
△	PC201	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC202	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC301	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC302	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC401	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC501	VPS2581AL1VH	OPTOISOLATOR	1	
△	Q301	VKFMA16N55G	FIELD EFFECT TRANSISTOR	1	
△	Q302	VKFMA16N55G	FIELD EFFECT TRANSISTOR	1	
	Q351	2SK3704	FIELD EFFECT TRANSISTOR	1	
	Q401	2SK3607	FIELD EFFECT TRANSISTOR	1	
	Q402	2SA17670Q2TV	TRANSISTOR	1	
	Q403	2SA17670Q2TV	TRANSISTOR	1	
	R202	ERQ14AJ4R7J	F 4.7 OHM, J, 1/4W	1	
	R203	ERDS2FJ334	CARBON FILM RESISTOR	1	
	R204	ERDS2FJ334	CARBON FILM RESISTOR	1	
	R208	ERG12SJ910J	METAL OXIDE FILM RESISTOR	1	
	R215	ERG12SJ680J	METAL OXIDE FILM RESISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R216	ERG12SJ220J	METAL OXIDE FILM RESISTOR	1	
	R217	ERG12SJ910J	METAL OXIDE FILM RESISTOR	1	
	R251	ARRCR2F1213T	METAL GLAZE FIXED RESISTOR	1	
	R252	ARRCR2F1213T	METAL GLAZE FIXED RESISTOR	1	
	R253	ERDS2FJ151	CARBON FILM RESISTOR	1	
	R254	ERDS2FJ102	M 1KOHM, J, 1/10W	1	
	R256	ER0S2THD1002	METAL FILM RESISTOR	1	
	R257	ERDS2FJ472	CARBON FILM RESISTOR	1	
	R258	ERDS2FJ472	CARBON FILM RESISTOR	1	
	R259	ERDS2FJ472	CARBON FILM RESISTOR	1	
	R263	ERDS2FJ220	C 22 OHM, J, 1/4W	1	
	R264	ERDS2FJ102	M 1KOHM, J, 1/10W	1	
	R265	ARRCR1F2703T	METAL GLAZE FIXED RESISTOR	1	
	R266	ARRCR1F3323T	METAL GLAZE FIXED RESISTOR	1	
	R267	ARRCR1F3323T	METAL GLAZE FIXED RESISTOR	1	
	R302	ERQ14AJ4R7J	F 4.7 OHM, J, 1/4W	1	
	R303	ERDS2FJ334	CARBON FILM RESISTOR	1	
	R304	ERDS2FJ334	CARBON FILM RESISTOR	1	
	R308	ERG12SJ910J	METAL OXIDE FILM RESISTOR	1	
	R309	ERG12SJ680J	METAL OXIDE FILM RESISTOR	1	
	R310	ERG12SJ220J	METAL OXIDE FILM RESISTOR	1	
	R311	ERG12SJ910J	METAL OXIDE FILM RESISTOR	1	
	R351	ER0S2CHF8871	M8.87KOHM, F, 1/4W	1	
	R352	ARRF5EJR10B	METAL PLATE RESISTOR	1	
	R353	ERDS2FJ561	C 560 OHM, J, 1/4W	1	
	R354	ERDS2FJ221	C 220 OHM, J, 1/4W	1	
	R355	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
	R356	ER0S2THD1002	METAL FILM RESISTOR	1	
	R359	ER0S2THD5232	METAL FILM RESISTOR	1	
	R362	ERG12SJ332J	METAL OXIDE FILM RESISTOR	1	
	R366	ER0S2THF6981	METAL FILM RESISTOR	1	
	R367	ER0S2CHF8451	METAL FILM RESISTOR	1	
	R371	ER0S2THF6981	METAL FILM RESISTOR	1	
	R372	ER0S2THF1151	METAL FILM RESISTOR	1	
	R403	ERG12SJ100J	METAL OXIDE FILM RESISTOR	1	
	R404	ER0S2CKF6492	M64.9KOHM, F, 1/4W	1	
	R405	ARRF5EJR10B	METAL PLATE RESISTOR	1	
	R409	ERDS2FJ473	C 47KOHM, J, 1/4W	1	
	R411	ER0S2CKF2001	METAL FILM RESISTOR	1	
	R412	ER0S2CKF2001	METAL FILM RESISTOR	1	
	R413	ER0S2THF3162	METAL FILM RESISTOR	1	
	R414	ER0S2THF3162	METAL FILM RESISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R417	ER0S2THF4422	METAL FILM RESISTOR	1	
	R418	ER0S2THF4422	METAL FILM RESISTOR	1	
	R420	ER0S2THF5620	METAL FILM RESISTOR	1	
	R421	ER0S2THF1652	METAL FILM RESISTOR	1	
	R456	ER0S2CKF1332	M13.3KOHM, F, 1/4W	1	
	R557	ERDS2TJ392	C 3.9KOHM, J, 1/4W	1	
	R559	ER0S2CKF1623	M 162KOHM, F, 1/4W	1	
	R561	ER0S2CHF2152	METAL FILM RESISTOR	1	
	R603	ARRCR2F4753T	METAL GLAZE FIXED RESISTOR	1	
	R604	ARRCR2F4023T	METAL GLAZE FIXED RESISTOR	1	
	R607	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R608	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R611	ER0S2THF5112	METAL FILM RESISTOR	1	
	R617	ARRF5EJR15B	METAL PLATE RESISTOR	1	
	R618	ARRF5EJR15B	METAL PLATE RESISTOR	1	
	R619	ARRF5EJR10B	METAL PLATE RESISTOR	1	
	R622	ERDS2FJ472	CARBON FILM RESISTOR	1	
	R623	ERG12SJ270J	METAL OXIDE FILM RESISTOR	1	
	R624	ERDS2FJ472	CARBON FILM RESISTOR	1	
	R625	ERG12SJ270J	METAL OXIDE FILM RESISTOR	1	
	R626	ERDS2FJ472	CARBON FILM RESISTOR	1	
	R627	ERG12SJ270J	METAL OXIDE FILM RESISTOR	1	
	R630	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R631	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R632	ARRCR1F2213T	METAL GLAZE FIXED RESISTOR	1	
	R701	ERDS2FJ221	C 220 OHM, J, 1/4W	1	
	R702	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
	R703	ERDS2FJ221	C 220 OHM, J, 1/4W	1	
	R704	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
	R706	ERDS2FJ221	C 220 OHM, J, 1/4W	1	
	R707	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
	R712	ERDS2FJ221	C 220 OHM, J, 1/4W	1	
	R713	ERDS2FJ222	C 2.2KOHM, J, 1/4W	1	
△	RF601	HUY5JA200JP	THERMAL CUTOFF WITH RESISTOR	1	
△	T201	ETB57LZ1KGD	TRANSFORMER	1	
△	T301	ETB50LZ18GD	TRANSFORMER	1	
	VR251	EVMEASA01B55	VARIABLE RESISTOR	1	
	VR401	EVMEASA01B54	VARIABLE RESISTOR	1	
	ZD201	MA4270NMTA	ZENER DIODE	1	
	ZD203	MA4270NMTA	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ZD204	MA4270NMTA	ZENER DIODE	1	
	ZD251	MA4330NMTA	ZENER DIODE	1	
	ZD301	MA4270NMTA	ZENER DIODE	1	
	ZD302	MA4270NMTA	ZENER DIODE	1	
	ZD305	MA4270NMTA	ZENER DIODE	1	
	ZD351	MA4330NMTA	ZENER DIODE	1	
	ZD451	MAZ4068NMF	ZENER DIODE	1	
	ZD601	MA4047NM	ZENER DIODE	1	