




MECHANICAL EXPLODED VIEW

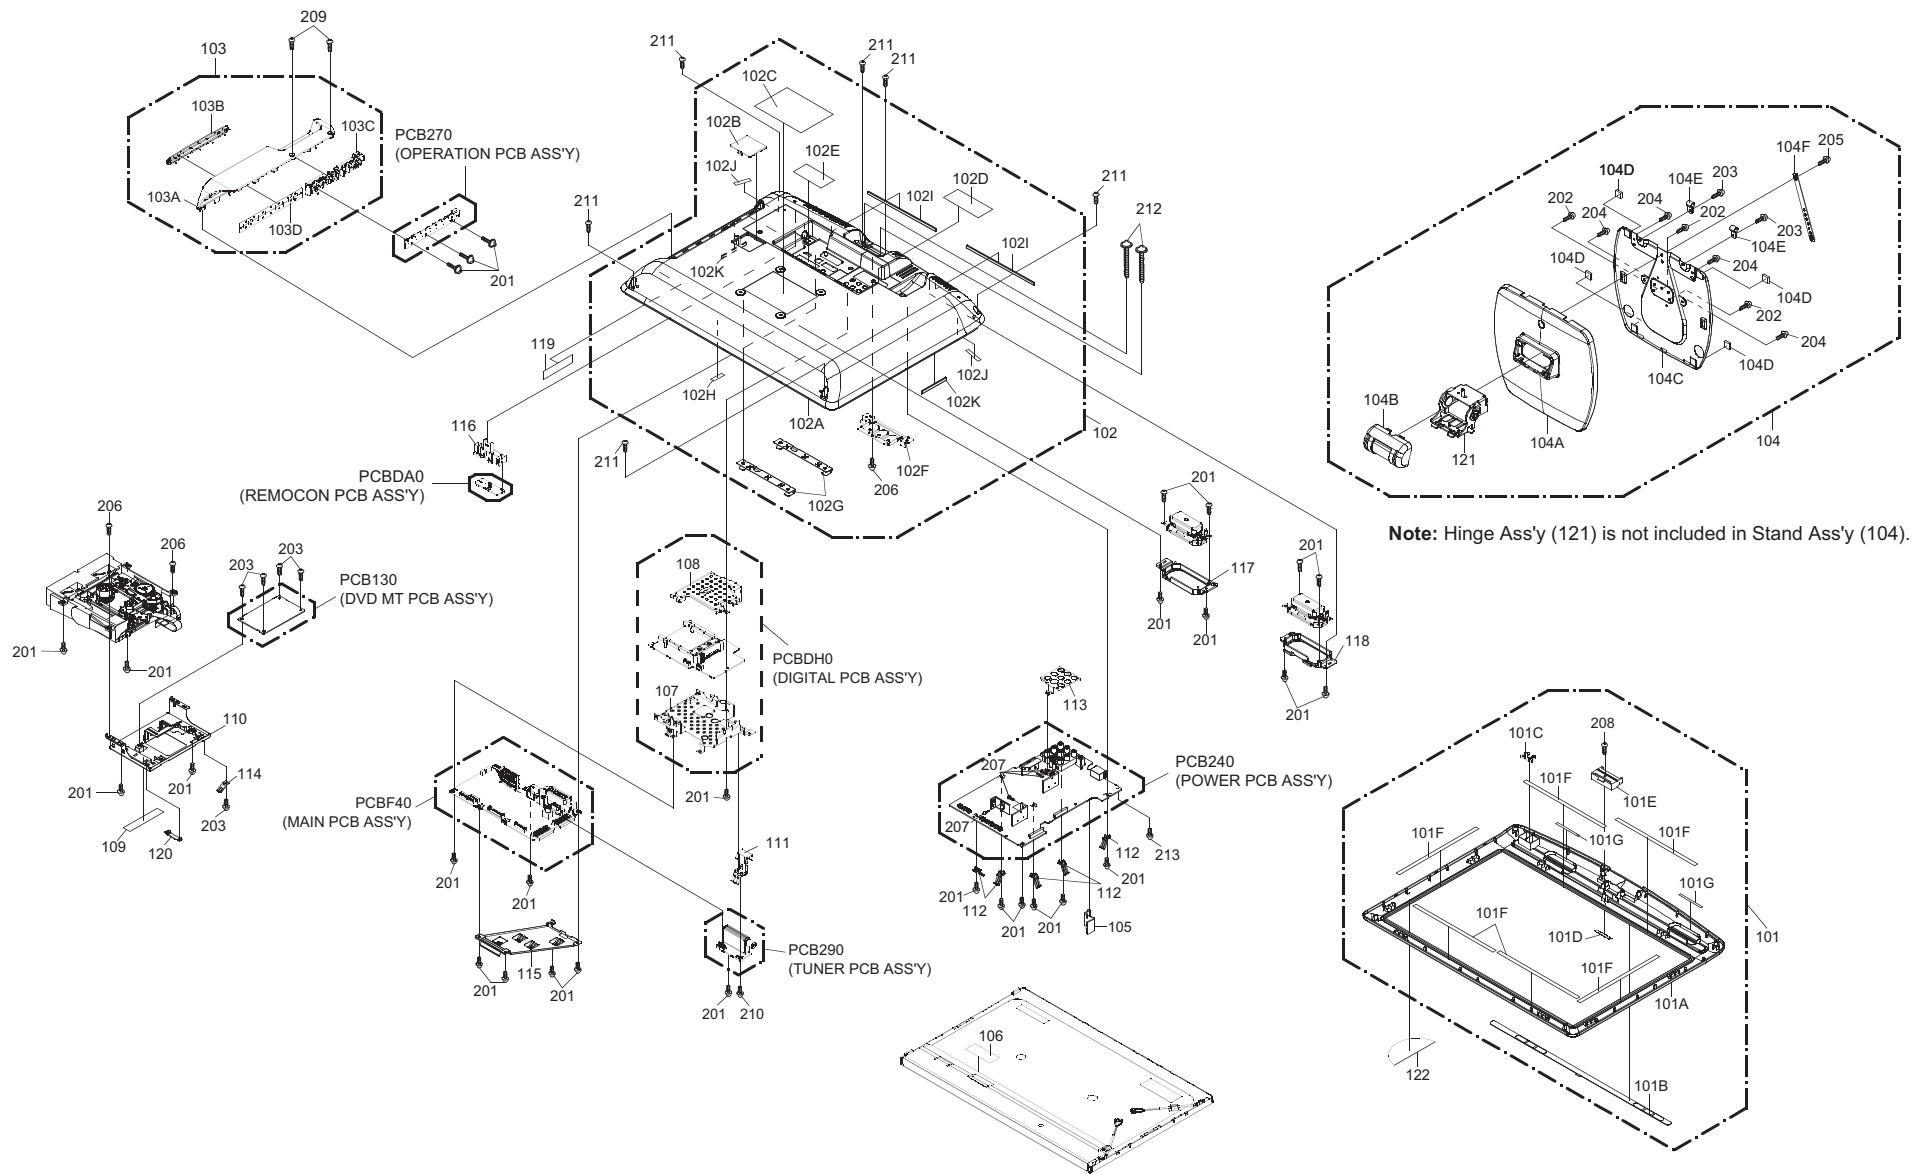


MECHANICAL EXPLODED VIEW

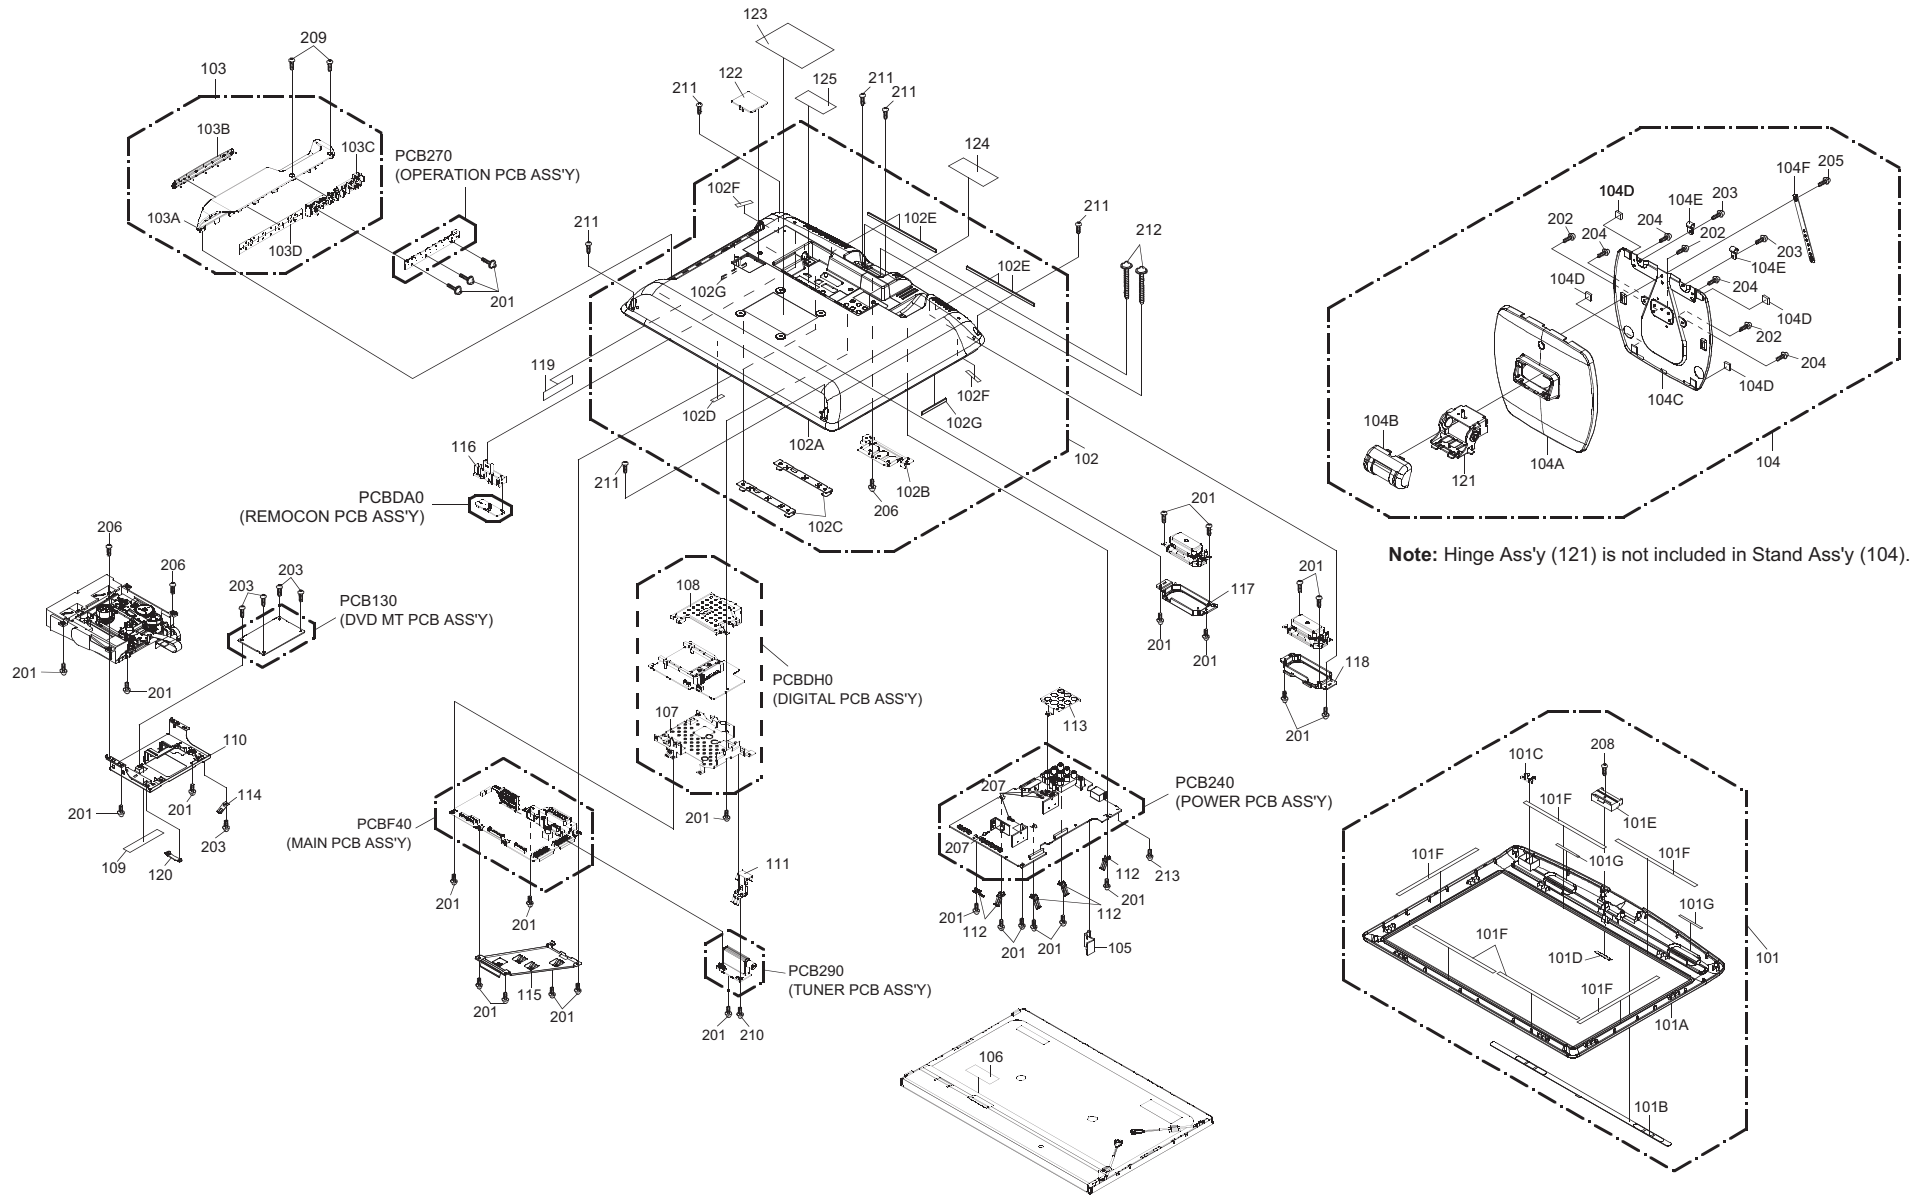


MECHANICAL EXPLODED VIEW

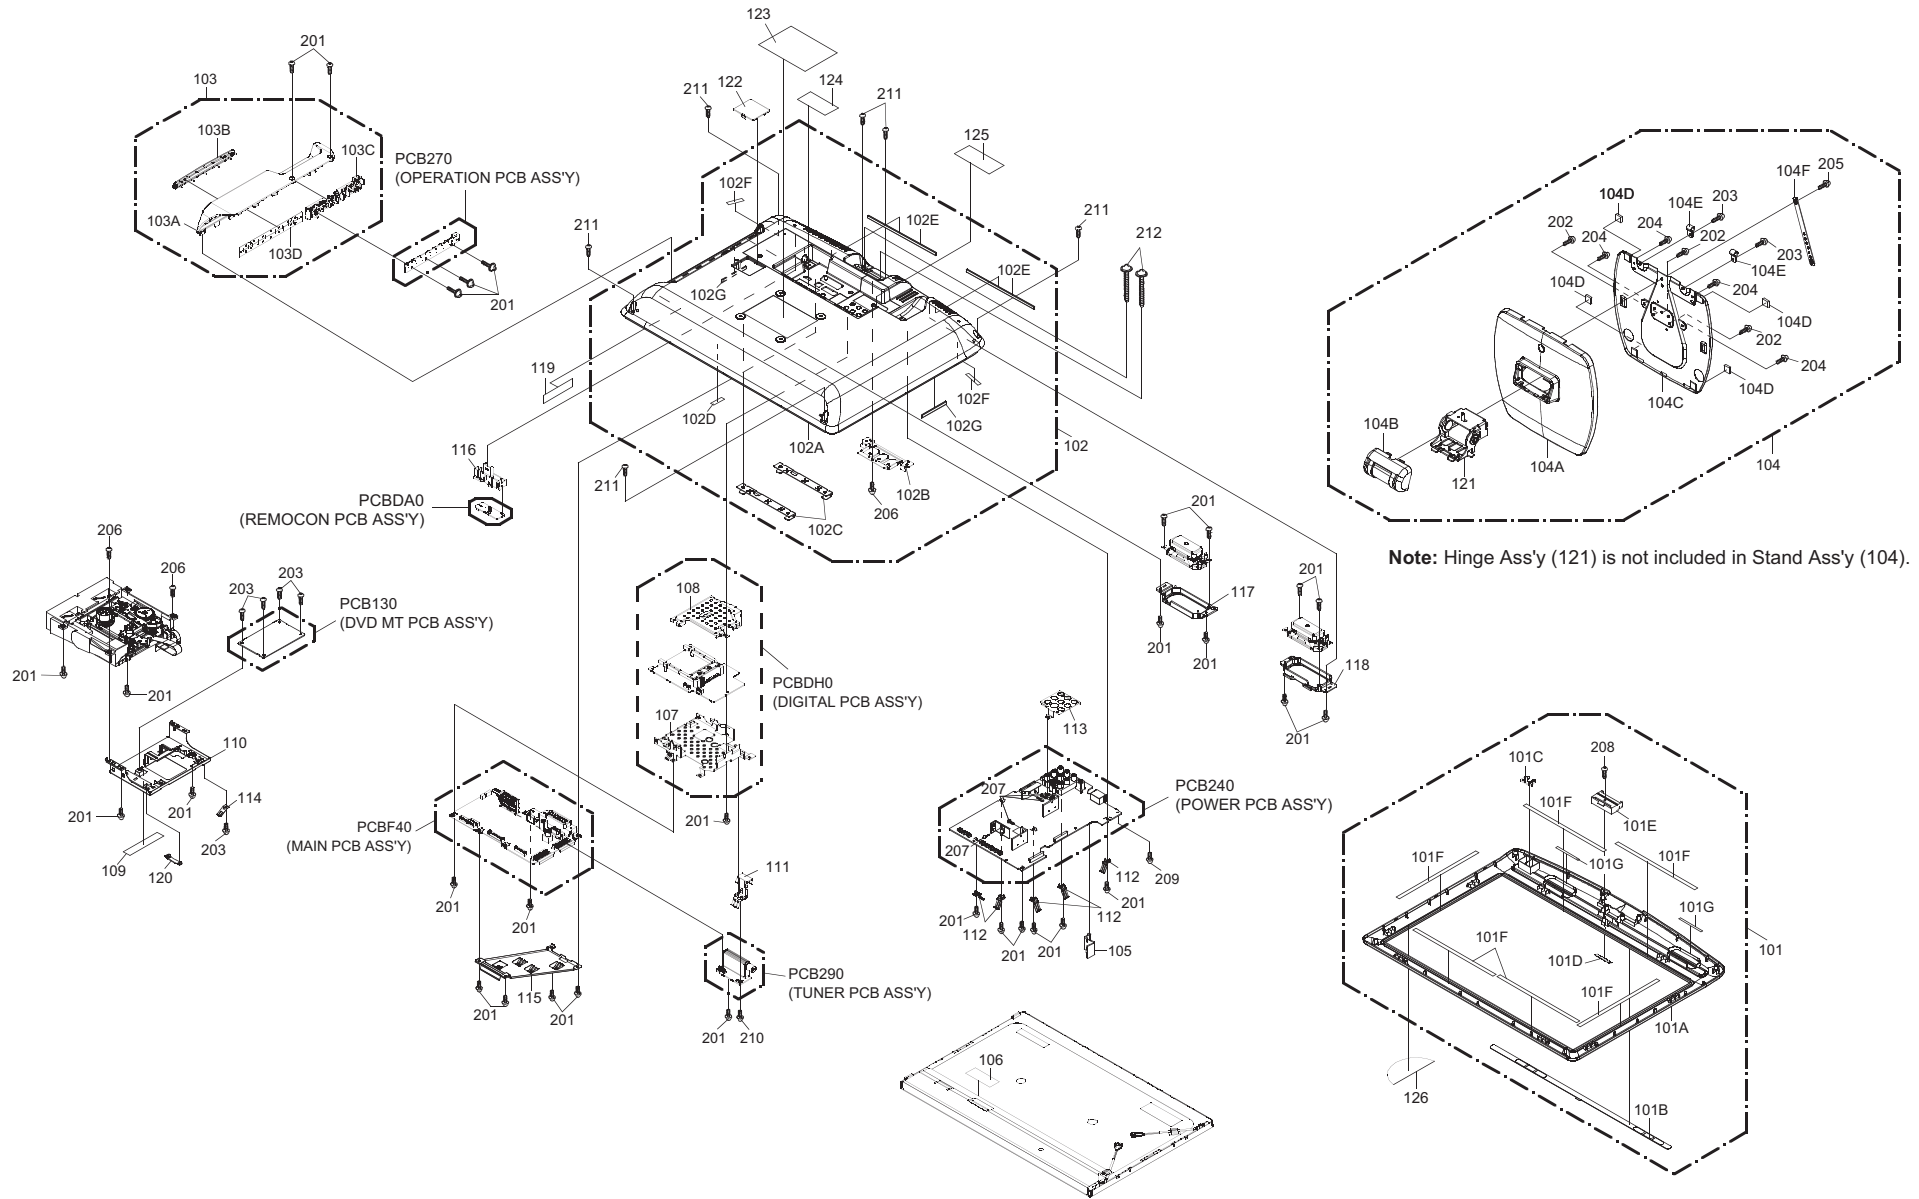


MECHANICAL EXPLODED VIEW (PACKING DIAGRAM)

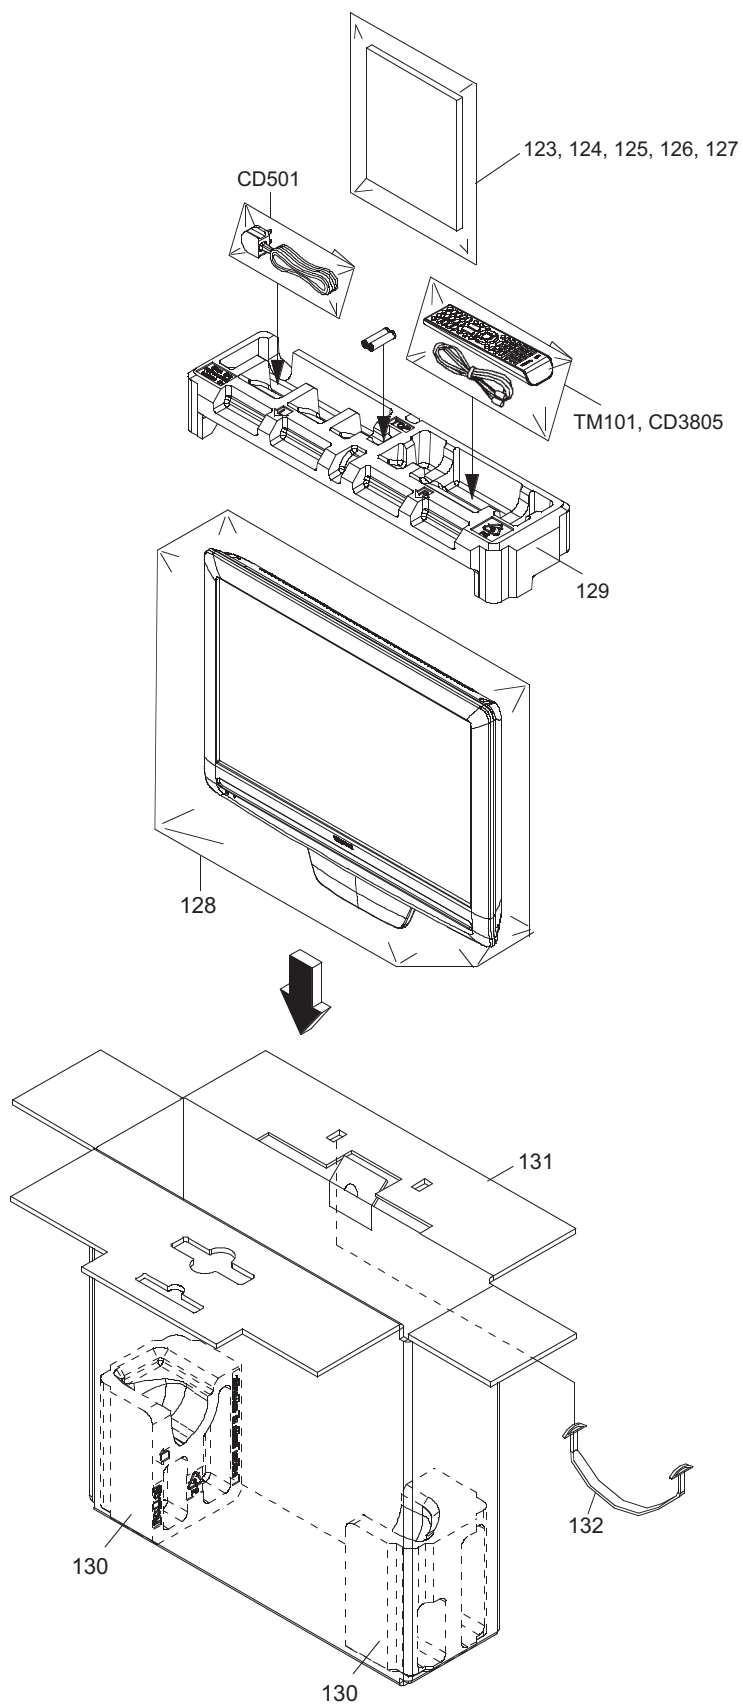


MECHANICAL EXPLODED VIEW (PACKING DIAGRAM)

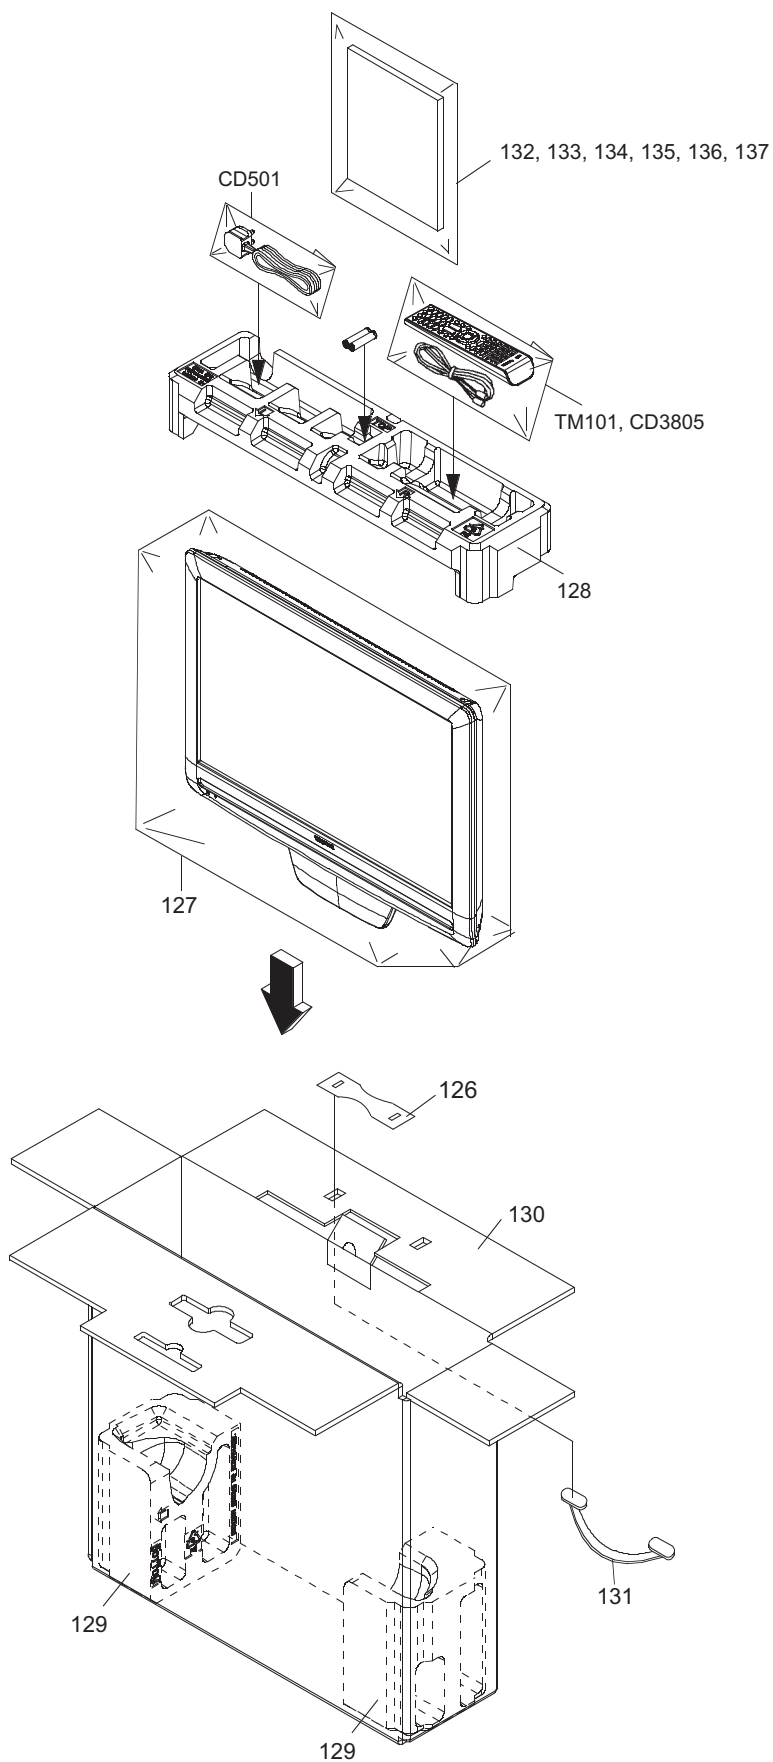

MECHANICAL EXPLODED VIEW (PACKING DIAGRAM)

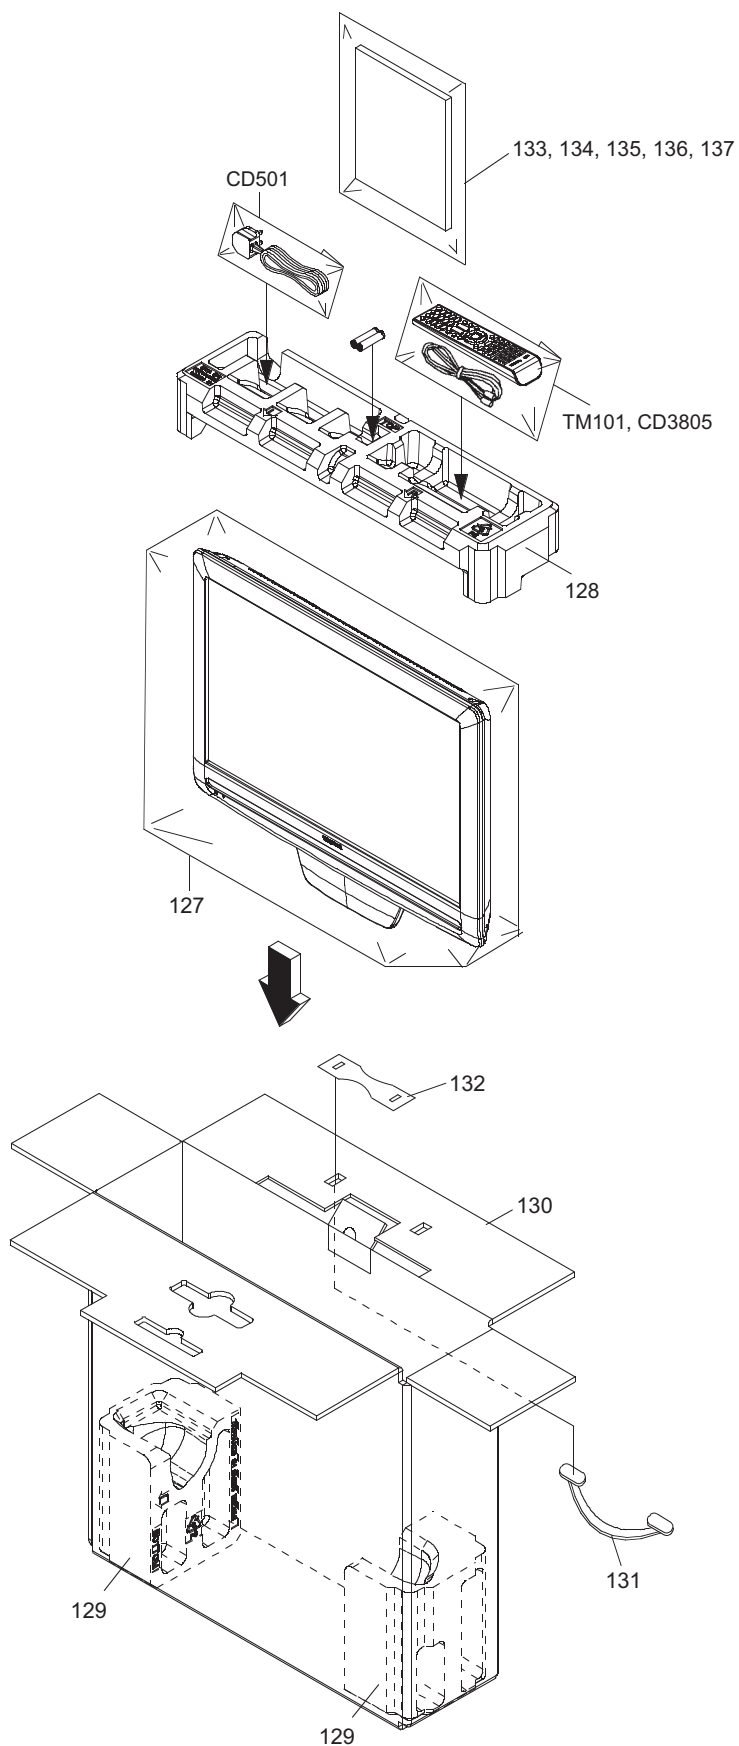

DVD DECK EXPLODED VIEW

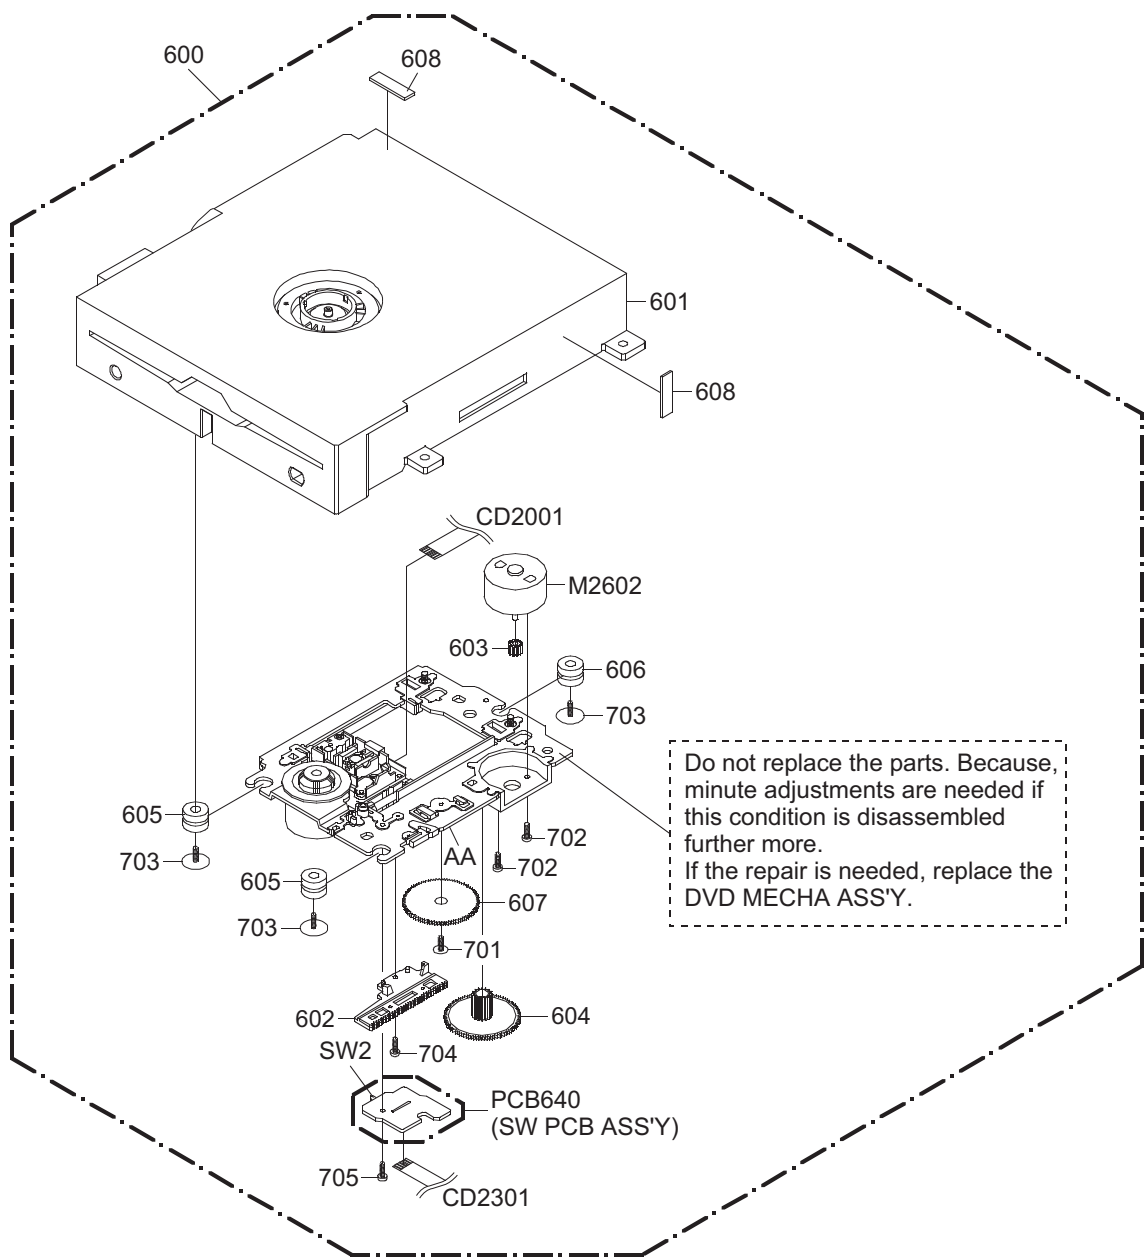

CLASS	MARK
GREASE	AA

NOTE: Applying positions AA for the grease are displayed for this section. Check if the correct grease is applied for each position.

MECHANICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description
101	AE016611	7A708A039A	FRONT CABI ASS'Y
101A	AE016612	708WPDA030	CABINET FRONT
101B	AE009670	702WNAA006	SHEET SPEAKER
101C	AE009571	713WPAA280	GLASS LED
101D	AE007694	7235490068	BADGE BRAND
101E	AE009572	761WPAA177	COVER STAND
101F	AE009671	800WQ0A073	FELT SHEET
101G	AE009679	800WQ0A119	FELT SHEET
102	AE016613	7A702A649A	BACK CABI ASS'Y
102A	AE016614	702WPAB311	CABINET BACK
102B	AE009591	706WPA0031	COVER CONNECTOR
102C	AE016615	722549A743	SHEET RATING
102D	AE016616	723000E032	SHEET JACK-1
102E	AE016532	723000E046	SHEET JACK-2
102F	AE009577	761WSAA102	ANGLE HINGE
102G	AE009578	761WSA0634	ANGLE BACK
102H	AE003190	800WQ0A067	FELT SHEET
102I	AE003026	800WQ0A079	FELT SHEET
102J	AE016527	800WQ0A094	FELT SHEET
102K	AE007708	800WQ00095	FELT SHEET
103	AE016569	7A711A096A	PANEL SIDE ASS'Y
103A	AE016570	711WPDA806	PANEL SIDE
103B	AE009581	711WPEA001	SLOT DVD
103C	AE009582	735WPAB101	BUTTON FRAME
103D	AE008459	800WQ00105	FELT SHEET
104	AE016571	7A704A128A	STAND ASS'Y
104A	AE009585	704WPAA066	STAND
104B	AE009586	761WPAA181	COVER HINGE
104C	AE009587	761WSBA014	ANGLE STAND
104D	AE009624	800SRA0002	CUSHION LEG VEB1349-A
104E	AE008947	899NAGCL14	CABLE CLAMP
104F	AE007710	89900FB118	BAND
105	AE009629	761WPA0515	HOLDER PCB
106	AE009796	800WQ00134	FELT SHEET 40*60*T0.5
107	AE016572	7G7520054A	ANGLE PCB ASS'Y
108	AE016573	752WSA0713	SHIELD CI CARD
109	AE008287	726000A139	SHEET CAUTION
110	AE009790	761WSA0679	ANGLE MPEG
111	AE009763	744WUA0035	SPRING EARTH TUNER
112	AE009784	744WUA0038	SPRING EARTH-3
113	AE009786	752WSA0716	SHIELD JACK
114	AE009841	752WSA0723	SPRING,EARTH
115	AE009858	753WUA0101	SPRING EARTH-1
116	AE009600	761WPAA180	HOLDER REMOCON
117	AE009676	761WPAA185	HOLDER SPEAKER-L
118	AE009677	761WPAA188	HOLDER SPEAKER-R
119	AE005468	800WQ0A055	FELT SHEET
120	AE009627	899RFPC25V	HOLDER CORD
121	AE009590	706KSAA001	HINGE ASS'Y
122	AE016617	723549A093	POP LABEL
123	AE016583	JB5PD000	POLYBAG,INSTRUCTION(RED CAUTION)
124	AE016584	J51Z0101A	INSTRUCTION BOOK(E)
125	AE016580	J51Z0107A	QUICK SET-UP SHEET(E)
126	AE016581	J51Z0117A	REGISTRATION CARD
127	AE016582	J51Z0141A	HELPLINE SHEET
128	AE009842	791WHAA240	LAMIFILM BAG
129	AE016618	792PHAA025	PACKAGE TOP
130	AE016619	792PHAA026	PACKAGE BOTTOM
131	AE016620	793PCDA103	GIFT BOX
132	AE016579	794PHAA001	HANDLE
201	AE004849	8109230A0U	SCREW TAP TITE(B) BIND 3*10 CH
202	AE005140	810A14080U	SCREW WASHER(A) M4*8 CH
203	AE005675	810923060U	SCREW TAP TITE(B) BIND 3*6 CH
204	AE009612	8110K3080U	SCREW TAP TITE(P) LAMI HEAD 3*8 CH
205	AE007747	814623080U	SCREW TAP TITE(B) BIND 3*5.7+4*2.3 CH
206	AE003526	810923080U	SCREW TAP TITE(B) BIND 3*8 CH
207	AE003524	8109I30A0U	SCREW TAP TITE(B) WH7 3*10 CH
208	AE003528	8110630A0U	SCREW TAP TITE(P) BRAZIER 3*10 CH
209	AE009613	8109230A0S	SCREW TAP TITE(B) BIND 3*10 BK
210	AE004851	810223080U	SCREW BIND M3*8 CH
211	AE009614	8109230A4S	SCREW TAP TITE(B) BIND 3*14 BK
212	AE016206	8117540A6S	SCREW TAPPING(B0) TRUSS 4*16 BK
213	AE005473	8109D30A0U	SCREW TAP TITE(B) WH8 3*10 CH

MECHANICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description
101	AE016653	7A708A069A	FRONT CABI ASS'Y
101A	AE016612	708WPDA030	CABINET FRONT
101B	AE009670	702WNAA006	SHEET SPEAKER
101C	AE009571	713WPAA280	GLASS LED
101D	AE007694	7235490068	BADGE BRAND
101E	AE009572	761WPAA177	COVER STAND
101F	AE009671	800WQ0A073	FELT SHEET
101G	AE009679	800WQ0A119	FELT SHEET
102	AE016657	7A702A745A	BACK CABI ASS'Y
102A	AE016614	702WPAB311	CABINET BACK
102B	AE009577	761WSAA102	ANGLE HINGE
102C	AE009578	761WSA0634	ANGLE BACK
102D	AE003190	800WQ0A067	FELT SHEET
102E	AE003026	800WQ0A079	FELT SHEET
102F	AE016527	800WQ0A094	FELT SHEET
102G	AE007708	800WQ00095	FELT SHEET
103	AE016569	7A711A096A	PANEL SIDE ASS'Y
103A	AE016570	711WPDA806	PANEL SIDE
103B	AE009581	711WPEA001	SLOT DVD
103C	AE009582	735WPAB101	BUTTON FRAME
103D	AE008459	800WQ00105	FELT SHEET
104	AE009584	7A704A085A	STAND ASS'Y
104A	AE009585	704WPAA066	STAND
104B	AE009586	761WPAA181	COVER HINGE
104C	AE009587	761WSBA014	ANGLE STAND
104D	AE009624	800SRA0002	CUSHION LEG VEB1349-A
104E	AE008947	899NAGCL14	CABLE CLAMP
104F	AE007710	89900FB118	BAND
105	AE009629	761WPA0515	HOLDER PCB
106	AE009796	800WQ00134	FELT SHEET 40*60*T0.5
107	AE016572	7G7520054A	ANGLE PCB ASS'Y
108	AE016573	752WSA0713	SHIELD CI CARD
109	AE008287	726000A139	SHEET CAUTION
110	AE009790	761WSA0679	ANGLE MPEG
111	AE009763	744WUA0035	SPRING EARTH TUNER
112	AE009784	744WUA0038	SPRING EARTH-3
113	AE009786	752WSA0716	SHIELD JACK
114	AE009841	752WSA0723	SPRING,EARTH
115	AE009858	753WUA0101	SPRING EARTH-1
116	AE009600	761WPAA180	HOLDER REMOCON
117	AE009676	761WPAA185	HOLDER SPEAKER-L
118	AE009677	761WPAA188	HOLDER SPEAKER-R
119	AE005468	800WQ0A055	FELT SHEET
120	AE009627	899RFPC25V	HOLDER CORD
121	AE009590	706KSAA001	HINGE ASS'Y
122	AE009591	706WPA0031	COVER CONNECTOR
123	AE016660	722549A757	SHEET RATING
124	AE016616	723000E032	SHEET JACK-1
125	AE016532	723000E046	SHEET JACK-2
126	AE009604	794WHA0004	HANDLE STOPPER
127	AE009842	791WHAA240	LAMIFILM BAG
128	AE016663	792WHAA287	PACKAGE TOP
129	AE016664	792WHAA288	PACKAGE BOTTOM
130	AE016665	793WCDD965	GIFT BOX
131	AE009603	794WHA0003	HANDLE
132	AE009609	JB5ND000	POLYBAG,INSTRUCTION(RED CAUTION)
133	AE016667	J51Z1107A	QUICK SET-UP SHEET(E)
134	AE016668	J51Z1110A	INSTRUCTION BOOK(9 LANG.)
135	AE016670	J51Z1131A	INSTRUCTION BOOK(E)
136	AE016672	J51Z1132A	INSTRUCTION BOOK(G)
137	AE016674	J51Z1133A	INSTRUCTION BOOK(F)
201	AE004849	8109230A0U	SCREW TAP TITE(B) BIND 3*10 CH
202	AE005140	810A14080U	SCREW WASHER(A) M4*8 CH
203	AE005675	810923060U	SCREW TAP TITE(B) BIND 3*6 CH
204	AE009612	8110K3080U	SCREW TAP TITE(P) LAMI HEAD 3*8 CH
205	AE007747	814623080U	SCREW TAP TITE(B) BIND 3*5.7+4*2.3 CH
206	AE003526	810923080U	SCREW TAP TITE(B) BIND 3*8 CH
207	AE003524	8109I30A0U	SCREW TAP TITE(B) WH7 3*10 CH
208	AE003528	8110630A0U	SCREW TAP TITE(P) BRAZIER 3*10 CH
209	AE009613	8109230A0S	SCREW TAP TITE(B) BIND 3*10 BK
210	AE004851	810223080U	SCREW BIND M3*8 CH
211	AE009614	8109230A4S	SCREW TAP TITE(B) BIND 3*14 BK
212	AE016206	8117540A6S	SCREW TAPPING(B0) TRUSS 4*16 BK
213	AE005473	8109D30A0U	SCREW TAP TITE(B) WH8 3*10 CH

MECHANICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description
101	AE016654	7A708A072A	FRONT CABI ASS'Y
101A	AE016655	708WPDA039	CABINET FRONT
101B	AE016656	702WNB018	SHEET SPEAKER
101C	AE009571	713WPAA280	GLASS LED
101D	AE007694	7235490068	BADGE BRAND
101E	AE009684	761WPAA196	COVER STAND
101F	AE009671	800WQ0A073	FELT SHEET
101G	AE009679	800WQ0A119	FELT SHEET
102	AE016658	7A702A748A	BACK CABI ASS'Y
102A	AE016659	702WPAB333	CABINET BACK
102B	AE009577	761WSAA102	ANGLE HINGE
102C	AE009578	761WSA0634	ANGLE BACK
102D	AE003190	800WQ0A067	FELT SHEET
102E	AE003026	800WQ0A079	FELT SHEET
102F	AE016527	800WQ0A094	FELT SHEET
102G	AE007708	800WQ00095	FELT SHEET
103	AE016643	7A711A099A	PANEL SIDE ASS'Y
103A	AE016644	711WPDA807	PANEL SIDE
103B	AE009581	711WPEA001	SLOT DVD
103C	AE009645	735WPAB117	BUTTON FRAME
103D	AE008459	800WQ00105	FELT SHEET
104	AE009866	7A704A115A	STAND ASS'Y
104A	AE009647	704WPAA068	STAND
104B	AE009648	761WPAA189	COVER HINGE
104C	AE009587	761WSBA014	ANGLE STAND
104D	AE009624	800SRA0002	CUSHION LEG VEB1349-A
104E	AE008947	899NAGCL14	CABLE CLAMP
104F	AE007710	89900FB118	BAND
105	AE009629	761WPA0515	HOLDER PCB
106	AE009796	800WQ00134	FELT SHEET 40*60*T0.5
107	AE016572	7G7520054A	ANGLE PCB ASS'Y
108	AE016573	752WSA0713	SHIELD CI CARD
109	AE008287	726000A139	SHEET CAUTION
110	AE009790	761WSA0679	ANGLE MPEG
111	AE009763	744WUA0035	SPRING EARTH TUNER
112	AE009784	744WUA0038	SPRING EARTH-3
113	AE009786	752WSA0716	SHIELD JACK
114	AE009841	752WSA0723	SPRING,EARTH
115	AE009858	753WUA0101	SPRING EARTH-1
116	AE009600	761WPAA180	HOLDER REMOCON
117	AE009676	761WPAA185	HOLDER SPEAKER-L
118	AE009677	761WPAA188	HOLDER SPEAKER-R
119	AE005468	800WQ0A055	FELT SHEET
120	AE009627	899RFPC25V	HOLDER CORD
121	AE009590	706KSAA001	HINGE ASS'Y
122	AE009650	706WPA0034	COVER CONNECTOR
123	AE016661	722549A756	SHEET RATING
124	AE016608	723000E045	SHEET JACK-2
125	AE016662	723000E062	SHEET JACK-1
126	AE016617	723549A093	POP LABEL
127	AE009842	791WHAA240	LAMIFILM BAG
128	AE016663	792WHAA287	PACKAGE TOP
129	AE016664	792WHAA288	PACKAGE BOTTOM
130	AE016666	793WCDD964	GIFT BOX
131	AE009603	794WHA0003	HANDLE
132	AE009604	794WHA0004	HANDLE STOPPER
133	AE009609	JB5ND000	POLYBAG,INSTRUCTION(RED CAUTION)
134	AE016669	J51Z0801A	INSTRUCTION BOOK(E)
135	AE016671	J51Z0807A	QUICK SET-UP SHEET(E)
136	AE016673	J51Z0817A	REGISTRATION CARD
137	AE016675	J51Z0841A	HELPLINE SHEET
201	AE004849	8109230A0U	SCREW TAP TITE(B) BIND 3*10 CH
202	AE005140	810A14080U	SCREW WASHER(A) M4*8 CH
203	AE005675	810923060U	SCREW TAP TITE(B) BIND 3*6 CH
204	AE009612	8110K3080U	SCREW TAP TITE(P) LAMI HEAD 3*8 CH
205	AE007747	814623080U	SCREW TAP TITE(B) BIND 3*5.7+4*2.3 CH
206	AE003526	810923080U	SCREW TAP TITE(B) BIND 3*8 CH
207	AE003524	8109I30A0U	SCREW TAP TITE(B) WH7 3*10 CH
208	AE003528	8110630A0U	SCREW TAP TITE(P) BRAZIER 3*10 CH
209	AE005473	8109D30A0U	SCREW TAP TITE(B) WH8 3*10 CH
210	AE004851	810223080U	SCREW BIND M3*8 CH
211	AE009655	8109230A4U	SCREW TAP TITE(B) BIND 3*14 CH
212	AE004847	8117540A6U	SCREW TAPPING(B0) TRUSS 4*16 CH

DVD DECK REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
△ 600	AE009615	A50N01P650	DVD MECHA ASS'Y	A50N01P650
601	AE008499	92SBB0033A	LOADER SUB ASS'Y	DLM1D29-31
602	AE005815	92AAA0017A	FEED RACK ASS'Y	
603	AE003551	92P100088A	GEAR,MOTOR	
604	AE005805	92P100117A	GEAR,MIDDLE	
605	AE008500	92P200017A	INSULATOR, F	
606	AE008501	92P200018A	INSULATOR, R	
607	AE005816	92P100116A	GEAR,FEED	
608	AE016078	800WFAA008	CUSHION C	
701	AE005817	92P700007A	SCREW,GEAR FEED	
702	AE003554	814011723U	SCREW,PAN M1.7*2.3 P3 CH	
703	AE003555	816112080U	SEMS.TAP TITE(P) PAN W10 2*8 CH	
704	AE005006	813381750U	SCREW,T-TITE(B)CAMERA PAN M1.7*5.0 P3 CH	
705	AE003557	811022080U	SCREW,TAP TITE(P) BIND 2*8 CH	
CD2001	AE009434	12C14O1602	CORD JUMPER	FFC05241600408T1-A04
CD2301	AE003558	122H062102	CORD JUMPER	2H062102
M2602	AE009616	1515T98006	MOTOR	WRF-300CA-10460A
PCB640	AE008503	A5X002C640	SW PCB ASS'Y	DED020A
SW2	AE001158	0500101036	PUSH SWITCH	ESE22MH22

DVD DECK REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description
△ 600	AE009615	A50N01P650	DVD MECHA ASS'Y A50N01P650
601	AE008499	92SBB0033A	LOADER SUB ASS'Y DLM1D29-31
602	AE005815	92AAA0017A	FEED RACK ASS'Y
603	AE003551	92P100088A	GEAR,MOTOR
604	AE005805	92P100117A	GEAR,MIDDLE
605	AE008500	92P200017A	INSULATOR, F
606	AE008501	92P200018A	INSULATOR, R
607	AE005816	92P100116A	GEAR,FEED
608	AE016078	800WFAA008	CUSHION C
701	AE005817	92P700007A	SCREW,GEAR FEED
702	AE003554	814011723U	SCREW,PAN M1.7*2.3 P3 CH
703	AE003555	816112080U	SEMS.TAP TITE(P) PAN W10 2*8 CH
704	AE005006	813381750U	SCREW,T-TITE(B)CAMERA PAN M1.7*5.0 P3 CH
705	AE003557	811022080U	SCREW,TAP TITE(P) BIND 2*8 CH
CD2001	AE009434	12C14O1602	CORD JUMPER FFC05241600408T1-A04
CD2301	AE003558	122H062102	CORD JUMPER 2H062102
M2602	AE009616	1515T98006	MOTOR WRF-300CA-10460A
PCB640	AE008503	A5X002C640	SW PCB ASS'Y DED020A
SW2	AE001158	0500101036	PUSH SWITCH ESE22MH22

DVD DECK REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description
△ 600	AE009615	A50N01P650	DVD MECHA ASS'Y A50N01P650
601	AE008499	92SBB0033A	LOADER SUB ASS'Y DLM1D29-31
602	AE005815	92AAA0017A	FEED RACK ASS'Y
603	AE003551	92P100088A	GEAR,MOTOR
604	AE005805	92P100117A	GEAR,MIDDLE
605	AE008500	92P200017A	INSULATOR, F
606	AE008501	92P200018A	INSULATOR, R
607	AE005816	92P100116A	GEAR,FEED
608	AE016078	800WFAA008	CUSHION C
701	AE005817	92P700007A	SCREW,GEAR FEED
702	AE003554	814011723U	SCREW,PAN M1.7*2.3 P3 CH
703	AE003555	816112080U	SEMS.TAP TITE(P) PAN W10 2*8 CH
704	AE005006	813381750U	SCREW,T-TITE(B)CAMERA PAN M1.7*5.0 P3 CH
705	AE003557	811022080U	SCREW,TAP TITE(P) BIND 2*8 CH
CD2001	AE009434	12C14O1602	CORD JUMPER FFC05241600408T1-A04
CD2301	AE003558	122H062102	CORD JUMPER 2H062102
M2602	AE009616	1515T98006	MOTOR WRF-300CA-10460A
PCB640	AE008503	A5X002C640	SW PCB ASS'Y DED020A
SW2	AE001158	0500101036	PUSH SWITCH ESE22MH22

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
RESISTORS				
△ R503	75006901	RC31X1126J	RC	12M OHM 1W
△ R505	AE009485	R63884330J	R,FUSE	33 OHM 1/4W
△ R506	AE002150	R803R9333J	RC	33K OHM 1/16W
△ R509	AE009486	RC31X1125J	RC	1.2M OHM 1W
△ R510	AE005735	R63881R22J	R,FUSE	0.22 OHM 1W
△ R518	AE012427	R002T4101J	RC	100 OHM 1/4W
△ R522	AE006025	R3K58A010J	R,METAL OXIDE	1 OHM 2W
△ R544	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R545	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R546	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R547	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R7038	AE009711	R63882220J	R,FUSE	22 OHM 1/2W
△ R7039	AE009711	R63882220J	R,FUSE	22 OHM 1/2W
CAPACITORS				
△ C501	AE001725	CS0PB0413K	CC	0.001 UF 50V B
△ C502	AE009804	E8E52H121D	CE	120 UF 400V
△ C503	AE011287	CS0PCH4L2J	CC	330 PF 50V CH
△ C504	AE008913	E7EYF2102M	CE	1000 UF 16V
△ C505	AE001732	CS0PCH4H1J	CC	22 PF 50V CH
△ C506	AE012287	P2122B224M	CMP	0.22 UF 275V ECQUL
△ C507	AE011227	CD39E0M13M	CC	0.001 UF 250V
△ C508	AE012286	P2122B104M	CMP	0.1 UF 275V ECQUL
△ C510	AE011227	CD39E0M13M	CC	0.001 UF 250V
△ C513	AE011392	C03L0R7Q2K	CC	470 PF 2KV R
△ C514	AE009491	CD39E0MQ2K	CC	470 PF 250V
C518	AE009492	P332E4223J	CPP	0.022 UF 400V
△ C520	75007051	E8E2U54R7D	CE	4.7 UF 50V
△ C522	AE009830	E7EYS3681M	CE	680 UF 25V
△ C525	AE008913	E7EYF2102M	CE	1000 UF 16V
C7006	AE008913	E7EYF2102M	CE	1000 UF 16V
C7020	AE008913	E7EYF2102M	CE	1000 UF 16V
C7026	AE009700	C234SLB11J	CC	10 PF 6KV SL
C7029	AE009700	C234SLB11J	CC	10 PF 6KV SL
C7030	AE009700	C234SLB11J	CC	10 PF 6KV SL
C7033	AE009700	C234SLB11J	CC	10 PF 6KV SL
DIODES				
D107	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
△ D504	AE009461	D6C047110A	DIODE VARISTA	ENE471D-10A
△ D505	AE008372	D2LT001F50	DIODE SILICON	1F5-E
D506	AE008319	D4AT01H3E0	DIODE RECTIFIER	1H3-E
△ D507	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
△ D508	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
D509	AE009494	DE7RB3302B	DIODE ZENER	UDZSNP33B TE-17
△ D510	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
△ D511	AE008319	D4AT01H3E0	DIODE RECTIFIER	1H3-E
D512	AE002133	D2BXARS010	DIODE SILICON	SARS01-V1
△ D514	AE011461	D28F21DQN9	DIODE SCHOTTKY	21DQ09N-FC4
△ D515	AE009803	D28A10A080	DIODE SCHOTTKY BARRIER	FCHS10A08
△ D516	AE008319	D4AT01H3E0	DIODE RECTIFIER	1H3-E
D517	AE011502	D97U01601B	DIODE ZENER	MTZJ16B T-77
△ D518	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
△ D523	AE009829	D28A10A040	DIODE SCHOTTKY BARRIER	FCQ10A04
D525	AE016538	D2BRJPA130	DIODE SCHOTTKY BARRIER	SJPA-L3-VL
D804	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D805	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D1001	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D1002	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D2303	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D2304	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D2402	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D3201	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
△ D3202	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D3600	AE016508	D28R0QY040	DIODE SCHOTTKY BARRIER	EP10QY04-TE8L3
D3601	AE004937	D77R1A1R10	DIODE VARISTA	AVRL161A1R1NT
D3603	AE004937	D77R1A1R10	DIODE VARISTA	AVRL161A1R1NT
D3605	AE016508	D28R0QY040	DIODE SCHOTTKY BARRIER	EP10QY04-TE8L3
D3630	AE004795	DE7RB5R62B	DIODE ZENER	UDZSNP5.6B TE-17
△ D3801	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
△ D3802	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D3804	AE008906	D28R11FS20	DIODE	EC11FS2-TE12L
△ D3805	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
△ D3806	AE008906	D28R11FS20	DIODE	EC11FS2-TE12L
D3807	AE009716	DE7RB1302B	DIODE ZENER	UDZSNP13B TE-17
D3809	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4002	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4003	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4005	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4008	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4211	AE008091	DE7RB4R72B	DIODE ZENER	UDZSNP4.7B TE-17
D4305	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D6401	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
DIODES				
D6402	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D6403	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D6407	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D6409	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D6411	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D6412	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D6413	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D7001	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7002	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7003	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7004	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7005	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7006	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7007	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7008	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7009	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7010	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7011	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7012	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7013	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7014	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7015	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7016	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7017	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7018	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7019	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7020	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7021	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7022	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7023	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7024	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7025	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7026	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7601	AE000288	0021E9Q010	LED	LTL-1BEFJ-002A
D8510	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
ICS				
IC101	AE009809	S51B03JM02	MEMORY DATA 52PIN FLASH MICOM ROM 16K	R5F21244SNFP
IC105	AE011998	I9UF032290	RESET IC 2.9V TYPE	PST3229NR
△ IC301	AE008430	I03SP20520	SOUND AMP 5W 2CH	LA42052-E
△ IC501	AE009499	ICAD055310	LOW STANDBY POWER IC CONTROL	FA5531P-A2
△ IC502	AE011889	I1KJ9A431A	VARIABLE SHUNT REGULATOR TAPE	KIA431A-AT
IC504	AE016539	I0BD981050	VIN=30V IO=3.5A	SI-8105QL
△ IC505	AE002809	000220002W	PHOTO COUPLER	PS2561AL1-1-V(W)
IC801	AE016621	S52A01CE01	MEMORY DATA EEPROM 256K 12C	AT24C256BN-10SU-1.8
IC802	AE011998	I9UF032290	RESET IC 2.9V TYPE	PST3229NR
IC803	AE016509	S51Z01AM01	MEMORY DATA SCALER LIMITED O/R	VCT6973G-FA-B3-000
△ IC2301	AE008194	I03FV65650	5CH MOTOR DRIVER IC	LA6565VR-TLM-E
IC2401	AE011746	I5PK05ALC0	MPEG DECODER	STI5105ALC
IC2402	AE011999	I9UF032310	RESET IC 3.1V TYPE	PST3231NR
IC2403	AE009449	ICLJ022EC5	DDR-400 256M CL=3	HY5DU561622ETP-D43-C
IC2404	AE016543	S51Z01AF02	MEMORY DATA NOR FLASH 16M B00T	S29AL016D70TFI010
IC2409	AE008922	I5PJ0064W0	EEPROM 64K 12C	M24C64WMN6TP
IC3001	75007780	I55F045FT0	8BIT BUS TRANSCEIVER	TC74LCX245FT(EL)
IC3002	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3003	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3004	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3005	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3006	75007781	I55J0CX020	2 INPUT NOR GATE	TC74LCX02FT(EL)
IC3007	75007779	I55F0125F0	BUS BUFFER	TC7SH125FU(TE85L,F
△ IC3201	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC3202	AE008435	I1LF010150	DC-DC CONVERTER CONTROLLER	AL1015
△ IC3203	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC3204	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC3205	AE004653	I1KF98D050	REGULATOR 5V	KIA78D05F
△ IC3206	AE016513	I5HJ9B19U0	REGULATOR VO=1.9V IO=800MA	S-1170B19UC-OTETFG
IC3207	AE009832	I5HJ9B15U0	REGULATOR VO=1.5V IO=800MA	S-1170B15UC-OTATFG
IC3605	75007789	IG1F090250	144PIN TQFP HDMI RECEIVER	SI9025CTU
IC3606	AE011981	S51Z01AE02	MEMORY DATA EEPROM 2K 12C	S-24CS02AFJ-TB-GE
△ IC3801	AE007825	I07F0C0WF0	1A REGULATOR	BA00BC0WFP-E2
△ IC3806	AE009719	I5HJ950UC0	REGULATOR VO=5.0V IO=800MA	S-1170B50UC-QUJTFG
IC4001	AE009720	ICQK06966A	VADDIS9 MPEG/MICON/DSP/RF-AMP	ZR36966ELCG-D-G
IC4005	AE008324	IF9J0164AG	1M*16*4BANK(64M) 143MHZ SDRAM	M12L64164A-7TG
IC4007	AE016515	S51Z01AF01	MEMORY DATA NOR FLASH 16M B00T	SST39VF1601-70-4C-EKE
IC4201	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC4205	AE004651	I0QF025840	A/V SW 2INPUT 1OUTPUT	NJM2584AM(TE1)
IC4302	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC4303	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC5801	75007776	I0CJ040530	ANALOG SW 3IN-2OUT	SN74LV4053APWR
IC6101	75007784	I5PK003620	DVB-T SINGLE CHIP RECEIVER	STV0362
△ IC6401	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC6402	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
ICS				
△ IC6403	AE016545	I5HJ9B34U0	REGULATOR VO=3.4V IO=800MA	S-1170B34UC-OTTTFG
△ IC6404	AE016545	I5HJ9B34U0	REGULATOR VO=3.4V IO=800MA	S-1170B34UC-OTTTFG
△ IC6405	AE016546	I5HJ9B26U0	REGULATOR VO=2.6V IO=800MA	S-1170B26UC-OTLTFG
IC6406	AE002504	I0QF0580V0	AUDIO OPERATION AMP	NJM4580V(Te1)
△ IC6407	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
IC6500	AE008921	I5CJ031570	A/V SW 2INPUT 1OUTPUT	SN74LVC1G3157DCKR
IC6501	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC6502	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC6503	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC6504	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC7001	AE009512	I07F098820	19WLCD INVERTER IC	BD9882FV-E2
IC7002	AE009513	I0CF0902D0	QUAND OPERATIONNAL AMPLIFILE	LM2902DR
IC7200	AE009831	I56K066550	SCALER IC	R8A66655FP
IC8501	AE009365	I0QF045650	DUAL OPEAMP	NJM4565M(Te1)
△ IC8502	AE009805	I1YF9117A0	VO=ADJ IO=1A TAPING	LD1117AL-ADJ-AA3-A-R
TRANSISTORS				
Q101	AE009515	T27T030190	FET	2SK3019_TL
Q102	AE009515	T27T030190	FET	2SK3019_TL
Q301	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q302	AE013010	TNAB05003	COMPOUND TRANSISTOR	KRC102SRTK
△ Q501	AE009722	T41GK35320	FET	2SK3532-01MR
Q505	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q801	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q802	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1000	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1001	AE013032	TPAAB05001	COMPOUND TRANSISTOR	KRA102SRTK
Q1002	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1003	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1004	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q1005	AE013031	TPAAA05001	COMPOUND TRANSISTOR	KRA101SRTK
Q1006	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q2301	AE008330	TAAA1505SY	TRANSISTOR SILICON	KTA1505S-Y-RTK/P
Q2302	AE008330	TAAA1505SY	TRANSISTOR SILICON	KTA1505S-Y-RTK/P
Q2401	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q3002	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3003	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3004	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
△ Q3200	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3201	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
△ Q3202	AE004665	TS3M000044	COMPOUND TRANSISTOR	CPH6312-TL-E
Q3203	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3204	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
△ Q3205	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3206	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3601	AE009515	T27T030190	FET	2SK3019_TL
Q3602	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3603	AE009515	T27T030190	FET	2SK3019_TL
Q3604	AE009515	T27T030190	FET	2SK3019_TL
Q3605	AE009515	T27T030190	FET	2SK3019_TL
Q3618	AE009515	T27T030190	FET	2SK3019_TL
△ Q3801	AE009514	TJ7T35P020	FET	RTQ035P02-TR
Q3802	AE013010	TNAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q3803	AE013010	TNAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q3804	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
△ Q3805	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
△ Q3806	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3807	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3808	AE013010	TNAB05003	COMPOUND TRANSISTOR	KRC102SRTK
△ Q3809	AE009514	TJ7T35P020	FET	RTQ035P02-TR
Q3810	AE009514	TJ7T35P020	FET	RTQ035P02-TR
Q4200	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4201	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q4205	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4210	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4214	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q4217	AE013033	TPAAC05002	COMPOUND TRANSISTOR	KRA103SRTK
Q4218	AE013010	TNAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q4224	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4303	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4304	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4305	AE013032	TPAAB05001	COMPOUND TRANSISTOR	KRA102SRTK
Q4306	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4307	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4308	AE013032	TPAAB05001	COMPOUND TRANSISTOR	KRA102SRTK
Q4309	AE013010	TNAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q4310	AE013011	TNAAC05002	COMPOUND TRANSISTOR	KRC103SRTK
Q5801	AE009515	T27T030190	FET	2SK3019_TL
Q5802	AE009515	T27T030190	FET	2SK3019_TL
Q5805	AE013010	TNAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q7003	AE009515	T27T030190	FET	2SK3019_TL
△ Q7004	AE009516	T250A06J30	FET	TK30A06J3(ORION.Q)

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
TRANSISTORS				
△ Q7005	AE009516	T250A06J30	FET	TK30A06J3(ORION.Q)
COILS & TRANSFORMERS				
△ L501	AE009366	029X000121	COIL, LINE FILTER	SS24H-K08240-CH
L504	AE016622	02167E4R7M	COIL	4.7 UH
L505	AE016623	021U0L100M	COIL	10 UH
L2401	AE008874	0216SD2R2J	COIL	2.2 UH
L2404	AE008874	0216SD2R2J	COIL	2.2 UH
L2406	AE008874	0216SD2R2J	COIL	2.2 UH
L3001	AE008874	0216SD2R2J	COIL	2.2 UH
L3002	AE008874	0216SD2R2J	COIL	2.2 UH
L3201	AE013322	02167E100K	COIL	10 UH
L3202	AE009723	0216MG220M	COIL	22 UH
L3601	AE009519	02D1000119	COIL CHOKE	EXC28CG900U
L3602	AE009519	02D1000119	COIL CHOKE	EXC28CG900U
L4204	AE013298	0216SD220J	COIL	22 UH
L4205	AE013298	0216SD220J	COIL	22 UH
L4206	AE013298	0216SD220J	COIL	22 UH
L4207	AE013298	0216SD220J	COIL	22 UH
L6101	AE008874	0216SD2R2J	COIL	2.2 UH
L6102	AE008874	0216SD2R2J	COIL	2.2 UH
L6103	AE008874	0216SD2R2J	COIL	2.2 UH
L6104	AE008874	0216SD2R2J	COIL	2.2 UH
L6401	AE008985	0216SD100J	COIL	10 UH
L6406	AE008874	0216SD2R2J	COIL	2.2 UH
L6408	AE007760	0216SD4R7J	COIL	4.7 UH
L6409	AE007760	0216SD4R7J	COIL	4.7 UH
L6410	AE007760	0216SD4R7J	COIL	4.7 UH
L7001	AE013322	02167E100K	COIL	10 UH
L8501	AE008874	0216SD2R2J	COIL	2.2 UH
L8502	AE006570	0216SD1R0J	COIL	1 UH
△ T501	AE009819	0481330224	TRANSFORMER, SWITCHING	81330224
△ T7001	AE009660	048135113G	TRANSFORMER, SWITCHING	8135113G
△ T7002	AE009660	048135113G	TRANSFORMER, SWITCHING	8135113G
JACKS				
△ J301	AE009522	060R131024	HEADPHONE JACK	PJ-364H
△ J501	AE009725	064Q1A0011	JACK, AC	CCT2302-0701C
J4206	AE009726	063D100067	SOCKET, 21PIN	MRC-021H-02PC(O87)
J4208	AE009522	060R131024	HEADPHONE JACK	PJ-364H
J4301	AE009524	060R401140	RCA JACK	RCA-101HT(OR)
J8101	AE009526	062R750007	PLUG	DIN-417HA-01
J8102	AE009527	060R411058	RCA JACK	RCA-341H(NI)-09
J8103	AE009528	060R431039	RCA JACK	RCA-228H(3)NI-02
J8104	AE009529	060R431040	RCA JACK	RCA-341H(2)NI-06
SWITCHES				
SW2201	AE013551	0504101T34	SWITCH, TACT	EVQ21505R
SW2202	AE013551	0504101T34	SWITCH, TACT	EVQ21505R
SW2203	AE013551	0504101T34	SWITCH, TACT	EVQ21505R
SW2204	AE013551	0504101T34	SWITCH, TACT	EVQ21505R
SW2205	AE013551	0504101T34	SWITCH, TACT	EVQ21505R
SW2206	AE013551	0504101T34	SWITCH, TACT	EVQ21505R
SW2207	AE013551	0504101T34	SWITCH, TACT	EVQ21505R
SW2208	AE013551	0504101T34	SWITCH, TACT	EVQ21505R
P.C. BOARD ASSEMBLIES				
PCB130	AE016587	A52A01C130L	DVD MT PCB ASS'Y	DMG097A
PCB240	AE016541	A52A01C240L	POWER PCB ASS'Y	CEG362A
PCB270	AE016542	A52A01C270L	OPERATION PCB ASS'Y	CEG363A
PCB290	AE016588	A52A01C290L	TUNER PCB ASS'Y	CEG367A
PCBDA0	AE016544	A52A01CDA0L	REMOCON PCB ASS'Y	CEG364A
PCBDH0	AE016589	A52A01CDH0L	DIGITAL PCB ASS'Y	CEG365A
PCBF40	AE016590	A52A01CF40L	MAIN PCB ASS'Y	CMG130A
MISCELLANEOUS				
B101	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B303	AE009535	024HC13914	CORE, BEADS	HCB3216KF-391T20
B307	AE009535	024HC13914	CORE, BEADS	HCB3216KF-391T20
B308	AE009535	024HC13914	CORE, BEADS	HCB3216KF-391T20
B501	AE013373	024HT03564	CORE, BEADS	W4BRH3.5X6X1.0
B801	AE013364	024AC5330J	CORE, BEADS	BLM18PG330SN1D
B802	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B803	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B804	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B805	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B806	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B807	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B808	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B809	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B810	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B811	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B812	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B813	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B818	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D
B819	AE007761	024AC5181J	CORE, BEADS	BLM18PG181SN1D

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
MISCELLANEOUS				
B820	AE009773	024AC8102T	CORE,BEADS	BLM15AG102SN1D
B821	AE009773	024AC8102T	CORE,BEADS	BLM15AG102SN1D
B2305	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B2401	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2402	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2403	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2404	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2405	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2406	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2407	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B3001	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B3002	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B3201	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3601	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3602	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3603	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3604	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3605	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B3606	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B3608	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B3609	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3610	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3613	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3802	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3803	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3804	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3805	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3807	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3808	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3809	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3810	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4001	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4002	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4003	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4005	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4006	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4008	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4010	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4015	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4016	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4202	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B4203	AE008879	024HC56013	CORE,BEADS	FCM1608KF-601T02
B4204	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4205	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4206	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4228	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B4303	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B4304	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B4305	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B4308	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4312	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B4317	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4322	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B5802	AE008879	024HC56013	CORE,BEADS	FCM1608KF-601T02
B5803	AE013364	024AC5330J	CORE,BEADS	BLM18PG330SN1D
B6101	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B6102	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B6103	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B6401	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6402	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6404	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6405	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6406	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6407	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6408	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6409	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6410	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6411	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6501	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6502	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B6503	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6504	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B7200	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B7201	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B7202	AE008610	024HC51513	CORE,BEADS	FCM1608KF-151T06
B7203	AE008610	024HC51513	CORE,BEADS	FCM1608KF-151T06
B7204	AE008610	024HC51513	CORE,BEADS	FCM1608KF-151T06
B7205	AE008610	024HC51513	CORE,BEADS	FCM1608KF-151T06
B8501	AE008394	024BC5121J	CORE,BEADS	BLM18PG121SN1D
B8502	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B8503	AE008394	024BC5121J	CORE,BEADS	BLM18PG121SN1D

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
MISCELLANEOUS				
B8504	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
BT001	AE016522	141L004019	BATTERY,MANGAN	R03 (AB) 2P TG AO DB
BT002	AE016522	141L004019	BATTERY,MANGAN	R03 (AB) 2P TG AO DB
CD301	AE009666	06E8142403	CORD CONNECTOR	E8142403
△ CD501	AE016555	120S145802	CORD SET AC	0S145802
CP101	AE009735	06GG270029	CONNECTOR PCB SIDE	A2001WV-7A
CP501	AE008882	06977NM020	CONNECTOR PCB SIDE	127301123K2
CP503	AE013859	069D01001A	CONNECTOR PCB SIDE	003P-2100
CP801	AE013951	069S280629	CONNECTOR PCB SIDE	A2001WV2-8P
CP802	AE009736	06GG260029	CONNECTOR PCB SIDE	A2001WV-6A
CD3805	AE006481	06CPL02011	CABLE,PAL	TD-OR0157F
CD4301	AE009541	06CH231204	CORD CONNECTOR	CH231204
CD4302	AE016624	06E8251301	CORD CONNECTOR	E8251301
CD6501	AE009704	06E82M1102	CORD CONNECTOR	E82M1102
CD7005	AE009849	06E82E1303	CORD CONNECTOR	E82E1303
CD7006	AE009849	06E82E1303	CORD CONNECTOR	E82E1303
CD7204	AE009821	06EA2U2505	CORD CONNECTOR	EA2U2505
CP2201	AE013944	069S230639	CONNECTOR PCB SIDE	A2001WR2-3P
CP2301	AE008156	069KYOT159	CONNECTOR PCB SIDE	LD07T2-24ND-03
CP2302	AE009544	069EV5T060	CONNECTOR PCB SIDE	04_6232_105_015_800+
CP2303	AE009545	069EV6T060	CONNECTOR PCB SIDE	04_6232_106_015_800+
CP2401	AE016557	069S2A0739	CONNECTOR PCB SIDE	A2006WV0-2X5P
CP2402	AE009743	06GG250029	CONNECTOR PCB SIDE	A2001WV-5A
CP3001	AE016558	0636800007	HOLDER,IC	A01K1B108007P00
CP3601	AE009550	06GDYL3038	CONNECTOR PCB SIDE	1A0300030
CP3801	AE008886	06CK7N0301	CORD CONNECTOR	TWG-P23P-A1
CP4300	AE008886	06CK7N0301	CORD CONNECTOR	TWG-P23P-A1
CP4302	AE009551	06G7S21501	CONNECTOR PCB SIDE	WD-00021-R
CP5801	AE016559	06972U3010	CONNECTOR PCB SIDE	TKC-W30P-U1 BLK ST
CP5802	AE009741	06GF2G0020	CONNECTOR PCB SIDE	WD-00028-R
CP5803	AE009742	06GF2G0010	CONNECTOR PCB SIDE	WD-00027-R
CP6401	75007827	06972UT018	CONNECTOR PCB SIDE	125622330K3
CP6501	AE009549	069S2M0079	CONNECTOR PCB SIDE	A2006WV0-2X11P
CP7200	AE009548	069S2U0739	CONNECTOR PCB SIDE	A2006WV0-2X15P
CP7601	AE013948	069S250639	CONNECTOR PCB SIDE	A2001WR2-5P
CP8101	AE008882	06977NM020	CONNECTOR PCB SIDE	127301123K2
△ CP8501	AE009553	06GG2E0019	CONNECTOR PCB SIDE	A2001WR-14A
CP8502	AE013951	069S280629	CONNECTOR PCB SIDE	A2001WV2-8P
CUS151	AE016076	800WFAA006	CUSHION A	
EL2401	AE014351	124116281A	EYE LET	XRY16X28BD
△ F501	AE002112	080NT2R504	FUSE	50T025H
△ F7001	AE004626	083LA05007	FUSE	1206FA5A-T
FH501	AE002634	06710T0009	HOLDER,FUSE	EYF-52BCY
FH502	AE002634	06710T0009	HOLDER,FUSE	EYF-52BCY
NR2401	AE016560	11074560M7	R.NETWORK	CRA108560JV
NR2402	AE016560	11074560M7	R.NETWORK	CRA108560JV
NR2403	AE016560	11074560M7	R.NETWORK	CRA108560JV
NR2404	AE016560	11074560M7	R.NETWORK	CRA108560JV
NR2405	AE016560	11074560M7	R.NETWORK	CRA108560JV
NR2406	AE016560	11074560M7	R.NETWORK	CRA108560JV
NR2407	AE016560	11074560M7	R.NETWORK	CRA108560JV
NR2420	AE016560	11074560M7	R.NETWORK	CRA108560JV
NR2421	AE016560	11074560M7	R.NETWORK	CRA108560JV
NR2422	AE016560	11074560M7	R.NETWORK	CRA108560JV
NR3001	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR3002	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR3003	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR3004	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR3005	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR3006	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR3007	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR3008	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR3009	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR3010	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR3011	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR3601	AE016524	11074330M7	R.NETWORK	CRA108330JV
NR3602	AE016524	11074330M7	R.NETWORK	CRA108330JV
NR3603	AE016524	11074330M7	R.NETWORK	CRA108330JV
NR3604	AE016524	11074330M7	R.NETWORK	CRA108330JV
NR3605	AE016524	11074330M7	R.NETWORK	CRA108330JV
NR3606	AE016524	11074330M7	R.NETWORK	CRA108330JV
NR7204	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR7205	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR7206	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR7207	AE009557	11074470M7	R.NETWORK	CRA108470JV
NR7208	AE009822	110P4103M5	R.NETWORK	4D02WGJ0103TCE
NR7209	AE009822	110P4103M5	R.NETWORK	4D02WGJ0103TCE
NR7210	AE009822	110P4103M5	R.NETWORK	4D02WGJ0103TCE
NR7211	AE009557	11074470M7	R.NETWORK	CRA108470JV
OS7601	AE008414	077A033001	REMOTE RECEIVER	ROM-V338TAO
SH501	AE009776	126D000045	TERMINAL PIN	YQ-12

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
MISCELLANEOUS				
▲ SP301	AE009558	070Y433004	SPEAKER	S0308F01
▲ SP302	AE009558	070Y433004	SPEAKER	S0308F01
SH8501	AE009776	126D000045	TERMINAL PIN	YQ-12
SH8502	AE009776	126D000045	TERMINAL PIN	YQ-12
SH8503	AE009776	126D000045	TERMINAL PIN	YQ-12
SH8504	AE009776	126D000045	TERMINAL PIN	YQ-12
▲ TH501	AE009559	DSQDNE5R0L	THERMISTOR	5D2-08LCS
TM101	AE016562	076D0QJ011	TRANSMITTER	000-103000560
▲ TU5801	75007843	0164Y03002	DIGITAL TUNER	TDTG-S156D
▲ V7201	AE009667	09EA122001	LCD	T220SW01_VO
X101	AE009387	100GT01616	CRYSTAL	B16000E011
X801	AE009388	100DT02007	CRYSTAL	DSX840GA
X2401	AE008161	100GT02720	CRYSTAL	B27000C005
X3602	AE008624	100DT02801	CRYSTAL	SMD-49
X4001	AE009566	100GT02727	CRYSTAL	SMD-49 C27000J029
X6101	AE008161	100GT02720	CRYSTAL	B27000C005
X7200	AE009563	100GT02728	CRYSTAL	SMD-49 C27000B030

RESISTOR

RC..... CARBON RESISTOR

CAPACITORS

CC..... CERAMIC CAPACITOR
CE..... ALUMI ELECTROLYTIC CAPACITOR
CP..... POLYESTER CAPACITOR
CPP..... POLYPROPYLENE CAPACITOR
CPL..... PLASTIC CAPACITOR
CMP..... METAL POLYESTER CAPACITOR
CMPL..... METAL PLASTIC CAPACITOR
CMPP..... METAL POLYPROPYLENE CAPACITOR

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
RESISTORS				
△ R503	75006901	RC31X1126J	RC	12M OHM 1W
△ R505	AE009485	R63884330J	R,FUSE	33 OHM 1/4W
△ R506	AE002150	R803R9333J	RC	33K OHM 1/16W
△ R509	AE009486	RC31X1125J	RC	1.2M OHM 1W
△ R510	AE005735	R63881R22J	R,FUSE	0.22 OHM 1W
△ R518	AE012427	R002T4101J	RC	100 OHM 1/4W
△ R522	AE006025	R3K58A010J	R,METAL OXIDE	1 OHM 2W
△ R544	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R545	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R546	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R547	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R7038	AE009711	R63882220J	R,FUSE	22 OHM 1/2W
△ R7039	AE009711	R63882220J	R,FUSE	22 OHM 1/2W
CAPACITORS				
△ C501	AE001725	CS0PB0413K	CC	0.001 UF 50V B
△ C502	AE009804	E8E52H121D	CE	120 UF 400V
△ C503	AE011287	CS0PCH4L2J	CC	330 PF 50V CH
△ C504	AE008913	E7EYF2102M	CE	1000 UF 16V
△ C505	AE001732	CS0PCH4H1J	CC	22 PF 50V CH
△ C506	AE012287	P2122B224M	CMP	0.22 UF 275V ECQUL
△ C507	AE011227	CD39E0M13M	CC	0.001 UF 250V
△ C508	AE012286	P2122B104M	CMP	0.1 UF 275V ECQUL
△ C510	AE011227	CD39E0M13M	CC	0.001 UF 250V
△ C513	AE011392	C03L0R7Q2K	CC	470 PF 2KV R
△ C514	AE009491	CD39E0MQ2K	CC	470 PF 250V
C518	AE009492	P332E4223J	CPP	0.022 UF 400V
△ C520	75007051	E8E2U54R7D	CE	4.7 UF 50V
△ C522	AE009830	E7EYS3681M	CE	680 UF 25V
△ C525	AE008913	E7EYF2102M	CE	1000 UF 16V
C7006	AE008913	E7EYF2102M	CE	1000 UF 16V
C7020	AE008913	E7EYF2102M	CE	1000 UF 16V
C7026	AE009700	C234SLB11J	CC	10 PF 6KV SL
C7029	AE009700	C234SLB11J	CC	10 PF 6KV SL
C7030	AE009700	C234SLB11J	CC	10 PF 6KV SL
C7033	AE009700	C234SLB11J	CC	10 PF 6KV SL
DIODES				
D107	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
△ D504	AE009461	D6C047110A	DIODE VARISTA	ENE471D-10A
△ D505	AE008372	D2LT001F50	DIODE SILICON	1F5-E
D506	AE008319	D4AT01H3E0	DIODE RECTIFIER	1H3-E
△ D507	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
△ D508	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
D509	AE009494	DE7RB3302B	DIODE ZENER	UDZSNP33B TE-17
△ D510	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
△ D511	AE008319	D4AT01H3E0	DIODE RECTIFIER	1H3-E
D512	AE002133	D2BXARS010	DIODE SILICON	SARS01-V1
△ D514	AE011461	D28F21DQN9	DIODE SCHOTTKY	21DQ09N-FC4
△ D515	AE009803	D28A10A080	DIODE SCHOTTKY BARRIER	FCBS10A08
△ D516	AE008319	D4AT01H3E0	DIODE RECTIFIER	1H3-E
D517	AE011502	D97U01601B	DIODE ZENER	MTZJ16B T-77
△ D518	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
△ D523	AE009829	D28A10A040	DIODE SCHOTTKY BARRIER	FCQ10A04
D525	AE016538	D2BRJPAL30	DIODE SCHOTTKY BARRIER	SJPA-L3-VL
D804	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D805	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D1001	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D1002	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D2303	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D2304	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D2402	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D3201	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
△ D3202	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D3600	AE016508	D28R0QY040	DIODE SCHOTTKY BARRIER	EP10QY04-TE8L3
D3601	AE004937	D77R1A1R10	DIODE VARISTA	AVRL161A1R1NT
D3603	AE004937	D77R1A1R10	DIODE VARISTA	AVRL161A1R1NT
D3605	AE016508	D28R0QY040	DIODE SCHOTTKY BARRIER	EP10QY04-TE8L3
D3630	AE004795	DE7RB5R62B	DIODE ZENER	UDZSNP5.6B TE-17
△ D3801	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
△ D3802	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D3804	AE008906	D28R11FS20	DIODE	EC11FS2-TE12L
△ D3805	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
△ D3806	AE008906	D28R11FS20	DIODE	EC11FS2-TE12L
D3807	AE009716	DE7RB1302B	DIODE ZENER	UDZSNP13B TE-17
D3809	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4002	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4003	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4005	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4008	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4211	AE008091	DE7RB4R72B	DIODE ZENER	UDZSNP4.7B TE-17
D4305	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D6401	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
DIODES				
D6402	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D6403	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D6407	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D6409	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D6411	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D6412	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D6413	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D7001	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7002	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7003	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7004	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7005	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7006	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7007	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7008	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7009	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7010	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7011	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7012	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7013	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7014	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7015	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7016	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7017	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7018	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7019	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7020	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7021	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7022	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7023	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7024	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7025	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7026	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7601	AE000288	0021E9Q010	LED	LTL-1BEFJ-002A
D8510	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
ICS				
IC101	AE009809	S51B03JM02	MEMORY DATA 52PIN FLASH MICOM ROM 16K	R5F21244SNFP
IC105	AE011998	I9UF032290	RESET IC 2.9V TYPE	PST3229NR
△ IC301	AE008430	I03SP20520	SOUND AMP 5W 2CH	LA42052-E
△ IC501	AE009499	ICAD055310	LOW STANDBY POWER IC CONTROL	FA5531P-A2
△ IC502	AE011889	11KJ9A431A	VARIABLE SHUNT REGULATOR TAPE	KIA431A-AT
IC504	AE016539	I0BD981050	VIN=30V IO=3.5A	SI-8105QL
△ IC505	AE002809	000220002W	PHOTO COUPLER	PS2561AL1-1-V(W)
IC801	AE016683	S52A01CE02	MEMORY DATA EEPROM 256K 12C	AT24C256BN-10SU-1.8
IC802	AE011998	I9UF032290	RESET IC 2.9V TYPE	PST3229NR
IC803	AE016509	S51Z01AM01	MEMORY DATA SCALER LIMITED O/R	VCT6973G-FA-B3-000
△ IC2301	AE008194	I03FV65650	5CH MOTOR DRIVER IC	LA6565VR-TLM-E
IC2401	AE011746	I5PK05ALC0	MPEG DECODER	STI5105ALC
IC2402	AE011999	I9UF032310	RESET IC 3.1V TYPE	PST3231NR
IC2403	AE009449	ICLJ022EC5	DDR-400 256M CL=3	HY5DU561622ETP-D43-C
IC2404	AE016543	S51Z01AF02	MEMORY DATA NOR FLASH 16M B00T	S29AL016D70TFI010
IC2409	AE008922	I5PJ0064W0	EEPROM 64K 12C	M24C64WMN6TP
IC3001	75007780	I55F045FT0	8BIT BUS TRANSCEIVER	TC74LCX245FT(EL)
IC3002	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3003	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3004	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3005	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3006	75007781	I55J0CX020	2 INPUT NOR GATE	TC74LCX02FT(EL)
IC3007	75007779	I55F0125F0	BUS BUFFER	TC7SH125FU(TE85L,F
△ IC3201	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC3202	AE008435	I1LF010150	DC-DC CONVERTER CONTROLLER	AL1015
△ IC3203	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC3204	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC3205	AE004653	I1KF98D050	REGULATOR 5V	KIA78D05F
△ IC3206	AE016513	I5HJ9B19U0	REGULATOR VO=1.9V IO=800MA	S-1170B19UC-OTETFG
IC3207	AE009832	I5HJ9B15U0	REGULATOR VO=1.5V IO=800MA	S-1170B15UC-OTATFG
IC3605	75007789	IG1F090250	144PIN TQFP HDMI RECEIVER	SI9025CTU
IC3606	AE011981	S51Z01AE02	MEMORY DATA EEPROM 2K 12C	S-24CS02AFJ-TB-GE
△ IC3801	AE007825	I07F0C0WFO	1A REGULATOR	BA00BC0WFP-E2
△ IC3806	AE009719	I5HJ950UC0	REGULATOR VO=5.0V IO=800MA	S-1170B50UC-OUJTFG
IC4001	AE009720	ICQK06966A	VADDIS9 MPEG/MICON/DSP/RF-AMP	ZR36966ELCG-D-G
IC4005	AE008324	IF9J0164AG	1M*16*4BANK(64M) 143MHZ SDRAM	M12L64164A-7TG
IC4007	AE016515	S51Z01AF01	MEMORY DATA NOR FLASH 16M B00T	SST39VF1601-70-4C-EKE
IC4201	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC4205	AE004651	I0QF025840	A/V SW 2INPUT 1OUTPUT	NJM2584AM(TE1)
IC4302	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC4303	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC5801	75007776	I0CJ040530	ANALOG SW 3IN-2OUT	SN74LV4053APWR
IC6101	75007784	I5PK003620	DVB-T SINGLE CHIP RECEIVER	STV0362
△ IC6401	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC6402	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
ICS				
△ IC6403	AE016545	I5HJ9B34U0	REGULATOR VO=3.4V IO=800MA	S-1170B34UC-OTTTFG
△ IC6404	AE016545	I5HJ9B34U0	REGULATOR VO=3.4V IO=800MA	S-1170B34UC-OTTTFG
△ IC6405	AE016546	I5HJ9B26U0	REGULATOR VO=2.6V IO=800MA	S-1170B26UC-OTLTFG
IC6406	AE002504	I0QF0580V0	AUDIO OPERATION AMP	NJM4580V(TE1)
△ IC6407	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
IC6500	AE008921	I5CJ031570	A/V SW 2INPUT 1OUTPUT	SN74LVC1G3157DCKR
IC6501	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC6502	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC6503	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC6504	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC7001	AE009512	I07F098820	19WLCD INVERTER IC	BD9882FV-E2
IC7002	AE009513	I0CF0902D0	QUAND OPERATIONNAL AMPLIFILE	LM2902DR
IC7200	AE009831	I56K066550	SCALER IC	R8A66655FP
IC8501	AE009365	I0QF045650	DUAL OPEAMP	NJM4565M(TE1)
△ IC8502	AE009805	I1YF9117A0	VO=ADJ IO=1A TAPING	LD1117AL-ADJ-AA3-A-R
TRANSISTORS				
Q101	AE009515	T27T030190	FET	2SK3019_TL
Q102	AE009515	T27T030190	FET	2SK3019_TL
Q301	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q302	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
△ Q501	AE009722	T41GK35320	FET	2SK3532-01MR
Q505	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q801	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q802	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1000	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1001	AE013032	TPAAB05001	COMPOUND TRANSISTOR	KRA102SRTK
Q1002	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1003	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1004	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q1005	AE013031	TPAAA05001	COMPOUND TRANSISTOR	KRA101SRTK
Q1006	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q2301	AE008330	TAAA1505SY	TRANSISTOR SILICON	KTA1505S-Y-RTK/P
Q2302	AE008330	TAAA1505SY	TRANSISTOR SILICON	KTA1505S-Y-RTK/P
Q2401	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q3002	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3003	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3004	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
△ Q3200	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3201	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
△ Q3202	AE004665	TS3M000044	COMPOUND TRANSISTOR	CPH6312-TL-E
Q3203	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3204	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
△ Q3205	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3206	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3601	AE009515	T27T030190	FET	2SK3019_TL
Q3602	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3603	AE009515	T27T030190	FET	2SK3019_TL
Q3604	AE009515	T27T030190	FET	2SK3019_TL
Q3605	AE009515	T27T030190	FET	2SK3019_TL
Q3618	AE009515	T27T030190	FET	2SK3019_TL
△ Q3801	AE009514	TJ7T35P020	FET	RTQ035P02-TR
Q3802	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q3803	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q3804	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
△ Q3805	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
△ Q3806	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3807	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3808	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
△ Q3809	AE009514	TJ7T35P020	FET	RTQ035P02-TR
Q3810	AE009514	TJ7T35P020	FET	RTQ035P02-TR
Q4200	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4201	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q4205	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4210	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4214	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q4217	AE013033	TPAAC05002	COMPOUND TRANSISTOR	KRA103SRTK
Q4218	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q4224	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4303	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4304	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4305	AE013032	TPAAB05001	COMPOUND TRANSISTOR	KRA102SRTK
Q4306	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4307	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4308	AE013032	TPAAB05001	COMPOUND TRANSISTOR	KRA102SRTK
Q4309	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q4310	AE013011	TNAAC05002	COMPOUND TRANSISTOR	KRC103SRTK
Q5801	AE009515	T27T030190	FET	2SK3019_TL
Q5802	AE009515	T27T030190	FET	2SK3019_TL
Q5805	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q7003	AE009515	T27T030190	FET	2SK3019_TL
△ Q7004	AE009516	T250A06J30	FET	TK30A06J3(ORION.Q)

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
TRANSISTORS				
△ Q7005	AE009516	T250A06J30	FET	TK30A06J3(ORION.Q)
COILS & TRANSFORMERS				
△ L501	AE009366	029X000121	COIL,LINE FILTER	SS24H-K08240-CH
L504	AE016622	02167E4R7M	COIL	4.7 UH
L505	AE016623	021U0L100M	COIL	10 UH
L2401	AE008874	0216SD2R2J	COIL	2.2 UH
L2404	AE008874	0216SD2R2J	COIL	2.2 UH
L2406	AE008874	0216SD2R2J	COIL	2.2 UH
L3001	AE008874	0216SD2R2J	COIL	2.2 UH
L3002	AE008874	0216SD2R2J	COIL	2.2 UH
L3201	AE013322	02167E100K	COIL	10 UH
L3202	AE009723	0216MG220M	COIL	22 UH
L3601	AE009519	02D1000119	COIL CHOKE	EXC28CG900U
L3602	AE009519	02D1000119	COIL CHOKE	EXC28CG900U
L4204	AE013298	0216SD220J	COIL	22 UH
L4205	AE013298	0216SD220J	COIL	22 UH
L4206	AE013298	0216SD220J	COIL	22 UH
L4207	AE013298	0216SD220J	COIL	22 UH
L6101	AE008874	0216SD2R2J	COIL	2.2 UH
L6102	AE008874	0216SD2R2J	COIL	2.2 UH
L6103	AE008874	0216SD2R2J	COIL	2.2 UH
L6104	AE008874	0216SD2R2J	COIL	2.2 UH
L6401	AE008985	0216SD100J	COIL	10 UH
L6406	AE008874	0216SD2R2J	COIL	2.2 UH
L6408	AE007760	0216SD4R7J	COIL	4.7 UH
L6409	AE007760	0216SD4R7J	COIL	4.7 UH
L6410	AE007760	0216SD4R7J	COIL	4.7 UH
L7001	AE013322	02167E100K	COIL	10 UH
L8501	AE008874	0216SD2R2J	COIL	2.2 UH
L8502	AE006570	0216SD1R0J	COIL	1 UH
△ T501	AE009819	0481330224	TRANSFORMER,SWITCHING	81330224
△ T7001	AE009660	048135113G	TRANSFORMER,SWITCHING	8135113G
△ T7002	AE009660	048135113G	TRANSFORMER,SWITCHING	8135113G
JACKS				
△ J301	AE009522	060R131024	HEADPHONE JACK	PJ-364H
△ J501	AE009725	064Q1A0011	JACK,AC	CCT2302-0701C
J4206	AE009726	063D100067	SOCKET,21PIN	MRC-021H-02PC(O87)
J4208	AE009522	060R131024	HEADPHONE JACK	PJ-364H
J4301	AE009524	060R401140	RCA JACK	RCA-101HT(OR)
J8101	AE009526	062R750007	PLUG	DIN-417HA-01
J8102	AE009527	060R411058	RCA JACK	RCA-341H(NI)-09
J8103	AE009528	060R431039	RCA JACK	RCA-228H(3)NI-02
J8104	AE009529	060R431040	RCA JACK	RCA-341H(2)NI-06
SWITCHES				
SW2201	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2202	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2203	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2204	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2205	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2206	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2207	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2208	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
P.C.BOARD ASSEMBLIES				
PCB130	AE016684	A52A06C130L	DVD MT PCB ASS'Y	DMG097A
PCB240	AE016685	A52A06C240L	POWER PCB ASS'Y	CEG362A
PCB270	AE016686	A52A06C270L	OPERATION PCB ASS'Y	CEG363A
PCB290	AE016687	A52A06C290L	TUNER PCB ASS'Y	CEG367A
PCBDA0	AE016688	A52A06CDA0L	REMOCON PCB ASS'Y	CEG364A
PCBDH0	AE016689	A52A06CDH0L	DIGITAL PCB ASS'Y	CEG365A
PCBF40	AE016690	A52A06CF40L	MAIN PCB ASS'Y	CMG130A
MISCELLANEOUS				
B101	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B303	AE009535	024HC13914	CORE,BEADS	HCB3216KF-391T20
B307	AE009535	024HC13914	CORE,BEADS	HCB3216KF-391T20
B308	AE009535	024HC13914	CORE,BEADS	HCB3216KF-391T20
B501	AE013373	024HT03564	CORE,BEADS	W4BRH3.5X6X1.0
B801	AE013364	024AC5330J	CORE,BEADS	BLM18PG330SN1D
B802	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B803	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B804	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B805	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B806	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B807	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B808	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B809	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B810	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B811	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B812	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B813	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B818	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B819	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
MISCELLANEOUS				
B820	AE009773	024AC8102T	CORE,BEADS	BLM15AG102SN1D
B821	AE009773	024AC8102T	CORE,BEADS	BLM15AG102SN1D
B2305	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B2401	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2402	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2403	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2404	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2405	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2406	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B2407	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B3001	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B3002	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B3201	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3601	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3602	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3603	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3604	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3605	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B3606	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B3608	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B3609	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3610	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3613	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3802	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3803	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3804	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3805	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3807	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3808	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3809	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B3810	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4001	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4002	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4003	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4005	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4006	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4008	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4010	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4015	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4016	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B4202	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B4203	AE008879	024HC56013	CORE,BEADS	FCM1608KF-601T02
B4204	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4205	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4206	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4228	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B4303	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B4304	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B4305	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B4308	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4312	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B4317	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B4322	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B5802	AE008879	024HC56013	CORE,BEADS	FCM1608KF-601T02
B5803	AE013364	024AC5330J	CORE,BEADS	BLM18PG330SN1D
B6101	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B6102	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B6103	AE008395	024HC56005	CORE,BEADS	FCM1608CF-600T06
B6401	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6402	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6404	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6405	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6406	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6407	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6408	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6409	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6410	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6411	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6501	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6502	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B6503	AE008609	024HC51023	CORE,BEADS	FCM1608KF-102T02
B6504	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B7200	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B7201	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B7202	AE008610	024HC51513	CORE,BEADS	FCM1608KF-151T06
B7203	AE008610	024HC51513	CORE,BEADS	FCM1608KF-151T06
B7204	AE008610	024HC51513	CORE,BEADS	FCM1608KF-151T06
B7205	AE008610	024HC51513	CORE,BEADS	FCM1608KF-151T06
B8501	AE008394	024BC5121J	CORE,BEADS	BLM18PG121SN1D
B8502	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
B8503	AE008394	024BC5121J	CORE,BEADS	BLM18PG121SN1D

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
MISCELLANEOUS				
B8504	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
BT001	AE016522	141L004019	BATTERY,MANGAN	R03 (AB) 2P TG AO DB
BT002	AE016522	141L004019	BATTERY,MANGAN	R03 (AB) 2P TG AO DB
CD301	AE009666	06E8142403	CORD CONNECTOR	E8142403
▲ CD501	AE009734	120Q155804	CORD AC	P205-1324-4
CP101	AE009735	06GG270029	CONNECTOR PCB SIDE	A2001WV-7A
CP501	AE008882	06977NM020	CONNECTOR PCB SIDE	127301123K2
CP503	AE013859	069D01001A	CONNECTOR PCB SIDE	003P-2100
CP801	AE013951	069S280629	CONNECTOR PCB SIDE	A2001WV2-8P
CP802	AE009736	06GG260029	CONNECTOR PCB SIDE	A2001WV-6A
CD3805	AE006481	06CPL02011	CABLE,PAL	TD-OR0157F
CD4301	AE009541	06CH231204	CORD CONNECTOR	CH231204
CD4302	AE016624	06E8251301	CORD CONNECTOR	E8251301
CD6501	AE009704	06E82M1102	CORD CONNECTOR	E82M1102
CD7005	AE009849	06E82E1303	CORD CONNECTOR	E82E1303
CD7006	AE009849	06E82E1303	CORD CONNECTOR	E82E1303
CD7204	AE009821	06EA2U2505	CORD CONNECTOR	EA2U2505
CP2201	AE013944	069S230639	CONNECTOR PCB SIDE	A2001WR2-3P
CP2301	AE008156	069KYOT159	CONNECTOR PCB SIDE	LD07T2-24ND-03
CP2302	AE009544	069EV5T060	CONNECTOR PCB SIDE	04_6232_105_015_800+
CP2303	AE009545	069EV6T060	CONNECTOR PCB SIDE	04_6232_106_015_800+
CP2401	AE016557	069S2A0739	CONNECTOR PCB SIDE	A2006WV0-2X5P
CP2402	AE009743	06GG250029	CONNECTOR PCB SIDE	A2001WV-5A
CP3001	AE016558	0636800007	HOLDER,IC	A01K1B108007P00
CP3601	AE009550	06GDYL3038	CONNECTOR PCB SIDE	1A0300030
CP3801	AE008886	06CK7N0301	CORD CONNECTOR	TWG-P23P-A1
CP4300	AE008886	06CK7N0301	CORD CONNECTOR	TWG-P23P-A1
CP4302	AE009551	06G7S21501	CONNECTOR PCB SIDE	WD-00021-R
CP5801	AE016559	06972U3010	CONNECTOR PCB SIDE	TKC-W30P-U1 BLK ST
CP5802	AE009741	06GF2G0020	CONNECTOR PCB SIDE	WD-00028-R
CP5803	AE009742	06GF2G0010	CONNECTOR PCB SIDE	WD-00027-R
CP6401	75007827	06972UT018	CONNECTOR PCB SIDE	125622330K3
CP6501	AE009549	069S2M0079	CONNECTOR PCB SIDE	A2006WV0-2X11P
CP7200	AE009548	069S2U0739	CONNECTOR PCB SIDE	A2006WV0-2X15P
CP7601	AE013948	069S250639	CONNECTOR PCB SIDE	A2001WR2-5P
CP8101	AE008882	06977NM020	CONNECTOR PCB SIDE	127301123K2
▲ CP8501	AE009553	06GG2E0019	CONNECTOR PCB SIDE	A2001WR-14A
CP8502	AE013951	069S280629	CONNECTOR PCB SIDE	A2001WV2-8P
CUS151	AE016076	800WFAA006	CUSHION A	
EL2401	AE014351	124116281A	EYE LET	XRY16X28BD
▲ F501	AE002112	080NT2R504	FUSE	50T025H
▲ F7001	AE004626	083LA05007	FUSE	1206FA5A-T
FH501	AE002634	06710T0009	HOLDER,FUSE	EYF-52BCY
FH502	AE002634	06710T0009	HOLDER,FUSE	EYF-52BCY
NR2401	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2402	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2403	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2404	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2405	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2406	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2407	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2420	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2421	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2422	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR3001	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3002	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3003	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3004	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3005	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3006	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3007	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3008	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3009	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3010	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3011	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3601	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR3602	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR3603	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR3604	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR3605	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR3606	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR7204	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR7205	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR7206	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR7207	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR7208	AE009822	110P4103M5	R,NETWORK	4D02WGX0103TCE
NR7209	AE009822	110P4103M5	R,NETWORK	4D02WGX0103TCE
NR7210	AE009822	110P4103M5	R,NETWORK	4D02WGX0103TCE
NR7211	AE009557	11074470M7	R,NETWORK	CRA108470JV
OS7601	AE008414	077A033001	REMOTE RECEIVER	ROM-V338TAO
SH501	AE009776	126D000045	TERMINAL PIN	YQ-12

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
MISCELLANEOUS				
△ SP301	AE009558	070Y433004	SPEAKER	S0308F01
△ SP302	AE009558	070Y433004	SPEAKER	S0308F01
SH8501	AE009776	126D000045	TERMINAL PIN	YQ-12
SH8502	AE009776	126D000045	TERMINAL PIN	YQ-12
SH8503	AE009776	126D000045	TERMINAL PIN	YQ-12
SH8504	AE009776	126D000045	TERMINAL PIN	YQ-12
△ TH501	AE009559	DSQDNE5R0L	THERMISTOR	5D2-08LCS
TM101	AE016627	076D0QJ031	TRANSMITTER	000-103000580
△ TU5801	75007843	0164Y03002	DIGITAL TUNER	TDTG-S156D
△ V7201	AE009667	09EA122001	LCD	T220SW01_VO
X101	AE009387	100GT01616	CRYSTAL	B16000E011
X801	AE009388	100DT02007	CRYSTAL	DSX840GA
X2401	AE008161	100GT02720	CRYSTAL	B27000C005
X3602	AE008624	100DT02801	CRYSTAL	SMD-49
X4001	AE009566	100GT02727	CRYSTAL	SMD-49 C27000J029
X6101	AE008161	100GT02720	CRYSTAL	B27000C005
X7200	AE009563	100GT02728	CRYSTAL	SMD-49 C27000B030
RESISTOR				
	RC.....	CARBON RESISTOR		
CAPACITORS				
	CC.....	CERAMIC CAPACITOR		
	CE.....	ALUMI ELECTROLYTIC CAPACITOR		
	CP.....	POLYESTER CAPACITOR		
	CPP.....	POLYPROPYLENE CAPACITOR		
	CPL.....	PLASTIC CAPACITOR		
	CMP.....	METAL POLYESTER CAPACITOR		
	CMPL.....	METAL PLASTIC CAPACITOR		
	CMPP.....	METAL POLYPROPYLENE CAPACITOR		

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
RESISTORS				
△ R503	75006901	RC31X1126J	RC	12M OHM 1W
△ R505	AE009485	R63884330J	R,FUSE	33 OHM 1/4W
△ R506	AE002150	R803R9333J	RC	33K OHM 1/16W
△ R509	AE009486	RC31X1125J	RC	1.2M OHM 1W
△ R510	AE005735	R63881R22J	R,FUSE	0.22 OHM 1W
△ R518	AE012427	R002T4101J	RC	100 OHM 1/4W
△ R522	AE006025	R3K58A010J	R,METAL OXIDE	1 OHM 2W
△ R544	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R545	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R546	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R547	AE009833	R861R42R2F	RC	2.2 OHM 1/4W
△ R7038	AE009711	R63882220J	R,FUSE	22 OHM 1/2W
△ R7039	AE009711	R63882220J	R,FUSE	22 OHM 1/2W
CAPACITORS				
△ C501	AE001725	CS0PB0413K	CC	0.001 UF 50V B
△ C502	AE009804	E8E52H121D	CE	120 UF 400V
△ C503	AE011287	CS0PCH4L2J	CC	330 PF 50V CH
△ C504	AE008913	E7EYF2102M	CE	1000 UF 16V
△ C505	AE001732	CS0PCH4H1J	CC	22 PF 50V CH
△ C506	AE012287	P2122B224M	CMP	0.22 UF 275V ECQUL
△ C507	AE011227	CD39E0M13M	CC	0.001 UF 250V
△ C508	AE012286	P2122B104M	CMP	0.1 UF 275V ECQUL
△ C510	AE011227	CD39E0M13M	CC	0.001 UF 250V
△ C513	AE011392	C03L0R7Q2K	CC	470 PF 2KV R
△ C514	AE009491	CD39E0MQ2K	CC	470 PF 250V
C518	AE009492	P332E4223J	CCP	0.022 UF 400V
△ C520	75007051	E8E2U54R7D	CE	4.7 UF 50V
△ C522	AE009830	E7EYS3681M	CE	680 UF 25V
△ C525	AE008913	E7EYF2102M	CE	1000 UF 16V
C7006	AE008913	E7EYF2102M	CE	1000 UF 16V
C7020	AE008913	E7EYF2102M	CE	1000 UF 16V
C7026	AE009700	C234SLB11J	CC	10 PF 6KV SL
C7029	AE009700	C234SLB11J	CC	10 PF 6KV SL
C7030	AE009700	C234SLB11J	CC	10 PF 6KV SL
C7033	AE009700	C234SLB11J	CC	10 PF 6KV SL
DIODES				
D107	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
△ D504	AE009461	D6C047110A	DIODE VARISTA	ENE471D-10A
△ D505	AE008372	D2LT001F50	DIODE SILICON	1F5-E
D506	AE008319	D4AT01H3E0	DIODE RECTIFIER	1H3-E
△ D507	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
△ D508	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
D509	AE009494	DE7RB3302B	DIODE ZENER	UDZSNP33B TE-17
△ D510	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
△ D511	AE008319	D4AT01H3E0	DIODE RECTIFIER	1H3-E
D512	AE002133	D2BXARS010	DIODE SILICON	SARS01-V1
△ D514	AE011461	D28F21DQN9	DIODE SCHOTTKY	21DQ09N-FC4
△ D515	AE009803	D28A10A080	DIODE SCHOTTKY BARRIER	FCHS10A08
△ D516	AE008319	D4AT01H3E0	DIODE RECTIFIER	1H3-E
D517	AE011502	D97U01601B	DIODE ZENER	MTZJ16B T-77
△ D518	AE011441	D2WTRM11C0	DIODE SILICON	RM11C-EIC
△ D523	AE009829	D28A10A040	DIODE SCHOTTKY BARRIER	FCQ10A04
D525	AE016538	D2BRJPAL30	DIODE SCHOTTKY BARRIER	SJPA-L3-VL
D804	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D805	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D1001	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D1002	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D2303	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D2304	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D2402	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D3201	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
△ D3202	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D3600	AE016508	D28R0QY040	DIODE SCHOTTKY BARRIER	EP10QY04-TE8L3
D3601	AE004937	D77R1A1R10	DIODE VARISTA	AVRL161A1R1NT
D3603	AE004937	D77R1A1R10	DIODE VARISTA	AVRL161A1R1NT
D3605	AE016508	D28R0QY040	DIODE SCHOTTKY BARRIER	EP10QY04-TE8L3
D3630	AE004795	DE7RB5R62B	DIODE ZENER	UDZSNP5.6B TE-17
△ D3801	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
△ D3802	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D3804	AE008906	D28R11FS20	DIODE	EC11FS2-TE12L
△ D3805	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
△ D3806	AE008906	D28R11FS20	DIODE	EC11FS2-TE12L
D3807	AE009716	DE7RB1302B	DIODE ZENER	UDZSNP13B TE-17
D3809	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4002	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4003	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4005	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4008	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D4211	AE008091	DE7RB4R72B	DIODE ZENER	UDZSNP4.7B TE-17
D4305	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D6401	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
DIODES				
D6402	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D6403	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D6407	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D6409	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D6411	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D6412	AE009498	DGJRT54WS0	DIODE SCHOTTKY BARRIER	BAT54WS
D6413	AE004643	D28R1QS040	DIODE	EC31QS04-TE12L
D7001	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7002	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7003	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7004	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7005	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7006	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7007	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7008	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7009	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7010	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7011	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7012	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7013	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7014	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7015	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7016	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7017	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7018	AE011421	D1VT001330	DIODE,SILICON	1SS133T-77
D7019	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7020	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7021	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7022	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7023	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7024	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7025	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7026	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
D7601	AE000288	0021E9Q010	LED	LTL-1BEFJ-002A
D8510	AE009006	DGERMA1110	DIODE SILICON	MA111-(TX)
ICS				
IC101	AE009809	S51B03JM02	MEMORY DATA 52PIN FLASH MICOM ROM 16K	R5F21244SNFP
IC105	AE011998	I9UF032290	RESET IC 2.9V TYPE	PST3229NR
△ IC301	AE008430	I03SP20520	SOUND AMP 5W 2CH	LA42052-E
△ IC501	AE009499	ICAD055310	LOW STANDBY POWER IC CONTROL	FA5531P-A2
△ IC502	AE011889	I1KJ9A431A	VARIABLE SHUNT REGULATOR TAPE	KIA431A-AT
IC504	AE016539	I0BD981050	VIN=30V IO=3.5A	SI-8105QL
△ IC505	AE002809	000220002W	PHOTO COUPLER	PS2561AL1-1-V(W)
IC801	AE016621	S52A01CE01	MEMORY DATA EEPROM 256K 12C	AT24C256BN-10SU-1.8
IC802	AE011998	I9UF032290	RESET IC 2.9V TYPE	PST3229NR
IC803	AE016509	S51Z01AM01	MEMORY DATA SCALER LIMITED O/R	VCT6973G-FA-B3-000
△ IC2301	AE008194	I03FV65650	5CH MOTOR DRIVER IC	LA6565VR-TLM-E
IC2401	AE011746	I5PK05ALC0	MPEG DECODER	STI5105ALC
IC2402	AE011999	I9UF032310	RESET IC 3.1V TYPE	PST3231NR
IC2403	AE009449	ICLJ022EC5	DDR-400 256M CL=3	HY5DU561622ETP-D43-C
IC2404	AE016543	S51Z01AF02	MEMORY DATA NOR FLASH 16M B00T	S29AL016D70TFI010
IC2409	AE008922	I5PJ0064W0	EEPROM 64K 12C	M24C64WMN6TP
IC3001	75007780	I55F045FT0	8BIT BUS TRANSCEIVER	TC74LCX245FT(EL)
IC3002	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3003	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3004	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3005	75007782	I55J0X2440	20PIN LOW VOLTAGE BUS BUFFER	TC74LCX244FT(EL,K)
IC3006	75007781	I55J0CX020	2 INPUT NOR GATE	TC74LCX02FT(EL)
IC3007	75007779	I55F0125F0	BUS BUFFER	TC7SH125FU(TE85L,F
△ IC3201	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC3202	AE008435	I1LF010150	DC-DC CONVERTER CONTROLLER	AL1015
△ IC3203	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC3204	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC3205	AE004653	I1KF98D050	REGULATOR 5V	KIA78D05F
△ IC3206	AE016513	I5HJ9B19U0	REGULATOR VO=1.9V IO=800MA	S-1170B19UC-OTETFG
IC3207	AE009832	I5HJ9B15U0	REGULATOR VO=1.5V IO=800MA	S-1170B15UC-OTATFG
IC3605	75007789	IG1F090250	144PIN TQFP HDMI RECEIVER	SI19025CTU
IC3606	AE011981	S51Z01AE02	MEMORY DATA EEPROM 2K 12C	S-24CS02AFJ-TB-GE
△ IC3801	AE007825	I07F0C0WF0	1A REGULATOR	BA00BC0WFP-E2
△ IC3806	AE009719	I5HJ950UC0	REGULATOR VO=5.0V IO=800MA	S-1170B50UC-OJUTFG
IC4001	AE009720	ICQK06966A	VADDIS9 MPEG/MICON/DSP/RF-AMP	ZR36966ELCG-D-G
IC4005	AE008324	IF9J0164AG	1M*16*4BANK(64M) 143MHZ SDRAM	M12L64164A-7TG
IC4007	AE016515	S51Z01AF01	MEMORY DATA NOR FLASH 16M B00T	SST39VF1601-70-4C-EKE
IC4201	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC4205	AE004651	I0QF025840	A/V SW 2INPUT 1OUTPUT	NJM2584AM(Te1)
IC4302	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC4303	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC5801	75007776	I0CJ040530	ANALOG SW 3IN-2OUT	SN74LV4053APWR
IC6101	75007784	I5PK003620	DVB-T SINGLE CHIP RECEIVER	STV0362
△ IC6401	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
△ IC6402	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
ICS				
△ IC6403	AE016545	I5HJ9B34U0	REGULATOR VO=3.4V IO=800MA	S-1170B34UC-OTTTFG
△ IC6404	AE016545	I5HJ9B34U0	REGULATOR VO=3.4V IO=800MA	S-1170B34UC-OTTTFG
△ IC6405	AE016546	I5HJ9B26U0	REGULATOR VO=2.6V IO=800MA	S-1170B26UC-OTLTFG
IC6406	AE002504	IQQF0580V0	AUDIO OPERATION AMP	NJM4580V(TE1)
△ IC6407	AE008431	I07F078200	VARIABLE REG LOW INPUT IO=1A	BD7820FP-E2
IC6500	AE008921	I5CJ031570	A/V SW 2INPUT 1OUTPUT	SN74LVC1G3157DCKR
IC6501	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC6502	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC6503	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC6504	AE011796	I0UF015010	A/V SW 2INPUT 1OUTPUT	MM1501XNRE
IC7001	AE009512	I07F098820	19WLCD INVERTER IC	BD9882FV-E2
IC7002	AE009513	IOCF0902D0	QUAND OPERATIONNAL AMPLIFILE	LM2902DR
IC7200	AE009831	I56K066550	SCALER IC	R8A66655FP
IC8501	AE009365	IQQF045650	DUAL OPEAMP	NJM4565M(TE1)
△ IC8502	AE009805	I1YF9117A0	VO=ADJ IO=1A TAPING	LD1117AL-ADJ-AA3-A-R
TRANSISTORS				
Q101	AE009515	T27T030190	FET	2SK3019_TL
Q102	AE009515	T27T030190	FET	2SK3019_TL
Q301	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q302	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
△ Q501	AE009722	T41GK35320	FET	2SK3532-01MR
Q505	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q801	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q802	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1000	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1001	AE013032	TPAAB05001	COMPOUND TRANSISTOR	KRA102SRTK
Q1002	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1003	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q1004	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q1005	AE013031	TPAAA05001	COMPOUND TRANSISTOR	KRA101SRTK
Q1006	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q2301	AE008330	TAAA1505SY	TRANSISTOR SILICON	KTA1505S-Y-RTK/P
Q2302	AE008330	TAAA1505SY	TRANSISTOR SILICON	KTA1505S-Y-RTK/P
Q2401	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q3002	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3003	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3004	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
△ Q3200	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3201	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
△ Q3202	AE004665	TS3M000044	COMPOUND TRANSISTOR	CPH6312-TL-E
Q3203	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3204	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
△ Q3205	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3206	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3601	AE009515	T27T030190	FET	2SK3019_TL
Q3602	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3603	AE009515	T27T030190	FET	2SK3019_TL
Q3604	AE009515	T27T030190	FET	2SK3019_TL
Q3605	AE009515	T27T030190	FET	2SK3019_TL
Q3618	AE009515	T27T030190	FET	2SK3019_TL
△ Q3801	AE009514	TJ7T35P020	FET	RTQ035P02-TR
Q3802	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q3803	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q3804	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
△ Q3805	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
△ Q3806	AE009621	TL4A01664Y	TRANSISTOR SILICON	KTA1664-Y(GP)
Q3807	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q3808	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
△ Q3809	AE009514	TJ7T35P020	FET	RTQ035P02-TR
Q3810	AE009514	TJ7T35P020	FET	RTQ035P02-TR
Q4200	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4201	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q4205	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4210	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4214	AE012926	TAAA1504SY	TRANSISTOR SILICON	KTA1504S_Y_RTK
Q4217	AE013033	TPAAC05002	COMPOUND TRANSISTOR	KRA103SRTK
Q4218	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q4224	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4303	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4304	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4305	AE013032	TPAAB05001	COMPOUND TRANSISTOR	KRA102SRTK
Q4306	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4307	AE012951	TCAA3875SY	TRANSISTOR SILICON	KTC3875S_Y_RTK
Q4308	AE013032	TPAAB05001	COMPOUND TRANSISTOR	KRA102SRTK
Q4309	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q4310	AE013011	TNAAC05002	COMPOUND TRANSISTOR	KRC103SRTK
Q5801	AE009515	T27T030190	FET	2SK3019_TL
Q5802	AE009515	T27T030190	FET	2SK3019_TL
Q5805	AE013010	TNAAB05003	COMPOUND TRANSISTOR	KRC102SRTK
Q7003	AE009515	T27T030190	FET	2SK3019_TL
△ Q7004	AE009516	T250A06J30	FET	TK30A06J3(ORION.Q)

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
TRANSISTORS				
△ Q7005	AE009516	T250A06J30	FET	TK30A06J3(ORION.Q)
COILS & TRANSFORMERS				
△ L501	AE009366	029X000121	COIL,LINE FILTER	SS24H-K08240-CH
L504	AE016622	02167E4R7M	COIL	4.7 UH
L505	AE016623	021U0L100M	COIL	10 UH
L2401	AE008874	0216SD2R2J	COIL	2.2 UH
L2404	AE008874	0216SD2R2J	COIL	2.2 UH
L2406	AE008874	0216SD2R2J	COIL	2.2 UH
L3001	AE008874	0216SD2R2J	COIL	2.2 UH
L3002	AE008874	0216SD2R2J	COIL	2.2 UH
L3201	AE013322	02167E100K	COIL	10 UH
L3202	AE009723	0216MG220M	COIL	22 UH
L3601	AE009519	02D1000119	COIL CHOKE	EXC28CG900U
L3602	AE009519	02D1000119	COIL CHOKE	EXC28CG900U
L4204	AE013298	0216SD220J	COIL	22 UH
L4205	AE013298	0216SD220J	COIL	22 UH
L4206	AE013298	0216SD220J	COIL	22 UH
L4207	AE013298	0216SD220J	COIL	22 UH
L6101	AE008874	0216SD2R2J	COIL	2.2 UH
L6102	AE008874	0216SD2R2J	COIL	2.2 UH
L6103	AE008874	0216SD2R2J	COIL	2.2 UH
L6104	AE008874	0216SD2R2J	COIL	2.2 UH
L6401	AE008985	0216SD100J	COIL	10 UH
L6406	AE008874	0216SD2R2J	COIL	2.2 UH
L6408	AE007760	0216SD4R7J	COIL	4.7 UH
L6409	AE007760	0216SD4R7J	COIL	4.7 UH
L6410	AE007760	0216SD4R7J	COIL	4.7 UH
L7001	AE013322	02167E100K	COIL	10 UH
L8501	AE008874	0216SD2R2J	COIL	2.2 UH
L8502	AE006570	0216SD1R0J	COIL	1 UH
△ T501	AE009819	0481330224	TRANSFORMER,SWITCHING	81330224
△ T7001	AE009660	048135113G	TRANSFORMER,SWITCHING	8135113G
△ T7002	AE009660	048135113G	TRANSFORMER,SWITCHING	8135113G
JACKS				
△ J301	AE009522	060R131024	HEADPHONE JACK	PJ-364H
△ J501	AE009725	064Q1A0011	JACK,AC	CCT2302-0701C
J4206	AE009726	063D100067	SOCKET,21PIN	MRC-021H-02PC(Q87)
J4208	AE009522	060R131024	HEADPHONE JACK	PJ-364H
J4301	AE009524	060R401140	RCA JACK	RCA-101HT(OR)
J8101	AE009526	062R750007	PLUG	DIN-417HA-01
J8102	AE009527	060R411058	RCA JACK	RCA-341H(NI)-09
J8103	AE009528	060R431039	RCA JACK	RCA-228H(3)NI-02
J8104	AE009529	060R431040	RCA JACK	RCA-341H(2)NI-06
SWITCHES				
SW2201	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2202	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2203	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2204	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2205	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2206	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2207	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
SW2208	AE013551	0504101T34	SWITCH,TACT	EVQ21505R
P.C.BOARDS ASSEMBLIES				
PCB130	AE016676	A52A07C130L	DVD MT PCB ASS'Y	DMG097A
PCB240	AE016677	A52A07C240L	POWER PCB ASS'Y	CEG362A
PCB270	AE016678	A52A07C270L	OPERATION PCB ASS'Y	CEG363A
PCB290	AE016679	A52A07C290L	TUNER PCB ASS'Y	CEG367A
PCBDA0	AE016680	A52A07CDA0L	REMOCON PCB ASS'Y	CEG364A
PCBDH0	AE016681	A52A07CDH0L	DIGITAL PCB ASS'Y	CEG365A
PCBF40	AE016682	A52A07CF40L	MAIN PCB ASS'Y	CMG130A
MISCELLANEOUS				
B101	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B303	AE009535	024HC13914	CORE,BEADS	HCB3216KF-391T20
B307	AE009535	024HC13914	CORE,BEADS	HCB3216KF-391T20
B308	AE009535	024HC13914	CORE,BEADS	HCB3216KF-391T20
B501	AE013373	024HT03564	CORE,BEADS	W4BRH3.5X6X1.0
B801	AE013364	024AC5330J	CORE,BEADS	BLM18PG330SN1D
B802	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B803	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B804	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B805	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B806	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B807	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B808	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B809	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B810	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B811	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B812	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B813	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B818	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D
B819	AE007761	024AC5181J	CORE,BEADS	BLM18PG181SN1D

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description
MISCELLANEOUS			
B820	AE009773	024AC8102T	CORE,BEADS
B821	AE009773	024AC8102T	CORE,BEADS
B2305	AE008552	024NC51021	CORE,BEADS
B2401	AE008395	024HC56005	CORE,BEADS
B2402	AE008395	024HC56005	CORE,BEADS
B2403	AE008395	024HC56005	CORE,BEADS
B2404	AE008395	024HC56005	CORE,BEADS
B2405	AE008395	024HC56005	CORE,BEADS
B2406	AE008395	024HC56005	CORE,BEADS
B2407	AE008395	024HC56005	CORE,BEADS
B3001	AE008395	024HC56005	CORE,BEADS
B3002	AE008395	024HC56005	CORE,BEADS
B3201	AE007761	024AC5181J	CORE,BEADS
B3601	AE007761	024AC5181J	CORE,BEADS
B3602	AE007761	024AC5181J	CORE,BEADS
B3603	AE007761	024AC5181J	CORE,BEADS
B3604	AE007761	024AC5181J	CORE,BEADS
B3605	AE008395	024HC56005	CORE,BEADS
B3606	AE008609	024HC51023	CORE,BEADS
B3608	AE008609	024HC51023	CORE,BEADS
B3609	AE007761	024AC5181J	CORE,BEADS
B3610	AE007761	024AC5181J	CORE,BEADS
B3613	AE007761	024AC5181J	CORE,BEADS
B3802	AE007761	024AC5181J	CORE,BEADS
B3803	AE007761	024AC5181J	CORE,BEADS
B3804	AE007761	024AC5181J	CORE,BEADS
B3805	AE007761	024AC5181J	CORE,BEADS
B3807	AE007761	024AC5181J	CORE,BEADS
B3808	AE007761	024AC5181J	CORE,BEADS
B3809	AE007761	024AC5181J	CORE,BEADS
B3810	AE007761	024AC5181J	CORE,BEADS
B4001	AE008552	024NC51021	CORE,BEADS
B4002	AE008552	024NC51021	CORE,BEADS
B4003	AE008552	024NC51021	CORE,BEADS
B4005	AE008552	024NC51021	CORE,BEADS
B4006	AE008552	024NC51021	CORE,BEADS
B4008	AE008552	024NC51021	CORE,BEADS
B4010	AE008552	024NC51021	CORE,BEADS
B4015	AE008552	024NC51021	CORE,BEADS
B4016	AE008552	024NC51021	CORE,BEADS
B4202	AE008395	024HC56005	CORE,BEADS
B4203	AE008879	024HC56013	CORE,BEADS
B4204	AE007761	024AC5181J	CORE,BEADS
B4205	AE007761	024AC5181J	CORE,BEADS
B4206	AE007761	024AC5181J	CORE,BEADS
B4228	AE008395	024HC56005	CORE,BEADS
B4303	AE008395	024HC56005	CORE,BEADS
B4304	AE008395	024HC56005	CORE,BEADS
B4305	AE008395	024HC56005	CORE,BEADS
B4308	AE007761	024AC5181J	CORE,BEADS
B4312	AE008609	024HC51023	CORE,BEADS
B4317	AE007761	024AC5181J	CORE,BEADS
B4322	AE008609	024HC51023	CORE,BEADS
B5802	AE008879	024HC56013	CORE,BEADS
B5803	AE013364	024AC5330J	CORE,BEADS
B6101	AE008395	024HC56005	CORE,BEADS
B6102	AE008395	024HC56005	CORE,BEADS
B6103	AE008395	024HC56005	CORE,BEADS
B6401	AE008609	024HC51023	CORE,BEADS
B6402	AE008609	024HC51023	CORE,BEADS
B6404	AE008609	024HC51023	CORE,BEADS
B6405	AE008609	024HC51023	CORE,BEADS
B6406	AE008609	024HC51023	CORE,BEADS
B6407	AE008609	024HC51023	CORE,BEADS
B6408	AE008609	024HC51023	CORE,BEADS
B6409	AE008609	024HC51023	CORE,BEADS
B6410	AE008609	024HC51023	CORE,BEADS
B6411	AE008609	024HC51023	CORE,BEADS
B6501	AE008609	024HC51023	CORE,BEADS
B6502	AE007761	024AC5181J	CORE,BEADS
B6503	AE008609	024HC51023	CORE,BEADS
B6504	AE007761	024AC5181J	CORE,BEADS
B7200	AE007761	024AC5181J	CORE,BEADS
B7201	AE007761	024AC5181J	CORE,BEADS
B7202	AE008610	024HC51513	CORE,BEADS
B7203	AE008610	024HC51513	CORE,BEADS
B7204	AE008610	024HC51513	CORE,BEADS
B7205	AE008610	024HC51513	CORE,BEADS
B8501	AE008394	024BC5121J	CORE,BEADS
B8502	AE008552	024NC51021	CORE,BEADS
B8503	AE008394	024BC5121J	CORE,BEADS

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
MISCELLANEOUS				
B8504	AE008552	024NC51021	CORE,BEADS	EBMS160808A102_RDC45
BT001	AE016522	141L004019	BATTERY,MANGAN	R03 (AB) 2P TG AO DB
BT002	AE016522	141L004019	BATTERY,MANGAN	R03 (AB) 2P TG AO DB
CD301	AE009666	06E8142403	CORD CONNECTOR	E8142403
△ CD501	AE016636	120Q135803	CORD AC	P318-0161-1
CP101	AE009735	06GG270029	CONNECTOR PCB SIDE	A2001WV-7A
CP501	AE008882	06977NM020	CONNECTOR PCB SIDE	127301123K2
CP503	AE013859	069D01001A	CONNECTOR PCB SIDE	003P-2100
CP801	AE013951	069S280629	CONNECTOR PCB SIDE	A2001WV2-8P
CP802	AE009736	06GG260029	CONNECTOR PCB SIDE	A2001WV-6A
CD3805	AE006481	06CPL02011	CABLE,PAL	TD-OR0157F
CD4301	AE009541	06CH231204	CORD CONNECTOR	CH231204
CD4302	AE016624	06E8251301	CORD CONNECTOR	E8251301
CD6501	AE009704	06E82M1102	CORD CONNECTOR	E82M1102
CD7005	AE009849	06E82E1303	CORD CONNECTOR	E82E1303
CD7006	AE009849	06E82E1303	CORD CONNECTOR	E82E1303
CD7204	AE009821	06EA2U2505	CORD CONNECTOR	EA2U2505
CP2201	AE013944	069S230639	CONNECTOR PCB SIDE	A2001WR2-3P
CP2301	AE008156	069KYOT159	CONNECTOR PCB SIDE	LD07T2-24ND-03
CP2302	AE009544	069EV5T060	CONNECTOR PCB SIDE	04_6232_105_015_800+
CP2303	AE009545	069EV6T060	CONNECTOR PCB SIDE	04_6232_106_015_800+
CP2401	AE016557	069S2A0739	CONNECTOR PCB SIDE	A2006WV0-2X5P
CP2402	AE009743	06GG250029	CONNECTOR PCB SIDE	A2001WV-5A
CP3001	AE016558	0636800007	HOLDER,IC	A01K1B108007P00
CP3601	AE009550	06GDYL3038	CONNECTOR PCB SIDE	1A0300030
CP3801	AE008886	06CK7N0301	CORD CONNECTOR	TWG-P23P-A1
CP4300	AE008886	06CK7N0301	CORD CONNECTOR	TWG-P23P-A1
CP4302	AE009551	06G7S21501	CONNECTOR PCB SIDE	WD-00021-R
CP5801	AE016559	06972U3010	CONNECTOR PCB SIDE	TKC-W30P-U1 BLK ST
CP5802	AE009741	06GF2G0020	CONNECTOR PCB SIDE	WD-00028-R
CP5803	AE009742	06GF2G0010	CONNECTOR PCB SIDE	WD-00027-R
CP6401	75007827	06972UT018	CONNECTOR PCB SIDE	125622330K3
CP6501	AE009549	069S2M0079	CONNECTOR PCB SIDE	A2006WV0-2X11P
CP7200	AE009548	069S2U0739	CONNECTOR PCB SIDE	A2006WV0-2X15P
CP7601	AE013948	069S250639	CONNECTOR PCB SIDE	A2001WR2-5P
CP8101	AE008882	06977NM020	CONNECTOR PCB SIDE	127301123K2
△ CP8501	AE009553	06GG2E0019	CONNECTOR PCB SIDE	A2001WR-14A
CP8502	AE013951	069S280629	CONNECTOR PCB SIDE	A2001WV2-8P
CUS151	AE016076	800WFAA006	CUSHION A	
EL2401	AE014351	124116281A	EYE LET	XRY16X28BD
△ F501	AE002112	080NT2R504	FUSE	50T025H
△ F7001	AE004626	083LA05007	FUSE	1206FA5A-T
FH501	AE002634	06710T0009	HOLDER,FUSE	EYF-52BCY
FH502	AE002634	06710T0009	HOLDER,FUSE	EYF-52BCY
NR2401	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2402	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2403	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2404	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2405	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2406	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2407	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2420	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2421	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR2422	AE016560	11074560M7	R,NETWORK	CRA108560JV
NR3001	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3002	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3003	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3004	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3005	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3006	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3007	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3008	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3009	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3010	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3011	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR3601	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR3602	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR3603	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR3604	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR3605	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR3606	AE016524	11074330M7	R,NETWORK	CRA108330JV
NR7204	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR7205	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR7206	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR7207	AE009557	11074470M7	R,NETWORK	CRA108470JV
NR7208	AE009822	110P4103M5	R,NETWORK	4D02WGJ0103TCE
NR7209	AE009822	110P4103M5	R,NETWORK	4D02WGJ0103TCE
NR7210	AE009822	110P4103M5	R,NETWORK	4D02WGJ0103TCE
NR7211	AE009557	11074470M7	R,NETWORK	CRA108470JV
OS7601	AE008414	077A033001	REMOTE RECEIVER	ROM-V338TAO
SH501	AE009776	126D000045	TERMINAL PIN	YQ-12

ELECTRICAL REPLACEMENT PARTS LIST

Location No.	TSB P/N	Reference No.	Description	
MISCELLANEOUS				
△ SP301	AE009558	070Y433004	SPEAKER	S0308F01
△ SP302	AE009558	070Y433004	SPEAKER	S0308F01
SH8501	AE009776	126D000045	TERMINAL PIN	YQ-12
SH8502	AE009776	126D000045	TERMINAL PIN	YQ-12
SH8503	AE009776	126D000045	TERMINAL PIN	YQ-12
SH8504	AE009776	126D000045	TERMINAL PIN	YQ-12
△ TH501	AE009559	DSQDNE5R0L	THERMISTOR	5D2-08LCS
TM101	AE016637	076D0QJ021	TRANSMITTER	000-103000570
△ TU5801	75007843	0164Y03002	DIGITAL TUNER	TDTG-S156D
△ V7201	AE009667	09EA122001	LCD	T220SW01_VO
X101	AE009387	100GT01616	CRYSTAL	B16000E011
X801	AE009388	100DT02007	CRYSTAL	DSX840GA
X2401	AE008161	100GT02720	CRYSTAL	B27000C005
X3602	AE008624	100DT02801	CRYSTAL	SMD-49
X4001	AE009566	100GT02727	CRYSTAL	SMD-49 C27000J029
X6101	AE008161	100GT02720	CRYSTAL	B27000C005
X7200	AE009563	100GT02728	CRYSTAL	SMD-49 C27000B030

RESISTOR

RC..... CARBON RESISTOR

CAPACITORS

CC..... CERAMIC CAPACITOR
CE..... ALUMI ELECTROLYTIC CAPACITOR
CP..... POLYESTER CAPACITOR
CPP..... POLYPROPYLENE CAPACITOR
CPL..... PLASTIC CAPACITOR
CMP..... METAL POLYESTER CAPACITOR
CMPL..... METAL PLASTIC CAPACITOR
CMPP..... METAL POLYPROPYLENE CAPACITOR

TOSHIBA CORPORATION

1-1, SHIBAURA 1-CHOME, MINATO-KU, TOKYO 105-8001, JAPAN