


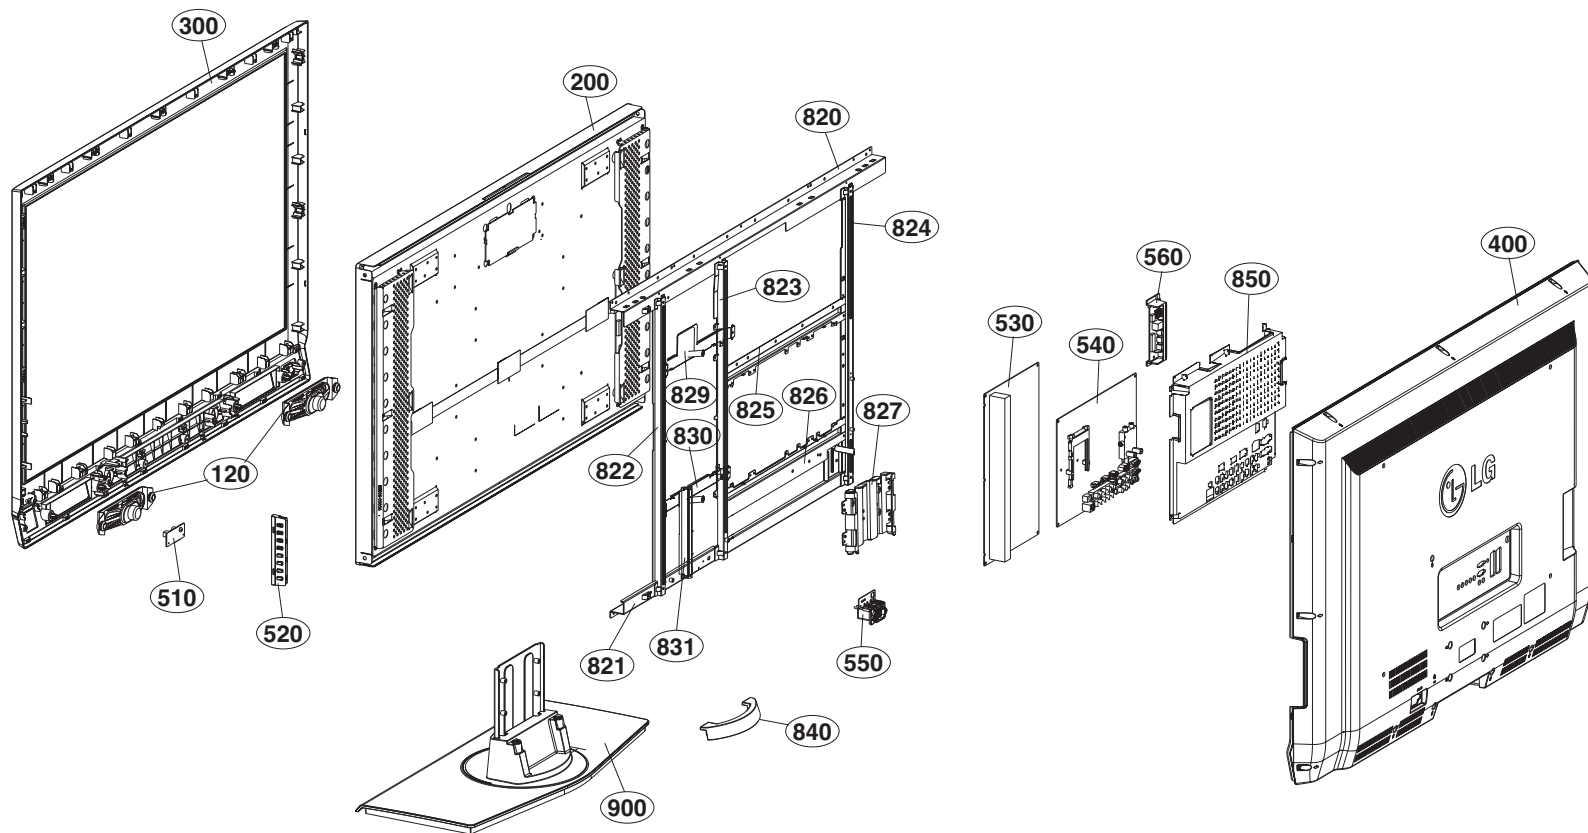

EXPLODED VIEW

EXPLODED VIEW PARTS LIST

No.	PART NO.	DESCRIPTION
	120	EAB33775101 Speaker,Full Range, EN1562C-6712 ND 10W 8OHM 82DB 100HZ 193.5 X 42 X 39.9 LUG KOREA TOPTONE
⚠	200	EAJ36548001 LCD,Module-TFT, LC370WX3-SLD1 WXGA 37INCH 1366X768 500CD COLOR 72% 16/9 900:1(DCR 5000:1) 6ms(GTG), Zero RT Pol. 10000K LG PHILIPS LCD
⚠	300	ABJ32533604 Cabinet Assembly, 37LC7D-ZA LD73A 37" C/SKD EUROPE, EUROPASS3
⚠	400	ACQ32333521 Cover Assembly, 37LC7D-ZA LD73A 37" BACK, C/SKD EUROPASS3 FOR WR LOCALIZATION
	510	EBR35734601 PCB Assembly,Sub, SUB T.T LD73A 42LC7D-ZA AEUVLHX IR/LED TOTAL
	520	EBR34778401 PCB Assembly,Sub, SUB T.T LD73A 37LC4D-ZN AEULLHX CONTROL TOTAL
⚠	530	EAY34796801 Power Supply Assembly, LGIT_37inch FREE Torando 37inch LCD LGIT LCD Tornado 37inch (Power+Inverter), PSU LG INNOTEK.,LTD.
	540	EBR37029603 PCB Assembly,Main, MAIN1 T.T LD73A 37LC7D-ZA SEUVLJG Separation-Tuner MAIN TOTAL
	550	EAM35501401 Filter,AC Line, IF3-N06CEWL1 5.3mH 250VAC 6A 0.22uF 1000pF UL/CSA/VDE/K HOUSING/RING BK DONG IL TECHNOLOGY LTD.
	560	EBR34778601 PCB Assembly,Sub, SUB T.T LD73A 37LC4D-ZN AEULLHX SIDE A/V TOTAL
	820	MGJ32901201 Plate, PRESS EGI 1.2 FRAME SBHG-A 37LY3 METAL BAR TOP
	821	MGJ32901302 Plate, PRESS EGI 1.6 FRAME SBHG-A 37LY3/37LC4 METAL BAR BOTTOM (NONE DVR)
	822	MGJ34306201 Plate, PRESS SBHG1-A 1.2 METAL SBHG-A 37" V668 metal left
	823	MGJ32901602 Plate, PRESS EGI 1.2 FRAME SBHG-A 37LY3 /37LC4 METAL BAR CENTER (V668)
	824	MGJ32901401 Plate, PRESS EGI 1.2 FRAME SBHG-A 37LY3 METAL BAR RIGHT
	825	MGJ32901704 Plate, PRESS EGI 1.2 FRAME SBHG-A 37LC4 METAL BAR SIDE TOP(EUROPASS3)
	826	MGJ32901804 Plate, PRESS EGI 1.2 FRAME SBHG-A 37LC4 METAL BAR SIDE BOTTOM (EUROPASS3)
	827	MGJ32901901 Plate, PRESS EGI 1.2 FRAME SBHG-A 37LY3 METAL BAR SUPPORTER
	829	MGJ34305401 Plate, PRESS SBHG1-A 1.2 METAL SBHG-A metal power top
	830	MGJ34305802 Plate, PRESS SBHG1-A 1.2 METAL SBHG-A 37LC4 metal power bottom(NONE DVR)
	831	MGJ34306001 Plate, PRESS SBHG1-A 1.2 METAL SBHG-A metal wall bracket
	840	MAZ32930601 Bracket, MOLD ABS COVER 37LC4 LA71A ABS CABLE MANAGEMENT
	850	MJH32521102 Supporter, PRESS EGI 0.5t GUIDE EGI METAL, REAR SHIELD (47LB5DF-ZA)
⚠	900	AAN33023904 Base Assembly, STAND 37LB4DS-UA LD73A XG569,STAND ASSY(NO PRINT),(C/SKD)

REPLACEMENT PARTS LIST

DATE: 2007. 04. 28.

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
ACCESSORY					
A1	MFL34441603	"Manual,Owners" PRINTING USER LD61C LG	C527	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
A2	MKJ32022813	Remote Controller COMPLEX LD73A 26LC4 EU	C528	0CE227WF6DC	"Capacitor,AL,Chip" MVK8.0TP16VC220M 220uF
A21	3550V00590A	Cover MOLD ABS BATTERY TN-5	C533	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
A3	6410TEW010A	Power Cord "CEE,LP-34A&H05VV-FX3C,"	C534	0CE227WF6DC	"Capacitor,AL,Chip" MVK8.0TP16VC220M 220uF
A4	341-746B	Holder MOLD ABS CABLE Holder	C541	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
A5	MES36332301	Indicator MOLD ABS LED&PRE AMP 4	C543	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
CAPACITORS			C548	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C101	0CE476VF6DC	"Capacitor,AL,Chip" VGV476M016S0ANE010 47u	C549	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C102	0CE106WFKDC	"Capacitor,AL,Chip" MVK4.0TP16VC10M 10uF 2	C611	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C102	0CE476VF6DC	"Capacitor,AL,Chip" VGV476M016S0ANE010 47u	C612	0CE476WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC47M 47uF 2
C103	0CE476VF6DC	"Capacitor,AL,Chip" VGV476M016S0ANE010 47u	C613	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C1068	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C630	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C110	0CE106WFKDC	"Capacitor,AL,Chip" MVK4.0TP16VC10M 10uF 2	C638	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C118	0CE106WFKDC	"Capacitor,AL,Chip" MVK4.0TP16VC10M 10uF 2	C639	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C1217	0CE106WH6DC	"Capacitor,AL,Chip" MVK5.0TP25VC10M 10uF 2	C640	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C1225	0CE106WH6DC	"Capacitor,AL,Chip" MVK5.0TP25VC10M 10uF 2	C701	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1232	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C705	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1236	0CE106WH6DC	"Capacitor,AL,Chip" MVK5.0TP25VC10M 10uF 2	C723	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1237	0CE106WH6DC	"Capacitor,AL,Chip" MVK5.0TP25VC10M 10uF 2	C727	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1247	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C736	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1309	0CE475WK6DC	"Capacitor,AL,Chip" MVK5.0TP50VC4.7M 4.7uF	C740	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1310	0CE475WK6DC	"Capacitor,AL,Chip" MVK5.0TP50VC4.7M 4.7uF	C743	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1313	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2	C758	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1319	0CE335WK6D8	"Capacitor,AL,Chip" MVK4.0TP50VC3.3M 3.3uF	C765	0CE476WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC47M 47uF 2
C1325	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2	C793	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1341	0CE335WK6D8	"Capacitor,AL,Chip" MVK4.0TP50VC3.3M 3.3uF	C796	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1343	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C797	0CE476WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC47M 47uF 2
C1344	0CE106WH6DC	"Capacitor,AL,Chip" MVK5.0TP25VC10M 10uF 2	C801	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1345	0CE106WH6DC	"Capacitor,AL,Chip" MVK5.0TP25VC10M 10uF 2	C803	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1350	0CE106WFKDC	"Capacitor,AL,Chip" MVK4.0TP16VC10M 10uF 2	C822	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2
C1400	0CE475WK6DC	"Capacitor,AL,Chip" MVK5.0TP50VC4.7M 4.7uF	C835	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C1401	0CE475WK6DC	"Capacitor,AL,Chip" MVK5.0TP50VC4.7M 4.7uF	C852	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C1407	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2	C853	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C1408	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C901	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C1410	0CE476WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC47M 47uF 2	C903	0CE476WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC47M 47uF 2
C1708	0CE226WF6DC	"Capacitor,AL,Chip" MVK5.0TP16VC22M 22uF 2	C907	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C181	0CE106WFKDC	"Capacitor,AL,Chip" MVK4.0TP16VC10M 10uF 2	C912	0CE476WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC47M 47uF 2
C226	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C915	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C227	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C924	0CE107WH6DC	"Capacitor,AL,Chip" MVK8.0TP25VC100M 100uF
C412	0CE106WFKDC	"Capacitor,AL,Chip" MVK4.0TP16VC10M 10uF 2	C925	0CE227WF6DC	"Capacitor,AL,Chip" MVK8.0TP16VC220M 220uF
C414	0CE106WFKDC	"Capacitor,AL,Chip" MVK4.0TP16VC10M 10uF 2	C928	0CE227WF6DC	"Capacitor,AL,Chip" MVK8.0TP16VC220M 220uF
C515	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C929	0CE227WF6DC	"Capacitor,AL,Chip" MVK8.0TP16VC220M 220uF
C517	0CE227WF6DC	"Capacitor,AL,Chip" MVK8.0TP16VC220M 220uF	C937	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C519	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C954	0CE477WF6DC	"Capacitor,AL,Chip" MVK10TP16VC470M 470uF
C522	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C957	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C523	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C958	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
C524	0CE477WF6DC	"Capacitor,AL,Chip" MVK10TP16VC470M 470uF	C959	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
			C969	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
			C970	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF
			C971	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C975	0CE107WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC100M 100uF	C121	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C981	0CE476WF6DC	"Capacitor,AL,Chip" MVK6.3TP16VC47M 47uF 2	C1210	0CC221CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H221JT 220pF
C1302	0CE108EH618	"Capacitor,AL,Radial" KMG5.0TP25VB1000M 1000	C1211	0CC331CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H331JT 330pF
C1	0CH3104K566	"Capacitor,Ceramic,Chip" 0805B104K500CT 100nF 1	C1215	0CC331CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H331JT 330pF
C100	0CC470CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H470JT 47pF 5	C1216	0CC331CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H331JT 330pF
C100	0CH5101K416	"Capacitor,Ceramic,Chip" C2012C0G1H101JT 100pF	C122	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C100	0CH5101K416	"Capacitor,Ceramic,Chip" C2012C0G1H101JT 100pF	C123	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1003	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	C1234	0CK102CK56A	"Capacitor,Ceramic,Chip" 0603B102K500CT 1nF 10%
C1004	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	C1235	0CK102CK56A	"Capacitor,Ceramic,Chip" 0603B102K500CT 1nF 10%
C1005	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	C1239	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C1006	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	C124	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1007	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C1244	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10
C1008	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C1246	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10
C1009	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C125	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C101	0CH5101K416	"Capacitor,Ceramic,Chip" C2012C0G1H101JT 100pF	C126	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C101	0CK103BH56A	"Capacitor,Ceramic,Chip" C1005X7R1E103KT- 10nF	C127	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1010	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C128	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C103	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C129	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C104	0CH5471K416	"Capacitor,Ceramic,Chip" C2012C0G1H471JT 470pF	C130	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C104	0CK105CD56A	"Capacitor,Ceramic,Chip" C1608X7R1A105KT 1uF 10	C1300	0CK105DH56A	"Capacitor,Ceramic,Chip" C2012X7R105KFT 1uF 10%
C105	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1301	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C106	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1303	0CK105DH56A	"Capacitor,Ceramic,Chip" C2012X7R105KFT 1uF 10%
C107	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1304	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C108	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1305	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C109	0CK105CD56A	"Capacitor,Ceramic,Chip" C1608X7R1A105KT 1uF 10	C1306	0CK222CK56A	"Capacitor,Ceramic,Chip" 0603B222K500CT 2.2nF 1
C1104	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	C1307	0CK682CK51A	"Capacitor,Ceramic,Chip" C1608Y5P1H682KT 6.8nF
C1105	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	C1308	0CK682CK51A	"Capacitor,Ceramic,Chip" C1608Y5P1H682KT 6.8nF
C1106	0CC120CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H120JT 12pF 5	C131	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1108	0CC120CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H120JT 12pF 5	C1311	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C111	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1312	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10
C1116	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C1314	0CC030CK01A	"Capacitor,Ceramic,Chip" 0603N3R0C500LT 3pF 0.2
C1119	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C1315	0CC030CK01A	"Capacitor,Ceramic,Chip" 0603N3R0C500LT 3pF 0.2
C112	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1316	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C1120	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C1317	0CC560CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H560JT 56pF 5
C1121	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C1318	0CC560CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H560JT 56pF 5
C1123	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C132	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1125	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C1320	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -
C1128	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C1321	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -
C113	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1322	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10
C1133	0CK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	C1326	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -
C1134	0CK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	C1327	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C1135	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C1329	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -
C1136	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C133	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C114	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1330	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10
C115	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1332	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -
C116	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1333	0CC101CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H101JT 100pF
C117	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1335	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -
C119	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1338	0CK471CK56A	"Capacitor,Ceramic,Chip" C1608X7R1H471KT 470pF
C120	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C134	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1204	0CC221CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H221JT 220pF	C1340	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10
C1205	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	C1342	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C1206	0CK102CK56A	"Capacitor,Ceramic,Chip" 0603B102K500CT 1nF 10%	C1346	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -
C1207	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	C1347	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -
C1208	0CK102CK56A	"Capacitor,Ceramic,Chip" 0603B102K500CT 1nF 10%	C135	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1209	0CC221CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H221JT 220pF	C1351	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C1352	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C1451	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1353	0CK222CK56A	"Capacitor,Ceramic,Chip" 0603B222K500CT 2.2nF 1	C1452	0CC150CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H150JT 15pF 5
C1354	0CC102CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H102JT 1nF 5%	C1453	0CC150CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H150JT 15pF 5
C1355	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C146	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1356	0CC101CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H101JT 100pF	C147	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1357	0CC221CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H221JT 220pF	C148	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1358	0CH2122K516	"Capacitor,Ceramic,Chip" 0805B122K500CT 1.2nF 1	C149	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1359	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C150	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C136	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C151	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1360	0CC331CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H331JT 330pF	C152	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1361	0CC331CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H331JT 330pF	C153	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1362	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C154	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1363	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C155	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1364	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C156	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1365	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C157	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1366	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C158	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1367	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C159	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1368	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C160	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1369	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C161	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C137	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C162	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1373	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	C163	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C138	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C164	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C139	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C165	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C140	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C166	EAE32755801	"Capacitor,Ceramic,Chip" CL31A106K5HNNNE 10uF 1
C1402	0CK682CK51A	"Capacitor,Ceramic,Chip" C1608Y5P1H682KT 6.8nF	C167	EAE32755801	"Capacitor,Ceramic,Chip" CL31A106K5HNNNE 10uF 1
C1403	0CK682CK51A	"Capacitor,Ceramic,Chip" C1608Y5P1H682KT 6.8nF	C168	EAE32755801	"Capacitor,Ceramic,Chip" CL31A106K5HNNNE 10uF 1
C1404	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	C169	0CC100CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H100JT 10pF 5
C1409	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C170	0CC220CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H220JT 22pF 5
C141	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1700	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C1411	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	C1701	0CK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1
C1412	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1702	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C1413	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1703	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C1418	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	C1704	0CK105CD56A	"Capacitor,Ceramic,Chip" C1608X7R1A105KT 1uF 10
C1419	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	C1705	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C142	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C1706	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C1420	0CK225DFK4A	"Capacitor,Ceramic,Chip" C2012Y5V1C225MT 2.2uF	C1707	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C1421	0CC820CK41A	"Capacitor,Ceramic,Chip" C1608C0G1H820JT 82pF 5	C1709	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C1422	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	C171	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10
C1423	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	C1710	0CK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1
C1426	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	C172	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10
C1428	0CK225DFK4A	"Capacitor,Ceramic,Chip" C2012Y5V1C225MT 2.2uF	C173	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1429	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	C174	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C143	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C175	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10
C1439	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	C176	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10
C144	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C177	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10
C1440	0CK225DFK4A	"Capacitor,Ceramic,Chip" C2012Y5V1C225MT 2.2uF	C178	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1441	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	C179	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1442	0CK225DFK4A	"Capacitor,Ceramic,Chip" C2012Y5V1C225MT 2.2uF	C180	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1444	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	C182	0CK105CD56A	"Capacitor,Ceramic,Chip" C1608X7R1A105KT 1uF 10
C1445	0CK225DFK4A	"Capacitor,Ceramic,Chip" C2012Y5V1C225MT 2.2uF	C183	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1447	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	C184	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1448	0CK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	C185	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1449	0CK225DFK4A	"Capacitor,Ceramic,Chip" C2012Y5V1C225MT 2.2uF	C186	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C145	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C187	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1
C1450	0CK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	C188	0CK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION		LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	
C189	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C314	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C190	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C409	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C191	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C410	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C192	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C411	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C193	0CK822CK46A	"Capacitor,Ceramic,Chip"	0603B822J500CT 8.2nF 1	C413	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C194	0CK822CK46A	"Capacitor,Ceramic,Chip"	0603B822J500CT 8.2nF 1	C415	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C195	0CC220CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H220JT 22pF 5	C429	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1
C196	0CC100CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H100JT 10pF 5	C430	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1
C197	0CK475CC94A	"Capacitor,Ceramic,Chip"	C1608Y5V0J475ZT 4.7uF	C516	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C198	0CK475CC94A	"Capacitor,Ceramic,Chip"	C1608Y5V0J475ZT 4.7uF	C518	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C199	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C520	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C200	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C521	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C201	0CC470CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H470JT 47pF 5	C525	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C202	0CC101CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H101JT 100pF	C526	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C203	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C529	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C204	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C530	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C206	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C531	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C207	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C532	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C209	EAE32755801	"Capacitor,Ceramic,Chip"	CL31A106K5HNNNE 10uF 1	C535	0CK105CD56A	"Capacitor,Ceramic,Chip"	C1608X7R1A105KT 1uF 10
C212	EAE32755801	"Capacitor,Ceramic,Chip"	CL31A106K5HNNNE 10uF 1	C537	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C213	EAE32755801	"Capacitor,Ceramic,Chip"	CL31A106K5HNNNE 10uF 1	C539	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C216	EAE32755801	"Capacitor,Ceramic,Chip"	CL31A106K5HNNNE 10uF 1	C540	0CK105CD56A	"Capacitor,Ceramic,Chip"	C1608X7R1A105KT 1uF 10
C218	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C542	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C219	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C544	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C220	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C550	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C221	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C551	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C222	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C553	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C224	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C554	0CK105CD56A	"Capacitor,Ceramic,Chip"	C1608X7R1A105KT 1uF 10
C228	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C555	0CK105CD56A	"Capacitor,Ceramic,Chip"	C1608X7R1A105KT 1uF 10
C229	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C601	0CC101CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H101JT 100pF
C230	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C602	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C231	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C603	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10
C232	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C604	0CC100CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H100JT 10pF 5
C233	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10	C605	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C234	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1	C606	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C235	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1	C608	0CC101CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H101JT 100pF
C236	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1	C609	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C237	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1	C610	0CC271CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H271JT 270pF
C238	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1	C615	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1
C239	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1	C616	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1
C240	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1	C623	0CC470CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H470JT 47pF 5
C241	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1	C624	0CC470CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H470JT 47pF 5
C242	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1	C625	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C243	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1	C626	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C301	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C627	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1
C302	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C633	0CK475CC94A	"Capacitor,Ceramic,Chip"	C1608Y5V0J475ZT 4.7uF
C303	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C635	0CK472CK56A	"Capacitor,Ceramic,Chip"	0603B472K500CT 4.7nF 1
C306	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C636	0CK103CK56A	"Capacitor,Ceramic,Chip"	0603B103K500CT 10nF 10
C307	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C637	0CK472CK56A	"Capacitor,Ceramic,Chip"	0603B472K500CT 4.7nF 1
C308	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C641	0CC470CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H470JT 47pF 5
C309	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C642	0CC470CK41A	"Capacitor,Ceramic,Chip"	C1608C0G1H470JT 47pF 5
C310	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C700	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1
C311	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C702	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1
C312	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C703	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1
C313	0CK104CF56A	"Capacitor,Ceramic,Chip"	0603B104K160CT 100nF 1	C704	0CK104CK56A	"Capacitor,Ceramic,Chip"	0603B104K500CT 100nF 1

[illegible]

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C857	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD100	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C859	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD101	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1
C860	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD102	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1
C861	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD103	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C862	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD104	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C863	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD1100	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1
C864	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD1101	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1
C865	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD1104	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C866	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD1105	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C867	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD1106	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C868	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD1107	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C869	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD1108	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C870	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD1109	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C875	OCK104BF56A	"Capacitor,Ceramic,Chip" C1005X7R104KET 100nF 1	ZD1112	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C900	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1113	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C905	OCK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	ZD1114	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C908	OCK104CF56A	"Capacitor,Ceramic,Chip" 0603B104K160CT 100nF 1	ZD1201	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1
C909	OCK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	ZD1202	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1
C910	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1203	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C911	OCK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	ZD1211	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1
C914	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1212	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1
C917	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1218	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C931	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1219	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C932	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1220	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C933	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1221	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C934	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1222	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C935	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1223	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C955	OCK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	ZD1224	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C956	OCK474CH94A	"Capacitor,Ceramic,Chip" 0603F474Z250CT 470nF -	ZD1226	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120
C960	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1228	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1
C961	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1229	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1
C962	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD101	0DZ510009AK	"Diode,Zener" GDZJ5.1B 5.1V 4.94TO5.
C972	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD102	0DZ510009AK	"Diode,Zener" GDZJ5.1B 5.1V 4.94TO5.
C973	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ZD1300	0DZRM00248A	"Diode,Zener" RLZ8.2B 8.2V 7.78TO8.1
C974	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	ICs		
C977	OCK104CK56A	"Capacitor,Ceramic,Chip" 0603B104K500CT 100nF 1	IC1004	EAN33595101	"IC,Analog Multiplexer" STHDMI002A 3.135TO3.46
C980	OCK103CK56A	"Capacitor,Ceramic,Chip" 0603B103K500CT 10nF 10	IC1400	0ISO206900A	"IC,Analog Switch" CXA2069Q 8.5TO9.5V - -
C1370	OCF4741L430	"Capacitor,Film,DIP" PCMT365 76474 470nF 5%	IC600	0IPRP00602A	"IC,Analog Switch" TPS2010ADR 2.7TO5.5V 8
C1371	OCF4741L430	"Capacitor,Film,DIP" PCMT365 76474 470nF 5%	IC1301	0ILNR00261C	"IC,Audio Amplifier" STA335BW 5TO26V 0 10%
DIODEs			IC102	0ISTLPH026A	"IC,CMOS" 74LVC14APW 1.2TO3.6V 0
D1000	ODD184009AA	Diode Assembly KDS184 KDS184 TP KEC -	IC1101	0IPH741400E	"IC,CMOS" 74HC14D 2TO6V 0.002mA
D1001	ODD184009AA	Diode Assembly KDS184 KDS184 TP KEC -	IC1104	0ITO741570C	"IC,CMOS" TC74LCX157FT 2TO3.6V 0
D906	ODD100009AM	"Diode,Rectifier" EU1ZV(1) 200V 2.5V 10U	IC1105	0IMCRFA018A	"IC,CMOS" NC7SB3157P6X_NL 1.65TO
D900	0DS226009AA	"Diode,Switching" KDS226 1.2V 85V 300MA	IC1106	0IMCRFA018A	"IC,CMOS" NC7SB3157P6X_NL 1.65TO
D902	0DS226009AA	"Diode,Switching" KDS226 1.2V 85V 300MA	IC300	0ISTLPH003B	"IC,CMOS" 74LVC541APW 1.2TO3.6V
D903	0DS226009AA	"Diode,Switching" KDS226 1.2V 85V 300MA	IC301	0IMCRFA013A	"IC,CMOS" 74LCX244MTC 2TO3.6V 0.
D904	0DS226009AA	"Diode,Switching" KDS226 1.2V 85V 300MA	IC302	0ISTLPH003B	"IC,CMOS" 74LVC541APW 1.2TO3.6V
D905	0DS226009AA	"Diode,Switching" KDS226 1.2V 85V 300MA	IC303	0IMCRFA013A	"IC,CMOS" 74LCX244MTC 2TO3.6V 0.
D100	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120	IC404	0ISTLPH026A	"IC,CMOS" 74LVC14APW 1.2TO3.6V 0
D101	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1	IC410	0ITO741570C	"IC,CMOS" TC74LCX157FT 2TO3.6V 0
D102	EAH33946001	"Diode,TVS" CDS3C05GTA 5.6V 6.4V 1	IC100	0IPRP00703B	"IC,Data Controller" STI5100GUC 3.3V 5u 27M
D103	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120	IC1002	0IMMRAL014D	"IC,EEPROM" AT24C02BN-10SU-1.8 2KB
D104	EAH33945901	"Diode,TVS" CDS3C30GTH 30V 50V 120	IC1003	0IMMRAL014D	"IC,EEPROM" AT24C02BN-10SU-1.8 2KB

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
IC103	0IMP242560A	"IC,EEPROM" 24LC256T-I/SM 256KBIT	L1310	6210TCE001S	"Filter,Bead" HU-1M2012-121 120OHM 2
IC1100	0IMMRAL014D	"IC,EEPROM" AT24C02BN-10SU-1.8 2KB	L1311	6210TCE001S	"Filter,Bead" HU-1M2012-121 120OHM 2
IC701	0IMP242560A	"IC,EEPROM" 24LC256T-I/SM 256KBIT	L1312	6210TCE001S	"Filter,Bead" HU-1M2012-121 120OHM 2
IC702	EAN34099701	"IC,EEPROM" M2404HEPROM 4KBIT 512	L1314	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC500	EAN36661101	"IC,LDO Voltage Regulator" MIC37100-1.8WS 2.25V ~	L1315	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC501	0IPMG00027A	"IC,LDO Voltage Regulator" SC156515M-1.8TR 2.2TO5	L1401	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC502	EAN36661201	"IC,LDO Voltage Regulator" MIC37100-2.5WS 2.78V ~	L1403	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC503	0IPMGKE030A	"IC,LDO Voltage Regulator" KIA78R05F 6TO12V 5V 8W	L1412	6210TCE001E	"Filter,Bead" HB-1M2012-800JT(H:1mm)
IC504	0IPMGKE031A	"IC,LDO Voltage Regulator" KIA78R33F 4TO10V 3.3V	L1413	6210TCE001E	"Filter,Bead" HB-1M2012-800JT(H:1mm)
IC505	0IPMGKE031A	"IC,LDO Voltage Regulator" KIA78R33F 4TO10V 3.3V	L400	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC507	0IPMGKE030A	"IC,LDO Voltage Regulator" KIA78R05F 6TO12V 5V 8W	L606	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC900	0IPMGFA061A	"IC,LDO Voltage Regulator" FAN1587AD33X 4.8TO10.3	L607	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC901	0IPMGFA061A	"IC,LDO Voltage Regulator" FAN1587AD33X 4.8TO10.3	L700	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC902	0IPMG00107A	"IC,LDO Voltage Regulator" AZ1117H-2.5TR/E1 15V 2	L701	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC903	0IPMG00027A	"IC,LDO Voltage Regulator" SC156515M-1.8TR 2.2TO5	L703	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC506	0ISTL00029A	"IC,OP Amplifier" MC33078DR2G +-5TO+-18V	L704	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC202	0IMMRIH038B	"IC,SDRAM" HYB25D(C)256160CE-5 25	L705	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC801	0IMMRIH038B	"IC,SDRAM" HYB25D(C)256160CE-5 25	L706	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC1300	0IMCRMN028C	"IC,Sound/Audio Processor" MSP4450K-QA-D6 7.6TO8.	L707	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC1102	0IPRP00009A	"IC,Tx/Rx" ICL3232CBNZ 3VTO5.5V -	L800	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC700	EAN33595901	"IC,Video Processors" FLI8548H-LF-BE 300MVTO	L801	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC200	0IPMG78391A	"IC,Voltage Regulator" SC2595STR 2.3TO5V 0 0W	L900	6210TCE001X	"Filter,Bead" HU-1H4532-121JT 120OHM
IC804	0IPMG78391A	"IC,Voltage Regulator" SC2595STR 2.3TO5V 0 0W	L907	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
IC904	EAN32662801	"IC,Voltage Regulator" KA7809ERTM 35V to 40V	L909	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
COILS & FILTERs & INDUCTORS			L911	6210TCE001X	"Filter,Bead" HU-1H4532-121JT 120OHM
L100	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L912	6210TCE001X	"Filter,Bead" HU-1H4532-121JT 120OHM
L101	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L913	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
L102	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L918	6210TCE001X	"Filter,Bead" HU-1H4532-121JT 120OHM
L103	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L919	6210TCE001X	"Filter,Bead" HU-1H4532-121JT 120OHM
L104	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L923	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
L105	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L925	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM
L106	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L1404	EAM37276902	"Filter,LCR" LCF20P101-TM LPF(EMI)
L108	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L1405	EAM37574201	"Filter,LCR" LC-2012-250JT LPF(EMI)
L1101	6210TCE001L	"Filter,Bead" HB-1T2012-102JT 1000OH	L1406	EAM37574201	"Filter,LCR" LC-2012-250JT LPF(EMI)
L1102	6210TCE001L	"Filter,Bead" HB-1T2012-102JT 1000OH	L1407	EAM37574201	"Filter,LCR" LC-2012-250JT LPF(EMI)
L1104	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L1408	EAM37276902	"Filter,LCR" LCF20P101-TM LPF(EMI)
L1105	6210TCE001P	"Filter,Bead" HB-1S2012-121JT(H:1mm)	L1409	EAM37276902	"Filter,LCR" LCF20P101-TM LPF(EMI)
L1106	6210TCE001P	"Filter,Bead" HB-1S2012-121JT(H:1mm)	L1410	EAM37574201	"Filter,LCR" LC-2012-250JT LPF(EMI)
L1107	6210TCE001P	"Filter,Bead" HB-1S2012-121JT(H:1mm)	L901	EAM37574201	"Filter,LCR" LC-2012-250JT LPF(EMI)
L1108	6210TCE001P	"Filter,Bead" HB-1S2012-121JT(H:1mm)	L902	EAM37574201	"Filter,LCR" LC-2012-250JT LPF(EMI)
L1109	6210TCE001P	"Filter,Bead" HB-1S2012-121JT(H:1mm)	L903	EAM37574201	"Filter,LCR" LC-2012-250JT LPF(EMI)
L1205	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L904	EAM37574201	"Filter,LCR" LC-2012-250JT LPF(EMI)
L1206	6210TCE001Z	"Filter,Bead" HH-1M2012-600JT 60OHM	L905	EAM37574201	"Filter,LCR" LC-2012-250JT LPF(EMI)
L1207	6210TCE001Z	"Filter,Bead" HH-1M2012-600JT 60OHM	L906	EAM37574201	"Filter,LCR" LC-2012-250JT LPF(EMI)
L1208	6210TCE001Z	"Filter,Bead" HH-1M2012-600JT 60OHM	L908	EAM37574201	"Filter,LCR" LC-2012-250JT LPF(EMI)
L1211	6210TCE001L	"Filter,Bead" HB-1T2012-102JT 1000OH	L100	0LC1032101A	"Inductor,Multilayer,Chip" FI-C3216-103KJT 10UH 1
L1212	6210TCE001L	"Filter,Bead" HB-1T2012-102JT 1000OH	L109	0LC1032101A	"Inductor,Multilayer,Chip" FI-C3216-103KJT 10UH 1
L1215	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L1209	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH
L1300	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L1210	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH
L1301	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L1213	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH
L1302	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L1214	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH
L1303	6210TCE001G	"Filter,Bead" HH-1M3216-501JT 500OHM	L1216	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH
L1309	6210TCE001S	"Filter,Bead" HU-1M2012-121 120OHM 2	L1217	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH
			L1218	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH
			L1219	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
L1220	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH
L1221	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH
L1222	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH
L604	0LC0233002A	"Inductor,Multilayer,Chip" FI-B2012-332KJT 3.3UH
L1304	0LCTO00019A	"Inductor,Wire Wound,Chip" D75C-646CY-220M=P3 22U
L1305	0LCTO00019A	"Inductor,Wire Wound,Chip" D75C-646CY-220M=P3 22U
L1306	0LCTO00019A	"Inductor,Wire Wound,Chip" D75C-646CY-220M=P3 22U
L1307	0LCTO00019A	"Inductor,Wire Wound,Chip" D75C-646CY-220M=P3 22U
L600	0LCTA00003A	"Inductor,Wire Wound,Chip" LEMC3225T6R8M 6.8UH 20
L601	0LCTA00003A	"Inductor,Wire Wound,Chip" LEMC3225T6R8M 6.8UH 20
L605	0LCTA00003A	"Inductor,Wire Wound,Chip" LEMC3225T6R8M 6.8UH 20

TRANSISTORS & FETs

IC803	EBK32753101	FET SI4925BDY P-CHANNEL MO
Q1001	0TR830009BA	FET BSS83 N-CHANNEL MOSFET
Q100	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q101	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1100	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1200	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1201	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1202	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1203	0TR102009AM	"TR,Bipolar" KRA102S PNP -30V 0V -5
Q1204	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1300	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1301	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1302	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1303	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1304	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1305	0TR102009AM	"TR,Bipolar" KRA102S PNP -30V 0V -5
Q1400	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1401	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1402	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q1403	0TR150400BA	"TR,Bipolar" 2SA1504S(ASY) PNP -5V
Q1404	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q400	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q401	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q402	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q500	0TR102009AM	"TR,Bipolar" KRA102S PNP -30V 0V -5
Q502	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q503	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q504	0TR150400BA	"TR,Bipolar" 2SA1504S(ASY) PNP -5V
Q602	0TR150400BA	"TR,Bipolar" 2SA1504S(ASY) PNP -5V
Q603	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q604	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q606	0TR150400BA	"TR,Bipolar" 2SA1504S(ASY) PNP -5V
Q607	0TR150400BA	"TR,Bipolar" 2SA1504S(ASY) PNP -5V
Q608	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q609	0TR150400BA	"TR,Bipolar" 2SA1504S(ASY) PNP -5V
Q800	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q900	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q901	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q902	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q903	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
Q904	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
Q905	0TR387500AA	"TR,Bipolar" 2SC3875S(ALY) NPN 5V 6
RESISTORS		
AR100	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR101	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR102	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR103	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR104	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR105	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR106	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR107	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR108	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR109	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR110	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR111	0RJ0472C687	"Resistor,Array" RCA86TRJ47R0 47OHM 5%
AR200	0RJ0222C687	"Resistor,Array" RCA86TRJ22R0 22OHM 5%
AR201	0RJ0222C687	"Resistor,Array" RCA86TRJ22R0 22OHM 5%
AR202	0RJ0222C687	"Resistor,Array" RCA86TRJ22R0 22OHM 5%
AR203	0RJ0222C687	"Resistor,Array" RCA86TRJ22R0 22OHM 5%
AR204	0RJ0222C687	"Resistor,Array" RCA86TRJ22R0 22OHM 5%
AR205	0RJ0222C687	"Resistor,Array" RCA86TRJ22R0 22OHM 5%
AR206	0RJ0222C687	"Resistor,Array" RCA86TRJ22R0 22OHM 5%
AR701	0RZZH033273	"Resistor,Array" MNR04M0ABJ330 33OHM 5%
AR702	0RZZH033273	"Resistor,Array" MNR04M0ABJ330 33OHM 5%
AR704	EBC32260501	"Resistor,Array" MNR04M0APJ000 0OHM 5%
AR706	0RZZH033273	"Resistor,Array" MNR04M0ABJ330 33OHM 5%
AR708	0RZZH033273	"Resistor,Array" MNR04M0ABJ330 33OHM 5%
AR711	EBC32260501	"Resistor,Array" MNR04M0APJ000 0OHM 5%
AR800	EBC32260405	"Resistor,Array" MNR04M0APJ680 68OHM 5%
AR805	EBC32260405	"Resistor,Array" MNR04M0APJ680 68OHM 5%
AR806	EBC32260405	"Resistor,Array" MNR04M0APJ680 68OHM 5%
AR807	EBC32260405	"Resistor,Array" MNR04M0APJ680 68OHM 5%
AR808	EBC32260405	"Resistor,Array" MNR04M0APJ680 68OHM 5%
AR809	EBC32260405	"Resistor,Array" MNR04M0APJ680 68OHM 5%
AR810	EBC32260405	"Resistor,Array" MNR04M0APJ680 68OHM 5%
R101	0RD9101Q609	"Resistor,Carbon Film" RDM94T1J9K10 9.1KOHM 5
R102	0RD3301Q609	"Resistor,Carbon Film" RDM94T1J3K30 3.3KOHM 5
R103	0RD1101Q609	"Resistor,Carbon Film" RDM94T1J1K10 1.1KOHM 5
R104	0RD1100Q609	"Resistor,Carbon Film" RDM94T1J110R 110OHM 5%
R105	0RD9101Q609	"Resistor,Carbon Film" RDM94T1J9K10 9.1KOHM 5
R106	0RD3301Q609	"Resistor,Carbon Film" RDM94T1J3K30 3.3KOHM 5
R107	0RD1101Q609	"Resistor,Carbon Film" RDM94T1J1K10 1.1KOHM 5
R108	0RD1100Q609	"Resistor,Carbon Film" RDM94T1J110R 110OHM 5%
R1363	0RD3301A609	"Resistor,Carbon Film" RDM92T1J3K30 3.3KOHM 5
R100	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R100	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R101	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R101	0RH0752D622	"Resistor,Chip" MCR10EZHJ750 75OHM 5%
R1016	0RJ0222D677	"Resistor,Chip" MCR03EZIPJ220 22OHM 5%
R1017	0RJ0222D677	"Resistor,Chip" MCR03EZIPJ220 22OHM 5%
R1018	0RJ6800D677	"Resistor,Chip" MCR03EZIPJ681 680OHM 5%
R1019	0RJ0222D677	"Resistor,Chip" MCR03EZIPJ220 22OHM 5%
R102	0RH1302D622	"Resistor,Chip" MCR10EZHJ133 13KOHM 5%
R102	0RH4700D622	"Resistor,Chip" MCR10EZHJ471 470OHM 5%

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R102	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R112	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R1020	0RJ6800D677	"Resistor,Chip" MCR03EZPJ681 680OHM 5%	R112	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R1021	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R1120	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R1022	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R1121	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%
R1023	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R1122	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R103	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R1123	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R103	0RH2203D622	"Resistor,Chip" MCR10EZHJ224 220KOHM 5	R1124	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%
R103	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R1125	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%
R1038	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1126	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%
R1039	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1127	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R104	0RH2002D622	"Resistor,Chip" MCR10EZHJ203 20KOHM 5%	R1128	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%
R104	0RH4700D622	"Resistor,Chip" MCR10EZHJ471 470OHM 5%	R1129	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1040	0RJ4702D677	"Resistor,Chip" MCR03EZPJ473 47KOHM 5%	R113	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R1041	0RJ4702D677	"Resistor,Chip" MCR03EZPJ473 47KOHM 5%	R1130	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1042	0RJ4702D677	"Resistor,Chip" MCR03EZPJ473 47KOHM 5%	R1131	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1043	0RJ4702D677	"Resistor,Chip" MCR03EZPJ473 47KOHM 5%	R1133	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1044	0RJ3301D677	"Resistor,Chip" MCR03EZPJ332 3.3KOHM 5	R1134	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1049	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1135	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%
R105	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R1136	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R105	0RH2203D622	"Resistor,Chip" MCR10EZHJ224 220KOHM 5	R1137	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R105	0RH2700D622	"Resistor,Chip" MCR10EZHJ271 270OHM 5%	R1139	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R105	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5	R114	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R1050	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1140	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1052	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1141	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1053	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1148	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1056	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R1150	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1057	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R1151	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1058	0RJ1003D677	"Resistor,Chip" MCR03EZPJ104 100KOHM 5	R1152	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1059	0RJ2702D677	"Resistor,Chip" MCR03EZPJ273 27KOHM 5%	R1157	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R106	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R1158	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R106	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R1161	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R106	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1162	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R1060	0RJ3302D677	"Resistor,Chip" MCR03EZPJ333 33KOHM 5%	R1164	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1061	0RJ3302D677	"Resistor,Chip" MCR03EZPJ333 33KOHM 5%	R1165	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1065	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1166	0RJ3301D677	"Resistor,Chip" MCR03EZPJ332 3.3KOHM 5
R107	0RH0752D622	"Resistor,Chip" MCR10EZHJ750 75OHM 5%	R1171	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R108	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R1185	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R109	0RH0752D622	"Resistor,Chip" MCR10EZHJ750 75OHM 5%	R1186	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R110	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R119	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R110	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R120	0RJ1802D677	"Resistor,Chip" MCR03EZPJ183 18KOHM 5%
R1101	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R1200	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%
R1102	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R1201	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1103	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R1202	0RJ0682D677	"Resistor,Chip" MCR03EZPJ680 68OHM 5%
R1104	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1203	0RJ4703D677	"Resistor,Chip" MCR03EZPJ474 470KOHM 5
R1107	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5	R1204	0RJ4702D677	"Resistor,Chip" MCR03EZPJ473 47KOHM 5%
R1108	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5	R1205	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5
R111	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R1207	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5
R111	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R1209	0RJ3002D677	"Resistor,Chip" MCR03EZPJ303 30KOHM 5%
R1113	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R121	0RJ1202D677	"Resistor,Chip" MCR03EZPJ123 12KOHM 5%
R1114	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5	R1210	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5
R1115	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1211	0RJ4703D677	"Resistor,Chip" MCR03EZPJ474 470KOHM 5
R1116	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5	R1212	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5
R1117	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1213	0RJ4703D677	"Resistor,Chip" MCR03EZPJ474 470KOHM 5
R1118	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R1214	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%
R1119	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R1215	0RJ1001D477	"Resistor,Chip" MCR03EZPF102 1KOHM 1%

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R1216	0RJ1001D477	"Resistor,Chip" MCR03EZPF102 1KOHM 1%	R1289	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R1219	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R129	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%
R122	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R1290	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R1220	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5	R1291	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R1221	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1292	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R1222	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1293	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R1223	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5	R1300	0RJ6202D677	"Resistor,Chip" MCR03EZPJ623 62KOHM 5%
R1224	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R1301	0RJ2402D677	"Resistor,Chip" MCR03EZPJ243 24KOHM 5%
R1225	0RJ1001D477	"Resistor,Chip" MCR03EZPF102 1KOHM 1%	R1302	0RJ4700D677	"Resistor,Chip" MCR03EZPJ471 470OHM 5%
R1226	0RJ1001D477	"Resistor,Chip" MCR03EZPF102 1KOHM 1%	R1303	0RJ1501D677	"Resistor,Chip" MCR03EZPJ152 1.5KOHM 5
R1227	0RJ2201D477	"Resistor,Chip" MCR03EZPF222 2.2KOHM 1	R1304	0RJ0432D677	"Resistor,Chip" MCR03EZPJ430 43OHM 5%
R1228	0RJ2201D477	"Resistor,Chip" MCR03EZPF222 2.2KOHM 1	R1305	0RJ0432D677	"Resistor,Chip" MCR03EZPJ430 43OHM 5%
R1229	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1307	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R123	0RJ0472C678	"Resistor,Chip" MCR01MZPJ470 47OHM 5%	R1308	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1230	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1309	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1231	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R131	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%
R1235	0RJ4703D677	"Resistor,Chip" MCR03EZPJ474 470KOHM 5	R1310	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1236	0RJ4703D677	"Resistor,Chip" MCR03EZPJ474 470KOHM 5	R1311	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1237	0RJ1001D477	"Resistor,Chip" MCR03EZPF102 1KOHM 1%	R1312	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1238	0RJ1001D477	"Resistor,Chip" MCR03EZPF102 1KOHM 1%	R1313	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1239	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1314	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R124	0RJ1200C678	"Resistor,Chip" MCR01MZPJ121 120OHM 5%	R1315	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%
R1240	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1316	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%
R1241	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1317	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R1242	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1318	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R1243	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1319	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1244	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1320	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1245	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1321	0RJ2001D677	"Resistor,Chip" MCR03EZPJ202 2KOHM 5%
R125	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R1322	0RJ2001D677	"Resistor,Chip" MCR03EZPJ202 2KOHM 5%
R1259	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R1323	0RJ4703D677	"Resistor,Chip" MCR03EZPJ474 470KOHM 5
R126	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R1324	0RJ4703D677	"Resistor,Chip" MCR03EZPJ474 470KOHM 5
R1260	0RJ2001D677	"Resistor,Chip" MCR03EZPJ202 2KOHM 5%	R1327	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1261	0RJ2001D677	"Resistor,Chip" MCR03EZPJ202 2KOHM 5%	R1328	0RJ2200D677	"Resistor,Chip" MCR03EZPJ221 220OHM 5%
R1262	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1329	0RJ0101D677	"Resistor,Chip" MCR03EZPJ1R0 1OHM 5% 1
R1263	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R133	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%
R1264	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1330	0RJ0101D677	"Resistor,Chip" MCR03EZPJ1R0 1OHM 5% 1
R1270	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R1331	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R1271	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R1332	0RJ2200D677	"Resistor,Chip" MCR03EZPJ221 220OHM 5%
R1273	0RJ3301D677	"Resistor,Chip" MCR03EZPJ332 3.3KOHM 5	R1333	0RJ2200D677	"Resistor,Chip" MCR03EZPJ221 220OHM 5%
R1274	0RJ0752D677	"Resistor,Chip" MCR03EZPJ750 75OHM 5%	R1334	0RJ2200D677	"Resistor,Chip" MCR03EZPJ221 220OHM 5%
R1275	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1338	0RJ3901D677	"Resistor,Chip" MCR03EZPJ392 3.9KOHM 5
R1276	0RJ3002D677	"Resistor,Chip" MCR03EZPJ303 30KOHM 5%	R134	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%
R1277	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5	R1345	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R1278	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5	R1346	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R1279	0RJ4702D677	"Resistor,Chip" MCR03EZPJ473 47KOHM 5%	R1347	0RJ0392D677	"Resistor,Chip" MCR03EZPJ390 39OHM 5%
R128	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R1348	0RJ0392D677	"Resistor,Chip" MCR03EZPJ390 39OHM 5%
R1280	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R1349	0RJ0392D677	"Resistor,Chip" MCR03EZPJ390 39OHM 5%
R1281	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R1350	0RJ0392D677	"Resistor,Chip" MCR03EZPJ390 39OHM 5%
R1282	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5	R1351	0RJ0122D677	"Resistor,Chip" MCR03EZPJ120 12OHM 5%
R1283	0RJ2203D677	"Resistor,Chip" MCR03EZPJ224 220KOHM 5	R1352	0RJ0122D677	"Resistor,Chip" MCR03EZPJ120 12OHM 5%
R1284	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R1353	0RJ0122D677	"Resistor,Chip" MCR03EZPJ120 12OHM 5%
R1285	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R1354	0RJ0122D677	"Resistor,Chip" MCR03EZPJ120 12OHM 5%
R1286	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R1355	0RJ0122D677	"Resistor,Chip" MCR03EZPJ120 12OHM 5%
R1287	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R1356	0RJ0122D677	"Resistor,Chip" MCR03EZPJ120 12OHM 5%
R1288	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R1357	0RJ0122D677	"Resistor,Chip" MCR03EZPJ120 12OHM 5%

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R1358	0RJ0122D677	"Resistor,Chip" MCR03EZPJ120 120OHM 5%	R1460	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R1359	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1461	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R136	0RJ0472C678	"Resistor,Chip" MCR01MZPJ470 470OHM 5%	R1462	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R1360	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1463	0RJ1003D677	"Resistor,Chip" MCR03EZPJ104 100KOHM 5
R1361	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1465	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R1362	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1466	0RJ1201C678	"Resistor,Chip" MCR01MZPJ122 1.2KOHM 5
R1364	0RJ7500D677	"Resistor,Chip" MCR03EZPJ751 750OHM 5%	R1467	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%
R1365	0RJ7500D677	"Resistor,Chip" MCR03EZPJ751 750OHM 5%	R1468	0RJ1201C678	"Resistor,Chip" MCR01MZPJ122 1.2KOHM 5
R1366	0RJ7500D677	"Resistor,Chip" MCR03EZPJ751 750OHM 5%	R1469	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R1367	0RJ0000G676	"Resistor,Chip" MCR18EZHJ00 0OHM 5% 1/	R147	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%
R137	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%	R1477	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R138	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R1478	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1
R139	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%	R148	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%
R140	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%	R149	0RJ2701D677	"Resistor,Chip" MCR03EZPJ272 2.7KOHM 5
R1400	0RJ1501D677	"Resistor,Chip" MCR03EZPJ152 1.5KOHM 5	R150	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%
R1401	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5	R151	0RJ0472C678	"Resistor,Chip" MCR01MZPJ470 470OHM 5%
R1402	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R152	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%
R1403	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R153	0RJ0472C678	"Resistor,Chip" MCR01MZPJ470 470OHM 5%
R1404	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R154	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R1405	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R155	0RJ3303D677	"Resistor,Chip" MCR03EZPJ334 330KOHM 5
R1406	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R157	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%
R1407	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1607	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1408	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R1608	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1409	0RJ1500D677	"Resistor,Chip" MCR03EZPJ151 150OHM 5%	R1609	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1410	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R162	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%
R1411	0RJ2200D677	"Resistor,Chip" MCR03EZPJ221 220OHM 5%	R163	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%
R1412	0RJ2200D677	"Resistor,Chip" MCR03EZPJ221 220OHM 5%	R164	0RJ1202D677	"Resistor,Chip" MCR03EZPJ123 12KOHM 5%
R1413	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R165	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R1414	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R166	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%
R1415	0RJ2200D677	"Resistor,Chip" MCR03EZPJ221 220OHM 5%	R167	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R1416	0RJ2200D677	"Resistor,Chip" MCR03EZPJ221 220OHM 5%	R168	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R1417	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R169	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1418	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R170	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R1419	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R1703	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R142	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%	R1704	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R1420	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R1706	0RJ0332C678	"Resistor,Chip" MCR01MZPJ330 330OHM 5%
R1421	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R1708	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 330OHM 5%
R1422	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R1709	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R1423	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R1710	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 220OHM 5%
R1429	0RJ1001C678	"Resistor,Chip" MCR01MZPJ102 1KOHM 5%	R1713	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R143	0RJ2701D677	"Resistor,Chip" MCR03EZPJ272 2.7KOHM 5	R1715	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1430	0RJ1201C678	"Resistor,Chip" MCR01MZPJ122 1.2KOHM 5	R1716	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R1431	0RJ1201C678	"Resistor,Chip" MCR01MZPJ122 1.2KOHM 5	R1717	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R1433	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%	R1718	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R1436	0RJ1201C678	"Resistor,Chip" MCR01MZPJ122 1.2KOHM 5	R1719	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 330OHM 5%
R1438	0RJ1201C678	"Resistor,Chip" MCR01MZPJ122 1.2KOHM 5	R1720	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R1439	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%	R1721	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R144	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%	R1722	0RJ2701D677	"Resistor,Chip" MCR03EZPJ272 2.7KOHM 5
R145	0RJ2701D677	"Resistor,Chip" MCR03EZPJ272 2.7KOHM 5	R1724	0RJ0332C678	"Resistor,Chip" MCR01MZPJ330 330OHM 5%
R1452	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R1726	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R1453	0RJ4703D677	"Resistor,Chip" MCR03EZPJ474 470KOHM 5	R1727	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 330OHM 5%
R1454	0RJ4703D677	"Resistor,Chip" MCR03EZPJ474 470KOHM 5	R1728	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 330OHM 5%
R1455	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5	R1729	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 330OHM 5%
R1456	0RJ1501D677	"Resistor,Chip" MCR03EZPJ152 1.5KOHM 5	R173	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 470OHM 5%
R146	0RJ2701D677	"Resistor,Chip" MCR03EZPJ272 2.7KOHM 5	R1730	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 330OHM 5%

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R1731	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R187	0RJ0472C678	"Resistor,Chip" MCR01MZPJ470 470HM 5%
R1732	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R188	0RJ0472D677	"Resistor,Chip" MCR03E郑J470 470HM 5%
R1733	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R189	0RJ0000G676	"Resistor,Chip" MCR18EZHJ00 00HM 5% 1/
R1734	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R192	0RJ4701D677	"Resistor,Chip" MCR03E郑PJ472 4.7KOHM 5
R1735	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R193	0RJ4701D677	"Resistor,Chip" MCR03E郑PJ472 4.7KOHM 5
R1736	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R195	0RJ4701D677	"Resistor,Chip" MCR03E郑PJ472 4.7KOHM 5
R1737	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R196	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1738	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R197	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1739	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R200	0RJ4701D677	"Resistor,Chip" MCR03E郑PJ472 4.7KOHM 5
R1740	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R201	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1741	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R202	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1742	0RJ0332D677	"Resistor,Chip" MCR03E郑J330 330HM 5%	R203	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1743	0RJ1000D477	"Resistor,Chip" MCR03E郑F101 100OHM 1%	R204	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1744	0RJ1500D477	"Resistor,Chip" MCR03E郑F151 150OHM 1%	R205	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1745	0RJ0222D677	"Resistor,Chip" MCR03E郑J220 220HM 5%	R206	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1747	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%	R207	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1748	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%	R208	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1749	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%	R209	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R175	0RJ1002D677	"Resistor,Chip" MCR03E郑PJ103 10KOHM 5%	R210	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1750	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 220HM 5%	R211	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1751	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 220HM 5%	R212	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1752	0RJ4701D677	"Resistor,Chip" MCR03E郑PJ472 4.7KOHM 5	R213	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1753	0RJ4701D677	"Resistor,Chip" MCR03E郑PJ472 4.7KOHM 5	R214	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1754	0RJ1201C678	"Resistor,Chip" MCR01MZPJ122 1.2KOHM 5	R215	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1758	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%	R216	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1759	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 220HM 5%	R217	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1760	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 220HM 5%	R218	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1761	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%	R219	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1762	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%	R220	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1763	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 220HM 5%	R221	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1764	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 220HM 5%	R222	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1765	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%	R223	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1766	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%	R224	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1767	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 220HM 5%	R225	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1768	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%	R226	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1769	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%	R227	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R177	0RJ0472C678	"Resistor,Chip" MCR01MZPJ470 470HM 5%	R228	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1770	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 220HM 5%	R229	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1771	0RJ0000D677	"Resistor,Chip" MCR03E郑PJ000 0OHM 5% 1	R230	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1773	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%	R231	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1774	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%	R232	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1775	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%	R233	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1776	0RJ4701D677	"Resistor,Chip" MCR03E郑PJ472 4.7KOHM 5	R234	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1777	0RJ2201C678	"Resistor,Chip" MCR01MZPJ222 2.2KOHM 5	R235	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1778	0RJ4701D677	"Resistor,Chip" MCR03E郑PJ472 4.7KOHM 5	R236	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R178	0RJ0472D677	"Resistor,Chip" MCR03E郑PJ470 470HM 5%	R237	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1780	0RJ4701D677	"Resistor,Chip" MCR03E郑PJ472 4.7KOHM 5	R238	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1784	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%	R239	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R1788	0RJ1002D677	"Resistor,Chip" MCR03E郑PJ103 10KOHM 5%	R241	0RJ1000D677	"Resistor,Chip" MCR03E郑PJ101 100OHM 5%
R179	0RJ0472C678	"Resistor,Chip" MCR01MZPJ470 470HM 5%	R242	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 220HM 5%
R180	0RJ0472C678	"Resistor,Chip" MCR01MZPJ470 470HM 5%	R243	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%
R183	0RJ3300D677	"Resistor,Chip" MCR03E郑PJ331 330OHM 5%	R244	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%
R184	0RJ3300D677	"Resistor,Chip" MCR03E郑PJ331 330OHM 5%	R245	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%
R185	0RJ0472C678	"Resistor,Chip" MCR01MZPJ470 470HM 5%	R246	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%
R186	0RJ0472C678	"Resistor,Chip" MCR01MZPJ470 470HM 5%	R247	0RJ0222D677	"Resistor,Chip" MCR03E郑PJ220 220HM 5%

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R248	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R528	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R249	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 22OHM 5%	R531	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R250	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 22OHM 5%	R534	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R251	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R536	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R255	0RJ4701D477	"Resistor,Chip" MCR03EZPF472 4.7KOHM 1	R537	0RJ1502D677	"Resistor,Chip" MCR03EZPJ153 15KOHM 5%
R256	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R539	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R257	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R540	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R258	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R541	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R259	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R543	0RJ1502D677	"Resistor,Chip" MCR03EZPJ153 15KOHM 5%
R260	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R544	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R301	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R547	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R302	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R548	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R303	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R550	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R304	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R554	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R305	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R555	0RJ2202D677	"Resistor,Chip" MCR03EZPJ223 22KOHM 5%
R306	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R556	0RJ4302D677	"Resistor,Chip" MCR03EZPJ433 43KOHM 5%
R309	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R557	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%
R310	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R558	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R311	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R600	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R312	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R603	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R313	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R604	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R314	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R605	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R315	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R606	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R316	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R607	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R319	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R608	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R320	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R609	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R321	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R610	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R322	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R611	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R323	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R612	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R324	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R613	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R325	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R624	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R326	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R625	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R329	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R626	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R403	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R627	0RJ1003D677	"Resistor,Chip" MCR03EZPJ104 100KOHM 5
R407	0RJ1202D677	"Resistor,Chip" MCR03EZPJ123 12KOHM 5%	R629	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R412	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R632	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%
R413	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R633	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%
R414	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R636	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R415	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R637	0RJ4700D677	"Resistor,Chip" MCR03EZPJ471 470OHM 5%
R416	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R639	0RJ0822D677	"Resistor,Chip" MCR03EZPJ820 82OHM 5%
R417	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R640	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R421	0RJ0472D677	"Resistor,Chip" MCR03EZPJ470 47OHM 5%	R642	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R422	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5	R644	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%
R437	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R646	0RJ2700D677	"Resistor,Chip" MCR03EZPJ271 270OHM 5%
R438	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R647	0RJ2200D677	"Resistor,Chip" MCR03EZPJ221 220OHM 5%
R439	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R648	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%
R441	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R649	0RJ1500D677	"Resistor,Chip" MCR03EZPJ151 150OHM 5%
R446	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R650	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R448	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R651	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R521	EBC32306001	"Resistor,Chip" MCR03EZPF5FX9100 910OHM	R652	0RJ2001D677	"Resistor,Chip" MCR03EZPJ202 2KOHM 5%
R522	0RJ9311D477	"Resistor,Chip" MCR03EZPF9311 9.31KOHM	R653	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R523	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	R654	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R524	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R655	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R526	0RJ2001D677	"Resistor,Chip" MCR03EZPJ202 2KOHM 5%	R657	0RJ0102D677	"Resistor,Chip" MCR03EZPJ100 10OHM 5%
R527	0RJ2001D677	"Resistor,Chip" MCR03EZPJ202 2KOHM 5%	R658	0RJ2201D677	"Resistor,Chip" MCR03EZPJ222 2.2KOHM 5

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R659	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R740	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%
R662	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R741	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R663	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R743	0RJ0000C678	"Resistor,Chip" MCR01MZPJ000 0OHM 5% 1
R664	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R744	0RJ0000C678	"Resistor,Chip" MCR01MZPJ000 0OHM 5% 1
R665	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R745	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R666	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R746	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R667	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R747	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R668	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R748	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R669	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R751	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%
R670	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R754	0RJ0562D677	"Resistor,Chip" MCR03EZPJ560 56OHM 5%
R671	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R755	0RJ1002C678	"Resistor,Chip" MCR01MZPJ103 10KOHM 5%
R672	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R756	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 22OHM 5%
R673	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R757	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R674	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R759	0RJ0562D677	"Resistor,Chip" MCR03EZPJ560 56OHM 5%
R675	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R762	0RJ1002C678	"Resistor,Chip" MCR01MZPJ103 10KOHM 5%
R676	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R764	0RJ0562D677	"Resistor,Chip" MCR03EZPJ560 56OHM 5%
R677	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R767	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R678	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R769	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%
R679	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R770	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R680	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R771	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 22OHM 5%
R681	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R772	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R682	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R775	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R684	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R777	0RJ0332C678	"Resistor,Chip" MCR01MZPJ330 33OHM 5%
R685	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R778	0RJ1002C678	"Resistor,Chip" MCR01MZPJ103 10KOHM 5%
R686	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R779	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R687	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R780	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R688	0RH0000D622	"Resistor,Chip" MCR10EZHJ000 0OHM 5% 1	R781	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R701	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R782	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%
R702	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	R783	0RJ1002C678	"Resistor,Chip" MCR01MZPJ103 10KOHM 5%
R703	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%	R784	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%
R704	0RJ0000C678	"Resistor,Chip" MCR01MZPJ000 0OHM 5% 1	R785	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R705	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%	R786	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R707	0RJ1002C678	"Resistor,Chip" MCR01MZPJ103 10KOHM 5%	R787	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%
R708	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 22OHM 5%	R788	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R709	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%	R790	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%
R710	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%	R791	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R711	0RJ1002C678	"Resistor,Chip" MCR01MZPJ103 10KOHM 5%	R792	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 22OHM 5%
R712	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R793	0RJ1002C678	"Resistor,Chip" MCR01MZPJ103 10KOHM 5%
R713	0RJ0332C678	"Resistor,Chip" MCR01MZPJ330 33OHM 5%	R794	0RJ1002C678	"Resistor,Chip" MCR01MZPJ103 10KOHM 5%
R717	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%	R795	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 22OHM 5%
R718	0RJ1000D677	"Resistor,Chip" MCR03EZPJ101 100OHM 5%	R796	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R720	0RJ1002C678	"Resistor,Chip" MCR01MZPJ103 10KOHM 5%	R797	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%
R722	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R799	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5
R723	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%	R800	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R724	0RJ0332D677	"Resistor,Chip" MCR03EZPJ330 33OHM 5%	R801	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R725	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%	R805	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%
R726	0RJ3900C678	"Resistor,Chip" MCR01MZP5J391 390OHM 5	R807	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R727	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%	R808	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R728	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R810	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%
R729	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5	R811	0RJ0222D677	"Resistor,Chip" MCR03EZPJ220 22OHM 5%
R733	0RJ0562D677	"Resistor,Chip" MCR03EZPJ560 56OHM 5%	R812	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R734	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%	R813	0RJ0222C678	"Resistor,Chip" MCR01MZPJ220 22OHM 5%
R735	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	R816	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1
R737	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5	R818	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%
R739	0RJ1000C678	"Resistor,Chip" MCR01MZPJ101 100OHM 5%	R821	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R822	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	J1	6612BBBHN4D	"Jack,Fiber Optic" TOTX177 3P TX 2.54MM A
R823	0RJ2700C678	"Resistor,Chip" MCR01MZPJ271 270OHM 5%	J1101	6612F00099A	"Jack,Phone" PEJ024-01 1P 4P STRAIG
R825	0RJ2700C678	"Resistor,Chip" MCR01MZPJ271 270OHM 5%	J1203	6612J10031B	"Jack,RCA" PPJ209-01 14.0MM 1RX3C
R826	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	J600	6612J10023A	"Jack,RCA" KCN-BT-0-0053 10.5MM/1
R827	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	J1200	6612M00010A	"Jack,Scart" PSC003-01 21P 21P/1C 3
R829	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	J1201	6612M00010A	"Jack,Scart" PSC003-01 21P 21P/1C 3
R843	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	D100	0DLLT0110AA	"LED,DIP" LTL-1BEHJ-1 ROUND 3MM
R851	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	IC100	6712000013A	Receiver Module TSOP4438SO1 4.5TO5.5V
R853	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	IC201	SAA30310941	"S/W,Firmware" 4.13 7A58 EUROPE FLASH
R854	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	IC802	SAA30310827	"S/W,Firmware" 5.01 40B4 EUROPE FLASH
R860	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	SW100	EBF32593901	"Switch,Tact" TMUE312GAB 1C1P 12VDC
R877	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	SW101	140-313B	"Switch,Tact" KPT-1115AM 1C1P 12VDC
R880	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	SW102	140-313B	"Switch,Tact" KPT-1115AM 1C1P 12VDC
R881	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	SW103	140-313B	"Switch,Tact" KPT-1115AM 1C1P 12VDC
R882	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	SW104	140-313B	"Switch,Tact" KPT-1115AM 1C1P 12VDC
R883	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	SW105	140-313B	"Switch,Tact" KPT-1115AM 1C1P 12VDC
R884	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	SW106	140-313B	"Switch,Tact" KPT-1115AM 1C1P 12VDC
R885	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	SW107	140-313B	"Switch,Tact" KPT-1115AM 1C1P 12VDC
R886	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	SW108	140-313B	"Switch,Tact" KPT-1115AM 1C1P 12VDC
R888	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	SW700	EBF32593901	"Switch,Tact" TMUE312GAB 1C1P 12VDC
R891	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	TU600	EBL32961502	"Tuner,Digital" TDFC-G106P DVB-T/PAL 1
R892	0RJ0682C678	"Resistor,Chip" MCR01MZPJ680 68OHM 5%	CONNECTOR		
R900	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	J1100	6630G70016A	"Connector,DSUB" A03-7071-094 D-SUB 15P
R901	0RJ1002D477	"Resistor,Chip" MCR03EZPF103 10KOHM 1%	J1102	6630G70017A	"Connector,DSUB" A02-0915-101 D-SUB 9P
R902	0RJ2002D477	"Resistor,Chip" MCR03EZPF203 20KOHM 1%	P100	6602T12005G	"Connector,Wafer" 12505WR-08A00 8P 1.25M
R910	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	P100	6602T20009C	"Connector,Wafer" SMAW200-04P 4P 2.00MM
R911	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	P101	6602T20009C	"Connector,Wafer" SMAW200-04P 4P 2.00MM
R913	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	P101	6602T20009N	"Connector,Wafer" SMAW200-14P 14P 2.00MM
R915	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	P1103	6602T12005G	"Connector,Wafer" 12505WR-08A00 8P 1.25M
R916	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	P1300	6602T25008B	"Connector,Wafer" SMW250-03P 3P 2.50MM 1
R917	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	P1301	6602T25008C	"Connector,Wafer" SMW250-04P 4P 2.50MM 1
R918	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	P1400	6602T20008N	"Connector,Wafer" SMW200-14P 14P 2.00MM
R919	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	P800	6630V90116A	"Connector,Wafer" FI-X30SSL-HF 30P 1.00M
R920	0RJ3302D677	"Resistor,Chip" MCR03EZPJ333 33KOHM 5%	P900	6602T25008M	"Connector,Wafer" SMW250-13P 13P 2.50MM
R923	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	P901	6602T25008J	"Connector,Wafer" SMW250-10P 10P 2.50MM
R924	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	C1	6630V90142A	"Connector,Wafer" TPH254-R-1419-6A 6P 2.
R925	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	C2	6631900012E	"Harness,Single" SMH250 SMH250 300mM 2.
R926	0RJ3302D677	"Resistor,Chip" MCR03EZPJ333 33KOHM 5%	C3	6631900018K	"Harness,Single" 3P(2.5MM) SMH250 TERMI
R927	0RJ4701D677	"Resistor,Chip" MCR03EZPJ472 4.7KOHM 5	C4	6631900019R	"Harness,Single" 4p spk(right) SMH250 T
R928	0RJ0000D677	"Resistor,Chip" MCR03EZPJ000 0OHM 5% 1	C5	6631T20033E	"Harness,Single" SMH200-14P SMH200-14P
R930	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	C6	6631T25020L	"Harness,Single" SMH250 SMH250 250mM 2.
R932	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	C7	EAD35683002	"Harness,Single" LVDS LPL STANDARD FI-X
R933	0RJ1001D677	"Resistor,Chip" MCR03EZPJ102 1KOHM 5%	C8	EAD35908101	"Harness,Single" 35001HS-02L 65002HS-03
R934	0RJ1002D677	"Resistor,Chip" MCR03EZPJ103 10KOHM 5%	C9	EAD35908302	"Harness,Single" High Power(UL PVC) 350
OTHERs			C10	EAD35982701	"Harness,Single" SMH200-4P SMH200-4P 20
X100	6212AC2002B	Crystal 9H03200164 32.768KHZ 2	C11	EAD35983001	"Harness,Single" 12507HS-04L SMH200 500
X101	6212AB2883A	Crystal HC-49SM 27.00000MHZ 27	C12	EAD35983201	"Harness,Single" 12505HS 12505HS 600MM
X1300	156-A02R	Crystal EUA18.4320F16E33L 18.4	C13	EAD36265201	"Harness,Single" 12505HS 12505HP 70MM 1
X700	6212AB2015J	Crystal HC-49SM 19.66080HZ 19.			
F1	6210VH0001A	"Filter,Ferrite Core" 6210VH0001A 50OHM 25MM			
J100	6612J10033A	"Jack,Complex" PMJ016-13 13P DIN/RCA			
J1000	6612B00015C	"Jack,DIN" DC1R019WDH. SOCKET 21P			
J1001	6612B00015C	"Jack,DIN" DC1R019WDH. SOCKET 21P			