

PARTS LIST

[DR-MV1BEK, DR-MV1BEU, DR-MV1SEF, DR-MV1SEK, DR-MV1SEU]

* SAFETY PRECAUTION

Parts identified by the $\triangle$ symbol are critical for safety. Replace only with specified part numbers.

* BEWARE OF BOGUS PARTS

Parts that do not meet specifications may cause trouble in regard to safety and performance. We recommend that genuine JVC parts be used.


* (x_) in a description column shows the number of the used part.

- Contents -

Exploded view of general assembly and parts list	3-2
DVD mechanism assembly and parts list	3-6
Electrical parts list	3-9
Packing materials and accessories parts list	3-27

Exploded view of general assembly and parts list

Block No.M1MM

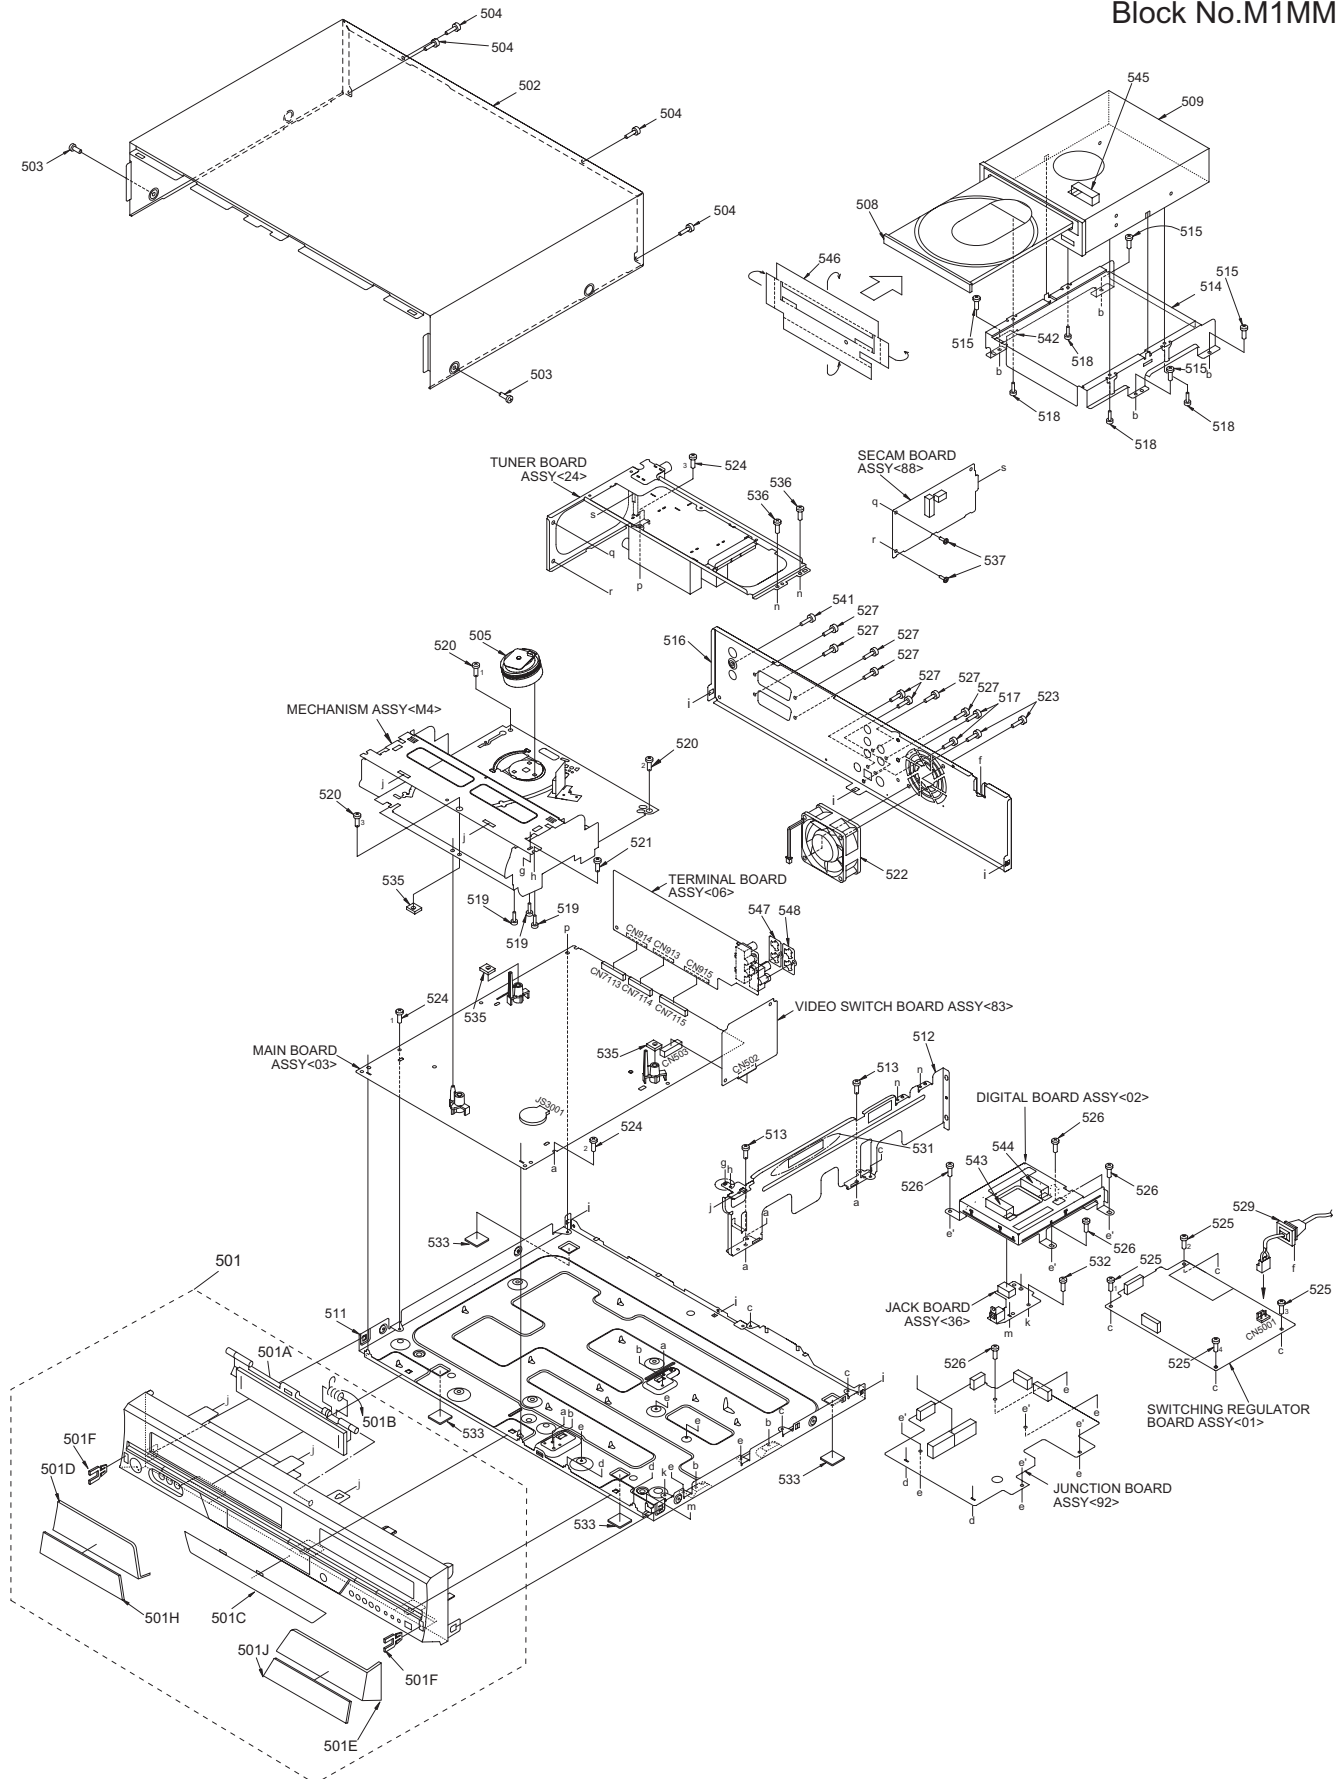

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

General assembly

Block No. [M][1][M][M]


△ Symbol No.	Part No.	Part Name	Description	Local
△ 501	LP10526-014A	FRONT PANEL ASSY		A
△ 501	LP10526-013A	FRONT PANEL ASSY		B
△ 501	LP10526-009B	FRONT PANEL ASSY		C
△ 501	LP10526-008B	FRONT PANEL ASSY		D
△ 501	LP10526-007B	FRONT PANEL ASSY		E
501A	LP21232-006A	CASSETTE DOOR		A,B
501A	LP21232-001A	CASSETTE DOOR		C,D,E
501B	PQ46448	TORSION SPRING		
501C	LP31358-007A	DISPLAY WINDOW		A,B
501C	LP31358-005A	DISPLAY WINDOW		C,D,E
501D	LP31353-003A	DOOR(L)		A,B
501D	LP31353-001A	DOOR(L)		C,D,E
501E	LP31354-003A	DOOR(R)		A,B
501E	LP31354-001A	DOOR(R)		C,D,E
501F	PU60109	CATCHER	(x2)	
501H	LP31356-014A	WINDOW(L)		A
501H	LP31356-013A	WINDOW(L)		B
501H	LP31356-009A	WINDOW(L)		C
501H	LP31356-008A	WINDOW(L)		D
501H	LP31356-007A	WINDOW(L)		E
501J	LP31357-012A	WINDOW(R)		A
501J	LP31357-011A	WINDOW(R)		B
501J	LP31357-007A	WINDOW(R)		D
501J	LP31357-006A	WINDOW(R)		C,E
△ 502	LP10460-008B	TOP COVER		A,B
△ 502	LP10460-004C	TOP COVER		D
△ 502	LP10460-004C	TOP COVER		C,E
503	QYSBSG3006MA	TAP SCREW	M3 x 6mm TOP SIDE(x2)	A,B
503	QYSBSG3006NA	TAP SCREW	M3 x 6mm TOP SIDE(x2)	C,D,E
504	QYSBSG3006MA	TAP SCREW	M3 x 6mm TOP REAR(x4)	A,B
504	QYSBSG3006NA	TAP SCREW	M3 x 6mm TOP REAR(x4)	C,D,E
505	PDV2541A	DRUM FINAL ASSY		C
505	PDV2539A	DRUM FINAL ASSY		A,B,D,E
506	QYTDSF2608ZA	TAP SCREW	M2.6 x 8mm SWITCH/DISPLAY(x5)	
507	QYTDSF2608ZA	TAP SCREW	M2.6 x 8mm OPERATION/JACK(x4)	
508	LP31372-002A	FITTING(DVD) ASSY		
△ 509	QAL0551-002	DRIVE UNIT		A,B
△ 509	QAL0551-001	DRIVE UNIT		C,D,E
△ 511	LP10525-001D	BOTTOM CHASSIS		
512	LP21222-001B	BRACKET(CENTER)		
513	LP31391-001A	SPECIAL SCREW	BRACKET(CENTER)(x2)	
514	LP21223-001A	BRACKET(DRIVE UNIT)		
515	LP31391-001A	SPECIAL SCREW	BRACKET(DVD)(x4)	
△ 516	LP21134-014B	REAR COVER		
517	QYSBSG3006NA	TAP SCREW	M3 x 6mm REAR COVER(x2)	
518	QYT DST3006ZA	TAP SCREW	M3 x 6mm DRIVE(x4)	
519	QYSPSPD3008ZA	SCREW	M3 x 8mm DRUM(x3)	
520	LP31391-002A	SPECIAL SCREW	MECHANISM(x3)	
521	LP31391-001A	SPECIAL SCREW	HOUSING	
522	QAR0310-001	FAN MOTOR		
523	QYTDSF3008MA	TAP SCREW	M3 x 8mm FAN(x2)	
524	LP31391-001A	SPECIAL SCREW	MAIN(x3)	
525	LP31391-001A	SPECIAL SCREW	SWITCHING REGULATOR(x4)	
526	LP31391-001A	SPECIAL SCREW	JUNCTION(x5)	
527	QYTDSF3008MA	TAP SCREW	M3 x 8mm JACK COVER(x8)	
△ 529	QMP51K0-170-K	POWER CORD	1.7m BLACK	A,D
△ 529	QMP4A10-170-K	POWER CORD	1.7m BLACK	B,C,E
531	LP31390-001A	BARCODE LABEL		
532	LP31391-001A	SPECIAL SCREW	JACK	
533	LP31348-001A	FOOT	(x4)	
535	LP41140-001A	INSULATOR	(x3)	
536	LP31391-001A	SPECIAL SCREW	TUNER BRACKET(x2)	
537	LP31391-001A	SPECIAL SCREW	SECAM(x2)	C
538	QGZ0018A1-40	CONNECTOR	(1-40)	
541	QYT DST3005MA	TAP SCREW	M3 x 5mm TUNER	
542	LP30002-0F6A	SPACER	DVD BRACKET	
543	LP41171-001A	SHIELD TIGHT		
544	LP41171-001A	SHIELD TIGHT		
545	LP41171-001A	SHIELD TIGHT		
546	LP31417-001A	SHIELD PLATE		
547	LP31345-001A	EARTH PLATE		
548	LP31345-001A	EARTH PLATE		
WR 1	QUQ112-0918CG	FFC WIRE	JUNCTION CN7107-MAIN CN 7111	
WR 2	QUQ212-0430CG	FFC WIRE	VIDEO SWITCH CN501-JUNCTION CN7104	
WR 3	QUQ112-1308CG	FFC WIRE	OPERATION/JACK CN7201-MAIN CN7112	
WR 4	WJT0151-001A	E-CARD WIRE	SWITCH/DISPLAY CN7001-MAIN CN3102	
WR 5	QUQ212-0410CG	FFC WIRE	SWITCH/DISPLAY CN7002-JUNCTION CN7103	
WR 6	QUQ105-4020AF	FFC WIRE	DRIVE UNIT-DIGITAL CN2201	
WR 7	QJJ032-040804	SIN CR C-C WIRE	SWITCHING REGULATOR CN5303-DRIVE UNIT	

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local
WR 8	QUQ210-0406CC	FFC WIRE	JUNCTION CN7105-DIGITAL CN1404	
WR 9	QUQ112-1420CG	FFC WIRE	TUNER CN6001-MAIN CN7116	
WR10	QUQ112-1315CG	FFC WIRE	TUNER CN6002-MAIN CN7117	
WR11	QUQ112-0716CG	FFC WIRE	TUNER CN6003-MAIN CN7118	
WR12	QUQ112-1524CG	FFC WIRE	SECAM CN301-MAIN CN7119	C
WR13	QUQ112-0628CG	FFC WIRE	VIDEO SWITCH CN504-SECAM CN4302	C

VHS mechanism assembly and parts list

Block No.M2MM

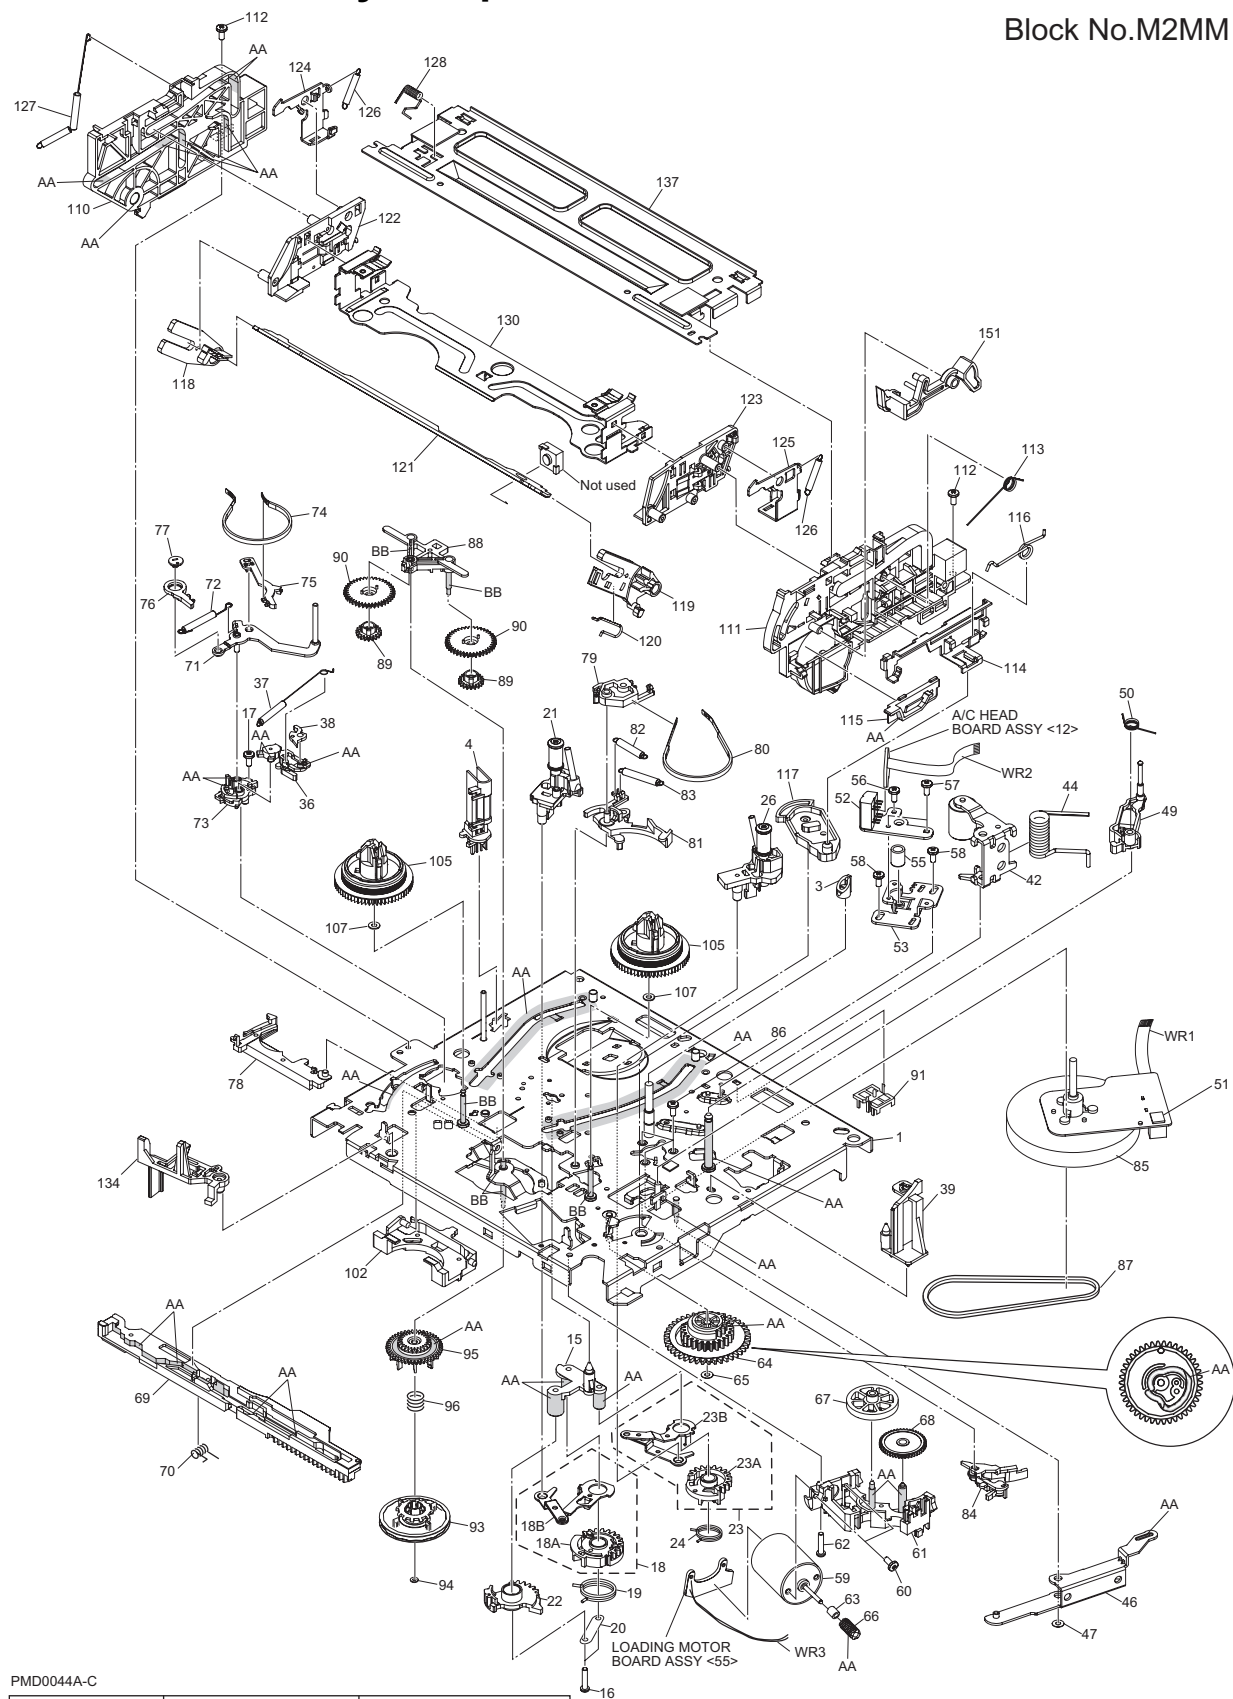

PMD0044A-C		
Classification	Part No.	Symbol in drawing
Grease	KYODO-SH-JB	AA
Oil	COSMO-HV56	BB

NOTE:The section marked in AA and BB indicate lubrication and greasing areas.

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

VHS mechanism

Block No. [M][2][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
1	LP21039-003A	MAIN DECK ASSY		
3	LP40097-002E	GUIDE POLE CAP		
4	NAH0004-001	FULL ERASE HEAD		
15	LP30958-001B	LOADING GEAR BASE		
16	QYTPST2620ZA	TAP SCREW	M2.6 x 20mm(x2)	
17	QYTDST2606ZA	TAP SCREW	M2.6 x 6mm	
18	LP40798-002A	LOADING GEAR(SUPPLY) ASSY		
18A	LP21040-001A	LOADING GEAR(SUPPLY)		
18B	LP40799-002A	LOADING ARM(SUPPLY) ASSY		
19	LP40837-001A	TORSION SPRING(SUPPLY)		
20	LP40903-004A	FIXING PLATE		
21	LP40806-001D	POLE BASE ASSY(SUPPLY)		
22	LP30959-001B	LOADING GEAR		
23	LP40802-002A	LOADING GEAR(TAKE UP) ASSY		
23A	LP21041-001D	LOADING GEAR(TAKE UP)		
23B	LP40803-002A	LOADING ARM(TAKE UP) ASSY		
24	LP40838-001A	TORSION SPRING(TAKE UP)		
26	LP40808-001E	POLE BASE ASSY(TAKE UP)		
36	LP21055-001G	TAKE UP LEVER		
37	LP40943-001A	TENSION SPRING		
38	LP40859-001D	T-UP HEAD		
39	LP30961-001C	LID GUIDE		
42	LP40810-003A	PINCH ROLLER ARM ASSY		
44	LP40840-001E	TORSION SPRING		
46	LP30963-002A	PRESS LEVER		
47	PQM30017-24	SLIT WASHER		
49	LP40813-001D	GUIDE ARM ASSY		
50	LP40841-001A	TORSION SPRING		
51	LP30002-090A	SPACER		
52	NAH0003-001	AC HEAD		
53	LP30965-003A	HEAD BASE		
55	LP40842-001D	COMPRESSION SPRING		
56	QYTDST2006MA	TAP SCREW	M2 x 6mm	
57	LP41036-002A	A/C ADJ.SCREW	(x2)	
58	QYTDST2606ZA	TAP SCREW	M2.6 x 6mm(x2)	
59	QAR0289-001	LOADING MOTOR		
60	QYTPSP3003ZA	SCREW	M3 x 3mm(x2)	
61	LP21056-002J	MOTOR BRACKET		
62	QYTPST2620ZA	TAP SCREW	M2.6 x 20mm	
63	LP40814-001B	WORM BEARING		
64	LP21044-001E	CONTROL CAM		
65	PQM30017-24	SLIT WASHER		
66	LP40815-001A	WORM GEAR		
67	LP40816-001B	HELICAL GEAR		
68	LP40817-001A	CONNECT GEAR		
69	LP10400-001N	CONTROL PLATE		
70	LP40843-001A	TORSION SPRING		
71	LP40818-002A	TENSION ARM ASSY		
72	LP40844-001F	TENSION SPRING		
73	LP21045-001E	TENSION ARM BASE		
74	LP40821-001A	TENSION BAND ASSY		
75	LP30967-001B	BAND HOLDER-1		
76	LP30968-001C	BAND HOLDER-2		
77	LP40822-002B	ADJUST PIN		
78	LP31000-005E	TENSION ARM LEVER		
79	LP21046-001C	MAIN BRAKE(TAKE UP)		
80	LP40824-001A	BAND BRAKE ASSY		
81	LP30969-002B	BRAKE LEVER		
82	LP30003-033C	TENSION SPRING		
83	LP30003-035C	TENSION SPRING		
84	LP40825-001B	CAPSTAN BRAKE ASSY		
△ 85	QAR0267-002	CAPSTAN MOTOR		
86	QYTPSG2606ZA	TAP SCREW	M2.6 x 6mm(x3)	
87	LP30005-010A	BELT	CAPSTAN MOTOR	
88	LP30970-001A	IDLER ARM		
89	LP40828-004A	IDLER GEAR 1	(x2)	
90	LP40829-002A	IDLER GEAR 2	(x2)	
91	LP31014-002A	WIRE HOLDER		
93	LP40934-001B	CLUTCH UNIT		
94	PQM30017-47	SLIT WASHER		
95	LP30973-001A	DIRECT GEAR		
96	LP40939-001A	COMPRESSION SPRING		
102	LP30974-001C	CHANGE LEVER		
105	LP21049-001A	REEL DISK	(x2)	
107	LP30017-004A	SPACER	REEL DISK(x2)	
110	LP10401-001L	SIDE FRAME(L)		
111	LP10402-001M	SIDE FRAME(R)		
112	QYTDST2606ZA	TAP SCREW	M2.6 x 6mm(x2)	
113	LP40917-001D	TORSION SPRING		

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

Symbol No.	Part No.	Part Name	Description	Local
114	LP30976-002B	SIDE PLATE		
115	LP30977-002E	LIMIT PLATE		
116	LP40846-001C	LIMIT SPRING		
117	LP31100-002A	DRIVE LEVER		
118	LP30978-001B	DRIVE ARM(L)		
119	LP30979-001S	DRIVE ARM(R)		
120	LP40847-001B	TORSION SPRING		
121	LP30980-002A	CONNECT PLATE		
122	LP10403-001C	SIDE HOLDER(L)		
123	LP10404-001E	SIDE HOLDER(R)		
124	LP30983-002A	LOCK LEVER(L)		
125	LP30984-002A	LOCK LEVER(R)		
126	LP40924-001D	TENSION SPRING	(x2)	
127	LP40972-001A	EARTH SPRING(1)		
128	LP40857-001B	EARTH SPRING(2)		
130	LP30981-003A	CASSETTE HOLDER ASSY		
134	LP21051-002C	REC SAFETY LEVER		
137	LP21052-002A	TOP FRAME		
151	LP30985-002M	DOOR OPENER		
WR1	WJT0117-001A	E-CARD WIRE	DRUM	
WR2	WJT0067-001B	E-CARD WIRE	A/C HEAD CN2001	
WR3	WJS0022-001A	E-FL/RB WIRE	LOADING MOTOR	

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

Electrical parts list

Switching regulator board

Block No. [0][1]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA10248-01C1	SWITCHING REGULATOR BOARD ASSY		
IC5101	STR-G6653-F9	IC		
IC5301	UTCTL431-T	IC		
IC5301	or MM1431AT-T	IC		
IC5301	or L5431-T	IC		
IC5301	or TL431/A-T	IC		
IC5302	PQ5EV3	IC		
Q5304	UMD12N-W	DIGI TRANSISTOR		
Q5304	or XP4313-W	DIGI TRANSISTOR		
Q5305	2SD2144S/UV/-T	TRANSISTOR		
Q5305	or 2SC3576-JVC-T	TRANSISTOR		
Q5306	2SC5739/QP/	TRANSISTOR		
Q5307	2SA1585S/QR/-T	TRANSISTOR		
Q5308	PDTC114EU-X	DIGI TRANSISTOR		
Q5308	or DTC114EUA-X	DIGI TRANSISTOR		
Q5308	or UN5211-X	DIGI TRANSISTOR		
Q5308	or RN1302-X	DIGI TRANSISTOR		
Q5313	2SA1585S/QR/-T	TRANSISTOR		
Q5314	2SA1585S/QR/-T	TRANSISTOR		
Q5315	PDTC114EU-X	DIGI TRANSISTOR		
Q5315	or DTC114EUA-X	DIGI TRANSISTOR		
Q5315	or UN5211-X	DIGI TRANSISTOR		
Q5315	or RN1302-X	DIGI TRANSISTOR		
D5001	GBJ4J	BRIDGE DIODE		
D5001	or D3SBA60	DIODE		
D5101	SARS01-T2	SI DIODE		
D5103	1F4G-T2	FR DIODE		
D5103	or 10ERB20-T2	FR DIODE		
D5103	or ERA18-02-T2	FR DIODE		
D5103	or AU01Z-T2	FR DIODE		
D5103	or 1SR153-400-T2	FR DIODE		
D5104	1SS133-T2	DIODE		
D5104	or 1SS270A-T2	SI DIODE		
D5105	10ERB20-T2	FR DIODE		
D5105	or ERA18-02-T2	FR DIODE		
D5105	or AU01Z-T2	FR DIODE		
D5105	or 1SR153-400-T2	FR DIODE		
D5105	or 1F4G-T2	FR DIODE		
D5106	10ERB20-T2	FR DIODE		
D5106	or ERA18-02-T2	FR DIODE		
D5106	or AU01Z-T2	FR DIODE		
D5106	or 1SR153-400-T2	FR DIODE		
D5106	or 1F4G-T2	FR DIODE		
D5202	1SR156-400-X	SI DIODE		
D5203	RL2Z-LFB2	FRD		
D5204	D1FS4A-X	SB DIODE		
D5205	RK34-LFB2	SB DIODE		
D5206	RK34-LFB2	SB DIODE		
D5207	D1FS4A-X	SB DIODE		
D5208	RK34-LFB2	SB DIODE		
D5209	RK34-LFB2	SB DIODE		
D5210	1F4G-T2	FR DIODE		
D5210	or PG104RS-T2	FR DIODE		
D5210	or 10ERB20-T2	FR DIODE		
D5210	or 1SR153-400-T2	FR DIODE		
D5210	or ERA18-02-T2	FR DIODE		
D5211	ERA18-02-T2	FR DIODE		
D5211	or 1SR153-400-T2	FR DIODE		
D5211	or 10ERB20-T2	FR DIODE		
D5211	or 1F4G-T2	FR DIODE		
D5212	D1FS4A-X	SB DIODE		
D5213	1F4G-T2	FR DIODE		
D5213	or 10ERB20-T2	FR DIODE		
D5213	or ERA18-02-T2	FR DIODE		
D5213	or AU01Z-T2	FR DIODE		
D5213	or 1SR153-400-T2	FR DIODE		
D5301	MTZJ15A-T2	Z DIODE		
D5301	or RD15ES/B1/-T2	Z DIODE		
D5303	MTZJ11C-T2	Z DIODE		

△ Symbol No.	Part No.	Part Name	Description	Local
D5303	or RD11ES/B3/-T2	Z DIODE		
D5304	MTZJ5.6C-T2	Z DIODE		
D5304	or RD5.6ES/B3/-T2	Z DIODE		
D5306	RK34-LFB2	SB DIODE		
D5307	RK34-LFB2	SB DIODE		
D5308	RK34-LFB2	SB DIODE		
D5309	1S4-T2	SB DIODE		
D5309	or SBO40-T2	SB DIODE		
D5309	or AW04-T2	SB DIODE		
D5312	1SS133-T2	DIODE		
D5312	or 1SS270A-T2	SI DIODE		
D5313	1A3G-T2	SI DIODE		
D5313	or ERA15-02-T2	SI DIODE		
D5313	or 10EDB20-T2	SI DIODE		
△ PC5101	PC123Y22FZ	PHOTO COUPLER		
△ C5001	QFZ9073-683	MM CAPACITOR	0.068uF AC250V M	
△ C5002	QFZ9051-223	MM CAPACITOR	0.022uF 250V M	
C5003	QE20374-107	E CAPACITOR	100uF 400V M	
△ C5004	QCZ9079-222	C CAPACITOR	2200pF AC250V M	
C5101	QCZ0339-101Z	C CAPACITOR	100pF 1kV K	
C5102	QCZ0349-472Z	C CAPACITOR	4700pF 1kV K	
C5103	QEMU1VM-276Z	E CAPACITOR	27uF 35V M	
C5104	QCZ0136-102Z	C CAPACITOR	1000pF 1kV K	
C5105	QFLC1HJ-471Z	M CAPACITOR	470pF 50V J	
C5106	NCB21HK-103X	C CAPACITOR	0.01uF 50V K	
C5107	NCB21HK-221X	C CAPACITOR	220pF 50V K	
C5202	QETN2AM-475Z	E CAPACITOR	4.7uF 100V M	
C5203	QEMT1CM-687	E CAPACITOR	680uF 16V M	
C5204	QEMT1CM-687	E CAPACITOR	680uF 16V M	
C5205	QEMT1AM-128	E CAPACITOR	1200uF 10V M	
C5206	QEC501AM-128	E CAPACITOR	1200uF 10V M	
C5207	QEC50JM-158	E CAPACITOR	1500uF 6.3V M	
C5208	QEMT1AM-108	E CAPACITOR	1000uF 10V M	
C5209	QEMU1HM-186Z	E CAPACITOR	18uF 50V M	
C5210	QEMX0JM-227Z	E CAPACITOR	220uF 6.3V M	
C5301	QFVF1HJ-154Z	MF CAPACITOR	0.15uF 50V J	
C5302	QFLC1HJ-333Z	M CAPACITOR	0.033uF 50V J	
C5303	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C5304	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C5305	QETN1AM-107Z	E CAPACITOR	100uF 10V M	
C5306	QETN1AM-107Z	E CAPACITOR	100uF 10V M	
C5307	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C5308	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C5310	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C5311	QETN1AM-107Z	E CAPACITOR	100uF 10V M	
C5312	QETN1AM-107Z	E CAPACITOR	100uF 10V M	
C5313	NCB21HK-471X	C CAPACITOR	470pF 50V K	
C5314	QETN1AM-107Z	E CAPACITOR	100uF 10V M	
C5315	NCB21HK-103X	C CAPACITOR	0.01uF 50V K	
R5101	QRG02GJ-683	OMF RESISTOR	68kΩ 2W J	
R5102	NRSA02J-122X	MG RESISTOR	1.2kΩ 1/10W J	
R5103	QRE141J-684Y	C RESISTOR	680kΩ 1/4W J	
R5104	NRSA02J-102X	MG RESISTOR	1kΩ 1/10W J	
R5105	QRE141J-680Y	C RESISTOR	68Ω 1/4W J	
R5106	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
R5107	NRSA02J-681X	MG RESISTOR	680Ω 1/10W J	
R5108	QRT01DJ-R33X	MF RESISTOR	0.33Ω 1W J	
△ R5109	QRZ9005-470X	FUSI RESISTOR	47Ω 1/4W G	
R5301	NRSA02J-221X	MG RESISTOR	220Ω 1/10W J	
R5302	NRSA02J-472X	MG RESISTOR	4.7kΩ 1/10W J	
R5303	NRVA02D-152X	CMF RESISTOR	1.5kΩ 1/10W D	
R5304	NRVA02D-682X	CMF RESISTOR	6.8kΩ 1/10W D	
R5305	NRVA02D-243X	CMF RESISTOR	24kΩ 1/10W D	
R5306	NRVA02D-392X	CMF RESISTOR	3.9kΩ 1/10W D	
R5308	NRSA02J-122X	MG RESISTOR	1.2kΩ 1/10W J	
R5309	NRSA02J-102X	MG RESISTOR	1kΩ 1/10W J	
R5312	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
R5313	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
R5314	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J	
R5315	QRE121J-820Y	C RESISTOR	82Ω 1/2W J	
R5316	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
R5317	NRSA02J-102X	MG RESISTOR	1kΩ 1/10W J	
R5318	NRVA02D-302X	CMF RESISTOR	3kΩ 1/10W D	

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local
R5319	NRVA02D-472X	CMF RESISTOR	4.7kΩ 1/10W D	
R5325	QRE141J-8R2Y	C RESISTOR	8.2Ω 1/4W J	
△ R5326	QRZ9005-470X	FUSI RESISTOR	47Ω 1/4W G	
R5327	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
R5328	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J	
R5329	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
R5330	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J	
L5201	PELN1184	CHOKO COIL		
L5202	PELN1184	CHOKO COIL		
L5204	PELN1184	CHOKO COIL		
L5205	PELN1184	CHOKO COIL		
L5206	PELN1184	CHOKO COIL		
L5207	PELN1184	CHOKO COIL		
△ T5001	QQS0263-001	SW TRANSF		
B5301	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
B5305	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
△ CN5001	QGA7901C3-02	CONNECTOR	W-B (1-2)	
CN5301	QGB1231L1-15	CONNECTOR	B-B (1-15)	
CN5302	QGA2001C1-02	CONNECTOR	W-B (1-2)	
CN5303	QGA2501C1-04	CONNECTOR	W-B (1-4)	
CN5304	QGB1231L1-15	CONNECTOR	B-B (1-15)	
△ CP5301	QMFZ049-1R5Z-E	FUSE	1.5A 125V	
△ F5001	QMF51E2-2R0-J1	FUSE	2A AC250V	
FC5001	QNG0020-001Z	FUSE CLIP		
FC5002	QNG0020-001Z	FUSE CLIP		
HS1	PEME0889-01-01	HEAT SINK		
△ LF5002	QQR1031-001	LINE FILTER		
OT1	QYTDST3010Z	TAP SCREW	M3 x 10mm IC5101	
W5501	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	

Digital board

Block No. [0][2]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA10236-06B	DIGITAL BOARD ASSY		
IC1001	JCP8059	IC		
IC1002	HY57V161610ET-8	IC		
IC1002	or K4S161622H-TC80	IC		
IC1002	or MT48LC1M16A1TG8	IC		
IC1002	or HY57V161610ETP7	IC		
IC1002	or MT48LC1M16TG-7S	IC		
IC1201	LPN0889-001C	IC (FLASH)	(SERVICE)	
IC1202	SN74LVC373APW-X	IC (DIGITAL)		
IC1203	SN74LVC373APW-X	IC (DIGITAL)		
IC1401	DMN8652-B0	IC (DIGITAL)		
IC1404	SN74HCT08APW-X	IC		
IC1405	SN74LV08APW-X	IC		
IC1601	HY5DU561622CT-J	IC		
IC1602	HY5DU561622CT-J	IC		
IC1701	PQ015YZ01Z-X	IC		
IC1801	TSB41AB2PAP	IC		
Q1002	2SA1037AK/QR/-X	TRANSISTOR		
Q1002	or 2SA1530A/QR/-X	TRANSISTOR		
Q1002	or 2SB709A/QR/-X	TRANSISTOR		
Q1003	2SA1037AK/QR/-X	TRANSISTOR		
Q1003	or 2SA1530A/QR/-X	TRANSISTOR		
Q1003	or 2SB709A/QR/-X	TRANSISTOR		
Q1004	2SA1037AK/QR/-X	TRANSISTOR		
Q1004	or 2SA1530A/QR/-X	TRANSISTOR		
Q1004	or 2SB709A/QR/-X	TRANSISTOR		
Q1005	2SA1037AK/QR/-X	TRANSISTOR		
Q1005	or 2SA1530A/QR/-X	TRANSISTOR		
Q1005	or 2SB709A/QR/-X	TRANSISTOR		
Q1006	2SA1037AK/QR/-X	TRANSISTOR		
Q1006	or 2SA1530A/QR/-X	TRANSISTOR		
Q1006	or 2SB709A/QR/-X	TRANSISTOR		
Q1007	2SA1037AK/QR/-X	TRANSISTOR		
Q1007	or 2SA1530A/QR/-X	TRANSISTOR		
Q1007	or 2SB709A/QR/-X	TRANSISTOR		

△ Symbol No.	Part No.	Part Name	Description	Local
Q1008	UMZ1N-W	PAIR TRANSISTOR		
Q1008	or BC847PN-X	PAIR TRANSISTOR		
Q1008	or BC846PN-X	PAIR TRANSISTOR		
Q1009	2SC2412K/QRS/-X	TRANSISTOR		
Q1009	or 2SC3928A/QRS/-X	TRANSISTOR		
Q1009	or 2SD601A/QRS/-X	TRANSISTOR		
Q1010	2SC2412K/QRS/-X	TRANSISTOR		
Q1010	or 2SC3928A/QRS/-X	TRANSISTOR		
Q1010	or 2SD601A/QRS/-X	TRANSISTOR		
Q1011	2SC2412K/QRS/-X	TRANSISTOR		
Q1011	or 2SC3928A/QRS/-X	TRANSISTOR		
Q1011	or 2SD601A/QRS/-X	TRANSISTOR		
D1001	1SS355-X	SI DIODE		
D1001	or MA111-X	SI DIODE		
D1002	1SS355-X	SI DIODE		
D1002	or MA111-X	SI DIODE		
D1401	1SS355-X	SI DIODE		
D1401	or MA111-X	SI DIODE		
D1402	1SS355-X	SI DIODE		
D1402	or MA111-X	SI DIODE		
D1403	1SS355-X	SI DIODE		
D1403	or MA111-X	SI DIODE		
C1001	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	
C1002	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C1003	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1004	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1005	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1007	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1008	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1009	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1012	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1014	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1015	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1017	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1018	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1019	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C1020	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1026	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1030	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1032	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1033	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1034	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1035	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1036	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1038	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1039	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1041	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C1042	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1043	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1045	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1046	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1047	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1051	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C1052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1053	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C1054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1062	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C1065	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M	
C1077	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1089	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1090	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1091	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1092	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1093	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1094	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1095	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C1096	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1097	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1098	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C1203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1625	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1204	NEH90JM-476X	E CAPACITOR	47uF 6.3V M		C1638	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1206	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1640	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1207	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1642	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1401	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1644	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1402	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1646	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1403	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1648	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1404	NEH90JM-107X	E CAPACITOR	100uF 6.3V M		C1650	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1405	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1652	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1406	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1654	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1407	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1656	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1408	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1658	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1409	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1701	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1410	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1702	NEH90JM-107X	E CAPACITOR	100uF 6.3V M	
C1411	NEH90JM-107X	E CAPACITOR	100uF 6.3V M		C1703	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1412	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1704	NEH90JM-107X	E CAPACITOR	100uF 6.3V M	
C1413	NEH90JM-107X	E CAPACITOR	100uF 6.3V M		C1706	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1707	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1416	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1708	NBE40JM-476X	TA E CAPACITOR	47uF 6.3V M	
C1417	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1710	NBE40JM-476X	TA E CAPACITOR	47uF 6.3V M	
C1418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1801	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C1420	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C1802	NDC31HJ-271X	C CAPACITOR	270pF 50V J	
C1421	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1803	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C1422	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1804	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1423	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1805	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1424	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1806	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C1425	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1807	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1426	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1808	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C1427	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C1809	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C1428	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1811	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1429	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1812	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1430	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2201	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1431	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1432	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1001	NRSA63D-221X	MG RESISTOR	220Ω 1/16W D	
C1433	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C1435	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		R1003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C1436	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C1437	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1005	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C1438	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C1439	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1007	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C1440	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1009	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C1441	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1012	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C1442	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1013	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
C1443	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1014	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
C1444	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1015	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
C1445	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C1446	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C1447	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C1448	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		R1021	NRSA63D-332X	MG RESISTOR	3.3kΩ 1/16W D	
C1449	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1022	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	
C1450	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1024	NRSA63D-272X	MG RESISTOR	2.7kΩ 1/16W D	
C1452	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1027	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
C1453	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1028	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
C1455	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1029	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C1457	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1030	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C1458	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1031	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C1601	NBAD0GM-227X	OS E CAPACITOR	220uF 2.5V M		R1032	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C1602	NBAD0GM-227X	OS E CAPACITOR	220uF 2.5V M		R1033	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
C1605	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1035	NQR0129-002X	FERRITE BEADS		
C1606	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1036	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C1607	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1037	NRSA63D-101X	MG RESISTOR	100Ω 1/16W D	
C1608	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1038	NQR0129-002X	FERRITE BEADS		
C1609	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1039	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C1610	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1040	NRSA63D-101X	MG RESISTOR	100Ω 1/16W D	
C1611	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1041	NQR0129-002X	FERRITE BEADS		
C1612	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1042	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C1613	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1043	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
C1614	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1044	NQR0129-002X	FERRITE BEADS		
C1615	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1045	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C1616	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1046	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
C1617	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1047	NRSA63D-201X	MG RESISTOR	200Ω 1/16W D	
C1618	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1048	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C1619	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1049	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C1620	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1050	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
C1621	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1051	NRSA63D-271X	MG RESISTOR	270Ω 1/16W D	
C1622	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1052	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C1623	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1053	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C1624	NCB31CK-104X	C CAPACITOR	0.1uF 16V K						

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R1821	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		RA2207	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4	
R1822	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		RA2208	NRZ0040-330X	NET RESISTOR	33Ω 1/16W J x4	
R2201	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		RA2209	NRZ0040-330X	NET RESISTOR	33Ω 1/16W J x4	
R2202	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J		RA2210	NRZ0040-330X	NET RESISTOR	33Ω 1/16W J x4	
R2203	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		RA2211	NRZ0040-330X	NET RESISTOR	33Ω 1/16W J x4	
R2204	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J						
R2205	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J		L1004	NQL144K-100X	P COIL	0.30Ω 10uH K	
R2206	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J		L1801	NQL144K-100X	P COIL	0.30Ω 10uH K	
R2207	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J		T1801	NQR0444-001X	CHOKO COIL		
R2208	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J						
R2209	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J		B1001	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R2210	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J		B1007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R2211	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J		B1008	NQR0339-001X	FERRITE BEADS		
R2212	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J		B1204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2213	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J		B1208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2214	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J		B1802	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R2215	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J		CN1001	QGB2027L6-28X	CONNECTOR	B-B (1-28)	
RA1001	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4		CN1002	QGB2027L6-28X	CONNECTOR	B-B (1-28)	
RA1002	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4		CN1403	QGF1016C2-04W	CONNECTOR	FFC/FPC (1-4)	
RA1003	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J		CN1404	QGF1016F2-04W	CONNECTOR	FFC/FPC (1-4)	
RA1004	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J		CN1801	QGB2027L1-10X	CONNECTOR	B-B (1-10)	
RA1005	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J		CN2201	QGF0539C1-40W	CONNECTOR	FFC/FPC (1-40)	
RA1006	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J		K1001	NQR0339-001X	FERRITE BEADS		
RA1201	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J		K1002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA1202	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J		K1003	NQR0129-002X	FERRITE BEADS		
RA1203	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J		K1004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA1204	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J		K1005	NQR0129-002X	FERRITE BEADS		
RA1401	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA1402	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1007	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA1403	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA1404	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1009	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA1405	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J		K1010	NQR0129-002X	FERRITE BEADS		
RA1406	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J		K1011	NQR0129-002X	FERRITE BEADS		
RA1407	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J		K1012	NQR0129-002X	FERRITE BEADS		
RA1408	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J		K1013	NQR0129-002X	FERRITE BEADS		
RA1409	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J		K1014	NQR0129-002X	FERRITE BEADS		
RA1410	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J		K1015	NQR0129-002X	FERRITE BEADS		
RA1411	NRZ0034-101W	NET RESISTOR	100Ω 1/32W J		K1016	NQR0129-002X	FERRITE BEADS		
RA1601	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1017	NQR0129-002X	FERRITE BEADS		
RA1602	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1018	NQR0129-002X	FERRITE BEADS		
RA1603	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1019	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
RA1604	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1020	NQR0129-002X	FERRITE BEADS		
RA1605	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA1606	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1401	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
RA1607	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1402	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
RA1608	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K1403	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
RA1609	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4		K1404	NQR0339-001X	FERRITE BEADS		
RA1610	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4		K1406	NQR0339-001X	FERRITE BEADS		
RA1611	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4		K1407	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
RA1612	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4		K1408	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
RA1613	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4		K1701	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
RA1614	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4		K1702	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
RA1615	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4		K1801	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
RA1616	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4		K2201	NQR0129-002X	FERRITE BEADS		
RA1617	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K2202	NQR0129-002X	FERRITE BEADS		
RA1618	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K2203	NQR0129-002X	FERRITE BEADS		
RA1619	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K2204	NQR0129-002X	FERRITE BEADS		
RA1620	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K2205	NQR0129-002X	FERRITE BEADS		
RA1621	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K2206	NQR0129-002X	FERRITE BEADS		
RA1622	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K2207	NQR0129-002X	FERRITE BEADS		
RA1623	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K2208	NQR0129-002X	FERRITE BEADS		
RA1624	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4		K2209	NQR0129-002X	FERRITE BEADS		
RA1625	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4		K2210	NQR0129-002X	FERRITE BEADS		
RA1626	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4		K2211	NQR0129-002X	FERRITE BEADS		
RA1627	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4		K2212	NQR0129-002X	FERRITE BEADS		
RA1628	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4		K2213	NQR0129-002X	FERRITE BEADS		
RA1629	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4		K2214	NQR0129-002X	FERRITE BEADS		
RA1630	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4		K2215	NQR0129-002X	FERRITE BEADS		
RA1631	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4		K2216	NQR0129-002X	FERRITE BEADS		
RA1632	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4		K2217	NQR0129-002X	FERRITE BEADS		
RA1801	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J		K2218	NQR0129-002X	FERRITE BEADS		
RA1802	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J		K2219	NQR0129-002X	FERRITE BEADS		
RA2201	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4		K2220	NQR0129-002X	FERRITE BEADS		
RA2202	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4		K2221	NQR0129-002X	FERRITE BEADS		
RA2203	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4		LC1401	NQR0415-002X	EMI FILTER	1uF 16V Z	
RA2204	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4		LC1402	NQR0415-002X	EMI FILTER	1uF 16V Z	
RA2205	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4		LC1403	NQR0415-002X	EMI FILTER	1uF 16V Z	
RA2206	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4		OT1	LC41656-001A	COOLING SHEET		

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local
SD1	LP21293-001A	SHIELD FRAME(DIGITAL)		
X1401	NAX0580-001X	CXO	27.0000MHz	
X1801	NAX0666-001X	CRYSTAL	24.576000MHz	

Main board

Block No. [0][3]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA10245-03D	MAIN BOARD ASSY		C
PW1	LPA10245-02D	MAIN BOARD ASSY		A,D
PW1	LPA10245-01D	MAIN BOARD ASSY		B,E
IC1	JCP8060-MSA	IC		
IC201	LC74776-9791	IC		
△ IC2201	AN3651FBP	IC		
IC2601	RC4558D-X	IC		
IC2602	BU4052BCF-X	IC		
IC2602	or CD4052BM-X	IC		
IC2603	RC4558D-X	IC		
IC2604	BU4052BCF-X	IC		
IC2604	or CD4052BM-X	IC		
IC2605	RC4558D-X	IC		
IC2606	LA7151	IC		
IC2607	LA7151	IC		
IC3001	HD6432194SAD75F	IC(MCU)	MASK	C
IC3001	HD6432194SAD63F	IC(MCU)	MASK	A,B,D,E
IC3002	IC-PST3427U-X	IC		
IC3004	LPN0883-003A-33	IC(EEPROM)	*(REFER TO BELOW) C	
IC3004	LPN0883-002B-32	IC(EEPROM)	*(REFER TO BELOW) A,D	
IC3004	LPN0883-001E-31	IC(EEPROM)	*(REFER TO BELOW) B,E	
IC3301	HD6432194SAD84F	IC(MCU)	MASK	C
IC3301	HD6432194SAD64F	IC(MCU)	MASK	A,B,D,E
IC3302	IC-PST3427U-X	IC		
IC3303	LPN0887-001A-10	IC(EEPROM)	*(REFER TO BELOW) C	
IC3303	LPN0882-002D-02	IC(EEPROM)	*(REFER TO BELOW) A,D	
IC3303	LPN0882-001D-11	IC(EEPROM)	*(REFER TO BELOW) B,E	
IC7101	CD74HC4053PW-X	IC		
IC7501	74VHCT08ASJ-X	IC		
Q4	2SA1037AK/QR/-X	TRANSISTOR		C
Q4	2SB709A/QR/-X	TRANSISTOR		C
Q4	2SA1530A/QR/-X	TRANSISTOR		C
Q7	2SC2412K/QRS/-X	TRANSISTOR		
Q7	or 2SD601A/QRS/-X	TRANSISTOR		
Q7	or 2SC3928A/QRS/-X	TRANSISTOR		
Q8	2SC2412K/QRS/-X	TRANSISTOR		
Q8	or 2SD601A/QRS/-X	TRANSISTOR		
Q8	or 2SC3928A/QRS/-X	TRANSISTOR		
Q9	2SC2412K/QRS/-X	TRANSISTOR		
Q9	or 2SD601A/QRS/-X	TRANSISTOR		
Q9	or 2SC3928A/QRS/-X	TRANSISTOR		
Q10	2SC2412K/QRS/-X	TRANSISTOR		
Q10	or 2SD601A/QRS/-X	TRANSISTOR		
Q10	or 2SC3928A/QRS/-X	TRANSISTOR		
Q16	2SA1037AK/QR/-X	TRANSISTOR		
Q16	or 2SB709A/QR/-X	TRANSISTOR		
Q16	or 2SA1530A/QR/-X	TRANSISTOR		
Q207	2SA1037AK/QR/-X	TRANSISTOR		
Q207	or 2SB709A/QR/-X	TRANSISTOR		
Q207	or 2SA1530A/QR/-X	TRANSISTOR		
Q208	2SC2412K/QRS/-X	TRANSISTOR		
Q208	or 2SD601A/QRS/-X	TRANSISTOR		
Q208	or 2SC3928A/QRS/-X	TRANSISTOR		
Q2001	2SC2412K/QRS/-X	TRANSISTOR		
Q2001	or 2SD601A/QRS/-X	TRANSISTOR		
Q2001	or 2SC3928A/QRS/-X	TRANSISTOR		
Q2002	2SC2412K/QRS/-X	TRANSISTOR		
Q2002	or 2SD601A/QRS/-X	TRANSISTOR		
Q2002	or 2SC3928A/QRS/-X	TRANSISTOR		
Q2003	DTA144WKA-X	TRANSISTOR		
Q2003	or UN221E-X	DIGI TRANSISTOR		
Q2003	or RT1P44HC-X	DIGI TRANSISTOR		
Q2051	2SC2412K/QRS/-X	TRANSISTOR		

△ Symbol No.	Part No.	Part Name	Description	Local
Q2051	or 2SD601A/QRS/-X	TRANSISTOR		
Q2051	or 2SC3928A/QRS/-X	TRANSISTOR		
Q2052	2SA1037AK/QR/-X	TRANSISTOR		
Q2052	or 2SB709A/QR/-X	TRANSISTOR		
Q2052	or 2SA1530A/QR/-X	TRANSISTOR		
Q2053	DTC144WKA-X	DIGI TRANSISTOR		
Q2053	or UN221E-X	TRANSISTOR		
Q2053	or RT1N44HC-X	DIGI TRANSISTOR		
Q2054	2SA1037AK/QR/-X	TRANSISTOR		
Q2054	or 2SB709A/QR/-X	TRANSISTOR		
Q2054	or 2SA1530A/QR/-X	TRANSISTOR		
Q2055	DTC144WKA-X	DIGI TRANSISTOR		
Q2055	or UN221E-X	TRANSISTOR		
Q2055	or RT1N44HC-X	DIGI TRANSISTOR		
Q2201	DTA144WKA-X	TRANSISTOR		
Q2201	or UN221E-X	DIGI TRANSISTOR		
Q2201	or RT1P44HC-X	DIGI TRANSISTOR		
Q2202	DTC144WKA-X	DIGI TRANSISTOR		
Q2202	or UN221E-X	TRANSISTOR		
Q2202	or RT1N44HC-X	DIGI TRANSISTOR		
Q2203	2SC2412K/QRS/-X	TRANSISTOR		
Q2203	or 2SD601A/QRS/-X	TRANSISTOR		
Q2203	or 2SC3928A/QRS/-X	TRANSISTOR		
Q2204	2SC2412K/QRS/-X	TRANSISTOR		
Q2204	or 2SD601A/QRS/-X	TRANSISTOR		
Q2204	or 2SC3928A/QRS/-X	TRANSISTOR		
Q2255	DTC114EKA-X	TRANSISTOR		
Q2255	or UN2211-X	TRANSISTOR		
Q2255	or RT1N141C-X	DIGI TRANSISTOR		
Q3004	2SC2412K/QRS/-X	TRANSISTOR		
Q3004	or 2SD601A/QRS/-X	TRANSISTOR		
Q3004	or 2SC3928A/QRS/-X	TRANSISTOR		
Q3007	UN221E-X	TRANSISTOR		
Q3007	or DTC144WKA-X	DIGI TRANSISTOR		
Q3007	or RT1N44HC-X	DIGI TRANSISTOR		
Q3011	DTC114GKA-X	DIGI TRANSISTOR		
Q3011	or DTC144GKA-X	DIGI TRANSISTOR		
Q3012	DTC114GKA-X	DIGI TRANSISTOR		
Q3012	or DTC144GKA-X	DIGI TRANSISTOR		
Q3013	DTC114GKA-X	DIGI TRANSISTOR		
Q3013	or DTC144GKA-X	DIGI TRANSISTOR		
Q3014	DTC114GKA-X	DIGI TRANSISTOR		
Q3014	or DTC144GKA-X	DIGI TRANSISTOR		
Q3015	DTC114GKA-X	DIGI TRANSISTOR		
Q3015	or DTC144GKA-X	DIGI TRANSISTOR		
Q3016	DTC114GKA-X	DIGI TRANSISTOR		
Q3016	or DTC144GKA-X	DIGI TRANSISTOR		
Q3017	DTC114GKA-X	DIGI TRANSISTOR		
Q3017	or DTC144GKA-X	DIGI TRANSISTOR		
Q3302	PTZ-NV16A	IC(PHOTO SENSOR)		
Q3303	PTZ-NV16A	IC(PHOTO SENSOR)		
Q3304	2SC2412K/QRS/-X	TRANSISTOR		
Q3304	or 2SD601A/QRS/-X	TRANSISTOR		
Q3304	or 2SC3928A/QRS/-X	TRANSISTOR		
Q3305	2SC2412K/QRS/-X	TRANSISTOR		
Q3305	or 2SD601A/QRS/-X	TRANSISTOR		
Q3305	or 2SC3928A/QRS/-X	TRANSISTOR		
Q3401	UN221E-X	TRANSISTOR		
Q3401	or DTC144WKA-X	DIGI TRANSISTOR		
Q3401	or RT1N44HC-X	DIGI TRANSISTOR		
Q3901	UN221E-X	TRANSISTOR		
Q3901	or DTC144WKA-X	DIGI TRANSISTOR		
Q3901	or RT1N44HC-X	DIGI TRANSISTOR		
Q4001	UN2211-X	TRANSISTOR		
Q4001	or DTC114EKA-X	TRANSISTOR		
Q4001	or RT1N141C-X	DIGI TRANSISTOR		
Q7201	2SC1317/RS/-T	TRANSISTOR		
D201	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
D202	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
D203	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
D2001	1SS133-T2	DIODE		
D2001	or 1SS270A-T2	SI DIODE		
D2251	1SS133-T2	DIODE		
D2251	or 1SS270A-T2	SI DIODE		
D3002	1SS133-T2	DIODE		
D3002	or 1SS270A-T2	SI DIODE		
D3003	RD39ES/B3/-T2	Z DIODE		

*The VCR goes to jig RCU mode after replacing the EEPROM and the VCR does not accept some RCU command.

3-14(No.YD014)

Therefore please set the VCR to the user RCU mode after replacing the EEPROM.

The method of setting the VCR to the user RCU mode is written on the service manual.

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
D3003	or MTZJ39C-T2	Z DIODE			C207	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
D3004	1A3G-T2	SI DIODE			C209	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
D3005	1A3G-T2	SI DIODE			C210	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
D3008	1SS133-T2	DIODE			C211	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
D3008	or 1SS270A-T2	SI DIODE			C212	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
D3301	LNB2301L01VI	LED			C213	QEKJ1EM-475Z	E CAPACITOR	4.7uF 25V M	
D3303	RD39ES/B3/-T2	Z DIODE			C214	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
D3303	or MTZJ39C-T2	Z DIODE			C215	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
D3304	1A3G-T2	SI DIODE			C217	NDC31HJ-560X	C CAPACITOR	56pF 50V J	
D3305	1A3G-T2	SI DIODE			C218	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	
D4001	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C222	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	
D4002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C225	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	
D7301	1A3G-T2	SI DIODE			C2001	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
PC3001	RPI-304J	IC(PHOTO SENSOR)			C2002	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	
PC3002	RPI-304J	IC(PHOTO SENSOR)			C2003	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	
C1	NDC31HJ-151X	C CAPACITOR	150pF 50V J		C2005	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
C2	NDC31HJ-390X	C CAPACITOR	39pF 50V J	C	C2006	NCB31EK-682X	C CAPACITOR	6800pF 25V K	
C2	NDC31HJ-470X	C CAPACITOR	47pF 50V J	A,B,D,E	C2007	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	
C3	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	C	C2008	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
C4	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M		C2009	NCB31HK-122X	C CAPACITOR	1200pF 50V K	
C5	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2010	NCB31HK-152X	C CAPACITOR	1500pF 50V K	
C6	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2011	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
C7	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2012	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8	NCF31AZ-105X	C CAPACITOR	1uF 10V Z		C2013	NDC31HJ-331X	C CAPACITOR	330pF 50V J	
C9	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M		C2051	NDC31HJ-331X	C CAPACITOR	330pF 50V J	
C10	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M		C2052	QFV61HJ-823Z	MF CAPACITOR	0.082uF 50V J	
C11	NCF31AZ-105X	C CAPACITOR	1uF 10V Z		C2053	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C12	NCF31AZ-105X	C CAPACITOR	1uF 10V Z		C2054	NCB31EK-223X	C CAPACITOR	0.022uF 25V K	
C13	NCF31AZ-105X	C CAPACITOR	1uF 10V Z		C2055	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C14	NCF31AZ-105X	C CAPACITOR	1uF 10V Z		C2201	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C15	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2202	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
C17	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2203	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
C19	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2204	QEKJ0JM-336Z	E CAPACITOR	33uF 6.3V M	
C20	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2205	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C22	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2206	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C24	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2207	NCB31EK-153X	C CAPACITOR	0.015uF 25V K	
C25	QEKJ1HM-335Z	E CAPACITOR	3.3uF 50V M		C2208	NCB31EK-153X	C CAPACITOR	0.015uF 25V K	
C26	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M		C2209	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C27	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2210	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C29	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C	C2211	QEKJ0JM-336Z	E CAPACITOR	33uF 6.3V M	
C30	QCB1HK-331Y	C CAPACITOR	330pF 50V K		C2212	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	
C31	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M		C2214	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C32	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2215	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C33	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M		C2216	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	
C34	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2220	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C35	QCB1HK-103Y	C CAPACITOR	0.01uF 50V K		C2221	NCB31EK-223X	C CAPACITOR	0.022uF 25V K	
C36	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M		C2222	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C37	NDC31HJ-4R0X	C CAPACITOR	4pF 50V J		C2223	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C38	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2224	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C39	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M		C2225	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C40	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2226	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C41	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2227	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C43	QEKJ1HM-335Z	E CAPACITOR	3.3uF 50V M		C2251	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C44	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M		C2252	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C45	NCB31EK-472X	C CAPACITOR	4700pF 25V K		C2253	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C46	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2254	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	
C47	QEKJ1HM-474Z	E CAPACITOR	0.47uF 50V M		C2255	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C48	NCB31EK-223X	C CAPACITOR	0.022uF 25V K		C2256	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C49	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M		C2257	QCB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C50	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C	C2258	NDC31HJ-181X	C CAPACITOR	180pF 50V J	
C56	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2259	QEKJ1HM-334Z	E CAPACITOR	0.33uF 50V M	
C57	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2261	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C58	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2262	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C59	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2601	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C60	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2602	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C61	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M		C2603	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C62	QCB1HK-103Y	C CAPACITOR	0.01uF 50V K		C2604	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C63	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2605	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	
C64	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2606	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	
C66	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C	C2607	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
C71	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M		C2608	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
C75	NDC31HJ-390X	C CAPACITOR	39pF 50V J	C	C2609	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	
C85	QCB1HK-103Y	C CAPACITOR	0.01uF 50V K		C2610	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	
C201	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M		C2611	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C204	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C2612	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	
C206	NDC31HJ-330X	C CAPACITOR	33pF 50V J		C2613	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	
					C2614	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
					C2615	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C2616	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M		R3	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	A,B,D,E
C2617	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M		R5	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	C
C2618	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M		R11	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
C2651	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M		R12	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C2653	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M		R17	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	C
C3007	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		R21	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C3010	QEZ0244-22A	EDL CAPACITOR	0.22F 5.5V Z		R22	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C3014	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M		R28	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	C
C3015	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R35	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	C
C3016	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R36	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C3022	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R37	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
C3024	NDC31HJ-160X	C CAPACITOR	16pF 50V J		R38	NRSA63J-685X	MG RESISTOR	6.8MΩ 1/16W J	
C3025	QAT3725-300Z	TRIM CAPACITOR	30pF TIMER CLOCK		R41	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3027	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M		R42	QRE141J-471Y	C RESISTOR	470Ω 1/4W J	
C3030	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M		R43	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
C3031	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3032	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R202	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C3033	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R208	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C3036	NDC31HJ-180X	C CAPACITOR	18pF 50V J		R209	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C3037	NDC31HJ-120X	C CAPACITOR	12pF 50V J		R210	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
C3038	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M		R211	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
C3039	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R212	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
C3042	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M		R213	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3050	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R216	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C3054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R224	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3304	NCB31EK-473X	C CAPACITOR	0.047uF 25V K		R225	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
C3310	QEZ0244-229	EDL CAPACITOR	0.022F 5.5V Z		R226	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C3312	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M		R2003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3315	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2005	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
C3316	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2007	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
C3322	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2008	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C3324	NDC31HJ-120X	C CAPACITOR	12pF 50V J		R2010	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
C3327	QERF1CM-106Z	E CAPACITOR	10uF 16V M		R2013	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
C3330	QERF1CM-476Z	E CAPACITOR	47uF 16V M		R2014	NRSA63J-394X	MG RESISTOR	390kΩ 1/16W J	
C3331	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2015	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
C3332	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2016	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
C3333	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2017	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
C3336	NDC31HJ-180X	C CAPACITOR	18pF 50V J		R2018	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C3337	NDC31HJ-120X	C CAPACITOR	12pF 50V J		R2019	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C3341	NDC31HJ-180X	C CAPACITOR	18pF 50V J		R2021	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
C3342	QETJ0JM-477Z	E CAPACITOR	470uF 6.3V M		R2022	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C3350	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2023	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C3354	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2053	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	
C3355	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R2054	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
C3371	QEKJ1HM-336Z	E CAPACITOR	33uF 50V M		R2055	NRSA63J-3R3X	MG RESISTOR	3.3Ω 1/16W J	
C4002	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R2056	QRE141J-560Y	C RESISTOR	56Ω 1/4W J	
C4004	QERF1CM-226Z	E CAPACITOR	22uF 16V M		R2057	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C4006	QERF0JM-476Z	E CAPACITOR	47uF 6.3V M		R2058	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
C4008	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		R2059	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C4009	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R2060	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
C4010	NCB31EK-223X	C CAPACITOR	0.022uF 25V K		R2201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C4011	NCB31EK-104X	C CAPACITOR	0.1uF 25V K		R2202	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C4012	NCB31CK-224X	C CAPACITOR	0.22uF 16V K		R2203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C4014	NDC31HJ-101X	C CAPACITOR	100pF 50V J		R2204	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C4015	NDC31HJ-221X	C CAPACITOR	220pF 50V J		R2205	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C4018	NCB31HK-102X	C CAPACITOR	1000pF 50V K		R2206	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C4031	QEKJ1CM-336Z	E CAPACITOR	33uF 16V M		R2207	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C7110	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		R2208	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C7111	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M		R2209	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
C7112	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		R2210	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C7116	NDC31HJ-470X	C CAPACITOR	47pF 50V J		R2211	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
C7117	NDC31HJ-470X	C CAPACITOR	47pF 50V J		R2212	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
C7118	NDC31HJ-470X	C CAPACITOR	47pF 50V J		R2213	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C7119	NDC31HJ-470X	C CAPACITOR	47pF 50V J		R2214	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
C7201	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M		R2215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C7501	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M		R2218	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
C7502	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2219	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
C7503	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M		R2220	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C7504	NDC31HJ-151X	C CAPACITOR	150pF 50V J		R2222	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C7505	NDC31HJ-151X	C CAPACITOR	150pF 50V J		R2223	NRSA63J-511X	MG RESISTOR	510Ω 1/16W J	
C7506	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2224	NRSA63J-511X	MG RESISTOR	510Ω 1/16W J	
C7507	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M		R2225	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C7508	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2226	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
C7509	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R2227	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
					R2228	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
R1	NRSA63J-622X	MG RESISTOR	6.2kΩ 1/16W J		R2229	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R2	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J		R2230	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R3	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	C	R2231	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R2232	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R3050	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2233	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J		R3051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2234	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R3052	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2239	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3053	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2240	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3054	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2241	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R3055	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2242	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J		R3059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2243	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R3060	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2244	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J		R3061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2251	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		R3062	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R2252	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J		R3063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2253	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R3066	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R2255	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		R3069	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R2601	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R3071	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R2602	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J		R3072	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2603	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2604	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		R3074	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	C
R2605	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		R3075	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R2606	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3076	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R2607	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J		R3077	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R2608	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R3078	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2609	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3079	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R2610	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R3080	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R2611	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R3081	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R2612	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3083	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2613	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3086	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2614	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2615	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3088	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2631	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3089	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2632	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R3090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2633	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R3091	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2634	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3092	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2635	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3093	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2652	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3094	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2653	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2654	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J		R3096	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2655	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R3098	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2656	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R3107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2657	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R3108	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3213	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	
R2659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3214	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J	
R2660	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3218	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R2661	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3219	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3001	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3220	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R3004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3223	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3224	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3011	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3229	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R3012	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3013	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3231	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3233	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3015	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3234	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3016	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3235	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3017	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J		R3236	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3239	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3240	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3242	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3021	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3245	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	A,B,D,E
R3022	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J		R3251	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3024	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3256	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3025	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3257	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3026	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3258	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3029	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3311	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3030	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3312	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	C
R3031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3313	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3032	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3314	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3315	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3035	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3317	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3036	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3318	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R3038	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3322	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3039	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3325	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3040	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3326	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3041	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3327	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3042	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3330	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3044	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3334	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3046	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3047	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3336	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3048	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3337	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3338	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R3340	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R7501	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	
R3346	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R7502	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	
R3347	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R7503	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	
R3348	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R7504	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J	
R3349	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R7505	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3350	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R7506	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3351	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J		R7507	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R3352	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J		L2	QQL071J-221Y	COIL	20.0Ω 220uH J	C
R3353	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J		L3	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
R3354	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		L5	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
R3355	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		L6	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
R3356	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		L7	QQR0967-001	CHOKO COIL		
R3357	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		L10	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
R3359	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		L14	QQL071J-101Y	COIL	10.80Ω 100uH J	C
R3362	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		L201	QQL29BK-1R0Z	P COIL	0.14Ω 1uH K	
R3363	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		L203	QQL37CJ-220Z	COIL	1.30Ω 22uH J	
R3366	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		L204	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
R3369	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		L206	QQL071J-220Y	COIL	2.20Ω 22uH J	
R3371	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		L2251	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
R3372	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		L2252	QQL29BJ-151Z	P COIL	4.80Ω 150uH J	
R3373	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		L3001	QQL231J-R22Y	COIL	0.40Ω 0.22uH J	
R3374	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		L7101	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
R3375	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J		L7201	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
R3376	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J		L7501	QQL29BK-1R0Z	P COIL	0.14Ω 1uH K	
R3377	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	C	L7502	QQL29BK-1R0Z	P COIL	0.14Ω 1uH K	
R3379	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		T2051	PELN0832	OSC TRANS		
R3380	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		B1	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3381	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		B2	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3385	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		B4	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	A,B,D,E
R3386	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		B7	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3388	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		B8	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
R3390	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		B9	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
R3403	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		B203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3405	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		B3461	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3407	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C	B3462	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3505	QRE141J-181Y	C RESISTOR	180Ω 1/4W J		B3466	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3506	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		B3502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3507	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		B3504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3508	NRSA63J-121X	MG RESISTOR	120Ω 1/16W J		B3961	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3509	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		B3962	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3510	NRSA63J-121X	MG RESISTOR	120Ω 1/16W J		B3966	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3511	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		CN1	QGF1201C2-09	CONNECTOR	FFC/FPC (1-9)	
R3513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		CN2001	QGF1207C1-06	CONNECTOR	FFC/FPC (1-6)	
R3514	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		CN2002	QGB2532J1-02	CONNECTOR	B-B (1-2)	
R3515	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		CN2601	QGB1231L1-11	CONNECTOR	B-B (1-11)	
R3516	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		CN3001	QGB2032M4-12	CONNECTOR	B-B (1-12)	
R3517	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		CN3102	QGF1207C1-11	CONNECTOR	FFC/FPC (1-11)	
R3518	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		CN3103	QGB1231L1-15	CONNECTOR	B-B (1-15)	
R3519	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		CN3401	QGF1207C1-06	CONNECTOR	FFC/FPC (1-6)	
R3520	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J		CN3901	QGF1207C1-06	CONNECTOR	FFC/FPC (1-6)	
R3522	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		CN5311	QGB1231M1-15	CONNECTOR	B-B (1-15)	
R3523	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		CN7111	QGF1207C1-09	CONNECTOR	FFC/FPC (1-9)	
R3524	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		CN7112	QGF1207C1-13	CONNECTOR	FFC/FPC (1-13)	
R3529	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J		CN7113	QGB2024K1-14S	CONNECTOR	B-B (1-14)	
R3530	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		CN7114	QGB2024K1-14S	CONNECTOR	B-B (1-14)	
R3531	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		CN7115	QGB2024K1-17S	CONNECTOR	B-B (1-17)	
R3535	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J		CN7116	QGF1207C1-14	CONNECTOR	FFC/FPC (1-14)	
R3536	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J		CN7117	QGF1207C1-13	CONNECTOR	FFC/FPC (1-13)	
R3541	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J		CN7118	QGF1207C1-07	CONNECTOR	FFC/FPC (1-7)	
R3553	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		CN7119	QGF1207C1-15	CONNECTOR	FFC/FPC (1-15)	C
R3564	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		△ CP3002	QMFZ050-1R25X-E	FUSE	1.25A 125V	
R4003	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J		△ CP4002	QMFZ050-1R25X-E	FUSE	1.25A 125V	
R4004	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J		J7009	QNN0096-001	PIN JACK	OAXIAL OUT	
R4005	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J		J7010	GP1FA313TZ	OPT TRANSMITTER	OPTICAL OUT	
R4007	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		J7201	QNS0100-001	3.5 JACK	SAT CONTROL	
R4008	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		JS3001	NSW0238-001	ROTARY ENCODER		
R4009	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		K2001	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R4010	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		K2002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R4012	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		K2003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R4013	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		K2004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R4015	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J		K2251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R4017	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		K2252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7101	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		K3001	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7102	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J		K3002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7201	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		K3003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7202	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J		K3004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7203	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J						
R7204	QRE121J-100Y	C RESISTOR	10Ω 1/2W J						

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
K3005	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q901	2SC2412K/QRS/-X	TRANSISTOR		
K3006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q902	2SC2412K/QRS/-X	TRANSISTOR		
K3007	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q903	DTC144WKA-X	DIGI TRANSISTOR		
K3008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q904	DTC144WKA-X	DIGI TRANSISTOR		
K3009	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q907	2SA1037AK/QR/-X	TRANSISTOR		
K3010	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q908	2SA1037AK/QR/-X	TRANSISTOR		
K3011	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q912	2SA1037AK/QR/-X	TRANSISTOR		
K7501	NQR0147-004X	FERRITE BEADS			Q913	2SA1037AK/QR/-X	TRANSISTOR		
K7502	NQR0147-004X	FERRITE BEADS			Q917	2SC2412K/QRS/-X	TRANSISTOR		
K7503	NQR0147-004X	FERRITE BEADS			Q917	or 2SD601A/QRS/-X	TRANSISTOR		
OT1	LP31378-001A	BOSS(MECHA)3			Q917	or 2SC3928A/QRS/-X	TRANSISTOR		
OT2	LP31379-001A	BOSS(MECHA)4 (x2)			Q918	2SC2412K/QRS/-X	TRANSISTOR		
S3001	QSW0602-004	PUSH SWITCH	REC.SAFETY		Q918	or 2SD601A/QRS/-X	TRANSISTOR		
SD1	LP31179-001A	SHILD PLATE(PRE/REC)			Q918	or 2SC3928A/QRS/-X	TRANSISTOR		
W1	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q919	DTA144WKA-X	TRANSISTOR		
W2	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q919	or UN211E-X	DIGI TRANSISTOR		
W3	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q919	or RT1P44HC-X	DIGI TRANSISTOR		
W4	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q932	2SA1576A/QR/-X	TRANSISTOR		
W5	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q932	or 2PA1576/R/-X	TRANSISTOR		
W6	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q932	or 2SB1218A/QR/-X	TRANSISTOR		
W7	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q933	2SA1576A/QR/-X	TRANSISTOR		
W8	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q933	or 2PA1576/R/-X	TRANSISTOR		
W10	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q933	or 2SB1218A/QR/-X	TRANSISTOR		
W11	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q936	2SA1576A/QR/-X	TRANSISTOR		
W12	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q936	or 2PA1576/R/-X	TRANSISTOR		
W13	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q936	or 2SB1218A/QR/-X	TRANSISTOR		
W14	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q941	2SA1037AK/QR/-X	TRANSISTOR		
W15	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q942	DTC114TKA-X	TRANSISTOR		
W16	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q943	DTC144WKA-X	DIGI TRANSISTOR		
W17	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Q944	DTC114EKA-X	TRANSISTOR		
W18	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J						
W19	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		D902	QRE141J-181Y	C RESISTOR	180Ω 1/4W J	
W20	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		D904	MTZJ9.1B-T2	Z DIODE		
W21	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		D904	or RD9.1ES/B2/-T2	Z DIODE		
W22	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		D905	1SS133-T2	DIODE		
W23	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		D905	or 1SS270A-T2	SI DIODE		
W24	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J						
W25	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C901	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	
W26	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C902	NDC31HJ-331X	C CAPACITOR	330pF 50V J	
W27	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C903	NDC31HJ-331X	C CAPACITOR	330pF 50V J	
W29	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C904	NDC31HJ-331X	C CAPACITOR	330pF 50V J	
W30	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C905	NDC31HJ-331X	C CAPACITOR	330pF 50V J	
W31	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C906	NCB31HK-471X	C CAPACITOR	470pF 50V K	
W32	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C907	NCB31HK-471X	C CAPACITOR	470pF 50V K	
W33	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C908	NCB31HK-471X	C CAPACITOR	470pF 50V K	
W34	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C909	NCB31HK-471X	C CAPACITOR	470pF 50V K	
W35	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C914	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	
W36	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C915	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	
W37	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C916	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	
W40	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C917	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	
W41	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C918	NDC31HJ-331X	C CAPACITOR	330pF 50V J	
W42	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C919	NDC31HJ-331X	C CAPACITOR	330pF 50V J	
W43	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C920	NDC31HJ-331X	C CAPACITOR	330pF 50V J	
W45	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C921	NDC31HJ-331X	C CAPACITOR	330pF 50V J	
W46	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C922	NCB31HK-471X	C CAPACITOR	470pF 50V K	
WR2	QUB321-06ZAZA	SIN TWIST WIRE			C923	NCB31HK-471X	C CAPACITOR	470pF 50V K	
WR3	QUB321-04ZAZA	SIN TWIST WIRE			C924	NCB31HK-471X	C CAPACITOR	470pF 50V K	
X1	QAX0740-001	CRYSTAL	4.433619MHz		C925	NCB31HK-471X	C CAPACITOR	470pF 50V K	
X3001	QAX0445-001	CRYSTAL	32.768kHz		C930	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
X3002	QAX0527-001	CRYSTAL	10.000000MHz		C932	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
X3301	QAX0444-001	CRYSTAL	32.768kHz		C934	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
X3302	QAX0527-001	CRYSTAL	10.000000MHz		C935	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	

Terminal board

Block No. [0][6]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA10233-01D3	TERMINAL BOARD ASSY		A,B,D,E
PW1	LPA10233-02C3	TERMINAL BOARD ASSY		C
IC901	HA118226F	IC		
IC902	BA7623F-X	SOP IC		

C942	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
C943	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C944	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	
C945	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C946	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C947	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C948	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C949	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C950	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C951	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C952	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C953	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local
C954	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C955	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C956	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	
C957	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C960	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C961	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	
C962	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C963	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	
C964	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C965	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C968	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C971	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	
C973	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C981	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	
C982	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	
C983	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	
C986	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C988	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C991	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	
C992	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	
C994	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	
C996	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C997	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
R901	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R902	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R903	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
R904	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	
R909	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R910	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R911	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R912	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R913	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R914	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R915	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R918	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R919	QRE141J-131Y	C RESISTOR	130Ω 1/4W J	
R920	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R921	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R922	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R923	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R924	NRSA63D-680X	MG RESISTOR	68Ω 1/16W D	
R925	NRSA63D-750X	MG RESISTOR	75Ω 1/16W D	
R926	NRSA63D-750X	MG RESISTOR	75Ω 1/16W D	
R927	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R928	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R937	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R939	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R940	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R943	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R944	QRE121J-331Y	C RESISTOR	330Ω 1/2W J	
R945	QRE121J-331Y	C RESISTOR	330Ω 1/2W J	
R949	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R950	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R951	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R952	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R953	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R954	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
R960	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R961	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R965	QRE121J-331Y	C RESISTOR	330Ω 1/2W J	
R966	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R967	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R968	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R969	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R976	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R977	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R978	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R985	NRSA63D-750X	MG RESISTOR	75Ω 1/16W D	
R986	NRSA63D-750X	MG RESISTOR	75Ω 1/16W D	
R987	NRSA63D-750X	MG RESISTOR	75Ω 1/16W D	
R988	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R989	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R990	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
R991	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R992	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R993	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R994	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R999	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
L901	QQL071J-100Y	COIL	1.40Ω 10uH J	
L902	QQL071J-100Y	COIL	1.40Ω 10uH J	
L903	QQL071J-1R0Y	COIL	0.46Ω 1uH J	
L904	QQL071J-4R7Y	COIL	1.00Ω 4.7uH J	
L905	QQL071J-4R7Y	COIL	1.00Ω 4.7uH J	
L906	QQL071J-100Y	COIL	1.40Ω 10uH J	
L907	QQL071J-100Y	COIL	1.40Ω 10uH J	
L908	QQL231J-R22Y	COIL	0.40Ω 0.22uH J	
L909	QQL071J-4R7Y	COIL	1.00Ω 4.7uH J	
L910	QQL071J-4R7Y	COIL	1.00Ω 4.7uH J	
L914	QQL071J-1R0Y	COIL	0.46Ω 1uH J	
L917	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
L918	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
L919	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
L931	QQL071J-100Y	COIL	1.40Ω 10uH J	
L932	QQL071J-100Y	COIL	1.40Ω 10uH J	
L933	QQL071J-100Y	COIL	1.40Ω 10uH J	
L934	QQL071J-100Y	COIL	1.40Ω 10uH J	
CN913	QGB2024J1-14S	CONNECTOR	B-B (1-14)	
CN914	QGB2024J1-14S	CONNECTOR	B-B (1-14)	
CN915	QGB2024J1-17S	CONNECTOR	B-B (1-17)	
ET1	QNZ0431-001Z	EARTH TERMINAL		
J901	QNZ0627-001	21P CONNECTOR	L-1 IN/OUT	
J902	QNZ0627-001	21P CONNECTOR	L-2 IN/OUT	
J905	QNN0599-002	PIN JACK	COMPONENT VIDEO OUT	
J907	QNN0295-002	PIN JACK	AUDIO OUT	
W101	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W104	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W105	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
WR95	QUB321-07ZAZA	SIN TWIST WIRE		A,C,D,E
WR96	QUB321-07ZAZA	SIN TWIST WIRE		A,C,D,E

A/C head board

Block No. [1][2]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA10158-01A1	A/C HEAD BOARD ASSY		

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

Operation / jack board

Block No. [2][7]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA10248-01C5	OPERATION/JACK BOARD ASSY		
D7202	1SS133-T2	DIODE		
D7202	or 1SS270A-T2	SI DIODE		
D7203	1SS133-T2	DIODE		
D7203	or 1SS270A-T2	SI DIODE		
D7204	RD6.8ES/B1/-T2	Z DIODE		
D7204	or MTZJ6.8A-T2	Z DIODE		
D7221	SLA-580BC3T3F	LED	ILLUMI.	
D7221	or SLA-580BCT3F	LED	ILLUMI.	
D7221	or SDBP50A0/DEGH/	LED	ILLUMI.	
D7222	SLR-325VC-T	LED	VCR REC	
D7222	or LTL-816EE-T	LED	VCR REC	
D7223	SLR-325MC-T	LED	VCR	
D7223	or LTL-816GE-T	LED	VCR	
D7223	or SLR-343MC-T	LED	VCR	
D7224	SLR-325VC-T	LED	VCR TIMER	
D7224	or LTL-816EE-T	LED	VCR TIMER	
C7202	NDC21HJ-101X	C CAPACITOR	100pF 50V J	
C7203	QCBB1HJ-101Y	C CAPACITOR	100pF 50V J	
C7204	NDC21HJ-101X	C CAPACITOR	100pF 50V J	
C7205	QCBB1HJ-101Y	C CAPACITOR	100pF 50V J	
C7206	NCB21HK-103X	C CAPACITOR	0.01uF 50V K	
C7221	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
R7202	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R7206	NRSA02J-750X	MG RESISTOR	75Ω 1/10W J	
R7207	NRSA02J-750X	MG RESISTOR	75Ω 1/10W J	
R7221	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R7222	NRSA02J-331X	MG RESISTOR	330Ω 1/10W J	
R7223	NRSA02J-331X	MG RESISTOR	330Ω 1/10W J	
R7224	NRSA02J-331X	MG RESISTOR	330Ω 1/10W J	
R7225	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
L7202	QQL071J-100Y	COIL	1.40Ω 10uH J	
L7203	QQL071J-100Y	COIL	1.40Ω 10uH J	
CN7201	QGF1209F1-13	CONNECTOR	FFC/FPC (1-13)	
CN7202	QGD2503C1-05	CONNECTOR	(1-5)	
J7201	QNN0591-001	PIN JACK	VIDEO/AUDIO	
J7204	QND0084-001	S JACK	S-VIDEO	
S7216	QSW0381-001Z	TACT SWITCH	VCR_EJECT	
S7217	QSW0381-001Z	TACT SWITCH	VCR/DVD	
S7218	QSW0381-001Z	TACT SWITCH	STANDBY/ON	
W71	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
W72	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
WR7201	QUB221-10A4XL	SIN TWIST WIRE		

Switch / display board

Block No. [2][8]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA10248-01C4	SWITCH/DISPLAY BOARD ASSY		
IC7001	UPD16315GB-3BS	IC		
IC7001	or PT6315	IC		
IC7002	GP1UM281XK	IR DETECT UNIT	38kHz	
IC7002	or PNA4652M00XB	IR DETECT UNIT	38kHz	
D7001	1SS133-T2	DIODE		
D7001	or 1SS270A-T2	SI DIODE		
D7002	1SS133-T2	DIODE		
D7002	or 1SS270A-T2	SI DIODE		
D7003	1SS133-T2	DIODE		
D7003	or 1SS270A-T2	SI DIODE		
D7004	1SS133-T2	DIODE		
D7004	or 1SS270A-T2	SI DIODE		
D7005	1SS133-T2	DIODE		

△ Symbol No.	Part No.	Part Name	Description	Local
D7005	or 1SS270A-T2	SI DIODE		
D7012	1SS133-T2	DIODE		
D7012	or 1SS270A-T2	SI DIODE		
D7013	1SS133-T2	DIODE		
D7013	or 1SS270A-T2	SI DIODE		
D7014	1SS133-T2	DIODE		
D7014	or 1SS270A-T2	SI DIODE		
D7015	1SS133-T2	DIODE		
D7015	or 1SS270A-T2	SI DIODE		
D7021	RD9.1ES/B2/-T2	Z DIODE		
D7021	or MTZJ9.1B-T2	Z DIODE		
D7041	SLR-325VC-T	LED	DVD REC	
D7041	or LTL-816EE-T	LED	DVD REC	
D7042	SLR-325MC-T	LED	VCR->DVD	
D7042	or LTL-816GE-T	LED	VCR->DVD	
D7042	or SLR-343MC-T	LED	VCR->DVD	
D7043	SLR-325VC-T	LED	DUBBING	
D7043	or LTL-816EE-T	LED	DUBBING	
D7044	SLR-325MC-T	LED	DVD->VCR	
D7044	or LTL-816GE-T	LED	DVD->VCR	
D7044	or SLR-343MC-T	LED	DVD->VCR	
D7045	SLA-580BC3T3F	LED	ILLUMI.	
D7045	or SLA-580BCT3F	LED	ILLUMI.	
D7045	or SDBP50A0/DEGH/	LED	ILLUMI.	
D7046	SLR-325VC-T	LED	DVD TIMER	
D7046	or LTL-816EE-T	LED	DVD TIMER	
D7047	SLR-325MC-T	LED	DVD	
D7047	or LTL-816GE-T	LED	DVD	
D7047	or SLR-343MC-T	LED	DVD	
C7001	NCB21EK-104X	C CAPACITOR	0.1uF 25V K	
C7002	QCFB1HZ-104Y	C CAPACITOR	0.1uF 50V Z	
C7003	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	
C7006	QEKCOJM-227Z	E CAPACITOR	220uF 6.3V M	
C7008	QERF1AM-227Z	E CAPACITOR	220uF 10V M	
C7010	NCF31HZ-473X	C CAPACITOR	0.047uF 50V Z	
C7011	NCF31HZ-473X	C CAPACITOR	0.047uF 50V Z	
C7013	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
R7001	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R7002	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R7003	QRE141J-823Y	C RESISTOR	82kΩ 1/4W J	
R7005	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R7006	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R7007	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R7009	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R7010	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
R7013	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J	
R7014	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J	
R7015	NRSA02J-102X	MG RESISTOR	1kΩ 1/10W J	
R7041	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R7042	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R7043	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R7044	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R7045	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R7046	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R7047	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R7053	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
CN7001	QGF1207C1-11	CONNECTOR	FFC/FPC (1-11)	
CN7002	QGF1209C1-04	CONNECTOR	FFC/FPC (1-4)	
DI7001	QLF0124-001	FL TUBE		
FW7001	QUM025-07A4BF	PARA RIBON WIRE		
HD1	PQ34949-1-1	FDP HOLDER(L)		
HD2	PQ34950-1-1	FDP HOLDER(R)		
OT1	LP30002-0F8A	SPACER		
S7002	QSW0381-001Z	TACT SWITCH	PR+	
S7004	QSW0381-001Z	TACT SWITCH	VCR-DVD	
S7005	QSW0381-001Z	TACT SWITCH	DUB	
S7012	QSW0381-001Z	TACT SWITCH	DVD-VCR	
S7013	QSW0381-001Z	TACT SWITCH	SLOW+	
S7014	QSW0381-001Z	TACT SWITCH	PAUSE	
S7015	QSW0381-001Z	TACT SWITCH	STOP	
S7022	QSW0381-001Z	TACT SWITCH	PR-	
S7023	QSW0381-001Z	TACT SWITCH	REC MODE	
S7024	QSW0381-001Z	TACT SWITCH	SAT	
S7032	QSW0381-001Z	TACT SWITCH	OPEN/CLOSE	
S7033	QSW0381-001Z	TACT SWITCH	SLOW-	

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local
S7034	QSW0381-001Z	TACT SWITCH	REC	
S7035	QSW0381-001Z	TACT SWITCH	PLAY	
W41	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
W43	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
W44	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	

Jack board

Block No. [3][6]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA10248-01C3	JACK BOARD ASSY		
B4121	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
B4122	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
B4123	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
B4124	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
CN4104	QGB2027M1-10S	CONNECTOR	B-B (1-10)	
J4112	QNZ0675-001	D CONNECTOR	DV IN	
K4101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K4102	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K4103	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K4104	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
OT1	QZW0021-001	PC SUPPORT		
W31	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	

Loading motor board

Block No. [5][5]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA10158-01A2	LOADING MOTOR BOARD ASSY		

Video switch board

Block No. [8][3]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA10233-02C2	VIDEO SWITCH BOARD ASSY		C
PW1	LPA10233-01C2	VIDEO SWITCH BOARD ASSY		A,B,D,E
IC501	JCP8038-I	IC		
IC501	or JCP8038	IC		
IC502	LC74793	IC		
Q503	2SD601A/QRS/-X	TRANSISTOR		
Q503	or 2SC2412K/QRS/-X	TRANSISTOR		
Q503	or 2SC3928A/QRS/-X	TRANSISTOR		
Q504	2SB709A/QR/-X	TRANSISTOR		
Q504	or 2SA1037AK/QR/-X	TRANSISTOR		
Q504	or 2SA1530A/QR/-X	TRANSISTOR		
Q505	2SB709A/QR/-X	TRANSISTOR		
Q505	or 2SA1037AK/QR/-X	TRANSISTOR		
Q505	or 2SA1530A/QR/-X	TRANSISTOR		
Q506	2SB709A/QR/-X	TRANSISTOR		
Q506	or 2SA1037AK/QR/-X	TRANSISTOR		
Q506	or 2SA1530A/QR/-X	TRANSISTOR		
D501	DA204U-X	SI DIODE		
D502	DA204U-X	SI DIODE		
C501	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	
C502	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C503	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C505	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C506	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C508	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C510	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C512	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C513	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C515	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C516	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C518	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C519	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C521	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C522	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C523	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C524	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C525	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C526	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C527	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C528	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	
C529	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	
C530	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C533	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C534	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
C535	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C536	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C537	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C539	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C540	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C541	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C543	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C545	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	
C546	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C547	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C549	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C550	NDC31HJ-820X	C CAPACITOR	82pF 50V J	
C556	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C557	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	
C558	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C559	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C571	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	
C572	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C573	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C574	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C577	NCB31CK-563X	C CAPACITOR	0.056uF 16V K	
C578	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	
C579	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	
C580	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	
C581	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	

R501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R505	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R507	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R509	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R510	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R511	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R512	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R518	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
R521	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	
R526	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R527	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R528	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R529	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R533	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R534	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R535	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R542	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R545	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R546	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R547	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R548	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R571	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R573	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R574	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R577	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R578	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
R579	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R580	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R581	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local
L501	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
L502	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
L504	QQL231J-330Y	COIL	4.7Ω 33uH J	
L508	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	
B501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
BK1	LP40425-001A	BRACKET(PWB)		
CN501	QGF1208F1-04	CONNECTOR	FFC/FPC (1-4)	
CN502	QGG2503K2-20	CONNECTOR	(1-20)	
CN504	QGF1208F1-06	CONNECTOR	FFC/FPC (1-6)	C
W51	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W52	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W53	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W54	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W55	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W56	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W57	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

SECAM board

Block No. [8][8]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA20037-01B	SECAM BOARD ASSY		C
IC301	LA7358	IC		C
IC4301	LA7357M-W	IC		C
IC4304	74HC4538D-X	IC		C
Q301	2SA1037AK/QR/-X	TRANSISTOR		C
Q301	or 2SB709A/QR/-X	TRANSISTOR		C
Q301	or 2SA1530A/QR/-X	TRANSISTOR		C
Q302	DTA144WKA-X	TRANSISTOR		C
Q302	or UN211E-X	DIGI TRANSISTOR		C
Q302	or RT1P44HC-X	DIGI TRANSISTOR		C
Q4301	2SD601A/QRS/-X	TRANSISTOR		C
Q4301	or 2SC2412K/QRS/-X	TRANSISTOR		C
Q4301	or 2SC3928A/QRS/-X	TRANSISTOR		C
Q4302	2SB709A/QR/-X	TRANSISTOR		C
Q4302	or 2SA1037AK/QR/-X	TRANSISTOR		C
Q4302	or 2SA1530A/QR/-X	TRANSISTOR		C
Q4303	2SB709A/QR/-X	TRANSISTOR		C
Q4303	or 2SA1037AK/QR/-X	TRANSISTOR		C
Q4303	or 2SA1530A/QR/-X	TRANSISTOR		C
D4301	1SS133-T2	DIODE		C
C301	NDC31HJ-151X	C CAPACITOR	150pF 50V J	C
C302	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	C
C303	NCB31EK-682X	C CAPACITOR	6800pF 25V K	C
C304	NCB31EK-682X	C CAPACITOR	6800pF 25V K	C
C305	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C307	NDC31HJ-151X	C CAPACITOR	150pF 50V J	C
C308	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C309	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C
C310	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C311	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C312	NCB31HK-102X	C CAPACITOR	1000pF 50V K	C
C313	QEKJ1HM-474Z	E CAPACITOR	0.47uF 50V M	C
C315	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	C
C316	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C317	NCB31HK-681X	C CAPACITOR	680pF 50V K	C
C318	NCB31EK-223X	C CAPACITOR	0.022uF 25V K	C
C319	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	C
C320	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C321	NDC31HG-301X	C CAPACITOR	300pF 50V G	C
C322	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	C
C323	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	C
C4301	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C4302	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	C
C4304	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C4305	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C4306	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C

△ Symbol No.	Part No.	Part Name	Description	Local
C4307	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C4308	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C4309	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	C
C4310	NDC31HJ-471X	C CAPACITOR	470pF 50V J	C
C4318	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	C
C4319	NDC31HJ-471X	C CAPACITOR	470pF 50V J	C
R301	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	C
R302	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	C
R303	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	C
R304	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	C
R305	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	C
R306	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	C
R307	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	C
R308	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	C
R309	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
R310	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	C
R311	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	C
R312	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	C
R313	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	C
R314	NRSA63D-243X	MG RESISTOR	24kΩ 1/16W D	C
R315	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	C
R316	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	C
R329	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
R4301	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	C
R4302	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
R4304	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	C
R4305	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	C
R4306	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	C
R4307	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	C
R4308	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	C
R4309	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	C
R4310	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	C
R4311	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	C
R4312	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
R4317	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	C
R4318	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	C
R4319	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	C
R4320	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
L301	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	C
L302	QQL231J-6R8Y	COIL	2.0Ω 6.8uH J	C
L303	QQL231J-270Y	COIL	4.7Ω 27uH J	C
L4301	QQL29BJ-100Z	P COIL	0.40Ω 10uH J	C
CN301	QGF1207C1-15	CONNECTOR	FFC/FPC (1-15)	C
CN4302	QGF1207C1-06	CONNECTOR	FFC/FPC (1-6)	C
W1	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
W2	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
W3	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
W4	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C
W5	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C

Junction board

Block No. [9][2]

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LPA10248-01C2	JUNCTION BOARD ASSY		
IC5501	MM1662GH-X	IC		
IC5502	MM1565AF-X	IC		
IC5503	MM1565AF-X	IC		
IC5504	MM1563EF-X	IC		
IC5505	MM1563DF-X	IC		
IC8001	BA15218F-XE	IC		
IC8001	or RC4558D-X	IC		
IC8002	AK5381VTP-X	IC		
IC8002	or AK5357VT-X	IC		
IC8201	BA15218F-XE	IC		
IC8201	or RC4558D-X	IC		
IC8202	AK4381VT-X	IC		
IC8202	or AK4385VT-X	IC		

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
Q5501	2SD1819A/QRS/-X	TRANSISTOR			C8010	QEK1EM-106Z	E CAPACITOR	10uF 25V M	
Q5501	or 2SC4081/QRS/-X	TRANSISTOR			C8011	QEK1HM-475Z	E CAPACITOR	4.7uF 50V M	
Q5501	or 2PC4081/R/-X	TRANSISTOR			C8012	NCB21HK-104X	C CAPACITOR	0.1uF 50V K	
Q5502	UN5111-X	DIGI TRANSISTOR			C8013	QEK0JM-107Z	E CAPACITOR	100uF 6.3V M	
Q5502	or DTA114EUA-X	DIGI TRANSISTOR			C8014	NCB21HK-104X	C CAPACITOR	0.1uF 50V K	
Q5502	or PDA114EU-X	DIGI TRANSISTOR			C8015	QEK0JM-107Z	E CAPACITOR	100uF 6.3V M	
Q5502	or RN2302-X	DIGI TRANSISTOR			C8016	NCB21HK-104X	C CAPACITOR	0.1uF 50V K	
Q5502	or RT1P141M-X	DIGI TRANSISTOR			C8052	QEK1CM-107Z	E CAPACITOR	100uF 16V M	
Q5503	2SD2144S/UV/-T	TRANSISTOR			C8053	NCB21HK-104X	C CAPACITOR	0.1uF 50V K	
Q5503	or 2SC3576-JVC-T	TRANSISTOR			C8055	NCB21HK-104X	C CAPACITOR	0.1uF 50V K	
Q5504	UN5211-X	DIGI TRANSISTOR			C8057	QEK1CM-107Z	E CAPACITOR	100uF 16V M	
Q5504	or DTC114EUA-X	DIGI TRANSISTOR			C8201	QEK1CM-476Z	E CAPACITOR	47uF 16V M	
Q5504	or PDT114EU-X	DIGI TRANSISTOR			C8202	NCB21HK-471X	C CAPACITOR	470pF 50V K	
Q5504	or RN1302-X	DIGI TRANSISTOR			C8203	NCB21HK-471X	C CAPACITOR	470pF 50V K	
Q5504	or RT1N141M-X	DIGI TRANSISTOR			C8204	NCB21HK-472X	C CAPACITOR	470pF 50V K	
Q5505	UN5111-X	DIGI TRANSISTOR			C8205	NCB21HK-471X	C CAPACITOR	470pF 50V K	
Q5505	or DTA114EUA-X	DIGI TRANSISTOR			C8206	NCB21HK-472X	C CAPACITOR	470pF 50V K	
Q5505	or PDA114EU-X	DIGI TRANSISTOR			C8207	NCB21HK-471X	C CAPACITOR	470pF 50V K	
Q5505	or RN2302-X	DIGI TRANSISTOR			C8208	QEK1CM-476Z	E CAPACITOR	47uF 16V M	
Q5505	or RT1P141M-X	DIGI TRANSISTOR			C8209	NCB21HK-104X	C CAPACITOR	0.1uF 50V K	
Q5506	UN5211-X	DIGI TRANSISTOR			C8210	QEK0JM-337Z	E CAPACITOR	330uF 6.3V M	
Q5506	or DTC114EUA-X	DIGI TRANSISTOR			C8211	NCB21HK-104X	C CAPACITOR	0.1uF 50V K	
Q5506	or PDT114EU-X	DIGI TRANSISTOR			R5501	QRE121J-561Y	C RESISTOR	560Ω 1/2W J	
Q5506	or RN1302-X	DIGI TRANSISTOR			R5502	QRE121J-561Y	C RESISTOR	560Ω 1/2W J	
Q5506	or RT1N141M-X	DIGI TRANSISTOR			R5503	NRSA02J-562X	MG RESISTOR	5.6kΩ 1/10W J	
Q7101	2SB1218A/QR/-X	TRANSISTOR			R5504	NRSA02J-102X	MG RESISTOR	1kΩ 1/10W J	
Q7101	or 2SA1576A/QR/-X	TRANSISTOR			R5505	NRSA02J-222X	MG RESISTOR	2.2kΩ 1/10W J	
Q7101	or 2PA1576/R/-X	TRANSISTOR			R7101	NRSA02J-122X	MG RESISTOR	1.2kΩ 1/10W J	
Q8001	2SC4081/QRS/-X	TRANSISTOR			R7102	NRSA02J-102X	MG RESISTOR	1kΩ 1/10W J	
Q8001	or 2PC4081/R/-X	TRANSISTOR			R7147	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
Q8001	or 2SD1819A/QRS/-X	TRANSISTOR			R7148	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
Q8002	2SC4081/QRS/-X	TRANSISTOR			R7149	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
Q8002	or 2PC4081/R/-X	TRANSISTOR			R7150	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
Q8002	or 2SD1819A/QRS/-X	TRANSISTOR			R7151	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
Q8003	DTC144WUA-X	DIGI TRANSISTOR			R7161	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
Q8003	or PDT144WU-X	DIGI TRANSISTOR			R7162	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
Q8003	or UN521E-X	DIGI TRANSISTOR			R8001	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
Q8003	or RN1309-X	DIGI TRANSISTOR			R8002	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
Q8004	DTC144WUA-X	DIGI TRANSISTOR			R8003	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
Q8004	or PDT144WU-X	DIGI TRANSISTOR			R8004	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
Q8004	or UN521E-X	DIGI TRANSISTOR			R8005	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
Q8004	or RN1309-X	DIGI TRANSISTOR			R8006	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
Q8005	DTA144WUA-X	DIGI TRANSISTOR			R8007	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
Q8005	or PDA144WU-X	DIGI TRANSISTOR			R8008	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
Q8005	or UN511E-X	DIGI TRANSISTOR			R8009	NRSA02J-162X	MG RESISTOR	1.6kΩ 1/10W J	
Q8005	or RN2309-X	DIGI TRANSISTOR			R8010	NRSA02J-152X	MG RESISTOR	1.5kΩ 1/10W J	
D5501	1A3G-T2	SI DIODE			R8011	NRSA02J-162X	MG RESISTOR	1.6kΩ 1/10W J	
D5501	or 10EDB20-T2	SI DIODE			R8012	NRSA02J-152X	MG RESISTOR	1.5kΩ 1/10W J	
D5501	or ERA15-02-T2	SI DIODE			R8013	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	
D5502	1SS133-T2	DIODE			R8014	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	
D5502	or 1SS270A-T2	SI DIODE			R8015	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	
D5503	MTZJ27C-T2	Z DIODE			R8016	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	
D5503	or RD27ES/B3/-T2	Z DIODE			R8017	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
C5501	NCB21AK-105X	C CAPACITOR	1uF 10V K		R8018	NRSA02J-123X	MG RESISTOR	12kΩ 1/10W J	
C5502	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M		R8019	NRSA02J-223X	MG RESISTOR	22kΩ 1/10W J	
C5503	NCB21HK-471X	C CAPACITOR	470pF 50V K		R8051	NRSA02J-221X	MG RESISTOR	220Ω 1/10W J	
C5504	NCB21AK-105X	C CAPACITOR	1uF 10V K		R8052	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
C5505	QETN1AM-107Z	E CAPACITOR	100uF 10V M		R8201	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J	
C5506	NCB21HK-471X	C CAPACITOR	470pF 50V K		R8202	NRSA02J-273X	MG RESISTOR	27kΩ 1/10W J	
C5507	NCB21AK-105X	C CAPACITOR	1uF 10V K		R8203	NRSA02J-512X	MG RESISTOR	5.1kΩ 1/10W J	
C5508	QETN1AM-107Z	E CAPACITOR	100uF 10V M		R8204	NRSA02J-121X	MG RESISTOR	120Ω 1/10W J	
C5509	NCB21HK-471X	C CAPACITOR	470pF 50V K		R8205	NRSA02J-121X	MG RESISTOR	120Ω 1/10W J	
C5510	NCB21AK-105X	C CAPACITOR	1uF 10V K		R8206	NRSA02J-512X	MG RESISTOR	5.1kΩ 1/10W J	
C5511	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M		R8207	NRSA02J-512X	MG RESISTOR	5.1kΩ 1/10W J	
C5512	NCB21HK-471X	C CAPACITOR	470pF 50V K		R8208	NRSA02J-121X	MG RESISTOR	120Ω 1/10W J	
C5513	NCB21AK-105X	C CAPACITOR	1uF 10V K		R8209	NRSA02J-121X	MG RESISTOR	120Ω 1/10W J	
C5514	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M		R8210	NRSA02J-512X	MG RESISTOR	5.1kΩ 1/10W J	
C5515	NCB21HK-471X	C CAPACITOR	470pF 50V K		R8211	NRSA02J-273X	MG RESISTOR	27kΩ 1/10W J	
C7123	NDC21HJ-120X	C CAPACITOR	12pF 50V J		R8212	NRSA02J-471X	MG RESISTOR	470Ω 1/10W J	
C7124	NDC21HJ-6R0X	C CAPACITOR	6pF 50V J		R8213	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	
C8001	NDC21HJ-101X	C CAPACITOR	100pF 50V J		R8214	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	
C8003	NDC21HJ-101X	C CAPACITOR	100pF 50V J		R8215	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	
C8005	NDC21HJ-101X	C CAPACITOR	100pF 50V J		R8216	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	
C8007	NDC21HJ-101X	C CAPACITOR	100pF 50V J		R8217	NRSA02J-103X	MG RESISTOR	10kΩ 1/10W J	
C8009	QEK1EM-106Z	E CAPACITOR	10uF 25V M		R8219	NRSA02J-432X	MG RESISTOR	4.3kΩ 1/10W J	
					R8220	NRSA02J-432X	MG RESISTOR	4.3kΩ 1/10W J	
					R8221	NRSA02J-432X	MG RESISTOR	4.3kΩ 1/10W J	


MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

Symbol No.	Part No.	Part Name	Description	Local
R8222	NRSA02J-432X	MG RESISTOR	4.3k Ω 1/10W J	
R8231	NRSA02J-222X	MG RESISTOR	2.2k Ω 1/10W J	
R8232	NRSA02J-222X	MG RESISTOR	2.2k Ω 1/10W J	
R8233	NRSA02J-102X	MG RESISTOR	1k Ω 1/10W J	
L7101	QQL29BJ-100Z	P COIL	0.40 Ω 10uH J	
L7102	QQL071J-6R8Y	COIL	1.20 Ω 6.8uH J	
L8001	QQL29BJ-220Z	P COIL	0.65 Ω 22uH J	
L8002	QQL29BJ-220Z	P COIL	0.65 Ω 22uH J	
B7101	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
B7107	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
B7112	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
B7118	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
CN5501	QGB1231M1-15	CONNECTOR	B-B (1-15)	
CN7102	QGB1231M1-15	CONNECTOR	B-B (1-15)	
CN7103	QGF1207C1-04	CONNECTOR	FFC/FPC (1-4)	
CN7104	QGF1207C1-04	CONNECTOR	FFC/FPC (1-4)	
CN7105	QGF1207C1-04	CONNECTOR	FFC/FPC (1-4)	
CN7106	QGF1016C3-04	CONNECTOR	FFC/FPC (1-4)	
CN7107	QGF1207C1-09	CONNECTOR	FFC/FPC (1-9)	
CN7108	QGB2027M6-28S	CONNECTOR	B-B (1-28)	
CN7109	QGB2027M6-28S	CONNECTOR	B-B (1-28)	
CN8001	QGB1231M1-11	CONNECTOR	B-B (1-11)	
K7101	NRSA63J-0R0X	MG RESISTOR	0 Ω 1/16W J	
K8001	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
K8002	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
K8201	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
K8202	NRSA02J-4R7X	MG RESISTOR	4.7 Ω 1/10W J	
W1	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
W2	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
W5	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
W6	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
W9	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
W10	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
W11	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
W12	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
W13	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	
W14	NRSA02J-0R0X	MG RESISTOR	0 Ω 1/10W J	

Packing materials and accessories parts list

The instruction manual to be provided with this product will differ according to the destination.

Block No.M3MM

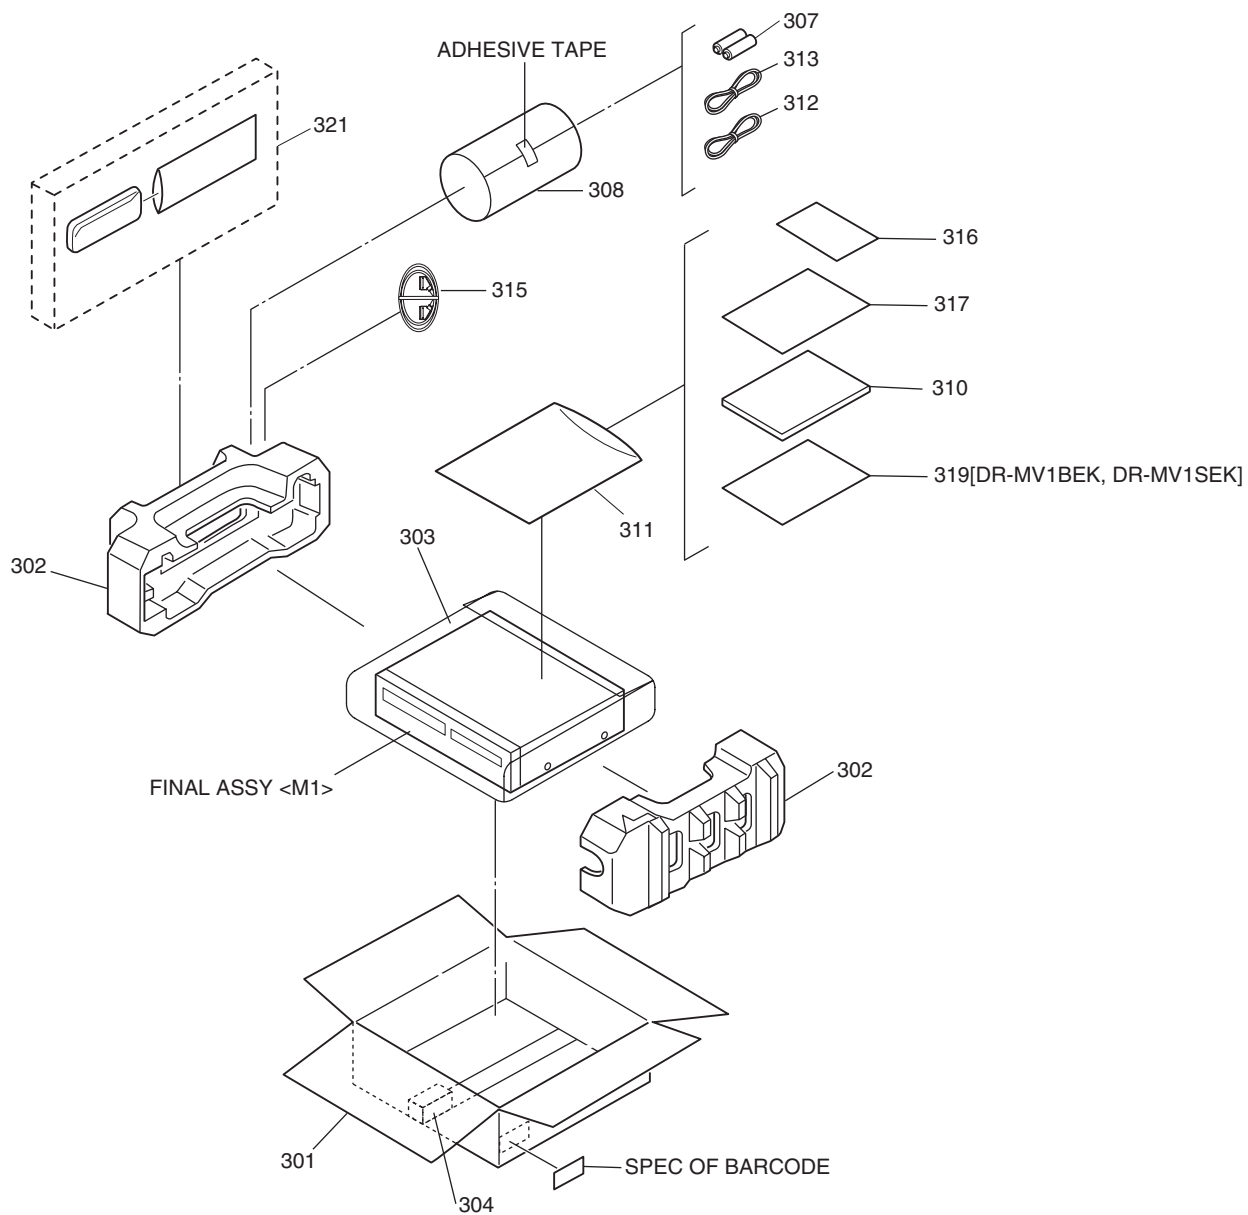

MODEL	MARK	MODEL	MARK
DR-MV1BEK	A	DR-MV1SEK	D
DR-MV1BEU	B	DR-MV1SEU	E
DR-MV1SEF	C		

Packing and accessories

Block No. [M][3][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
301	LP31338-016A	PACKING CASE		A,B
301	LP31338-013A	PACKING CASE		C,D,E
302	LP31340-001A	CUSHION ASSY		
303	PQM30021-105	POLY BAG		
304	LP31258-001A	MINI CUSHION		
307	-----	BATTERY	R6 TYPE(x2)	
308	QPC02202230P	POLY BAG	22cm x 22cm	
△ 310	LPT0939-001A	INST.BOOK	(FRENCH)	C
△ 310	LPT0938-001A	INST.BOOK	(ENGLISH)	A,D
△ 310	LPT0937-001A	INST.BOOK	(ENGLISH)	B,E
△ 310	LPT0937-002A	INST.BOOK	(GERMANY)	B,E
△ 310	LPT0937-003A	INST.BOOK	(FRENCH)	B,E
△ 310	LPT0937-004A	INST.BOOK	(DUCH)	B,E
△ 310	LPT0937-005A	INST.BOOK	(SPANISH)	B,E
△ 310	LPT0937-006A	INST.BOOK	(ITALIAN)	B,E
△ 310	LPT0937-007A	INST.BOOK	(DANISH)	B,E
△ 310	LPT0937-008A	INST.BOOK	(SWEDISH)	B,E
△ 310	LPT0937-009A	INST.BOOK	(FINNISH)	B,E
△ 310	LPT0937-010A	INST.BOOK	(NORWEGIAN)	B,E
△ 310	LPT0937-011A	INST.BOOK	(PORTUGUESE)	B,E
△ 310	LPT0937-012A	INST.BOOK	(CZECH)	B,E
△ 310	LPT0937-013A	INST.BOOK	(POLISH)	B,E
△ 310	LPT0937-014A	INST.BOOK	(HUNGARIAN)	B,E
311	QPC02503530P	POLY BAG	25cm x 35cm	
312	QAM0002-001	RF CABLE		
313	QAL0517-005	LED CABLE ASSY		
315	QAM0502-002	PERI CABLE		
316	BT-54013-7	WARRANTY CARD		B,E
317	BT-54008-6	GUARANTY CARD		A,C,D
319	LYT0194-001B	Q.CARD		A,D
321	RM-SDR006E	REMOCON		