



7-1 Cabinet Assembly

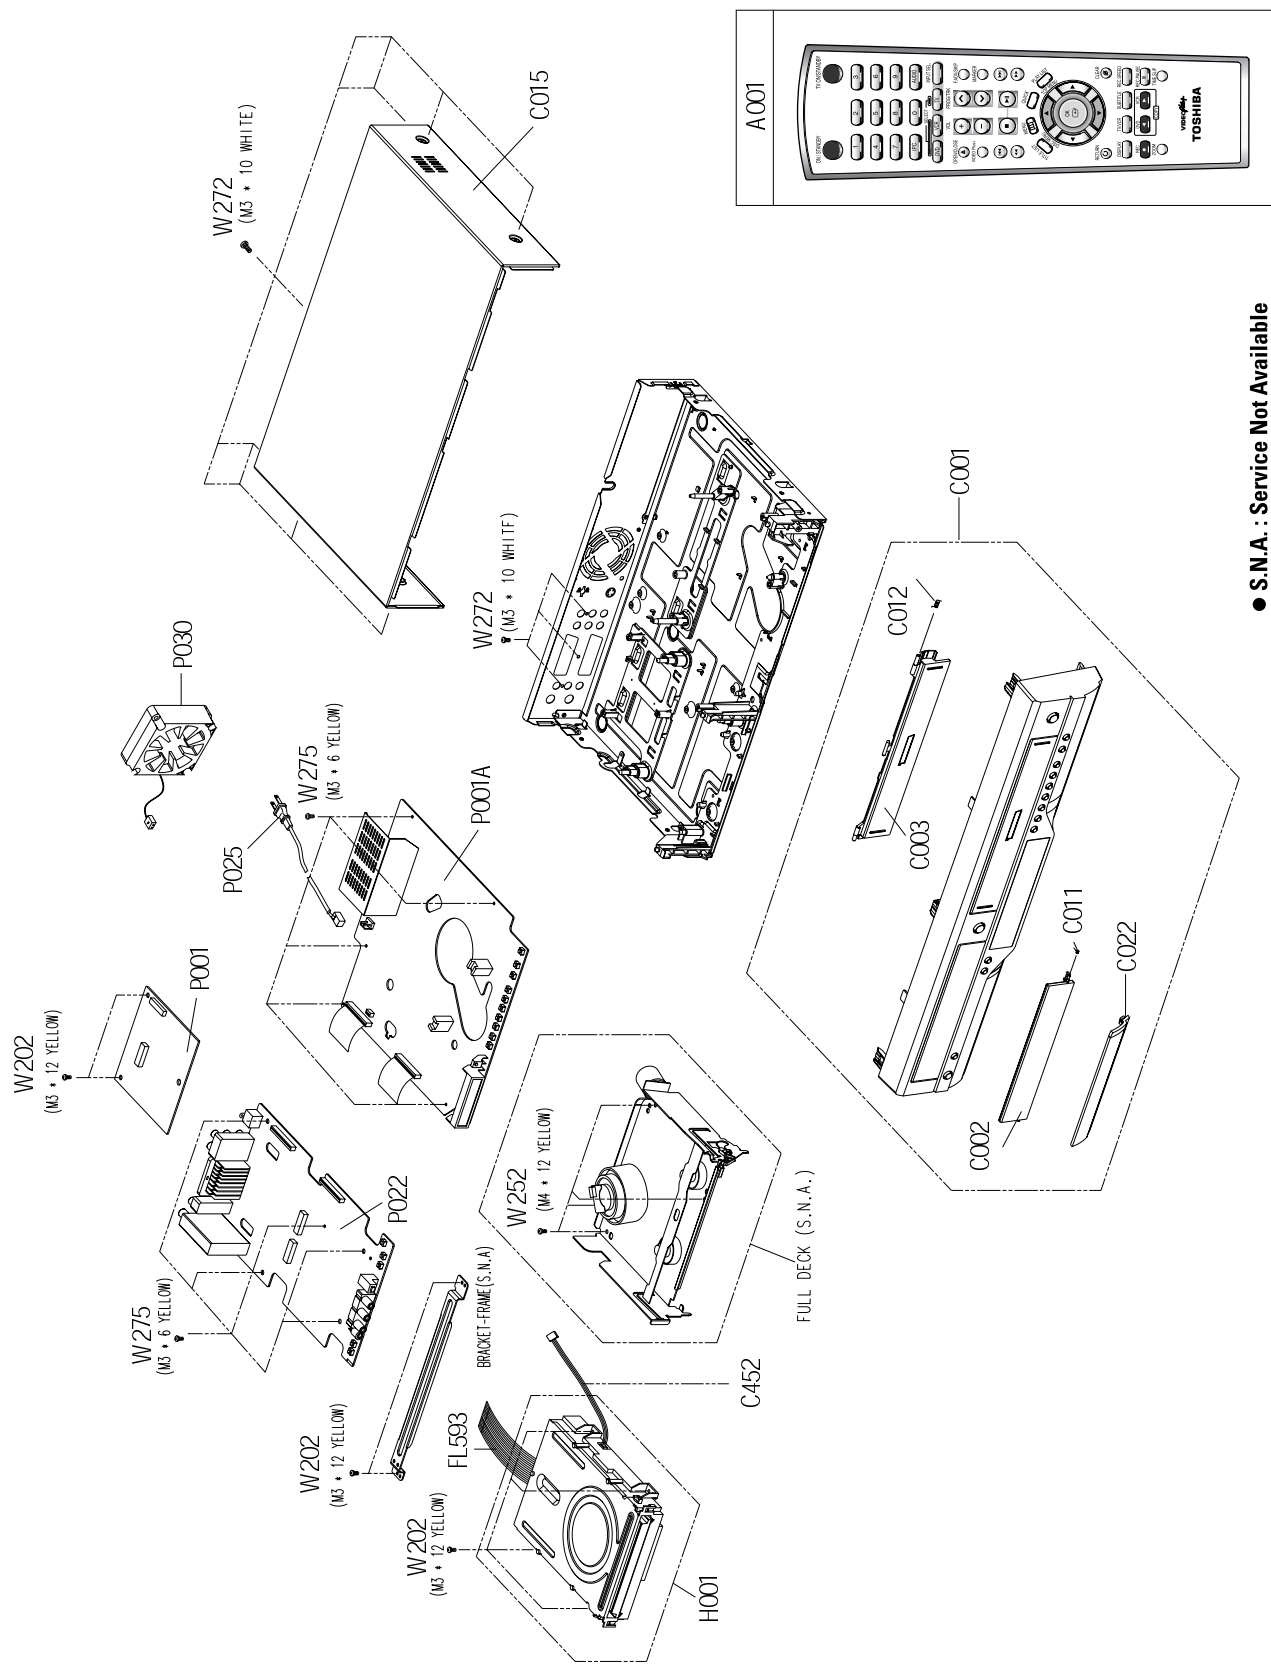

● S.N.A. : Service Not Available


Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
A001	AK59-00028E	BY644792	REMOCON-ASSY;D-VR4S-S-TB,TSB,187.5*54,-	D-VR15-S-TB Only
	AK59-00028G	BY644794	REMOCON-ASSY;D-VR4D-S-TG,TSB,187.5*54,-	D-VR30-S-TG Only
	AK59-00028G	BY644794	REMOCON-ASSY;D-VR4D-S-TG,TSB,187.5*54,-	D-VR30-S-TF Only
	AK59-00028F	BY644793	REMOCON-ASSY;D-VR4P-S-TB,TSB,187.5*54,-	D-VR35-S-TB Only
	AK59-00028E	BY644792	REMOCON-ASSY;D-VR4S-S-TB,TSB,187.5*54,-	D-VR25-S-TB Only
C001	AK97-01256A	BY731758	ASSY-PANEL FRONT;HIPS94HB GRAY,D-VR15,05	D-VR15-S-TB Only
	AK97-01256D	BY731765	ASSY-PANEL FRONT;HIPS94HB GRAY,D-VR30,05	D-VR30-S-TG Only
	AK97-01256C	BY731760	ASSY-PANEL FRONT;HIPS94HB GRAY,D-VR30/TF	D-VR30-S-TF Only
	AK97-01256E	BY731761	ASSY-PANEL FRONT;HIPS94HB GRAY,D-VR35,05	D-VR35-S-TB Only
	AK97-01256B	BY731759	ASSY-PANEL FRONT;HIPS94HB GRAY,D-VR25,05	D-VR25-S-TB Only
C002	AK64-01236A	BY731757	DOOR-TRAY;D-VR4,ABS94HB,T2.0,H26.5,W5,L1	
C003	AK64-01235A	BY731753	DOOR-CASSETTE;D-VR15,ABS94HB,T2.0,H26.5,	D-VR15-S-TB Only
	AK64-01235D	BY731764	DOOR-CASSETTE;D-VR30/TG,ABS94HB,T2.0,H26	D-VR30-S-TG Only
	AK64-01235C	BY731755	DOOR-CASSETTE;D-VR30/TF,ABS94HB,T2.0,H26	D-VR30-S-TF Only
	AK64-01235E	BY731756	DOOR-CASSETTE;D-VR35,ABS94HB,T2.0,H26.5,	D-VR35-S-TB Only
	AK64-01235B	BY731754	DOOR-CASSETTE;D-VR25,ABS94HB,T2.0,H26.5,	D-VR25-S-TB Only
C011	AK64-00334A	BY734041	DOOR-SPRING;DVD-V3500,SW PB,,,,,-,,	
C012	AC61-62032A	BY730093	SPRING ETC-MASK;SV-C130,SUS,4.4,-,-,-,-,	
C015	AK64-01073A	BY731752	CABINET-TOP;DVD-VR320,TEXTURE,T0.525,W59	
C022	AK64-01238A	BY731763	DOOR-FRONT;D-VR15,ABS94HB,T4,H30,W2.5,L1	D-VR15-S-TB Only
	AK64-01238B	BY731762	DOOR-FRONT;D-VR25,ABS94HB,T4,H30,W2.5,L1	D-VR30-S-TG Only
	AK64-01238B	BY731762	DOOR-FRONT;D-VR25,ABS94HB,T4,H30,W2.5,L1	D-VR30-S-TF Only
	AK64-01238A	BY731763	DOOR-FRONT;D-VR15,ABS94HB,T4,H30,W2.5,L1	D-VR35-S-TB Only
	AK64-01238B	BY731762	DOOR-FRONT;D-VR25,ABS94HB,T4,H30,W2.5,L1	D-VR25-S-TB Only
C452	AK39-00049A	BY634843	LEAD CONNECTOR;-,-,-,4,150,WHT,-,SMH200-	
FL593	3809-001702	BY634957	FFC CABLE-FLAT;30V,80C,290mm,40P,0.5mm,U	
H001	AK97-01211A	BY634963	ASSY-ASSY LOADER DRIVE;-SV-R250,ASSY LO	
P001	AK92-00683C	BY630501	ASSY PCB-MAIN;D-VR15-S-TB,DVD Recorder C	U.K Only
	AK92-00683D	BY630502	ASSY PCB-MAIN;D-VR30-S-TF,DVD Recorder C	Other models Only
P001A	AK92-00666F	BY630496	ASSY PCB-VCR;D-VR4XTF/TSB,DVD Recorder C	D-VR30-S-TF Only
	AK92-00666G	BY630497	ASSY PCB-VCR;D-VR4XTB/TSB,DVD Recorder C	Other models Only
P022	AK92-00667E	BY630498	ASSY PCB-JACK;D-VR4TB/TSB,DVD Recorder C	D-VR15-S-TB Only
	AK92-00667E	BY630498	ASSY PCB-JACK;D-VR4TB/TSB,DVD Recorder C	D-VR35-S-TB Only
	AK92-00667H	BY630505	ASSY PCB-JACK;D-VR4XTG/TSB,DVD Recorder	D-VR30-S-TG Only
	AK92-00667F	BY630499	ASSY PCB-JACK;D-VR4XTF/TSB,DVD Recorder	D-VR30-S-TF Only
	AK92-00667G	BY630500	ASSY PCB-JACK;D-VR4XTB/TSB,DVD Recorder	D-VR25-S-TB Only
P025	3903-000175	BY634814	CBF-POWER CORD;AT,GB,GP2,HOUSING(2P),250	U.K Only
	3903-000176	BY634777	CBF-POWER CORD;AT,EU,CP2,HOUSING(2P),250	Other models Only
P030	3103-001152	BY731622	FAN-DC;DC 12.0V,110mA,1700rpm,0.581m^	
W202	6003-000277	22709856	SCREW-TAPTITE;BH,+B,M3,L12,ZPC(YEL),SWR	
W252	AC60-12126A	70790218	SCREW-MACHINE;-,-,FE,FZY,BH,-,-,4*12,-,-	
W272	6003-001464	BY731645	SCREW-TAPTITE;BH,+B,M3,L10,ZPC(WHT)	
W275	6003-001561	BY731750	SCREW-TAPTITE;BH,+WT,B,M3,L6,ZPC(YEL),S	
	AC39-00017A	BY634253	CABLE-ETC-RF(PAL);-,MALE/FEMALE,1200MM,R	Other models Only
	AC39-00018A	BY634851	CABLE-ETC-RF(SECAM);-,BOTH MALE,1200MM,R	D-VR30-S-TF Only
	AC39-22017Z	BY634852	CABLE-RCA PHONE CORD;-,-,1500M/M,SINGLE,	
	AC39-42001U	BY631148	CABLE-RCA PHONE CORD;DOUBLE,-,1.5MT,BLK,	
	AK68-00676M	BY634959	MANUAL USERS;D-VR4S-S-TB,TSB,ENGLISH,-,M	D-VR15-S-TB Only
	AK68-00676P	BY634965	MANUAL USERS;D-VR4D-S-TG,TSB,GERMAN,ENGL	D-VR30-S-TG Only
	AK68-00676R	BY634961	MANUAL USERS;D-VR4D-S-TF,TSB,FRENCH,-,MO	D-VR30-S-TF Only
	AK68-00676N	BY634960	MANUAL USERS;D-VR4P-S-TB,TSB,ENGLISH,-,M	D-VR35-S-TB Only
	AK68-00676S	BY634962	MANUAL USERS;D-VR25-S-TB,TSB,ENGLISH,-,M	D-VR25-S-TB Only

7-2 VCR Mechanical Parts (Top Side)

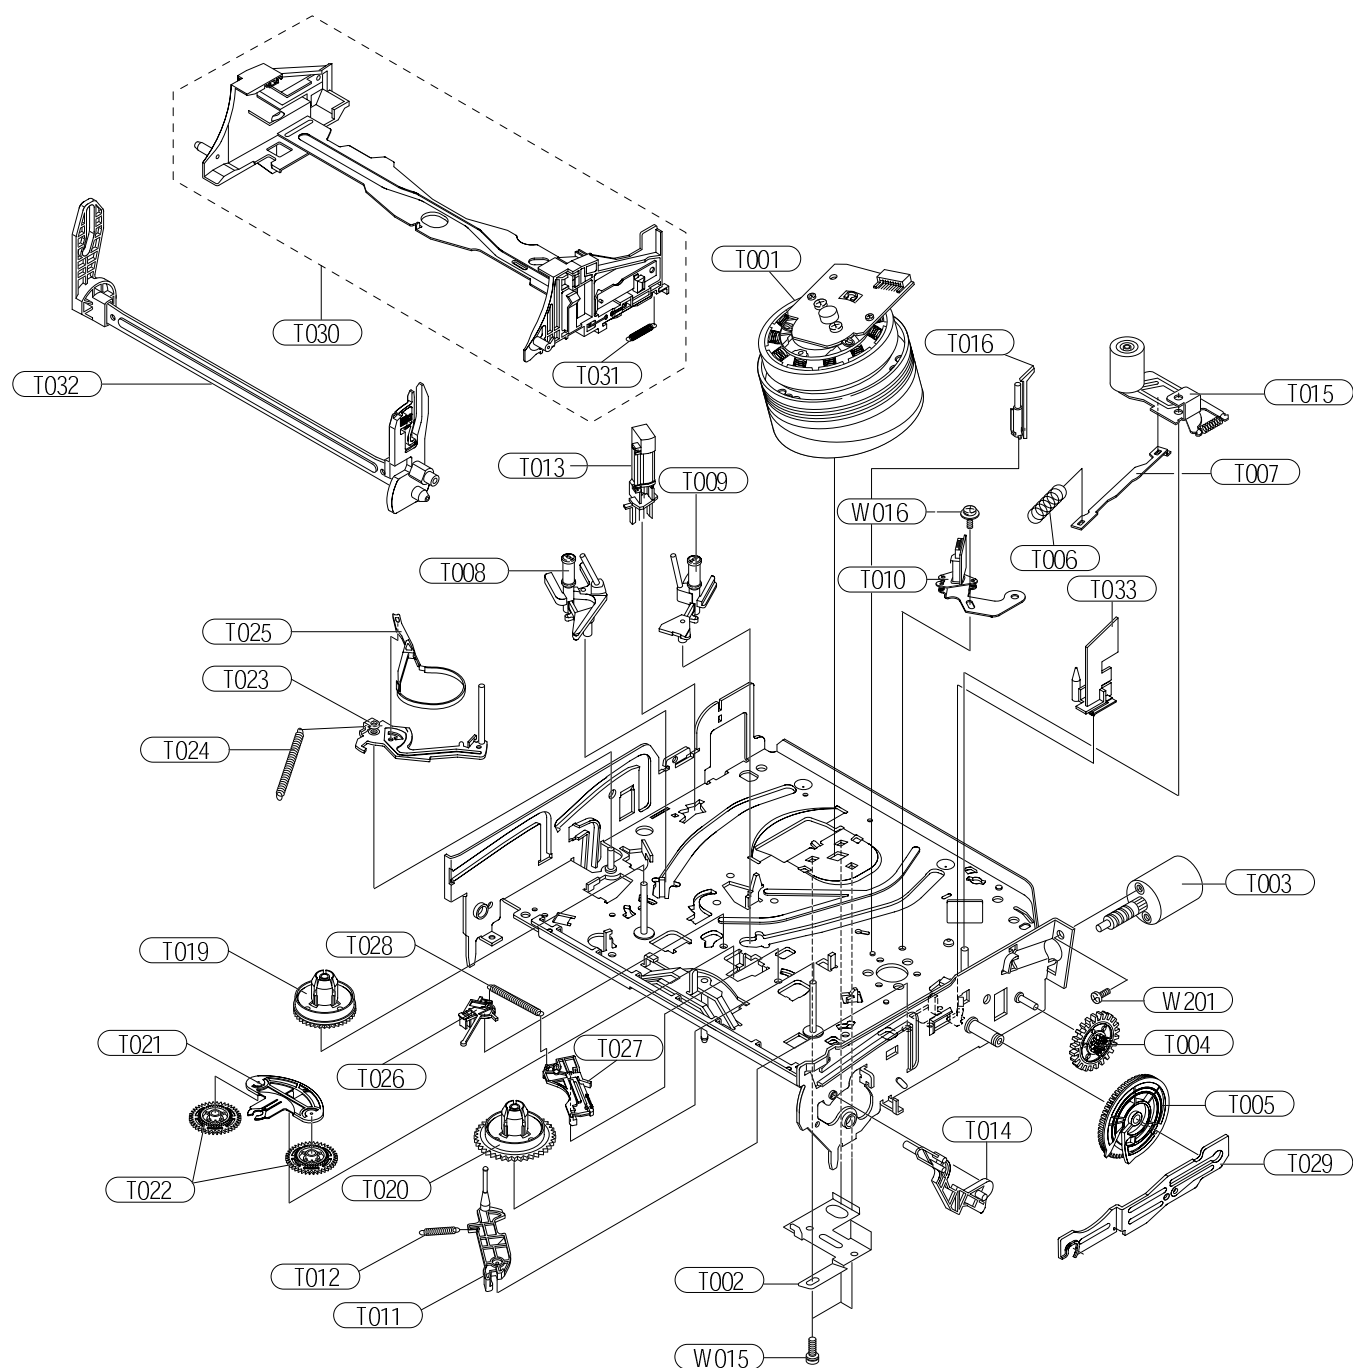

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
T001	AC97-02537A	BY630503	ASSY-CYLINDER;6SA,CX11A-DS,SECAM 6HD	
T002	AC70-00002A	BY731640	PLATE-GND DECK;X-11,SPT,TO.3,-,-,-,-	
T003	AC97-01652A	BY630459	ASSY-LOADING MOTOR;SANKYO LOADING MOTOR,	
T003	AC31-00018A	BY631184	MOTOR-LOADING ASSY;-SCORPIO2(TS-10A),-	
T004	AC66-00008A	BY730743	GEAR-WORM WHEEL;TS-10,POM,0.8,40,-,NAT,3	
T005	AC66-00011A	BY730745	GEAR-FL CAM;TS-10,POM,0.8,59,-,BLK,48.48	
T006	AC61-00105A	BY730723	SPRING ETC-PINCH DRIVE;TS-10,SUS304-WPB,	
T007	AC61-30180A	BY730244	PLATE-JOINT;X-9,SECC20/20,TO.8,-,-,-,-	
T008	AC66-80142A	BY730124	SLIDER-SUPPLY ASSY;X-9,SUS,-,-,-,SIL,-	
T009	AC66-80141A	BY730123	SLIDER-TAKE UP ASSY;X-9,SUS,-,-,-,SIL,-	
T010	AC97-02517A	BY630467	ASSY-HEAD ACE;ASSY-HEAD ACE,DX11A,DX11A	
T011	AC66-00074A	BY731526	LEVER-GUIDE(#9);TS-9,PPS,-,-,-,BLK,KHA	
T012	AC61-60553A	BY730088	SPRING ETC-GUIDE 9;X-9,SUS304-WPB,0.25,-	
T013	AC33-00015A	BY634836	HEAD-FE;HVFHP0050A,PBT3300,2PIN,NATURA	
T014	AC66-00083A	BY731636	LEVER-FL DOOR;X-11,POM(K300),-,-,-,BLU	
T015	AC97-02293A	BY731528	ASSY-UNIT PINCH;SECC+SUS304,TS-10,FOR X-	
T016	AC97-02215A	BY630397	ASSY-POST #8 GUIDE;SUS303+POM(M90-44)EQ,	
T019	AC66-10267A	BY730102	REEL-DISK S;X-9,POM,-,-,-,-,-	
T020	AC66-10268A	BY730103	REEL-DISK T;X-9,POM,-,-,-,-,-	
T021	AC66-30524A	BY730112	LEVER-IDLER;-POM,-,-,-,BLK,-	
T022	AC66-00039A	BY730760	GEAR-IDLE;TS-10,PET K3372,0.5,-,NTR,28	
T023	AC66-00035A	BY730759	LEVER-TENSION ASSY;TS-10,SECC E20/20+SU	
T024	AC61-00107A	BY730725	SPRING ETC-TENSION LEVER;TS-10,SUS304-WP	
T025	AC69-00104A	BY730762	BAND-BRAKE ASSY;TS-10,-,-,-,-,-	
T026	AC66-30550A	BY730121	LEVER-S.BRAKE ASSY;-POM+SUS,-,-,-,X-9	
T027	AC66-30549A	BY730120	LEVER-T.BRAKE ASSY;-POM+SUS,-,-,-,X-9	
T028	AC61-00106A	BY730724	SPRING ETC-BRAKE;TS-10,SUS304-WPB,-,-,-	
T029	AC66-00020A	BY730750	SLIDER-FL DRIVE;TS-10,SECC ,T1.0,-,-,SIL	
T030	AC97-02323A	BY731660	ASSY-HOLDER FL CASSETTE;SECC+POM,X-11,Fo	
T031	AC61-60561A	BY730091	SPRING ETC-FL LEVER-LR;X-9,SUS304 WPB,OD	
T032	AC97-02324A	BY731661	ASSY-LEVER FL ARM;SECC+POM,X-11,For X-11	
T033	AC61-50658A	BY730086	GUIDE-CASS. DOOR;X-9,POM,-,-,-,NTR	
W015	6006-001092	BY634416	SCREW-MACHINE;WS,PH,+,M3.0,L6.0,ZPC(YEL)	
W016	6006-001154	BY731647	SCREW-TAPTITE;WSP,PH,+,M2.6,L5.6,ZPC(YEL)	
W201	6001-001711	BY731536	SCREW-MACHINE;PH,+,M3,L3.3,ZPC(YEL)	

7-3 VCR Mechanical Parts (Bottom Side)

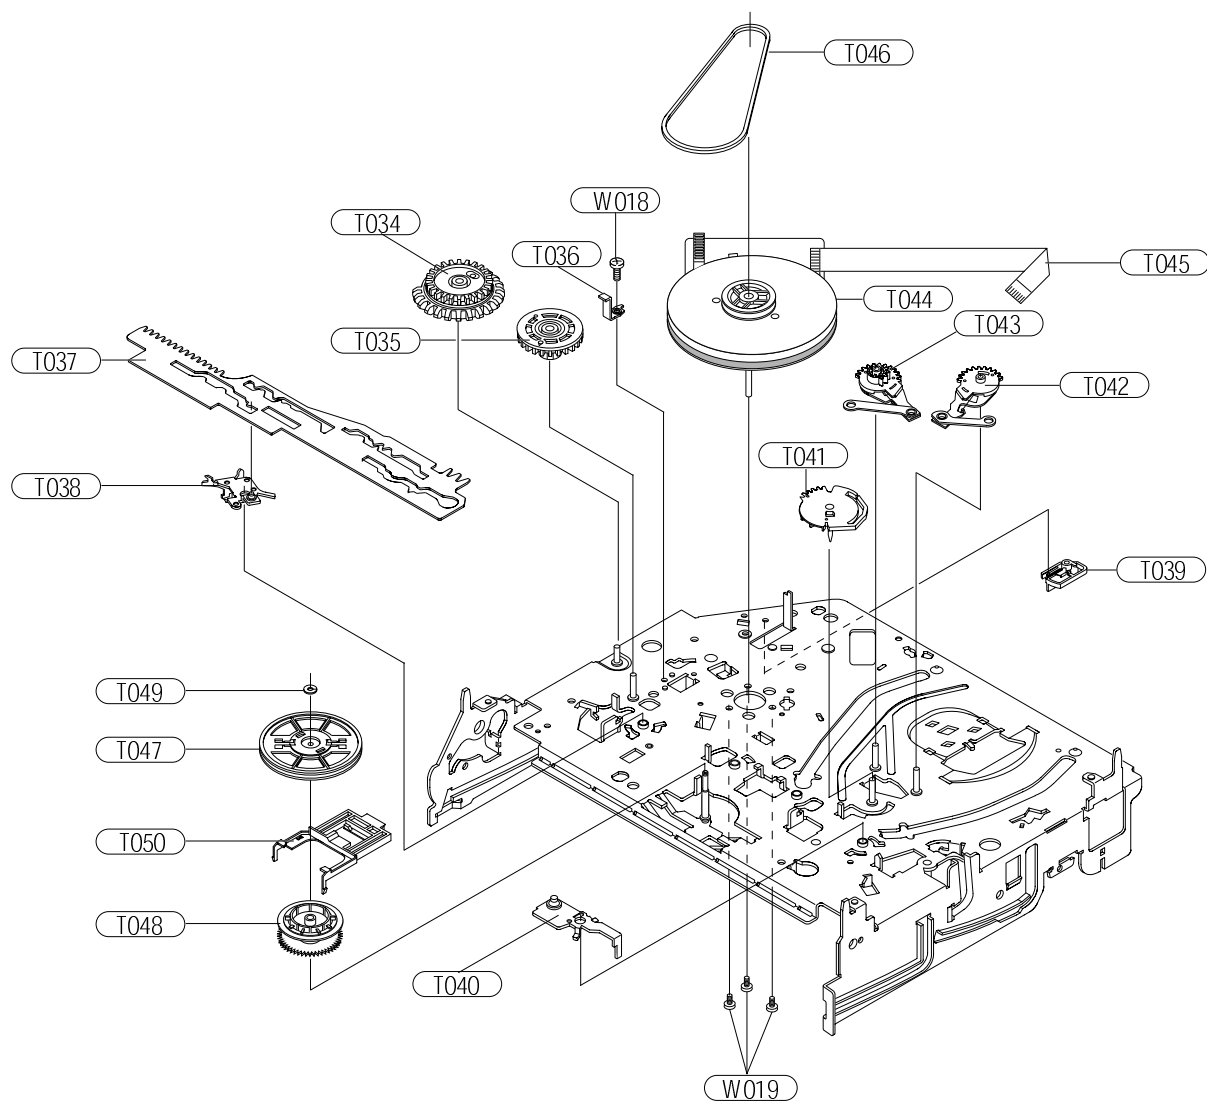

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
T034	AC66-00076A	BY731626	GEAR-JOINT 1;X-11,POM(K300),-,-,-,BLUE,-	
T035	AC66-00077A	BY731627	GEAR-JOINT 2;X-11,POM(K300),-,-,-,BLUE,-	
T036	AC61-00338A	BY731599	BRACKET-GEAR;X-11,SECC,TO.8,W20,L20,NTR,	
T037	AC66-00075A	BY731651	SLIDER-CAM;X-11,SECC ,T1.2,-,-,SIL,-	
T038	AC66-00017A	BY730748	LEVER-PINCH DRIVE;TS-10,SECC E20/20,1.0	
T039	AC70-00003A	BY634837	HOOK-CAPSTAN;-,-,L10,W10,H10,POM(M90-44)	
T040	AC66-00016A	BY730747	LEVER-TENSION DRIVE;TS-10,SECC E20/20,1	
T041	AC66-00078A	BY731628	GEAR-LOADING DRIVE;X-11,POM(K300),-,-,-,	
T042	AC97-02195A	BY630393	ASSY-LEVER LOADING S;SECC+POM+SUS,X-11,F	
T043	AC97-02196A	BY630394	ASSY-LEVER LOADING T;SECC+POM+SUS,X-11,F	
T044	3101-001419	BY634900	MOTOR-CAPSTAN;-,-,12V,90mA	
T045	3809-001270	BY634670	CABLE-FLAT;30V,80C,140MM,10P,1.25MM,UL28	
T046	AC66-60051A	BY730122	BELT-PULLEY;-,-,5CM-70,2 * 2,-,71.3,-,X-9	
T047	AC61-21012A	BY730084	HOLDER-CLUTCH ASSY;X-9,ABS,-,-,-,BLK,-	
T048	AC66-20581A	BY730111	GEAR-CENTER ASSY;X-9,POM,M=0.5,-,-,GRY,-	
T049	AC60-30306A	BY730076	FASTENER-WASHER SLIT;-,-,ID2.1,OD5.0,TO.	
T050	AC66-00006A	BY730742	LEVER-UP DOWN;TS-10,POM,-,-,-,NAT,-	
W018	6003-001450	BY731520	SCREW-TAPTITE;PH,+,-,S,M2.6,L5,ZPC(YEL)	
W019	6003-000108	BY731519	SCREW-TAPTITE;BH,+,-,B,M2.6,L6,ZPC(YEL),SW	

MEMO

8 Electrical Parts List

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
P001	AK92-00683D AK92-00683C	BY630502 BY630501	ASSY PCB-MAIN;D-VR30-S-TF,DVD Recorder C ASSY PCB-MAIN;D-VR15-S-TB,DVD Recorder C	Other models Only U.K Only
AC101	2203-000491	BY130443	C-CER,CHIP;2.2nF,10%,50V,X7R,TP;1608,-	
AC104	2402-001059	BY130556	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
AC105	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
AC4	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
AC5	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
AC6	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
AC7	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
AC8	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
AC816	2203-000236	BY130439	C-CER,CHIP;0.1nF,5%,50V,COG,TP;1608	
AC818	2203-000236	BY130439	C-CER,CHIP;0.1nF,5%,50V,COG,TP;1608	
AC820	2203-000783	BY130435	C-CER,CHIP;0.33nF,5%,50V,COG,TP;1608	
AC821	2203-001554	BY130450	C-CER,CHIP;1.8nF,10%,50V,X7R,TP;1608	
AC822	2402-000176	BY130504	C-AL,SMD;10uF,20%,16V,GP,TP;4.3x4.3x5.4	
AC823	2203-000783	BY130435	C-CER,CHIP;0.33nF,5%,50V,COG,TP;1608	
AC824	2203-001554	BY130450	C-CER,CHIP;1.8nF,10%,50V,X7R,TP;1608	
AC831	2402-000176	BY130504	C-AL,SMD;10uF,20%,16V,GP,TP;4.3x4.3x5.4	
AC891	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
AC892	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
AC908	2203-000491	BY130443	C-CER,CHIP;2.2nF,10%,50V,X7R,TP;1608,-	
AC911	2402-000176	BY130504	C-AL,SMD;10uF,20%,16V,GP,TP;4.3x4.3x5.4	
AC912	2203-000491	BY130443	C-CER,CHIP;2.2nF,10%,50V,X7R,TP;1608,-	
AC913	2402-000007	BY130502	C-AL,SMD;22uF,20%,6.3V,GP,TP;4.3x4.3x5.4	
AC914	2203-000491	BY130443	C-CER,CHIP;2.2nF,10%,50V,X7R,TP;1608,-	
AC915	2402-000176	BY130504	C-AL,SMD;10uF,20%,16V,GP,TP;4.3x4.3x5.4	
AC917	2402-000176	BY130504	C-AL,SMD;10uF,20%,16V,GP,TP;4.3x4.3x5.4	
AC918	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
AC919	2402-001059	BY130556	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
AE2	2402-001059	BY130556	C-AL,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
AE3	2402-000179	BY130505	C-AL,SMD;47uF,20%,16V,GP,TP;6.6x6.6x5.4	
AIC1	1002-001294	BY631221	IC-D/A CONVERTER;PCM1742KE,24BIT,TSSOP;1	
AIC3	1203-002178	BY631234	IC-POS.FIXED REG.;1563,SOP;7P;173MIL,PL	
AIC81	1201-000163	BY631232	IC-OP AMP;456Q,SOP;8P;173MIL,DUAL,100V/m	
AIC82	1201-000163	BY631232	IC-OP AMP;456Q,SOP;8P;173MIL,DUAL,100V/m	
AIC9	1002-001387	BY631222	IC-A/D CONVERTER;PCM1802,24BIT,SSOP;20P	
AR10	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
AR11	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
AR12	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
AR13	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
AR14	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
AR15	2007-000120	BY230350	R-CHIP;680ohm,5%,1/10W,TP;1608	
AR16	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP;1608	
AR2	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP;1608	
AR20	2007-000029	70795513	R-CHIP;0ohm,5%,1/8W,TP;2012	
AR3	2007-000115	BY230348	R-CHIP;82ohm,5%,1/10W,TP;1608	
AR4	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
AR5	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
AR51	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP;1608	
AR52	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP;1608	
AR6	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP;1608	
AR7	2007-000115	BY230348	R-CHIP;82ohm,5%,1/10W,TP;1608	
AR8	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
AR801	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP;1608	
AR802	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP;1608	
AR803	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP;1608	
AR804	2007-000087	BY230284	R-CHIP;6.8Kohm,5%,1/10W,TP;1608	

Electrical Parts List

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
AR805	2007-000126	BY230390	R-CHIP;4.3Kohm,5%,1/10W,TP,1608	
AR806	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
AR807	2007-000126	BY230390	R-CHIP;4.3Kohm,5%,1/10W,TP,1608	
AR808	2007-000087	BY230284	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	
AR809	2007-000080	BY230343	R-CHIP;2Kohm,5%,1/10W,TP,1608	
AR811	2007-000080	BY230343	R-CHIP;2Kohm,5%,1/10W,TP,1608	
AR812	2007-000080	BY230343	R-CHIP;2Kohm,5%,1/10W,TP,1608	
AR813	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
AR814	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
AR881	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
AR882	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
AR894	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
AR895	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
AR9	2007-000115	BY230348	R-CHIP;82ohm,5%,1/10W,TP,1608	
ATAR1	2011-000475	BY230366	R-NET;330HM,5%,1/16W,L,CHIP;8P,TP,32	
ATAR2	2011-000475	BY230366	R-NET;330HM,5%,1/16W,L,CHIP;8P,TP,32	
ATAR3	2011-000475	BY230366	R-NET;330HM,5%,1/16W,L,CHIP;8P,TP,32	
ATAR4	2011-000475	BY230366	R-NET;330HM,5%,1/16W,L,CHIP;8P,TP,32	
ATCN1	3708-001935	BY634823	CONNECTOR-FPC/FPC/PIC; 40P,0.5mm,SMD-S,Sn	
C110	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C111	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C112	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C115	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C117	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C119	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C123	2402-001237	BY130509	C-A L,SMD;330uF,##20%,6.3V,-,REEL,6.3X7.	
C124	2402-001237	BY130509	C-A L,SMD;330uF,##20%,6.3V,-,REEL,6.3X7.	
C125	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C126	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C127	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C128	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C129	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C130	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C140	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C141	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C142	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C143	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C144	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C145	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C146	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C147	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C150	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C166	2203-000440	BY130462	C-CER,CHIP;1nF,10%,50V,X7R,TP,1608,-	
C167	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C168	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C169	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C171	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C173	2402-000176	BY130504	C-A L,SMD;10uF,20%,16V,GP,TP,4.3x4.3x5.4	
C174	2402-001059	BY130556	C-A L,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
C177	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C178	2203-000440	BY130462	C-CER,CHIP;1nF,10%,50V,X7R,TP,1608,-	
C179	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C183	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C184	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C185	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C210	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C214	2203-000440	BY130462	C-CER,CHIP;1nF,10%,50V,X7R,TP,1608,-	
C215	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C217	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C218	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C219	2203-000440	BY130462	C-CER,CHIP;1nF,10%,50V,X7R,TP,1608,-	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
C220	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C222	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C223	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C224	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C225	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C226	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C227	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C228	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C230	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C231	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C232	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C78	2203-000746	BY130517	C-CER,CHIP;0.03nF,5%,50V,COG,TP;1608	
C79	2203-000746	BY130517	C-CER,CHIP;0.03nF,5%,50V,COG,TP;1608	
CA1	2402-001059	BY130556	C-AL,SMD;220UF,20%,6.3V,-,TP;6X6.6X6.6	
CA2	2402-001237	BY130509	C-AL,SMD;330uF,##20%,6.3V,-,REEL,6.3X7.	
CC1	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
CL1	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP;3216	
CL2	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP;3216	
CL3	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP;3216	
CN1	3710-002075	BY634832	CONNECTOR-SOCKET;30P,2R,2MM,SMD,SnPb,BLK	
CN2	3710-002075	BY634832	CONNECTOR-SOCKET;30P,2R,2MM,SMD,SnPb,BLK	
CN3	3711-005595	BY634833	CONNECTOR-SOCKET;12P,2R,2MM,SMD-S,-,BLK	
CR1	2007-000074	BY230276	R-CHIP;100ohm,5%,1/10W,TP;1608	
CR2	2007-000074	BY230276	R-CHIP;100ohm,5%,1/10W,TP;1608	
CR3	2007-000083	BY230344	R-CHIP;3Kohm,5%,1/10W,TP;1608	
DC1	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC10	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC11	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC12	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC13	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC14	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC15	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC16	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC17	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC18	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
DC19	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
DC2	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC20	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
DC21	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC22	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC23	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
DC24	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC25	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
DC3	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC4	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC5	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC6	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC66	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC7	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC8	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DC9	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
DE1	2402-000176	BY130504	C-AL,SMD;10uF,20%,16V,GPTP;4.3x4.3x5.4	
DE2	2402-000176	BY130504	C-AL,SMD;10uF,20%,16V,GPTP;4.3x4.3x5.4	
DE3	2402-001059	BY130556	C-AL,SMD;220UF,20%,6.3V,-,TP;6X6.6X6.6	
DE4	2402-001059	BY130556	C-AL,SMD;220UF,20%,6.3V,-,TP;6X6.6X6.6	
DE6	2402-001237	BY130509	C-AL,SMD;330uF,##20%,6.3V,-,REEL,6.3X7.	
DIC1	1205-002442	BY631249	IC-CODEC;DMN-8602,BGA,308P,27x27mm,PLAS	
DIC2	0801-002522	BY631215	IC-CMOS LOGIC;74VHC541,BUFFER/LINE DRIVE	
DIC3	1107-001273	BY631230	IC-FLASH MEMORY;29DL323,4Mx8/2Mx16,TSOP,	
DIC4	1106-001471	BY631229	IC-SRAM;K6X8016T 3B,512Kx16Bit,TSOP2,44	
DIC5	0801-002741	BY631218	IC-CMOS LOGIC;BU4053BCFV,MUX,SSOP;16P;17	

Electrical Parts List

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
DIC6	0802-001115	BY631219	IC-CMOS LOGIC; 74ALVCH16373, D LATCH, TSSOP	
DIC7	0801-002587	BY631216	IC-CMOS LOGIC; 74LVX541, 8BIT BUFFER/DRIVE	
DIC8	1103-001134	BY631225	IC-EEPROM; 24C040, 512x8, SOP; 8P; 5.13x3.95m	
DL1	2007-000029	70795513	R-CHIP; 0ohm, 5%, 1/8W, TP; 2012	
DR1	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR10	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR2	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR21	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR28	2007-007332	BY230364	R-CHIP; 1.18Kohm, 1%, 1/8W, TP; 2012	
DR29	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR3	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR30	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR31	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR32	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR33	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR34	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR35	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR36	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR37	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR38	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR39	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR4	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR40	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR41	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR42	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR43	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR44	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR45	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR46	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR47	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR48	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR49	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR5	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR50	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR51	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR52	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR53	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR54	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR55	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR56	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR57	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR58	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR59	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR6	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR60	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR61	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR62	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR63	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR64	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR65	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR66	2007-000074	BY230276	R-CHIP; 100ohm, 5%, 1/10W, TP; 1608	
DR67	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR68	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP; 1608	
DR69	2007-000084	BY230282	R-CHIP; 4.7Kohm, 5%, 1/10W, TP; 1608	
DR7	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP; 1608	
DR71	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR72	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR74	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR75	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR76	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP; 1608	
DR77	2007-000082	BY230233	R-CHIP; 3.3Kohm, 5%, 1/10W, TP; 1608	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
DR78	2007-000082	BY230233	R-CHIP; 3.3Kohm, 5%, 1/10W, TP, 1608	
DR79	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP, 1608	
DR8	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP, 1608	
DR80	2007-000070	BY230274	R-CHIP; 0ohm, 5%, 1/10W, TP, 1608	
DR81	2007-000084	BY230282	R-CHIP; 4.7Kohm, 5%, 1/10W, TP, 1608	
DR82	2007-000084	BY230282	R-CHIP; 4.7Kohm, 5%, 1/10W, TP, 1608	
DR84	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP, 1608	
DR85	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP, 1608	
DR86	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP, 1608	
DR87	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP, 1608	
DR88	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP, 1608	
DR89	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP, 1608	
DR9	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP, 1608	
DR90	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP, 1608	
DR91	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP, 1608	
DR92	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP, 1608	
DR95	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP, 1608	
DR96	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP, 1608	
DR97	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP, 1608	
DR98	2007-000071	BY230341	R-CHIP; 22ohm, 5%, 1/10W, TP, 1608	
FB23	2007-000029	70795513	R-CHIP; 0ohm, 5%, 1/8W, TP, 2012	
PC1	2203-005148	BY130480	C-CER, CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
PC10	2203-005148	BY130480	C-CER, CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
PC11	2203-000440	BY130462	C-CER, CHIP; 1nF, 10%, 50V, X7R, TP, 1608, -	
PC12	2203-005148	BY130480	C-CER, CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
PC13	2203-005148	BY130480	C-CER, CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
PC14	2203-000440	BY130462	C-CER, CHIP; 1nF, 10%, 50V, X7R, TP, 1608, -	
PC15	2203-005148	BY130480	C-CER, CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
PC16	2203-000440	BY130462	C-CER, CHIP; 1nF, 10%, 50V, X7R, TP, 1608, -	
PC17	2203-005148	BY130480	C-CER, CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
PC18	2203-001607	BY130451	C-CER, CHIP; 0.22nF, 5%, 50V, NPQ, -, 1608	
PC19	2203-005148	BY130480	C-CER, CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
PC2	2203-005148	BY130480	C-CER, CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
PC20	2203-005148	BY130480	C-CER, CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
PC21	2203-000332	BY130461	C-CER, CHIP; 0.012NF, 5%, 50V, COG, TP, 1608	
PC3	2203-000384	BY130521	C-CER, CHIP; 0.015NF, 5%, 50V, COG, TP, 1608	
PC4	2203-000384	BY130521	C-CER, CHIP; 0.015NF, 5%, 50V, COG, TP, 1608	
PC5	2203-000440	BY130462	C-CER, CHIP; 1nF, 10%, 50V, X7R, TP, 1608, -	
PC6	2203-005148	BY130480	C-CER, CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
PC7	2203-000440	BY130462	C-CER, CHIP; 1nF, 10%, 50V, X7R, TP, 1608, -	
PC8	2203-005148	BY130480	C-CER, CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
PC9	2203-000440	BY130462	C-CER, CHIP; 1nF, 10%, 50V, X7R, TP, 1608, -	
PE1	2402-001059	BY130556	C-AL, SMD; 220UF, 20%, 6.3V, -, TP, 6X6.6X6.6	
PE2	2402-001059	BY130556	C-AL, SMD; 220UF, 20%, 6.3V, -, TP, 6X6.6X6.6	
PE3	2402-000176	BY130504	C-AL, SMD; 10uF, 20%, 16V, GPT, 4.3x4.3x5.4	
PE4	2402-000176	BY130504	C-AL, SMD; 10uF, 20%, 16V, GPT, 4.3x4.3x5.4	
PE5	2402-000170	BY130503	C-AL, SMD; 1uF, 20%, 50V, GPT, 4.3x4.3x5.4	
PIC1	1205-001988	BY631248	IC-DATA COMM./GEN.; TSB41AB1-PA, QFP, 64P	
PL1	2007-000033	70693337	R-CHIP; 0ohm, 5%, 1/4W, TP, 3216	
PL2	3301-000353	BY330075	BEAD-SMD; 120ohm, 2x1.25x0.9mm, -, TP, -, -, -	
PL3	2007-000033	70693337	R-CHIP; 0ohm, 5%, 1/4W, TP, 3216	
PR1	2007-000113	BY230328	R-CHIP; 33ohm, 5%, 1/10W, TP, 1608	
PR10	2007-000090	BY230285	R-CHIP; 10Kohm, 5%, 1/10W, TP, 1608	
PR12	2007-000078	BY230279	R-CHIP; 1Kohm, 5%, 1/10W, TP, 1608	
PR13	2007-000078	BY230279	R-CHIP; 1Kohm, 5%, 1/10W, TP, 1608	
PR14	2007-000078	BY230279	R-CHIP; 1Kohm, 5%, 1/10W, TP, 1608	
PR15	2007-000078	BY230279	R-CHIP; 1Kohm, 5%, 1/10W, TP, 1608	
PR16	2007-000078	BY230279	R-CHIP; 1Kohm, 5%, 1/10W, TP, 1608	
PR17	2007-000078	BY230279	R-CHIP; 1Kohm, 5%, 1/10W, TP, 1608	
PR18	2007-000965	BY230303	R-CHIP; 5.1Kohm, 5%, 1/10W, TP, 1608	
PR19	2007-001044	BY230362	R-CHIP; 56ohm, 5%, 1/10W, TP, 1608	

Electrical Parts List

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
PR2	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
PR20	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
PR21	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
PR22	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
PR23	2007-001056	BY230273	R-CHIP;6.2Kohm,5%,1/10W,TP,1608	
PR24	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
PR4	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
PR5	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
PR60	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
PR9	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
PRA1	2011-000002	BY230365	R-NET;220HM,5%,1/16W,L,CHIP;8P,TP,32	
PRA2	2011-000002	BY230365	R-NET;220HM,5%,1/16W,L,CHIP;8P,TP,32	
PY1	2801-004021	BY633022	CRYSTAL-SMD;24.576MHz,20ppm,28-AN,12pF,	
R1	2007-001014	BY230361	R-CHIP;510HM,5%,1/10W,TP,1608	
R213	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R214	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R215	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R216	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R217	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R218	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R219	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R220	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R221	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP,1608	
R222	2007-001014	BY230361	R-CHIP;510HM,5%,1/10W,TP,1608	
R223	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP,1608	
R224	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP,1608	
R225	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP,1608	
R226	2007-001014	BY230361	R-CHIP;510HM,5%,1/10W,TP,1608	
R227	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP,1608	
R228	2007-001014	BY230361	R-CHIP;510HM,5%,1/10W,TP,1608	
R229	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R230	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R232	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R234	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R237	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R238	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R239	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R240	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R241	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP,1608	
R242	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP,1608	
R243	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP,1608	
R246	2007-001044	BY230362	R-CHIP;56ohm,5%,1/10W,TP,1608	
R247	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP,1608	
R248	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP,1608	
R254	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
R256	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
R257	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
R67	2007-001014	BY230361	R-CHIP;510HM,5%,1/10W,TP,1608	
R68	2007-001014	BY230361	R-CHIP;510HM,5%,1/10W,TP,1608	
R69	2007-001014	BY230361	R-CHIP;510HM,5%,1/10W,TP,1608	
R70	2007-001014	BY230361	R-CHIP;510HM,5%,1/10W,TP,1608	
RC1	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
RC2	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
RC3	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
RC4	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
RC5	2203-001683	BY130486	C-CER,CHIP;0.068nF,5%,50V,NP0,TP,1608	
RE1	2402-001059	BY130556	C-A L,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
RE2	2402-001237	BY130509	C-A L,SMD;330uF,##20%,6.3V,-,REEL,6.3X7.	
RE3	2402-001059	BY130556	C-A L,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
RE4	2402-001059	BY130556	C-A L,SMD;220UF,20%,6.3V,-,TP,6X6.6X6.6	
RIC1	1203-003182	BY631242	IC-POSITIVE FIXED REG.;LP3965,TO-263,5P,10.1	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
RIC2	1203-002612	BY631236	IC-POS.I.ADJ.UST.REG.;3966,T0-263,5P,10.16	
RL1	2703-000398	BY330078	INDUCTOR-SMD;10uH,10%,3225	
RL2	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP,3216	
RL3	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP,3216	
RL5	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP,3216	
RL6	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP,3216	
RL7	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP,3216	
RP1	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RP10	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RP12	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RP14	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RP15	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RP17	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RP18	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RP19	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RP20	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RP21	2011-000002	BY230365	R-NET;220HM,5%,1/16W,L,CHIP,8P,TP,32	
RP22	2011-000002	BY230365	R-NET;220HM,5%,1/16W,L,CHIP,8P,TP,32	
RP23	2011-000002	BY230365	R-NET;220HM,5%,1/16W,L,CHIP,8P,TP,32	
RP24	2011-000002	BY230365	R-NET;220HM,5%,1/16W,L,CHIP,8P,TP,32	
RP25	2011-001194	BY230370	R-NET;51ohm,5%,1/16W,L,CHIP,8P,TP	
RP26	2011-001194	BY230370	R-NET;51ohm,5%,1/16W,L,CHIP,8P,TP	
RP27	2011-001194	BY230370	R-NET;51ohm,5%,1/16W,L,CHIP,8P,TP	
RP28	2011-001194	BY230370	R-NET;51ohm,5%,1/16W,L,CHIP,8P,TP	
RP29	2011-001194	BY230370	R-NET;51ohm,5%,1/16W,L,CHIP,8P,TP	
RP3	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RP30	2011-001194	BY230370	R-NET;51ohm,5%,1/16W,L,CHIP,8P,TP	
RP31	2011-001194	BY230370	R-NET;51ohm,5%,1/16W,L,CHIP,8P,TP	
RP34	2011-001194	BY230370	R-NET;51ohm,5%,1/16W,L,CHIP,8P,TP	
RP5	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RP7	2011-000686	BY230368	R-NET;560HM,5%,1/16W,L,CHIP,8P,TP	
RR3	2007-000962	BY230394	R-CHIP;5.1Kohm,1%,1/10W,TP,1608	
RR4	2007-000300	70795516	R-CHIP;10Kohm,5%,1/8W,TP,2012	
TC10	2203-000206	BY130352	C-CER,CHIP;100nF,10%,50V,X7R,2012	
TC11	2203-000206	BY130352	C-CER,CHIP;100nF,10%,50V,X7R,2012	
TC12	2203-000206	BY130352	C-CER,CHIP;100nF,10%,50V,X7R,2012	
TC13	2203-000206	BY130352	C-CER,CHIP;100nF,10%,50V,X7R,2012	
TC14	2203-000206	BY130352	C-CER,CHIP;100nF,10%,50V,X7R,2012	
TC15	2203-000206	BY130352	C-CER,CHIP;100nF,10%,50V,X7R,2012	
TC16	2203-000626	BY130444	C-CER,CHIP;0.022nF,5%,50V,COG,TP,1608	
TC17	2203-000626	BY130444	C-CER,CHIP;0.022nF,5%,50V,COG,TP,1608	
TC18	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC19	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC20	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC21	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC22	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC23	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC24	2203-002793	BY130032	C-CER,CHIP;1000nF,+80-20%,25V,Y5V,2012	
TC25	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC26	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC27	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC28	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC29	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC30	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC31	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC32	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC33	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC34	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC35	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC51	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
TC52	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
TD1	0402-000309	BY430128	DIODE-RECTIFIER;1SR154-400,400V,1A,SOD-1	
TE1	2402-000007	BY130502	C-A L,SMD;22uF,20%,.6.3V,GP,TP;4.3x4.3x5.	
TE2	2402-000007	BY130502	C-A L,SMD;22uF,20%,.6.3V,GP,TP;4.3x4.3x5.	
TE3	2402-001059	BY130556	C-A L,SMD;220UF,20%,.6.3V,-,TP;6X6.6X6.6	
TE4	2402-001059	BY130556	C-A L,SMD;220UF,20%,.6.3V,-,TP;6X6.6X6.6	
TIC1	1204-002436	BY631322	IC-VIDEO DECODER;TW9909,TQFP;80P;12x12mm	
TL1	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP;3216	
TL2	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP;3216	
TL3	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP;3216	
TL4	2007-000033	70693337	R-CHIP;0ohm,5%,1/4W,TP;3216	
TNR10	2011-000475	BY230366	R-NET;33OHM,5%,1/16W,L,CHIP;8P;TP;32	
TNR11	2011-000475	BY230366	R-NET;33OHM,5%,1/16W,L,CHIP;8P;TP;32	
TR10	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP;1608	
TR11	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP;1608	
TR12	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP;1608	
TR13	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP;1608	
TR14	2007-000109	BY130423	R-CHIP;1Mohm,5%,1/10W,TP;1608	
TR15	2007-000071	BY230341	R-CHIP;22ohm,5%,1/10W,TP;1608	
TR16	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
TR17	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
TR19	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
TR20	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
TR21	2007-000113	BY230328	R-CHIP;33ohm,5%,1/10W,TP;1608	
TR22	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP;1608	
TR75	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP;1608	
TX1	2801-004095	BY633031	CRYSTAL-SMD;27MHz,20ppm,28-ABY,14pF,30oh	
U23	1105-001530	BY631228	IC-DRA M;K4H561638,16Mx16Bit,TSOPII,66P	
U24	1105-001530	BY631228	IC-DRA M;K4H561638,16Mx16Bit,TSOPII,66P	
U25	1203-003038	BY631238	IC-POS I.ADJ UST REG.;LP2995,S.O,8P;4.9x3.9	
U34	0401-000008	BY430108	DIODE-SWITCHING;DAN217,80V,100MA,SOT-23,	
Y3	2801-004182	BY633025	CRYSTAL-SMD;13.5MHZ,10PPM,28-AAN,24PF,60	
P001A	AK92-00666F	BY630496	ASSY PCB-VCR;D-VR4XTF/TSB,DVD Recorder C	D-VR30-S-TF Only
	AK92-00666G	BY630497	ASSY PCB-VCR;D-VR4XTB/TSB,DVD Recorder C	Other models Only
C315	2203-000975	BY130484	C-CER,CHIP;47nF,10%,25V,X7R,TP;1608,-	
C319	2203-000843	BY130518	C-CER,CHIP;39nF,10%,25V,X7R,TP;1608,-	
C320	2203-000975	BY130484	C-CER,CHIP;47nF,10%,25V,X7R,TP;1608,-	
C321	2203-002398	BY130454	C-CER,CHIP;22nF,10%,50V,X7R,TP;1608	
C324	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C327	2203-001211	BY130448	C-CER,CHIP;8.2nF,10%,50V,X7R,TP;1608	
C328	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C329	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C330	2203-000975	BY130484	C-CER,CHIP;47nF,10%,25V,X7R,TP;1608,-	
C331	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C332	2203-000975	BY130484	C-CER,CHIP;47nF,10%,25V,X7R,TP;1608,-	
C335	2203-001652	BY130452	C-CER,CHIP;470nF,+80-20%,16V,Y5V,TP;1608	
C337	2203-001652	BY130452	C-CER,CHIP;470nF,+80-20%,16V,Y5V,TP;1608	
C338	2203-002398	BY130454	C-CER,CHIP;22nF,10%,50V,X7R,TP;1608	
C343	2203-005065	BY130479	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	
C344	2203-000315	BY130441	C-CER,CHIP;0.12nF,5%,50V,COG,TP;1608	
C345	2203-001607	BY130451	C-CER,CHIP;0.22nF,5%,50V,NPQ,-,1608	
C347	2203-005065	BY130479	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	
C348	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C349	2203-005065	BY130479	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	
C350	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C392	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C3A08	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C3A09	2203-001103	BY130447	C-CER,CHIP;6.8nF,10%,50V,X7R,TP;1608,-	
C3A10	2203-001211	BY130448	C-CER,CHIP;8.2nF,10%,50V,X7R,TP;1608	
C3A15	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C3A18	2203-001126	BY130478	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
C3A 21A	2203-001554	BY130450	C-CER,CHIP;1.8nF,10%,50V,X7R,TP;1608	
C3A 24	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C3A 29	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C3A 70	2203-001126	BY130478	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	
C3S03	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	D-VR30-S-TF Only
C3S05	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	D-VR30-S-TF Only
C3S07	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP;1608	D-VR30-S-TF Only
C3S08	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	D-VR30-S-TF Only
C3S11	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	D-VR30-S-TF Only
C3S12A	2203-000491	BY130443	C-CER,CHIP;2.2nF,10%,50V,X7R,TP;1608,-	D-VR30-S-TF Only
C3S14A	2203-000491	BY130443	C-CER,CHIP;2.2nF,10%,50V,X7R,TP;1608,-	D-VR30-S-TF Only
C3S15	2203-000440	BY130462	C-CER,CHIP;1nF,10%,50V,X7R,TP;1608,-	D-VR30-S-TF Only
C502	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C506	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C508	2203-000888	BY130483	C-CER,CHIP;4.7nF,10%,50V,X7R,TP;1608	
C511	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C513	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C517	2203-000888	BY130483	C-CER,CHIP;4.7nF,10%,50V,X7R,TP;1608	
C519	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C522	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C523	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C530	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C604	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C605	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C606	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C607	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C614	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C623	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C626	2203-000626	BY130444	C-CER,CHIP;0.022nF,5%,50V,COG,TP;1608	
C627	2203-000626	BY130444	C-CER,CHIP;0.022nF,5%,50V,COG,TP;1608	
C628	2203-000681	BY130445	C-CER,CHIP;0.027nF,5%,50V,COG,TP;1608	
C633	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C635	2203-000491	BY130443	C-CER,CHIP;2.2nF,10%,50V,X7R,TP;1608,-	
C636	2203-000491	BY130443	C-CER,CHIP;2.2nF,10%,50V,X7R,TP;1608,-	
C637	2203-002041	BY130477	C-CER,CHIP;0.47nF,10%,50V,X7R,TP;1608	
C639	2203-000236	BY130439	C-CER,CHIP;0.1nF,5%,50V,COG,TP;1608	
C640	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C645	2203-000357	BY130442	C-CER,CHIP;0.15nF,5%,50V,COG,TP;1608	
C646	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C657	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C658	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C659A	2203-001140	BY130526	C-CER,CHIP;68nF,10%,16V,X7R,TP;1608	
C691	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C695	2203-000357	BY130442	C-CER,CHIP;0.15nF,5%,50V,COG,TP;1608	
C696	2203-000236	BY130439	C-CER,CHIP;0.1nF,5%,50V,COG,TP;1608	
C6P02	2203-000315	BY130441	C-CER,CHIP;0.12nF,5%,50V,COG,TP;1608	
C6P04	2203-000681	BY130445	C-CER,CHIP;0.027nF,5%,50V,COG,TP;1608	
C6P05	2203-000681	BY130445	C-CER,CHIP;0.027nF,5%,50V,COG,TP;1608	
C6P08	2203-001071	BY130465	C-CER,CHIP;0.056nF,5%,50V,COG,TP;1608	
C6P10	2203-005065	BY130479	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	
C6P13	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
C702	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP;1608	
C703	2203-000440	BY130462	C-CER,CHIP;1nF,10%,50V,X7R,TP;1608,-	
C822A	2203-000236	BY130439	C-CER,CHIP;0.1nF,5%,50V,COG,TP;1608	
IC301	1204-002140	BY631205	IC-VIDEO PROCESS;LA 71750EM-MPB-E,QFP;100	
IC3S01	1204-001921	BY631190	IC-CHROMA;LA 70100M,SOP;30P;375MIL,PLASTI	D-VR30-S-TF Only
IC501	1204-001920	BY631189	IC-AUDIO PROCESSOR;LA 72646M,QFP;80P;14x1	
IC601	A C09-00274A	BY631286	IC MICOM;UPD78F4928GF-3BA,FRESH ROM,100	
IC6P01	1204-001796	BY631284	IC-OSD PROCESSOR;LC74759JM-9820,MFP;24P,	
IC701	1003-001561	BY631280	IC-LED DRIVER;PT6961,SOP;32P;300MIL,-,40	
J 330	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP;1608	

Electrical Parts List

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
J905	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
J910	2007-000029	70795513	R-CHIP;0ohm,5%,1/8W,TP,2012	
J911	2007-000029	70795513	R-CHIP;0ohm,5%,1/8W,TP,2012	
J913	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
J914	2007-000029	70795513	R-CHIP;0ohm,5%,1/8W,TP,2012	
Q302	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	
Q601	0504-000129	70795815	TR-DIGITAL;KSR1104,NPN,200mW,47K/47K,SOT	
R1S36	2007-000490	BY230392	R-CHIP;2.2Kohm,1%,1/8W,TP,2012	
R315	2007-000122	BY230294	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
R316	2007-001179	BY230305	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
R320	2007-000458	BY230372	R-CHIP;18Kohm,5%,1/10W,TP,1608	
R321	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
R322	2007-000458	BY230372	R-CHIP;18Kohm,5%,1/10W,TP,1608	
R323	2007-000125	BY230296	R-CHIP;3.9Kohm,5%,1/10W,TP,1608	
R324	2007-000079	BY230280	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	D-VR30-S-TF Only
R327	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R328	2007-000122	BY230294	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
R329	2007-000080	BY230343	R-CHIP;2Kohm,5%,1/10W,TP,1608	
R330	2007-000087	BY230284	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	
R331	2007-000079	BY230280	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
R333	2007-001039	70795708	R-CHIP;56Kohm,5%,1/8W,TP,2012	
R334	2007-000123	BY230306	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
R336	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
R350	2007-000123	BY230306	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	D-VR30-S-TF Only
R360	2007-001196	BY230309	R-CHIP;820Kohm,5%,1/10W,TP,1608	
R372	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
R373	2007-000093	BY230308	R-CHIP;20Kohm,5%,1/10W,TP,1608	
R380	2007-000124	BY230295	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
R3A05	2007-000616	BY230300	R-CHIP;24Kohm,5%,1/10W,TP,1608	
R3A06	2007-000539	BY230357	R-CHIP;200ohm,5%,1/10W,TP,1608	
R3A07	2007-000133	BY230297	R-CHIP;330Kohm,5%,1/10W,TP,1608	
R3A08	2007-000091	BY230286	R-CHIP;12Kohm,5%,1/10W,TP,1608	
R3A09	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
R3A11	2007-000124	BY230295	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
R3A12	2007-000074	BY230276	R-CHIP;100ohm,5%,1/10W,TP,1608	
R3A13	2007-000097	BY230290	R-CHIP;47Kohm,5%,1/10W,TP,1608	
R3A14	2007-000094	BY230288	R-CHIP;22Kohm,5%,1/10W,TP,1608	
R3A16	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
R3A17	2007-000124	BY230295	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
R3A18	2007-000124	BY230295	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
R3A23	2007-000091	BY230286	R-CHIP;12Kohm,5%,1/10W,TP,1608	
R3A24	2007-000094	BY230288	R-CHIP;22Kohm,5%,1/10W,TP,1608	
R3A26	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
R3A28	2007-000124	BY230295	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
R3A51	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
R3A60	2007-000704	BY230374	R-CHIP;3.6Kohm,5%,1/10W,TP,1608	
R3A70	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R3S01	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	D-VR30-S-TF Only
R509	2007-000087	BY230284	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	
R510	2007-000913	BY230302	R-CHIP;43Kohm,5%,1/10W,TP,1608	
R511	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
R517	2007-000087	BY230284	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	
R518	2007-000913	BY230302	R-CHIP;43Kohm,5%,1/10W,TP,1608	
R545	2007-000512	BY230373	R-CHIP;2.4Kohm,5%,1/10W,TP,1608	
R546	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
R547	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
R570	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
R571	2007-000098	BY230291	R-CHIP;56Kohm,5%,1/10W,TP,1608	
R610	2007-000074	BY230276	R-CHIP;100ohm,5%,1/10W,TP,1608	
R611	2007-000074	BY230276	R-CHIP;100ohm,5%,1/10W,TP,1608	
R614	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
R615	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
R617	2007-001038	BY230376	R-CHIP;56Kohm,1%,1/10W,TP,1608	
R620	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
R621	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
R630	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
R631	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
R634	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R635	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R640	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
R657	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
R661	2007-000134	BY230298	R-CHIP;33Kohm,5%,1/10W,TP,1608	
R666	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R667	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R670	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R671	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R672	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R678	2007-000094	BY230288	R-CHIP;22Kohm,5%,1/10W,TP,1608	
R679	2007-000572	70795525	R-CHIP;220ohm,5%,1/8W,TP,2012	
R682	2007-000094	BY230288	R-CHIP;22Kohm,5%,1/10W,TP,1608	
R685	2007-000086	BY230283	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
R688	2007-000129	BY230307	R-CHIP;27Kohm,5%,1/10W,TP,1608	
R691	2007-000572	70795525	R-CHIP;220ohm,5%,1/8W,TP,2012	
R698	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
R6P05	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
R6P07	2007-000539	BY230357	R-CHIP;200ohm,5%,1/10W,TP,1608	
R6P08	2007-000118	BY230293	R-CHIP;390ohm,5%,1/10W,TP,1608	
R6P09	2007-000124	BY230295	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
R6P10	2007-000075	BY230277	R-CHIP;220ohm,5%,1/10W,TP,1608	
R703	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
R704	2007-001010	BY230360	R-CHIP;51Kohm,5%,1/10W,TP,1608	
R711	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
BD1S01	A C27-92001M	70795644	COIL-INDUCTOR;RH 3.5X6.5RS,BEAD(RADIAL),-	
C1P103	2401-003107	BY130282	C-AL;47uF,20%,16V,GPTP,5x7,5	
C1P104	2401-003107	BY130282	C-AL;47uF,20%,16V,GPTP,5x7,5	
C1P105	2401-003107	BY130282	C-AL;47uF,20%,16V,GPTP,5x7,5	
C1P107	2401-003221	BY130499	C-AL;100uF,20%,16V,GPTP,8X5,2.5	
C1P108	2401-002165	BY130280	C-AL;100uF,20%,16V,GPTP,6.3x7,5	
C1P109	2401-003107	BY130282	C-AL;47uF,20%,16V,GPTP,5x7,5	
C1P110	2401-003107	BY130282	C-AL;47uF,20%,16V,GPTP,5x7,5	
C1P111	2401-001249	BY130496	C-AL;4.7uF,20%,35V,GPTP,4x5,2.5	
C1P120	2401-000588	BY130533	C-AL;1uF,20%,50V,GPTP,3x5,2.5	
C1P121	2401-001250	70796211	C-AL;4.7uF,20%,35V,GPTP,4x5,5	
C1P122	2401-001250	70796211	C-AL;4.7uF,20%,35V,GPTP,4x5,5	
C1P123	2401-001730	70795625	C-AL;10uF,20%,50V,GPTP,5X11,5	
C1P124	2401-001250	70796211	C-AL;4.7uF,20%,35V,GPTP,4x5,5	
C1P125	2401-000414	BY130273	C-AL;10uF,20%,16V,GPTP,4x7,5	
C1P126	2401-000414	BY130273	C-AL;10uF,20%,16V,GPTP,4x7,5	
C1P127	2401-001250	70796211	C-AL;4.7uF,20%,35V,GPTP,4x5,5	
C1P128	2401-003107	BY130282	C-AL;47uF,20%,16V,GPTP,5x7,5	
C1P129	2401-003107	BY130282	C-AL;47uF,20%,16V,GPTP,5x7,5	
C1S07	2201-000012	BY130519	C-CERAMIC,DISC;0.22nF,10%,1000V,Y5P,-6.	
C1S08	2305-001029	BY130226	C-FILM,LEAD-PEF;10nF,10%,630V,TP,12x9x12	
C1S09	2401-001186	BY130551	C-AL;33uF,20%,35V,GPTP,6.3x7,2.5	
C1S10	2401-001186	BY130551	C-AL;33uF,20%,35V,GPTP,6.3x7,2.5	
C1S11	2401-000598	BY130042	C-AL;1uF,20%,50V,GPTP,4x7,5	
C1S12	2301-000481	BY130555	C-FILM,LEAD-PEF;10nF,5%,100V,TP,6.5x3.4x	
C1S32	2401-000385	70795431	C-AL;10uF,20%,100V,GPTP,6.3x11,5	
C1S34	2401-001126	BY130045	C-AL;330uF,20%,25V,W,T,TP,10x12.5,5	
C1S37	2401-001479	BY130015	C-AL;470uF,20%,10V,GPTP,6.3*11mm,5	
C1S38	2401-001479	BY130015	C-AL;470uF,20%,10V,GPTP,6.3*11mm,5	
C1S39	2301-000129	70796098	C-FILM,LEAD-PEF;100nF,5%,50V,TP,10X9X4.3	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
C1S41	2401-003059	BY130050	C-A L;1000UF,20%,16V,W,T,TP,10X16,5	
C317	2401-000588	BY130533	C-A L;1uF,20%,50V,GPTP,3x5,2.5	
C318	2401-000588	BY130533	C-A L;1uF,20%,50V,GPTP,3x5,2.5	
C322	2401-000588	BY130533	C-A L;1uF,20%,50V,GPTP,3x5,2.5	
C325	2401-001502	BY130535	C-A L;47uF,20%,16V,GPTP,6.3x5,2.5	
C326	2401-000588	BY130533	C-A L;1uF,20%,50V,GPTP,3x5,2.5	
C333	2401-000408	BY130395	C-A L;10uF,20%,16V,GPTP,3.5x5,2.5	
C339	2401-000408	BY130395	C-A L;10uF,20%,16V,GPTP,3.5x5,2.5	
C340	2401-004014	BY130554	C-A L;4.7uF,20%,16V,-,TP,4x5,2.5	
C341	2401-003107	BY130282	C-A L;47uF,20%,16V,GPTP,5x7,5	
C342	2202-002037	BY130027	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
C351	2401-003107	BY130282	C-A L;47uF,20%,16V,GPTP,5x7,5	
C352	2401-000588	BY130533	C-A L;1uF,20%,50V,GPTP,3x5,2.5	
C353	2401-000588	BY130533	C-A L;1uF,20%,50V,GPTP,3x5,2.5	
C354	2401-001502	BY130535	C-A L;47uF,20%,16V,GPTP,6.3x5,2.5	
C3A01	2401-003122	70795626	C-A L;4.7uF,20%,50V,LL,TP,5X7,5	
C3A02	2401-000922	BY130044	C-A L;22uF,20%,16V,GPTP,5x5,5	
C3A11	2301-000174	BY130375	C-FILM,LEAD-PEF;15nF,5%,100V,TP,7.2x4.0x	
C3A12	2401-000922	BY130044	C-A L;22uF,20%,16V,GPTP,5x5,5	
C3A14	2202-000263	BY130172	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
C3A16	2401-003122	70795626	C-A L;4.7uF,20%,50V,LL,TP,5X7,5	
C3A17	2401-000414	BY130273	C-A L;10uF,20%,16V,GPTP,4x7,5	
C3A23	2401-002069	BY130245	C-A L;33uF,20%,16V,GPTP,6.3x5,5	
C3A30	2401-001502	BY130535	C-A L;47uF,20%,16V,GPTP,6.3x5,2.5	
C3A40	2401-000414	BY130273	C-A L;10uF,20%,16V,GPTP,4x7,5	
C3A41	2401-000588	BY130533	C-A L;1uF,20%,50V,GPTP,3x5,2.5	
C3S01	2202-000797	70795075	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,	
C3S02	2401-000598	BY130042	C-A L;1uF,20%,50V,GPTP,4x7,5	
C3S04	2401-000598	BY130042	C-A L;1uF,20%,50V,GPTP,4x7,5	
C3S06	2401-001324	BY130534	C-A L;0.47UF,20%,50V,GP,BK,3X5,2.5	
C3S09	2401-001324	BY130534	C-A L;0.47UF,20%,50V,GP,BK,3X5,2.5	
C3S10	2401-003107	BY130282	C-A L;47uF,20%,16V,GPTP,5x7,5	
C3S14	2401-000665	BY130424	C-A L;2.2uF,20%,50V,GPTP,3.5x5,5	
C501	2401-000408	BY130395	C-A L;10uF,20%,16V,GPTP,3.5x5,2.5	
C503	2401-000909	BY130494	C-A L;22uF,20%,16V,GPTP,5x5,2.5	
C504	2401-000408	BY130395	C-A L;10uF,20%,16V,GPTP,3.5x5,2.5	
C505	2401-001249	BY130496	C-A L;4.7uF,20%,35V,GPTP,4x5,2.5	
C507	2401-000909	BY130494	C-A L;22uF,20%,16V,GPTP,5x5,2.5	
C510	2401-001502	BY130535	C-A L;47uF,20%,16V,GPTP,6.3x5,2.5	
C518	2401-000909	BY130494	C-A L;22uF,20%,16V,GPTP,5x5,2.5	
C520	2401-001249	BY130496	C-A L;4.7uF,20%,35V,GPTP,4x5,2.5	
C521	2401-000408	BY130395	C-A L;10uF,20%,16V,GPTP,3.5x5,2.5	
C524	2401-001249	BY130496	C-A L;4.7uF,20%,35V,GPTP,4x5,2.5	
C525	2401-001249	BY130496	C-A L;4.7uF,20%,35V,GPTP,4x5,2.5	
C526	2401-002165	BY130280	C-A L;100uF,20%,16V,GPTP,6.3x7,5	
C527	2202-000797	70795075	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,	
C529	2401-001250	70796211	C-A L;4.7uF,20%,35V,GPTP,4x5,5	
C537	2401-000665	BY130424	C-A L;2.2uF,20%,50V,GPTP,3.5x5,5	
C538	2401-000909	BY130494	C-A L;22uF,20%,16V,GPTP,5x5,2.5	
C541	2401-000588	BY130533	C-A L;1uF,20%,50V,GPTP,3x5,2.5	
C603	2401-000360	BY130317	C-A L;100uF,20%,50V,GPTP,8x11.5,5	
C607A	2401-001502	BY130535	C-A L;47uF,20%,16V,GPTP,6.3x5,2.5	
C609	2401-001502	BY130535	C-A L;47uF,20%,16V,GPTP,6.3x5,2.5	
C610	2202-002037	BY130027	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
C613	2401-003107	BY130282	C-A L;47uF,20%,16V,GPTP,5x7,5	
C638	2401-001250	70796211	C-A L;4.7uF,20%,35V,GPTP,4x5,5	
C641	2401-003221	BY130499	C-A L;100uF,20%,16V,GPTP,8X5,2.5	
C642	2401-001502	BY130535	C-A L;47uF,20%,16V,GPTP,6.3x5,2.5	
C661	2202-002055	BY130286	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
C662	2401-002095	BY130048	C-A L;47uF,20%,25V,GPTP,6.3x5,5	
C663	2401-000118	70796210	C-A L;1000uF,20%,10V,GPTP,10x12.5,5	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
C688	2401-001507	70795621	C-AL; 47uF, 20%, 16V, GP, TP; 6.3x5,5	
C6P01	2202-000797	70795075	C-CERAMIC, MLC-AXIAL; 10NF, 30%, 16V, Y5S, TP,	
C6P11	2401-000598	BY130042	C-AL; 1uF, 20%, 50V, GP, TP; 4x7,5	
C6P12	2401-002095	BY130048	C-AL; 47uF, 20%, 25V, GP, TP; 6.3x5,5	
C6P15	2202-000797	70795075	C-CERAMIC, MLC-AXIAL; 10NF, 30%, 16V, Y5S, TP,	
C704	2401-000118	70796210	C-AL; 1000uF, 20%, 10V, GP, TP; 10x12.5,5	
C706	2401-001502	BY130535	C-AL; 47uF, 20%, 16V, GP, TP; 6.3x5,2.5	
C708A	2202-000797	70795075	C-CERAMIC, MLC-AXIAL; 10NF, 30%, 16V, Y5S, TP,	
D1	0402-001111	BY430129	DIODE-RECTIFIER; 1N 5397GP, 600V, 1.5A, -, TP	
D1P101	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D1P102	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D1P103	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D1P106	0402-000127	70796385	DIODE-RECTIFIER; 1N 4002, 100V, 1A, DO-41, TP	
D1P107	0402-000127	70796385	DIODE-RECTIFIER; 1N 4002, 100V, 1A, DO-41, TP	
D1P108	0402-000165	BY430121	DIODE-RECTIFIER; 1N 5819, 40V, 1A, DO-41, TP	
D1P111	0402-000127	70796385	DIODE-RECTIFIER; 1N 4002, 100V, 1A, DO-41, TP	
D1P112	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D1P130	0402-000165	BY430121	DIODE-RECTIFIER; 1N 5819, 40V, 1A, DO-41, TP	
D1S05	0402-000012	BY430047	DIODE-RECTIFIER; UF4007, 1KV, 1A, DO-41, TP	
D1S06	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D1S07	0402-001195	BY430011	DIODE-RECTIFIER; F1T4, 400V, 1A, DO-204AC, TP	
D1S34	0402-001195	BY430011	DIODE-RECTIFIER; F1T4, 400V, 1A, DO-204AC, TP	
D1S35	0402-001194	BY430010	DIODE-RECTIFIER; SHG2D, 200V, 2A, -, TP	
D1S37	0402-001195	BY430011	DIODE-RECTIFIER; F1T4, 400V, 1A, DO-204AC, TP	
D1S39	0402-000127	70796385	DIODE-RECTIFIER; 1N 4002, 100V, 1A, DO-41, TP	
D2	0402-001111	BY430129	DIODE-RECTIFIER; 1N 5397GP, 600V, 1.5A, -, TP	
D3	0402-001111	BY430129	DIODE-RECTIFIER; 1N 5397GP, 600V, 1.5A, -, TP	
D301	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D302	0402-000165	BY430121	DIODE-RECTIFIER; 1N 5819, 40V, 1A, DO-41, TP	
D4	0402-001111	BY430129	DIODE-RECTIFIER; 1N 5397GP, 600V, 1.5A, -, TP	
D502	0402-000165	BY430121	DIODE-RECTIFIER; 1N 5819, 40V, 1A, DO-41, TP	
D603	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D604	0402-000165	BY430121	DIODE-RECTIFIER; 1N 5819, 40V, 1A, DO-41, TP	
D620	0402-000165	BY430121	DIODE-RECTIFIER; 1N 5819, 40V, 1A, DO-41, TP	
D688	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D701	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D702	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D703	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D704	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D706	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D707	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D708	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
D709	0401-000101	70795150	DIODE-SWITCHING; 1N 4148, 75V, 150MA, DO-35, T	
FL3A 01	2702-000166	70795862	INDUCTOR-RADIAL; 47uH, 5%, 6.0x6.4mm	
IC1S03	A C14-12006D	70795271	IC; KA 431Z, TO-92, TAPING	
IC604	A C14-12006C	70795269	IC; KA 7533, DIP,-	
L1P02	2701-000002	BY330009	INDUCTOR-AXIAL; 100uH, 10%, 4298	
L1P101	2701-000002	BY330009	INDUCTOR-AXIAL; 100uH, 10%, 4298	
L1S32	A C27-12001N	70796213	COIL CHOKE; 10uH-15%, RA, K-30, Q80, 150KHZ, -	
L301	2701-000002	BY330009	INDUCTOR-AXIAL; 100uH, 10%, 4298	
L301A	2701-000002	BY330009	INDUCTOR-AXIAL; 100uH, 10%, 4298	
L302	2701-000002	BY330009	INDUCTOR-AXIAL; 100uH, 10%, 4298	
L304	3301-000297	BY330019	BEAD-AXIAL; 25ohm, 3.6x1.2x5.7mm, -, TP, -, -	
L370	2701-000113	70795159	INDUCTOR-AXIAL; 100uH, 5%, 2534	
L3A 01	2702-000120	70795171	INDUCTOR-RADIAL; 1500uH, 5%, 6.2x7.4mm	
L3A 02	2701-000002	BY330009	INDUCTOR-AXIAL; 100uH, 10%, 4298	
L3A 03	2701-000002	BY330009	INDUCTOR-AXIAL; 100uH, 10%, 4298	
L3A 70	2702-000120	70795171	INDUCTOR-RADIAL; 1500uH, 5%, 6.2x7.4mm	
L3S01	2701-000002	BY330009	INDUCTOR-AXIAL; 100uH, 10%, 4298	
L501	2701-000002	BY330009	INDUCTOR-AXIAL; 100uH, 10%, 4298	
L502	2701-000002	BY330009	INDUCTOR-AXIAL; 100uH, 10%, 4298	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
L602	2701-000002	BY330009	INDUCTOR-A XIAL;100uH,10%,4298	
L603	2701-000002	BY330009	INDUCTOR-A XIAL;100uH,10%,4298	
L605	2701-000002	BY330009	INDUCTOR-A XIAL;100uH,10%,4298	
L6P01	2702-000108	70795168	INDUCTOR-RADIAL;100uH,5%,6.0x6.4mm	
L6P03	2701-000160	70795162	INDUCTOR-A XIAL;22uH,5%,2434	
L6P05	2701-000165	BY330052	INDUCTOR-A XIAL;27uH,5%,2434	
L702	2702-000108	70795168	INDUCTOR-RADIAL;100uH,5%,6.0x6.4mm	
Q1P101	0501-000362	BY530008	TR-SMALL SIGNAL;KSC2328A-Y,NPN,1000MW,TO	
Q1P102	0501-000362	BY530008	TR-SMALL SIGNAL;KSC2328A-Y,NPN,1000MW,TO	
Q1P103	0501-000362	BY530008	TR-SMALL SIGNAL;KSC2328A-Y,NPN,1000MW,TO	
Q1P104	0501-000398	70795136	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
Q1P105	0501-000362	BY530008	TR-SMALL SIGNAL;KSC2328A-Y,NPN,1000MW,TO	
Q1P106	0504-000142	70693084	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
Q1P107	0501-000398	70795136	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
Q1P108	0501-000362	BY530008	TR-SMALL SIGNAL;KSC2328A-Y,NPN,1000MW,TO	
Q1P109	0501-000362	BY530008	TR-SMALL SIGNAL;KSC2328A-Y,NPN,1000MW,TO	
Q1P110	0501-000362	BY530008	TR-SMALL SIGNAL;KSC2328A-Y,NPN,1000MW,TO	
Q1P111	0501-000610	70693410	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L	
Q1P112	0501-000610	70693410	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L	
Q1P113	0501-000610	70693410	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L	
Q3A01	0501-000398	70795136	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
Q3A02	0501-000303	70795134	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
Q3A03	0501-000442	70795142	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,TO-9	
Q3A04	0501-000442	70795142	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,TO-9	
Q3A05	0501-000442	70795142	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,TO-9	
Q3A06	0501-000303	70795134	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
Q6P01	0501-000303	70795134	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
Q6P02	0501-000303	70795134	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
R1P102	2001-000008	70795014	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R1P104	2001-000027	70795659	R-CARBON;1000HM,5%,1/4W,AA,TP,2.4X6.4MM	
R1P105	2001-000605	70795609	R-CARBON;3.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R1P107	2001-000734	70795040	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R1P108	2001-000812	BY230038	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R1P109	2001-000812	BY230038	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R1P110	2001-000449	70795020	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R1P121	2001-000062	70796173	R-CARBON;4700HM,5%,1/4W,AA,TP,2.4X6.4MM	
R1P122	2001-000449	70795020	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R1P123	2001-000613	70795036	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R1P125	2001-000449	70795020	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R1P131	2001-000855	BY230025	R-CARBON;5600HM,5%,1/4W,AA,TP,2.4X6.4MM	
R1S05	2001-000546	BY230318	R-CARBON;270KOHM,5%,1/4W,AA,TP,2.4X6.4M	
R1S06	2001-000869	BZ230057	R-CARBON;560HM,5%,1/8W,AA,TP,1.8X3.2MM	
R1S07	2001-000546	BY230318	R-CARBON;270KOHM,5%,1/4W,AA,TP,2.4X6.4M	
R1S08	2001-000546	BY230318	R-CARBON;270KOHM,5%,1/4W,AA,TP,2.4X6.4M	
R1S09	2001-000598	70795320	R-CARBON;3.30HM,5%,1/8W,AA,TP,1.8X3.2MM	
R1S10	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R1S11	2001-000449	70795020	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R1S12	2001-000527	70795018	R-CARBON;220HM,5%,1/8W,AA,TP,1.8X3.2MM	
R1S13	2005-001198	BY230337	R-WIRE WOUND,NON;0.18ohm,1%,1W,AA,TP,4.3	
R1S14	2001-000290	70795006	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R1S15	2001-000096	BY230036	R-CARBON(S);1MOHM,5%,1/2W,AA,TP,2.4X6.4M	
R1S31	2001-000780	70795039	R-CARBON;4700HM,5%,1/8W,AA,TP,1.8X3.2MM	
R1S32	2001-000221	BY230019	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R1S33	2001-000429	70795005	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R1S35	2004-000500	BY230388	R-METAL;2.7Kohm,1%,1/8W,AA,TP,1.8x3.2m	
R1S37	2003-000148	BY230003	R-METAL OXIDE;100ohm,5%,2W,AE,TP,6x16mm	
R325	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R326	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R335	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R374	2001-000290	70795006	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R3A04	2001-000221	BY230019	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
R3A 25	2001-000221	BY230019	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	D-VR30-S-TF Only
R3A 50	2001-000800	70795044	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R3S02	2001-000435	70795008	R-CARBON;1MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R501	2001-000780	70795039	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
R503	2001-000780	70795039	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
R512	2001-000660	70795032	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R608	2001-000864	70795047	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R609	2001-000864	70795047	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R632	2001-000429	70795005	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R633	2001-000429	70795005	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R636	2001-000281	70795004	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
R637	2001-000290	70795006	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R641	2001-000780	70795039	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
R642	2001-000780	70795039	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
R643	2001-000429	70795005	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R644	2001-000429	70795005	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R647	2001-000429	70795005	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R651	2001-000010	70795052	R-CARBON;68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R658	2001-000633	70795029	R-CARBON;30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R660	2001-000786	70795041	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R663	2001-000281	70795004	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
R664	2001-000281	70795004	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
R668	2001-000780	70795039	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
R669	2001-000780	70795039	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
R673	2001-000429	70795005	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R674	2001-000290	70795006	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R676	2001-000633	70795029	R-CARBON;30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R701	2001-000429	70795005	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R702	2001-000429	70795005	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
SW 713	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 714	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 715	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 716	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 717	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 718	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 719	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 720	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 721	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 722	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
VA 1S01	1405-001026	BY634022	VARISTOR;470V,600A,9x7mm,TP	
W002	3301-000297	BY330019	BEAD-A XIAL;25ohm,3.6x1.2x5.7mm,-,TP,-,-	
W022	3301-000297	BY330019	BEAD-A XIAL;25ohm,3.6x1.2x5.7mm,-,TP,-,-	
W074	3301-000297	BY330019	BEAD-A XIAL;25ohm,3.6x1.2x5.7mm,-,TP,-,-	
W165	3301-000297	BY330019	BEAD-A XIAL;25ohm,3.6x1.2x5.7mm,-,TP,-,-	
W237	3301-000297	BY330019	BEAD-A XIAL;25ohm,3.6x1.2x5.7mm,-,TP,-,-	
XT301	2801-001397	BY633009	CRYSTAL-UNIT;4.433619MHz,20ppm,28-AAA,S	
XT602	2801-003139	BY633010	CRYSTAL-UNIT;8MHz,50ppm,28-AAA,22pf,80oh	
ZD1P02	0403-001211	BY430015	DIODE-ZENER;MTZJ12B,11.8-12.3V,500MW,DO	
ZD1P03	0403-000720	BY430013	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
ZD1P04	0403-000717	BY430005	DIODE-ZENER;MTZJ5.1B,4.94-5.2V,500MW,DO	
ZD1S01	0403-001318	BY430107	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500MW,DO	
ZD1S02	0403-000713	BY430110	DIODE-ZENER;MTZJ20B,18.63-17.7V,500MW,DO	
C1P130	2401-001992	70796291	C-AL;2200uF,20%,10V,WT,TP,10X20MM,5	
C1S01	2401-000342	BY130532	C-AL;100uF,20%,400V,WT,-,20x30,10	
C1S02	2201-000963	BY130161	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
C1S03	2201-000963	BY130161	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
C1S04	2301-001711	BY130491	C-FILM,LEAD;220nF,##20%,275V,BK,17.5*10*	
C1S05	2301-001711	BY130491	C-FILM,LEAD;220nF,##20%,275V,BK,17.5*10*	
C1S06	2201-000987	BY130164	C-CERAMIC,DISC;2.2NF,20%,400V,Y5U,BK,12.	
C1S30	2401-003390	BY130501	C-AL;2200uF,20%,16V,LZ,TP,13x31.5,5	
C1S31	2401-003390	BY130501	C-AL;2200uF,20%,16V,LZ,TP,13x31.5,5	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
AC9	2203-000491	BY130443	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1608,-	
AD1	0407-000114	BY430113	DIODE-ARRAY;DAN 202K,80V,100mA,CA 2-3,SOT-	
AD2	0407-000114	BY430113	DIODE-ARRAY;DAN 202K,80V,100mA,CA 2-3,SOT-	
AD3	0407-000114	BY430113	DIODE-ARRAY;DAN 202K,80V,100mA,CA 2-3,SOT-	
AD4	0401-000008	BY430108	DIODE-SWITCHING;DAN 217,80V,100MA,SOT-23,	
AD5	0407-000114	BY430113	DIODE-ARRAY;DAN 202K,80V,100mA,CA 2-3,SOT-	
AE11	2401-000909	BY130494	C-AL;22uF,20%,16V,GP,TP,5x5,2.5	
AE12	2401-001502	BY130535	C-AL;47uF,20%,16V,GP,TP,6.3x5,2.5	
AE13	2401-000909	BY130494	C-AL;22uF,20%,16V,GP,TP,5x5,2.5	
AE14	2401-001502	BY130535	C-AL;47uF,20%,16V,GP,TP,6.3x5,2.5	
AE15	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
AE16	2401-002165	BY130280	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
AE3	2401-000909	BY130494	C-AL;22uF,20%,16V,GP,TP,5x5,2.5	
AE5	2401-000909	BY130494	C-AL;22uF,20%,16V,GP,TP,5x5,2.5	
AE6	2401-000909	BY130494	C-AL;22uF,20%,16V,GP,TP,5x5,2.5	
AE7	2401-000909	BY130494	C-AL;22uF,20%,16V,GP,TP,5x5,2.5	
AIC4	1201-000163	BY631232	IC-OP AMP;456Q,SOP,8P,173MIL,DUAL,100V/m	
AIC5	1201-000163	BY631232	IC-OP AMP;456Q,SOP,8P,173MIL,DUAL,100V/m	
AQ1	0504-000128	BY530074	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-23,TP	
AQ2	0504-000156	BY530075	TR-DIGITAL;KSR2103,PNP,200MW,22K/22K,SOT	
AQ3	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	
AQ4	0504-000128	BY530074	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-23,TP	
AQ5	0504-000156	BY530075	TR-DIGITAL;KSR2103,PNP,200MW,22K/22K,SOT	
AQ6	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	
AQ7	0504-000128	BY530074	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-23,TP	
AQ8	0504-000156	BY530075	TR-DIGITAL;KSR2103,PNP,200MW,22K/22K,SOT	
AQ9	0501-000002	BY430105	TR-SMALL SIGNAL;KSA 812,PNP,150MW,SOT-23,	
AR10	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
AR11	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
AR12	2007-000076	BY230310	R-CHIP;330ohm,5%,1/10W,TP,1608	
AR13	2007-000076	BY230310	R-CHIP;330ohm,5%,1/10W,TP,1608	
AR14	2007-000097	BY230290	R-CHIP;47Kohm,5%,1/10W,TP,1608	
AR15	2007-000075	BY230277	R-CHIP;220ohm,5%,1/10W,TP,1608	
AR16	2007-000075	BY230277	R-CHIP;220ohm,5%,1/10W,TP,1608	
AR17	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
AR18	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
AR28	2007-000097	BY230290	R-CHIP;47Kohm,5%,1/10W,TP,1608	
AR29	2007-000075	BY230277	R-CHIP;220ohm,5%,1/10W,TP,1608	
AR30	2007-000075	BY230277	R-CHIP;220ohm,5%,1/10W,TP,1608	
AR31	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
AR32	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
AR33	2007-000102	BY230292	R-CHIP;100Kohm,5%,1/10W,TP,1608	
AR35	2007-000102	BY230292	R-CHIP;100Kohm,5%,1/10W,TP,1608	
AR36	2001-000515	70795019	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
AR37	2001-000273	70795007	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
AR39	2007-000102	BY230292	R-CHIP;100Kohm,5%,1/10W,TP,1608	
AR40	2001-000515	70795019	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
AR41	2007-001179	BY230305	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
AR42	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
AR43	2007-000092	BY230287	R-CHIP;15Kohm,5%,1/10W,TP,1608	
AR44	2007-001010	BY230360	R-CHIP;51Kohm,5%,1/10W,TP,1608	
AR45	2007-001010	BY230360	R-CHIP;51Kohm,5%,1/10W,TP,1608	
AR46	2007-001179	BY230305	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
AR47	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
AR48	2007-000092	BY230287	R-CHIP;15Kohm,5%,1/10W,TP,1608	
AR49	2001-000837	70795045	R-CARBON;51KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR50	2007-001010	BY230360	R-CHIP;51Kohm,5%,1/10W,TP,1608	
AR52	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
AR54	2007-000102	BY230292	R-CHIP;100Kohm,5%,1/10W,TP,1608	
AR55	2007-000077	BY230278	R-CHIP;470ohm,5%,1/10W,TP,1608	
AZ1	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
AZ2	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
AZ3	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
AZ4	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
AZ5	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
AZ6	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
AZ7	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
AZ8	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
C401	2401-001502	BY130535	C-A L; 47uF, 20%, 16V, GPTP; 6.3x5, 2.5	
C402	2203-000604	BY130525	C-CER,CHIP; 22nF, 10%, 25V, X7R, TP, 1608	
C403	2401-001502	BY130535	C-A L; 47uF, 20%, 16V, GPTP; 6.3x5, 2.5	
C404	2401-001324	BY130534	C-A L; 0.47uF, 20%, 50V, GPBK, 3x5, 2.5	
C404A	2203-005148	BY130480	C-CER,CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
C405	2401-001573	BY130288	C-A L; 47uF, 20%, 50V, GPTP; 6.3x11, 2.5	
C406	2203-000257	BY130440	C-CER,CHIP; 10nF, 10%, 50V, X7R, TP, 1608	
C407	2401-001502	BY130535	C-A L; 47uF, 20%, 16V, GPTP; 6.3x5, 2.5	Not Used D-VR30-S-TF
C410	2203-000257	BY130440	C-CER,CHIP; 10nF, 10%, 50V, X7R, TP, 1608	
C4N01	2203-000140	BY130459	C-CER,CHIP; 1.5nF, 10%, 50V, X7R, TP, 1608, -	
C4N02	2401-000408	BY130395	C-A L; 10uF, 20%, 16V, GPTP; 3.5x5, 2.5	
C4N03	2203-001607	BY130451	C-CER,CHIP; 0.22nF, 5%, 50V, NPQ, -, 1608	
C4N04	2401-002569	BY130537	C-A L; 2.2uF, 20%, 50V, GPTP; 4x5, 2.5	
C4N05	2203-000257	BY130440	C-CER,CHIP; 10nF, 10%, 50V, X7R, TP, 1608	
C4N06	2203-000257	BY130440	C-CER,CHIP; 10nF, 10%, 50V, X7R, TP, 1608	
C4N07	2203-002041	BY130477	C-CER,CHIP; 0.47nF, 10%, 50V, X7R, TP, 1608	
C4N08	2203-000140	BY130459	C-CER,CHIP; 1.5nF, 10%, 50V, X7R, TP, 1608, -	
C4N09	2401-000408	BY130395	C-A L; 10uF, 20%, 16V, GPTP; 3.5x5, 2.5	
C4N10	2401-000408	BY130395	C-A L; 10uF, 20%, 16V, GPTP; 3.5x5, 2.5	
C4N11	2401-002186	BY130536	C-A L; 3.3uF, 20%, 50V, GPBK, 4x5, 2.5	
C4N12	2203-005148	BY130480	C-CER,CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
C4N13	2203-005148	BY130480	C-CER,CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
C4N14	2401-000408	BY130395	C-A L; 10uF, 20%, 16V, GPTP; 3.5x5, 2.5	
C4N15	2203-005148	BY130480	C-CER,CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
C4N16	2401-001502	BY130535	C-A L; 47uF, 20%, 16V, GPTP; 6.3x5, 2.5	
C4N17	2203-002041	BY130477	C-CER,CHIP; 0.47nF, 10%, 50V, X7R, TP, 1608	
C4N18	2203-002041	BY130477	C-CER,CHIP; 0.47nF, 10%, 50V, X7R, TP, 1608	
C4N19	2202-000279	70693047	C-CERAMIC,MLC-AXIAL; 47pF, 5%, 50V, SL, TP, 3.	
C4N21	2203-000160	BY130524	C-CER,CHIP; 0.0015NF, 0.25PF, 50V, COG, TP, 16	
C4N22	2203-000160	BY130524	C-CER,CHIP; 0.0015NF, 0.25PF, 50V, COG, TP, 16	
C4N23	2401-000588	BY130533	C-A L; 1uF, 20%, 50V, GPTP; 3x5, 2.5	
C4N24	2401-000588	BY130533	C-A L; 1uF, 20%, 50V, GPTP; 3x5, 2.5	
C4N25	2202-002037	BY130027	C-CERAMIC,MLC-AXIAL; 100nF, 80-20%, 50V, Y5V	
C4N30	2203-000257	BY130440	C-CER,CHIP; 10nF, 10%, 50V, X7R, TP, 1608	
C6P01	2202-000797	70795075	C-CERAMIC,MLC-AXIAL; 10NF, 30%, 16V, Y5S, TP,	
C6P04	2203-000681	BY130445	C-CER,CHIP; 0.027NF, 5%, 50V, COG, TP, 1608	
C6P05	2203-000681	BY130445	C-CER,CHIP; 0.027NF, 5%, 50V, COG, TP, 1608	
C6P06	2203-000440	BY130462	C-CER,CHIP; 1nF, 10%, 50V, X7R, TP, 1608, -	
C6P07	2401-003336	BY130545	C-A L; 4.7uF, 20%, 50V, GPTP; 5x5, 2	
C6P08	2203-001071	BY130465	C-CER,CHIP; 0.056NF, 5%, 50V, COG, TP, 1608	
C6P10	2401-000598	BY130042	C-A L; 1uF, 20%, 50V, GPTP; 4x7, 5	
C6P11	2401-000588	BY130533	C-A L; 1uF, 20%, 50V, GPTP; 3x5, 2.5	
C6P12	2401-002165	BY130280	C-A L; 100uF, 20%, 16V, GPTP; 6.3x7, 5	
C6P13	2203-005148	BY130480	C-CER,CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
C6P15	2203-001140	BY130526	C-CER,CHIP; 68nF, 10%, 16V, X7R, TP, 1608	
C701	2301-001679	BY130530	C-FILM,PEF; 2.2nF, 5%, 50V, TP, 5.8x3x7mm, -	
C702	2301-001679	BY130530	C-FILM,PEF; 2.2nF, 5%, 50V, TP, 5.8x3x7mm, -	
C703	2401-000408	BY130395	C-A L; 10uF, 20%, 16V, GPTP; 3.5x5, 2.5	
C704	2401-000408	BY130395	C-A L; 10uF, 20%, 16V, GPTP; 3.5x5, 2.5	
C800	2203-005918	BY130489	C-CER,CHIP; 1000NF, 10%, 6.3V, X7R, TP, 1608	
C801	2401-001543	BY130543	C-A L; 47uF, 20%, 25V, GPTP; 6.3x5mm, 2.5	
C802	2203-005148	BY130480	C-CER,CHIP; 100nF, 10%, 16V, X7R, TP, 1608	
C803	2401-001543	BY130543	C-A L; 47uF, 20%, 25V, GPTP; 6.3x5mm, 2.5	
C805	2203-005918	BY130489	C-CER,CHIP; 1000NF, 10%, 6.3V, X7R, TP, 1608	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
C805B	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C806	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C806B	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C807	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C808	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C810	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C813	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C817	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C818	2203-000815	BY130476	C-CER,CHIP;0.033NF,5%,50V,COG,TP,1608	
C819	2203-000815	BY130476	C-CER,CHIP;0.033NF,5%,50V,COG,TP,1608	
C819B	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C820	2203-000815	BY130476	C-CER,CHIP;0.033NF,5%,50V,COG,TP,1608	
C820B	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C821	2203-000815	BY130476	C-CER,CHIP;0.033NF,5%,50V,COG,TP,1608	
C822	2203-000236	BY130439	C-CER,CHIP;0.1NF,5%,50V,COG,TP,1608	
C824	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C824B	2203-001697	BY130487	C-CER,CHIP;0.082nF,5%,50V,NPQ,1608	
C825	2203-000815	BY130476	C-CER,CHIP;0.033NF,5%,50V,COG,TP,1608	
C825A	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C825B	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C826	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C826A	2203-000815	BY130476	C-CER,CHIP;0.033NF,5%,50V,COG,TP,1608	
C826B	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C827	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
C828A	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
C829	2203-000236	BY130439	C-CER,CHIP;0.1NF,5%,50V,COG,TP,1608	
C830	2203-000236	BY130439	C-CER,CHIP;0.1NF,5%,50V,COG,TP,1608	
C831	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C832	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C833	2203-000236	BY130439	C-CER,CHIP;0.1NF,5%,50V,COG,TP,1608	
C833A	2203-000998	BY130446	C-CER,CHIP;0.047NF,5%,50V,COG,TP,1608	
C835	2401-001479	BY130015	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	
C835A	2401-003336	BY130545	C-AL;4.7UF,20%,50V,GP,TP,5X5,2	
C835J	2401-001479	BY130015	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	
C836	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	
C836A	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C836J	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	
C837	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C838	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C839	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C841	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
C842	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C843	2203-000783	BY130435	C-CER,CHIP;0.33NF,5%,50V,COG,TP,1608	
C844	2203-000783	BY130435	C-CER,CHIP;0.33NF,5%,50V,COG,TP,1608	
C845	2203-000783	BY130435	C-CER,CHIP;0.33NF,5%,50V,COG,TP,1608	
C846	2203-000783	BY130435	C-CER,CHIP;0.33NF,5%,50V,COG,TP,1608	
C847	2203-000783	BY130435	C-CER,CHIP;0.33NF,5%,50V,COG,TP,1608	
C848	2203-000783	BY130435	C-CER,CHIP;0.33NF,5%,50V,COG,TP,1608	
C853	2203-000491	BY130443	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1608,-	
C854	2203-000491	BY130443	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1608,-	
C891A	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	Not Used D-VR30-S-TF
C891B	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	Not Used D-VR30-S-TF
C901	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
C902	2401-000408	BY130395	C-AL;10uF,20%,16V,GP,TP,3.5x5,2.5	
CE76	2401-003480	BY130339	C-AL;1000UF,20%,10V,LZ,TP,10X16MM,5	
CN3	3711-005612	BY634828	CONNECTOR-HEADER;BOX,30P,2R,2mm,STRAIGHT	
CN4	3711-005612	BY634828	CONNECTOR-HEADER;BOX,30P,2R,2mm,STRAIGHT	
CN5	A C37-00027A	BY634826	CONNECTOR-HEADER;20045WS,X-11,T8.5,W17.4	
CN7	3722-002118	BY634839	JACK-IEEE1394;4P,NL,BLK,ANGLE,IEEE1394	Not Used D-VR30-S-TF
CNC1	2203-001697	BY130487	C-CER,CHIP;0.082nF,5%,50V,NPQ,1608	
CNR37	3301-000297	BY330019	BEAD-A XIAL;25ohm,3.6x1.2x5.7mm,-,TP,-,-	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
CNR37A	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
CNR38	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
CS01	2203-000257	BY130440	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	
CS02	2401-001502	BY130535	C-A L;47uF,20%,16V,GP,TP,6.3x5,2.5	
CS04	2401-000408	BY130395	C-A L;10uF,20%,16V,GP,TP,3.5x5,2.5	
D1P105	0402-000127	70796385	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
D1P110	0402-000127	70796385	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
D4N01	0401-000101	70795150	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
D4N02	0401-000101	70795150	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
D501	0407-000114	BY430113	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	
D6P01	0407-000114	BY430113	DIODE-ARRAY;DAN202K,80V,100mA,CA2-3,SOT-	
D801	0402-000127	70796385	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
D805	0401-000101	70795150	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
D0C3	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
D0L1	2901-001273	BY330077	FILTER-EMI SMD;50V,2A,-,220pF,3.2x1.6x0.	
D0L3	3301-000297	BY330019	BEAD-A XIAL;25ohm,3.6x1.2x5.7mm,-,TP,-,-	
D0L4	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
D0R1	2001-000515	70795019	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
D0R2	2007-000040	BY230339	R-CHIP;150ohm,1%,1/10W,TP,1608	
D0R3	2007-000075	BY230277	R-CHIP;220ohm,5%,1/10W,TP,1608	
D0R4	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
D0Z1	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
D0Z2	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
DVR1	3301-000314	BY330074	BEAD-SMD;120ohm,1.6x0.8x0.8mm,150mA,,,,	Not Used D-VR15-S-TB, D-VR35-S-TB
DVR2	3301-000314	BY330074	BEAD-SMD;120ohm,1.6x0.8x0.8mm,150mA,,,,	Not Used D-VR15-S-TB, D-VR35-S-TB
DVR3	3301-000314	BY330074	BEAD-SMD;120ohm,1.6x0.8x0.8mm,150mA,,,,	Not Used D-VR15-S-TB, D-VR35-S-TB
DVR4	3301-000314	BY330074	BEAD-SMD;120ohm,1.6x0.8x0.8mm,150mA,,,,	Not Used D-VR15-S-TB, D-VR35-S-TB
FVR6	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
FVR7	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
FZD1	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
FZD2	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
FZD3	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
FZD4	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
FZD5	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
IC4N01	1204-001765	BY631149	IC-AUDIO PROCESSOR;MSP3417D(PQFP),PQFP,4	
IC6P01	1204-001794	BY631157	IC-AUDIO PROCESSOR;LC74775NM-9808,MPF,30	
IC801	1001-001177	BY631316	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
IC802	1204-002418	BY631321	IC-CHANNEL SELECTOR;SPACE	
J881	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
JACK1	3722-002314	BY634956	JACK-PIN;6P;SN/NI,WH/RD/BL,YE/WH/RD,ANG	
JACK2	3722-002022	BY634955	JACK-PIN;3P;NI,GRN/BLU/RED,ANGLE	
JACK3	3722-002106	BY634840	JACK-PIN;3P+1P;SN/NI,BLK,ANGLE	
L401	AC27-12001N	70796213	COIL CHOKE;10UH-15%,RA,K-30,Q80,150KHZ,-	
L4N01	2701-000188	70796075	INDUCTOR-A XIAL;4.7uH,5%,2434	
L4N02	2701-000002	BY330009	INDUCTOR-A XIAL;100UH,10%,4298	
L4N03	2701-000188	70796075	INDUCTOR-A XIAL;4.7uH,5%,2434	
L4N04	2701-000119	70796361	INDUCTOR-A XIAL;120uH,5%,2434	
L6P01	2701-000002	BY330009	INDUCTOR-A XIAL;100UH,10%,4298	
L6P03	2701-000160	70795162	INDUCTOR-A XIAL;22uH,5%,2434	
L6P05	2701-000165	BY330052	INDUCTOR-A XIAL;27uH,5%,2434	
L701	2701-000181	BY330053	INDUCTOR-A XIAL;33uH,5%,2434	
L702	2701-000181	BY330053	INDUCTOR-A XIAL;33uH,5%,2434	
L801	2701-000002	BY330009	INDUCTOR-A XIAL;100UH,10%,4298	
L802	2701-000002	BY330009	INDUCTOR-A XIAL;100UH,10%,4298	
L803	2701-000181	BY330053	INDUCTOR-A XIAL;33uH,5%,2434	
L804	2701-000181	BY330053	INDUCTOR-A XIAL;33uH,5%,2434	
L805	2701-000181	BY330053	INDUCTOR-A XIAL;33uH,5%,2434	
L806	2701-000181	BY330053	INDUCTOR-A XIAL;33uH,5%,2434	
L809	2701-000181	BY330053	INDUCTOR-A XIAL;33uH,5%,2434	
L810	2701-000181	BY330053	INDUCTOR-A XIAL;33uH,5%,2434	
L811	2701-000181	BY330053	INDUCTOR-A XIAL;33uH,5%,2434	

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
L812	2701-000181	BY330053	INDUCTOR-AXIAL;33uH,5%,2434	
L814	A C27-92001M	70795644	COIL-INDUCTOR;RH 3.5X6.5RS,BEAD(RADIAL),-	
LS01	2701-000002	BY330009	INDUCTOR-AXIAL;100UH,10%,4298	
MCON1	3708-000270	70795501	CONNECTOR-FPC/FFC/PIC;33P;1.25MM,STRAIGH	
MCON2	3708-000270	70795501	CONNECTOR-FPC/FFC/PIC;33P;1.25MM,STRAIGH	
PC3	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
PC4	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
PC5	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
PC6	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
PC7	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP;1608	
PE3	2401-003221	BY130499	C-AL;100uF,20%,16V,GP,TP;8X5,2,5	
PE4	2401-002165	BY130280	C-AL;100uF,20%,16V,GP,TP;6.3x7,5	
PE5	2401-002165	BY130280	C-AL;100uF,20%,16V,GP,TP;6.3x7,5	
PE6	2401-002165	BY130280	C-AL;100uF,20%,16V,GP,TP;6.3x7,5	
PE7	2401-003221	BY130499	C-AL;100uF,20%,16V,GP,TP;8X5,2,5	
PL3	2701-000002	BY330009	INDUCTOR-AXIAL;100UH,10%,4298	
PL6	2701-000002	BY330009	INDUCTOR-AXIAL;100UH,10%,4298	
Q401	0501-000002	BY430105	TR-SMALL SIGNAL;KSA812,PNP;150MW,SOT-23,	
Q6P02	0501-000002	BY430105	TR-SMALL SIGNAL;KSA812,PNP;150MW,SOT-23,	
Q6P04	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	
Q802	0504-000129	70795815	TR-DIGITAL;KSR1104,NPN,200mW,47K/47K,SOT	
Q803	0504-000129	70795815	TR-DIGITAL;KSR1104,NPN,200mW,47K/47K,SOT	
Q804	0504-000156	BY530075	TR-DIGITAL;KSR2103,PNP;200MW,22K/22K,SOT	
Q806	0504-000152	BY530078	TR-DIGITAL;KSR2101,PNP;200mW,4.7K/4.7K,S	
Q809	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	
Q810	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	
Q810J	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	
Q891A	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	Not Used D-VR30-S-TF
Q891B	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	Not Used D-VR30-S-TF
QS01	0501-000002	BY430105	TR-SMALL SIGNAL;KSA812,PNP;150MW,SOT-23,	
QS02	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	
QS03	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	
R201	2001-000977	70795058	R-CARBON;8.2KOHM,5%,1/8W,AA,TP;1.8X3.2M	
R202	2001-000977	70795058	R-CARBON;8.2KOHM,5%,1/8W,AA,TP;1.8X3.2M	
R301	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP;1608	
R302	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP;1608	
R401	2007-000097	BY230290	R-CHIP;47Kohm,5%,1/10W,TP;1608	Not Used D-VR30-S-TF
R401A	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP;1608	
R402	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP;1608	Not Used D-VR30-S-TF
R402A	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP;1608	
R403	2007-000074	BY230276	R-CHIP;100ohm,5%,1/10W,TP;1608	
R404	2007-000074	BY230276	R-CHIP;100ohm,5%,1/10W,TP;1608	
R406	2007-001010	BY230360	R-CHIP;51Kohm,5%,1/10W,TP;1608	Not Used D-VR30-S-TF
R408	2001-000429	70795005	R-CARBON;1KOHM,5%,1/8W,AA,TP;1.8X3.2MM	Not Used D-VR30-S-TF
R440	2001-000362	70796067	R-CARBON;1500HM,5%,1/8W,AA,TP;1.8X3.2MM	Not Used D-VR30-S-TF
R441	2007-000040	BY230339	R-CHIP;150ohm,1%,1/10W,TP;1608	Not Used D-VR30-S-TF
R4N01	2001-000429	70795005	R-CARBON;1KOHM,5%,1/8W,AA,TP;1.8X3.2MM	
R4N02	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP;1.8X3.2MM	
R4N03	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP;1.8X3.2MM	
R4N04	2007-000129	BY230307	R-CHIP;27Kohm,5%,1/10W,TP;1608	
R4N05	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP;1.8X3.2MM	
R4N06	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP;1.8X3.2MM	
R6P01	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP;1.8X3.2MM	
R6P02	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP;1.8X3.2MM	
R6P03	2007-000081	BY230281	R-CHIP;2.7Kohm,5%,1/10W,TP;1608	
R6P04	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP;1608	
R6P05	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP;1608	
R6P06	2007-000086	BY230283	R-CHIP;5.6Kohm,5%,1/10W,TP;1608	
R6P08	2007-000118	BY230293	R-CHIP;390ohm,5%,1/10W,TP;1608	
R6P12	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP;1608	
R6P13	2007-000097	BY230290	R-CHIP;47Kohm,5%,1/10W,TP;1608	

Electrical Parts List

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
R6P14	2007-000123	BY230306	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
R801	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
R801A	2007-000116	BY230349	R-CHIP;120ohm,5%,1/10W,TP,1608	
R802A	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
R802B	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
R803	2007-000122	BY230294	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
R805	2007-000643	BY230325	R-CHIP;270ohm,5%,1/10W,TP,1608	
R805B	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	D-VR30-S-TG, D-VR30-S-TF Only
R805G	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	D-VR30-S-TG, D-VR30-S-TF Only
R805R	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	D-VR30-S-TG, D-VR30-S-TF Only
R806	2007-000643	BY230325	R-CHIP;270ohm,5%,1/10W,TP,1608	
R807	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
R807A	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R807J	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
R808	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
R808A	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R809	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
R810	2007-000643	BY230325	R-CHIP;270ohm,5%,1/10W,TP,1608	
R811	2007-000643	BY230325	R-CHIP;270ohm,5%,1/10W,TP,1608	
R812	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R813	2007-000643	BY230325	R-CHIP;270ohm,5%,1/10W,TP,1608	
R813A	2007-000097	BY230290	R-CHIP;47Kohm,5%,1/10W,TP,1608	
R814	2007-000643	BY230325	R-CHIP;270ohm,5%,1/10W,TP,1608	
R814B	2007-000097	BY230290	R-CHIP;47Kohm,5%,1/10W,TP,1608	
R815	2007-000643	BY230325	R-CHIP;270ohm,5%,1/10W,TP,1608	
R816	2007-000643	BY230325	R-CHIP;270ohm,5%,1/10W,TP,1608	
R817	2001-000405	70795607	R-CARBON;1800HM,5%,1/8W,AA,TP,1.8X3.2MM	
R818	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R818A	2007-000450	BY230299	R-CHIP;180ohm,5%,1/10W,TP,1608	
R819	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R819A	2007-000643	BY230325	R-CHIP;270ohm,5%,1/10W,TP,1608	
R820	2007-000643	BY230325	R-CHIP;270ohm,5%,1/10W,TP,1608	
R821	2007-000098	BY230291	R-CHIP;56Kohm,5%,1/10W,TP,1608	
R821A	2001-000660	70795032	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R822	2007-000094	BY230288	R-CHIP;22Kohm,5%,1/10W,TP,1608	
R822A	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
R822B	2007-000098	BY230291	R-CHIP;56Kohm,5%,1/10W,TP,1608	
R830	2007-000098	BY230291	R-CHIP;56Kohm,5%,1/10W,TP,1608	
R831	2007-000098	BY230291	R-CHIP;56Kohm,5%,1/10W,TP,1608	
R832	2007-000079	BY230280	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
R833	2007-000079	BY230280	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
R839	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R841	2007-000119	BY230332	R-CHIP;560ohm,5%,1/10W,TP,1608	
R842	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
R842J	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
R843	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R843A	2007-000965	BY230303	R-CHIP;5.1Kohm,5%,1/10W,TP,1608	
R844	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R845	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R846	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R847	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
R853	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
R854	2007-000098	BY230291	R-CHIP;56Kohm,5%,1/10W,TP,1608	
R855	2007-000098	BY230291	R-CHIP;56Kohm,5%,1/10W,TP,1608	
R856	2007-000965	BY230303	R-CHIP;5.1Kohm,5%,1/10W,TP,1608	
R891A	2007-000100	70795719	R-CHIP;68Kohm,5%,1/10W,TP,1608	Not Used D-VR30-S-TF
R891B	2007-000100	70795719	R-CHIP;68Kohm,5%,1/10W,TP,1608	Not Used D-VR30-S-TF
R892A	2007-000102	BY230292	R-CHIP;100Kohm,5%,1/10W,TP,1608	Not Used D-VR30-S-TF
R892B	2007-000102	BY230292	R-CHIP;100Kohm,5%,1/10W,TP,1608	Not Used D-VR30-S-TF
R893A	2007-000122	BY230294	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	Not Used D-VR30-S-TF
R893B	2007-000122	BY230294	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	Not Used D-VR30-S-TF

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
R894A	2007-000129	BY230307	R-CHIP;27Kohm,5%,1/10W,TP,1608	Not Used D-VR30-S-TF
R894B	2007-000129	BY230307	R-CHIP;27Kohm,5%,1/10W,TP,1608	
R900	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R901	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
RS01	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
RS02	2007-000125	BY230296	R-CHIP;3.9Kohm,5%,1/10W,TP,1608	
RS03	2007-000094	BY230288	R-CHIP;22Kohm,5%,1/10W,TP,1608	
RS04	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
RS05	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
RS06	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
RS07	2007-000097	BY230290	R-CHIP;47Kohm,5%,1/10W,TP,1608	
RS08	2007-000097	BY230290	R-CHIP;47Kohm,5%,1/10W,TP,1608	
RS09	2007-000125	BY230296	R-CHIP;3.9Kohm,5%,1/10W,TP,1608	
RS10	2007-000077	BY230278	R-CHIP;470ohm,5%,1/10W,TP,1608	
SCART	3722-001372	BY634954	JACK-SCART;42P/2R,-,SN,BLK,-	
SJACK	3722-001375	BY634838	JACK-DIN;4P,-,NI,BLK,-	
SVSEL1	1204-001748	BY631283	IC-SELECTOR;MM1503XN,SOP,6P,63MIL,PLASTI	
SW 709	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 710	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 711	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 712	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
SW 713A	3404-001182	BY632011	SWITCH-TA CT;DC12V,50MA,100GF,6.0X6.0X5.0	
TM401	A C40-00029A	BY633021	TM BLOCK;TCMK0601PD20A,PAL B/G + I + D/	Other Only D-VR30-S-TF Only
	A C40-00038A	BY630493	TM BLOCK-SECAM-L/L',PAL-B/G;TCPL0601PD20	
VC10	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
VC11	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
VC12	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
VC13	2203-000236	BY130439	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1608	
VC14	2203-000236	BY130439	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1608	
VC15	2203-000236	BY130439	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1608	
VC16	2203-000236	BY130439	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1608	
VC17	2202-002037	BY130027	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
VC18	2203-000236	BY130439	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1608	
VC19	2203-000236	BY130439	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1608	
VC50	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
VC6	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
VC7	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
VC8	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
VC9	2203-005148	BY130480	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	
VDR1	2007-000040	BY230339	R-CHIP;150ohm,1%,1/10W,TP,1608	
VDR2	2007-000040	BY230339	R-CHIP;150ohm,1%,1/10W,TP,1608	
VDR3	2007-000040	BY230339	R-CHIP;150ohm,1%,1/10W,TP,1608	
VDR4	2007-000040	BY230339	R-CHIP;150ohm,1%,1/10W,TP,1608	
VDR5	2007-000040	BY230339	R-CHIP;150ohm,1%,1/10W,TP,1608	
VDR6	2007-000040	BY230339	R-CHIP;150ohm,1%,1/10W,TP,1608	
VE1	2401-002165	BY130280	C-AL;100uF,20%,16V,GP,TP,6.3x7.5	
VE2	2401-000909	BY130494	C-AL;22uF,20%,16V,GP,TP,5x5,2.5	
VE4	2401-001479	BY130015	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	
VE5	2401-001479	BY130015	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	
VE6	2401-001479	BY130015	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	
VE7	2401-001479	BY130015	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	
VIC1	1204-001978	BY631245	IC-VIDEO PROCESS;LA 73054,-,36P,-,SSOP,7V	
VIC2	1204-001748	BY631283	IC-SELECTOR;MM1503XN,SOP,6P,63MIL,PLASTI	
VL1	3301-000314	BY330074	BEAD-SMD;120ohm,1.6x0.8x0.8mm,150mA,,,,	
VL2	3301-000314	BY330074	BEAD-SMD;120ohm,1.6x0.8x0.8mm,150mA,,,,	
VL3	3301-000314	BY330074	BEAD-SMD;120ohm,1.6x0.8x0.8mm,150mA,,,,	
VL6	2701-000002	BY330009	INDUCTOR-AXIAL;100UH,10%,4298	
VQ1	0501-000341	BY530073	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	
VR10	2007-000119	BY230332	R-CHIP;560ohm,5%,1/10W,TP,1608	
VR11	2001-000969	70795054	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
VR12	2007-000084	BY230282	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	

Electrical Parts List

Loc. No	Reference No.	TSB Parts No.	Description ; Specification	Remark
VR13	2007-000070	BY230274	R-CHIP;0ohm,5%,1/10W,TP,1608	
VR14	2001-000281	70795004	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
VR30	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
VR31	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
VR33	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
VR34	2007-001167	BY230304	R-CHIP;75ohm,5%,1/10W,TP,1608	
VR49	2007-000078	BY230279	R-CHIP;1Kohm,5%,1/10W,TP,1608	
VR51	2007-000090	BY230285	R-CHIP;10Kohm,5%,1/10W,TP,1608	
VR53	2001-000969	70795054	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
VR54	2001-000969	70795054	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
VR55	2001-000969	70795054	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
VSEL1	1204-001748	BY631283	IC-SELECTOR;MM1503XN,SOP,6P,63MIL,PLASTI	
VZ1	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
VZ10	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
VZ11	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
VZ12	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
VZ2	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
VZ3	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
VZ4	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
VZ5	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
VZ6	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
VZ7	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
VZ8	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
VZ9	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
W205	2007-000074	BY230276	R-CHIP;100ohm,5%,1/10W,TP,1608	
W206	2007-000074	BY230276	R-CHIP;100ohm,5%,1/10W,TP,1608	
XT4N01	2801-004096	BY631285	CRYSTAL-UNIT;18.432MHZ,20PPM,28-AAA,16PF	
ZD401	0403-000390	70795272	DIODE-ZENER;UZP33B,31.4-34.6V,1000MW,DO-	
ZD801	0403-000297	BY430024	DIODE-ZENER;MTZ6.2B,5.96-6.27V,500mW,DO-	
ZD805	0403-001211	BY430015	DIODE-ZENER;MTZJ12B,11.8-12.3V,500MW,DO-	
ZD807	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
ZD809	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
ZD811	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
ZD851	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
ZD852	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
ZD853	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
ZD854	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
ZD863	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
ZDS806	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	
ZDS810	0403-001083	BY430111	DIODE-ZENER;UDZ9.1B,8.85-9.23V,200MW,UMD	