

PARTS LIST


SAFETY PRECAUTION

Parts identified by the ⚠ symbol are critical for safety. Replace only with specified part numbers.

1. EXPLODED VIEW

1.1 PACKING AND ACCESSORY ASSEMBLY <M1>

The instruction manual to be provided with this product will differ according to the destination.


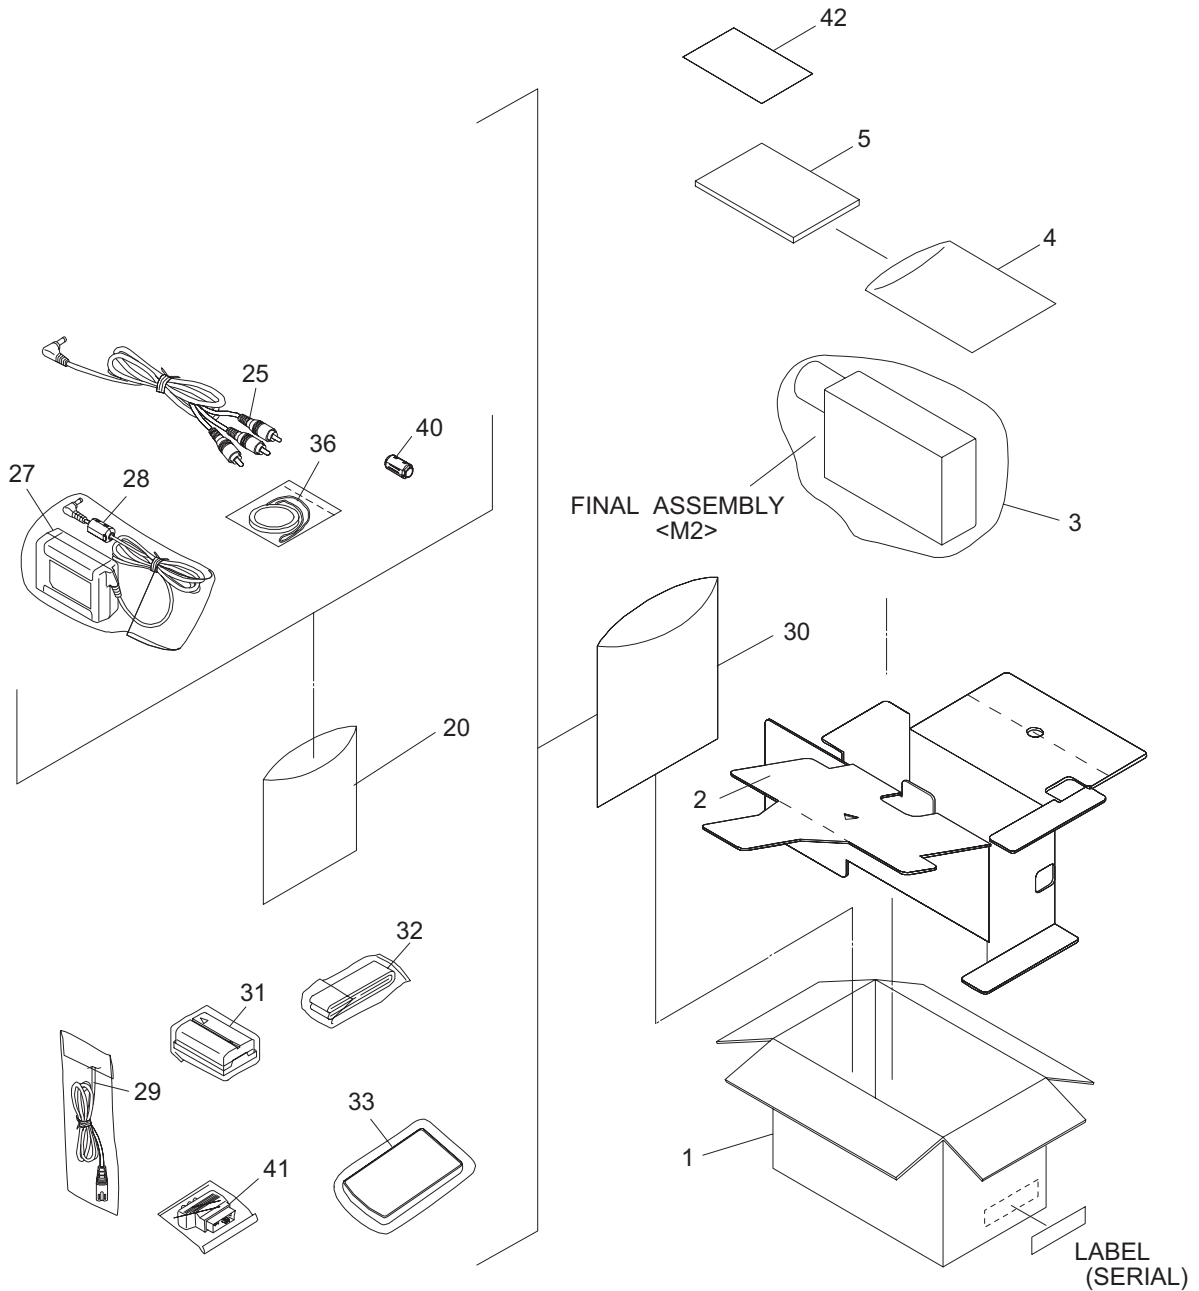





1.2 FINAL ASSEMBLY <M2>

BEWARE OF BOGUS PARTS

Parts that do not meet specifications may cause trouble in regard to safety and performance. We recommend that genuine JVC parts be used.

<LOWER ASSEMBLY>

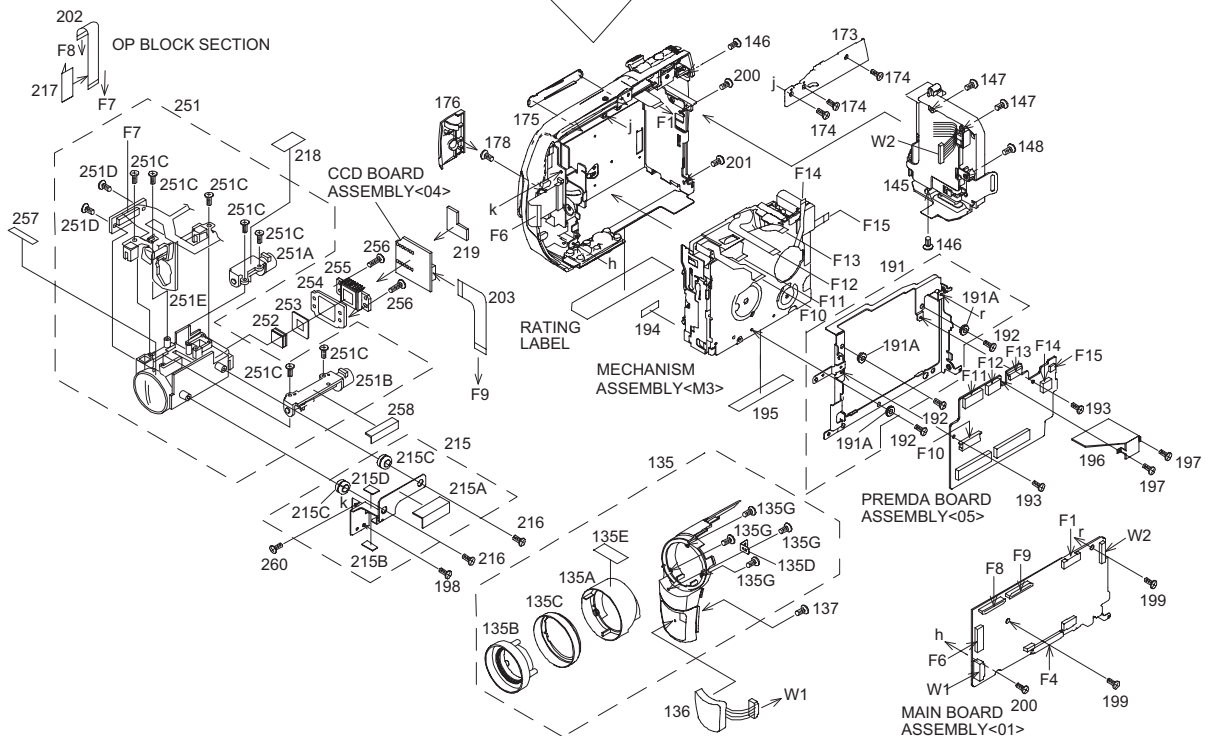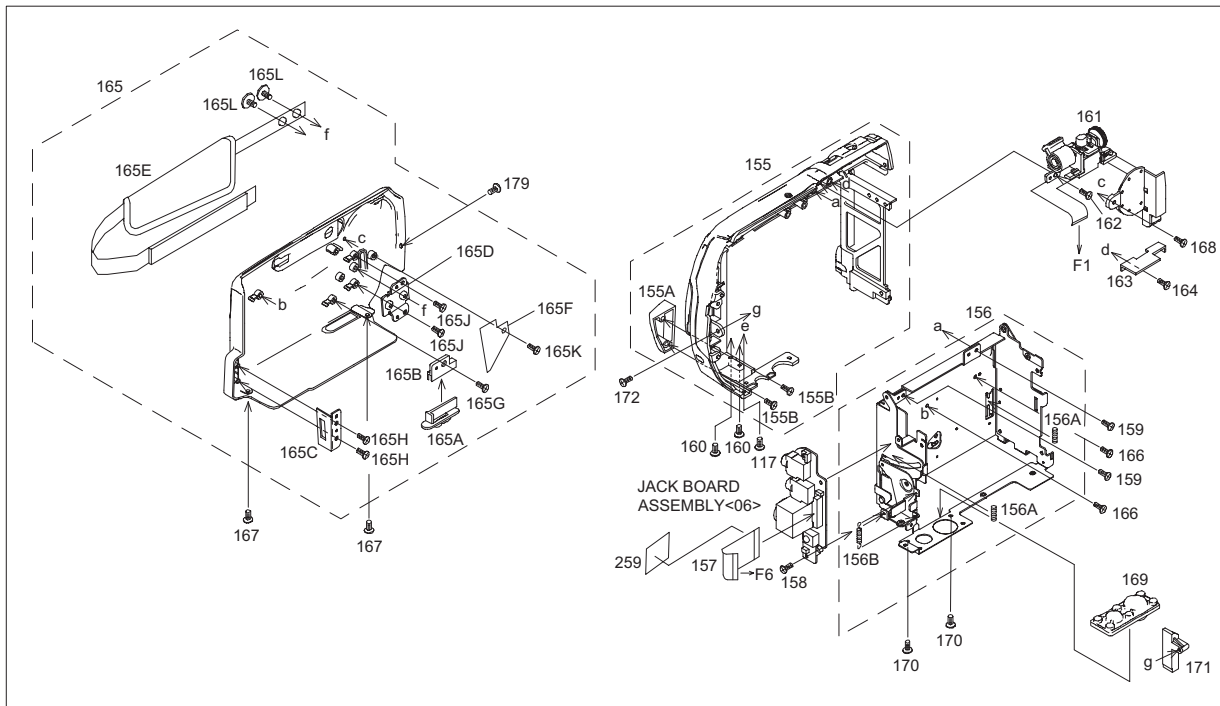

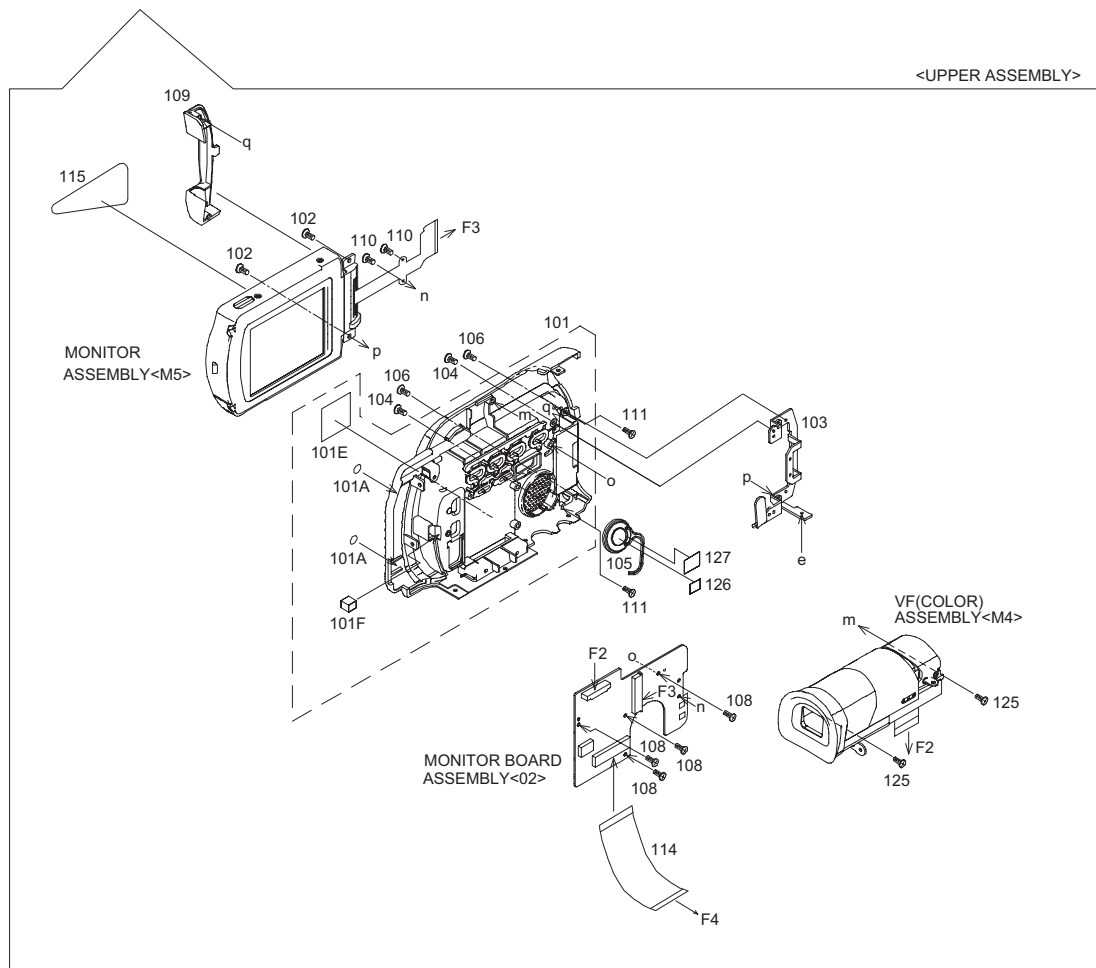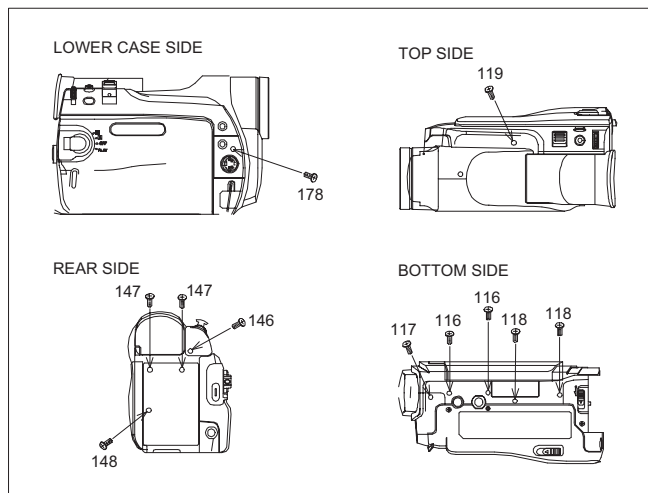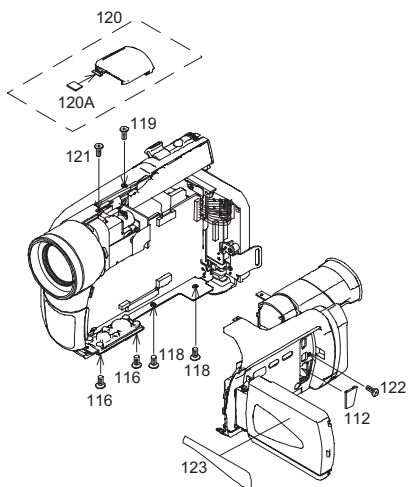


900A

YMA0029P
YMA0029E


Classification	Part No.	Symbol in drawing
Grease	KYODO-SH-JB	AA
Oil	YTU94027	BB
Grease (HANARL)	RX-410R	CC

NOTE2: Mark ★ is not contained in 900A.

1.4 VF(COLOR) ASSEMBLY <M4>

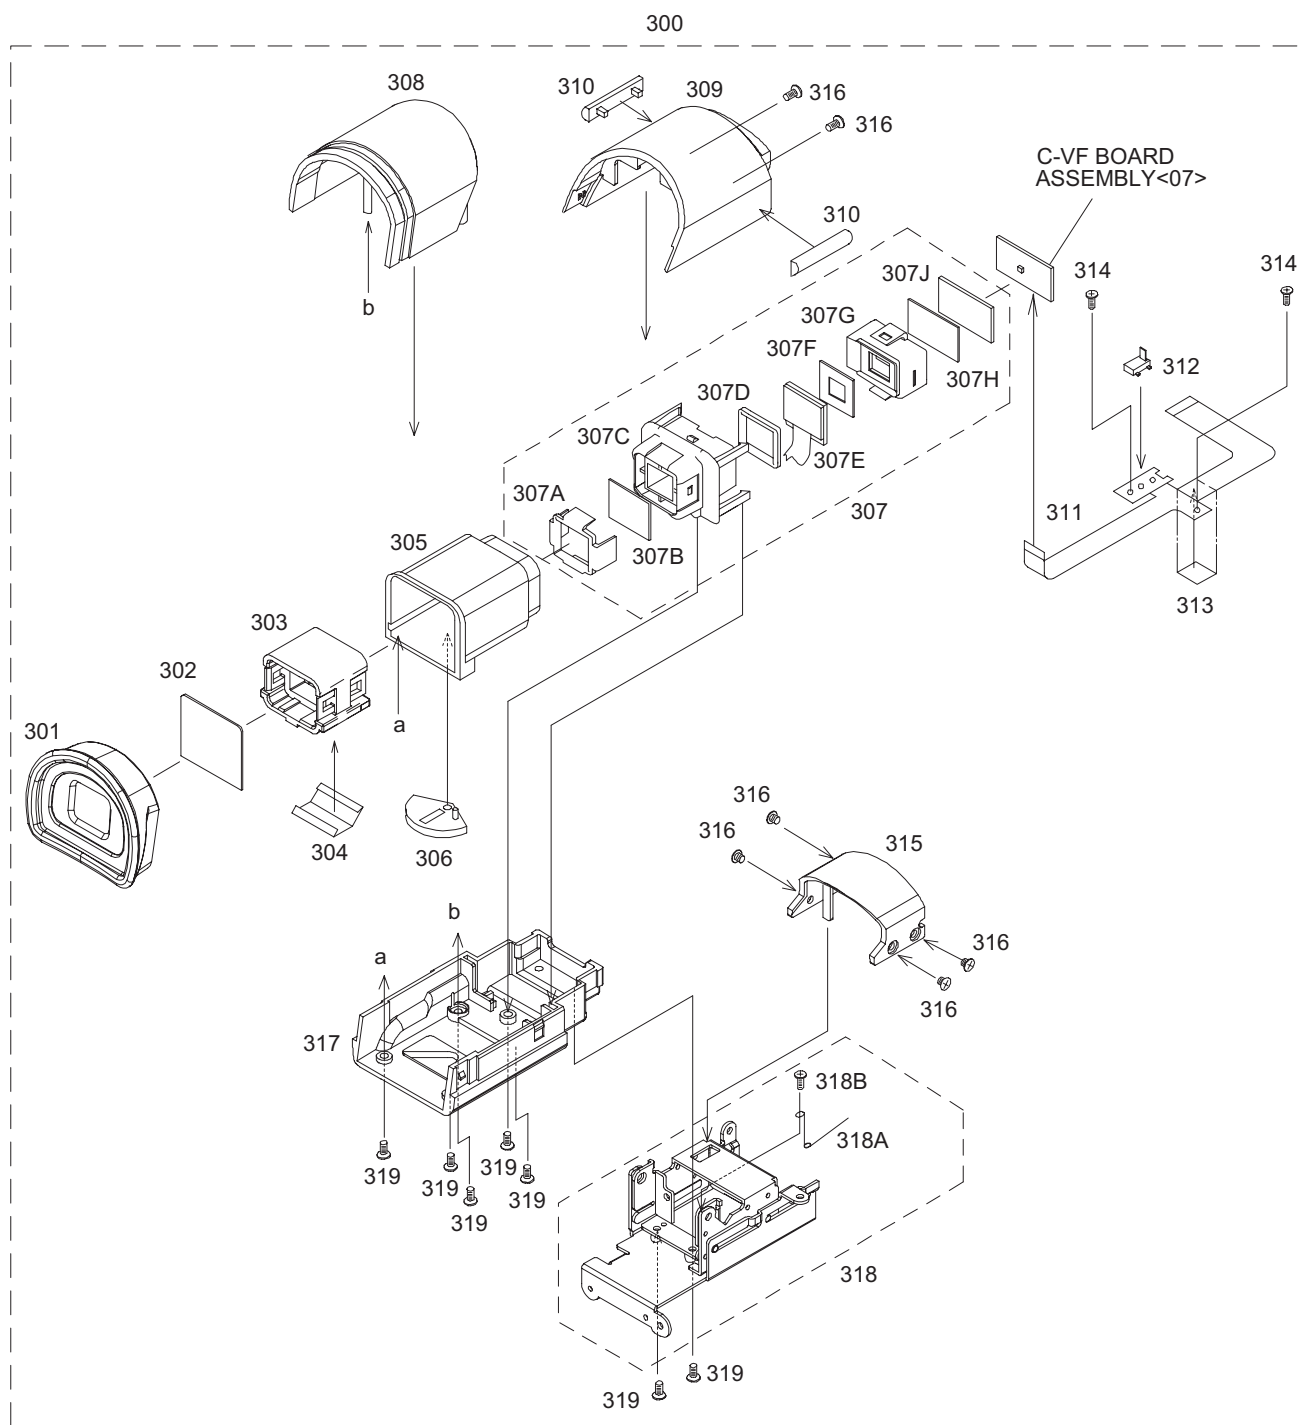

1.5 MONITOR ASSEMBLY <M5>

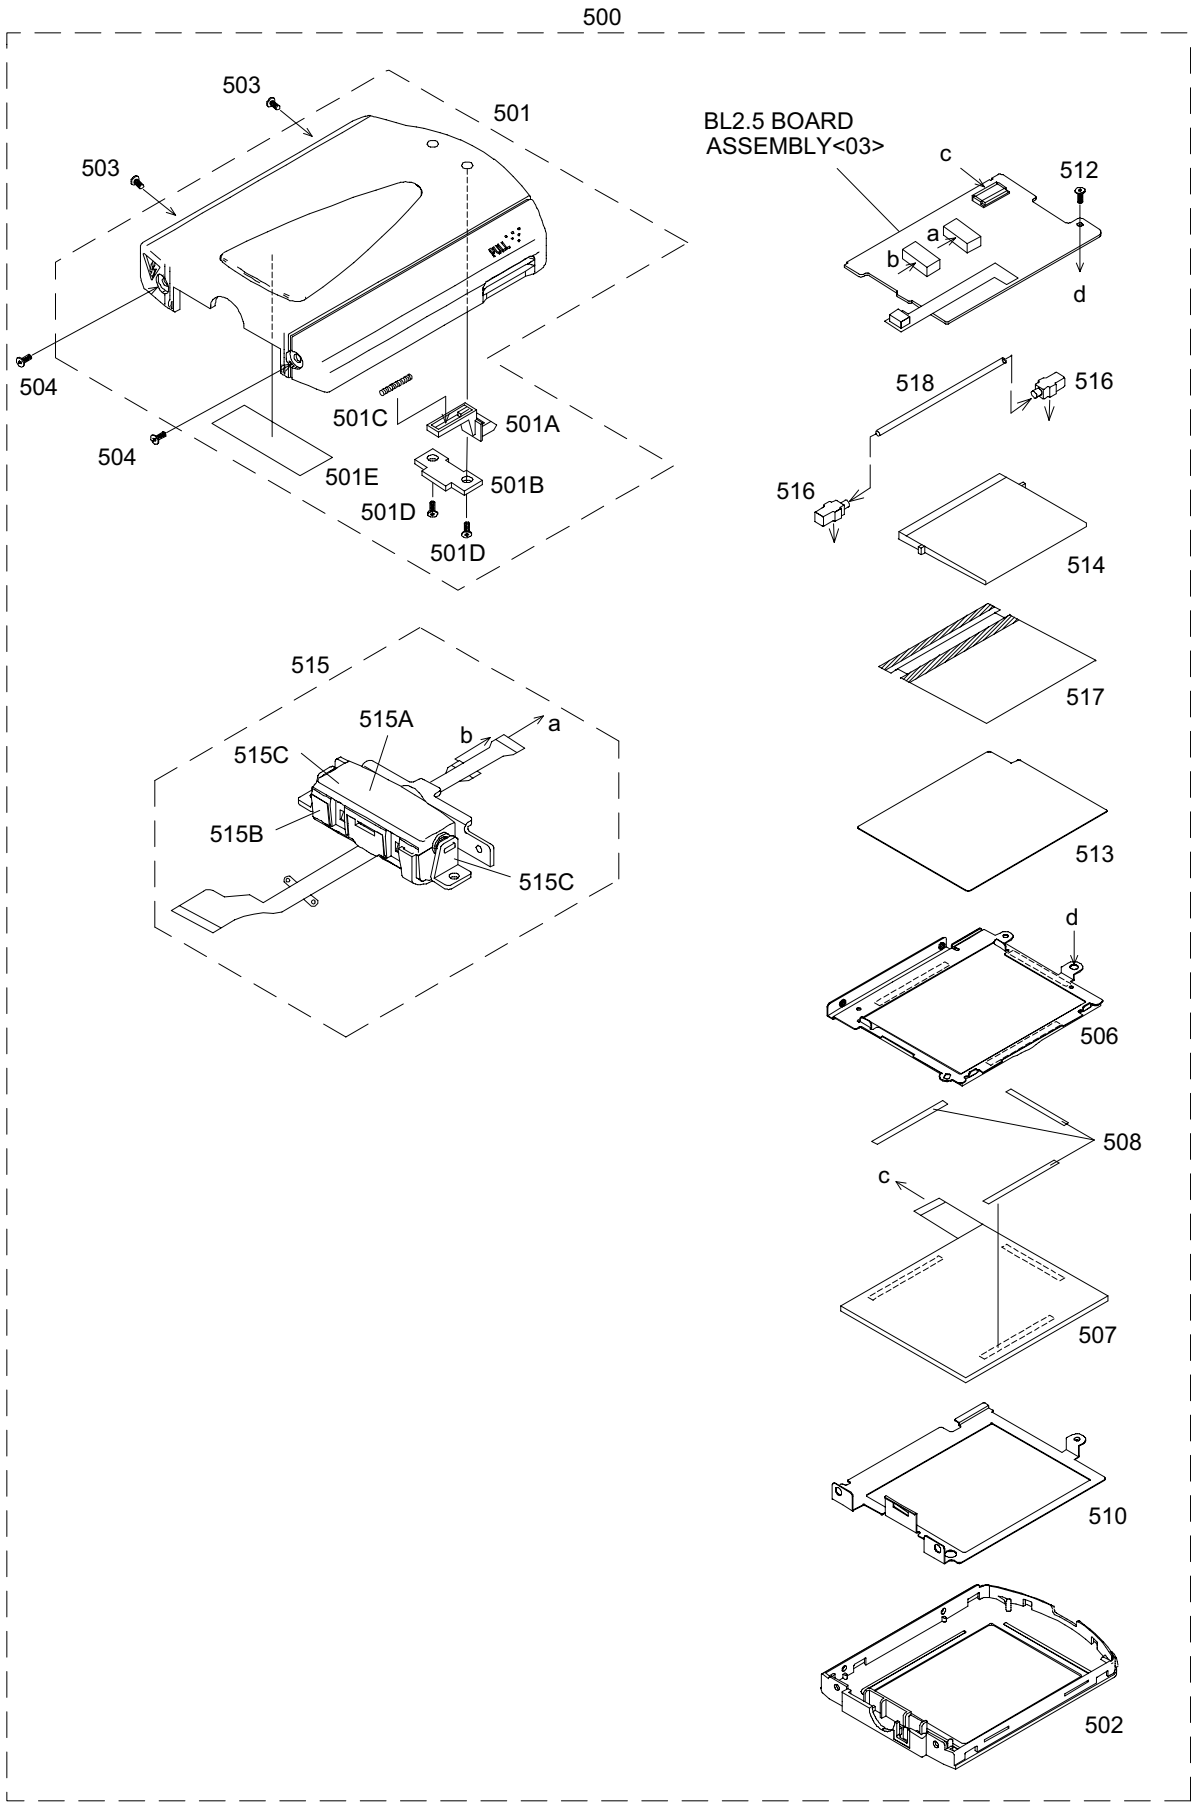

2. PARTS LIST

PACKING AND ACCESSORY ASSY <M1>

△ Symbol No.	Part No.	Part Name	Description	Local
1	LY33063-020A	PACKING CASE		D21EZ
1	LY33063-021A	PACKING CASE		D21EX
2	LY33065-001C	CUSHION		
3	LY30023-008A	POLY BAG		
4	QPA02003506	POLY BAG	DOCUMENT 20cm x 35cm	
△ 5	LYT1266-001A	INST BOOK(GE)	(GERMAN)	D21EX
△ 5	LYT1266-011A	INST BOOK(RU)	(RUSSIAN)	D21EZ
△ 5	LYT1266-012A	INST BOOK(CZ)	(CZECH)	D21EZ
△ 5	LYT1266-013A	INST BOOK(PO)	(POLISH)	D21EZ
△ 5	LYT1266-014A	INST BOOK(HU)	(HUNGARIAN)	D21EZ
20	QPA02003005	POLY BAG	CABLE 20cm x 30cm	
25	QAM0212-001	A/V CABLE		
△ 27	LY20955-001C	AC ADAPTER	AP-V13E	
△ 27	or LY20956-001B	AC ADAPTER	AP-V11E	
28	QQR0917-002	CORE FILTER		
△ 29	QMPL270-190-JR	POWER CORD(EU)	1.9m BLACK	
30	QPA02503505P	POLY BAG	ACC. 25cm x 35cm	
△ 31	LY32566-001A	BATTERY PACK ASSY	BN-V408U-B	
32	LY20186-004B	SHOULDER STRAP		
33	LY21020-001B	REMOCON	RM-V718U	
36	LY44002-001B	CAP(HOOD)ASSY		
40	QQR0491-002	FERRITE CORE	EDIT	
41	QAM0302-001	ADAPTOR PLUG	PERI-RCAS	
42	BT-54013-7	WARRANTY CARD		

FINAL ASSEMBLY <M2>

△ Symbol No.	Part No.	Part Name	Description	Local
101	LY20941-007J	UPPER CASE(2.5)ASSY		
101A	LY40664-001A	SPACER	(x2)	
101E	LY33042-001A	CAUTION LABEL(VF)		
101F	LY30030-0F2A	SPACER(A)		
102	LY30031-070A	SPECIAL SCREW	UPPER-HING(x2)	
103	LY33044-001E	BKT(HINGE2.5)		
104	LY30031-0D4A	SPECIAL SCREW	UPPER-BKTH(x2)	
105	QAS0157-001	SPEAKER		
106	LY30031-0D5A	SPECIAL SCREW	UPPER-BKTH(x2)	
108	LY30031-003A	SPECIAL SCREW	UPPER-MPWB(x4)	
109	LY33049-002A	COVER(UPPER2.5)		
110	LY30031-071A	SPECIAL SCREW	BKTH-M.PWB(x2)	
111	LY30031-008A	SPECIAL SCREW	UPPER-COVU(x2)	
112	LY33050-002C	COVER(JIG)		
114	QUQ105-4007AA	FFC WIRE MONI CN1071-MAIN CN101	MAIN-M.FFC	
115	LY33360-001B	ORNAMENT(2.5 3)		
116	LY30031-008A	SPECIAL SCREW	UPPER-LOWE(x2)	
117	LY30031-074A	SPECIAL SCREW	UPPER-FRON	
118	LY30031-053A	SPECIAL SCREW	UPPER-LOWE(x2)	
119	LY30031-053A	SPECIAL SCREW	LOWE-VF HI	
120	LY33025-001C	TOP COVER ASSY		
120A	LY40162-001A	BKT		
121	LY30031-053A	SPECIAL SCREW	TOP	
122	LY30031-053A	SPECIAL SCREW	DV JACK-UP	
123	LY44187-009A	STICKER(2)		
125	LY30031-008A	SPECIAL SCREW	UPPER-VF(x2)	
126	LY30030-0E3B	SPACER(A)		
127	LY30030-0E5A	SPACER(A)		
135	LY20943-002H	FRONT COVER ASSY		
135A	LY33056-001B	HOOD		
135B	LY33057-001A	RING		
135C	LY33058-001B	HOOD(SCREW)		
135D	LY33059-001B	BKT(FRONT)		
135E	LY44186-002A	STICKER(1)		
135G	LY30031-072A	SPECIAL SCREW	(x4)	
136	LY20944-001B	MIC		
137	LY30031-073A	SPECIAL SCREW	MIC	
△ 145	LY20938-001F	REAR UNIT		
146	LY30031-073A	SPECIAL SCREW	LOWER-REAR(x2)	
147	LY30031-075A	SPECIAL SCREW	REAR-VF HI(x2)	
148	LY30031-076A	SPECIAL SCREW	REAR-HOOK	
155	LY20935-002G	LOWER CASE ASSY		
155A	LY33402-001A	COVER(LOWER)		

△ Symbol No.	Part No.	Part Name	Description	Local
155B	LY30031-008A	SPECIAL SCREW	(x2)	
156	LY20939-001G	ARM ASSY		
156A	LY30002-046B	COMPRES. SPRING	(x2)	
156B	LY43973-001A	TENSION SPRING		
157	QUQ105-2203AA	FFC WIRE JACK CN501-MAIN CN102	JACK FFC	
158	LY30033-001A	SPECIAL SCREW(W)	ARM-JACK	
159	LY30031-003A	SPECIAL SCREW	LOWER-ARM(x2)	
160	LY30031-053A	SPECIAL SCREW	LOWER-ARM(x2)	
161	LY10453-001G	ZOOM UNIT		
162	LY30031-008A	SPECIAL SCREW	LOWER-ZOOM	
163	LY33395-001A	BRACKET(ZOOM)		
164	LY30031-003A	SPECIAL SCREW	LOW-BKTZ	
165	LY20937-003D	CASSETTE COVER ASSY		
165A	LY33027-001C	KNOB(LOCK)		
165B	LY33028-001A	HOLDER(LOCK)		
165C	LY33397-001A	HOOK(G.B)		
165D	LY33039-001A	BKT(G.BELT)		
165E	LY20945-003C	GRIP BELT		
165F	LY44178-001A	SHEET(C.COV)		
165G	LY30031-008A	SPECIAL SCREW	C.COV-HLD	
165H	QYSLSF2040DA	TAP SCREW	C.COV-HOOK(x2)	
165J	QYSLSF2040DA	TAP SCREW	C.C-BKT(GB)(x2)	
165K	QYSLSF2040DA	TAP SCREW		
165L	LY30031-004A	SPECIAL SCREW	BKT(GB)-GB(x2)	
166	LY30031-068A	SPECIAL SCREW	ARM-C.COV(x2)	
167	LY30031-0D4A	SPECIAL SCREW	ARM-C.COV(x2)	
168	LY30031-003A	SPECIAL SCREW	C.COV-ZOOM	
169	LY31019-001A	BASE		
170	LY30031-008A	SPECIAL SCREW	LOWER-BASE(x2)	
171	LY33396-001C	HOLDER(JACK)		
172	LY30031-008A	SPECIAL SCREW	LOW-HOLJ	
173	LY33037-001B	COVER(ZOOM)		
174	LY30031-021A	SPECIAL SCREW	COV.Z-ZOOM(x3)	
175	LY33029-001B	COVER(ADJUST)		
176	LY33024-001C	COVER(JACK)		
178	LY30031-065A	SPECIAL SCREW	FRONT-LOWE	
179	LY30031-008A	SPECIAL SCREW	C.COV-ZOOM	
191	LY33019-001B	BKT(MECHA)ASSY		
191A	LY42796-003A	BUSH	(x3)	
192	LY30032-002A	SPECIAL SCREW	BKT(M-MEC)(x3)	
193	LY30031-071A	SPECIAL SCREW	MDA-BKT(M)(x2)	
194	LY40699-002A	LABEL(PUSH)		
195	LY32001-004A	LABEL(HOUSING)		
196	LY33388-001C	SHIELD COVER(PR)		
197	QYSPSP1414MA	SCREW	MECHA-PRE(x2)	
198	LY30031-053A	SPECIAL SCREW	OPBKT-BKTM	
199	LY30032-001A	SPECIAL SCREW	MAIN-BKT(M)(x2)	
200	LY30031-0D4A	SPECIAL SCREW	BKT(M-ARM)(x2)	
201	LY30031-0D5A	SPECIAL SCREW	BKT(M-ARM)	
202	QUQ105-24X8AA	FFC WIRE OP BLOCK-MAIN CN108	OP-MAN FFC	
203	QAL0465-001	FFC CCD CN5001-MAIN CN107	MAIN-CCDFP	
215	LY43965-001D	BKT(OP)ASSY		
215A	LY30030-095A	SPACER(A)		
215B	LY30030-096A	SPACER(A)		
215C	LY43966-001A	RUBBER(OP)	(x2)	
215D	LY30030-0E5A	SPACER(A)		
216	LY30031-017A	SPECIAL SCREW	OP BKT-OP(x2)	
217	LY30030-057A	SPACER(A)	OP FFC-S	
218	LY30030-050A	SPACER(A)	OP FFC-T	
219	LY30030-060A	SPACER(A)	CCD	
251	LY33085-001F	OP BLOCK ASSY		
251A	LY30724-001B	FOCUS MOTOR		
251B	LY30723-001B	ZOOM MOTOR		
251C	PTY33085-001	SCREW	(x7)	
251D	PTY31727-116	SCREW	(x2)	
251E	PTY33085-007	IRIS MOTOR UNIT		
252	LY44120-001A	OP LPF		
253	LY44005-001A	SHEET		
254	LY33288-001A	SPACER		
255	LYH30446-002A	CCD BASE ASSY		
256	LY30031-033A	SPECIAL SCREW	(x2)	
257	LY30030-093A	SPACER(A)		
258	LY30030-094A	SPACER(A)		
259	LY30029-0Q7A	SPACER(A)	EXCEPT JVM	
260	LY30033-003A	SPECIAL SCREW(W)	OPBKT-BKTM	

MECHANISM ASSEMBLY <M3>

△ Symbol No.	Part No.	Part Name	Description	Local
900	YMA0029E	MECHA(A)ASSY	OL-Y06789	
900A	YMA0029P	MECHA(A)ASSY	BJVC	
901	LY32870-001Q	CASSETTEHOUSING ASSY		
902	YQ43893-8	MINI SCREW	(x3)	
903	LYH30420-001A	UPPER BASE ASSY		
904	QYSPSPU1425M	SCREW	M1.4 x 2.5mm	
905	YDV2102B	DRUM ASSY	BJ SET010	
906	LY42820-001A	DAMP.SCREW ASSY	BJVC(x2)	
907	LY42820-002A	DAMP.SCREW ASSY	BJVC	
908	LY31538-001F	REEL DISK ASSY		
909	LY31538-002H	REEL DISK ASSY		
910	YQ44246	SLIT WASHER	(x2)	
911	LY10372-001H	REEL COVER ASSY		
912	LY42120-002A	MINI SCREW		
913	LY41945-003A	MINI SCREW	(x2)	
914	YQ44246	SLIT WASHER		
915	LY43725-001F	TENSION ARM ASSY		
916	LYH40269-001A	SLANT POLE ARM ASSY		
917	LY43731-001F	TAKE UP ARM ASSY		
918	LY31531-001E	SWING ARM ASSY		
919	YQ43893-9	MINI SCREW		
920	LYH30424-001A	SLIDE DECK FINAL ASSY		
921	YQ43893	MINI SCREW	(x2)	
922	LY43023-001A	MINI SCREW		
924	LYH30419-001A	PAD ARM ASSY		
925	YQ44246	SLIT WASHER		
928	LYH40270-001A	TAKE UP BRAKE ASSY		
929	YQ44246	SLIT WASHER		
930	LY43684-001B	TENSION CONTROL LEVER ASSY		
931	LY32861-001A	CENTER GEAR		
932	LY31516-001H	PINCH ROLLER ARM FINAL ASSY		
933	YQ44246	SLIT WASHER		
934	LY43681-001A	TENSION CONTROL PLATE ASSY		
935	LY43687-001A	BRAKE CONTROL LEVER ASSY		
936	LYH30421-001A	MOTOR BRACKET ASSY		
937	YQ43893	MINI SCREW	(x3)	
938	LYH30422-001A	GUIDE RAIL ASSY		
939	YQ43893	MINI SCREW		
940	YQ44246	SLIT WASHER	(x2)	
941	LY32843-001F	SLIDE LEVER2 ASSY		
942	LY43690-001A	LOADING PLATE ASSY		
943	YQ44246	SLIT WASHER		
944	LY32858-001B	EJECT LEVER		
945	YQ44246	SLIT WASHER		
946	LYH40271-001A	BASE R ASSY		
947	YQ43893	MINI SCREW		
948	LY41945-001B	MINI SCREW		
949	LY43665-001A	MODE GEAR		
950	QSW0876-004	ROTARY ENCODER		
951	YQ43893	MINI SCREW	(x2)	
952	LY32860-001D	GEAR COVER ASSY		
953	YQ43893	MINI SCREW	(x2)	
954	YQ43893-4	MINI SCREW		
955	LY43676-001A	MAIN CAM ASSY		
956	LY41941-001B	SLIDE ARM ASSY		
957	LY43678-001A	CONNECT GEAR 2		
958	LY43679-001C	SUB CAM ASSY		
959	LY42120-001A	MINI SCREW		
960	LY43692-001A	CONTROL ARM ASSY		
961	LY32859-001A	REEL GEAR 1		
962	LY31508-004D	DRUM BASE ASSY		
963	QYSPSPU1425M	MINI SCREW	(x3)	
964	QAR0142-001	CAPSTAN MOTOR		
965	YQ43893	MINI SCREW		
966	LY10367-001L	MAIN DECK ASSY		
976	YQ44246	SLIT WASHER		
978	LY42047-005A	WASHER		
979	LY44502-001A	SPACER	BJVC	

VF(COLOR) ASSEMBLY <M4>

△ Symbol No.	Part No.	Part Name	Description	Local
300	LY21048-001F	VF ASSY	JAPAN	
301	LY32995-001B	EYE CUP		
302	LY43961-001B	SHEET(LENS)		
303	LY32472-001A	LENS ASSY		
304	LY43868-001A	SPRING(LENS)		
305	LY32993-001C	GUIDE LENS(VF)		
306	LY33006-001C	LEVER(LENS)		
307	LY33722-001A	LCD UNIT(COLOR)ASSY		
307A	LY32997-001A	SHEET HOLD(VF)		
307B	LY43953-001A	SHEET 1(POLA)		
307C	LY33003-001C	HOLDER LCD2(VF)		
307D	LY33047-001A	GUIDE(LCD)2		
307E	QLD0266-001	LCD MODULE		
307F	LY43960-001A	CUSHION 2(LCD)		
307G	LY33004-001A	LCD HOLD 2(VF)		
307H	LY43954-001A	SHEET 2(POLA)		
307J	LY43959-001A	SHEET 2(DIFF)		
308	LY20931-001B	UPPER CASE(VF)R		
309	LY20930-001B	UPPER CASE(VF)F		
310	LY33083-001A	PROTECTOR(VF)	(x2)	
311	QAL0466-002	FPC	VF FPC	
312	NSW0200-001X	LEVER SWITCH VF SW	TEZUKE	
313	LY30030-059B	SPACER(A)	VF FPC	
314	LY30031-078A	SPECIAL SCREW	SW PWB(x2)	
315	LY32996-001B	COVER(VF)		
316	LY30031-0D6A	SPECIAL SCREW	(x6)	
317	LY20929-001C	BOTTOM CASE(VF)		
318	LY33076-001J	VF HINGE ASSY		
318A	LY43962-001E	TOR.SPRING		
318B	LY30032-012A	SPECIAL SCREW		
319	LY30031-021A	SPECIAL SCREW	(x7)	

MONITOR ASSEMBLY <M5>

△ Symbol No.	Part No.	Part Name	Description	Local
500	LY21042-004C	MONIOTR ASSY		
501	LY20932-003F	MONITOR COVER(2.5)ASSY	2.5INCH	
501A	LY33007-001C	KNOB(LOCK)M	2.5INCH	
501B	LY33008-001A	HOLDER(LOCK)M	2.5INCH	
501C	LY30002-047A	COMPRES. SPRING	2.5INCH	
501D	LY30031-039A	SPECIAL SCREW	(x2)	
501E	LY30030-0E5A	SPACER(A)		
502	LY10407-001C	MONITOR CASE(2.5)		
503	LY30031-0D7A	SPECIAL SCREW	MCOV-MCAS(x2)	
504	LY30031-013A	SPECIAL SCREW	MCOV-HING(x2)	
506	LY33011-001C	LCD FRAME(2.5)		
507	QLD0262-001	LCD MODULE		
508	LY30029-0R5A	SPACER(A)	(x3)	
510	LY33010-001A	SHIELD CASE(2.5)		
512	QYSPSP1720RA	SCREW	M.PWB-S.CA	
513	LY33012-001A	DIFF.SHEET(2.5)		
514	LY43938-001A	LIGHT SCREEN		
515	LY33013-003C	MONITOR HINGE ASSY		
515A	LY33015-002A	HINGE COVER(U)		
515B	LY32969-002A	HINGE COVER(L)		
515C	LY30031-014A	SPECIAL SCREW	HINC-U-L(x2)	
516	LY43936-001A	HOLDER(LAMP)	(x2)	
517	LY43396-001A	SHEET(REFLECT)		
518	QLL0142-001	LAMP		

MAIN BOARD ASSEMBLY <01>

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	YB10404J-02	MAIN BOARD ASSY		
IC1001	MN103S33NJD	IC(MICRO C ROM)	MASK	
IC1001	or MN103SF33NY4JD	IC(MICRO C ROM)	FLASH	
IC1002	MB90097PFV149-X	IC(MICRO C ROM)	MB90099	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
IC1003	SN74AHC1G00K-X	IC			Q4801	2SC4655J/BC/-X	TRANSISTOR	HALL DRIVE	
IC1003	or SN74AHC1G00DC-X	IC			Q4806	2SC4617/QR/-X	TRANSISTOR	2SC4617/QR	
IC1004	S-89220ACNC-W	IC			Q4806	or BC847BT-X	TRANSISTOR		
IC1005	X25330S8I-2.5-X	IC			Q4851	2SC4617/RS/-X	TRANSISTOR		
IC1005	or AT25320N-10SI-X	IC			Q4851	or BC847BT-X	TRANSISTOR		
IC1005	or M95320-WMN6W-X	IC			Q6101	SSM5G01TU-X	MOS FET		
IC1005	or 25LC320-I/SN-X	IC			Q6102	2SA1577/QR/-X	TRANSISTOR		
IC1005	or CAT25C32SI-X	IC	CATALYST		Q6102	or BC807-25W-X	TRANSISTOR		
IC1006	RS5C314-X	IC			Q6201	SSM5G01TU-X	MOS FET		
IC1007	IC-PST3423U-X	IC			Q6301	SSM5G01TU-X	MOS FET		
IC1007	or S-80823CNNB-X	IC			Q6302	2SA1577/QR/-X	TRANSISTOR		
IC2201	AK4564VQ	IC			Q6302	or BC807-25W-X	TRANSISTOR		
IC3001	JCY0152	IC	JCY0152		Q6303	2SC4617/QR/-X	TRANSISTOR		
IC3002	BU2501FV-X	IC			Q6303	or BC847BT-X	TRANSISTOR		
IC3005	JCY0136-X	IC	JCY0136-X		Q6401	SSM5G01TU-X	MOS FET		
IC3701	BA7665FS-X	IC			Q6501	SSM5G01TU-X	MOS FET		
IC3701	or BA7665AFS-X	IC			Q6601	CPH3314-X	MOS FET		
IC3851	JCP8055FP	IC			Q6602	UMX1N-W	PAIR TRANSISTOR		
IC4201	HD49340NP-X	IC			Q6602	or HN1C01FU/G/-X	PAIR TRANSISTOR		
IC4202	MM1613AN-X	IC			Q6602	or BC847S-X	PAIR TRANSISTOR		
IC4301	JCY0200	IC			Q6603	2SA1577/QR/-X	TRANSISTOR		
IC4302	R1160N151B-X	IC			Q6603	or BC807-25W-X	TRANSISTOR		
IC4802	BA10358FVM-W	IC	HALL AMP+		Q6604	DTC144EE-X	DIGI TRANSISTOR		
IC4803	BA10358FVM-W	IC	HALL AMP-		Q6604	or BCR148T-X	DIGI TRANSISTOR		
IC4804	LM358AD-X	IC	DRIVE AMP		Q6605	UMT1N-W	PAIR TRANSISTOR		
IC4804	or LM358AD623-X	IC	DRIVE AMP		Q6605	or HN1A01FU/G/-X	PAIR TRANSISTOR		
IC4851	UPD16879GS-X	IC	F/Z_MDA		Q6605	or BC856S-X	PAIR TRANSISTOR		
IC5501	JCY0185	IC			Q6606	2SC4617/QR/-X	TRANSISTOR		
IC6001	FA3698F	IC			Q6606	or BC847BT-X	TRANSISTOR		
IC6801	R1224N102G-X	IC			Q6701	CPH3314-X	MOS FET		
					Q6801	FML9-W	TRANSISTOR		
Q1001	DTA114EE-X	DIGI TRANSISTOR			D1001	DA221-X	DIODE ARRAY		
Q1001	or PDTA114EE-X	DIGI TRANSISTOR			D1001	or MA133-X	SI DIODE		
Q1001	or RN2102-X	DIGI TRANSISTOR			D3001	EC2C01C-TR-X	VARI CAP DIODE		
Q1001	or BCR183T-X	DIGI TRANSISTOR			D3002	EC2C01C-TR-X	VARI CAP DIODE		
Q1002	UMC3N-W	DIGI TRANSISTOR			D3003	EC2C01C-TR-X	VARI CAP DIODE		
Q1003	UMC3N-W	DIGI TRANSISTOR			D3004	MA2Z720-X	SB DIODE		
Q1004	UMC3N-W	DIGI TRANSISTOR			D5501	1SS355-X	SI DIODE		
Q1005	DTC143XE-X	DIGI TRANSISTOR			D6601	RB481K-X	SB DIODE		
Q1006	UMC3N-W	DIGI TRANSISTOR			D6602	RB480Y-W	SB DIODE		
Q1007	2SC4617/QR/-X	TRANSISTOR			D6701	RB160M-30-X	SB DIODE		
Q1007	or BC847BT-X	TRANSISTOR			D6702	RB160M-30-X	SB DIODE		
Q1008	DTC124EE-X	DIGI TRANSISTOR			△ D6801	RB715F-X	SB DIODE		
Q1008	or PDTC124EE-X	DIGI TRANSISTOR			△ D6801	or BAS40-05W-X	SB DIODE		
Q1008	or BCR141T-X	DIGI TRANSISTOR							
Q1009	2SJ347-X	MOS FET							
Q2001	UMX1N-W	PAIR TRANSISTOR			C1001	NDCA1HJ-8R0W	C CAPACITOR	8pF 50V J	
Q2001	or BC847S-X	PAIR TRANSISTOR			C1002	NDCA1HJ-100W	C CAPACITOR	10pF 50V J	
Q2002	UMX1N-W	PAIR TRANSISTOR			C1004	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q2002	or BC847S-X	PAIR TRANSISTOR			C1005	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q2003	UMX1N-W	PAIR TRANSISTOR			C1007	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q2003	or BC847S-X	PAIR TRANSISTOR			C1008	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q2004	UMX1N-W	PAIR TRANSISTOR			C1009	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q2004	or BC847S-X	PAIR TRANSISTOR			C1010	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q2005	UMX1N-W	PAIR TRANSISTOR			C1011	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q2005	or BC847S-X	PAIR TRANSISTOR			C1012	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q2006	UMX1N-W	PAIR TRANSISTOR			C1013	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q2006	or BC847S-X	PAIR TRANSISTOR			C1014	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q2202	UMX1N-W	PAIR TRANSISTOR			C1015	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q2202	or BC847S-X	PAIR TRANSISTOR			C1019	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z	
Q2401	2SC4617/QR/-X	TRANSISTOR			C1020	NCBA1EK-682W	C CAPACITOR	6800pF 25V K	
Q2401	or BC847BT-X	TRANSISTOR			C1021	NCBA1EK-682W	C CAPACITOR	6800pF 25V K	
Q2403	2SC4617/QR/-X	TRANSISTOR			C1022	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z	
Q2403	or BC847BT-X	TRANSISTOR			C1024	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z	
Q3001	2SC4617/RS/-X	TRANSISTOR			C1025	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z	
Q3001	or BC847BT-X	TRANSISTOR			C1029	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z	
Q3002	2SC4617/RS/-X	TRANSISTOR			C1030	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
Q3002	or BC847BT-X	TRANSISTOR			C1032	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z	
Q3701	UMT1N-W	PAIR TRANSISTOR			C1035	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z	
Q3701	or XP4401-W	TRANSISTOR			C1036	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q3701	or BC856S-X	PAIR TRANSISTOR			C1037	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z	
Q3702	UMZ1N-W	PAIR TRANSISTOR			C1038	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z	
Q3702	or XP4601-W	TRANSISTOR			C1039	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z	
Q3704	2SA1774/RS/-X	TRANSISTOR			C1040	NDCA1HJ-100W	C CAPACITOR	10pF 50V J	
Q3704	or BC857BT-X	TRANSISTOR			C1041	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q3705	UMT1N-W	PAIR TRANSISTOR			C1042	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q3705	or XP4401-W	TRANSISTOR			C1043	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
Q3705	or BC856S-X	PAIR TRANSISTOR			C1044	NDCA1HJ-470W	C CAPACITOR	47pF 50V J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C1045	NDCA1HJ-470W	C CAPACITOR	47pF 50V J		C3043	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C1046	NCF31AZ-105X	C CAPACITOR	1uF 10V Z		C3044	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1047	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z		C3045	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1048	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z		C3046	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C1049	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z		C3047	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1050	NCFA1HZ-103W	C CAPACITOR	0.01uF 50V Z		C3048	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C1051	NCB31CK-223X	C CAPACITOR	0.022uF 16V K		C3049	NCBA1HK-222W	C CAPACITOR	2200pF 50V K	
C1052	NCB31CK-223X	C CAPACITOR	0.022uF 16V K		C3050	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C1053	NCB31CK-223X	C CAPACITOR	0.022uF 16V K		C3055	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C1054	NCB31CK-223X	C CAPACITOR	0.022uF 16V K		C3059	NBE20GM-226X	TA E CAPACITOR	22uF 4V M	
C1055	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z		C3060	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C1064	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M		C3064	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	
C2201	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3066	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C2202	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3067	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	
C2203	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3069	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C2204	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3701	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C2205	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3702	NDCA1HJ-560W	C CAPACITOR	56pF 50V J	
C2209	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3703	NDCA1HJ-270W	C CAPACITOR	27pF 50V J	
C2210	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3704	NDCA1HJ-680W	C CAPACITOR	68pF 50V J	
C2211	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3705	NDCA1HJ-270W	C CAPACITOR	27pF 50V J	
C2212	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3706	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C2213	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3707	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2214	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3708	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C2215	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3709	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2216	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3712	NEA70GM-337X	E CAPACITOR	330uF 4V M	
C2217	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3713	NEA70GM-337X	E CAPACITOR	330uF 4V M	
C2218	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3715	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2223	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3801	NCB21AK-105X	C CAPACITOR	1uF 10V K	
C2224	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3802	NCB21AK-105X	C CAPACITOR	1uF 10V K	
C2401	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C3803	NBE20GM-476X	TA E CAPACITOR	47uF 4V M	
C2402	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C3804	NBE20GM-476X	TA E CAPACITOR	47uF 4V M	
C2403	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C3851	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2404	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C3852	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2405	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3853	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2406	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C3854	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2603	NCBA1CK-153W	C CAPACITOR	0.015uF 16V K		C3855	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C2604	NCBA1CK-153W	C CAPACITOR	0.015uF 16V K		C3856	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2605	NCBA1EK-472W	C CAPACITOR	4700pF 25V K		C3857	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C2606	NCBA1EK-472W	C CAPACITOR	4700pF 25V K		C3858	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C2607	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C3859	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2608	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C3860	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C2611	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3861	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2612	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C4201	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C2613	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C4202	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C2614	NDCA1HJ-101W	C CAPACITOR	100pF 50V J		C4203	NCB21AK-105X	C CAPACITOR	1uF 10V K	
C2615	NDCA1HJ-101W	C CAPACITOR	100pF 50V J		C4204	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3001	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C4205	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3003	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C4206	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C3005	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C4207	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3006	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C4208	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C3007	NCB10JK-106X	C CAPACITOR	10uF 6.3V K		C4209	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3008	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C4210	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3009	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C4211	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3011	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4212	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3012	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4213	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3013	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4214	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3015	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4216	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3016	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4301	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3017	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4302	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3020	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4303	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3021	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4304	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3022	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4305	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3023	NDCA1HJ-330W	C CAPACITOR	33pF 50V J		C4306	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3024	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C4307	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3025	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4308	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3026	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C4309	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3027	NCBA1EK-472W	C CAPACITOR	4700pF 25V K		C4310	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3028	NDCA1EJ-271W	C CAPACITOR	270pF 25V J		C4311	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3029	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4312	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3030	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4313	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C3031	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4314	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3032	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C4315	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3033	NDCA1HJ-220W	C CAPACITOR	22pF 50V J		C4316	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C3036	NDCA1HJ-8R0W	C CAPACITOR	8pF 50V J		C4317	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3037	NDCA1HJ-8R0W	C CAPACITOR	8pF 50V J		C4803	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C3038	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4804	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
C3039	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4806	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z	
C3042	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4808	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C4809	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z		C6501	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4810	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C6503	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4811	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C6505	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4812	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z		C6601	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4813	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z		C6602	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4814	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z		C6603	NCB11EK-105X	C CAPACITOR	1uF 25V K	
C4815	NCB31HK-152X	C CAPACITOR	1500pF 50V K		C6605	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4819	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C6606	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4851	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M		C6607	NCB11EK-105X	C CAPACITOR	1uF 25V K	
C4852	NCFA1AZ-104W	C CAPACITOR	0.1uF 10V Z		C6608	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C4853	NBE21AM-335X	TA E CAPACITOR	3.3uF 10V M		C6609	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4854	NBE21AM-106X	TA E CAPACITOR	10uF 10V M		C6701	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4855	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C6703	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4858	NDCA1HJ-330W	C CAPACITOR	33pF 50V J		C6801	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4859	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		C6802	NBE40JM-476X	TA E CAPACITOR	47uF 6.3V M	
C4860	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		C6804	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4861	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C6807	NCB10JK-106X	C CAPACITOR	10uF 6.3V K	
C4862	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C6809	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	
C4864	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M						
C4865	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1001	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	
C5501	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1002	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C5503	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1003	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C5504	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1006	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C5506	NBE40GM-476X	TA E CAPACITOR	47uF 4V M		R1007	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C5507	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1008	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C5508	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1009	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C5509	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1010	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C5510	NBP21VM-105X	TA E CAPACITOR	1uF 35V M		R1011	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C5511	NBZ0003-475X	TA E CAPACITOR	4.7uF 20V M		R1012	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C5512	NBE21AM-106X	TA E CAPACITOR	10uF 10V M		R1013	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C5513	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1014	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C5514	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1015	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C5515	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1016	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C5516	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1017	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J	
C5517	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1018	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J	
C5518	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1019	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C5519	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1020	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6002	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1021	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6003	NEA71CM-106X	E CAPACITOR	10uF 16V M		R1022	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6004	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1023	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6021	NCB21CK-104X	C CAPACITOR	0.1uF 16V K		R1024	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6022	NCB21CK-104X	C CAPACITOR	0.1uF 16V K		R1025	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6023	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1027	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C6024	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1030	NRSA6AJ-753W	MG RESISTOR	75kΩ 1/16W J	
C6025	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1031	NRSA6AJ-334W	MG RESISTOR	330kΩ 1/16W J	
C6026	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1032	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
C6027	NCBA1EK-472W	C CAPACITOR	4700pF 25V K		R1033	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
C6029	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R1034	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
C6030	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R1035	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6031	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R1037	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	
C6032	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R1038	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6033	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		R1039	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	
C6034	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1040	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6035	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1043	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6036	NDCA1HJ-101W	C CAPACITOR	100pF 50V J		R1044	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6037	NCB21CK-473X	C CAPACITOR	0.047uF 16V K		R1045	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	
C6038	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		R1046	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6039	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1047	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6040	NCB31CK-473X	C CAPACITOR	0.047uF 16V K		R1048	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C6041	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		R1049	NRSA6AJ-623W	MG RESISTOR	62kΩ 1/16W J	
C6042	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		R1050	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J	
C6043	NCB31CK-223X	C CAPACITOR	0.022uF 16V K		R1051	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C6044	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		R1052	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6045	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1053	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	
C6101	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1054	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6103	NCB10JK-106X	C CAPACITOR	10uF 6.3V K		R1055	NRSA6AJ-334W	MG RESISTOR	330kΩ 1/16W J	
C6104	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R1056	NRSA6AJ-334W	MG RESISTOR	330kΩ 1/16W J	
C6105	NCBA1HK-561W	C CAPACITOR	560pF 50V K		R1057	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6106	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1058	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6201	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1059	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6203	NCB10JK-106X	C CAPACITOR	10uF 6.3V K		R1060	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C6204	NCBA1EK-472W	C CAPACITOR	4700pF 25V K		R1061	NRSA6AJ-561W	MG RESISTOR	560Ω 1/16W J	
C6301	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1062	NRSA6AJ-224W	MG RESISTOR	220kΩ 1/16W J	
C6303	NCB10JK-106X	C CAPACITOR	10uF 6.3V K		R1063	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	
C6304	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R1064	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C6401	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1065	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	
C6403	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1066	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C6405	NCB31CK-683X	C CAPACITOR	0.068uF 16V K		R1067	NRSA6AJ-334W	MG RESISTOR	330kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R1068	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3002	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1069	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3004	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1070	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J		R3005	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	
R1071	NRSA6AJ-272W	MG RESISTOR	2.7kΩ 1/16W J		R3006	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	
R1072	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J		R3007	NRSA6AJ-562W	MG RESISTOR	5.6kΩ 1/16W J	
R1073	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3008	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	
R1074	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R3009	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1075	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R3010	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1076	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R3011	NRSA6AJ-224W	MG RESISTOR	220kΩ 1/16W J	
R1077	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3013	NRSA6AJ-242W	MG RESISTOR	2.4kΩ 1/16W J	
R1078	NRSA6AJ-393W	MG RESISTOR	39kΩ 1/16W J		R3014	NRSA6AJ-392W	MG RESISTOR	3.9kΩ 1/16W J	
R1079	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J		R3015	NRSA6AJ-392W	MG RESISTOR	3.9kΩ 1/16W J	
R1080	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J		R3016	NRVA6AD-560W	CMF RESISTOR	56Ω 1/16W D	
R1081	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3017	NRVA6AD-560W	CMF RESISTOR	56Ω 1/16W D	
R1082	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J		R3018	NRVA6AD-560W	CMF RESISTOR	56Ω 1/16W D	
R1083	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3019	NRVA6AD-560W	CMF RESISTOR	56Ω 1/16W D	
R1084	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3020	NRVA6AD-512W	CMF RESISTOR	5.1kΩ 1/16W D	
R1085	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3021	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1086	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J		R3025	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R1087	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J		R3027	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1088	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J		R3029	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	
R1089	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J		R3030	NRSA6AJ-224W	MG RESISTOR	220kΩ 1/16W J	
R1091	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3031	NRSA6AJ-224W	MG RESISTOR	220kΩ 1/16W J	
R1092	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3032	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	
R1093	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3034	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	
R1094	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3036	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1095	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3037	NRSA6AJ-681W	MG RESISTOR	680Ω 1/16W J	
R1096	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3057	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	
R1097	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3066	NRSA6AJ-561W	MG RESISTOR	560Ω 1/16W J	
R1099	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3067	NRSA6AJ-561W	MG RESISTOR	560Ω 1/16W J	
R2001	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3068	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	
R2002	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3069	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	
R2003	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3071	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2004	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3074	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R2005	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3082	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2006	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3701	NRSA6AD-271W	MG RESISTOR	270Ω 1/16W D	
R2007	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3702	NRSA6AD-271W	MG RESISTOR	270Ω 1/16W D	
R2008	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3703	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
R2009	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3704	NRSA6AD-301W	MG RESISTOR	300Ω 1/16W D	
R2010	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3705	NRSA6AD-301W	MG RESISTOR	300Ω 1/16W D	
R2011	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3706	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
R2012	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J		R3707	NRSA6AD-680W	MG RESISTOR	68Ω 1/16W D	
R2201	NRSA6AJ-684W	MG RESISTOR	680kΩ 1/16W J		R3708	NRSA6AD-680W	MG RESISTOR	68Ω 1/16W D	
R2202	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J		R3709	NRSA6AD-680W	MG RESISTOR	68Ω 1/16W D	
R2203	NRSA6AJ-393W	MG RESISTOR	39kΩ 1/16W J		R3710	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R2204	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J		R3711	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R2206	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J		R3712	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	
R2207	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J		R3713	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R2208	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J		R3714	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J	
R2209	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J		R3715	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R2210	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R3722	NRSA6AD-131W	MG RESISTOR	130Ω 1/16W D	
R2211	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R3724	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	
R2212	NRSA6AJ-2R7W	MG RESISTOR	2.7Ω 1/16W J		R3725	NRSA6AD-131W	MG RESISTOR	130Ω 1/16W D	
R2213	NRSA6AJ-2R7W	MG RESISTOR	2.7Ω 1/16W J		R3726	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	
R2217	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R3727	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	
R2218	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R3728	NRSA6AD-131W	MG RESISTOR	130Ω 1/16W D	
R2219	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R3730	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	
R2220	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R3807	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R2221	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R3851	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	
R2222	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R3852	NRSA6AD-821W	MG RESISTOR	820Ω 1/16W D	
R2223	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R3853	NRSA6AD-273W	MG RESISTOR	27kΩ 1/16W D	
R2224	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R3854	NRSA6AD-153W	MG RESISTOR	15kΩ 1/16W D	
R2225	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R3855	NRSA6AD-821W	MG RESISTOR	820Ω 1/16W D	
R2226	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4201	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	
R2229	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J		R4202	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2230	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J		R4203	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2231	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J		R4204	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R2401	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R4205	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R2402	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R4301	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R2403	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J		R4303	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2406	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4304	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2407	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R4306	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2601	NRSA6AJ-182W	MG RESISTOR	1.8kΩ 1/16W J		R4307	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	
R2602	NRSA6AJ-182W	MG RESISTOR	1.8kΩ 1/16W J		R4308	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	
R2607	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R4309	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2608	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R4310	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2609	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J		R4315	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2610	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J		R4317	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R4319	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R5504	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R4321	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R5505	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R4326	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J		R5506	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R4327	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R5507	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R4328	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R5509	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	
R4329	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R5511	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	
R4330	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R5512	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R4331	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R5513	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R4332	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R5514	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R4333	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6021	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R4334	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6022	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R4335	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6023	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R4336	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6024	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R4337	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6025	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R4338	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J		R6026	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R4339	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6027	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	
R4341	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6028	NRSA6AD-751W	MG RESISTOR	750Ω 1/16W D	
R4342	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6029	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	
R4343	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6030	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	
R4344	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6031	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	
R4345	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J		R6033	NRSA6AJ-562W	MG RESISTOR	5.6kΩ 1/16W J	
R4346	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J		R6034	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	
R4348	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6035	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R4349	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6036	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R4350	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6037	NRSA6AD-153W	MG RESISTOR	15kΩ 1/16W D	
R4351	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6038	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R4352	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6039	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R4353	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6040	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R4354	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6042	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R4355	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6044	NRSA6AJ-224W	MG RESISTOR	220kΩ 1/16W J	
R4356	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6102	NRVA6AD-223W	CMF RESISTOR	22kΩ 1/16W D	
R4804	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R6103	NRVA6AD-103W	CMF RESISTOR	10kΩ 1/16W D	
R4805	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R6104	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J	
R4806	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J		R6105	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R4807	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J		R6106	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
R4808	NRSA6AJ-243W	MG RESISTOR	24kΩ 1/16W J		R6107	NRSA6AD-183W	MG RESISTOR	18kΩ 1/16W D	
R4809	NRSA6AJ-681W	MG RESISTOR	680Ω 1/16W J		R6108	NRSA6AD-123W	MG RESISTOR	12kΩ 1/16W D	
R4810	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R6109	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R4811	NRSA6AJ-824W	MG RESISTOR	820kΩ 1/16W J		R6202	NRSA6AD-123W	MG RESISTOR	12kΩ 1/16W D	
R4812	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J		R6203	NRSA6AD-153W	MG RESISTOR	15kΩ 1/16W D	
R4814	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J		R6302	NRSA6AD-183W	MG RESISTOR	18kΩ 1/16W D	
R4815	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R6303	NRSA6AD-472W	MG RESISTOR	4.7kΩ 1/16W D	
R4816	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J		R6305	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R4817	NRSA6AJ-334W	MG RESISTOR	330kΩ 1/16W J		R6306	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	
R4818	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J		R6308	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
R4819	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R6309	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R4820	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R6402	NRSA6AD-243W	MG RESISTOR	24kΩ 1/16W D	
R4821	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R6403	NRSA6AD-302W	MG RESISTOR	3kΩ 1/16W D	
R4822	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J		R6405	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	
R4823	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R6406	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R4824	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R6407	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R4827	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6502	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D	
R4828	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6503	NRSA6AD-562W	MG RESISTOR	5.6kΩ 1/16W D	
R4833	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R6505	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
R4836	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R6506	NRSA6AJ-273W	MG RESISTOR	27kΩ 1/16W J	
R4841	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6602	NRSA6AD-114W	MG RESISTOR	110kΩ 1/16W D	
R4842	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6603	NRSA6AD-392W	MG RESISTOR	3.9kΩ 1/16W D	
R4843	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6604	NRSA6AD-114W	MG RESISTOR	110kΩ 1/16W D	
R4844	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J		R6605	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	
R4854	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6606	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	
R4856	NRSA6AJ-6R8W	MG RESISTOR	6.8Ω 1/16W J		R6607	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D	
R4857	NRSA6AJ-6R8W	MG RESISTOR	6.8Ω 1/16W J		R6608	NRSA6AJ-273W	MG RESISTOR	27kΩ 1/16W J	
R4858	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J		R6609	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	
R4859	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6610	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D	
R4860	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6611	NRSA6AD-683W	MG RESISTOR	68kΩ 1/16W D	
R4862	NRSA6AJ-6R8W	MG RESISTOR	6.8Ω 1/16W J		R6612	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R4863	NRSA6AJ-6R8W	MG RESISTOR	6.8Ω 1/16W J		R6613	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J	
R4864	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R6614	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	
R4865	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R6615	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	
R4866	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R6616	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R4867	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R6617	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	
R4868	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6618	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R4870	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J		R6619	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R4871	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6701	NRZ0058-R20X	MG RESISTOR	0.2Ω 1/2W J	
R4874	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6702	NRSA6AD-114W	MG RESISTOR	110kΩ 1/16W D	
R4875	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6703	NRSA6AD-153W	MG RESISTOR	15kΩ 1/16W D	
R5501	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R6704	NRSA6AJ-224W	MG RESISTOR	220kΩ 1/16W J	
R5503	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J		R6706	NRSA6AD-823W	MG RESISTOR	82kΩ 1/16W D	

△ Symbol No.	Part No.	Part Name	Description	Local
R6707	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	
R6801	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R6803	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R6804	NRVA6AD-563W	CMF RESISTOR	56kΩ 1/16W D	
△ R6805	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R6813	NRVA6AD-273W	CMF RESISTOR	27kΩ 1/16W D	
R6815	NRSA6AJ-681W	MG RESISTOR	680Ω 1/16W J	
R8059	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
RA1001	NRZ0034-473W	NET RESISTOR	47kΩ 1/32W J	
RA1002	NRZ0034-104W	NET RESISTOR	100kΩ 1/32W J	
RA1004	NRZ0034-104W	NET RESISTOR	100kΩ 1/32W J	
RA1005	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J	
RA1006	NRZ0034-102W	NET RESISTOR	1kΩ 1/32W J	
RA1007	NRZ0034-102W	NET RESISTOR	1kΩ 1/32W J	
RA1008	NRZ0034-104W	NET RESISTOR	100kΩ 1/32W J	
RA3001	NRZ0034-560W	NET RESISTOR	56Ω 1/32W J	
RA3002	NRZ0034-560W	NET RESISTOR	56Ω 1/32W J	
RA3003	NRZ0034-100W	NET RESISTOR	10Ω 1/32W J	
RA3004	NRZ0034-103W	NET RESISTOR	10kΩ 1/32W J	
RA3005	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J	
L1001	NQL402M-100X	COIL	10uH M	
L1002	NQL402M-100X	COIL	10uH M	
L2401	NQL402M-100X	COIL	10uH M	
L2402	NQL402M-100X	COIL	10uH M	
L2604	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L3001	NQR0129-002X	FERRITE BEADS		
L3002	NQR0129-002X	FERRITE BEADS		
L3004	NQR0006-001X	FERRITE BEADS		
L3005	NQR0006-001X	FERRITE BEADS		
L3007	NQL085J-2R2X	COIL	2.2uH J	
L3008	NQL085J-120X	COIL	12uH J	
L3012	NQR0129-002X	FERRITE BEADS		
L3014	NQL38DK-100X	P COIL	10uH K	
L3015	NQR0006-001X	FERRITE BEADS		
L3701	NQL38DK-100X	P COIL	10uH K	
L3801	NQR0129-002X	FERRITE BEADS		
L3802	NQR0129-002X	FERRITE BEADS		
L3803	NQR0006-001X	FERRITE BEADS		
L3804	NQL38DK-100X	P COIL	10uH K	
L4201	NQR0129-002X	FERRITE BEADS		
L4301	NQR0129-002X	FERRITE BEADS		
L4302	NQR0129-002X	FERRITE BEADS		
L4802	NQL302N-100X	COIL	10uH N	
L4851	NQR0129-002X	FERRITE BEADS		
L4852	NQL315K-100X	COIL	10uH K	
L4853	NQL315K-100X	COIL	10uH K	
L5501	NQL315K-100X	COIL	10uH K	
L5502	NQR0129-002X	FERRITE BEADS		
L5503	NQR0129-002X	FERRITE BEADS		
L5504	NQR0129-002X	FERRITE BEADS		
L5505	NQL315K-100X	COIL	10uH K	
L5506	NQL315K-100X	COIL	10uH K	
L6001	NQLZ011-4R7X	COIL	4.7uH N	
L6002	NQLZ011-4R7X	COIL	4.7uH N	
L6101	NQL52EM-390X	COIL	39uH M	
L6201	NQL52EM-390X	COIL	39uH M	
L6301	NQL52EM-390X	COIL	39uH M	
L6302	NQL144K-220X	P COIL	22uH K	
L6401	NQL52EM-470X	COIL	47uH M	
L6501	NQL52EM-470X	COIL	47uH M	
L6601	NQL52EM-221X	COIL	220uH M	
L6701	NQL73EM-100X	COIL	10uH M	
L6801	NQL034K-470X	P COIL	47uH K	
CN101	QGF0528F1-40X	CONNECTOR	MONITOR L FFC/FFC (1-40)	
CN102	QGF0505F1-22X	CONNECTOR	JACK L FFC/FFC (1-22)	
CN104	QGA1002C1-11X	CONNECTOR	REAR W W-B (1-11)	
CN105	QGB0509M1-30X	CONNECTOR	JIG CN B B-B (1-30)	
CN106	QGA1201C2-05X	CONNECTOR	MIC W W-B (1-5)	
CN107	QGF0503C1-20X	CONNECTOR	CCD S FFC/FFC (1-20)	
CN108	QGF0503C1-24V	CONNECTOR	OP S FFC/FFC (1-24)	
CN109	QGF0503F1-16X	CONNECTOR	OPE UNIT L FFC/FFC (1-16)	
CN110	QGF0528F1-40X	CONNECTOR	PRE/MDA L FFC/FFC (1-40)	
CN111	QGF0528F1-40X	CONNECTOR	PRE/MDA L FFC/FFC (1-40)	
△ F6001	NMFZ007-2R0X-K	FUSE	2A 32V	
△ F6301	NMFZ007-1R25X-K	FUSE	1.25A 32V	
△ F6701	NMFZ007-1R25X-K	FUSE	1.25A 32V	

△ Symbol No.	Part No.	Part Name	Description	Local
△ F6801	NMFZ007-R50X-K	FUSE	0.5A 50V	
J501	NNZ0041-001X	D CONNECTOR	DV IEEE1394(4pin)	
X1001	NAX0578-001X	CRYSTAL		
X1002	NAX0564-001X	CRYSTAL		
X3002	NAX0480-001X	CRYSTAL	24.576MHz	
X5501	NAX0587-001X	CXO		
OT1	LY30030-069A	SPACER(A)		
OT2	LY44158-001A	SHEET(SHIELD)		
WR1	QAL0474-001	FPC	MAN-PRE/MD(x2)	

MONI-C BOARD ASSEMBLY <02>

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	YB10403A-02	MONI-C BOARD ASSY		
IC7601	AN2540FHQ	IC		
IC7602	RC4558D-X	IC		
IC7604	SN74LV08APW-X	IC		
Q7601	2SC4617/QR/-X	TRANSISTOR		
Q7601 or	2SC4738/YG/-X	TRANSISTOR		
Q7601 or	2SD2216J/QR/-X	TRANSISTOR		
Q7601 or	BC847BT-X	TRANSISTOR		
Q7602	2SA1774/QR/-X	TRANSISTOR		
Q7602 or	2SA1832/YG/-X	TRANSISTOR		
Q7602 or	BC857BT-X	TRANSISTOR		
Q7603	2SC4617/QR/-X	TRANSISTOR		
Q7603 or	2SC4738/YG/-X	TRANSISTOR		
Q7603 or	2SD2216J/QR/-X	TRANSISTOR		
Q7603 or	BC847BT-X	TRANSISTOR		
Q7604	2SA1774/QR/-X	TRANSISTOR		
Q7604 or	2SA1832/YG/-X	TRANSISTOR		
Q7604 or	BC857BT-X	TRANSISTOR		
Q7608	DTC144EE-X	DIGI TRANSISTOR		
Q7608 or	UN9213J-X	DIGI TRANSISTOR		
Q7608 or	RN1104-X	DIGI TRANSISTOR		
Q7608 or	BCR148T-X	DIGI TRANSISTOR		
Q7609	DTC144EE-X	DIGI TRANSISTOR		
Q7609 or	UN9213J-X	DIGI TRANSISTOR		
Q7609 or	RN1104-X	DIGI TRANSISTOR		
Q7609 or	BCR148T-X	DIGI TRANSISTOR		
Q7610	DTA144EE-X	DIGI TRANSISTOR		
Q7610 or	UN9113J-X	DIGI TRANSISTOR		
Q7610 or	RN2104-X	DIGI TRANSISTOR		
Q7610 or	BCR198T-X	DIGI TRANSISTOR		
D7602	1SS355-X	SI DIODE		
C1	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C7601	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C7602	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C7603	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C7604	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C7605	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C7606	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7607	NCB41CK-106X	C CAPACITOR	10uF 16V K	
C7608	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C7609	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7610	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C7611	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C7612	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C7613	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C7614	NCB31HK-152X	C CAPACITOR	1500pF 50V K	
C7615	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C7616	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C7617	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C7618	NCB10JK-106X	C CAPACITOR	10uF 6.3V K	
C7619	NCB10JK-106X	C CAPACITOR	10uF 6.3V K	
C7620	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C7621	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C7622	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C7623	NBE21AM-106X	TA E CAPACITOR	10uF 10V M	
C7624	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C7626	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7627	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C7628	NBP41EM-475X-B	TA E CAPACITOR	4.7uF 25V M		Q7503	or RN2104-X	DIGI TRANSISTOR		
C7629	NBP21CM-335X	TA E CAPACITOR	3.3uF 16V M		Q7503	or BCR198T-X	DIGI TRANSISTOR		
C7630	NBP41EM-475X-B	TA E CAPACITOR	4.7uF 25V M		Q7504	DTC144EE-X	DIGI TRANSISTOR		
C7631	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		Q7504	or UN9213J-X	DIGI TRANSISTOR		
C7632	NBP41EM-475X-B	TA E CAPACITOR	4.7uF 25V M		Q7504	or RN1104-X	DIGI TRANSISTOR		
C7633	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		Q7504	or BCR148T-X	DIGI TRANSISTOR		
C7634	NCB11CK-225X	C CAPACITOR	2.2uF 16V K						
C7635	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C7501	NCZ1016-120X	C CAPACITOR	12pF 2kV J	
C7637	NCB31EK-103X	C CAPACITOR	0.01uF 25V K		C7502	NCB21EK-273X	C CAPACITOR	0.027uF 25V K	
C7638	NCB21AK-225X	C CAPACITOR	2.2uF 10V K		C7503	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C7639	NBE21AM-106X	TA E CAPACITOR	10uF 10V M		C7504	NCB10JK-106X	C CAPACITOR	10uF 6.3V K	
C7642	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z						
R3	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R7501	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R4	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J		R7502	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R5	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J		R7503	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R6	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R7504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R7511	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J		R7512	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7601	NRVA63D-622X	CMF RESISTOR	6.2kΩ 1/16W D		R7513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7602	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J		L7501	NQLZ010-680X	COIL	68uH	
R7604	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		△ T7501	NQS0056-001X	SW TARN SF		
R7608	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J						
R7609	NRVA63D-223X	CMF RESISTOR	22kΩ 1/16W D		CN7601	QGF0507F3-16X	CONNECTOR	FFC/FPC (1-16)	
R7610	NRVA63D-433X	CMF RESISTOR	43kΩ 1/16W D		CN7602	QGF0507F3-16X	CONNECTOR	FFC/FPC (1-16)	
R7611	NRVA63D-821X	CMF RESISTOR	820Ω 1/16W D		CN7603	QGF0508F1-24X	CONNECTOR	FFC/FPC (1-24)	
R7612	NRVA63D-223X	CMF RESISTOR	22kΩ 1/16W D		△ F7501	NMFZ007-R40X-K	FUSE	0.4A 50V	
R7613	NRVA63D-223X	CMF RESISTOR	22kΩ 1/16W D		WR1	QAL0464-001	FPC	TEZUKE	
R7614	NRVA63D-223X	CMF RESISTOR	22kΩ 1/16W D						
R7615	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J						
R7616	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J						
R7617	NRSA02J-561X	MG RESISTOR	560Ω 1/10W J						
R7618	NRSA02J-561X	MG RESISTOR	560Ω 1/10W J						
R7619	NRVA63D-153X	CMF RESISTOR	15kΩ 1/16W D						
R7620	NRSA63J-335X	MG RESISTOR	3.3kΩ 1/16W J						
R7621	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J						
R7626	NRVA63D-562X	CMF RESISTOR	5.6kΩ 1/16W D						
R7627	NRVA63D-334X	CMF RESISTOR	330kΩ 1/16W D						
R7630	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J						
R7634	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J						
R7636	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J						
R7637	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J						
R7638	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J						
R7639	NRVA63D-123X	CMF RESISTOR	12kΩ 1/16W D						
R7663	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J						
L7601	NQL365K-100X	COIL	10uH K						
L7602	NQL365K-470X	COIL	47uH K						
L7603	NQL365K-100X	COIL	10uH K						
L7604	NQL365K-100X	COIL	10uH K						
L7605	NQL365K-100X	COIL	10uH K						
L7607	NQL365K-100X	COIL	10uH K						
CN761	QGF0508F1-40X	CONNECTOR	MAIN FFC/FPC (1-40)						
CN763	QGF0507F3-20X	CONNECTOR	2.5 FFC/FPC (1-20)						
CN765	QGF0506F2-32X	CONNECTOR	LCD BL FFC/FPC (1-32)						
SW2	NSW0145-001X	TACT SWITCH STOP							
SW3	NSW0145-001X	TACT SWITCH REW							
SW4	NSW0145-001X	TACT SWITCH FF							
SW5	NSW0145-001X	TACT SWITCH PLAY/PAUSE							
SW7	NSW0145-001X	TACT SWITCH INDEX							
SW8	NSW0145-001X	TACT SWITCH SELECT							
SW7601	NSW0200-001X	LEVER SWITCH MONI SW	2.5 OPN SW						
BL2.5 BOARD ASSEMBLY <03>					CCD BOARD ASSEMBLY <04>				
△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
PW1	YB20938A	BL2.5 BOARD ASSY			PW1	YB20942A-SS	CCD BOARD ASSY		
IC7604	DN8797MS-X	IC	TEZUKE		Q5001	2SC3931/CD/-X	TRANSISTOR		
Q7501	2SD1664/QR/-W	TRANSISTOR			C5001	NBP41EM-475X-B	TA E CAPACITOR	4.7uF 25V M	
Q7502	2SD1664/QR/-W	TRANSISTOR			C5002	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
Q7503	DTA144EE-X	DIGI TRANSISTOR			C5003	NBE21AM-106X	TA E CAPACITOR	10uF 10V M	
Q7503 or UN9113J-X		DIGI TRANSISTOR			C5004	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
					C5005	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
					C5006	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
					C5007	NCB31EK-222X	C CAPACITOR	2200pF 25V K	
					R5001	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
					R5002	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
					L5001	NQL315K-100X	COIL	10uH K	
					L5002	NQL315K-100X	COIL	10uH K	
					CN5001	QGF0517F2-20X	CONNECTOR	FFC/FPC (1-20)	
PREMDA BOARD ASSEMBLY <05>									
△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
PW1	YB10405A-03	PREMDA BOARD ASSY			PW1	YB10405A-03	PREMDA BOARD ASSY		
IC1601	BD6637KS	IC	MDA BD6637		IC1601	BD6637KS	IC	MDA BD6637	
IC1701	LM358DMR2-X	IC	REELAMP5V		IC1701	LM358DMR2-X	IC	REELAMP5V	
IC1702	LM393DMR2-X	IC	REELSMT		IC1702	LM393DMR2-X	IC	REELSMT	
IC3501	JCY0132	IC			IC3501	JCY0132	IC		
IC3502	SN74AHC1G04K-X	IC			IC3502	SN74AHC1G04K-X	IC		
IC3502 or SN74AHC1G04DC-X		IC(DIGITAL)			IC3502 or SN74AHC1G04DC-X		IC(DIGITAL)		
Q1601	UMC3N-W	DIGI TRANSISTOR	LD ON		Q1601	UMC3N-W	DIGI TRANSISTOR	LD ON	
D1602	DAP222-X	DIODE ARRAY	LD OUT		D1602	DAP222-X	DIODE ARRAY	LD OUT	
D1602 or MA132WA-X		SI DIODE			D1602 or MA132WA-X		SI DIODE		
D1603	DAP222-X	DIODE ARRAY	LD ON		D1603	DAP222-X	DIODE ARRAY	LD ON	
D1603 or MA132WA-X		SI DIODE			D1603 or MA132WA-X		SI DIODE		
D1604	DAP222-X	DIODE ARRAY	C.ERR-3V		D1604	DAP222-X	DIODE ARRAY	C.ERR-3V	

△ Symbol No.	Part No.	Part Name	Description	Local
D1604	or MA132WA-X	SI DIODE		
C1601	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C1602	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C1603	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C1605	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1606	NCB31HK-152X	C CAPACITOR	1500pF 50V K	
C1607	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C1614	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C1618	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C1619	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C1620	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C1621	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C1622	NCB31CK-223X	C CAPACITOR	0.022uF 16V K	
C1623	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C1624	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C1625	NCS31HJ-101X	C CAPACITOR	100pF 50V J	
C1626	NCB31HK-822X	C CAPACITOR	8200pF 50V K	
C1627	NCB31HK-822X	C CAPACITOR	8200pF 50V K	
C1628	NCB21CK-224X	C CAPACITOR	0.22uF 16V K	
C1629	NBZ0018-106X	TA E CAPACITOR	10uF 20VM	
C1630	NCB21CK-334X	C CAPACITOR	0.33uF 16V K	
C1632	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C1633	NCB21CK-474X	C CAPACITOR	0.47uF 16V K	
C1641	NCB21CK-474X	C CAPACITOR	0.47uF 16V K	
C1701	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1702	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C3501	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C3502	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C3503	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C3504	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C3505	NCB31CK-223X	C CAPACITOR	0.022uF 16V K	
C3506	NCB21AK-105X	C CAPACITOR	1uF 10V K	
C3507	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C3508	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C3509	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C3510	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C3511	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C3512	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C3513	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C3514	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C3515	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C3516	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	
C3517	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C3518	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C3519	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C3520	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C3521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C3522	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M	
C3523	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C3524	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C3525	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M	
C3526	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
C3527	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C3528	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	
R1601	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
R1602	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	
R1603	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R1604	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R1610	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R1611	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R1612	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R1613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R1614	NRZ0072-R330X	MG RESISTOR	0.33Ω 1/4W F	
R1616	NRSA63D-332X	MG RESISTOR	3.3kΩ 1/16W D	
R1617	NRZ0072-R330X	MG RESISTOR	0.33Ω 1/4W F	
R1620	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R1621	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R1622	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R1624	NRSA63D-183X	MG RESISTOR	18kΩ 1/16W D	
R1625	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
R1629	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R1630	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1631	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1635	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R1636	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
R1637	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R1638	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1639	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1640	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1641	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1642	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1648	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1701	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	
R1702	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R1703	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R1704	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R1705	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R1706	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	
R1707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R1708	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	
R1709	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R1710	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	
R1711	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R1712	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3501	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R3502	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R3503	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3504	NRSA63D-241X	MG RESISTOR	240Ω 1/16W D	
R3505	NRSA63D-241X	MG RESISTOR	240Ω 1/16W D	
R3506	NRSA63D-241X	MG RESISTOR	240Ω 1/16W D	
R3507	NRSA63D-241X	MG RESISTOR	240Ω 1/16W D	
R3508	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R3511	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	

L3501	NQR0006-001X	FERRITE BEADS		
L3502	NQL402M-100X	COIL	10uH M	
L3503	NQR0006-001X	FERRITE BEADS		
L3504	NQR0006-001X	FERRITE BEADS		
L3505	NQR0006-001X	FERRITE BEADS		
CN401	QGF0528F1-40X	CONNECTOR	MAIN(J)PRE) FFC/FPC (1-40)	
CN402	QGF0517F1-08X	CONNECTOR	HEAD FFC/FPC (1-8)	
CN403	QGF0505F2-06X	CONNECTOR	LOADING FFC/FPC (1-6)	
CN404	QGF0507F3-11X	CONNECTOR	DRUM FFC/FPC (1-11)	
CN405	QGF0507F3-18X	CONNECTOR	CAPTAN FFC/FPC (1-18)	
CN406	QGF0503F4-16X	CONNECTOR	SENSOR FFC/FPC (1-16)	
CN407	QGF0508F1-06X	CONNECTOR	ROT E SW FFC/FPC (1-6)	
CN408	QGF0528F1-40X	CONNECTOR	MAIN(Z)MDA) FFC/FPC (1-40)	
△ F1601	NMFZ007-R20X-K	FUSE	0.2A 50V	
△ F1602	NMFZ007-R50X-K	FUSE	0.5A 50V	
OT1	LY33021-001A	SHIELD COVER(P/R)	PRE S-CASE	

JACK BOARD ASSEMBLY <06>

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	YB20943B-02	JACK BOARD ASSY		
IC501	LM358DR-X	IC		
IC502	RPM7138-V4	IR DETECT UNIT	JVC	
IC502	or RPM7138-SV4	IR DETECT UNIT		
Q501	RPM-22PB	PHOTO TRANSISTOR		
D501	SML-010LT-X	LED	TALLY	
D503	MA8068-X	Z DIODE		
D506	MA8068-X	Z DIODE		
D507	EMZ6.8N-X	Z DIODE	EDIT	
C501	NBE21AM-335X	TA E CAPACITOR	3.3uF 10V M	
C502	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C503	NCB31EK-153X	C CAPACITOR	0.015uF 25V K	
C504	NCB31EK-153X	C CAPACITOR	0.015uF 25V K	
C506	NBE21AM-106X	TA E CAPACITOR	10uF 10V M	
C509	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	
C512	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C513	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
R501	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R502	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	
R503	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
R504	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R506	NRSA63J-824X	MG RESISTOR	820kΩ 1/16W J	
R507	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R508	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	
R509	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	
R510	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R511	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	
R512	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R513	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R514	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R515	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R516	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R517	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R518	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R519	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R520	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R521	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R522	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R523	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
L501	NQR0251-004X	FERRITE BEADS		
L502	NQR0251-004X	FERRITE BEADS		
L503	NQR0251-004X	FERRITE BEADS		
CN501	QGF0503C1-22X	CONNECTOR	TO MAIN FFC/FPC (1-22)	
J501	QNS0078-001	3.5 JACK	A/V	
J502	QND0004-001	S JACK	S	
J503	PEMC1203	MINI JACK	EDIT	
SW501	NSW0122-001X	DETECT SWITCH EJECT SW	EJECT	

C-VF BOARD ASSEMBLY <07>

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	YB20941A	C-VF BOARD ASSY		
Q7001	PUMX1-W	PAIR TRANSISTOR		
Q7001 or	BC847S-X	PAIR TRANSISTOR		
D7001	E1S35AW0C501-X	LED		
C7001	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
R7001	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R7002	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	
R7003	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
CN7001	QGF0532F2-18X	CONNECTOR	FFC/FPC (1-18)	
CN7002	QGF0507F3-16X	CONNECTOR	FFC/FPC (1-16)	