

PARTS LIST

SAFETY PRECAUTION

Parts identified by the $\triangle$ symbol are critical for safety. Replace only with specified part numbers.


BEWARE OF BOGUS PARTS







Parts that do not meet specifications may cause trouble in regard to safety and performance. We recommend that genuine JVC parts be used.

1. EXPLODED VIEW


1.1 FINAL ASSEMBLY<M1>

The instruction manual to be provided with this product will differ according to the destination.

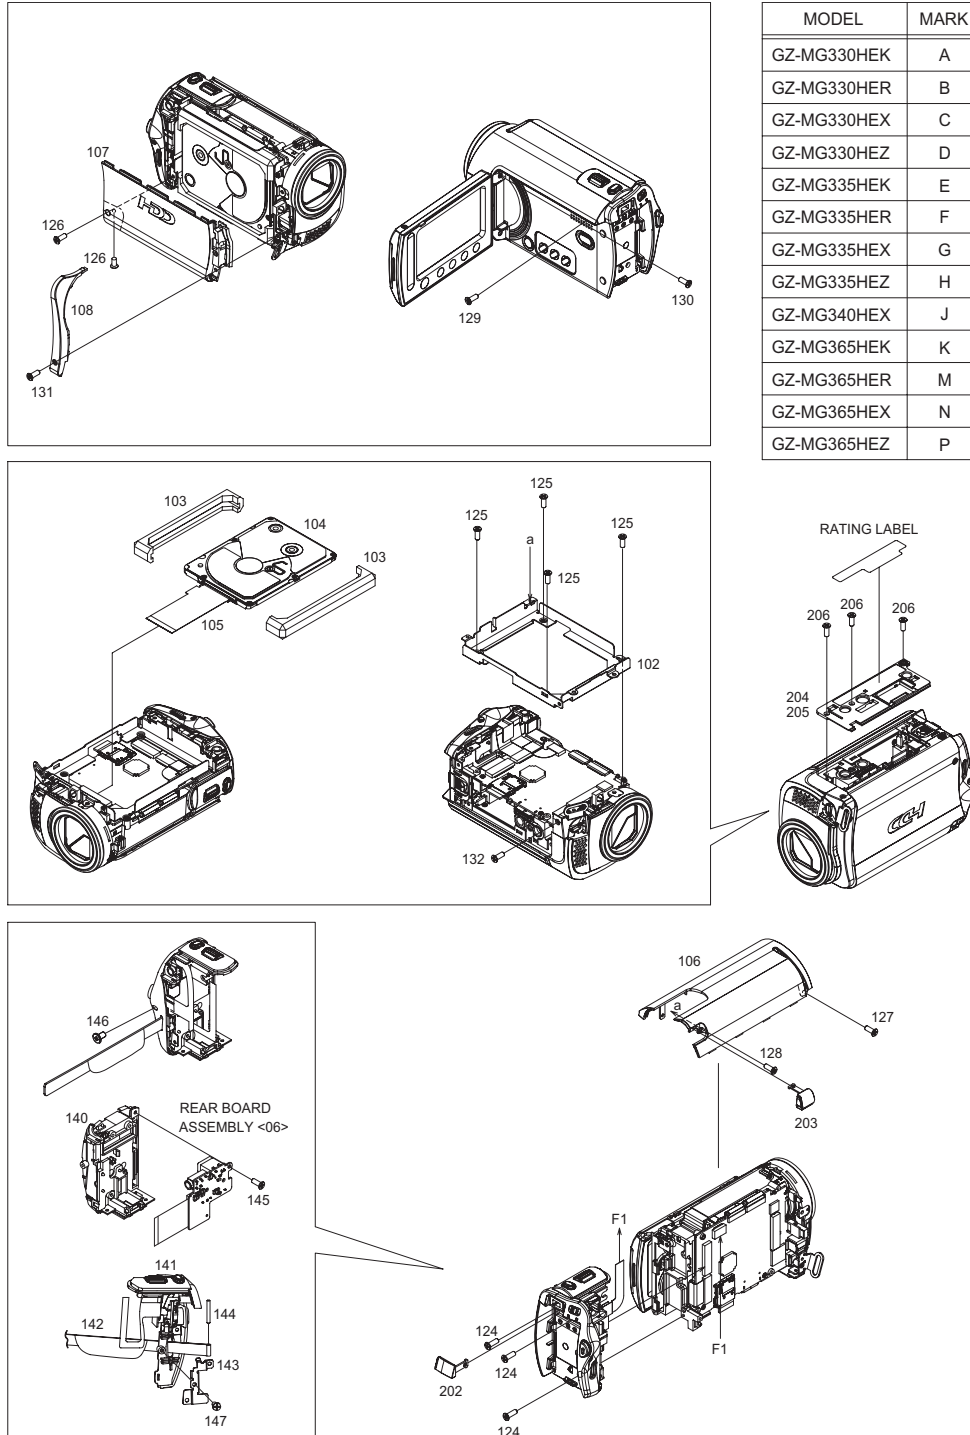


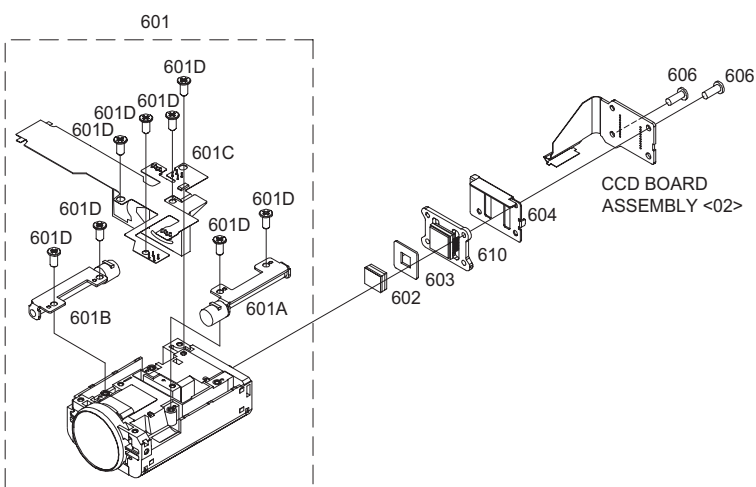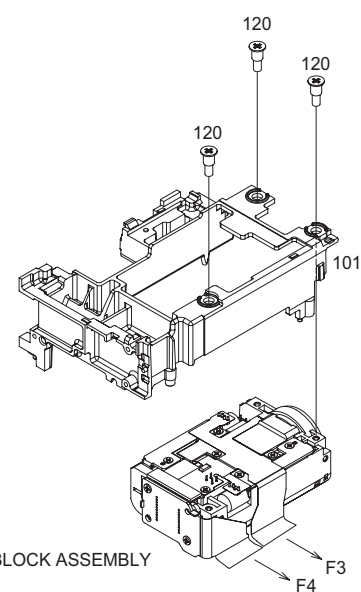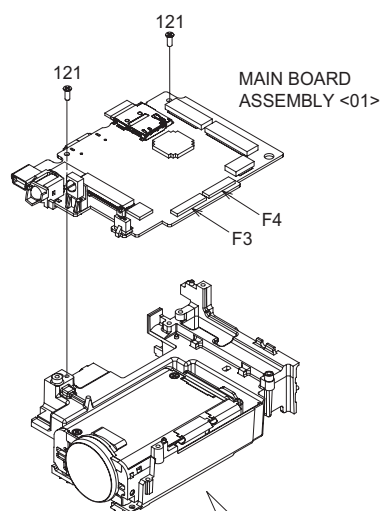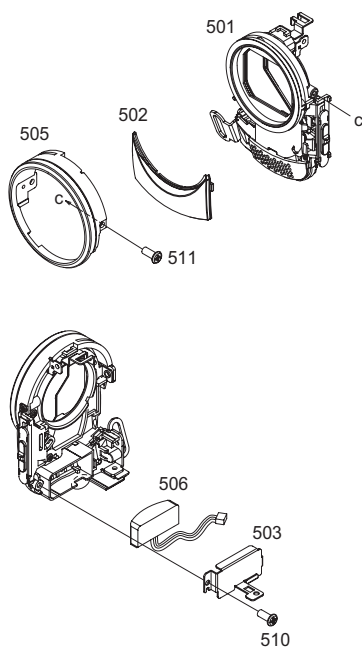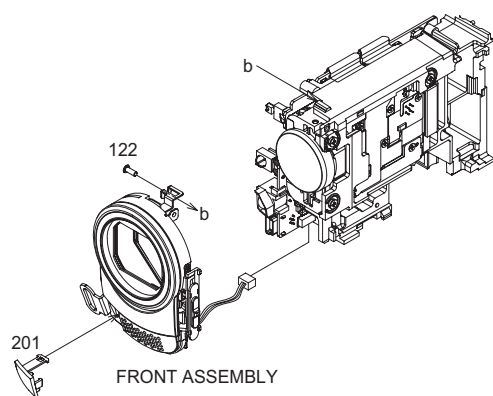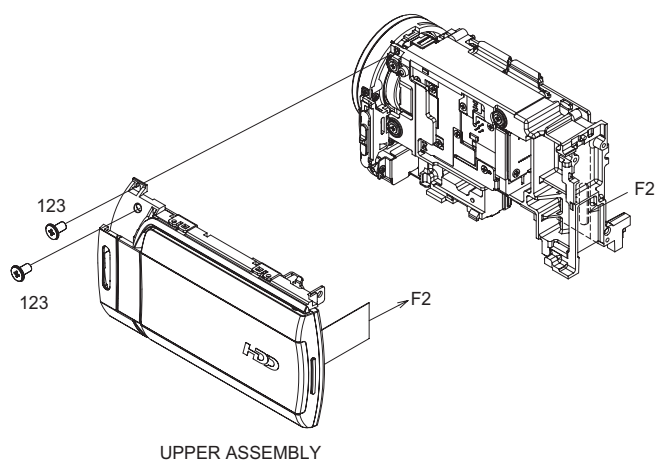


UPPER ASSEMBLY

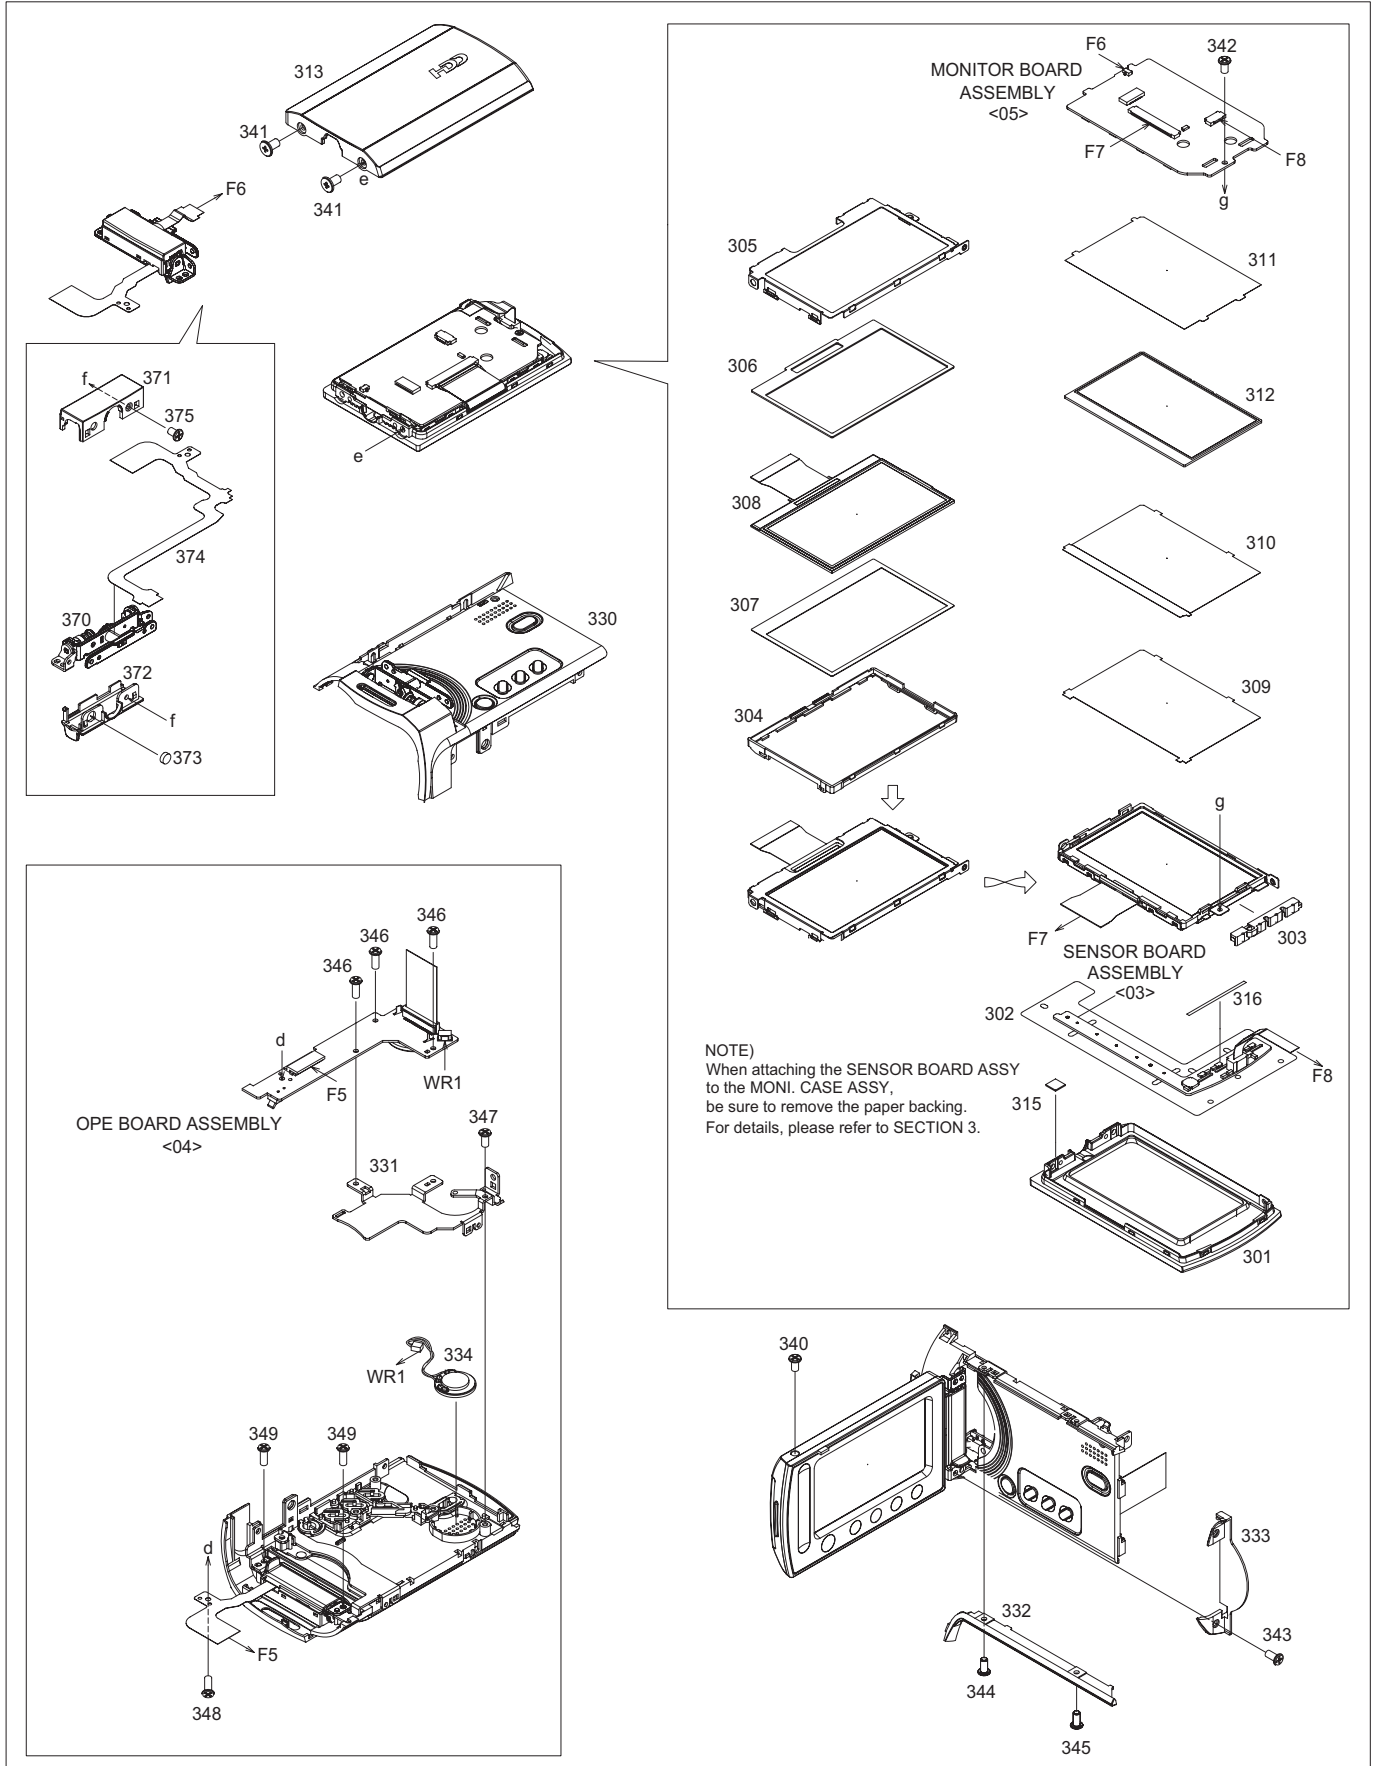

1.2 PACKING AND ACCESSORY ASSEMBLY <M5>

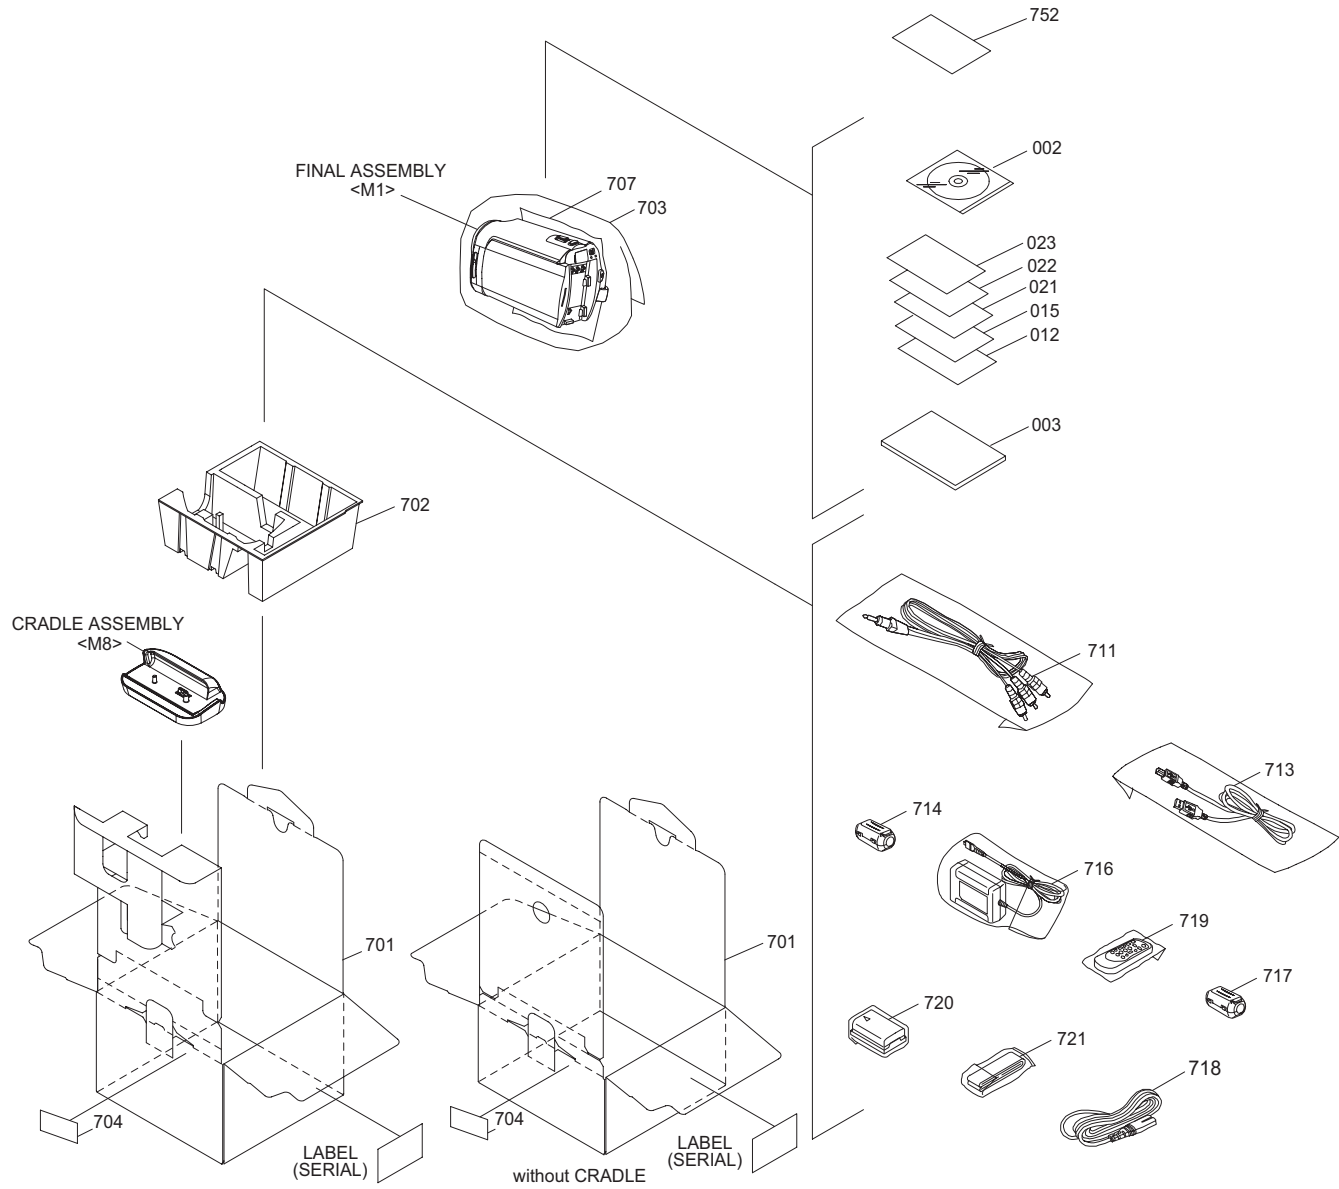

1.3 CRADLE ASSEMBLY <M8>

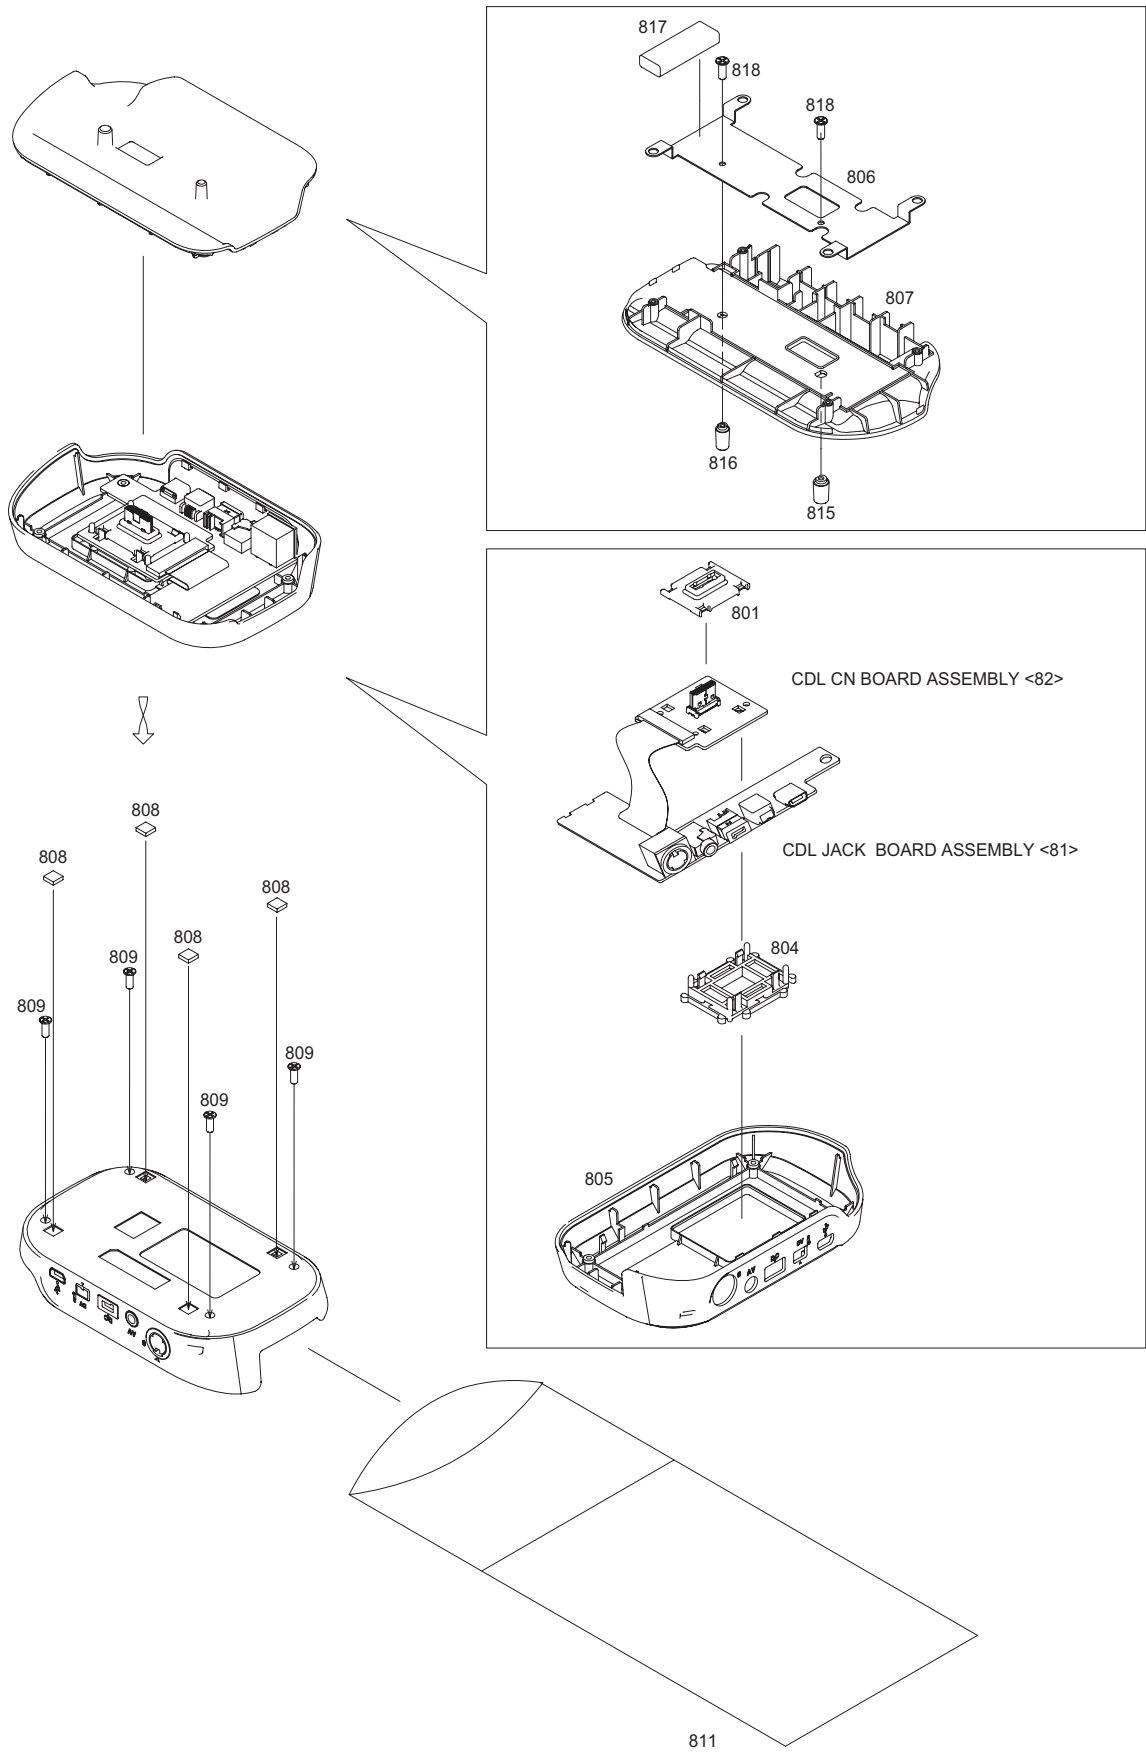

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GZ-MG330HEK	A	GZ-MG330HEZ	D	GZ-MG335HEX	G	GZ-MG365HEK	K	GZ-MG365HEZ	P
GZ-MG330HER	B	GZ-MG335HEK	E	GZ-MG335HEZ	H	GZ-MG365HER	M		
GZ-MG330HEX	C	GZ-MG335HER	F	GZ-MG340HEX	J	GZ-MG365HEX	N		

2. PARTS LIST

FINAL ASSEMBLY <M1>

△ Symbol No.	Part No.	Part Name	Description	Local
101	LY36056-001B	FRAME ASSY		A,B,C,D,J
101	LY36056-002B	FRAME ASSY		EFGHKMNP
102	LY36226-001A	HDD CASE ASSY		
103	LY36064-001A	RUBBER SPACER	(x2)	
104	QAL1056-001	HDD	30G A,B,C,D,E,F,G,H	
104	QAL1056-002	HDD	40G J	
104	QAL1056-003	HDD	60G K,M,N,P	
105	QAL0906-003	FPC	MAIN-HD	
106	LY21752-002F	TOP COVER		A,B,C,D,J
106	LY36065-006F	TOP COVER ASSY		EFGHKMNP
107	LY36074-002A	HDD COVER ASSY		
108	LY21758-001B	WINDOW(IR)		
120	LY30032-021A	SPECIAL SCREW	OP-FRM(x3)	
121	LY30031-0D5A	SPECIAL SCREW	MAINP-FRM(x2)	
122	LY30031-0D5A	SPECIAL SCREW	FRONT-FRM	
123	LY30031-0D5A	SPECIAL SCREW	UPPER-FRM(x2)	
124	LY30031-0D5A	SPECIAL SCREW	REAR-FRAME(x3)	
125	LY30031-0D5A	SPECIAL SCREW	HDDCA-FRM(x4)	
126	LY30031-0D5A	SPECIAL SCREW	HDDCO-FRM(x2)	
127	LY30031-0D5A	SPECIAL SCREW	TOP-HDDCA	
128	LY30031-0D5A	SPECIAL SCREW	TOP-BKT(FR)	
129	LY30031-0D5A	SPECIAL SCREW	UPPER-TOP	
130	LY30031-0D5A	SPECIAL SCREW	COUPR-HING	
131	LY30031-0D5A	SPECIAL SCREW	IRWIN-HOOK	
132	LY30031-0D5A	SPECIAL SCREW	FRONT-HOOK	
△ 140	LY21748-002B	REAR COVER ASSY		
141	LY21750-005C	ZOOM UNIT		
142	LY21757-002B	GRIP BELT		
143	LY36063-001A	BKT(G.B.)		
144	LY36075-001A	SHAFT(G.B)		
145	LY30031-0L8B	SPECIAL SCREW	ZOOM-BATTP	
146	LY30031-0L8B	SPECIAL SCREW	ZOOM-REAR	
147	LY30031-0F5A	SPECIAL SCREW	ZOOM-BKTGB	
201	LY36066-002C	J.COV(USB) ASSY		
202	LY36069-002B	JACK COVER(DC)		
203	LY36070-002A	JACK COVER(AV)		
204	LY21814-002B	B.COVER(PAL)ASSY		EFGHKMNP
205	LY21753-004B	B.COVER(N)ASSY		A,B,C,D,J
206	LY30031-0D5A	SPECIAL SCREW	BOTCO-FRM(x3)	
301	LY36114-001B	MON.CASE ASSY		
302	LY36233-001D	D FACE TAPE		
303	LY36337-001B	LIGHT.G.S. ASSY		
304	LY21736-001A	LCD CASE		
305	LY36147-001A	LCD BKT ASSY		
306	LY35476-001A	SPACER(LCD)		
307	LY36050-001A	SPACER(LCD)		
308	QLD0486-002	LCD MODULE		
309	LY35478-001A	SHEET(BEF)1		
310	LY35480-001A	SHEET(M/DIFF)		
311	LY35481-001A	SHEET(M.REF)		
312	LY35482-001A	LIGHT GUIDE		
313	LY36051-002D	MONI.COVER ASSY		A,B,C,D,E,F,G,H
313	LY36051-017C	MONI.COVER ASSY		J
313	LY36051-009D	MONI.COVER ASSY		K,M,N,P
315	LY45291-028A	GASKET		
316	LY30035-0D3A	SPACER(A)		
330	LY21744-002G	U.CASE ASSY		
331	LY36104-001A	BKT(SPK)		
332	LY36106-002D	ORNAMENT(TOP)		
333	LY36055-002A	COVER(UPPER)		
334	QAS0543-001	SPEAKER		
340	LY30031-0E3A	SPECIAL SCREW	MCOV-LCDBK	
341	LY30031-079A	SPECIAL SCREW	MCOV-HINGE(x2)	
342	LY30031-0E3A	SPECIAL SCREW	MPWB-LCDBK	
343	LY30031-0E3A	SPECIAL SCREW	COVUP-HING	
344	LY30031-0E3A	SPECIAL SCREW	ORMT-BKTUP	
345	LY30031-0E3A	SPECIAL SCREW	ORMT-BKTSP	
346	LY30031-0L6A	SPECIAL SCREW	OPEPWB-UP(x3)	
347	LY30031-0L6A	SPECIAL SCREW	SPBKT-UP	
348	LY30031-0L6A	SPECIAL SCREW	FPC-UPPER	
349	QYSPSGT2050ZA	TAP SCREW	HING-UPPER M2 x 5mm(x2)	
370	LY21741-001D	HINGE UNIT		
371	LY21742-002A	HINGE COVER(U)		
372	LY21743-001A	HINGE COVER(L)		

△ Symbol No.	Part No.	Part Name	Description	Local
373	LY45427-001A	P.C.MAGNET		
374	QAL1037-001	FPC		
375	LY30031-0E3A	SPECIAL SCREW	H.CO.V-U-L	
501	LY36080-002D	F.COVER ASSY		EFGHKMNP
502	LY36086-004A	WINDOW(LIGHT)		A,B,C,D,J
502	LY36086-002A	WINDOW(LIGHT)		EFGHKMNP
503	LY36089-001A	PLATE(MIC)		
505	LY36090-001C	HOOD RING(NON)		
506	LY36139-001A	MIC		
510	LY30031-0L6A	SPECIAL SCREW	PLTMC-FRNT	
511	LY30031-0L6A	SPECIAL SCREW	HOODR-FRNT	
601	LY36126-001B	OP BLOCK ASSY		
601A	PTY36126-101	MOTOR UNIT	FOCUS	
601B	PTY36126-101	MOTOR UNIT	ZOOM	
601C	PTY36126-106	AUTO IRIS UNIT		
601D	PTY36126-530	SCREW	(x8)	
602	LY45275-001A	OPTICAL LPF		
603	LY45175-001A	SHEET		
604	LY36092-001A	SHIELD(CCD)		
606	LY30031-0J7A	SPECIAL SCREW	(x2)	
610	LY45541-002A	CCD BASE ASSY		

PACKING AND ACCESSORY ASSEMBLY <M5>

△ Symbol No.	Part No.	Part Name	Description	Local
002	LY35273-027C	CD ROM ASSY		A,B,C,D,J
002	LY35273-027C-S	CD ROM ASSY		EFGHKMNP
△ 003	LYT1835-001A	INST BOOK(EN)	(ENGLISH)	A,E,K
△ 003	LYT1836-001A	INST BOOK(RU.UK)	(RUSSIAN UKRAINIAN)	B,F,M
△ 003	LYT1835-002A	INST BOOK(GE.DU)	(GERMAN DUTCH)	C,G,J,N
△ 003	LYT1835-003A	INST BOOK(FR.IT)	(FRENCH ITALIAN)	C,G,J,N
△ 003	LYT1835-004A	INST BOOK(SP.PT)	(SPANISH PORTUGUESE)	C,G,J,N
△ 003	LYT1835-005A	INST BOOK(DA.FI)	(DANISH FINN)	D,H,P
△ 003	LYT1835-006A	INST BOOK(SW.NO)	(SWEDISH NORWEGIAN)	D,H,P
△ 003	LYT1835-008A	INST BOOK(CZ.HU)	(CZECH HUNGARIAN)	D,H,P
△ 003	LYT1835-009A	INST BOOK(PO)	(POLISH)	D,H,P
012	YU30878	REGI. CARD		A,E,K
015	LYT0194-001B	Q.CARD		A,E,K
021	LYT1908-002A	SHEET(ATT.)		A,B,C,D
021	LYT1908-001A	SHEET(ATT.)		EFGHKMNP
022	LY36230-002A	SHEET(ACC GUID)		A,C,E,G,J,K,N
022	LY36230-003A	SHEET(ACC GUID)		B,D,F,H,M,P
023	LY35208-001A	SHEET(E-SHOP)		A,E,K
701	LY36076-018B	PACKING CASE	PRODUCTION	A,B,C,D
701	LY36078-008B	PACKING CASE	PRODUCTION	E,F,G,H
701	LY36076-022A	PACKING CASE	PRODUCTION	J
701	LY36078-012B	PACKING CASE	PRODUCTION	K,M,N,P
702	LY21759-001B	CUSHION		
703	LY30023-024A	POLY BAG	FOR YSK	
704	-----	LABEL		
707	LY45602-001A	SHEET(G.BELT)		
711	QAM0510-001	A/V CABLE	FILTER	
713	QAM0719-001	USB CABLE		
714	QQR0491-002	FERRITE CORE	USB TDK (BLACK)	
△ 716	LY21104-001F	AC ADAPTER	AP-V14E	A,E,K
△ 716	LY21343-001B	AC ADAPTER	AP-V17E	B,C,D,F,G,H,J,M,N,P
717	QQR0491-002	FERRITE CORE	DC TDK (BLACK)	
△ 718	QMPP210-190-JR	POWER CORD	BS PLUG 1.9m BLACK	A,E,K
719	LY21805-002A	REMOTE CTL UNIT	RM-V751US	EFGHKMNP
△ 720	LY35320-002C	BATTERY PACK	BN-VF808U	
721	LY21397-002A	SHOULDER STRAP		
752	-----	WARRANTY CARD	BT-54032-1CAM	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GZ-MG330HEK	A	GZ-MG330HEZ	D	GZ-MG335HEX	G	GZ-MG365HEK	K	GZ-MG365HEZ	P
GZ-MG330HER	B	GZ-MG335HEK	E	GZ-MG335HEZ	H	GZ-MG365HER	M		
GZ-MG330HEX	C	GZ-MG335HER	F	GZ-MG340HEX	J	GZ-MG365HEX	N		

CRADLE ASSEMBLY <M8>

△ Symbol No. Part No. Part Name Description Local

△ Symbol No.	Part No.	Part Name	Description	Local
801	LY36144-001A	HOLDER	EFGHKMNP	
804	LY36143-001B	SPRING	EFGHKMNP	
805	LY21782-003B	BOTTOM CASE	EFGHKMNP	
806	LY36145-001A	BRACKET	EFGHKMNP	
807	LY21813-001B	TOP CASE	EFGHKMNP	
808	LY45498-001A	FOOT	(x4) EFGHKMNP	
809	LY30031-038A	SPECIAL SCREW	(x4) EFGHKMNP	
811	QPA01002503	POLY BAG	10cm x 25cm EFGHKMNP	
815	LY45559-001A	SHAFT(1)	EFGHKMNP	
816	LY45560-001A	SHAFT(2)	EFGHKMNP	
817	LY45291-022A	GASKET	GASKET EFGHKMNP	
818	LY30031-081A	SPECIAL SCREW	(x2) EFGHKMNP	

MAIN BOARD ASSEMBLY <01>

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LYA10122-04G	MAIN BOARD ASSY	A,B,C,D	
PW1	LYA10122-03G	MAIN BOARD ASSY	EFGHKMNP	
PW1	LYA10122-04G	MAIN BOARD ASSY	J	
IC121	NAL0069-001X	SHOCK SENSOR	TH	
IC1001	MN103SD0QFA	IC(MICRO C ROM)	MASK	
IC1001 or	MN103SFD0RFA	IC(MICRO C ROM)	MP FLASH	
IC1004	NJU7108F3-X	IC		
IC1005	AK6512CAM-X	IC		
IC1006	S-35190A-G-X	IC		
IC1007	IC-PST8223U-W	IC		
IC1007 or	S-80823CNNB-G-W	IC		
IC1008	KSM-2003SN2E	IR DETECT UNIT		
IC1009	YCBCJVSNS8031-X	IC(MICRO C ROM)		
IC2201	AK4666VQ	IC	48P0.5	
IC2201 or	AK4664VQ	IC	48P0.5	
IC3001	JCY0224-2	IC		
IC3002	39VF6474IB1KB06	IC(MICRO C ROM)		
IC3003	K4M51323PE-HG75	IC(DIGITAL)		
IC3006	S-1112B31MC-W	IC		
IC3007	AK8111L-W	IC		
IC3701	LA73076V-X	IC	EFGHKMNP	
IC3702	BH76806FVM-W	IC	BH76806FVM A,B,C,D,J	
IC4201	R2J45021ABG-X	IC	NEW2-RENE5	
IC4901	AN41904A-X	IC		
IC4903	S-1112B29MC-W	IC		
IC6001	FA7736AF	IC		
IC6004	S-1112B28MC-W	IC		
IC8301	JCY0225	IC		
IC8302	TPS2055AD-X	IC		
IC8302 or	BD2055AFJ-X	IC		
IC8303	S-1112B18MC-W	IC	S-1112B18M	
IC8304	S-1112B31MC-W	IC		
IC8801	TSB41AB1ZQE-X	IC	EFGHKMNP	
Q421	UMZ1N-W	PAIR TRANSISTOR	LIGHT LED EFGHKMNP	
Q421 or	PUMZ1-W	PAIR TRANSISTOR	LIGHT LED EFGHKMNP	
Q421 or	XP4601-W	TRANSISTOR	LIGHT LED EFGHKMNP	
Q422	DTC143XE-X	DIGI TRANSISTOR	LIGHT LED EFGHKMNP	
Q422 or	UN921FJ-X	DIGI TRANSISTOR	LIGHT LED EFGHKMNP	
Q422 or	KRC419E-X	DIGI TRANSISTOR	LIGHT LED EFGHKMNP	
Q422 or	RT1N432U-X	DIGI TRANSISTOR	LIGHT LED EFGHKMNP	
Q422 or	SRC1219EF-X	DIGI TRANSISTOR	LIGHT LED EFGHKMNP	
Q1001	2SC4617/RS/-X	TRANSISTOR		
Q1001 or	BC847BT-X	TRANSISTOR		
Q1001 or	2SD2216J/RS/-X	TRANSISTOR		
Q1001 or	2SC5383/E/-X	TRANSISTOR		
Q1002	DTC143XE-X	DIGI TRANSISTOR		
Q1002 or	UN921FJ-X	DIGI TRANSISTOR		
Q1002 or	RT1N432U-X	DIGI TRANSISTOR		
Q1002 or	SRC1219EF-X	DIGI TRANSISTOR		
Q1002 or	KRC419E-X	DIGI TRANSISTOR		
Q1003	DTC143XE-X	DIGI TRANSISTOR		
Q1003 or	UN921FJ-X	DIGI TRANSISTOR		
Q1003 or	RT1N432U-X	DIGI TRANSISTOR		
Q1003 or	SRC1219EF-X	DIGI TRANSISTOR		

Q1003 or	KRC419E-X	DIGI TRANSISTOR		
Q1005	DTC124EE-X	DIGI TRANSISTOR		
Q1005 or	UN9212J-X	DIGI TRANSISTOR		
Q1005 or	RT1N241U-X	DIGI TRANSISTOR		
Q1005 or	SRC1203EF-X	DIGI TRANSISTOR		
Q1005 or	KRC403E-X	DIGI TRANSISTOR		
Q2401	2SC4617/RS/-X	TRANSISTOR		
Q2401 or	2SC5383/F/-X	TRANSISTOR		
Q2401 or	2SD2216J/RS/-X	TRANSISTOR		
Q2403	2SC4617/RS/-X	TRANSISTOR		
Q2403 or	2SC5383/F/-X	TRANSISTOR		
Q2403 or	2SD2216J/RS/-X	TRANSISTOR		
Q2701	UMX18N-W	PAIR TRANSISTOR		
Q3001	3LN01SS-X	MOS FET		
Q3704	XP4601-W	TRANSISTOR		EFGHKMNP
Q3704 or	PUMZ1-W	PAIR TRANSISTOR		EFGHKMNP
Q3704 or	UMZ1N-W	PAIR TRANSISTOR		EFGHKMNP
Q4901	ST305R4NV	PHOTO TRANSISTOR		W/B
Q6001	SP8J5-X	MOS FET		
Q6201	RSR025P03-X	MOS FET		
Q6202	RSR025N03-X	MOS FET		
Q6501	2SD2703-X	TRANSISTOR		
Q6502	UMT1N-W	PAIR TRANSISTOR		
Q6502 or	PUMT1-W	PAIR TRANSISTOR		
Q6502 or	BC856S-X	PAIR TRANSISTOR		
Q6502 or	KTA701U/G/-X	PAIR TRANSISTOR		
Q6701	RSR025P03-X	MOS FET		
Q6702	RSR025P03-X	MOS FET		
Q6703	RSR025P03-X	MOS FET		
Q7001	PUMX1-W	PAIR TRANSISTOR		
Q7001 or	XP4501-W	TRANSISTOR		
Q7001 or	KTC801U/G/-X	PAIR TRANSISTOR		
Q7001 or	RT3CLLM/EF/-X	TRANSISTOR		
Q7001 or	UMX1N-W	PAIR TRANSISTOR		
Q7002	PUMX1-W	PAIR TRANSISTOR		
Q7002 or	XP4501-W	TRANSISTOR		
Q7002 or	KTC801U/G/-X	PAIR TRANSISTOR		
Q7002 or	RT3CLLM/EF/-X	TRANSISTOR		
Q7002 or	UMX1N-W	PAIR TRANSISTOR		
Q7003	PUMX1-W	PAIR TRANSISTOR		
Q7003 or	XP4501-W	TRANSISTOR		
Q7003 or	KTC801U/G/-X	PAIR TRANSISTOR		
Q7003 or	RT3CLLM/EF/-X	TRANSISTOR		
Q7003 or	UMX1N-W	PAIR TRANSISTOR		
Q8303	XP4312-W	DIGI TRANSISTOR		
Q8303 or	UMD2N-W	DIGI TRANSISTOR		
D181	EMZ6.8N-X	Z DIODE		OPE UNIT
△ D191	MA111-X	SI DIODE		LIT_3V
△ D191 or	SDS511-X	SI DIODE		LIT_3V
△ D191 or	1SS352-X	SI DIODE		LIT_3V
△ D191 or	1SS355-X	SI DIODE		LIT_3V
△ D191 or	1SS355W-X	DIODE		LIT_3V
D192	MA2SD31-X	SB DIODE		LIT_3V
D192 or	RB521S-30-X	SB DIODE		LIT_3V
D192 or	KDR720E-X	SB DIODE		LIT_3V
D421	NSPW500CS/C0TU/	LED		LIGHT LED EFGHKMNP
D1001	MA133-X	SI DIODE		
D2701	DA221-X	DIODE ARRAY		
D4201	1SS355-X	SI DIODE		
D4201 or	MA111-X	SI DIODE		
D4201 or	1SS352-X	SI DIODE		
D4201 or	SDS511-X	SI DIODE		
D4201 or	1SS355W-X	DIODE		
D6101	MA22D23-X	SB DIODE		
D6201	MA22D23-X	SB DIODE		
D6301	MA22D23-X	SB DIODE		
D6401	MA22D23-X	SB DIODE		
D6501	RB481K-X	SB DIODE		
D6502	RB481K-X	SB DIODE		
D6701	MA22D23-X	SB DIODE		
D6702	MA22D23-X	SB DIODE		
D6901	RB551V-30-X	SB DIODE		
C111	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C122	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C141	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	
C601	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GZ-MG330HEK	A	GZ-MG330HEZ	D	GZ-MG335HEX	G	GZ-MG365HEK	K	GZ-MG365HEZ	P
GZ-MG330HER	B	GZ-MG335HEK	E	GZ-MG335HEZ	H	GZ-MG365HER	M		
GZ-MG330HEX	C	GZ-MG335HER	F	GZ-MG340HEX	J	GZ-MG365HEX	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C1004	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3044	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C1006	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3045	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1009	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3046	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	
C1011	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C3051	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C1014	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		C3052	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1015	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3053	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	
C1016	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3054	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C1022	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C3055	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1027	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C3059	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1030	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3060	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1031	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C3061	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1032	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3062	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1033	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3063	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1035	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3067	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M	
C1036	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3068	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1037	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3070	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1038	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3072	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1039	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3073	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1040	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3075	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	
C1042	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3083	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	
C1044	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3084	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C1046	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3090	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C1047	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3091	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C2202	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3092	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C2203	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C3093	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C2204	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3094	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C2209	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3095	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C2210	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3098	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C2224	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3099	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	
C2401	NBZ0015-106X	TA E CAPACITOR	10uF 6.3V M		C3201	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C2402	NBZ0015-106X	TA E CAPACITOR	10uF 6.3V M		C3202	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M	
C2403	NBZ0015-106X	TA E CAPACITOR	10uF 6.3V M		C3203	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2404	NBZ0015-106X	TA E CAPACITOR	10uF 6.3V M		C3204	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C2405	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3205	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C2406	NBZ0015-106X	TA E CAPACITOR	10uF 6.3V M		C3701	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M EFGHKMNP	
C2603	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		C3702	NCB21AK-225X	C CAPACITOR	2.2uF 10V K EFGHKMNP	
C2604	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		C3703	NCB20JK-106X	C CAPACITOR	10uF 6.3V K EFGHKMNP	
C2605	NCBA1EK-472W	C CAPACITOR	4700pF 25V K		C3704	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C2606	NCBA1EK-472W	C CAPACITOR	4700pF 25V K		C3705	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M EFGHKMNP	
C2611	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3706	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K EFGHKMNP	
C2612	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3707	NCB30JK-105X	C CAPACITOR	1uF 6.3V K EFGHKMNP	
C2613	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C3708	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C2623	NDCA1HJ-100W	C CAPACITOR	10pF 50V J		C3709	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K EFGHKMNP	
C2624	NDCA1HJ-100W	C CAPACITOR	10pF 50V J		C3710	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M	
C2655	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3718	NCB30JK-105X	C CAPACITOR	1uF 6.3V K A,B,C,D,J	
C2656	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C3719	NCB30JK-105X	C CAPACITOR	1uF 6.3V K A,B,C,D,J	
C3001	NCB31AK-105X	C CAPACITOR	1uF 10V K		C4201	NCJ21CK-475X-D	C CAPACITOR	4.7uF 16V K	
C3002	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C4202	NCJ21CK-475X-D	C CAPACITOR	4.7uF 16V K	
C3004	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M		C4203	NCJ20JM-226X-A	C CAPACITOR	22uF 6.3V M	
C3005	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M		C4204	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
C3006	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M		C4205	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
C3007	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M		C4206	NCB21EK-105X	C CAPACITOR	1uF 25V K	
C3008	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4208	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J	
C3009	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4209	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J	
C3010	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4210	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C3011	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4211	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	
C3012	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4212	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C3013	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4213	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C3014	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C4216	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3018	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M		C4217	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3022	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C4218	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3023	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C4219	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3024	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4220	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3025	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4221	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3026	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M		C4222	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3028	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4223	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3029	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4224	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3030	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4225	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3031	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4226	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3032	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4227	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3033	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C4228	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3034	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C4902	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
C3035	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4903	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
C3036	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C4905	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3037	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C4907	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3038	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C4908	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
C3040	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J		C4909	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C3041	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J		C4911	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GZ-MG330HEK	A	GZ-MG330HEZ	D	GZ-MG335HEX	G	GZ-MG365HEK	K	GZ-MG365HEZ	P
GZ-MG330HER	B	GZ-MG335HEK	E	GZ-MG335HEZ	H	GZ-MG365HER	M		
GZ-MG330HEX	C	GZ-MG335HER	F	GZ-MG340HEX	J	GZ-MG365HEX	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C4912	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8340	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C4913	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8341	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C4914	NCBA1HK-222W	C CAPACITOR	2200pF 50V K		C8801	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M EFGHKMNP	
C4915	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C8802	NCB20JM-475X	C CAPACITOR	4.7uF 6.3V M EFGHKMNP	
C4916	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8803	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K EFGHKMNP	
C4921	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		C8804	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K EFGHKMNP	
C4922	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8805	NCB30JK-105X	C CAPACITOR	1uF 6.3V K EFGHKMNP	
C4932	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		C8806	NDCA1EJ-221W	C CAPACITOR	220pF 25V J EFGHKMNP	
C4935	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		C8807	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K EFGHKMNP	
C4941	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8808	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K EFGHKMNP	
C4942	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8809	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K EFGHKMNP	
C4943	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C8810	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K EFGHKMNP	
C6002	NCB21CK-105X	C CAPACITOR	1uF 16V K		C8811	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K EFGHKMNP	
C6003	NCB21CK-105X	C CAPACITOR	1uF 16V K						
C6004	NCB31CK-105X	C CAPACITOR	1uF 16V K		R101	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C6005	NCB31CK-105X	C CAPACITOR	1uF 16V K		R142	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	
C6006	NCB31EK-104X	C CAPACITOR	0.1uF 25V K		R143	NRSA6AJ-563W	MG RESISTOR	56kΩ 1/16W J	
C6008	NCB31EK-473X	C CAPACITOR	0.047uF 25V K		R144	NRSA6AJ-563W	MG RESISTOR	56kΩ 1/16W J	
C6101	NCBA1HK-221W	C CAPACITOR	220pF 50V K		R145	NRSA6AJ-563W	MG RESISTOR	56kΩ 1/16W J	
C6102	NCBA1HK-152W	C CAPACITOR	1500pF 50V K		R146	NRSA6AJ-563W	MG RESISTOR	56kΩ 1/16W J	
C6103	NCB31CK-105X	C CAPACITOR	1uF 16V K		R147	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C6104	NCB10JK-106X	C CAPACITOR	10uF 6.3V K		R148	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
C6201	NCBA1HK-221W	C CAPACITOR	220pF 50V K		R149	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
C6202	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R150	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
C6203	NCB31CK-105X	C CAPACITOR	1uF 16V K		R151	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
C6204	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		R181	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
C6301	NCBA1HK-221W	C CAPACITOR	220pF 50V K		R183	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C6302	NCBA1HK-152W	C CAPACITOR	1500pF 50V K		△ R191	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6303	NCB31CK-105X	C CAPACITOR	1uF 16V K		R197	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C6304	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		R199	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6401	NCBA1HK-221W	C CAPACITOR	220pF 50V K		R421	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J EFGHKMNP	
C6402	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R422	NRSA6AJ-182W	MG RESISTOR	1.8kΩ 1/16W J EFGHKMNP	
C6403	NCB31CK-105X	C CAPACITOR	1uF 16V K		R423	NRSA6AJ-391W	MG RESISTOR	390Ω 1/16W J EFGHKMNP	
C6404	NCB10JK-106X	C CAPACITOR	10uF 6.3V K		R424	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J EFGHKMNP	
C6501	NCBA1AK-473W	C CAPACITOR	0.047uF 10V K		R601	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C6502	NCBA1AK-333W	C CAPACITOR	0.033uF 10V K		R1001	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6503	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1002	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	
C6504	NCF21CZ-105X	C CAPACITOR	1uF 16V Z		R1003	NRSA6AJ-561W	MG RESISTOR	560Ω 1/16W J	
C6505	NCF21CZ-105X	C CAPACITOR	1uF 16V Z		R1004	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6506	NCB11EK-105X	C CAPACITOR	1uF 25V K		R1005	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6507	NCB11EK-105X	C CAPACITOR	1uF 25V K		R1006	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	
C6509	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1007	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6510	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1008	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J	
C6701	NCBA1EK-472W	C CAPACITOR	4700pF 25V K		R1009	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J	
C6702	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		R1010	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6704	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1011	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C6705	NCB11AK-106X	C CAPACITOR	10uF 10V K		R1012	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6706	NCBA1HK-152W	C CAPACITOR	1500pF 50V K		R1013	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C6707	NDCA1HJ-151W	C CAPACITOR	150pF 50V J		R1014	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6708	NCB10JK-106X	C CAPACITOR	10uF 6.3V K		R1015	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C6901	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R1016	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6902	NCBA1HK-392W	C CAPACITOR	3900pF 50V K		R1017	NRSA6AJ-393W	MG RESISTOR	39kΩ 1/16W J	
C6903	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1019	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6904	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		R1020	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6905	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1021	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C6906	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1022	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C7002	NCB11CK-225X	C CAPACITOR	2.2uF 16V K		R1023	NRSA6AJ-184W	MG RESISTOR	180kΩ 1/16W J	
C7004	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1025	NRSA6AJ-393W	MG RESISTOR	39kΩ 1/16W J	
C8301	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1027	NRSA6AJ-272W	MG RESISTOR	2.7kΩ 1/16W J	
C8303	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1028	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	
C8306	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1030	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C8307	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1031	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
C8308	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1032	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C8309	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1033	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C8310	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1037	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C8312	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1038	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C8314	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1040	NRSA6AJ-273W	MG RESISTOR	27kΩ 1/16W J	
C8318	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1042	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C8319	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J		R1043	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C8320	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J		R1044	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C8324	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1046	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	
C8325	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1047	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C8329	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1048	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C8330	NBE41AM-476X	TA E CAPACITOR	47uF 10V M		R1049	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C8331	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1052	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C8336	NCB31AK-105X	C CAPACITOR	1uF 10V K		R1053	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C8337	NCB31AK-105X	C CAPACITOR	1uF 10V K		R1054	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C8339	NCB31AK-105X	C CAPACITOR	1uF 10V K		R1055	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GZ-MG330HEK	A	GZ-MG330HEZ	D	GZ-MG335HEX	G	GZ-MG365HEK	K	GZ-MG365HEZ	P
GZ-MG330HER	B	GZ-MG335HEK	E	GZ-MG335HEZ	H	GZ-MG365HER	M		
GZ-MG330HEX	C	GZ-MG335HER	F	GZ-MG340HEX	J	GZ-MG365HEX	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R1056	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R2704	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J	
R1057	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R2705	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
R1058	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3001	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
R1059	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3002	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
R1060	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3003	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R1061	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J		R3005	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1062	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R3006	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1063	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3020	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1065	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3021	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	
R1066	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R3023	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	
R1067	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J		R3033	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1069	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3035	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R1070	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J		R3044	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
R1071	NRSA6AJ-623W	MG RESISTOR	62kΩ 1/16W J		R3046	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1073	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R3051	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	
R1074	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3057	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1075	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R3076	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1076	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3080	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	
R1077	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3081	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1078	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R3091	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R1079	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3092	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
R1080	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3095	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1081	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3097	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1082	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J		R3098	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1085	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3103	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R1086	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3104	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R1087	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3105	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R1088	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3110	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1091	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3111	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1092	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R3116	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J EFGHKMNP	
R1093	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R3118	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
R1094	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R3123	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J A,B,C,D,J	
R1095	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R3124	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J A,B,C,D,J	
R1096	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R3125	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1097	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3127	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R1098	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3130	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R1100	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R3701	NRSA6AD-680W	MG RESISTOR	68Ω 1/16W D EFGHKMNP	
R1101	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R3702	NRSA6AD-680W	MG RESISTOR	68Ω 1/16W D	
R1104	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R3703	NRSA6AD-680W	MG RESISTOR	68Ω 1/16W D EFGHKMNP	
R1105	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R3704	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J EFGHKMNP	
R1106	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3705	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J EFGHKMNP	
R1109	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3706	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J EFGHKMNP	
R1111	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3707	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J EFGHKMNP	
R1112	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3708	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J A,B,C,D,J	
R1113	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R3730	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	
R1114	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4201	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R1115	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4202	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R1116	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R4203	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R1117	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J		R4204	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R1118	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R4205	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	
R1119	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R4206	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	
R1120	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R4207	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1121	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R4208	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	
R1122	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R4209	NRSA6AJ-433W	MG RESISTOR	43kΩ 1/16W J	
R1123	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R4210	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1126	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R4211	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1127	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4212	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R1128	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R4225	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R1129	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R4901	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	
R2204	NRSA6AJ-224W	MG RESISTOR	220kΩ 1/16W J		R4903	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	
R2206	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J		R4904	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R2207	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J		R4905	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	
R2208	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J		R4906	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J	
R2209	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J		R4907	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	
R2217	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R4911	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	
R2401	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R4916	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J	
R2402	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R4917	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J	
R2403	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J		R4923	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	
R2407	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R4924	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	
R2601	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R4927	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J	
R2602	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R4931	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	
R2607	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R4932	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	
R2608	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R4933	NRSA6AJ-393W	MG RESISTOR	39kΩ 1/16W J	
R2609	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J		R4934	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	
R2610	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J		R4949	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R2701	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J		R4950	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J	
R2702	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J		R4951	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J	
R2703	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J		R4953	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GZ-MG330HEK	A	GZ-MG330HEZ	D	GZ-MG335HEX	G	GZ-MG365HEK	K	GZ-MG365HEZ	P
GZ-MG330HER	B	GZ-MG335HEK	E	GZ-MG335HEZ	H	GZ-MG365HER	M		
GZ-MG330HEX	C	GZ-MG335HER	F	GZ-MG340HEX	J	GZ-MG365HEX	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R4954	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R8301	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R4955	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R8302	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R4959	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8303	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R4961	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R8304	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R4962	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R8305	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R4987	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J		R8306	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R4988	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J		R8307	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6001	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J		R8308	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6002	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J		R8309	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6003	NRSA6AD-303W	MG RESISTOR	30kΩ 1/16W D		R8310	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6004	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D		R8311	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6008	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8312	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6011	NRSA6AD-823W	MG RESISTOR	82kΩ 1/16W D		R8313	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6012	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D		R8314	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6013	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R8315	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6014	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R8316	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6021	NRSA6AD-154W	MG RESISTOR	150kΩ 1/16W D		R8317	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6022	NRSA6AD-393W	MG RESISTOR	39kΩ 1/16W D		R8318	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6101	NRSA6AJ-362W	MG RESISTOR	3.6kΩ 1/16W J		R8319	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6102	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8320	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6103	NRSA6AD-183W	MG RESISTOR	18kΩ 1/16W D		R8321	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6104	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D		R8322	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R6106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R8323	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R6107	NRSA6AD-301W	MG RESISTOR	300Ω 1/16W D		R8324	NRSA6AJ-820W	MG RESISTOR	82Ω 1/16W J	
R6109	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R8325	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	
R6201	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J		R8326	NRSA6AJ-820W	MG RESISTOR	82Ω 1/16W J	
R6202	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8327	NRSA6AJ-820W	MG RESISTOR	82Ω 1/16W J	
R6203	NRSA6AD-183W	MG RESISTOR	18kΩ 1/16W D		R8328	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6204	NRSA6AD-203W	MG RESISTOR	20kΩ 1/16W D		R8329	NRSA6AJ-4R7W	MG RESISTOR	4.7Ω 1/16W J	
R6205	NRSA6AD-124W	MG RESISTOR	120kΩ 1/16W D		R8330	NRSA6AJ-4R7W	MG RESISTOR	4.7Ω 1/16W J	
R6301	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J		R8337	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R6302	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8338	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R6303	NRSA6AD-752W	MG RESISTOR	7.5kΩ 1/16W D		R8342	NRSA6AD-622W	MG RESISTOR	6.2kΩ 1/16W D	
R6304	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D		R8349	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R6401	NRSA6AJ-362W	MG RESISTOR	3.6kΩ 1/16W J		R8350	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	
R6402	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8351	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R6403	NRSA6AD-203W	MG RESISTOR	20kΩ 1/16W D		R8352	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R6404	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D		R8353	NRSA6AJ-562W	MG RESISTOR	5.6kΩ 1/16W J	
R6405	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R8354	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R6406	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R8356	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
R6501	NRSA6AJ-272W	MG RESISTOR	2.7kΩ 1/16W J		R8360	NRSA6AJ-4R7W	MG RESISTOR	4.7Ω 1/16W J	
R6502	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J		R8361	NRSA6AJ-4R7W	MG RESISTOR	4.7Ω 1/16W J	
R6503	NRSA6AD-114W	MG RESISTOR	110kΩ 1/16W D		R8801	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J EFGHKMNP	
R6505	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D		R8802	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J EFGHKMNP	
R6506	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D		R8803	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J EFGHKMNP	
R6507	NRSA6AD-563W	MG RESISTOR	56kΩ 1/16W D		R8805	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J EFGHKMNP	
R6508	NRSA6AD-754W	MG RESISTOR	750kΩ 1/16W D		R8806	NRSA6AD-560W	MG RESISTOR	56Ω 1/16W D EFGHKMNP	
R6509	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J		R8807	NRSA6AD-560W	MG RESISTOR	56Ω 1/16W D EFGHKMNP	
R6510	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R8808	NRSA6AD-560W	MG RESISTOR	56Ω 1/16W D EFGHKMNP	
R6511	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R8809	NRSA6AD-560W	MG RESISTOR	56Ω 1/16W D EFGHKMNP	
R6519	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R8810	NRSA6AD-512W	MG RESISTOR	5.1kΩ 1/16W D EFGHKMNP	
R6527	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R8811	NRSA6AD-682W	MG RESISTOR	6.8kΩ 1/16W D EFGHKMNP	
R6528	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R8812	NRSA6AD-913W	MG RESISTOR	91kΩ 1/16W D EFGHKMNP	
R6702	NRSA6AJ-561W	MG RESISTOR	560Ω 1/16W J		R8821	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J A,B,C,D,J	
R6704	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D		RA3001	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4 EFGHKMNP	
R6705	NRSA6AD-393W	MG RESISTOR	39kΩ 1/16W D		RA3002	NRZ0034-220W	NET RESISTOR	22Ω 1/32W J x4 EFGHKMNP	
R6706	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J		RA8801	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4 EFGHKMNP	
R6707	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J						
R6708	NRSA6AD-153W	MG RESISTOR	15kΩ 1/16W D		L111	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R6710	NRSA6AD-114W	MG RESISTOR	110kΩ 1/16W D		L121	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6711	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		L141	NQR0154-004X	FERRITE CORE		
R6712	NRSA6AJ-224W	MG RESISTOR	220kΩ 1/16W J		L161	NQL38DK-100X	P COIL	10uH K	
R6714	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J		L1002	NQL38DK-100X	P COIL	10uH K	
R6715	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J		L2401	NQLC32M-100X	COIL	10uH M	
R6716	NRV142F-R20X	CMF RESISTOR	0.2Ω 1/4W F		L2402	NQLC32M-100X	COIL	10uH M	
R6901	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		L2601	NQR0269-013X	FERRITE BEADS		
R6902	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		L2602	NQR0269-013X	FERRITE BEADS		
R7001	NRSA6AD-393W	MG RESISTOR	39kΩ 1/16W D		L2603	NQR0269-013X	FERRITE BEADS		
R7002	NRSA6AD-153W	MG RESISTOR	15kΩ 1/16W D		L3001	NQR0154-004X	FERRITE CORE		
R7003	NRSA6AD-123W	MG RESISTOR	12kΩ 1/16W D		L3003	NQR0154-004X	FERRITE CORE		
R7004	NRSA6AD-123W	MG RESISTOR	12kΩ 1/16W D		L3004	NQR0154-004X	FERRITE CORE		
R7005	NRSA6AD-123W	MG RESISTOR	12kΩ 1/16W D		L3005	NQR0599-001X	FERRITE BEADS		
R7006	NRSA6AD-392W	MG RESISTOR	3.9kΩ 1/16W D		L3007	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7007	NRSA6AD-392W	MG RESISTOR	3.9kΩ 1/16W D		L3011	NQR0599-001X	FERRITE BEADS		
R7008	NRSA6AD-392W	MG RESISTOR	3.9kΩ 1/16W D		L3701	NQL38DK-100X	P COIL	10uH K EFGHKMNP	
R7009	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J		L3702	NQLE42M-220X	COIL	22uH M EFGHKMNP	
R7010	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J		L3703	NQL302N-100X	COIL	10uH N EFGHKMNP	
R7011	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J		L4201	NQL38DK-100X	P COIL	10uH K	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GZ-MG330HEK	A	GZ-MG330HEZ	D	GZ-MG335HEX	G	GZ-MG365HEK	K	GZ-MG365HEZ	P
GZ-MG330HER	B	GZ-MG335HEK	E	GZ-MG335HEZ	H	GZ-MG365HER	M		
GZ-MG330HEX	C	GZ-MG335HER	F	GZ-MG340HEX	J	GZ-MG365HEX	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
L4202	NQL38DK-100X	P COIL	10uH K		L5002	NQL315K-100X	COIL	10uH K	
L4203	NQL38DK-220X	P COIL	22uH K		SENSOR BOARD ASSEMBLY <03>				
L4204	NQL38DK-220X	P COIL	22uH K		△ Symbol No.	Part No.	Part Name	Description	Local
L4205	NQL38DK-220X	P COIL	22uH K		PW1	LYA10121-01C1	SENSOR BOARD ASSY		
L4207	NQR0559-005X	FERRITE BEADS			IC301	CP6785AM-X	IC		
L4208	NQR0559-005X	FERRITE BEADS			D301	SMLA12BC7/MNP-X	LED		
L4209	NQR0559-005X	FERRITE BEADS			D302	SMLA12BC7/MNP-X	LED		
L4902	NQL38DK-100X	P COIL	10uH K		D303	SMLA12BC7/MNP-X	LED		
L4903	NQL38DK-100X	P COIL	10uH K		D304	SMLA12BC7/MNP-X	LED		
L6101	NQL52EM-470X	COIL	47uH M		C301	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
L6201	NQL52EM-680X	COIL	68uH M		C302	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
L6301	NQL52EM-390X	COIL	39uH M		C303	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	
L6401	NQL52EM-390X	COIL	39uH M		R301	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
L6501	NQL52EM-221X	COIL	220uH M		R302	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
L6502	NQL38DK-100X	P COIL	10uH K		R303	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
L6701	NQL52EM-470X	COIL	47uH M		R304	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
L6901	NQL79GM-470X	COIL	47uH M		L301	NQR0599-003X	FERRITE BEADS		
L7001	NQL38DK-101X	P COIL	100uH K		L302	NQR0599-003X	FERRITE BEADS		
L8301	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	EFGHKMNP	CN301	QGF0565C1-08W	CONNECTOR	FFC/FPC (1-8)	
L8302	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	EFGHKMNP	WR1	QAL1038-001	FPC	MON-SENSOR	
L8303	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J		OPE BOARD ASSEMBLY <04>				
L8305	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		△ Symbol No.	Part No.	Part Name	Description	Local
L8801	NQR0154-004X	FERRITE CORE			PW2	LYA10121-01C2	OPE BOARD ASSY		
L8802	NQR0599-001X	FERRITE BEADS			R401	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
CN101	QGF0534F2-30X	CONNECTOR	OPE FFC/FPC (1-30)		R402	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
CN102	QGF0534F2-40X	CONNECTOR	HDD FFC/FPC (1-40)		△ BT401	QAB0050-001	LITHIUM BATTERY	CR2032/H1G 3V 220mAh	
CN103	QGF0534F2-32X	CONNECTOR	REAR FFC/FPC (1-32)		CN401	QGF0565C1-30W	CONNECTOR	MAIN PWB FFC/FPC (1-30)	
CN104	QGF0534F3-12X	CONNECTOR	ZOOM FFC/FPC (1-12)		CN402	QGF0534F2-22X	CONNECTOR	MONI FPC FFC/FPC (1-22)	
CN105	QGF0543F3-22X	CONNECTOR	CCD FFC/FPC (1-22)		CN403	QGA1001F1-02X	CONNECTOR	SPEAKER W-B (1-2)	
CN106	QGF0543F3-25X	CONNECTOR	OP FFC/FPC (1-25)		S401	NSW0294-001X	LEVER SWITCH	LCD_OPEN	
CN107	QGA1001F1-04X	CONNECTOR	MIC W-B (1-4)		S402	NSW0198-001X	TACT SWITCH	MENU	
CN108	NNZ0191-001X	CREDLE CONNECTO		EFGHKMNP	S403	NSW0198-001X	TACT SWITCH	REC/PB	
CN110	QGB0512L1-30X	CONNECTOR	JIG B-B (1-30)		S404	NSW0198-001X	TACT SWITCH	AT/ML	
CN111	NNZ0189-001X	MICRO SD CONNE			S405	NSW0198-001X	TACT SWITCH	EVENT	
△ F6001	NMFZ007-2R5X-K	FUSE	2.5A 24V		S406	NSW0198-001X	TACT SWITCH	DVD DIRECT	
△ F6002	NMFZ007-2R5X-K	FUSE	2.5A 24V		WR1	WJT0213-001A-E	E-CARD WIRE	OPE-MAIN	
F6003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		MONITOR BOARD ASSEMBLY <05>				
J101	QNZ0847-001	USB CONNECTOR	AB USB		PW3	LYA10121-01C3	MONITOR BOARD ASSY		
TP1	NNZ0163-001X	EARTH TERMINAL			IC7601	HGDSBN001A-X	IC		
TP2	NNZ0163-001X	EARTH TERMINAL			IC7602	S-1112B28MC-W	IC		
TP3	NNZ0163-001X	EARTH TERMINAL			Q7701	UMD3N-W	DIGI TRANSISTOR		
TP4	NNZ0163-001X	EARTH TERMINAL			Q7701	or XP4311-W	TRANSISTOR		
TP5	NNZ0163-001X	EARTH TERMINAL			Q7701	or RT3T11M-X	DIGI TRANSISTOR		
TP6	NNZ0163-001X	EARTH TERMINAL			Q7701	or KRX201U-X	DIGI TRANSISTOR		
TP7	NNZ0163-001X	EARTH TERMINAL			Q7702	2SA1774/RS/-X	TRANSISTOR		
X1001	NAX0647-001X	C RESONATOR	20.000MHz		Q7702	or 2SB1462J/RS/-X	TRANSISTOR		
X1002	NAX0950-001X	CRYSTAL			Q7702	or 2SA1989/RS/-X	TRANSISTOR		
X3002	NAX0959-001X	CRYSTAL	32.913MHZ		Q7703	UMX1N-W	PAIR TRANSISTOR		
X4201	NAX0954-001X	CRYSTAL			Q7703	or XP4501-W	TRANSISTOR		
X8301	NAX0713-001X	CRYSTAL	24.000MHz		Q7703	or KTC801U/G/-X	PAIR TRANSISTOR		
HD1	LY36093-001B	HOLDER(W.B)	HOLDER(WB)						
HD2	LY36094-001A	HOLDER(I.R)	HOLDER(IR)						
HD3	LY36095-001B	HOLDER(LED)	HOLDER(LED)	EFGHKMNP					
OT1	LY36096-001A	CAP(LED)	CAP(LED)	EFGHKMNP					
CCD BOARD ASSEMBLY <02>					MONITOR BOARD ASSEMBLY <05>				
△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LYA10120-01B	CCD BOARD ASSY			PW3	LYA10121-01C3	MONITOR BOARD ASSY		
Q5001	2SC5345U/Y/-X	TRANSISTOR	CCD OUT		IC7601	HGDSBN001A-X	IC		
Q5001	or 2SC3931/CD/-X	TRANSISTOR			IC7602	S-1112B28MC-W	IC		
Q5001	or 2SC4265JC07-X	TRANSISTOR			Q7701	UMD3N-W	DIGI TRANSISTOR		
C5001	NCJ21CK-475X-D	C CAPACITOR	4.7uF 16V K		Q7701	or XP4311-W	TRANSISTOR		
C5002	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		Q7701	or RT3T11M-X	DIGI TRANSISTOR		
C5004	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		Q7701	or KRX201U-X	DIGI TRANSISTOR		
C5005	NCB31EK-104X	C CAPACITOR	0.1uF 25V K		Q7702	2SA1774/RS/-X	TRANSISTOR		
C5006	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		Q7702	or 2SB1462J/RS/-X	TRANSISTOR		
C5007	NCB31HK-222X	C CAPACITOR	2200pF 50V K		Q7702	or 2SA1989/RS/-X	TRANSISTOR		
R5001	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J		Q7703	UMX1N-W	PAIR TRANSISTOR		
L5001	NQL315K-100X	COIL	10uH K		Q7703	or XP4501-W	TRANSISTOR		
					Q7703	or KTC801U/G/-X	PAIR TRANSISTOR		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
GZ-MG330HEK	A	GZ-MG330HEZ	D	GZ-MG335HEX	G	GZ-MG365HEK	K	GZ-MG365HEZ	P
GZ-MG330HER	B	GZ-MG335HEK	E	GZ-MG335HEZ	H	GZ-MG365HER	M		
GZ-MG330HEX	C	GZ-MG335HER	F	GZ-MG340HEX	J	GZ-MG365HEX	N		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
Q7703	or RT3CLLM/EF/-X	TRANSISTOR			D603	UDZS16B-X	Z DIODE		
Q7703	or PUMX1-W	PAIR TRANSISTOR			D604	EMZ6.8N-X	Z DIODE		
Q7704	UMX1N-W	PAIR TRANSISTOR							
Q7704	or XP4501-W	TRANSISTOR			C603	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
Q7704	or KTC801U/G/-X	PAIR TRANSISTOR			C604	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
Q7704	or RT3CLLM/EF/-X	TRANSISTOR			C605	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
Q7704	or PUMX1-W	PAIR TRANSISTOR			C606	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
					C607	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
D7502	MA8068-X	Z DIODE							
D7503	MA8068-X	Z DIODE			R601	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
D7504	MA8068-X	Z DIODE			R602	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
D7505	MA8068-X	Z DIODE							
D7601	MA8068-X	Z DIODE			L601	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
D7701	NSSW008D/T205-X	LED			L602	NQR0251-004X	FERRITE BEADS		
D7702	NSSW008D/T205-X	LED			L603	NQR0251-004X	FERRITE BEADS		
D7703	NSSW008D/T205-X	LED							
D7704	NSSW008D/T205-X	LED			BT601	LY35736-001A	BATT.TERMINAL		
					CN601	QGF0534F2-32X	CONNECTOR	FFC/FPC (1-32)	
C7604	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		J601	QNS0287-001	3.5 JACK		
C7605	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		J602	QNA0050-001	DC JACK		
C7607	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		WR1	QAL1036-001	FPC	REAR-MAIN	
C7608	NCB21CK-105X	C CAPACITOR	1uF 16V K						
C7609	NCB21CK-105X	C CAPACITOR	1uF 16V K						
C7610	NCB21CK-105X	C CAPACITOR	1uF 16V K						
C7611	NCB31CK-105X	C CAPACITOR	1uF 16V K						
C7612	NCB31CK-105X	C CAPACITOR	1uF 16V K						
C7613	NCB31CK-105X	C CAPACITOR	1uF 16V K						
C7614	NCB31CK-105X	C CAPACITOR	1uF 16V K						
C7615	NCB21EK-105X	C CAPACITOR	1uF 25V K						
C7616	NCB21EK-105X	C CAPACITOR	1uF 25V K						
C7617	NCB21EK-105X	C CAPACITOR	1uF 25V K						
C7618	NCB21EK-105X	C CAPACITOR	1uF 25V K						
C7619	NCB21EK-105X	C CAPACITOR	1uF 25V K						
C7622	NCB31EK-153X	C CAPACITOR	0.015uF 25V K						
C7623	NCB31CK-224X	C CAPACITOR	0.22uF 16V K						
C7624	NDC31HJ-271X	C CAPACITOR	270pF 50V J						
C7701	NCB31CK-105X	C CAPACITOR	1uF 16V K						
R7506	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J						
R7507	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J						
R7508	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J						
R7509	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J						
R7510	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J						
R7602	NRSA63D-333X	MG RESISTOR	33kΩ 1/16W D						
R7603	NRSA63D-333X	MG RESISTOR	33kΩ 1/16W D						
R7604	NRSA63D-333X	MG RESISTOR	33kΩ 1/16W D						
R7605	NRSA63D-363X	MG RESISTOR	36kΩ 1/16W D						
R7606	NRSA63D-363X	MG RESISTOR	36kΩ 1/16W D						
R7607	NRSA63D-363X	MG RESISTOR	36kΩ 1/16W D						
R7608	NRSA63D-332X	MG RESISTOR	3.3kΩ 1/16W D						
R7609	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J						
R7610	NRSA63J-106X	MG RESISTOR	10MΩ 1/16W J						
R7702	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J						
R7703	NRSA63D-470X	MG RESISTOR	47Ω 1/16W D						
R7704	NRSA63D-470X	MG RESISTOR	47Ω 1/16W D						
R7705	NRSA63D-470X	MG RESISTOR	47Ω 1/16W D						
R7706	NRSA63D-470X	MG RESISTOR	47Ω 1/16W D						
L7601	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J						
L7602	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J						
L7603	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J						
L7604	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J						
L7701	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J						
CN7501	QGF0528F4-08X	CONNECTOR	SENSOR PWB FFC/FPC (1-8)						
CN7601	QGF0309F2-23X	CONNECTOR	OPE PWB FFC/FPC (1-23)						
CN7602	QGF0528F4-40X	CONNECTOR	LCD PANEL FFC/FPC (1-40)						

REAR BOARD ASSEMBLY <06>

△ Symbol No.	Part No.	Part Name	Description	Local
PW4	LYA10121-01C4	REAR BOARD ASSY	REAR PANEL	
D601	MA8068-X	Z DIODE		
D602	MA8068-X	Z DIODE		

CDL JACK BOARD ASSEMBLY <81>

△ Symbol No.	Part No.	Part Name	Description	Local
PW1	LYA10123-01A1	CDL JACK BOARD ASSY		EF,GH,K,M,N,P
△ F1	NMFZ007-R20X-K	FUSE	0.2A 50V	EF,GH,K,M,N,P
J1	QNS0147-003	3.5 JACK		EF,GH,K,M,N,P
J2	QND0156-001	S JACK		EF,GH,K,M,N,P
J3	QNZ0732-001	D CONNECTOR		EF,GH,K,M,N,P
J4	QNZ0497-001	USB(B) CONNECTOR	USB(MINI-B)	EF,GH,K,M,N,P
J5	QNA0040-001	DC JACK		EF,GH,K,M,N,P

CDL CN BOARD ASSEMBLY <82>

△ Symbol No.	Part No.	Part Name	Description	Local
PW2	LYA10123-01A2	CDL CN BOARD ASSY		EF,GH,K,M,N,P