


SECTION 7
EXPLODED VIEWS

NOTE:

- -XX and -X mean standardized parts, so they may have some difference from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.
- Abbreviation
RU : Russian model.


The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

7-1. OVERALL SECTION

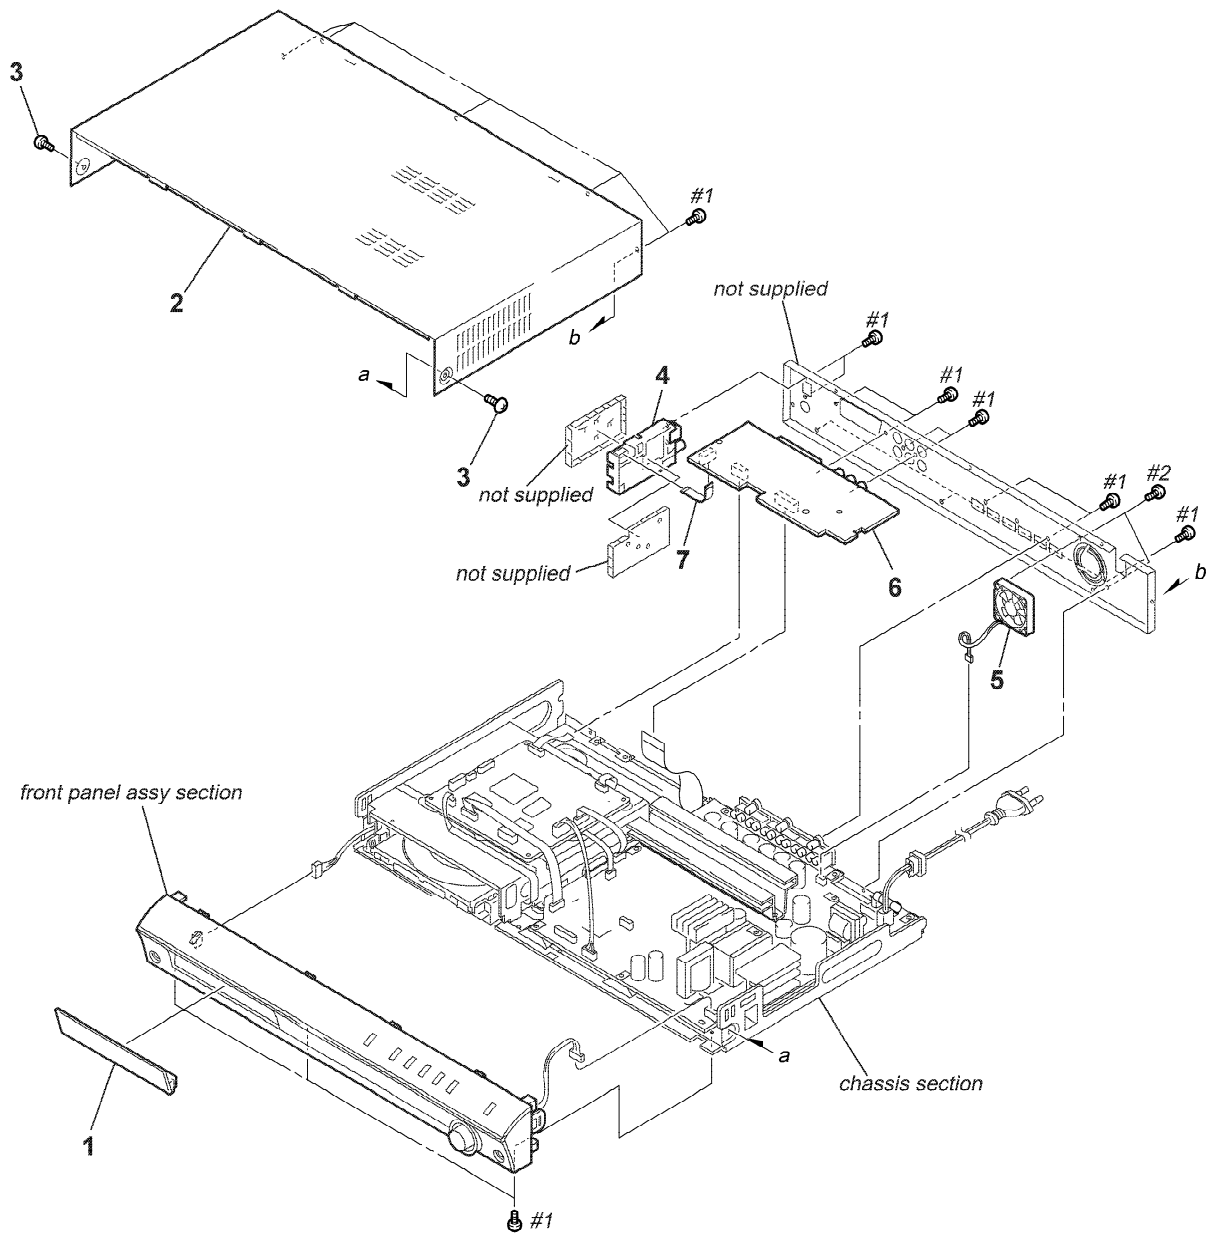


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
1	X-2025-254-1	DVD LID ASSY		6	A-1088-443-A	I/O BOARD, COMPLETE (EXCEPT RU)	
2	2-546-005-01	CASE		6	A-1114-235-A	I/O BOARD, COMPLETE (RU)	
3	3-363-099-51	SCREW (CASE 3 TP2)		7	1-828-952-11	WIRE (FLAT TYPE) (9 CORE)(RU)	
4	A-1074-634-A	TUNER UNIT (DTP-005) (EXCEPT RU)		7	1-828-962-11	WIRE (FLAT TYPE) (11 CORE)(EXCEPT RU)	
4	A-1074-643-A	TUNER UNIT (DTP-005) (RU)					
5	1-787-331-11	FAN, D.C.		#1	7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3	
				#2	7-685-881-09	SCREW +BVTT 4X8 (S)	

7-2. FRONT PANEL ASSY SECTION

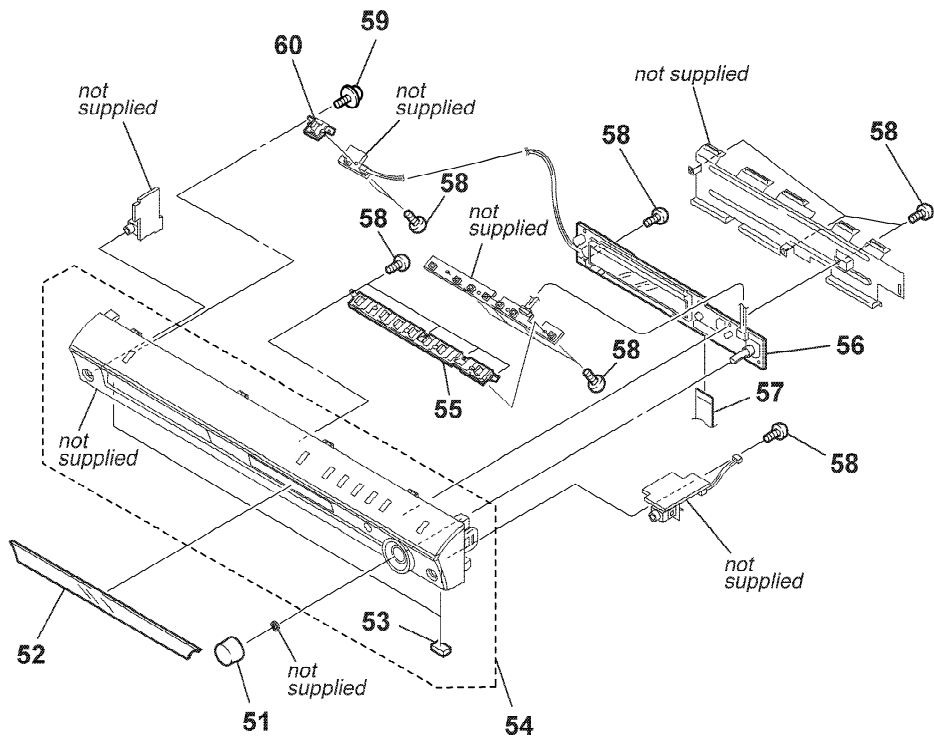

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	2-546-006-01	KNOB (VOL)		56	A-1088-414-A	FL BOARD, COMPLETE	
52	2-546-002-01	WINDOW (FL)		57	1-828-356-11	WIRE (FLAT TYPE) (19 CORE)	
53	4-244-969-01	FOOT		58	4-931-757-31	SCREW (DIA.2.6X8) (IT3B), TAPPING	
54	X-2025-251-1	FRONT PANEL ASSY (EXCEPT RU)		59	4-985-672-01	SCREW (+PTPWH M2.6), FLOATING	
55	2-546-004-01	BUTTON (PLAY)		60	2-546-003-01	BUTTON (POWER)	


7-3. CHASSIS SECTION

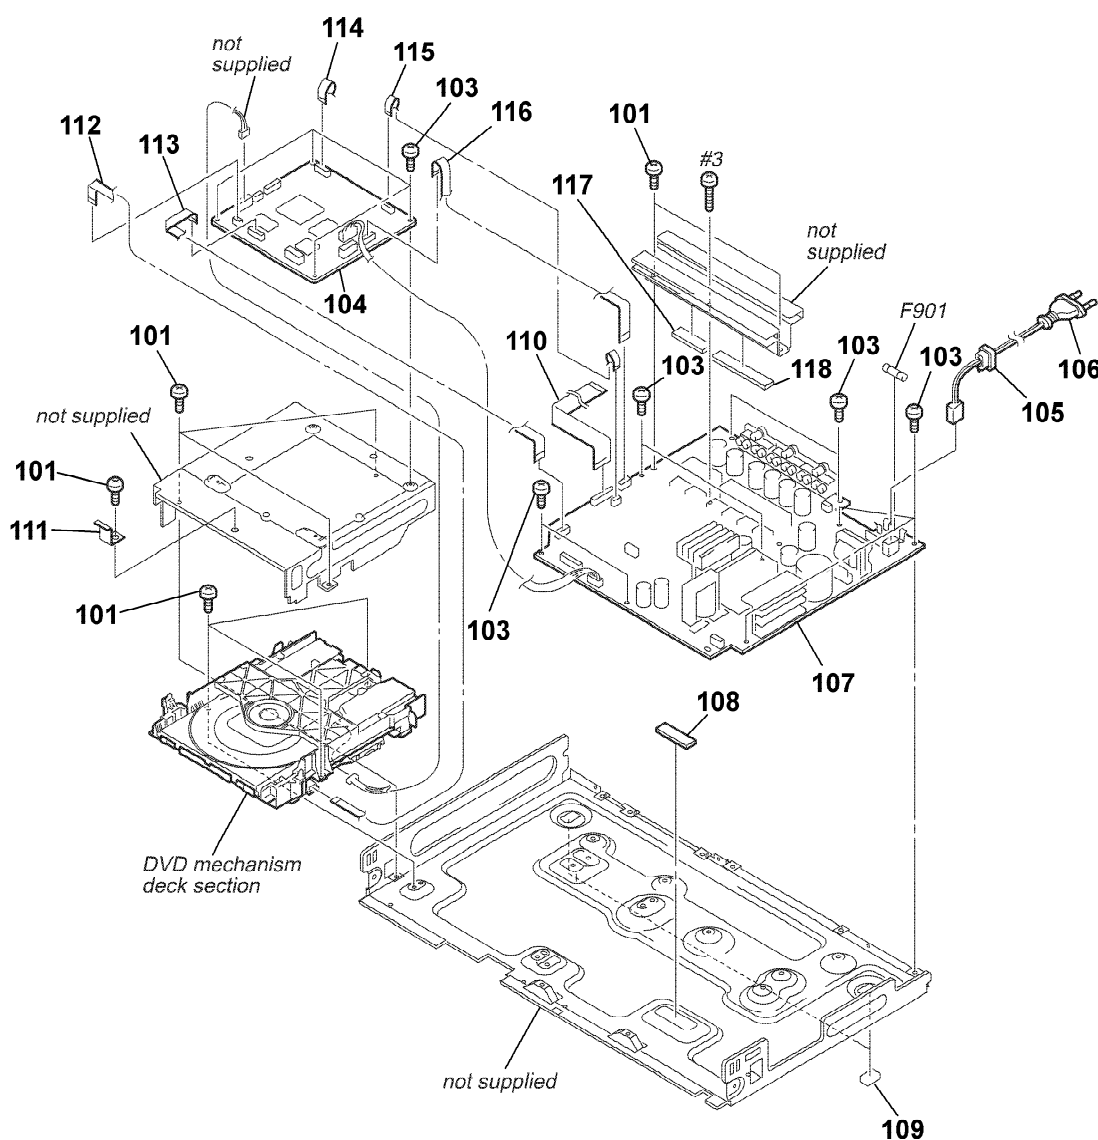

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	3-077-331-01	+BV3 (3-CR)		* 111	3-233-819-01	BRACKET (PWB)	
103	3-077-331-21	+BV3 (3-CR)		112	1-830-549-11	WIRE (FLAT TYPE) (5 CORE)	
☆ 104	A-1088-453-A	DMB10 BOARD, COMPLETE		113	1-830-545-11	WIRE (FLAT TYPE) (11 CORE)	
105	4-217-350-11	STOPPER, CORD		114	1-830-548-11	WIRE (FLAT TYPE) (13 CORE)	
△ 106	1-828-528-11	CORD, POWER		115	1-830-547-11	WIRE (FLAT TYPE) (7 CORE)	
107	A-1088-401-A	MAIN BOARD, COMPLETE (EXCEPT RU)		116	1-830-546-11	WIRE (FLAT TYPE) (11 CORE)	
107	A-1105-140-A	MAIN BOARD, COMPLETE (RU)		117	2-597-972-21	SHEET, RADIATION	
108	4-254-954-01	SHEET (DMB), RADIATION		118	2-597-972-11	SHEET, RADIATION	
109	4-244-969-01	FOOT		△ F901	1-532-506-33	FUSE (T6.3AL/250V)	
110	1-828-382-11	WIRE (FLAT TYPE) (23 CORE)		#3	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	

☆ New part of EEPROM (IC103) on the DMB10 board cannot be used. Therefore, if the mounted DMB10 board (A-1088-453-A) is replaced, exchange new EEPROM (IC103) with that used before the replacement.

7-4. CD MECHANISM DECK SECTION

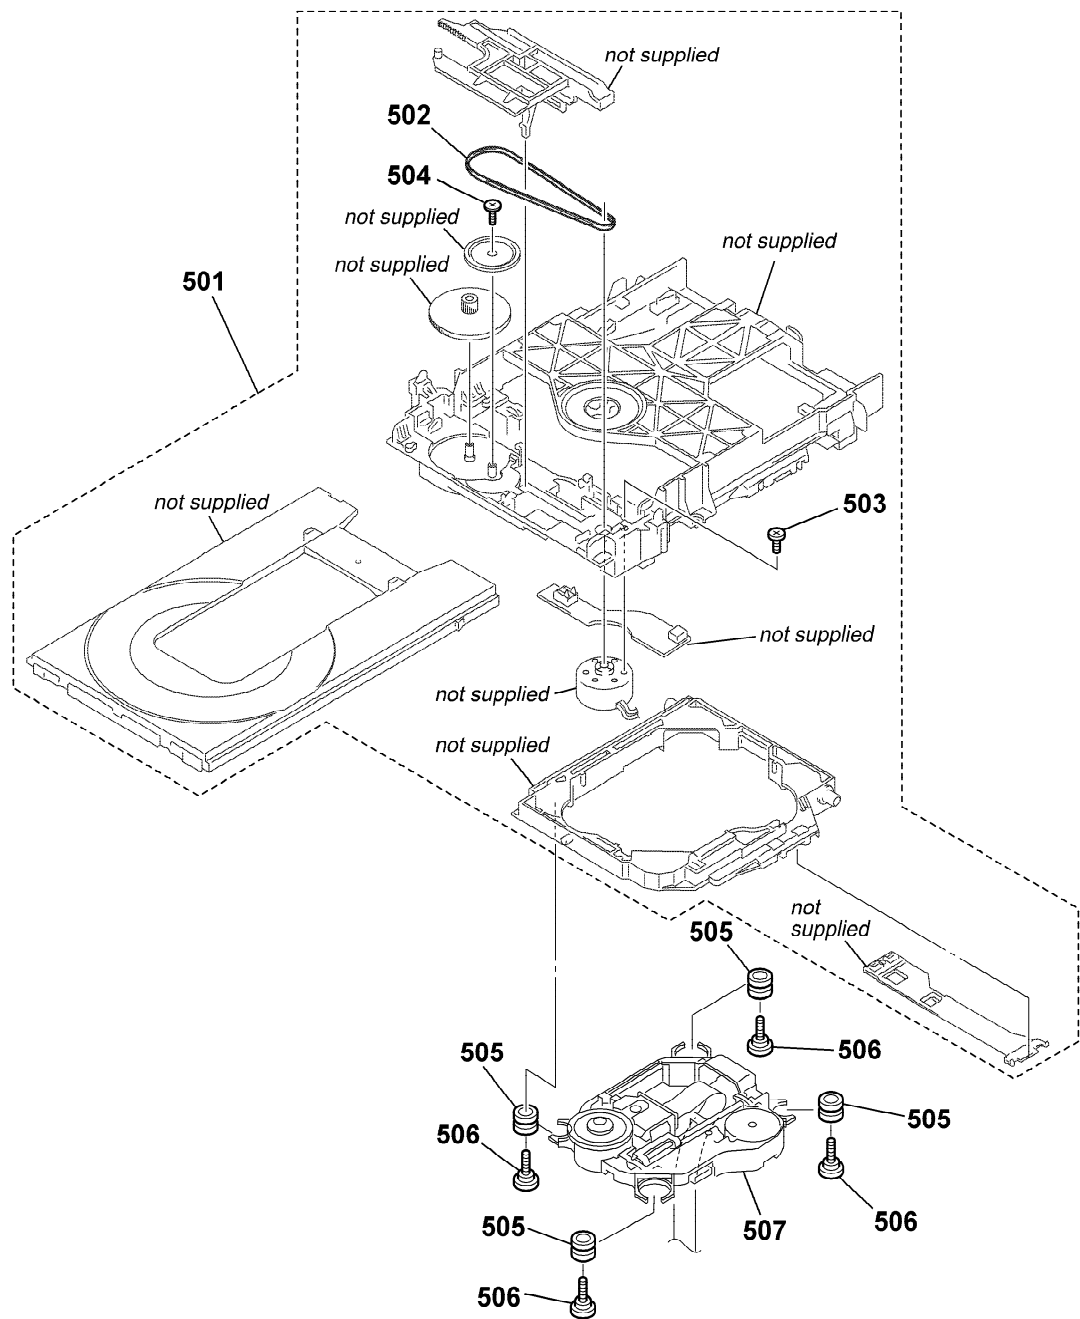

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
501	A-6071-669-A	LOADING ASSY (M)		505	3-088-372-01	INSULATOR	
502	3-088-371-01	BELT		506	3-087-599-01	INSULATOR SCREW	
503	4-974-725-11	SCREW (M1.7X2.5), P		△ 507	8-820-290-02	OPTICAL PICK-UP (KHM-310CAA/C2RP)	
504	4-674-137-11	SCREW (PTP2X5)					

SECTION 8 ELECTRICAL PARTS LIST

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- CAPACITORS
uF: μ F

- COILS
uH: μ H
- RESISTORS
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable
- SEMICONDUCTORS
In each case, u: μ , for example:
uA. . . : μ A. . . , uPA. . . : μ PA. . . ,
uPB. . . : μ PB. . . , uPC. . . : μ PC. . . ,
uPD. . . : μ PD. . .

When indicating parts by reference number, please include the board name.

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

- Abbreviation
RU : Russian model.

Ref. No.	Part No.	Description	Remark		Ref. No.	Part No.	Description	Remark	
☆	A-1088-453-A	DMB10 BOARD, COMPLETE *****			C149	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	
		< CAPACITOR >			C150	1-124-779-00	ELECT CHIP 10uF 20%	16V	
					C151	1-115-416-11	CERAMIC CHIP 0.001uF 5%	25V	
C101	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V		C152	1-162-916-11	CERAMIC CHIP 12PF 5%	50V	
C102	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V		C153	1-162-916-11	CERAMIC CHIP 12PF 5%	50V	
C105	1-126-205-11	ELECT CHIP 47uF 20%	6.3V		C154	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	
C106	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V		C155	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C108	1-162-964-11	CERAMIC CHIP 0.001uF 10%	50V		C156	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C109	1-162-964-11	CERAMIC CHIP 0.001uF 10%	50V		C158	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C112	1-126-205-11	ELECT CHIP 47uF 20%	6.3V		C159	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C113	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V		C160	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C114	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C161	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C115	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C162	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C116	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C163	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C117	1-124-779-00	ELECT CHIP 10uF 20%	16V		C164	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C118	1-124-779-00	ELECT CHIP 10uF 20%	16V		C167	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C119	1-124-779-00	ELECT CHIP 10uF 20%	16V		C170	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C120	1-165-908-11	CERAMIC CHIP 1uF 10%	10V		C171	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C121	1-165-908-11	CERAMIC CHIP 1uF 10%	10V		C172	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C122	1-165-908-11	CERAMIC CHIP 1uF 10%	10V		C173	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C123	1-165-908-11	CERAMIC CHIP 1uF 10%	10V		C174	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C124	1-165-908-11	CERAMIC CHIP 1uF 10%	10V		C175	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C125	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C176	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C126	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C177	1-126-205-11	ELECT CHIP 47uF 20%	6.3V	
C127	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V		C178	1-126-208-21	ELECT CHIP 47uF 20%	4V	
C128	1-162-965-11	CERAMIC CHIP 0.0015uF 10%	50V		C179	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	
C129	1-124-779-00	ELECT CHIP 10uF 20%	16V		C180	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	
C130	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C181	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	
C131	1-125-838-11	CERAMIC CHIP 2.2uF 10%	6.3V		C182	1-127-715-91	CERAMIC CHIP 0.22uF 10%	16V	
C132	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C184	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C133	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C187	1-126-208-21	ELECT CHIP 47uF 20%	4V	
C135	1-164-677-11	CERAMIC CHIP 0.033uF 10%	16V		C188	1-127-715-91	CERAMIC CHIP 0.22uF 10%	16V	
C136	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V		C189	1-128-934-91	CERAMIC CHIP 0.33uF 20%	10V	
C137	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C190	1-126-205-11	ELECT CHIP 47uF 20%	6.3V	
C138	1-162-964-11	CERAMIC CHIP 0.001uF 10%	50V		C191	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	
C139	1-162-919-11	CERAMIC CHIP 22PF 5%	50V		C192	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C140	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C193	1-127-715-91	CERAMIC CHIP 0.22uF 10%	16V	
C141	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C195	1-127-715-91	CERAMIC CHIP 0.22uF 10%	16V	
C142	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C196	1-162-968-11	CERAMIC CHIP 0.0047uF 10%	50V	
C143	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C203	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C144	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V		C205	1-164-230-11	CERAMIC CHIP 220PF 5%	50V	
C145	1-165-908-11	CERAMIC CHIP 1uF 10%	10V		C206	1-164-230-11	CERAMIC CHIP 220PF 5%	50V	
C146	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V		C208	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
C147	1-165-176-11	CERAMIC CHIP 0.047uF 10%	16V		C209	1-164-677-11	CERAMIC CHIP 0.033uF 10%	16V	
C148	1-165-176-11	CERAMIC CHIP 0.047uF 10%	16V		C210	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	
					C211	1-164-677-11	CERAMIC CHIP 0.033uF 10%	16V	

☆ New part of EEPROM (IC103) on the DMB10 board cannot be used. Therefore, if the mounted DMB10 board (A-1088-453-A) is replaced, exchange new EEPROM (IC103) with that used before the replacement.

HCD-DZ300

DMB10

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C212	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	FB403	1-469-324-21	FERRITE, EMI (SMD) (2012)	
C213	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	FB404	1-469-324-21	FERRITE, EMI (SMD) (2012)	
				FB405	1-469-324-21	FERRITE, EMI (SMD) (2012)	
C214	1-162-964-11	CERAMIC CHIP 0.001uF 10%	50V				
C215	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	FB406	1-469-324-21	FERRITE, EMI (SMD) (2012)	
C217	1-126-204-11	ELECT CHIP 47uF 20%	16V			< FLUORESCENT INDICATOR >	
C218	1-124-779-00	ELECT CHIP 10uF 20%	16V				
C219	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	FL101	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
				FL104	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
C220	1-124-779-00	ELECT CHIP 10uF 20%	16V	FL105	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
C221	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	FL106	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
C222	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	FL107	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
C223	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V				
C224	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	FL108	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
				FL401	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
C225	1-162-964-11	CERAMIC CHIP 0.001uF 10%	50V	FL402	1-233-893-21	FILTER, CHIP EMI	
C226	1-162-964-11	CERAMIC CHIP 0.001uF 10%	50V	FL403	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
C233	1-162-968-11	CERAMIC CHIP 0.0047uF 10%	50V	FL4501	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
C402	1-126-204-11	ELECT CHIP 47uF 20%	16V			< IC >	
C403	1-126-205-11	ELECT CHIP 47uF 20%	6.3V				
				IC101	6-805-273-01	IC MBM29DL32TF70-OBA1-0501CE	
C3601	1-117-370-11	CERAMIC CHIP 10uF 10%	10V	IC102	6-706-727-01	IC CXD9804R	
C3602	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	☆ IC103	(Not supplied)	IC BR24L64F-WE2	
C3603	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	IC104	6-706-390-11	IC HY57V641620HGTP-HDR	
C3605	1-126-205-11	ELECT CHIP 47uF 20%	6.3V	IC105	6-702-302-01	IC TK11133CSCL-G	
C3606	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V				
				IC106	8-759-667-18	IC PQ018EZ01ZP	
C3607	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	IC107	6-702-302-01	IC TK11133CSCL-G	
C3608	1-124-779-00	ELECT CHIP 10uF 20%	16V	IC201	6-704-524-01	IC FAN8036L	
C3609	1-124-779-00	ELECT CHIP 10uF 20%	16V	IC3601	6-707-608-01	IC PCM1803DBR	
C3610	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	IC4501	8-759-573-97	IC SN74LVC541APWR	
C3611	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V				
				IC4502	6-703-589-01	IC SN74LVC1G125DCKR	
C3621	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V			< COIL >	
C4501	1-117-370-11	CERAMIC CHIP 10uF 10%	10V	L3601	1-469-555-21	INDUCTOR 10uH	
C4502	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	L3602	1-469-555-21	INDUCTOR 10uH	
C4504	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V			< TRANSISTOR >	
		< CONNECTOR >					
CN101	1-815-763-11	CONNECTOR, FFC/FPC 24P		Q101	6-550-554-01	TRANSISTOR UM6K1NL02TN	
* CN105	1-770-470-21	PIN, CONNECTOR (PC BOARD) 6P		Q102	6-550-653-01	TRANSISTOR QST8TR	
CN106	1-784-370-21	CONNECTOR, FFC/FPC 11P		Q103	8-729-027-52	TRANSISTOR DTC124EKA-T146	
* CN201	1-770-470-21	PIN, CONNECTOR (PC BOARD) 6P				< RESISTOR >	
CN202	1-784-365-21	CONNECTOR, FFC/FPC 5P					
				R101	1-216-809-11	METAL CHIP 100 5% 1/10W	
CN301	1-793-989-21	FFC/CONNECTOR, FPC (LIF (NON-ZIF)) 13P		R104	1-216-864-11	SHORT CHIP 0	
CN302	1-784-366-21	CONNECTOR, FFC/FPC 7P		R105	1-216-833-11	METAL CHIP 10K 5% 1/10W	
CN401	1-779-993-11	PIN, CONNECTOR (PWB) 5P		R106	1-216-833-11	METAL CHIP 10K 5% 1/10W	
CN4501	1-784-370-21	CONNECTOR, FFC/FPC 11P		R107	1-216-833-11	METAL CHIP 10K 5% 1/10W	
		< DIODE >					
D1001	8-719-058-24	DIODE RB501V-40TE-17		R108	1-216-857-11	METAL CHIP 1M 5% 1/10W	
D3501	8-719-988-61	DIODE 1SS355TE-17		R109	1-216-864-11	SHORT CHIP 0	
D3502	8-719-988-61	DIODE 1SS355TE-17		R110	1-216-841-11	METAL CHIP 47K 5% 1/10W	
D3601	8-719-988-61	DIODE 1SS355TE-17		R111	1-216-809-11	METAL CHIP 100 5% 1/10W	
D3602	8-719-988-61	DIODE 1SS355TE-17		R112	1-211-977-11	METAL CHIP 22 0.5% 1/10W	
		< FERRITE BEAD >					
FB111	1-414-226-21	INDUCTOR, FERRITE BEAD		R113	1-211-977-11	METAL CHIP 22 0.5% 1/10W	
FB112	1-414-226-21	INDUCTOR, FERRITE BEAD		R114	1-216-845-11	METAL CHIP 100K 5% 1/10W	
FB113	1-414-226-21	INDUCTOR, FERRITE BEAD		R115	1-211-977-11	METAL CHIP 22 0.5% 1/10W	
FB114	1-414-226-21	INDUCTOR, FERRITE BEAD		R116	1-216-821-11	METAL CHIP 1K 5% 1/10W	
FB115	1-414-226-21	INDUCTOR, FERRITE BEAD		R117	1-216-841-11	METAL CHIP 47K 5% 1/10W	
FB401	1-469-324-21	FERRITE, EMI (SMD) (2012)		R118	1-216-801-11	METAL CHIP 22 5% 1/10W	
FB402	1-469-324-21	FERRITE, EMI (SMD) (2012)		R120	1-216-801-11	METAL CHIP 22 5% 1/10W	

☆ New part of EEP ROM (IC103) on the DMB10 board cannot be used. Therefore, if the mounted DMB10 board (A-1088-453-A) is replaced, exchange new EEP ROM (IC103) with that used before the replacement.

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
R121	1-216-801-11	METAL CHIP	22	5%	1/10W	R234	1-216-833-11	METAL CHIP	10K	5%	1/10W
R123	1-216-864-11	SHORT CHIP	0			R236	1-216-821-11	METAL CHIP	1K	5%	1/10W
R124	1-216-841-11	METAL CHIP	47K	5%	1/10W	R237	1-216-821-11	METAL CHIP	1K	5%	1/10W
R126	1-216-864-11	SHORT CHIP	0			R238	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R127	1-216-809-11	METAL CHIP	100	5%	1/10W	R239	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R133	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R243	1-216-809-11	METAL CHIP	100	5%	1/10W
R134	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R246	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R135	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R247	1-216-821-11	METAL CHIP	1K	5%	1/10W
R136	1-216-835-11	METAL CHIP	15K	5%	1/10W	R308	1-216-864-11	SHORT CHIP	0		
R138	1-216-845-11	METAL CHIP	100K	5%	1/10W	R1101	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R141	1-218-916-11	METAL CHIP	750K	0.5%	1/10W	R1102	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R142	1-216-845-11	METAL CHIP	100K	5%	1/10W	R1103	1-216-833-11	METAL CHIP	10K	5%	1/10W
R143	1-216-809-11	METAL CHIP	100	5%	1/10W	R1104	1-216-833-11	METAL CHIP	10K	5%	1/10W
R144	1-216-864-11	SHORT CHIP	0			R1105	1-216-833-11	METAL CHIP	10K	5%	1/10W
R146	1-216-805-11	METAL CHIP	47	5%	1/10W	R1107	1-216-864-11	SHORT CHIP	0		
R151	1-216-805-11	METAL CHIP	47	5%	1/10W	R1108	1-216-833-11	METAL CHIP	10K	5%	1/10W
R152	1-216-864-11	SHORT CHIP	0			R1109	1-216-864-11	SHORT CHIP	0		
R153	1-216-805-11	METAL CHIP	47	5%	1/10W	R1110	1-216-826-11	METAL CHIP	2.7K	5%	1/10W
R155	1-216-805-11	METAL CHIP	47	5%	1/10W	R1111	1-216-864-11	SHORT CHIP	0		
R160	1-216-805-11	METAL CHIP	47	5%	1/10W	R1120	1-500-284-21	INDUCTOR, FERRITE BEAD			
R161	1-216-809-11	METAL CHIP	100	5%	1/10W	R1121	1-500-284-21	INDUCTOR, FERRITE BEAD			
R164	1-216-809-11	METAL CHIP	100	5%	1/10W	R1122	1-500-284-21	INDUCTOR, FERRITE BEAD			
R169	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1123	1-500-284-21	INDUCTOR, FERRITE BEAD			
R187	1-216-864-11	SHORT CHIP	0			R1124	1-500-284-21	INDUCTOR, FERRITE BEAD			
R189	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R1125	1-500-284-21	INDUCTOR, FERRITE BEAD			
R190	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R1129	1-216-845-11	METAL CHIP	100K	5%	1/10W
R191	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1133	1-216-864-11	SHORT CHIP	0		
R192	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R1134	1-216-864-11	SHORT CHIP	0		
R193	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1150	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R195	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R1151	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R196	1-216-864-11	SHORT CHIP	0			R1152	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R197	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R1168	1-216-817-11	METAL CHIP	470	5%	1/10W
R204	1-216-822-11	METAL CHIP	1.2K	5%	1/10W	R1502	1-216-864-11	SHORT CHIP	0		
R205	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1504	1-216-864-11	SHORT CHIP	0		
R206	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1527	1-216-864-11	SHORT CHIP	0		
R207	1-216-826-11	METAL CHIP	2.7K	5%	1/10W	R1530	1-216-864-11	SHORT CHIP	0		
R208	1-216-839-11	METAL CHIP	33K	5%	1/10W	R1531	1-216-864-11	SHORT CHIP	0		
R209	1-216-839-11	METAL CHIP	33K	5%	1/10W	R1540	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R210	1-216-841-11	METAL CHIP	47K	5%	1/10W	R1542	1-216-864-11	SHORT CHIP	0		
R212	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1543	1-216-833-11	METAL CHIP	10K	5%	1/10W
R213	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R1545	1-216-864-11	SHORT CHIP	0		
R214	1-216-835-11	METAL CHIP	15K	5%	1/10W	R1546	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R215	1-216-834-11	METAL CHIP	12K	5%	1/10W	R1547	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R216	1-216-834-11	METAL CHIP	12K	5%	1/10W	R1548	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R219	1-216-838-11	METAL CHIP	27K	5%	1/10W	R1549	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R220	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1550	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R221	1-218-889-11	METAL CHIP	56K	0.5%	1/10W	R1551	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R222	1-216-839-11	METAL CHIP	33K	5%	1/10W	R1553	1-216-864-11	SHORT CHIP	0		
R223	1-218-895-11	METAL CHIP	100K	0.5%	1/10W	R1554	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R224	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1555	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R225	1-218-895-11	METAL CHIP	100K	0.5%	1/10W	R1557	1-216-809-11	METAL CHIP	100	5%	1/10W
R226	1-218-889-11	METAL CHIP	56K	0.5%	1/10W	R2505	1-216-864-11	SHORT CHIP	0		
R227	1-216-864-11	SHORT CHIP	0			R3601	1-216-809-11	METAL CHIP	100	5%	1/10W
R228	1-216-864-11	SHORT CHIP	0			R3602	1-216-809-11	METAL CHIP	100	5%	1/10W
R230	1-218-893-11	METAL CHIP	82K	0.5%	1/10W	R3603	1-216-833-11	METAL CHIP	10K	5%	1/10W
R231	1-218-875-11	METAL CHIP	15K	0.5%	1/10W	R3605	1-216-864-11	SHORT CHIP	0		
R232	1-218-877-11	METAL CHIP	18K	0.5%	1/10W	R3606	1-216-864-11	SHORT CHIP	0		
R233	1-218-883-11	METAL CHIP	33K	0.5%	1/10W						

HCD-DZ300

DMB10 FL

Ref. No.	Part No.	Description	Remark			
R3607	1-216-864-11	SHORT CHIP	0			
R3609	1-216-864-11	SHORT CHIP	0			
R3611	1-216-809-11	METAL CHIP	100	5%	1/10W	
R3621	1-216-809-11	METAL CHIP	100	5%	1/10W	
R4501	1-216-864-11	SHORT CHIP	0			
R4502	1-216-864-11	SHORT CHIP	0			
R4510	1-216-805-11	METAL CHIP	47	5%	1/10W	
R4511	1-216-809-11	METAL CHIP	100	5%	1/10W	
R4512	1-400-244-11	BEAD, FERRITE (CHIP) (1608)				
R4513	1-216-864-11	SHORT CHIP	0			
R4514	1-216-864-11	SHORT CHIP	0			
R4515	1-216-864-11	SHORT CHIP	0			
R4516	1-216-864-11	SHORT CHIP	0			
R4518	1-216-864-11	SHORT CHIP	0			
R4520	1-216-864-11	SHORT CHIP	0			
R4701	1-216-864-11	SHORT CHIP	0			
R4702	1-216-864-11	SHORT CHIP	0			
R4703	1-216-864-11	SHORT CHIP	0			
R4704	1-216-864-11	SHORT CHIP	0			
R4705	1-216-864-11	SHORT CHIP	0			
R4706	1-216-864-11	SHORT CHIP	0			
< COMPOSITION CIRCUIT BLOCK >						
RB103	1-234-795-21	RES, NETWORK 0X4 (2010)				
RB104	1-234-795-21	RES, NETWORK 0X4 (2010)				
RB105	1-234-371-21	RES, NETWORK 47 (1005X4)				
RB106	1-234-371-21	RES, NETWORK 47 (1005X4)				
RB107	1-234-370-21	RES, NETWORK 22 (1005X4)				
RB108	1-234-370-21	RES, NETWORK 22 (1005X4)				
RB111	1-234-795-21	RES, NETWORK 0X4 (2010)				
RB112	1-234-370-21	RES, NETWORK 22 (1005X4)				
RB113	1-234-370-21	RES, NETWORK 22 (1005X4)				
< VIBRATOR >						
X101	1-781-867-21	VIBRATOR, CRYSTAL (27MHz)				

A-1088-414-A	FL BOARD, COMPLETE					

< CAPACITOR >						
C800	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V	
C801	1-163-037-11	CERAMIC CHIP	0.022uF	10%	50V	
C802	1-119-943-91	ELECT	47uF	20%	50V	
C803	1-124-584-00	ELECT	100uF	20%	10V	
C804	1-162-974-11	CERAMIC CHIP	0.01uF		50V	
C805	1-164-360-11	CERAMIC CHIP	0.1uF		16V	
C806	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
C807	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
C808	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
C809	1-126-795-11	ELECT	10uF	20%	50V	
C810	1-164-360-11	CERAMIC CHIP	0.1uF		16V	
C811	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
C812	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
C813	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
C814	1-126-795-11	ELECT	10uF	20%	50V	
C815	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
C816	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	

Ref. No.	Part No.	Description	Remark			
C817	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
C818	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
C819	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
C820	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
C821	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
C822	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
C823	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
C824	1-162-974-11	CERAMIC CHIP	0.01uF		50V	
C825	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
C826	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
< CONNECTOR >						
CN801	1-779-556-21	CONNECTOR, FFC (LIF (NON-ZIF)) 19P				
* CN805	1-568-942-11	PIN, CONNECTOR 4P				
< DIODE >						
D801	8-719-988-61	DIODE 1SS355TE-17				
D802	8-719-988-61	DIODE 1SS355TE-17				
D803	8-719-069-56	DIODE UDZSTE-176.2B				
D804	8-719-988-61	DIODE 1SS355TE-17				
D805	8-719-988-61	DIODE 1SS355TE-17				
< FERRITE BEAD >						
FB806	1-414-813-11	FERRITE, EMI (SMD) (2012)				
< FLUORESCENT INDICATOR >						
FL801	1-519-792-11	INDICATOR TUBE, FLUORESCENT				
< IC >						
IC801	6-600-349-21	IC NJL23H400A (国産)				
IC802	8-759-643-83	IC uPD16315GB-3BS				
< COIL >						
L801	1-410-671-31	INDUCTOR	47uH			
L802	1-410-671-31	INDUCTOR	47uH			
< TRANSISTOR >						
Q801	6-550-065-01	TRANSISTOR	CPH5504-TL-E			
Q802	8-729-120-28	TRANSISTOR	2SC1623-L5L6			
< RESISTOR >						
R800	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R801	1-216-839-11	METAL CHIP	33K	5%	1/10W	
R802	1-216-809-11	METAL CHIP	100	5%	1/10W	
R804	1-216-828-11	METAL CHIP	3.9K	5%	1/10W	
R805	1-216-295-91	SHORT CHIP	0			
R810	1-216-864-11	SHORT CHIP	0			
R811	1-216-844-11	METAL CHIP	82K	5%	1/10W	
R812	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R813	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R814	1-216-809-11	METAL CHIP	100	5%	1/10W	
R815	1-216-809-11	METAL CHIP	100	5%	1/10W	
R816	1-216-809-11	METAL CHIP	100	5%	1/10W	
R817	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R819	1-216-805-11	METAL CHIP	47	5%	1/10W	
R820	1-216-845-11	METAL CHIP	100K	5%	1/10W	

Ref. No.	Part No.	Description	Remark		
R821	1-216-864-11	SHORT CHIP	0		
R822	1-216-864-11	SHORT CHIP	0		
< SWITCH >					
S800	1-418-632-11	ENCODER, ROTARY (VOLUME)			
< TRANSFORMER >					
T801	1-443-645-11	TRANSFORMER, DC CONVERTER			

H/P BOARD					

< CAPACITOR >					
C881	1-162-962-11	CERAMIC CHIP	470PF	10%	50V
C882	1-162-962-11	CERAMIC CHIP	470PF	10%	50V
C883	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C884	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C885	1-164-360-11	CERAMIC CHIP	0.1uF		16V
< DIODE >					
D821	8-719-988-61	DIODE 1SS355TE-17			
D822	8-719-988-61	DIODE 1SS355TE-17			
< FERRITE BEAD >					
FB811	1-469-144-21	FERRITE, EMI (SMD) (2012)			
FB812	1-500-284-21	INDUCTOR, FERRITE BEAD			
FB813	1-469-144-21	FERRITE, EMI (SMD) (2012)			
FB814	1-216-295-91	SHORT CHIP	0		
< JACK >					
J801	1-566-891-21	JACK (PHONES)			
< COIL >					
L811	1-216-864-11	SHORT CHIP	0		
L812	1-469-144-21	FERRITE, EMI (SMD) (2012)			
L813	1-216-864-11	SHORT CHIP	0		
L814	1-469-144-21	FERRITE, EMI (SMD) (2012)			
< TRANSISTOR >					
Q806	6-550-889-01	TRANSISTOR	2SC5938-T112-1B		
Q807	6-550-889-01	TRANSISTOR	2SC5938-T112-1B		
Q808	6-550-889-01	TRANSISTOR	2SC5938-T112-1B		
Q809	6-550-889-01	TRANSISTOR	2SC5938-T112-1B		
< RESISTOR >					
R861	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R862	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R863	1-216-801-11	METAL CHIP	22	5%	1/10W
R864	1-216-801-11	METAL CHIP	22	5%	1/10W
R865	1-216-805-11	METAL CHIP	47	5%	1/10W
R866	1-216-805-11	METAL CHIP	47	5%	1/10W
R867	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R868	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R869	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R870	1-216-829-11	METAL CHIP	4.7K	5%	1/10W

Ref. No.	Part No.	Description	Remark		
	A-1088-443-A	I/O BOARD, COMPLETE (EXCEPT RU)			
	A-1114-235-A	I/O BOARD, COMPLETE (RU)			

< CAPACITOR >					
C102	1-126-933-11	ELECT	100uF	20%	16V
C103	1-104-662-91	ELECT	22uF	20%	25V
C104	1-104-662-91	ELECT	22uF	20%	25V
C105	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
(RU)					
C109	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C201	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C202	1-126-933-11	ELECT	100uF	20%	16V
C203	1-126-933-11	ELECT	100uF	20%	16V
C204	1-126-964-11	ELECT	10uF	20%	50V
C206	1-126-964-11	ELECT	10uF	20%	50V
C209	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C210	1-126-925-91	ELECT	470uF	20%	10V
C211	1-126-964-11	ELECT	10uF	20%	50V
C212	1-162-922-11	CERAMIC CHIP	39PF	5%	50V
C213	1-126-933-11	ELECT	100uF	20%	16V
C214	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C215	1-115-156-11	CERAMIC CHIP	1uF		10V
C216	1-115-156-11	CERAMIC CHIP	1uF		10V
C218	1-115-156-11	CERAMIC CHIP	1uF		10V
C219	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C220	1-126-933-11	ELECT	100uF	20%	16V
C221	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C222	1-126-933-11	ELECT	100uF	20%	16V
C225	1-126-916-11	ELECT	1000uF	20%	6.3V
C226	1-126-916-11	ELECT	1000uF	20%	6.3V
C227	1-126-933-11	ELECT	100uF	20%	16V
C228	1-126-933-11	ELECT	100uF	20%	16V
C231	1-126-916-11	ELECT	1000uF	20%	6.3V
C232	1-126-916-11	ELECT	1000uF	20%	6.3V
C233	1-115-156-11	CERAMIC CHIP	1uF		10V
C234	1-115-156-11	CERAMIC CHIP	1uF		10V
C235	1-126-916-11	ELECT	1000uF	20%	6.3V
C236	1-115-156-11	CERAMIC CHIP	1uF		10V
C238	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C239	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C246	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C603	1-126-933-11	ELECT	100uF	20%	16V
C604	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C606	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C607	1-104-662-91	ELECT	22uF	20%	25V
C608	1-126-933-11	ELECT	100uF	20%	16V
C609	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C610	1-104-662-91	ELECT	22uF	20%	25V
C611	1-104-662-91	ELECT	22uF	20%	25V
C612	1-104-662-91	ELECT	22uF	20%	25V
C615	1-104-662-91	ELECT	22uF	20%	25V
C616	1-104-662-91	ELECT	22uF	20%	25V
C617	1-104-662-91	ELECT	22uF	20%	25V
C618	1-104-662-91	ELECT	22uF	20%	25V
C619	1-104-662-91	ELECT	22uF	20%	25V
C620	1-104-662-91	ELECT	22uF	20%	25V
C621	1-162-960-11	CERAMIC CHIP	220PF	10%	50V

HCD-DZ300

I/O

Ref. No.	Part No.	Description	Remark
C622	1-162-960-11	CERAMIC CHIP 220PF 10% 50V	
C625	1-162-960-11	CERAMIC CHIP 220PF 10% 50V	
C626	1-162-960-11	CERAMIC CHIP 220PF 10% 50V	
C629	1-126-960-11	ELECT 1uF 20% 50V	
C630	1-126-960-11	ELECT 1uF 20% 50V	
C632	1-104-662-91	ELECT 22uF 20% 25V	
C633	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V	
C634	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V	
< CONNECTOR >			
CN101	1-568-828-11	CONNECTOR, FFC 9P (RU)	
CN101	1-816-955-11	CONNECTOR, FFC/FPC 11P (EXCEPT RU)	
CN201	1-779-281-11	CONNECTOR, FFC (LIF (NON-ZIF)) 13P	
CN601	1-779-291-11	CONNECTOR, FFC (LIF (NON-ZIF)) 23P	
* CN602	1-568-942-11	PIN, CONNECTOR 4P	
< DIODE >			
D201	8-719-988-61	DIODE 1SS355TE-17	
D202	8-719-988-61	DIODE 1SS355TE-17	
D203	8-719-988-61	DIODE 1SS355TE-17	
D206	8-719-988-61	DIODE 1SS355TE-17	
< IC >			
IC201	6-707-489-01	IC BH7868FS-E2	
IC202	6-707-489-01	IC BH7868FS-E2	
IC203	8-759-696-10	IC NJM2235V (TE2)	
IC602	8-759-385-76	IC MC14052 BDR2	
IC603	8-759-649-89	IC MC4558CD	
< JACK >			
J202	1-815-911-11	CONNECTOR, SQUARE TYPE 21P (EURO AV)	
J203	1-819-063-11	JACK, PIN (6P) (SAT/COMPONENT VIDEO OUT)	
< COIL >			
L101	1-469-525-91	INDUCTOR 10uH	
L201	1-469-525-91	INDUCTOR 10uH	
L202	1-469-525-91	INDUCTOR 10uH	
L203	1-469-525-91	INDUCTOR 10uH	
L602	1-469-525-91	INDUCTOR 10uH	
< TRANSISTOR >			
Q201	1-801-806-11	TRANSISTOR DTC144EKA	
Q202	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q203	8-729-027-23	TRANSISTOR DTA114EKA-T146	
Q204	1-801-806-11	TRANSISTOR DTC144EKA	
Q205	8-729-027-23	TRANSISTOR DTA114EKA-T146	
Q206	1-801-806-11	TRANSISTOR DTC144EKA	
Q207	8-729-027-52	TRANSISTOR DTC124EKA-T146	
Q208	8-729-027-23	TRANSISTOR DTA114EKA-T146	
Q209	1-801-806-11	TRANSISTOR DTC144EKA	
Q601	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q602	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q603	8-729-027-52	TRANSISTOR DTC124EKA-T146	
Q604	8-729-027-52	TRANSISTOR DTC124EKA-T146	
Q605	8-729-027-23	TRANSISTOR DTA114EKA-T146	
< RESISTOR >			
R102	1-216-864-11	SHORT CHIP 0	

Ref. No.	Part No.	Description	Remark
R105	1-216-833-11	METAL CHIP 10K 5%	1/10W (EXCEPT RU)
R105	1-216-845-11	METAL CHIP 100K 5%	1/10W (RU)
R109	1-216-864-11	SHORT CHIP 0	
R114	1-216-864-11	SHORT CHIP 0	
R115	1-216-833-11	METAL CHIP 10K 5%	1/10W (EXCEPT RU)
R115	1-216-845-11	METAL CHIP 100K 5%	1/10W (RU)
R116	1-216-833-11	METAL CHIP 10K 5%	1/10W (EXCEPT RU)
R116	1-216-845-11	METAL CHIP 100K 5%	1/10W (RU)
R117	1-216-833-11	METAL CHIP 10K 5%	1/10W (EXCEPT RU)
R117	1-216-845-11	METAL CHIP 100K 5%	1/10W (RU)
R201	1-216-821-11	METAL CHIP 1K 5%	1/10W
R202	1-216-821-11	METAL CHIP 1K 5%	1/10W
R203	1-216-864-11	SHORT CHIP 0	
R204	1-216-821-11	METAL CHIP 1K 5%	1/10W
R205	1-216-864-11	SHORT CHIP 0	
R206	1-216-864-11	SHORT CHIP 0	
R208	1-216-841-11	METAL CHIP 47K 5%	1/10W
R210	1-216-849-11	METAL CHIP 220K 5%	1/10W
R211	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
R212	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
R213	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
R214	1-216-821-11	METAL CHIP 1K 5%	1/10W
R215	1-216-837-11	METAL CHIP 22K 5%	1/10W
R216	1-216-815-11	METAL CHIP 330 5%	1/10W
R217	1-216-815-11	METAL CHIP 330 5%	1/10W
R218	1-216-815-11	METAL CHIP 330 5%	1/10W
R219	1-216-815-11	METAL CHIP 330 5%	1/10W
R220	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R221	1-218-285-11	METAL CHIP 75 5%	1/10W
R225	1-216-864-11	SHORT CHIP 0	
R226	1-216-864-11	SHORT CHIP 0	
R230	1-218-285-11	METAL CHIP 75 5%	1/10W
R231	1-218-285-11	METAL CHIP 75 5%	1/10W
R232	1-218-285-11	METAL CHIP 75 5%	1/10W
R233	1-218-285-11	METAL CHIP 75 5%	1/10W
R234	1-218-285-11	METAL CHIP 75 5%	1/10W
R235	1-218-285-11	METAL CHIP 75 5%	1/10W
R236	1-218-285-11	METAL CHIP 75 5%	1/10W
R237	1-216-864-11	SHORT CHIP 0	
R238	1-216-864-11	SHORT CHIP 0	
R239	1-216-864-11	SHORT CHIP 0	
R240	1-216-864-11	SHORT CHIP 0	
R243	1-216-864-11	SHORT CHIP 0	
R244	1-216-864-11	SHORT CHIP 0	
R245	1-216-864-11	SHORT CHIP 0	
R603	1-216-821-11	METAL CHIP 1K 5%	1/10W
R606	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R609	1-216-817-11	METAL CHIP 470 5%	1/10W
R610	1-216-817-11	METAL CHIP 470 5%	1/10W
R611	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
R612	1-216-825-11	METAL CHIP 2.2K 5%	1/10W

I/O

IPOD

KEY

MAIN

Ref. No.	Part No.	Description	Remark
R613	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R614	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R615	1-216-841-11	METAL CHIP 47K 5%	1/10W
R616	1-216-841-11	METAL CHIP 47K 5%	1/10W
R617	1-216-821-11	METAL CHIP 1K 5%	1/10W
R618	1-216-833-11	METAL CHIP 10K 5%	1/10W
R619	1-216-821-11	METAL CHIP 1K 5%	1/10W
R620	1-216-833-11	METAL CHIP 10K 5%	1/10W
R623	1-216-841-11	METAL CHIP 47K 5%	1/10W
R624	1-216-841-11	METAL CHIP 47K 5%	1/10W
R627	1-216-841-11	METAL CHIP 47K 5%	1/10W
R628	1-216-841-11	METAL CHIP 47K 5%	1/10W
R629	1-216-841-11	METAL CHIP 47K 5%	1/10W
R630	1-216-841-11	METAL CHIP 47K 5%	1/10W
R631	1-216-841-11	METAL CHIP 47K 5%	1/10W
R632	1-216-841-11	METAL CHIP 47K 5%	1/10W
R634	1-216-841-11	METAL CHIP 47K 5%	1/10W
R635	1-216-833-11	METAL CHIP 10K 5%	1/10W
R636	1-216-841-11	METAL CHIP 47K 5%	1/10W
R637	1-216-821-11	METAL CHIP 1K 5%	1/10W
R638	1-216-821-11	METAL CHIP 1K 5%	1/10W
R639	1-216-827-11	METAL CHIP 3.3K 5%	1/10W
R640	1-216-841-11	METAL CHIP 47K 5%	1/10W
R641	1-216-841-11	METAL CHIP 47K 5%	1/10W
R644	1-216-827-11	METAL CHIP 3.3K 5%	1/10W
R645	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R646	1-216-833-11	METAL CHIP 10K 5%	1/10W
R647	1-216-833-11	METAL CHIP 10K 5%	1/10W
R650	1-216-833-11	METAL CHIP 10K 5%	1/10W
R651	1-216-833-11	METAL CHIP 10K 5%	1/10W
R652	1-216-833-11	METAL CHIP 10K 5%	1/10W
R653	1-216-833-11	METAL CHIP 10K 5%	1/10W
R654	1-216-833-11	METAL CHIP 10K 5%	1/10W
R663	1-216-845-11	METAL CHIP 100K 5%	1/10W
R664	1-216-845-11	METAL CHIP 100K 5%	1/10W
R674	1-216-833-11	METAL CHIP 10K 5%	1/10W
R675	1-216-833-11	METAL CHIP 10K 5%	1/10W
R681	1-216-864-11	SHORT CHIP 0	
R682	1-216-864-11	SHORT CHIP 0	
R685	1-216-864-11	SHORT CHIP 0	
R687	1-216-864-11	SHORT CHIP 0	
R688	1-216-821-11	METAL CHIP 1K 5%	1/10W
R689	1-216-821-11	METAL CHIP 1K 5%	1/10W

IPOD BOARD			

< CAPACITOR >			
C636	1-216-864-11	SHORT CHIP 0	
C637	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C638	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C639	1-126-964-11	ELECT 10uF 20%	50V
C640	1-126-964-11	ELECT 10uF 20%	50V
C641	1-126-933-11	ELECT 100uF 20%	16V
C642	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C643	1-126-933-11	ELECT 100uF 20%	16V

Ref. No.	Part No.	Description	Remark
		< IC >	
IC605	8-759-649-89	IC MC4558CD	
		< JACK >	
J603	1-566-822-51	JACK (AUDIO IN)	
		< RESISTOR >	
R605	1-216-817-11	METAL CHIP 470 5%	1/10W
R621	1-216-864-11	SHORT CHIP 0	
R642	1-216-864-11	SHORT CHIP 0	
R643	1-216-864-11	SHORT CHIP 0	
R665	1-216-817-11	METAL CHIP 470 5%	1/10W
R666	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R667	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R668	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R669	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R670	1-216-821-11	METAL CHIP 1K 5%	1/10W
R671	1-216-821-11	METAL CHIP 1K 5%	1/10W
R672	1-216-821-11	METAL CHIP 1K 5%	1/10W
R673	1-216-821-11	METAL CHIP 1K 5%	1/10W
R677	1-216-845-11	METAL CHIP 100K 5%	1/10W
R678	1-216-845-11	METAL CHIP 100K 5%	1/10W
R683	1-216-864-11	SHORT CHIP 0	
R684	1-216-864-11	SHORT CHIP 0	

KEY BOARD			

< RESISTOR >			
R851	1-216-821-11	METAL CHIP 1K 5%	1/10W
R852	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R853	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
R854	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
R855	1-216-821-11	METAL CHIP 1K 5%	1/10W
R856	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
R857	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
		< SWITCH >	
S802	1-762-875-21	SWITCH, KEYBOARD (▶)	
S803	1-762-875-21	SWITCH, KEYBOARD (◀◀)	
S804	1-762-875-21	SWITCH, KEYBOARD (■)	
S805	1-762-875-21	SWITCH, KEYBOARD (■)	
S806	1-762-875-21	SWITCH, KEYBOARD (▶▶)	
S807	1-762-875-21	SWITCH, KEYBOARD (FUNCTION)	
S808	1-762-875-21	SWITCH, KEYBOARD (≡)	

A-1088-401-A		MAIN BOARD, COMPLETE (EXCEPT RU)	
A-1105-140-A		MAIN BOARD, COMPLETE (RU)	

7-685-647-79		SCREW +BVTP 3X10 TYPE2 IT-3	
		< CAPACITOR >	
C101	1-164-346-11	CERAMIC CHIP 1uF	16V
C102	1-164-346-11	CERAMIC CHIP 1uF	16V
C103	1-164-346-11	CERAMIC CHIP 1uF	16V

MAIN

72

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C292	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C380	1-126-923-91	ELECT	220uF	20%	10V
C296	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	C381	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C297	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	C382	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C298	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	C383	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V
C299	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	C384	1-162-910-11	CERAMIC CHIP	5PF	0.25PF	50V
C301	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C385	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C302	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C391	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C303	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C392	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C304	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C393	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C305	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C394	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C306	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C395	1-164-505-11	CERAMIC CHIP	2.2uF		16V
C307	1-126-960-11	ELECT	1uF	20%	50V	C396	1-117-370-11	CERAMIC CHIP	10uF		10V
C308	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C402	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C309	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C403	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C310	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C404	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C311	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C405	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C312	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C406	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
C313	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C436	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C314	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C501	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C315	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C502	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C316	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C525	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C317	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C547	1-162-923-11	CERAMIC CHIP	47PF	5%	50V
C318	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C548	1-216-864-11	SHORT CHIP	0		
C319	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C570	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C320	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C571	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C321	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C572	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C322	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C580	1-104-656-11	ELECT	2200uF	20%	6.3V
C323	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C582	1-104-658-91	ELECT	100uF	20%	10V
C324	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C583	1-115-467-11	CERAMIC CHIP	0.22uF	10%	10V
C325	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C587	1-115-467-11	CERAMIC CHIP	0.22uF	10%	10V
C326	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C589	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C327	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C595	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C328	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C596	1-126-947-11	ELECT	47uF	20%	35V
C329	1-126-947-11	ELECT	47uF	20%	35V	C597	1-165-112-11	CERAMIC CHIP	0.33uF		16V
C332	1-126-947-11	ELECT	47uF	20%	35V	C598	1-165-112-11	CERAMIC CHIP	0.33uF		16V
C335	1-126-947-11	ELECT	47uF	20%	35V	C601	1-126-947-11	ELECT	47uF	20%	35V
C350	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	C602	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C351	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C603	1-104-658-91	ELECT	100uF	20%	10V
C352	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C608	1-162-953-11	CERAMIC CHIP	100PF	5%	50V
C353	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C712	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C354	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C716	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C356	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C762	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C357	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C798	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C358	1-126-925-91	ELECT	470uF	20%	10V	C799	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C359	1-126-925-91	ELECT	470uF	20%	10V	C856	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C360	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C875	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C361	1-126-947-11	ELECT	47uF	20%	35V	△C901	1-165-529-11	MYLAR	0.22uF	10	275V
C362	1-104-658-91	ELECT	100uF	20%	10V	△C902	1-165-529-11	MYLAR	0.22uF	10	275V
C363	1-164-156-11	CERAMIC CHIP	0.1uF		25V	△C903	1-112-332-11	ELECT (BLOCK)	330uF	20%	400V
C366	1-126-934-11	ELECT	220uF	20%	16V	△C903	1-112-333-11	ELECT (BLOCK)	330uF	20%	450V
C367	1-164-156-11	CERAMIC CHIP	0.1uF		25V						(RU)
C368	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	△C905	1-112-335-91	FILM	0.0033uF	5%	400V
C371	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	△C906	1-125-893-11	FILM	680PF	3%	1.5KV
C372	1-126-960-11	ELECT	1uF	20%	50V	△C907	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C374	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	△C908	1-107-909-11	ELECT	47uF	20%	50V
C375	1-126-933-11	ELECT	100uF	20%	16V	△C909	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
C377	1-126-964-11	ELECT	10uF	20%	50V	△C910	1-107-906-11	ELECT	10uF	20%	50V

HCD-DZ300

MAIN

Ref. No.	Part No.	Description			Remark
△C911	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
△C912	1-117-693-11	CERAMIC	100PF	10%	250V
△C913	1-117-693-11	CERAMIC	100PF	10%	250V
△C918	1-113-925-11	CERAMIC	0.01uF	20%	250V
△C920	1-113-925-11	CERAMIC	0.01uF	20%	250V
△C921	1-165-136-11	CERAMIC	3300PF	10%	500V
△C922	1-128-560-11	ELECT	22uF	20%	100V
△C923	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
△C924	1-124-257-00	ELECT	2.2uF	20%	50V
△C925	1-107-974-81	CERAMIC	47PF	5%	2KV
△C928	1-113-896-11	CERAMIC	220PF	10%	250V
△C929	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V
C931	1-136-203-11	MYLAR	0.01uF	5%	630V
C932	1-100-924-21	ELECT	2200uF	20%	35V
C933	1-100-924-21	ELECT	2200uF	20%	35V
C934	1-107-898-11	ELECT	2200uF	20%	35V
C935	1-165-319-11	CERAMIC CHIP	0.1uF		50V
C936	1-165-319-11	CERAMIC CHIP	0.1uF		50V
C937	1-100-756-91	CERAMIC CHIP	0.047uF		50V
△C938	1-117-698-51	CERAMIC	680PF	10%	250V
C939	1-135-621-51	FILM	2.2uF	5%	50V
C940	1-128-947-31	ELECT	3300uF	20%	10V
C941	1-128-954-21	ELECT	1000uF	20%	25V
C942	1-126-965-11	ELECT	22uF	20%	50V
C943	1-126-933-11	ELECT	100uF	20%	16V
C944	1-128-951-21	ELECT	2200uF	20%	16V
C945	1-126-965-11	ELECT	22uF	20%	50V
C946	1-128-950-21	ELECT	1000uF	20%	16V
C947	1-104-658-91	ELECT	100uF	20%	10V
C948	1-126-965-11	ELECT	22uF	20%	50V
C949	1-165-722-31	ELECT	100uF	20%	10V
C951	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V
C952	1-100-756-91	CERAMIC CHIP	0.047uF		50V
C953	1-117-214-11	CERAMIC	0.001uF	10%	2KV
C954	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V
C955	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V
△C963	1-117-699-11	CERAMIC	0.001uF	99%	250V
△C964	1-117-699-11	CERAMIC	0.001uF	99%	250V
△C965	1-113-896-11	CERAMIC	220PF	10%	250V
C966	1-113-896-11	CERAMIC	220PF	10%	250V
< CONNECTOR >					
CN300	1-564-704-11	PIN, CONNECTOR (SMALL TYPE) 2P			
* CN309	1-568-954-11	PIN, CONNECTOR 5P			
CN503	1-784-366-21	CONNECTOR, FFC/FPC 7P			
CN504	1-784-370-21	CONNECTOR, FFC/FPC 11P			
CN505	1-784-370-21	CONNECTOR, FFC/FPC 11P			
CN507	1-793-991-11	FFC/CONNECTOR, FPC (LIF (NON-ZIF)) 23P			
CN509	1-779-287-11	CONNECTOR, FFC (LIF (NON-ZIF)) 19P			
CN510	1-784-368-11	CONNECTOR, FFC/FPC 9P			
CN901	1-564-321-00	PIN, CONNECTOR (3.96mm PITCH) 2P			
< DIODE >					
D101	6-500-260-01	DIODE	P6SMB39AT3		
D102	6-500-260-01	DIODE	P6SMB39AT3		
D103	6-500-260-01	DIODE	P6SMB39AT3		
D104	6-500-260-01	DIODE	P6SMB39AT3		
D105	6-500-260-01	DIODE	P6SMB39AT3		

Ref. No.	Part No.	Description	Remark
D106	6-500-260-01	DIODE P6SMB39AT3	
D201	6-500-260-01	DIODE P6SMB39AT3	
D202	6-500-260-01	DIODE P6SMB39AT3	
D203	6-500-260-01	DIODE P6SMB39AT3	
D204	6-500-260-01	DIODE P6SMB39AT3	
D205	6-500-260-01	DIODE P6SMB39AT3	
D206	6-500-260-01	DIODE P6SMB39AT3	
D303	8-719-988-61	DIODE 1SS355TE-17	
D304	8-719-988-61	DIODE 1SS355TE-17	
D503	8-719-988-61	DIODE 1SS355TE-17	
D504	8-719-988-61	DIODE 1SS355TE-17	
D505	8-719-988-61	DIODE 1SS355TE-17	
D506	8-719-988-61	DIODE 1SS355TE-17	
△D901	8-719-082-57	DIODE D5SBA60F01	
△D905	8-719-063-74	DIODE D1NL20U-TR2	
△D906	8-719-988-61	DIODE 1SS355TE-17	
△D907	8-719-988-61	DIODE 1SS355TE-17	
△D908	8-719-988-61	DIODE 1SS355TE-17	
△D909	8-719-988-61	DIODE 1SS355TE-17	
△D910	8-719-988-61	DIODE 1SS355TE-17	
△D913	6-500-241-01	DIODE SARS03	
△D914	8-719-988-61	DIODE 1SS355TE-17	
△D915	8-719-977-28	DIODE DTZ10B	
△D921	6-500-849-01	DIODE ERA22-08KFLB	
△D922	8-719-063-74	DIODE D1NL20U-TR2	
△D923	8-719-977-28	DIODE DTZ10B	
△D924	8-719-083-69	DIODE UDZSTE-1724B	
△D925	8-719-069-54	DIODE UDZSTE-175.1B	
D931	6-500-383-01	DIODE YG906C2R	
D932	8-719-069-54	DIODE UDZSTE-175.1B	
D941	8-719-063-74	DIODE D1NL20U-TR2	
D942	8-719-080-53	DIODE RK36LF-B3	
D943	8-719-080-53	DIODE RK36LF-B3	
D944	6-500-288-11	DIODE EK19LF-F7	
D945	8-719-083-67	DIODE UDZSTE-1720B	
< TERMINAL BOARD >			
EB901	1-537-770-21	TERMINAL BOARD, GROUND	
EB902	1-537-770-21	TERMINAL BOARD, GROUND	
EB903	1-537-770-21	TERMINAL BOARD, GROUND	
EB904	1-537-770-21	TERMINAL BOARD, GROUND	
EB905	1-537-770-21	TERMINAL BOARD, GROUND	
EB906	1-537-770-21	TERMINAL BOARD, GROUND	
EB907	1-537-770-21	TERMINAL BOARD, GROUND	
EB908	1-537-770-21	TERMINAL BOARD, GROUND	
EB910	1-537-770-21	TERMINAL BOARD, GROUND	
EB911	1-537-770-21	TERMINAL BOARD, GROUND	
< FERRITE BEAD >			
FB301	1-469-760-21	FERRITE, EMI (SMD) (2012)	
FB302	1-216-295-91	SHORT CHIP	0
△FB905	1-410-396-41	FERRITE	0.45uH
< IC >			
IC101	6-705-695-01	IC CXD9775M	
IC102	6-705-695-01	IC CXD9775M	
IC103	6-705-695-01	IC CXD9775M	
IC104	6-705-695-01	IC CXD9775M	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
IC105	6-705-695-01	IC CXD9775M		L948	1-414-398-11	INDUCTOR 10uH	
IC106	6-705-695-01	IC CXD9775M		L951	1-414-398-11	INDUCTOR 10uH	
IC108	6-707-939-01	IC CXD9843AR				< LINE FILTER >	
IC109	6-707-939-01	IC CXD9843AR					
IC110	6-707-939-01	IC CXD9843AR		△ LF901	1-457-079-11	LINE FILTER COIL	
IC301	6-705-720-01	IC RC4580IDR				< IC >	
IC303	6-702-300-01	IC TK11118CSCL-G		△ PC901	6-600-438-01	IC TLP421F (D4-GR)	
IC305	8-759-649-50	IC SN74AHC1GU04DCKR		△ PC902	6-600-438-01	IC TLP421F (D4-GR)	
IC503	6-704-768-01	IC SN74AHC2G157HDCU3		△ PC903	6-600-438-01	IC TLP421F (D4-GR)	
IC509	6-805-071-01	IC M30620MCP-A01FPU0				< TRANSISTOR >	
IC511	6-701-680-01	IC PST3629NR					
IC515	6-703-550-01	IC TA7809LS		Q101	8-729-600-22	TRANSISTOR 2SA1235-F	
IC516	6-703-547-01	IC TA7805LS		Q102	8-729-600-22	TRANSISTOR 2SA1235-F	
△ IC901	6-707-742-11	IC STR-F6168-LF1352		Q103	8-729-600-22	TRANSISTOR 2SA1235-F	
△ IC921	6-707-740-01	IC STR-V153		Q104	8-729-600-22	TRANSISTOR 2SA1235-F	
IC931	8-759-648-34	IC TA76431AS (TPE6)		Q105	8-729-600-22	TRANSISTOR 2SA1235-F	
IC941	6-707-746-01	IC SI-3120KM-TL					
IC942	6-707-745-10	IC SI-3050KM-TL		Q106	8-729-600-22	TRANSISTOR 2SA1235-F	
IC943	6-707-744-01	IC SI-3033KM-TL		Q107	8-729-600-22	TRANSISTOR 2SA1235-F	
IC951	6-707-743-01	IC TA76L431S (TPE6, Q)		Q108	8-729-600-22	TRANSISTOR 2SA1235-F	
		< JACK >		Q109	8-729-600-22	TRANSISTOR 2SA1235-F	
J201	1-780-202-11	TERMINAL BOARD (SP) (4P) (SPEAKER)		Q110	8-729-600-22	TRANSISTOR 2SA1235-F	
J202	1-780-203-11	TERMINAL BOARD (SP) (2P) (SPEAKER)		Q111	8-729-600-22	TRANSISTOR 2SA1235-F	
		< COIL >		Q112	8-729-600-22	TRANSISTOR 2SA1235-F	
L101	1-457-078-11	AIR-CORE COIL		Q301	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L102	1-457-078-11	AIR-CORE COIL		Q302	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L103	1-457-078-11	AIR-CORE COIL		Q303	6-550-702-01	TRANSISTOR 2SC3243TP-E	
L104	1-457-078-11	AIR-CORE COIL					
L105	1-457-078-11	AIR-CORE COIL		Q304	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L106	1-457-078-11	AIR-CORE COIL		Q506	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L111	1-457-077-11	AIR-CORE COIL		Q507	8-729-027-23	TRANSISTOR DTA114EKA-T146	
L112	1-457-077-11	AIR-CORE COIL		Q901	8-729-140-04	TRANSISTOR 2SB1116A-L	
L113	1-457-077-11	AIR-CORE COIL		Q921	8-729-142-51	TRANSISTOR 2SD1616A-TP-LK	
L114	1-457-077-11	AIR-CORE COIL					
L115	1-457-077-11	AIR-CORE COIL		Q943	1-801-806-11	TRANSISTOR DTC144EKA	
L116	1-457-077-11	AIR-CORE COIL		Q945	6-550-718-01	TRANSISTOR RSR025N03TL	
L121	1-456-680-11	INDUCTOR 10uH		Q947	1-801-806-11	TRANSISTOR DTC144EKA	
L122	1-456-680-11	INDUCTOR 10uH				< RESISTOR >	
L123	1-456-680-11	INDUCTOR 10uH		R108	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L124	1-456-680-11	INDUCTOR 10uH		R109	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L125	1-456-680-11	INDUCTOR 10uH		R110	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L126	1-456-680-11	INDUCTOR 10uH		R111	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L131	1-456-680-11	INDUCTOR 10uH		R112	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L132	1-456-680-11	INDUCTOR 10uH					
L133	1-456-680-11	INDUCTOR 10uH		R113	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L134	1-456-680-11	INDUCTOR 10uH		R114	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L135	1-456-680-11	INDUCTOR 10uH		R115	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L136	1-456-680-11	INDUCTOR 10uH		R116	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L301	1-414-754-11	INDUCTOR 10uH		R117	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L302	1-412-939-11	INDUCTOR 1uH					
L931	1-457-058-11	COIL, CHOKE 10uH		R118	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L941	1-414-398-11	INDUCTOR 10uH		R119	1-216-837-11	METAL CHIP 22K 5% 1/10W	
L942	1-414-398-11	INDUCTOR 10uH		R131	1-216-864-11	SHORT CHIP 0	
L945	1-414-398-11	INDUCTOR 10uH		R132	1-216-864-11	SHORT CHIP 0	
L947	1-414-398-11	INDUCTOR 10uH		R133	1-216-864-11	SHORT CHIP 0	
				R134	1-216-864-11	SHORT CHIP 0	
				R135	1-216-864-11	SHORT CHIP 0	
				R136	1-216-864-11	SHORT CHIP 0	
				R139	1-216-864-11	SHORT CHIP 0	
				R141	1-216-864-11	SHORT CHIP 0	

HCD-DZ300

MAIN

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R142	1-216-864-11	SHORT CHIP	0			R306	1-216-809-11	METAL CHIP	100	5%	1/10W
R143	1-216-864-11	SHORT CHIP	0			R308	1-216-809-11	METAL CHIP	100	5%	1/10W
R144	1-216-864-11	SHORT CHIP	0								
R145	1-216-864-11	SHORT CHIP	0			R309	1-216-809-11	METAL CHIP	100	5%	1/10W
R146	1-216-864-11	SHORT CHIP	0			R310	1-216-809-11	METAL CHIP	100	5%	1/10W
						R311	1-216-809-11	METAL CHIP	100	5%	1/10W
R151	1-216-864-11	SHORT CHIP	0			R312	1-216-809-11	METAL CHIP	100	5%	1/10W
R152	1-216-864-11	SHORT CHIP	0			R313	1-216-864-11	SHORT CHIP	0		
R153	1-216-864-11	SHORT CHIP	0								
R154	1-216-864-11	SHORT CHIP	0			R314	1-216-809-11	METAL CHIP	100	5%	1/10W
R155	1-216-864-11	SHORT CHIP	0			R315	1-216-864-11	SHORT CHIP	0		
						R316	1-216-817-11	METAL CHIP	470	5%	1/10W
R156	1-216-864-11	SHORT CHIP	0			R317	1-216-817-11	METAL CHIP	470	5%	1/10W
R161	1-216-864-11	SHORT CHIP	0			R318	1-216-817-11	METAL CHIP	470	5%	1/10W
R162	1-216-864-11	SHORT CHIP	0								
R163	1-216-864-11	SHORT CHIP	0			R319	1-216-833-11	METAL CHIP	10K	5%	1/10W
R164	1-216-864-11	SHORT CHIP	0			R320	1-216-864-11	SHORT CHIP	0		
						R321	1-216-864-11	SHORT CHIP	0		
R165	1-216-864-11	SHORT CHIP	0			R322	1-216-833-11	METAL CHIP	10K	5%	1/10W
R166	1-216-864-11	SHORT CHIP	0			R323	1-216-864-11	SHORT CHIP	0		
R171	1-216-864-11	SHORT CHIP	0								
R172	1-216-864-11	SHORT CHIP	0			R324	1-216-864-11	SHORT CHIP	0		
R173	1-216-864-11	SHORT CHIP	0			R325	1-216-864-11	SHORT CHIP	0		
						R326	1-216-864-11	SHORT CHIP	0		
R174	1-216-864-11	SHORT CHIP	0			R327	1-216-864-11	SHORT CHIP	0		
R175	1-216-864-11	SHORT CHIP	0			R328	1-216-864-11	SHORT CHIP	0		
R176	1-216-864-11	SHORT CHIP	0								
R191	1-220-942-11	METAL CHIP	3.3	1%	1/4W	R329	1-216-864-11	SHORT CHIP	0		
R192	1-220-942-11	METAL CHIP	3.3	1%	1/4W	R330	1-216-837-11	METAL CHIP	22K	5%	1/10W
						R331	1-216-837-11	METAL CHIP	22K	5%	1/10W
R193	1-220-942-11	METAL CHIP	3.3	1%	1/4W	R332	1-216-837-11	METAL CHIP	22K	5%	1/10W
R194	1-220-942-11	METAL CHIP	3.3	1%	1/4W	R333	1-216-837-11	METAL CHIP	22K	5%	1/10W
R195	1-220-942-11	METAL CHIP	3.3	1%	1/4W						
R196	1-220-942-11	METAL CHIP	3.3	1%	1/4W	R334	1-216-837-11	METAL CHIP	22K	5%	1/10W
R201	1-220-942-11	METAL CHIP	3.3	1%	1/4W	R335	1-216-837-11	METAL CHIP	22K	5%	1/10W
						R336	1-216-837-11	METAL CHIP	22K	5%	1/10W
R202	1-220-942-11	METAL CHIP	3.3	1%	1/4W	R337	1-216-837-11	METAL CHIP	22K	5%	1/10W
R203	1-220-942-11	METAL CHIP	3.3	1%	1/4W	R338	1-216-837-11	METAL CHIP	22K	5%	1/10W
R204	1-220-942-11	METAL CHIP	3.3	1%	1/4W						
R205	1-220-942-11	METAL CHIP	3.3	1%	1/4W	R339	1-216-837-11	METAL CHIP	22K	5%	1/10W
R206	1-220-942-11	METAL CHIP	3.3	1%	1/4W	R340	1-216-839-11	METAL CHIP	33K	5%	1/10W
						R341	1-216-839-11	METAL CHIP	33K	5%	1/10W
R211	1-216-136-00	RES-CHIP	2.7	5%	1/8W	R342	1-216-864-11	SHORT CHIP	0		
R212	1-216-136-00	RES-CHIP	2.7	5%	1/8W	R343	1-216-864-11	SHORT CHIP	0		
R213	1-216-136-00	RES-CHIP	2.7	5%	1/8W						
R214	1-216-136-00	RES-CHIP	2.7	5%	1/8W	R344	1-216-817-11	METAL CHIP	470	5%	1/10W
R215	1-216-136-00	RES-CHIP	2.7	5%	1/8W	R345	1-216-833-11	METAL CHIP	10K	5%	1/10W
						R346	1-216-817-11	METAL CHIP	470	5%	1/10W
R216	1-216-136-00	RES-CHIP	2.7	5%	1/8W	R347	1-216-833-11	METAL CHIP	10K	5%	1/10W
R221	1-216-136-00	RES-CHIP	2.7	5%	1/8W	R348	1-216-817-11	METAL CHIP	470	5%	1/10W
R222	1-216-136-00	RES-CHIP	2.7	5%	1/8W						
R223	1-216-136-00	RES-CHIP	2.7	5%	1/8W	R349	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R224	1-216-136-00	RES-CHIP	2.7	5%	1/8W	R350	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
						R351	1-216-809-11	METAL CHIP	100	5%	1/10W
R225	1-216-136-00	RES-CHIP	2.7	5%	1/8W	R353	1-216-809-11	METAL CHIP	100	5%	1/10W
R226	1-216-136-00	RES-CHIP	2.7	5%	1/8W	R354	1-216-809-11	METAL CHIP	100	5%	1/10W
R241	1-216-809-11	METAL CHIP	100	5%	1/10W						
R242	1-216-809-11	METAL CHIP	100	5%	1/10W	R355	1-216-809-11	METAL CHIP	100	5%	1/10W
R243	1-216-809-11	METAL CHIP	100	5%	1/10W	R356	1-216-803-11	METAL CHIP	33	5%	1/10W
						R357	1-216-803-11	METAL CHIP	33	5%	1/10W
R244	1-216-809-11	METAL CHIP	100	5%	1/10W	R358	1-216-803-11	METAL CHIP	33	5%	1/10W
R245	1-216-809-11	METAL CHIP	100	5%	1/10W	R361	1-216-845-11	METAL CHIP	100K	5%	1/10W
R246	1-216-809-11	METAL CHIP	100	5%	1/10W						
R300	1-216-809-11	METAL CHIP	100	5%	1/10W	R362	1-216-845-11	METAL CHIP	100K	5%	1/10W
R302	1-216-809-11	METAL CHIP	100	5%	1/10W	R363	1-216-845-11	METAL CHIP	100K	5%	1/10W
						R364	1-216-845-11	METAL CHIP	100K	5%	1/10W
R303	1-216-809-11	METAL CHIP	100	5%	1/10W	R365	1-216-845-11	METAL CHIP	100K	5%	1/10W
R304	1-216-809-11	METAL CHIP	100	5%	1/10W	R366	1-216-845-11	METAL CHIP	100K	5%	1/10W
R305	1-216-809-11	METAL CHIP	100	5%	1/10W						

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
R371	1-216-818-11	METAL CHIP	560	5%	1/10W	R488	1-216-833-11	METAL CHIP	10K	5%	1/10W
R372	1-216-818-11	METAL CHIP	560	5%	1/10W	R489	1-216-833-11	METAL CHIP	10K	5%	1/10W
R373	1-216-818-11	METAL CHIP	560	5%	1/10W						
R374	1-216-818-11	METAL CHIP	560	5%	1/10W	R490	1-216-833-11	METAL CHIP	10K	5%	1/10W
R375	1-216-818-11	METAL CHIP	560	5%	1/10W	R491	1-216-833-11	METAL CHIP	10K	5%	1/10W
						R492	1-216-833-11	METAL CHIP	10K	5%	1/10W
R376	1-216-818-11	METAL CHIP	560	5%	1/10W	R493	1-216-833-11	METAL CHIP	10K	5%	1/10W
R377	1-216-818-11	METAL CHIP	560	5%	1/10W	R501	1-216-809-11	METAL CHIP	100	5%	1/10W
R378	1-216-818-11	METAL CHIP	560	5%	1/10W						
R379	1-216-818-11	METAL CHIP	560	5%	1/10W	R503	1-216-809-11	METAL CHIP	100	5%	1/10W
R380	1-216-818-11	METAL CHIP	560	5%	1/10W	R514	1-216-821-11	METAL CHIP	1K	5%	1/10W
						R535	1-216-821-11	METAL CHIP	1K	5%	1/10W
R381	1-216-818-11	METAL CHIP	560	5%	1/10W						(EXCEPT RU)
R382	1-216-818-11	METAL CHIP	560	5%	1/10W	R536	1-216-821-11	METAL CHIP	1K	5%	1/10W
R393	1-216-801-11	METAL CHIP	22	5%	1/10W						(EXCEPT RU)
R394	1-216-857-11	METAL CHIP	1M	5%	1/10W	R550	1-216-864-11	SHORT CHIP	0		
R395	1-216-845-11	METAL CHIP	100K	5%	1/10W						
						R577	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R396	1-216-809-11	METAL CHIP	100	5%	1/10W	R584	1-216-809-11	METAL CHIP	100	5%	1/10W
R400	1-216-845-11	METAL CHIP	100K	5%	1/10W	R585	1-216-809-11	METAL CHIP	100	5%	1/10W
R401	1-216-845-11	METAL CHIP	100K	5%	1/10W	R586	1-216-809-11	METAL CHIP	100	5%	1/10W
R402	1-216-845-11	METAL CHIP	100K	5%	1/10W	R587	1-216-809-11	METAL CHIP	100	5%	1/10W
R403	1-216-845-11	METAL CHIP	100K	5%	1/10W						
						R588	1-216-809-11	METAL CHIP	100	5%	1/10W
R404	1-216-845-11	METAL CHIP	100K	5%	1/10W	R589	1-216-821-11	METAL CHIP	1K	5%	1/10W
R405	1-216-845-11	METAL CHIP	100K	5%	1/10W	R590	1-216-809-11	METAL CHIP	100	5%	1/10W
R406	1-216-845-11	METAL CHIP	100K	5%	1/10W	R591	1-216-809-11	METAL CHIP	100	5%	1/10W
R407	1-216-845-11	METAL CHIP	100K	5%	1/10W	R592	1-216-833-11	METAL CHIP	10K	5%	1/10W
R408	1-216-845-11	METAL CHIP	100K	5%	1/10W						
						R593	1-216-833-11	METAL CHIP	10K	5%	1/10W
R409	1-216-845-11	METAL CHIP	100K	5%	1/10W	R594	1-216-809-11	METAL CHIP	100	5%	1/10W
R410	1-216-845-11	METAL CHIP	100K	5%	1/10W	R595	1-216-809-11	METAL CHIP	100	5%	1/10W
R411	1-216-845-11	METAL CHIP	100K	5%	1/10W	R596	1-216-841-11	METAL CHIP	47K	5%	1/10W
R412	1-216-845-11	METAL CHIP	100K	5%	1/10W						(RU)
R424	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R601	1-216-809-11	METAL CHIP	100	5%	1/10W
R426	1-216-833-11	METAL CHIP	10K	5%	1/10W	R606	1-216-819-11	METAL CHIP	680	5%	1/10W
R427	1-216-833-11	METAL CHIP	10K	5%	1/10W	R607	1-216-819-11	METAL CHIP	680	5%	1/10W
R428	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R608	1-216-809-11	METAL CHIP	100	5%	1/10W
R429	1-216-822-11	METAL CHIP	1.2K	5%	1/10W	R609	1-216-864-11	SHORT CHIP	0		
R430	1-216-833-11	METAL CHIP	10K	5%	1/10W	R611	1-216-833-11	METAL CHIP	10K	5%	1/10W
R431	1-216-845-11	METAL CHIP	100K	5%	1/10W	R612	1-216-833-11	METAL CHIP	10K	5%	1/10W
R450	1-216-833-11	METAL CHIP	10K	5%	1/10W	R614	1-216-833-11	METAL CHIP	10K	5%	1/10W
R451	1-216-833-11	METAL CHIP	10K	5%	1/10W	R615	1-216-817-11	METAL CHIP	470	5%	1/10W
R452	1-216-833-11	METAL CHIP	10K	5%	1/10W	R616	1-216-833-11	METAL CHIP	10K	5%	1/10W
R453	1-216-833-11	METAL CHIP	10K	5%	1/10W	R620	1-216-809-11	METAL CHIP	100	5%	1/10W
R456	1-216-833-11	METAL CHIP	10K	5%	1/10W	R624	1-216-833-11	METAL CHIP	10K	5%	1/10W
R457	1-216-833-11	METAL CHIP	10K	5%	1/10W	R628	1-216-821-11	METAL CHIP	1K	5%	1/10W
R458	1-216-833-11	METAL CHIP	10K	5%	1/10W	R629	1-216-295-91	SHORT CHIP	0		
R459	1-216-833-11	METAL CHIP	10K	5%	1/10W	R636	1-216-864-11	SHORT CHIP	0		
R460	1-216-833-11	METAL CHIP	10K	5%	1/10W	R637	1-216-864-11	SHORT CHIP	0		
R461	1-216-833-11	METAL CHIP	10K	5%	1/10W	R638	1-216-809-11	METAL CHIP	100	5%	1/10W
R462	1-216-833-11	METAL CHIP	10K	5%	1/10W	R639	1-216-809-11	METAL CHIP	100	5%	1/10W
R463	1-216-833-11	METAL CHIP	10K	5%	1/10W	R656	1-216-864-11	SHORT CHIP	0		
R464	1-216-833-11	METAL CHIP	10K	5%	1/10W	R657	1-216-841-11	METAL CHIP	47K	5%	1/10W
R472	1-216-864-11	SHORT CHIP	0			R659	1-216-845-11	METAL CHIP	100K	5%	1/10W
R473	1-216-864-11	SHORT CHIP	0			R662	1-216-841-11	METAL CHIP	47K	5%	1/10W
R474	1-216-864-11	SHORT CHIP	0			R673	1-216-833-11	METAL CHIP	10K	5%	1/10W
R475	1-216-864-11	SHORT CHIP	0			R675	1-216-809-11	METAL CHIP	100	5%	1/10W
R481	1-216-833-11	METAL CHIP	10K	5%	1/10W	R678	1-216-864-11	SHORT CHIP	0		
R482	1-216-833-11	METAL CHIP	10K	5%	1/10W	R692	1-216-809-11	METAL CHIP	100	5%	1/10W
R483	1-216-833-11	METAL CHIP	10K	5%	1/10W	R693	1-216-809-11	METAL CHIP	100	5%	1/10W
R484	1-216-833-11	METAL CHIP	10K	5%	1/10W	R694	1-216-809-11	METAL CHIP	100	5%	1/10W
R487	1-216-833-11	METAL CHIP	10K	5%	1/10W	R695	1-216-809-11	METAL CHIP	100	5%	1/10W

HCD-DZ300

MAIN

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark	
R696	1-216-809-11	METAL CHIP	100	5%	1/10W	R792	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	
R697	1-216-809-11	METAL CHIP	100	5%	1/10W							(EXCEPT RU)
							R793	1-216-841-11	METAL CHIP	47K	5%	1/10W
R701	1-216-809-11	METAL CHIP	100	5%	1/10W		△ R901	1-219-237-11	SOLID	3.3M	20%	1/2W
R702	1-216-833-11	METAL CHIP	10K	5%	1/10W							
R703	1-216-821-11	METAL CHIP	1K	5%	1/10W		△ R903	1-215-929-11	METAL OXIDE	100K	5%	3W
R704	1-216-821-11	METAL CHIP	1K	5%	1/10W		△ R904	1-215-929-11	METAL OXIDE	100K	5%	3W
R705	1-216-833-11	METAL CHIP	10K	5%	1/10W		△ R905	1-216-797-11	METAL CHIP	10	5%	1/10W
							△ R906	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R706	1-216-809-11	METAL CHIP	100	5%	1/10W		△ R907	1-216-833-11	METAL CHIP	10K	5%	1/10W
R707	1-216-809-11	METAL CHIP	100	5%	1/10W							
R709	1-216-833-11	METAL CHIP	10K	5%	1/10W		△ R908	1-260-105-11	CARBON	3.3K	5%	1/2W
R710	1-216-864-11	SHORT CHIP	0				△ R909	1-216-845-11	METAL CHIP	100K	5%	1/10W
R711	1-216-809-11	METAL CHIP	100	5%	1/10W		△ R910	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
							△ R911	1-216-813-11	METAL CHIP	220	5%	1/10W
R712	1-216-864-11	SHORT CHIP	0				△ R912	1-216-363-00	METAL OXIDE	0.33	5%	2W
R713	1-216-864-11	SHORT CHIP	0									
R714	1-216-864-11	SHORT CHIP	0			△ R914	1-214-789-00	METAL	0.1	10%	5W	
R715	1-216-864-11	SHORT CHIP	0			△ R918	1-216-864-11	SHORT CHIP	0			
R716	1-216-809-11	METAL CHIP	100	5%	1/10W	△ R919	1-216-836-11	METAL CHIP	18K	5%	1/10W	
						△ R921	1-215-904-61	METAL OXIDE	100K	5%	2W	
R717	1-216-833-11	METAL CHIP	10K	5%	1/10W	△ R922	1-216-793-11	METAL CHIP	4.7	5%	1/10W	
R718	1-216-833-11	METAL CHIP	10K	5%	1/10W							
					(RU)	△ R923	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	
R719	1-216-833-11	METAL CHIP	10K	5%	1/10W	△ R924	1-216-864-11	SHORT CHIP	0			
R720	1-216-833-11	METAL CHIP	10K	5%	1/10W	△ R925	1-216-797-11	METAL CHIP	10	5%	1/10W	
R721	1-216-833-11	METAL CHIP	10K	5%	1/10W	△ R926	1-216-855-11	METAL CHIP	680K	5%	1/10W	
					(RU)	△ R927	1-216-349-00	METAL OXIDE	1	5%	1W	
						△ R930	1-216-864-11	SHORT CHIP	0			
R722	1-216-841-11	METAL CHIP	47K	5%	1/10W	R931	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W	
R725	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R932	1-218-883-11	METAL CHIP	33K	0.5%	1/10W	
R726	1-216-821-11	METAL CHIP	1K	5%	1/10W	R933	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	
R727	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R934	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R728	1-216-821-11	METAL CHIP	1K	5%	1/10W							
						R935	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R729	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R936	1-216-853-11	METAL CHIP	470K	5%	1/10W	
R730	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R937	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R732	1-216-833-11	METAL CHIP	10K	5%	1/10W	R938	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R733	1-216-833-11	METAL CHIP	10K	5%	1/10W	R939	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W	
R734	1-216-833-11	METAL CHIP	10K	5%	1/10W							
						R940	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R739	1-216-841-11	METAL CHIP	47K	5%	1/10W	R941	1-216-864-11	SHORT CHIP	0			
R741	1-216-841-11	METAL CHIP	47K	5%	1/10W	R943	1-216-864-11	SHORT CHIP	0			
R742	1-216-833-11	METAL CHIP	10K	5%	1/10W	R946	1-216-811-11	METAL CHIP	150	5%	1/10W	
R744	1-216-833-11	METAL CHIP	10K	5%	1/10W	R948	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R746	1-216-841-11	METAL CHIP	47K	5%	1/10W							
						R949	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R748	1-216-821-11	METAL CHIP	1K	5%	1/10W	R951	1-218-831-11	METAL CHIP	220	0.5%	1/10W	
R749	1-216-821-11	METAL CHIP	1K	5%	1/10W	R952	1-218-855-11	METAL CHIP	2.2K	0.5%	1/10W	
R750	1-216-821-11	METAL CHIP	1K	5%	1/10W	R953	1-218-861-11	METAL CHIP	3.9K	0.5%	1/10W	
R755	1-216-821-11	METAL CHIP	1K	5%	1/10W	R954	1-216-837-11	METAL CHIP	22K	5%	1/10W	
R756	1-216-821-11	METAL CHIP	1K	5%	1/10W							
						R955	1-216-817-11	METAL CHIP	470	5%	1/10W	
R760	1-216-809-11	METAL CHIP	100	5%	1/10W	R956	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R761	1-216-809-11	METAL CHIP	100	5%	1/10W	R957	1-216-841-11	METAL CHIP	47K	5%	1/10W	
R762	1-216-809-11	METAL CHIP	100	5%	1/10W	R958	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R763	1-216-809-11	METAL CHIP	100	5%	1/10W	R965	1-216-864-11	SHORT CHIP	0			
R764	1-216-809-11	METAL CHIP	100	5%	1/10W							
								< TRANSFORMER >				
R765	1-216-809-11	METAL CHIP	100	5%	1/10W	△ T901	1-443-651-11	TRANSFORMER, CONVERTER				
R774	1-216-821-11	METAL CHIP	1K	5%	1/10W	△ T902	1-443-650-11	TRANSFORMER, CONVERTER				
R775	1-216-841-11	METAL CHIP	47K	5%	1/10W							
R789	1-216-809-11	METAL CHIP	100	5%	1/10W			< THERMISTOR >				
R790	1-216-809-11	METAL CHIP	100	5%	1/10W							
						△ TH901	1-805-842-21	THERMISTOR, NTC 6.0				
R791	1-216-809-11	METAL CHIP	100	5%	1/10W							
R792	1-216-823-11	METAL CHIP	1.5K	5%	1/10W							
					(RU)							

Ref. No.	Part No.	Description	Remark
		< VARISTOR >	
△ VDR901	1-805-482-11	VARISTOR	
		< VIBRATOR >	
X450	1-795-660-21	QUARTZ CRYSTAL UNIT (49.152MHz)	
X502	1-795-058-21	VIBRATOR, CERAMIC (5MHz)	

		MS-203 BOARD	

		< CONNECTOR >	
CN001	1-815-412-11	CONNECTOR, FFC/FPC 5P	
		< SWITCH >	
S001	1-786-693-11	SWITCH, DETECTION (CHUCK/TRAY DETECT)	

		STBY BOARD	

		< CONNECTOR >	
CN804	1-506-481-11	PIN, CONNECTOR 2P	
		< SWITCH >	
S801	1-762-875-21	SWITCH, KEYBOARD (I/Ⓛ)	

		MISCELLANEOUS	

5	1-787-331-11	FAN, D.C.	
57	1-828-356-11	WIRE (FLAT TYPE) (19 CORE)	
△ 106	1-828-528-11	CORD, POWER	
110	1-828-382-11	WIRE (FLAT TYPE) (23 CORE)	
112	1-830-549-11	WIRE (FLAT TYPE) (5 CORE)	
113	1-830-545-11	WIRE (FLAT TYPE) (11 CORE)	
114	1-830-548-11	WIRE (FLAT TYPE) (13 CORE)	
115	1-830-547-11	WIRE (FLAT TYPE) (7 CORE)	
116	1-830-546-11	WIRE (FLAT TYPE) (11 CORE)	
△ 507	8-820-290-02	OPTICAL PICK-UP (KHM-310CAA/C2RP)	
△ F901	1-532-506-33	FUSE (T6.3AL/250V)	