


1. HT-F4500/ZF (JG01)


Exploded View

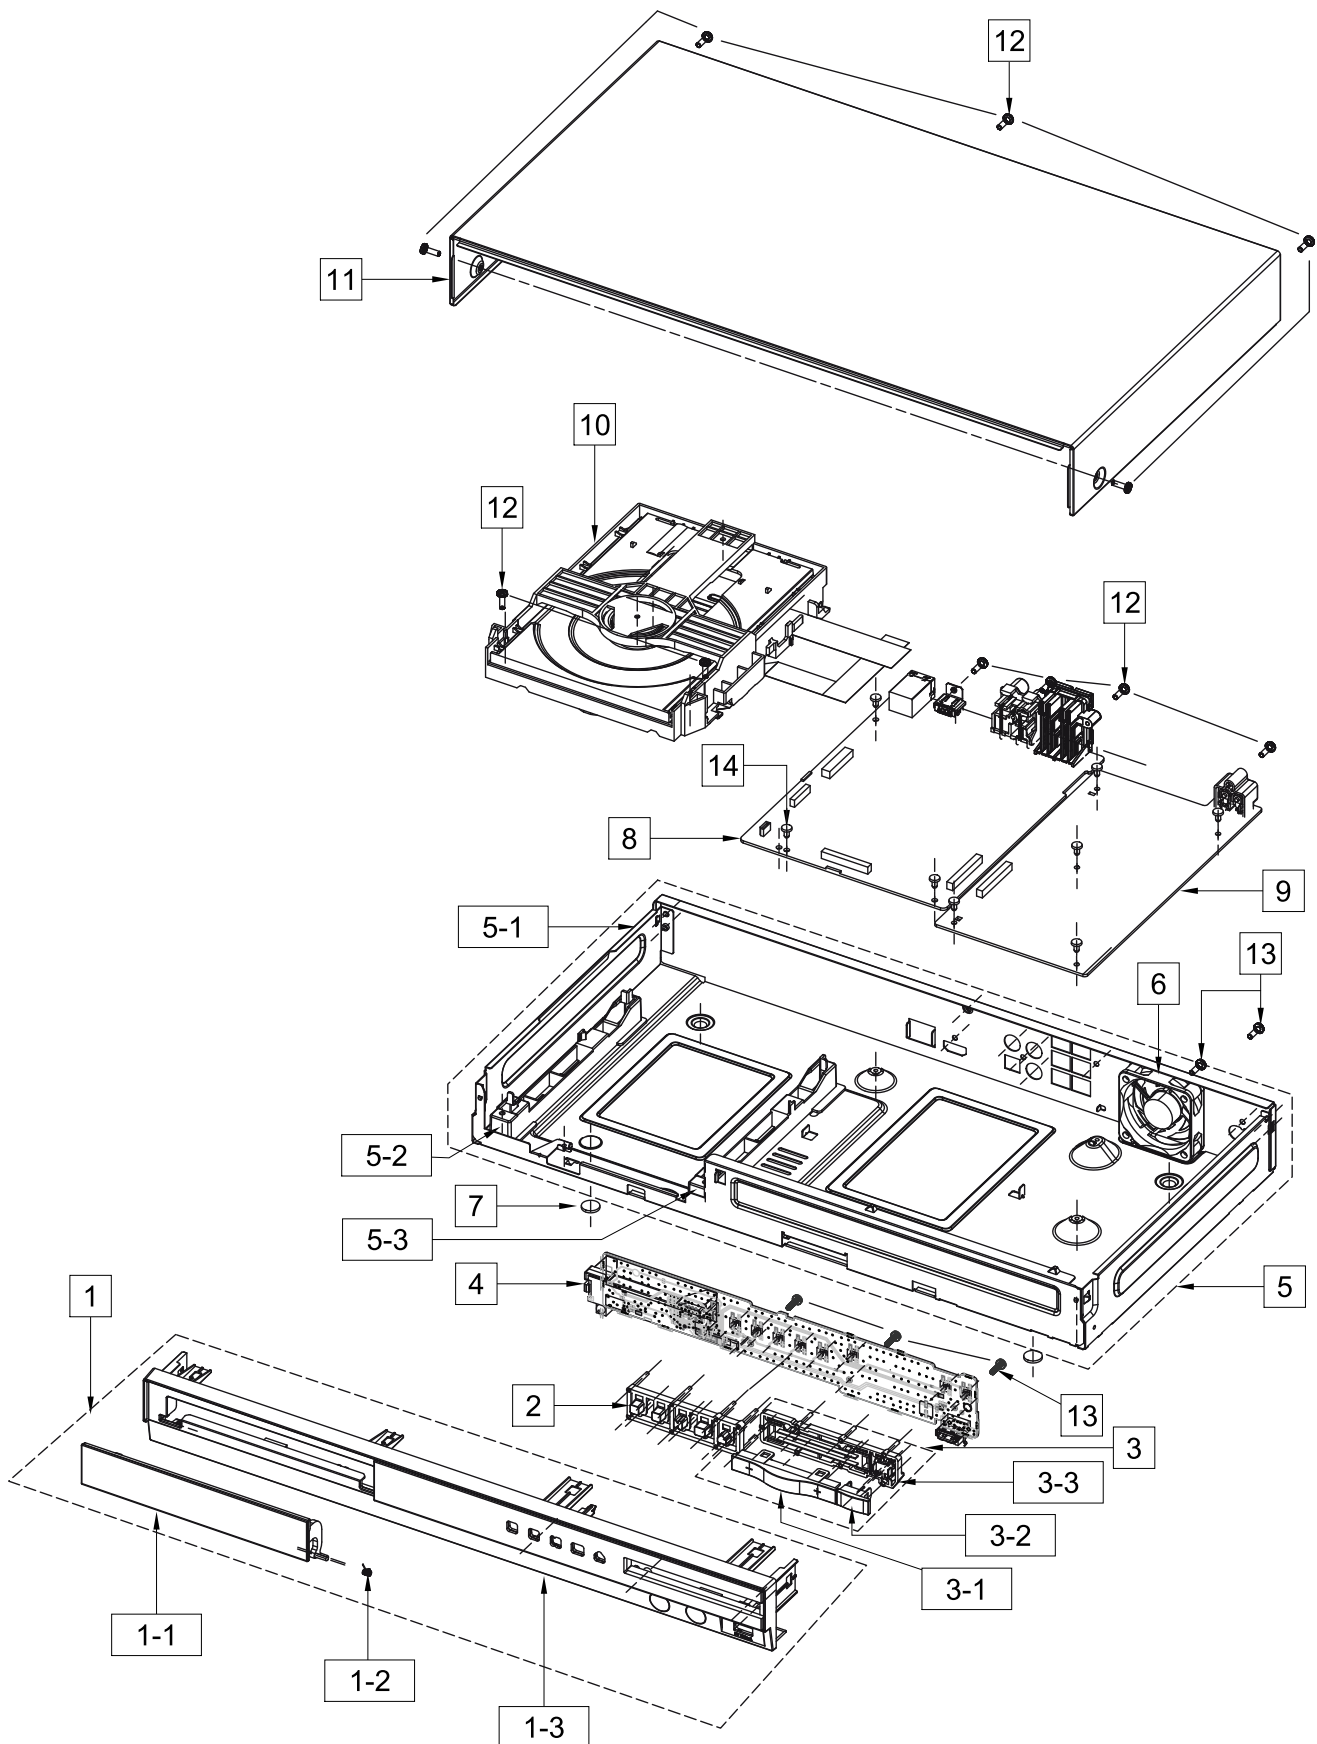

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	F001A	AH96-02277D	ASSY COVER P-FRONT; HT-F4500,PMMA+ABS,SF-	SA	1
1-1	3	AC227	AH63-02525B	COVER-DOOR; HT-E4500,ABS+PC	SA	1
1-2	3	C011	AK61-00137A	SPRING ETC-DOOR; DVD-R4000,COIL,PI0.45,DV	SA	1
1-3	3	F001	AH63-02591C	COVER-FRONT; HT-E4500,ABS+PMMA,5.1CH,NO-K	SNA	1
2	3	FBU04	AH64-05543A	BUTTON-FUNCTION; HT-E4500,ABS,NTR	SNA	1
3	3	FB01A	AH96-01653A	ASSY COVER P-BUTTON; HT-E4500	SA	1
3-1	4	FBU05	AH64-05538A	BUTTON-VOLUME; HT-E5500,ABS,BLK	SNA	1
3-2	4	FBU13	AH64-05527A	BUTTON-POWER; HT-E5500,ABS,NTR	SNA	1
3-3	4		AH61-03360A	HOLDER-BUTTON; HT-E4500,ABS	SNA	1
4	3	MF01A	AH94-03048B	ASSY PCB FRONT; HT-F4500,BD HOME THEATER,	SA	1
5	2	B001A	AH96-02281A	ASSY COVER P-BOTTOM; HT-F4500,ZA,BHF4	SNA	1
5-1	3	RB01	AH63-03058A	COVER-BOTTOM; HT-F4500,EGI-SECC,T0.6	SNA	1
5-2	3		AH61-03564A	HOLDER-DECK L; HT-F4500,ABS,BLACK,HF-0680	SNA	1
5-3	3		AH61-03565A	HOLDER-DECK R; HT-F4500,ABS,BLACK,HF-0680	SNA	1
6	3	EF01	AH31-00066A	FAN; G5015M12D1+6-ES-OC-0788,PBTP,wire 13	SA	1
7	3		AK67-00175A	RUBBER-FOOT; BD-E5400,Silicon,11pi,T2.8,R	SNA	2
8	2	M0014	AH94-03047B	ASSY PCB MAIN; HT-F4500,BD HOME THEATER,Z	SA	1
9	2	P001A	AH44-00296A	DC VSS-AV HTS SMPS; V170S_DPN,V170S_DPN,A	SA	1
10	2	DECK	AH96-01628F	ASSY DECK P-HTS PLAYER; BD-P8S,F4500,2OL(	SA	1
11	2	T001	AH63-02593B	COVER-TOP; HT-F4500,EGI-SECC	SA	1
12	2	SCREW	6003-000282	SCREW-TAPTYPE; BH,+,-,B,M3,L8,ZPC(BLK),SW	SA	11
13	5	SCREW	6003-000275	SCREW-TAPTYPE; BH,+,-,B,M3,L10,ZPC(BLK),SWR	SA	5
14	2	SCREW	6003-001561	SCREW-TAPTYPE; BH,+,-,B,M3,L6,ZPC(WHT),SW	SA	8

2. Speaker System

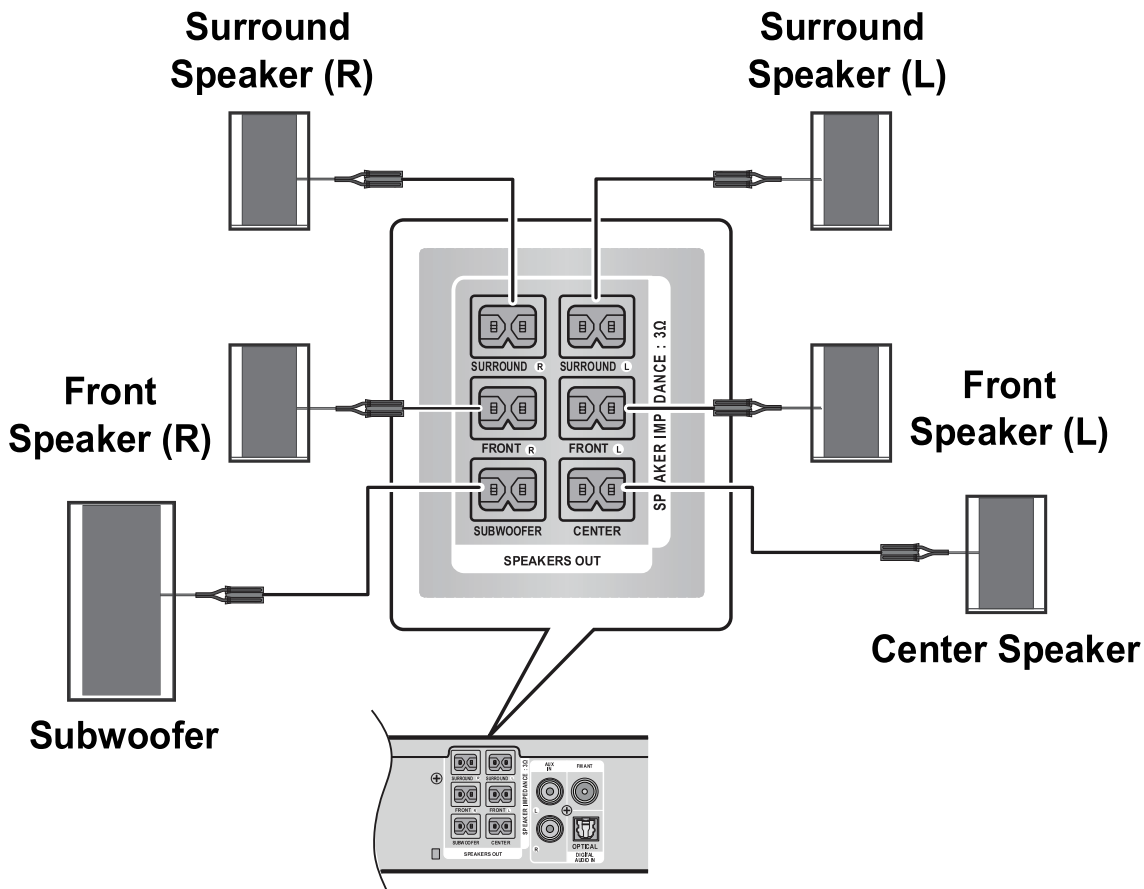

Parts List

Loc. No.	Part No.	Description;Specification	Qty.	SNA
Front Speaker (L)	AH82-00587A	A/S ASSY-SATELLITE FRONT LEFT; PS-FS1-1,ALL,Front Left,3ohm	1	SA
Front Speaker (R)	AH82-00588A	A/S ASSY-SATELLITE FRONT RIGHT; PS-FS1-1,ALL,Front Right,3ohm	1	SA
Surround Speaker (L)	AH82-00589A	A/S ASSY-SATELLITE(FS1-1) SURROUND LEFT; FS1-1,WITH LABEL/BAG,SURROUND LEFT,3ohm	1	SA
Surround Speaker (R)	AH82-00590A	A/S ASSY-SATELLITE(FS1-1) SURROUND RIGHT; FS1-1,WITH LABEL/BAG,SURROUND RIGHT,3ohm	1	SA
Center Speaker	AH82-00591A	A/S ASSY-SATELLITE CENTER; PS-FS1-1,ALL,CENTER,3ohm	1	SA
Subwoofer	AH96-02361A	ASSY SPEAKER P-SUBWOOFER; 3ohm,HT-F4xxx,FW1-1,World Wide,Subwoofer	1	SA
Front Speaker Cable (L)	AH81-07798A	SPEAKER-CABLE; AV SPK,Front Left,White Plug,3M,#24	1	SA
Front Speaker Cable (R)	AH81-07799A	SPEAKER-CABLE; AV SPK,Front Right,Red Plug,3M,#24	1	SA
Surround Speaker Cable (L)	AH81-07800A	SPEAKER-CABLE; AV SPK,Surround Left,Blue Plug,7M,#24	1	SA

Loc. No.	Part No.	Description;Specification	Qty.	SNA
Surround Speaker Cable (R)	AH81-07801A	SPEAKER-CABLE; AV SPK,Surround Right,Gray Plug,7M,#24	1	SA
Subwoofer Speaker Cable	AH81-07802A	SPEAKER-CABLE; AV SPK,Subwoofer,Purple,4M,#20	1	SA
Center Speaker Cable	AH81-07804A	SPEAKER-CABLE; AV SPK,Center,Green,3M,#20	1	SA

3. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			HT-F4500/ZF (JG01)		
1		AH90-00913E	ASSY DECK-HTS PLAYER;BD-P8S,F4500,SEC pi	1	SNA
..2	DECK	AH96-01628F	ASSY DECK P-HTS PLAYER;BD-P8S,F4500,2OL(	1	SA
..3		6002-001086	SCREW-TAPPING;PH,+,B,M1.7,L5,ZPC(WHT),SW	1	SA
..3	SCREW	6003-001795	SCREW-TAPTYPE;PWH,B,M2,L6,ZPC(WHT),SWCH1	4	SNA
..3		AK96-01944A	ASSY DECK P-HINGE PU;BD-P8	1	SNA
...4	ES09	AK61-01148A	SPRING ETC-HINGE PU;BD-P7,STAINLESS-ST53	1	SNA
...4	DH03	AK61-01244A	HINGE-PU;POM	1	SNA
..3		AK96-01945G	ASSY DECK P-HOUSING;BD-P8S	1	SNA
...4		6001-001370	SCREW-MACHINE;CH,+,M1.7,L3,ZPC(WHT),SWRC	1	SA
...4	DB02	6602-001076	BELT-RECTANGULAR;CR,T1.2,4.3%,1.2X25.1,B	1	SNA
...4	SNA	AK31-00043C	MOTOR DC-LOADING;JQ24-35H440,5000,0.392,	1	SNA
...4	CF02	AK61-01246B	FRAME-MAIN;BD-P8S,ABS,Black	1	SNA
...4	DS02	AK61-01247A	SLIDER-CAM;BD-P8,POM	1	SNA
...4	FT01	AK63-00873A	TRAY-DISC;BD-P8,ABS	1	SNA
...4	CC03	AK64-02550A	CHASSIS-SUB;BD-P8,ABS	1	SNA
...4	SNA	AK66-00167A	PULLEY-MOTOR;BD-P6,POM K700,BLK	1	SNA
...4	DG06	AK66-00254A	GEAR-PULLEY;BD-P8,POM,NTR	1	SNA
...4	DG08	AK66-00255A	GEAR-TRAY;BD-P8,POM,NTR	1	SNA
...4		AK68-02240A	LABEL CAUTION-WARNING;BD-P8,ART PAPER,0.	1	SNA
...4		AK90-00205A	ASSY MISC-CLAMPER;BD-P8,DYCPN	1	SNA
....5		AK61-01245A	MAGNET-CLAMPER;BD-P8,SPCC	1	SNA
....5		AK62-00049A	YOKE-CLAMPER;BD-P8,SPCC	1	SNA
....5		AK65-00003A	CLAMPER HOSE;BD-P8,ABS,WHITE	1	SNA
...4		AK96-01821A	ASSY PCB P-DECK;BD-P8	1	SNA
....5		3409-001723	SWITCH-LEVER;30,200,5,36deg	1	SNA
....5		3708-001878	CONNECTOR-FPC/FFC/PIC;6P,1mm,SMD-A,SnPb,	1	SA
....5		AK41-01103A	PCB-MOTOR;BD-P8,PHENOL,1mm,1	1	SNA
...4		AK96-02044G	ASSY CABLE P-DECK;BD-P8S,A,Lb00178,251,1	1	SNA
..3		AK96-01946E	ASSY DECK P-TRAVERSE;BD-P8S,F5100	1	SNA
...4		6001-001291	SCREW-MACHINE;CH,+,M1.7,L4,ZPC(BLK),SWRC	2	SA
...4	SCREW	6003-000109	SCREW-TAPTYPE;BH,+,B,M2.6,L8,ZPC(BLK),SW	1	SA
...4	SCREW	6003-001444	SCREW-TAPTYPE;BH,+,B,M2,L4,ZPC(BLK)	3	SNA
...4	SNA	AK31-00058A	MOTOR STEP-FEED;BD-P8	1	SNA
...4		AK31-00059A	MOTOR BLDC-SPINDLE;6000,BD-P8,6000	1	SNA
...4	SNA	AK61-01253A	BRACKET-DECK;BD-P8,ABS	1	SNA
...4	S.N.A	AK66-00050A	SHAFT-PU L98;BD-P,SUS420J2,L98,OD3,NTR,M	1	SNA
...4		AK73-00092A	RUBBER-DAMPER;BD-P7,BUTYL	4	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		AK96-02044E	ASSY CABLE P-PICKUP;BD-P8S,A,KA00203,209	1	SNA
...3		AK96-02051A	ASSY PICK UP P;SOH-BP9	1	SNA
...4		0201-000169	ADHESIVE-CYA;ARCN-A501F,NTR	0	SNA
...4		0201-001081	ADHESIVE-AA;1401C,RED,-,BOND-LOCK SCREW	0	SNA
...4		0201-001525	ADHESIVE-UV;8840L,YEL,TRANS,23000,DISCMA	0	SNA
...4		0201-001819	ADHESIVE-UV;8833M,YELLOW,21000mPa.s,89%(H	0	SNA
...4		0201-002088	ADHESIVE-UV;IM127S,YEL,13000mPa.s,1mmt,	0	SNA
...4		AK63-00874A	COVER-ACT;SOH-BP8,STAINLESS-ST304,0.2T,	1	SNA
...4		AK67-00050A	LENS-OL DVD CD;SOH-BP1,PLASTIC,NTR,PI3.8	1	SNA
...4		AK67-00099A	LENS-BD OL;VS3504/VDP10V4,PLASTIC,NTR,Pi	1	SNA
...4		AK68-01760A	LABEL-STICKER;SOH-BP5,0.1,10,15,WHITE	1	SNA
...4		AK96-02036A	ASSY PICK UP P-ACT;SOH-BP8VE	1	SNA
....5		0201-001081	ADHESIVE-AA;1401C,RED,-,BOND-LOCK SCREW	0	SNA
....5		0201-001230	ADHESIVE-CYA;LOCTITE 480,BLK,300,-	0	SNA
....5		0201-001537	ADHESIVE-UV;SDM-378,WHT,11000mPa.s,-	0	SNA
....5		0201-001793	ADHESIVE-UV;8791L3,WHITE,20000mPa.s	0	SNA
....5		3302-001884	MAGNET-RARE EARTH;48MGOe,9x6.1x1.4mm	2	SNA
....5		3812-001419	WIRE-NO SHEATH CU;SCW,0V,18mm,1/0.11mm,S	4	SNA
....5		3812-001456	WIRE-NO SHEATH CU;SCM,18mm,YELLOW	2	SNA
....5		6001-001291	SCREW-MACHINE;CH,+,-,M1.7,L4,ZPC(BLK),SWRC	2	SA
....5	M0114	AK61-00969A	HOLDER-WIRE;SOH-BP6,PPS,13.8,8.65,BLACK	1	SNA
....5	SNA	AK62-00050A	YOKE-ACT;SOH-BP8,SPCC,1.2t,16.8,29.0,whi	1	SNA
....5		AK96-01184A	ASSY PICK UP P-BLADE;SOH-BP6	1	SNA
....6	SNA	AK66-00163A	BLADE-ACT;SOH-BP6,E5006L,BEIGE	1	SNA
...4		AK96-02052A	ASSY PICK UP P-OPT;SOH-BP9	1	SNA
....5		0201-001525	ADHESIVE-UV;8840L,YEL,TRANS,23000,DISCMA	0	SNA
....5		0201-001819	ADHESIVE-UV;8833M,YELLOW,21000mPa.s,89%(H	0	SNA
....5		0201-002088	ADHESIVE-UV;IM127S,YEL,13000mPa.s,1mmt,	0	SNA
....5		0205-001226	GREASE;FLOIL KG-513,WHT,1KG	0	SNA
....5		0602-001182	DIODE-LASER;6mW,2V,655nm,TP	1	SNA
....5		0602-001208	DIODE-LASER;25mW,2V,405nm,TR	1	SNA
....5		6001-000805	SCREW-MACHINE;CH,+,-,M1.7,L3,NI PLT,SWRC	3	SNA
....5		AK31-00048A	MOTOR STEP-CLD;SOH-BP7,3V,25~35,3V,-10 ~	1	SNA
....5		AK61-00742A	SPRING ETC-DVD GT;SOH-DR4,Cu,2.8,5.6,5.6	1	SNA
....5		AK61-00830A	HOLDER-GT BD;SOH-BP4,Zn,T1.85,D5.6,GRY	1	SNA
....5		AK61-00874A	SPRING ETC-PBS BD;SOH-BP5,SUS,0.15,SILBE	1	SNA
....5	ES02	AK61-00974A	SPRING ETC-DVD LD;SOH-SBP2,SUS301,3.7,0.	1	SA
....5		AK61-01061A	HOLDER-CL;SOH-BP7,PPS(FZ-3805 S2),27.0,1	1	SNA
....5		AK61-01073A	SPRING ETC-PBS DVD;SOH-BP7,SUS 304 0.15t	1	SNA
....5		AK61-01075A	SPRING ETC-DVD HOLDER;SOH-BP7,SUS 304,11	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		AK61-01217A	SPRING ETC-CLD;BP7,sus304,0.10,1.5,1.7,1	1	SNA
....5		AK61-01271A	BASE-PICK UP;SOH-BP8VE,PPS(FZ-3805 S2),B	1	SNA
....5		AK61-01272A	HOLDER-LD/GT;SOH-BP8VE,Zn,6,8.6,GRAY	1	SNA
....5		AK61-01273A	HOLDER-LD BD;SOH-BP8VE,Zn,4.1,14.7,GRAY	1	SNA
....5	SNA	AK63-00717A	COVER-BASE;SOH-BP7,STAINLESS-ST304,0.2t	1	SNA
....5		AK66-00202A	SHAFT-MAIN CLD;SOH-BP7,SUS304,25,1.2,SIL	1	SNA
....5		AK67-00044A	LENS-CL DVD;SOH-BP1,PLASTIC,NTR,PI5.2,1.	1	SNA
....5		AK67-00094A	LENS-BD GT;Grating,LENS,B270,None,3.0*2.	1	SNA
....5		AK67-00095A	LENS-PBS BD;SOH-BP5,GLASS,WHITE,6.2*5.0	1	SNA
....5		AK67-00110A	LENS-BD QWP;BD QWP,PLASTIC,WHITE,4.0*4.0	1	SNA
....5		AK67-00132A	LENS-DVD MR;BDP7 DVD MR,LENS,B270,WHITE,	1	SNA
....5		AK67-00134A	LENS-BD CL;BDP7 BD CL,Z340R,WHITE,4.4*5.	1	SNA
....5		AK67-00135A	LENS-BD ASL;BDP7 BD ASL,Z340R,WHITE,Pi 2	1	SNA
....5		AK67-00159A	LENS-BD MRR;BDP7 BD MRR,LENS,B270,WHITE,	1	SNA
....5		AK67-00165A	LENS-DVD PBS;BDP8VE DVD PBS,GLASS B270,C	1	SNA
....5		AK67-00166A	LENS-DVD PLATE;BDP8VE DVD PLATE,GLASS B2	1	SNA
....5		AK96-02026A	ASSY PICK UP P-PCB;SOH-BP8 3.0	1	SNA
.....6		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,25-36um,S	0	SNA
.....6		0603-001257	PHOTO-RECEIVER;6V,650nm	1	SNA
.....6		0603-001259	PHOTO-RECEIVER;5.7V,405nm	1	SNA
.....6		1404-001328	THERMISTOR-NTC;10Kohm,0A,3370K,0mW/C,0uF	1	SNA
.....6		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA
.....6		2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	SA
.....6		2007-003013	R-CHIP;2.4Kohm,5%,1/16W,TP,1005	1	SNA
.....6		2104-001087	VR-SMD;2.2Kohm,25%,0.15W,TOP	2	SNA
.....6		2104-001125	VR-SMD;1KOHM,25%,1/10W,TOP	1	SNA
.....6	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	3	SA
.....6	AD480	2203-006399	C-CER,CHIP;1000nF,10%,6.3V,X5R,TP,1005	4	SA
.....6		3301-001808	BEAD-SMD;120ohm,1005,TP,530ohm/390MHz,12	4	SA
.....6		3708-002203	CONNECTOR-FPC/FFC/PIC;40P,0.5mm,SMD-A,AU	1	SA
.....6		AK41-01107A	FPC-BD;BDP8-BD,1.0,POLYIMDE,20,0.075	1	SNA
.....6		AK41-01108A	FPC-DVD;BDP8-DVD,1.0,POLYIMDE,20,0.075	1	SNA
.....6		AK41-01109A	FPC-ACT;BDP8-ACT,1.0,POLYIMDE,6,0.075	1	SNA
.....6		AK41-01150A	PCB MAIN;BDP8-Main 3.0,FR-4,2,3.0,0.75T,	1	SNA
.....6		AK61-01248A	PLATE-PD BD;SOH-BP8,SPCC,2.15t,13,7.0,SI	1	SNA
.....6		AK61-01249A	PLATE-PD DVD;SOH-BP8,SPCC,1.65t,11.8,6.5	1	SNA
1		AH90-01031D	ASSY COVER FRONT;HT-F4500,BHF4	1	SNA
.2	F001A	AH96-02277D	ASSY COVER P-FRONT;HT-F4500,PMMA+ABS,SF-	1	SA
..3	SCREW	6003-000275	SCREW-TAPTYPE;BH,+,B,M3,L10,ZPC(BLK),SWR	3	SA
..3	AF020	AH63-02257C	FILTER-VFD;HT-F5500/6500,PC,T0,5,VIOLET,	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3	AC227	AH63-02525B	COVER-DOOR;HT-E4500,ABS+PC	1	SA
...4		0103-005096	RESIN-ABS PMMA;HAM 8560,98055,2.0mm HB	18	SNA
...3	F001	AH63-02591C	COVER-FRONT;HT-E4500,ABS+PMMA,5.1CH,NO-K	1	SNA
...4		0103-007790	RESIN-ABS PMMA;SF-0505EH,G01153,BK0041,1	110	SNA
...3		AH63-02718A	SHEET-PROTECTION-FRONT;HT-E4500,PET,0.04	1	SNA
...3	FBU04	AH64-05543A	BUTTON-FUNCTION;HT-E4500,ABS,NTR	1	SNA
...4		0103-004609	RESIN-ABS;HF-0680U,K21294,BK0007,1.5mm H	7	SNA
...3	MF01A	AH94-03048B	ASSY PCB FRONT;HT-F4500,BD HOME THEATER,	1	SA
...4		0202-001463	SOLDER-WIRE;LFC2-W3.0,-,D3,99.79Sn/0.2Cu	0	SNA
...4		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
...4		0204-002420	SOLVENT;1M-1000,C3H70H,96	0	SNA
...4		0204-002607	FLUX;DF-234U,13%,14KG,Gravity 0.82	1	SNA
...4		0609-001202	MODULE REMOCON;HORIZONTAL,12.4mm,TR	1	SA
...4		3722-002313	JACK-USB;4P/1C,AU30U,BLK,STRAIGHT,A TYPE	1	SA
...4	AH410	AH61-03566A	HOLDER-VFD;HT-F4500,ABS,K21294,HB,HF-068	1	SNA
...4		AH97-11420A	ASSY SMD;BD HOME THEATER,ZA,4,AH94-03048	1	SNA
....5		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,25-36um,S	0	SNA
....5		0403-001339	DIODE-ZENER;UDZS6.2B,6.06-6.33V,200mW,SO	1	SA
....5		0403-001411	DIODE-ZENER;5.49-5.73V,200mW,SOD-323,TP	1	SA
....5		0406-001395	DIODE-TVS;AOZ8802ADI,6/-/-V,DFN-6	1	SA
....5		1405-001306	VARISTOR;11Vdc,45A,0603,TP,50V	2	SA
....5		2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	2	SNA
....5		2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	3	SA
....5		2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SNA
....5		2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	1	SNA
....5		2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA
....5		2007-000088	R-CHIP;7.5Kohm,5%,1/10W,TP,1608	1	SNA
....5		2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA
....5		2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	1	SA
....5		2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA
....5		2007-000100	R-CHIP;68Kohm,5%,1/10W,TP,1608	1	SA
....5		2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608	1	SA
....5		2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	1	SA
....5		2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	2	SA
....5	AD480	2203-002050	C-CER,CHIP;47nF,10%,50V,X7R,TP,1608	1	SA
....5	AD480	2203-005005	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	4	SC
....5	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	3	SA
....5	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	4	SA
....5		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	4	SNA
....5		3404-001401	SWITCH-TACT;12VDC,50mA,250gf,6.2X6.2mm,1	8	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		3708-001767	CONNECTOR-FPC/FFC/PIC;20P,1mm,SMD-S,SN,N	1	SA
....5		AH41-01609A	PCB-FRONT;HT-F4500,CEM-3,2,1.6T,285 x 14	1	SNA
..3	FB01A	AH96-01653A	ASSY COVER P-BUTTON;HT-E4500	1	SA
...4		AH61-03360A	HOLDER-BUTTON;HT-E4500,ABS	1	SNA
...4	FBU13	AH64-05527A	BUTTON-POWER;HT-E5500,ABS,NTR	1	SNA
...4	FBU05	AH64-05538A	BUTTON-VOLUME;HT-E5500,ABS,BLK	1	SNA
....5		0103-004609	RESIN-ABS;HF-0680U,K21294,BK0007,1.5mm H	5	SNA
..3	FL06	AH96-01933C	ASSY CABLE P;HT-F4500,FFC,120mm,20 P,1mm	1	SA
..3	C011	AK61-00137A	SPRING ETC-DOOR;DVD-R4000,COIL,PI0.45,DV	1	SA
..3		AK63-00838F	SHEET-PROTECTION DOOR;HT-E5500,PET,0.048	0	SNA
1		AH90-01035A	ASSY COVER BOTTOM;HT-F4500,ZA,BHF4	1	SNA
..2	B001A	AH96-02281A	ASSY COVER P-BOTTOM;HT-F4500,ZA,BHF4	1	SNA
..3	EF01	AH31-00066A	FAN;G5015M12D1+6-ES-OC-0788,PBTP,wire 13	1	SA
..3		AH61-03564A	HOLDER-DECK L;HT-F4500,ABS,BLACK,HF-0680	1	SNA
..3		AH61-03565A	HOLDER-DECK R;HT-F4500,ABS,BLACK,HF-0680	1	SNA
..3	RB01	AH63-03058A	COVER-BOTTOM;HT-F4500,EGI-SECC,T0.6	1	SNA
..3		AK67-00175A	RUBBER-FOOT;BD-E5400,Silicon,11pi,T2.8,R	2	SNA
1	M0017	AH91-00595D	ASSY CHASSIS;HT-F4500,EUROPE,BHF4	1	SNA
..2	M0014	AH94-03047B	ASSY PCB MAIN;HT-F4500,BD HOME THEATER,Z	1	SA
..3		0202-001463	SOLDER-WIRE;LFC2-W3.0,-,D3,99.79Sn/0.2Cu	3	SNA
..3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
..3		0204-002420	SOLVENT;1M-1000,C3H70H,96	0	SNA
..3		0204-002607	FLUX;DF-234U,13%,14KG,Gravity 0.82	2	SNA
..3		2401-003850	C-AL;1000UF,20%,50V,WT,TP,12.5 X 25,5	3	SA
..3		3710-002087	SOCKET-BOARD TO CABLE;23P,1R,1.25mm,STRA	1	SA
..3		3722-003266	JACK-MODULAR;8P/8C,Yes,ANGLE-DIP,W/O,AU,	1	SA
..3		AH27-00090A	COIL FILTER;9014W-01-7R0,7uH,16.2mohm,9.	6	SA
..3		AH62-00258F	HEAT SINK-ES;HT-F5500,A6063,BLACK,104.8*	1	SNA
..3		AH97-10359A	ASSY HDCP;HT-E4500,BD HOME THEATER,ZA,19	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00321C	KEY CODE-CERTIFI;HT-F4500,PACK, AV, MT85	1	SNA
..3		AH97-11008A	ASSY SMD;HT-F4500,BD HOME THEATER,ZF,195	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,25-36um,S	3	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4	DS01A	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	2	SA
...4		0404-001006	DIODE-SCHOTTKY;RB751V,40V,30mA,SOD-323,T	3	SA
...4		0404-001084	DIODE-SCHOTTKY;BAT54A,30V,200mA,SOT-23,T	1	SA
...4		0406-001203	DIODE-TVS;uClamp3301H,3.5/3.9/4.6V,40W,S	1	SA
...4		0406-001239	DIODE-TVS;RClamp0502B,6/-/V,125W,SOT-52	4	SA
...4		0406-001395	DIODE-TVS;AOZ8802ADI,6/-/V,DFN-6	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	2	SNA
...4		0501-000457	TR-SMALL SIGNAL;MMBT2222A/KST2222A,NPN,3	1	SA
...4		0501-000479	TR-SMALL SIGNAL;KST42,NPN,350mW,SOT-23,T	2	SA
...4		0504-000129	TR-DIGITAL;KSR1104,NPN,200mW,47K/47Kohm,	1	SA
...4		0504-000156	TR-DIGITAL;KSR2103,PNP,200MW,22K/22K,SOT	1	SA
...4		0505-001377	FET-SILICON;BSN20,N,50V,100mA,15ohm,0.83	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4		0505-002866	FET-SILICON;AO3416,1,20V,6.5A,18Mohm,1.4	2	SA
...4		1002-001582	IC-A/D CONVERTER;CS5346,24,LQFP,48P,7x7m	1	SNA
...4		1003-002494	IC-MOTOR DRIVER;TPIC2050,SOP,56Z30,14x6.	1	SA
...4		1105-002227	IC-DDR3 SDRAM;K4B1G1646G-BCK0,DDR3 SDRAM	1	SA
...4		1105-002442	IC-DDR3 SDRAM;K4B2G1646E-BCK0,DDR3 1600,	1	SNA
...4		1201-003514	IC-AUDIO AMP;TAS5614LADDVR,HTSSOP,44Z30,	3	SNA
...4		1203-006067	IC-POWER SUPERVISOR;TPS2553DBVR,SOT-23,6	2	SNA
...4		1203-006455	IC-DC/DC CONVERTER;TPS65251RHAR,QFN,40P,	1	SA
...4		1203-007107	IC-RESET;CAT853STBI-T3,SOT-23 3-Lead,3P,	2	SA
...4		1204-003322	IC-MODULATOR;TAS5538DGGR,TSSOP,56P,14x8.	1	SA
...4		1204-003345	IC-TUNER;SI4705-D60-GMR,QFN,20P,3x3mm,PL	1	SA
...4		1204-003424	IC-VIDEO DECODER;MT8560HBAG,BGA,389Z30,1	1	SA
...4		1205-003948	IC-RECEIVER;PI90LV02TEX,SOT23,5P,PLASTIC	1	SNA
...4		1405-001192	VARISTOR;12Vdc,30A,1.6x0.8x0.55mm,TP,50V	10	SA
...4		2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	5	SA
...4		2007-000057	R-CHIP;40.2Kohm,1%,1/10W,TP,1608	3	SA
...4		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	7	SA
...4		2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	3	SNA
...4		2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	12	SA
...4		2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	2	SA
...4		2007-000096	R-CHIP;30Kohm,5%,1/10W,TP,1608	3	SA
...4		2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	3	SA
...4		2007-000101	R-CHIP;82Kohm,5%,1/10W,TP,1608	1	SA
...4		2007-000103	R-CHIP;120Kohm,5%,1/10W,TP,1608	2	SA
...4		2007-000108	R-CHIP;510Kohm,5%,1/10W,TP,1608	1	SA
...4		2007-000115	R-CHIP;82ohm,5%,1/10W,TP,1608	2	SA
...4		2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	3	SA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	34	SA
...4		2007-000139	R-CHIP;220ohm,5%,1/16W,TP,1005	2	SA
...4		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	7	SA
...4		2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	2	SA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	16	SA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	32	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	3	SA
...4		2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	5	SNA
...4		2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	10	SA
...4		2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	4	SA
...4		2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	3	SA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	13	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000242	R-CHIP;1.5Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000253	R-CHIP;1.5ohm,5%,1/4W,TP,3216	1	SA
...4		2007-000310	R-CHIP;10ohm,5%,1/2,TP,5025	1	SNA
...4		2007-000455	R-CHIP;18Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	2	SA
...4		2007-000614	R-CHIP;24Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	2	SNA
...4		2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	18	SNA
...4		2007-000708	R-CHIP;3.9Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000772	R-CHIP;33Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	14	SNA
...4		2007-000910	R-CHIP;43Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000929	R-CHIP;470ohm,1%,1/10W,TP,1608	2	SNA
...4		2007-000962	R-CHIP;5.1Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001007	R-CHIP;51Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-001038	R-CHIP;56Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-001139	R-CHIP;7.5Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001284	R-CHIP;4.7ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	20	SA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	2	SA
...4		2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-002797	R-CHIP;560ohm,5%,1/16W,TP,1005	1	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	11	SA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007431	R-CHIP;91Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007834	R-CHIP;16.5Kohm,1%,1/10W,TP,1608	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007981	R-CHIP;180Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008137	R-CHIP;24Kohm,1%,1/16W,TP,1005	1	SNA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	3	SNA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	12	SA
...4		2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	SA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	8	SA
...4	AD480	2203-000254	C-CER,CHIP;10nF,10%,16V,X7R,TP,1005	2	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	5	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	14	SA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	2	SA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	4	SNA
...4	AD480	2203-000643	C-CER,CHIP;0.024nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000715	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1608	12	SA
...4	AD480	2203-000726	C-CER,CHIP;3.9nF,10%,50V,X7R,TP,1608	2	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	11	SA
...4	AD480	2203-000975	C-CER,CHIP;47nF,10%,25V,X7R,TP,1608	5	SNA
...4	AD480	2203-001239	C-CER,CHIP;0.082nF,5%,50V,NP0,TP,1005	1	SNA
...4	AD480	2203-001634	C-CER,CHIP;33nF,10%,50V,X7R,TP,1608	12	SNA
...4	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	7	SA
...4	AD480	2203-002982	C-CER,CHIP;6.8nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-003039	C-CER,CHIP;0.008nF,0.25pF,50V,C0G,TP,100	2	SA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	34	SA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	10	SNA
...4	AD480	2203-006005	C-CER,CHIP;10nF,10%,100V,X7R,TP,1608	12	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	27	SA
...4	AD480	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1608,0.	2	SNA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	58	SA
...4	AD480	2203-006170	C-CER,CHIP;220nF,10%,16V,X7R,TP,1608	1	SA
...4	AD480	2203-006320	C-CER,CHIP;2200nF,10%,16V,X7R,TP,2012	2	SNA
...4	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	1	SA
...4	AD480	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	35	SC
...4	AD480	2203-006399	C-CER,CHIP;1000nF,10%,6.3V,X5R,TP,1005	4	SA
...4	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	7	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	3	SA
...4	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,0.	8	SNA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608,-	5	SNA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005	1	SA
...4	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005	1	SNA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	12	SA
...4	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	12	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-006977	C-CER,CHIP;47000nF,10%,16V,X5R,TP,3225	2	SA
...4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	12	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	3	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608,	5	SA
...4	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	27	SNA
...4	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	24	SA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005	3	SA
...4		2402-000204	C-AL,SMD;10UF,20%,16V,WT,TP,4.3X4.3X5.4	2	SA
...4		2402-001184	C-AL,SMD;47UF,20%,16V,WT,TP,6.6X6.6X6MM	1	SA
...4		2402-001185	C-AL,SMD;2.2UF,20%,50V,WT,TP,4.3X4.3X6MM	1	SA
...4		2703-000166	INDUCTOR-SMD;2.7uH,5%,3225,1.1ohm,290mA,	1	SA
...4		2703-000175	INDUCTOR-SMD;270nH,10%,1608,.8Ohm,50mA,1	1	SA
...4		2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	1	SA
...4		2703-003930	INDUCTOR-SMD;4.7uH,20%,5050,0.072Ohm,245	2	SA
...4		2801-003856	CRYSTAL-SMD;0.032768MHz,20ppm,28-ACP,7pF	1	SA
...4		2801-004284	CRYSTAL-SMD;27MHz,10ppm,28-AAN,20pF,30oh	1	SA
...4		2801-004371	CRYSTAL-SMD;12.288MHz,50ppm,SX-1,18pF,50	1	SNA
...4		2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	2	SA
...4		3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz,-	33	SA
...4		3301-001808	BEAD-SMD;120ohm,1005,TP,530ohm/390MHz,12	4	SA
...4		3701-001792	CONNECTOR-HDMI;19P,2ROW,FEMALE,ANGLE,AU	1	SA
...4		3708-001767	CONNECTOR-FPC/FFC/PIC;20P,1mm,SMD-S,SN,N	1	SA
...4		3708-001837	CONNECTOR-FPC/FFC/PIC;15P,1mm,SMD-S,SN,N	1	SA
...4		3708-001925	CONNECTOR-FPC/FFC/PIC;7p,1mm,SMD-S,SnPd,	1	SNA
...4		3708-002908	CONNECTOR-FPC/FFC/PIC;40P,0.5mm,SMD-S,0.	1	SA
...4	EH01	3711-006043	HEADER-BOARD TO CABLE;BOX,4P,1R,2mm,SMD-	2	SA
...4		AH41-01605A	PCB MAIN;HT-F4500,FR-4,4,00,1.6T,195x142	1	SNA
...4		AH97-10998A	ASSY MICOM-NAND FLASH;HTB-F4500WWB-1003.	1	SNA
....5		1107-002048	IC-NAND FLASH;MT29F2G08ABAEAWP:E,2Gbit,2	1	SNA
...4		AH97-10999A	ASSY MICOM-MAIN MICOM;HTB-F4500WWM-1004.	1	SNA
....5		0903-001848	IC-MICROCONTROLLER;R5F100PGAFB,LQFP,100Z	1	SNA
..3		BN62-00099A	HEAT SINK-ES;LH46LBTLCB/ZA,A6063,20*20*1	1	SNA
1		AH91-00599A	ASSY SHIELD;HT-F4500,ZA,BHF4	1	SNA
.2	SCREW	6003-000282	SCREW-TAPTYPE;BH,+,-,B,M3,L8,ZPC(BLK),SW	11	SA
.2	SCREW	6003-001561	SCREW-TAPTYPE;BH,+,-,B,M3,L6,ZPC(WHT),SW	8	SA
.2	P001A	AH44-00296A	DC VSS-AV HTS SMPS;V170S_DPN,V170S_DPN,A	1	SA
.2	T001	AH63-02593B	COVER-TOP;HT-F4500,EGI-SECC	1	SA
1		AH92-04253C	ASSY LABEL;HT-F4500,4550,EUROPE,BHF4	1	SNA
.2		AH68-02580B	LABEL-01,POP STICKER;HT-F4500,ZF,SILVER*	1	SNA
.2		AK68-02233C	LABEL RATING;BD-E,XS,KR,RU,ZW,ART PAPER,	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
1	ACCE1	AH92-04280G	ASSY ACCESSORY;HT-F4500,ZF,BHF4	1	SNA
.2	T0268	3903-000525	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SA
.2	REMO2	AH59-02530A	REMOCON;TM1241,45,3.0V,HT-F4500/EU	1	SA
.2		AH96-02287G	ASSY ACCESSORY-MANUAL/CABLE;HT-F4500,ZF,	1	SNA
..3		4301-000116	BATTERY-ALKALINE;1.5V,R03,10.5x44.5mm,AA	2	SNA
..3	M0025	AH42-00021A	ANT FM T;T18011F-1,75 ohm,1800mm	1	SA
..3		AH63-02236A	SHEET-BAG;MM-C330,LDPE,0.05,260,370,NTR	1	SNA
..3		AH68-02574K	MANUAL USERS;HT-F4500,HT-F4550,ZF,FR/IT/	1	SNA
..3		AK68-01811H	LEAFLET-05,WARRANTY CARD;comm,Samsung,La	1	SNA
..3		BN68-04735A	LABEL-E,PASS;ALL MODEL,ART PAPER 90G,50,	1	SNA
.2		AH96-02306A	ASSY SPEAKER P-SATELLITE;HT-F4500,Satell	1	SNA
..3		AH69-03879A	CUSHION-SPEAKER;AV SPK, FS1-1/FS1-1/FS1-	2	SNA
..3		AH82-00593A	A/S ASSY-SPEAKER CABLE;27M,#24,ALL,BASIC	1	SNA
...4		AH81-07426A	SPEAKER-PE-BAG;PE-BAG,With 5.1ch Cable,1	1	SNA
.2	SW01A	AH96-02361A	ASSY SPEAKER P-SUBWOOFER;3ohm,HT-F4xxx,F	1	SA
..3		AH69-03859A	CUSHION-WOOFER;AV SPK, FW1,EPS,16.7g/l,H	2	SNA
..3		AH82-00703A	A/S ASSY-SUBWOOFER;PS-FW1-1,WW,Subwoofer	1	SNA
...4		AH81-07386A	SPEAKER-PE-BAG;PE-BAG,PE,560 x 580 x 0.5	1	SNA
...4		AH81-07853A	LABEL-SPEAKER LABEL;AV SPK,LABEL,PS-FW1-	1	SNA
...4		AH82-00704A	A/S ASSY-SUBWOOFER;PS-FW1,WW,BASIC,3ohm	1	SNA
....5		6002-001294	SCREW-TAPPING;BH,+,,M4,L16,ZPC(BLK)	4	SA
....5		AH59-02518A	SPEAKER SYSTEM-WOOFER;AV SPK,2000Hz,130m	1	SNA
....5		AH61-03619A	FRAME-ENCLOSURE;AV SPK, FW1-1, P1,PB,9T	1	SNA
....5	CC06	AH61-03621A	FRAME-FRONT;AV SPK, FW1-1, P1,PB,9T	1	SNA
....5		AH61-03623A	FRAME-REAR;AV SPK, FW1-1, P1,PB,9T	1	SNA
....5	F001	AH63-03116A	COVER-FRONT;AV SPK, FW1,ABS+PMMA,153.5,2	1	SNA
....5	ASP02	AH81-03376A	SPEAKER-DUCT FRAME;FRAME DUCT,FOR SUBWOO	1	SNA
....6		0103-004631	RESIN-HIPS;HF-1690H,K21294,BK0007,1.5mm	16	SNA
....5		AH81-05984A	SPEAKER-EPS RING;EPS RING,50*70*H10,W1 S	1	SNA
....5		AH81-07130A	SPEAKER-TERMINAL;TERMINAL,SUBWOOFER,DIA	1	SNA
....6		AH81-07947A	SPEAKER-TERMINAL;AV SPK,TERMINAL,40mm,	1	SNA
....6		AH81-07949A	SPEAKER-IN-WIRE;AV SPK,SPEAKER IN-WIRE,2	1	SNA
....5		AH81-07366A	SPEAKER-TRIANGLE BOARD;TRIANGLE BOARD,9t	4	SNA
....5		AH81-07371A	SPEAKER-EVA;AV SPK,Subwoofer,EVA,10 x 40	1	SNA
....5		AH81-07377A	BOND-WOOD;AV SPK,Wood Bond,Subwoofer,Com	9	SNA
....5		AH81-07378A	BOND-PVC;AV SPK,PVC Bond,Subwoofer,Commo	10	SNA
....5		AH81-07379A	BOND-HOT MELT;AV SPK,Hot Melt,Subwoofer,	7	SNA
....5		AH81-07515A	A/S PART-SPEAKER FOOT;FOOT_SW,SILICON,RO	4	SNA
....5		AH81-07965A	SPEAKER-PAPER DUCT;PS-FW1,PAPER Duct,PB,	1	SNA
1		AH92-04284C	ASSY BOX;HT-F4500,EUROPE,BHF4	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		AH68-01981M	LABEL-BOX;ALL MODEL,ALL BUYER,heat sensi	1	SNA
.2		AH68-02519A	LABEL-BD PRODUCT;HT-E5500/ZA,SEA,PAPER,W	1	SNA
.2		AH69-03910E	BOX-02,SET;HT-F4500/ZF,CB,A-01,DW2,WHT,W	1	SNA
1		AH92-04288A	ASSY P/MATERIAL;HT-F4500,BHF4	1	SNA
.2		AH69-03510A	CUSHION-01,SET;HT-E4500,EPS,16.7g/l	1	SNA
.2		AK63-00435B	SHEET-NITRON;BD-C5300/XAA,NITRON,0.5,630	1	SNA
.2	T0527	BH68-40364A	LABEL-SUMMARY;G52,G72,ART,100G,WHT,BLK,W	1	SNA
.2		BN63-08890E	COVER-SHEET NITRON;LE22D450,PE,T2.0,1100	1	SNA
.2		BN63-09096A	COVER-PALLET FOIL;32D550,PE,T0.03,2000,2	1	SNA
.2	T0527	BN68-00129A	LABEL SHIPPING-00;LABEL SHIPPING,ART-PAP	1	SNA
.2		BN69-00257P	PACKING-SHEET PALLET;-CB,PEP110/HD,-,12	1	SNA
.2		BN69-04045A	PAD PACKING-EDGE;CB,B800,W50x50,L2400,YE	1	SNA
.2		BN69-05184H	PALLET;HT-C350,450,550,5200,6200,WOOD,10	1	SNA
.2		BN69-05929A	WRAP STRETCH FILM;All,LDPE,0.0066,440,40	2	SNA
.2		BN74-00008E	TAPE-OPP MASKING;OPP,T0.05,W75,L400M,CLR	1	SNA
.2		BN81-02321A	BAG-AIR;LIGHT FLEX PLASTIK,PE WHITE,L120	1	SNA