


1. HT-J5500/ZF (JK03)


Exploded View

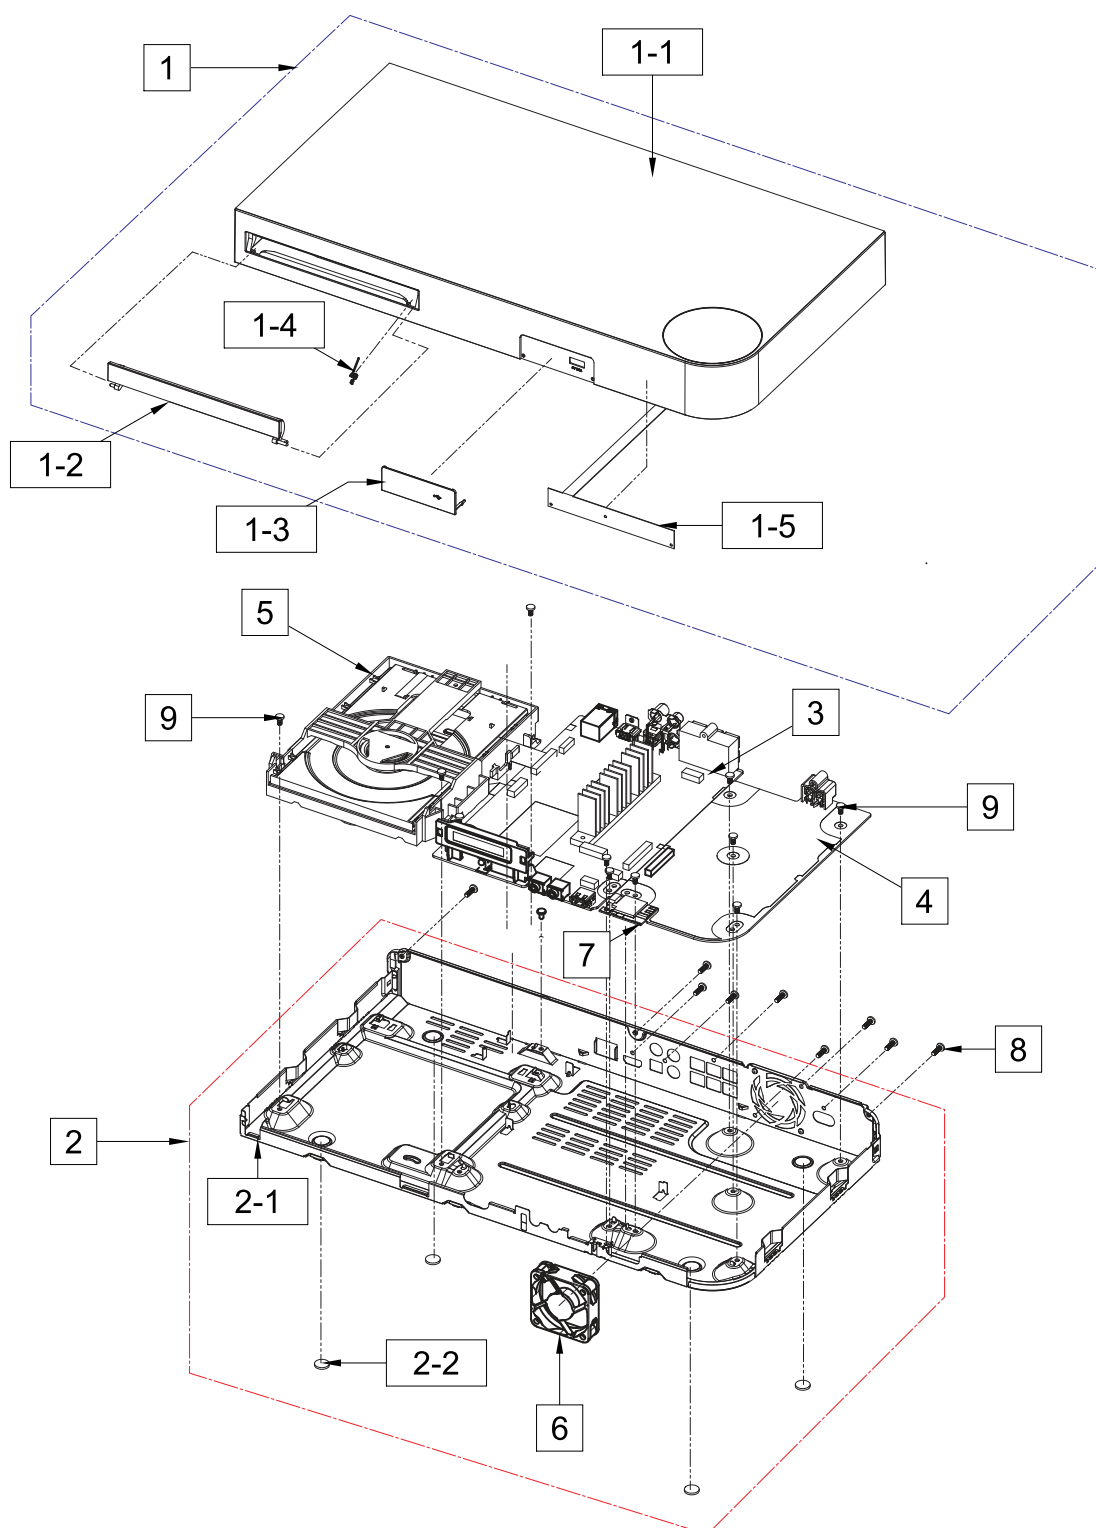

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	T001A	AH96-03898F	ASSY COVER P-TOP; HT-J4500	SA	1
1-1	3	T001	AH63-03457L	COVER-TOP; HT-J4500/J5500,ABS+PMMA,W/W,HB	SNA	1
1-2	3	AC227	AH63-03064A	COVER-DOOR; HT-F5500/6500,PC+ABS,V-0,BLAC	SC	1
1-3	3	FD12	AH63-03460A	COVER-USB; HT-H5500W,ABS+PMMA,V-0,VIOLET,	SNA	1
1-4	3	C011	AK61-00137A	SPRING ETC-DOOR; COMMON PART,COIL,SUS 304	SA	1
1-5	3		AH34-00028A	SWITCH MEMBRANE-TOUCH FILM; HT-F5500,HT-F	SA	1
2	2	B001A	AH96-02833A	ASSY COVER P-BOTTOM; HT-H4500,SECC,PRESS,	SNA	1
2-1	5	RB01	AH64-05010A	COVER-BOTTOM; PS-X725,HIPS,-,-,-,-,HB,N	SNA	1
2-2	3	FOOT	AK67-00175A	FOOT-RUBBER; BD-E5400,SILICONE,GRAY,T2.8	SA	4
3	2	M0014	AH94-03518F	ASSY PCB MAIN; HT-J5500,ZF	SA	1
4	2	P001A	AH44-00331A	DC VSS-POWER BOARD; V300S_FHS,AC/DC,300W,	SA	1
5	2	DECK	AK96-02203A	ASSY DECK P; BD-P8S,ASSY	SA	1
6	3	EF01	AH31-00067A	FAN-DC BRUSHLESS MOTOR; G5015M12D1+6-ES-O	SA	1
7	2	BT	AH96-02298A	NETWORK-BLUETOOTH; WIBT40D,18.0,28.5,5.4	SA	1
8	5	SCREW	6003-000275	SCREW-TAPTYPE; BH,+,B,M3,L10,ZPC(BLK),SWR	SA	9
9	2	SCREW	6003-001561	SCREW-TAPTYPE; BH,+,-,B,M3,L6,ZPC(WHT),SW	SA	10

2. Speaker System

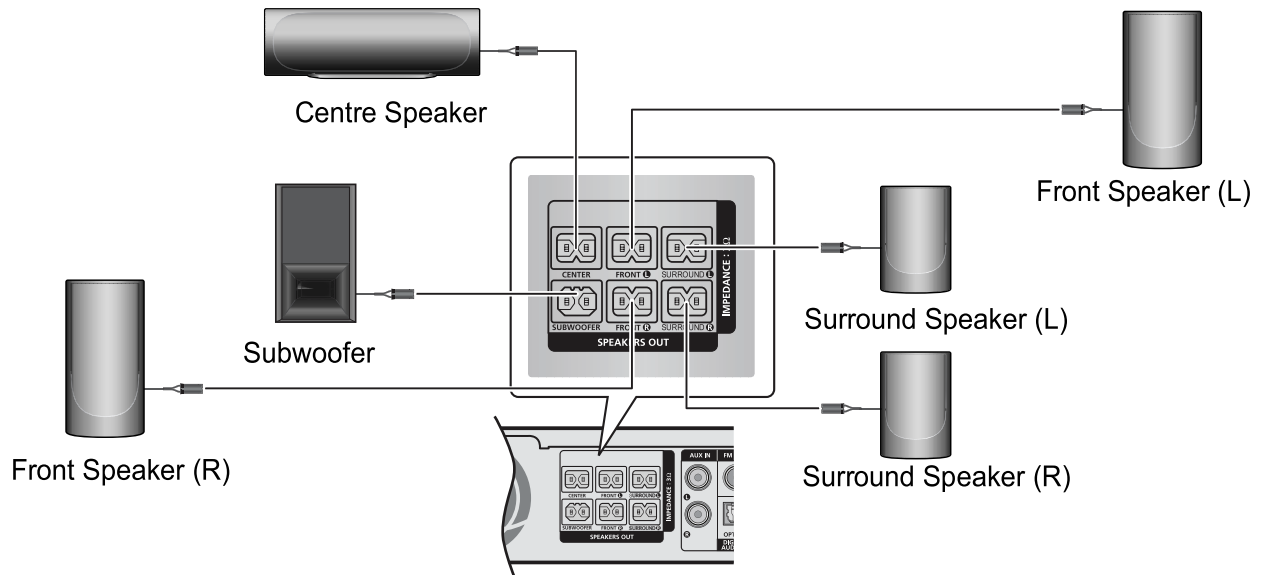

Parts List

Loc. No.	Part No.	Description;Specification	Qty.	SNA
Front Speaker (L)	AH82-01129A	A/S ASSY-JS2-1 FRONT LEFT SPK; JS2-1 SPK, 3ohm, FOR HT-J5500, FRONT LEFT, BASIC	1	SA
Front Speaker (R)	AH82-01132A	A/S ASSY-JS2-1 FRONT RIGHT SPK; JS2-1 SPK, 3ohm, FOR HT-J5500, FRONT RIGHT, BASIC	1	SA
Center Speaker	AH82-01137A	A/S ASSY-JC2-1 CENTER SPK; JC2-1 SPK, 3ohm, FOR ALL BASIC, CENTER	1	SA
Surround Speaker (L)	AH82-01136A	A/S ASSY-JS1-1 SURROUND LEFT SPK; JS1-1 SPK, 3ohm, FOR HT-J5500, HT-J5530, SURROUND LEFT, BASIC	1	SA
Surround Speaker (R)	AH82-01133A	A/S ASSY-JS1-1 SURROUND RIGHT SPK; JS1-1 SPK, 3ohm, FOR HT-J5500, HT-J5530, SURROUND RIGHT, BASIC	1	SA
Subwoofer	AH96-03644A	ASSY SPEAKER P-SUBWOOFER; 3ohm, 170W	1	SA
Front Speaker Cable (R)	AH81-05321A	SPEAKER-WIRE-FRONT RIGHT; PS-X725, 4M*2PIN CLEAR, RED CONNECTOR	1	SA
Front Speaker Cable (L)	AH81-05322A	SPEAKER-WIRE-FRONT LEFT; PS-X725, 4M*2PIN CLEAR, WHITE CONNECTOR	1	SA
Center Speaker Cable	AH81-05325A	SPEAKER-WIRE-CENTER; PS-X725, 3M*2PIN CLEAR, GREEN CONNECTOR	1	SA
Subwoofer Speaker Cable	AH81-08544A	SPEAKER-CABLE; AV SPK, AWG 24, 4M, Subwoofer, Changed Jack	1	SA

Loc. No.	Part No.	Description;Specification	Qty.	SNA
Surround Speaker Cable (R)	AH81-05323A	SPEAKER-WIRE-SURROUND RIGHT; PS-X725,10M*2PIN CLEAR,GRAY CONNECTOR	1	SA
Surround Speaker Cable (L)	AH81-05324A	SPEAKER-WIRE-SURROUND LEFT; PS-X725,10M*2PIN CLEAR,BLUE CONNECTOR	1	SA

3. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			HT-J5500/ZF (JK03)		
1		AH90-01129A	ASSY COVER BOTTOM;HT-H4500,BHH4	1	SNA
..2	B001A	AH96-02833A	ASSY COVER P-BOTTOM;HT-H4500,SECC,PRESS,	1	SNA
..3	SCREW	6003-000275	SCREW-TAPTYPE;BH,+,B,M3,L10,ZPC(BLK),SWR	2	SA
..3	EF01	AH31-00067A	FAN-DC BRUSHLESS MOTOR;G5015M12D1+6-ES-O	1	SA
..3	RB01	AH63-03458A	COVER-BOTTOM;HT-H5500,EGI-SECC,T0.5,NATU	1	SNA
..3	FOOT	AK67-00175A	FOOT-RUBBER;BD-E5400,SILICONE,GRAY,T2.8	4	SA
1		AH90-01132N	ASSY COVER TOP;HT-J4500	1	SNA
..2	T001A	AH96-03898F	ASSY COVER P-TOP;HT-J4500	1	SA
..3		AH34-00028A	SWITCH MEMBRANE-TOUCH FILM;HT-F5500,HT-F	1	SA
..3	AC227	AH63-03064A	COVER-DOOR;HT-F5500/6500,PC+ABS,V-0,BLAC	1	SC
...4		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	13	SNA
..3	T001	AH63-03457L	COVER-TOP;HT-J4500/J5500,ABS+PMMA,W/W,HB	1	SNA
..3	FD12	AH63-03460A	COVER-USB;HT-H5500W,ABS+PMMA,V-0,VIOLET,	1	SNA
...4		0103-009870	RESIN ABS PMMA;SF-0505EH,Violet,RD0107,H	5	SNA
..3	C011	AK61-00137A	SPRING ETC-DOOR;COMMON PART,COIL,SUS 304	1	SA
..3		AK63-01031A	SHEET-PROTECTION COVER;BD-H6500,PE,T0.05	1	SNA
..3		AK63-01031E	SHEET-PROTECTION COVER;BD-H6500,PE,T0.05	0	SNA
..3		AK63-01048A	INSULATOR-SHEET;PC,V0,BLACK,L105,W185,T0	1	SNA
1	M0017	AH91-00837R	ASSY CHASSIS;HT-J5150	1	SNA
..2	M0014	AH94-03518F	ASSY PCB MAIN;HT-J5500,ZF	1	SA
..3		0202-001338	SOLDER-BAR;LeeD-free Solder BAR,W20L350H	12	SNA
..3		0202-001463	SOLDER-WIRE;LFC2-W3.0,D3,99.79Sn/0.2Cu/0	4	SNA
..3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
..3		0204-002420	SOLVENT;1M-1000,C3H70H,96	0	SNA
..3		0204-002607	FLUX;DF-234U,13%,14KG,Gravity 0.82	3	SNA
..3		0609-001200	MODULE REMOCON;VERTICAL,9.6mm,TR,0.85g	1	SA
..3		2401-003850	C-AL;1000uF,20%,50V,WT,TP,12.5x25mm,5mm	2	SA
..3		3710-003953	SOCKET-BOARD TO BOARD;23P,1R,1.25mm,STRA	1	SNA
..3		3716-001635	TERMINAL-BLOCK;JACK TYPE,6P,4.5mm,40V,5A	1	SA
..3		3722-002868	JACK-USB;4P1C,AU,BLK,ANGLE,A,2.0,12.5x9.	1	SA
..3		3722-003266	JACK-MODULAR;8P/8C,Y,ANGLE,NONE,AU,1PORT	1	SA
..3		3722-003671	JACK-PIN;3P/OPT,SN,RED/WHT,ANGLE	1	SA
..3	EV01	AH07-00284C	VF DISPLAY;6BD003INAK,HT-F5500,78x16.2x5	1	SA
..3		AH27-00090A	COIL FILTER;9014W-01-7R0,7uH,16.2mohm,9.	6	SA
..3	AH410	AH61-03567A	HOLDER-DISPLAY;HT-F5500/6500,ABS,BLACK,H	1	SNA
...4		0103-004609	RESIN ABS;HF-0680U,K21294,BK0007,HB,High	8	SNA
..3		AH62-00258G	HEAT SINK-ES;HT-H5500,A6063,W104.8,L15,B	1	SNA

Exploded Views and Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3		AH68-50254B	LABEL-SERIAL;-,-,TETRON,T0.1,W42,L10,-,-	1	SNA
...3		AH97-13499A	ASSY SMD;HT-J5500,ZF,AH94-03518F	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,20-38um,S	2	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4	DS01A	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	2	SA
...4		0403-001172	DIODE-ZENER;UDZ6.8B,6.65~6.93V,200mW,SOD	1	SNA
...4		0403-001411	DIODE-ZENER;BZT52-B5V6S,5.49~5.73V,200mW	2	SA
...4		0404-001006	DIODE-SCHOTTKY;RB751V,40V,30mA,SOD-323,T	3	SA
...4		0404-001084	DIODE-SCHOTTKY;BAT54A,30V,200mA,SOT-23,T	2	SA
...4		0406-001203	DIODE-TVS;uClamp3301H,3.5V,3.9V,4.6V,0.5	1	SA
...4		0406-001271	DIODE-TVS;RCLAMP0524P,6V,1MAV,5A,TR	2	SNA
...4		0406-001395	DIODE-TVS;AOZ8802ADI,6V,1MAV,1VPA,TP	6	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V,6.7V,7V,200MAV,20	1	SA
...4		0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	2	SNA
...4		0501-000457	TR-SMALL SIGNAL;MMBT2222A/KST2222A,NPN,3	1	SA
...4		0501-000479	TR-SMALL SIGNAL;KST42,NPN,350mW,SOT-23,T	2	SA
...4		0504-000129	TR-DIGITAL;KSR1104,NPN,200mW,47K/47K,SOT	1	SA
...4		0504-000156	TR-DIGITAL;KSR2103,PNP,200mW,22K/22K,SOT	1	SA
...4		0504-001013	TR-DIGITAL;KRC106S,NPN,200mW,4.7K/47K,SO	2	SNA
...4		0505-001377	FET-SILICON;BSN20,N,50V,0.1A,15ohm,0.83W	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,20V,-4.2A,0.052oh	1	SA
...4		1002-001582	IC-A/D CONVERTER;CS5346,24,LQFP,48P,7x7m	1	SNA
...4		1003-002494	IC-MOTOR DRIVER;TPIC2050,SOP,56Z30,14x6.	1	SA
...4		1105-002528	IC-DDR3 SDRAM;K4B4G1646D-BCMA,DDR3 1866,	1	SA
...4		1201-003514	IC-AUDIO AMP;TAS5614LADDVR,HTSSOP,44Z30,	3	SNA
...4		1203-007107	IC-RESET;CAT853STBI-T3,SOT-23 3-Lead,3P,	2	SA
...4		1203-007502	IC-DC/DC CONVERTER;AOZ3011PI,SO-8,8Z30,4	1	SA
...4		1203-008095	IC-DC/DC CONVERTER;TPS65261RHBR,QFN,32P,	1	SA
...4		1203-008114	IC-POWER SUPERVISOR;BD2242G-GTR,SSOP6,6P	2	SA
...4		1204-003322	IC-MODULATOR;TAS5538DGGR,TSSOP,56P,14x8.	1	SA
...4		1204-003345	IC-TUNER;SI4705-D60-GMR,QFN,20P,3x3mm,PL	1	SA
...4		1204-003575	IC-VIDEO DECODER;MT8563,BGA,395P,15x15x1	1	SNA
...4		1205-003948	IC-RECEIVER;PI90LV02TEX,SOT23,5P,PLASTIC	1	SNA
...4		1205-004727	IC-SWITCH;AOZ1320CI-04,SOT23-6,6P,2.9x1.	1	SA
...4		1405-001192	VARISTOR;12Vdc,30A,1.6x0.8mm,TP,50V,0.3p	10	SA
...4		2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	3	SA
...4		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	5	SNA
...4		2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	6	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	27	SNA
...4		2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	12	SA
...4		2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	7	SA
...4		2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	2	SA
...4		2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	5	SA
...4		2007-000091	R-CHIP;12Kohm,5%,1/10W,TP,1608	1	SNA
...4		2007-000096	R-CHIP;30Kohm,5%,1/10W,TP,1608	4	SA
...4		2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	3	SA
...4		2007-000100	R-CHIP;68Kohm,5%,1/10W,TP,1608	1	SA
...4		2007-000115	R-CHIP;82ohm,5%,1/10W,TP,1608	2	SA
...4		2007-000129	R-CHIP;27Kohm,5%,1/10W,TP,1608	1	SA
...4		2007-000130	R-CHIP;39Kohm,5%,1/10W,TP,1608	1	SA
...4		2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	3	SA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	36	SA
...4		2007-000139	R-CHIP;220ohm,5%,1/16W,TP,1005	2	SA
...4		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	8	SA
...4		2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	2	SA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	13	SA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	37	SA
...4		2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	4	SA
...4		2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	5	SNA
...4		2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	11	SA
...4		2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	4	SA
...4		2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	SA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	22	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000253	R-CHIP;1.5ohm,5%,1/4W,TP,3216	1	SA
...4		2007-000310	R-CHIP;10ohm,5%,1/2,TP,5025	1	SNA
...4		2007-000455	R-CHIP;18Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000491	R-CHIP;2.2Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000606	R-CHIP;240ohm,1%,1/10W,TP,1608	1	SA
...4		2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	18	SNA
...4		2007-000736	R-CHIP;30Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	14	SNA
...4		2007-000879	R-CHIP;4.7ohm,1%,1/10W,TP,1608	1	SA
...4		2007-000929	R-CHIP;470ohm,1%,1/10W,TP,1608	2	SNA
...4		2007-000962	R-CHIP;5.1Kohm,1%,1/10W,TP,1608	3	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-001038	R-CHIP;56Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001206	R-CHIP;82Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-001284	R-CHIP;4.7ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	22	SA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	2	SA
...4		2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-002797	R-CHIP;560ohm,5%,1/16W,TP,1005	1	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	11	SA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	6	SNA
...4		2007-007431	R-CHIP;91Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007768	R-CHIP;13Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-008137	R-CHIP;24Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008485	R-CHIP;22ohm,1%,1/16W,TP,1005	2	SC
...4		2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-009753	R-CHIP;52.3Kohm,1%,1/16W,TP,1005	1	SA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	3	SNA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	12	SA
...4		2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	SA
...4		2011-001397	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	SA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	6	SA
...4	AD480	2203-000311	C-CER,CHIP;0.12nF,5%,50V,C0G,TP,1005	1	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	2	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	16	SA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	2	SA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	8	SNA
...4	AD480	2203-000643	C-CER,CHIP;0.024nF,5%,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	2	SA
...4	AD480	2203-000726	C-CER,CHIP;3.9nF,10%,50V,X7R,TP,1608	2	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	3	SA
...4	AD480	2203-000975	C-CER,CHIP;47nF,10%,25V,X7R,TP,1608	5	SNA
...4	AD480	2203-001239	C-CER,CHIP;0.082nF,5%,50V,NP0,TP,1005	2	SNA
...4	AD480	2203-001634	C-CER,CHIP;33nF,10%,50V,X7R,TP,1608	12	SNA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	3	SNA
...4	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	8	SA
...4	AD480	2203-002982	C-CER,CHIP;6.8nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	35	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	1	SNA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	2	SNA
...4	AD480	2203-006005	C-CER,CHIP;10nF,10%,100V,X7R,TP,1608	12	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	29	SA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	59	SA
...4	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	1	SA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	9	SA
...4	AD480	2203-006399	C-CER,CHIP;1000nF,10%,6.3V,X5R,TP,1005	10	SA
...4	AD480	2203-006460	C-CER,CHIP;2200nF,10%,16V,X5R,TP,1608	2	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	8	SA
...4	AD480	2203-006636	C-CER,CHIP;220nF,10%,25V,X7R,TP,1608	1	SA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	7	SNA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005	2	SA
...4	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005	3	SNA
...4	AD480	2203-006844	C-CER,CHIP;470nF,10%,10V,X5R,TP,1005	1	SA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	18	SA
...4	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	12	SNA
...4	AD480	2203-006977	C-CER,CHIP;47000nF,10%,16V,X5R,TP,3225	2	SA
...4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	12	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	1	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608(	15	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	1	SA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	74	SNA
...4	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	25	SNA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,0.5	12	SA
...4		2402-001184	C-AL,SMD;47uF,20%,16V,WT,TP,6.6X6.6X6MM	1	SA
...4		2402-001286	C-AL,SMD;220uF,20%,16V,HR,TP,6.6x6.6x7.7	1	SA
...4		2703-000166	INDUCTOR-SMD;2.7uH,5%,1.10hm,290mA,30,Wi	1	SA
...4		2703-000175	INDUCTOR-SMD;270nH,10%,0.80hm,50mA,15,Mu	1	SA
...4		2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	2	SA
...4		2703-003930	INDUCTOR-SMD;4.7uH,20%,0.0720hm,2450mA,W	2	SA
...4		2801-003856	CRYSTAL-SMD;0.032768MHz,20ppm,28-ACP,7pF	1	SA
...4		2801-004284	CRYSTAL-SMD;27MHz,10ppm,28-AAN,20pF,30Oh	1	SA
...4		2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2.0x1.0x0.5m	2	SA
...4		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	1	SNA
...4		3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	28	SA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	1	SA
...4		3701-001792	CONNECTOR-HDMI;19P,A,FEMALE,AU,0.5mm,BLK	1	SA
...4		3708-001837	CONNECTOR-FPC/FFC/PIC;15P,1mm,SMD-S,SN,N	1	SA
...4		3708-002140	CONNECTOR-FPC/FFC/PIC;5P,1mm,SMD-S,SN,N,	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		3708-002669	CONNECTOR-FPC/FFC/PIC;8P,1mm,SMD-S,SN,NO	1	SNA
...4		3708-002908	CONNECTOR-FPC/FFC/PIC;40P,0.5mm,SMD-S,AU	1	SA
...4		3710-003998	CONNECTOR-SOCKET;10P,1R,1.25mm,SMD-S,SN,	1	SNA
...4	EH01	3711-006043	HEADER-BOARD TO CABLE;BOX,4P,1R,2mm,SMD-	1	SA
...4		AH11-00303A	IC MASK ROM-TOUCH SENSOR;HT-H5500W,16k,Q	1	SNA
...4		AH41-01756A	PCB-MAIN;HT-J5500_J4500,FR-4,4,00,T1.6,2	1	SNA
...4		AH97-14267C	ASSY MICOM;J5500	1	SNA
....5		1107-002048	IC-NAND FLASH;MT29F2G08ABAEAWP:E,2Gbit,2	1	SNA
...4		AH97-14267Q	ASSY MICOM;J5500	1	SNA
....5		0903-002001	IC-MICROCONTROLLER;R5F100PHA FB,LQFP,100P	1	SNA
...3		AH97-13813A	ASSY DRM;HT-J5500W,BD HOME THEATER,AH94-	1	SNA
...4		AH46-00098A	KEY CODE-PACKAGE;AV,HT-J5500	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFICATION;MAC,TV/AV,General	1	SNA
...3		BN62-00099A	HEAT SINK-ES;LH46LBTLCB/ZA,A6063,W20,L20	1	SNA
1		AH91-00838D	ASSY SHIELD;HT-J5150	1	SNA
.2	SCREW	6003-000275	SCREW-TAPTYPE;BH,+,B,M3,L10,ZPC(BLK),SWR	7	SA
.2	SCREW	6003-001561	SCREW-TAPTYPE;BH,+,-,B,M3,L6,ZPC(WHT),SW	10	SA
.2	P001A	AH44-00331A	DC VSS-POWER BOARD;V300S_FHS,AC/DC,300W,	1	SA
.2	NW01	AH59-02605A	NETWORK-WLAN CLIENT;WDF210M,25,36,4	1	SA
.2	FL06	AH96-01933J	FFC CABLE;HT-H5500W,Fold,L66,5P	1	SA
.2	BT	AH96-02298A	NETWORK-BLUE TOOTH;WIBT40D,18.0,28.5,5.4	1	SA
1		AH92-04668A	ASSY LABEL;HT-J7500W	1	SNA
.2		AK68-02233C	LABEL-RATING;ALL AV,WW,ART,T0.05,W80,L23	1	SNA
1		AH92-04694W	ASSY BOX;HT-J5150	1	SNA
.2		AH68-01981M	LABEL BOX;ALL MODEL,ALL BUYER,THERMAL PA	1	SNA
.2		AH68-02519A	LABEL-SERIAL;ALL,SEA,ART,W40,L25,SILVER,	1	SNA
.2		AH69-04488B	BOX UNIT;HT-J5500,CB,SW4,A1,L831,W319,H3	1	SNA
1		AH92-04695G	ASSY P/MATERIAL;HT-J5150	1	SNA
.2		AH69-04469A	CUSHION-SET;HT-J5500,EPS,16.7g/L,WHT,0	1	SNA
...3		0103-005099	RESIN EPS;BASF303,Natural,Natural	58	SNA
.2		AK63-00435J	SHEET-NITRON;BD-D8500/EN,HDPE/NITRON,0.3	1	SNA
.2	T0527	BH68-40364A	LABEL-SUMMARY;G52,G72,ART,TART,WHT	1	SNA
.2	AS080	BN63-08945A	SHEET-PROTECTION COVER;HT-C720,PE,T2,W12	1	SNA
.2		BN63-09096A	SHEET-PE;32D550,PE,T0.03,W2000,L2000	1	SNA
.2		BN69-00257S	PAD-SHEET;-CB,SW4,,W1000,L800,,,,,YEL,,	1	SNA
.2		BN69-05499A	PACKING ANGLE;PAPER	1	SNA
.2		BN69-05929A	WRAP;0.0066,440,4000000,All	4	SNA
.2		BN69-09117A	PALLET;WOOD,1040,890,130,18%	1	SNA
.2		BN74-00008G	TAPE-OPP;OPP,T0.05,W75,ROLL,CLEAR,C053	2	SNA
.2		BN81-02321A	A/S BAG-AIR;LIGHT FLEX PLASTIK,PE WHITE,	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
1	ACCE1	AH92-04732Q	ASSY ACCESSORY;HT-J5150	1	SNA
.2	T0268	3903-000525	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SA
.2	REMO2	AH59-02530A	REMOCON-AV;2012 AV,Samsung,45,3.0,HT-F45	1	SA
.2		AH96-03521H	ASSY ACCESSORY-MANUAL CABLE;HT-J5150	1	SNA
..3		4301-000116	BATTERY-ALKALINE;1.5V,R03,10.5x44.5mm,AA	2	SNA
..3	M0025	AH42-00021A	ANTENNA-FM;T18011F-1,1800mm,0g	1	SA
..3		AH63-02236A	SHEET-BAG;MM-C330,LDPE,0.05,250,370,NTR	1	SNA
..3		AH68-02799C	MANUAL USERS;HT-J5500 HT-J5500W HT-J5530	1	SNA
..3		AK68-01811H	LEAFLET-WARRANTY;comm,Samsung,Lang17,Eur	1	SNA
..3	T0527	BN68-00513A	LABEL-E PASS;ALL MODEL,WW,YUPO,W50,L15,W	1	SNA
.2	SPKW	AH96-03644A	ASSY SPEAKER P-SUBWOOFER;3ohm,170W	1	SA
..3		AH69-04462A	CUSHION-SPEAKER WOOFER;EW5,EPS,17g/l,WHT	1	SNA
..3		AH82-00480A	A/S ASSY-SPEAKER;FOR HT-ES6200,Subwoofer	1	SNA
...4		AH81-04810A	A/S SPEAKER;PS-EW5-1,SUBWOOFER LABEL	1	SNA
...4		AH81-07622A	A/S SPEAKER;AV SPK,620 x 540 x 0.5mm	1	SNA
...4		AH82-00481A	A/S ASSY-SPEAKER;FOR HT-ES6200,Subwoofer	1	SNA
....5	SCREW	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	10	SA
....5		AH59-02395A	UNIT-SPEAKER WOOFER;HW-E550,169,PS-WE550	1	SNA
....5	T001	AH64-05009A	COVER-TOP;PS-X725,HIPS,-,-,-,-,HB,NTR,	1	SNA
....5	RB01	AH64-05010A	COVER-BOTTOM;PS-X725,HIPS,-,-,-,-,HB,N	1	SNA
....5	F001	AH64-05060A	COVER-FRONT;PS-X725,HIPS,T2.7,-,-,-,-,HB	1	SNA
....5		AH81-04801A	CKD-SPEAKER TERMINAL;SPEAKER,TERMINAL,BL	1	SNA
....5		AH81-07366A	A/S SPEAKER;TRIANGLE BOARD,9t,20*60,for	2	SNA
....5		AH81-07377A	A/S SPEAKER;AV SPK,Wood Bond,Subwoofer,C	50	SNA
....5		AH81-07378A	A/S SPEAKER;AV SPK,PVC Bond,Subwoofer,Co	20	SNA
....5		AH81-07379A	A/S SPEAKER;AV SPK,Hot Melt,Subwoofer,Co	20	SNA
....5		AH81-07400C	A/S SPEAKER;PS-EW6,PAPER Duct,PB,175*60*	1	SNA
....5		AH81-07562B	A/S SPEAKER;Foot,AV SPK,10*3mm,Black,Sil	4	SNA
....5		AH81-07618A	A/S SPEAKER;AV SPK,EPS Duct	1	SNA
....5		AH81-07621A	A/S SPEAKER;AV SPK,Sound absorption,235*	1	SNA
....5		AH81-07644A	A/S SPEAKER;AV SPK,EVA,85 x 62 x 1.5mm,E	1	SNA
....5		AH81-07645A	A/S SPEAKER;AV SPK,EVA,63 x 44 x 1.5mm,E	1	SNA
....5		AH81-07646A	A/S SPEAKER;Enclosure Board 9t,for PS-EW	1	SNA
....5		AH81-07647A	A/S SPEAKER;TOP BOARD 9t,for PS-EW5,PB	1	SNA
....5		AH81-07648A	A/S SPEAKER;BOTTOM BOARD 9t,for PS-EW5,P	1	SNA
....5		AH81-07649A	A/S SPEAKER;FRONT BOARD,for PS-EW5,12t,P	1	SNA
....5		AH81-07741A	A/S SPEAKER;AV SPK,Wood Bond,Subwoofer,S	1	SNA
.2		AH96-03705A	ASSY SPEAKER P-FRONT;3ohm,1000W	1	SNA
..3		AH69-04463A	CUSHION-SPEAKER;HT-J5000,EPS,17g/l,WHT,0	1	SNA
..3		AH82-00941A	A/S ASSY-SPEAKER;Speaker Cable,H4500	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	SWFR4	AH81-05321A	CKD-SPEAKER CABLE;PS-X725,4Mx2P CLEAR,RE	1	SA
...4	SWFL4	AH81-05322A	CKD-SPEAKER CABLE;PS-X725,4Mx2P CLEAR,WH	1	SA
...4	SWRR10	AH81-05323A	CKD-SPEAKER CABLE;PS-X725,10Mx2P CLEAR,G	1	SC
...4	SWRL10	AH81-05324A	CKD-SPEAKER CABLE;PS-X725,10Mx2P CLEAR,B	1	SA
...4	SWCE4	AH81-05325A	CKD-SPEAKER CABLE;PS-X725,3Mx2P CLEAR,GR	1	SA
...4		AH81-07426A	A/S SPEAKER;PE-BAG,With 5.1ch Cable,145	1	SNA
...4	SWSU4	AH81-08544A	CKD-SPEAKER CABLE;AV SPK,AWG 24, 4M,Subw	1	SA
...3		AH82-01129A	A/S ASSY-SPEAKER;FOR HT-J5500,FRONT LEFT	1	SA
...4		AH81-09372A	A/S LABEL-SPEAKER;AV SPK, 3ohm,LABEL,JS2	1	SNA
...4		AH82-01130A	A/S ASSY-SPEAKER;FOR HT-J5500,FRONT LEFT	1	SNA
...3		AH82-01132A	A/S ASSY-SPEAKER;FOR HT-J5500,FRONT RIGH	1	SA
...4		AH81-09373A	A/S LABEL-SPEAKER;AV SPK, 3ohm,LABEL,JS2	1	SNA
...4		AH82-01131A	A/S ASSY-SPEAKER;FOR HT-J5500,FRONT RIGH	1	SNA
....5		AH81-09429A	A/S SPEAKER;COVER-FRONT & GRILLE,JS2	1	SNA
....6	F001	AH63-04056A	COVER-FRONT;AV SPK, JS2,ABS+PMMA,HB,BLAC	1	SNA
....6		AH64-05890A	GRILLE-METAL;AV SPK, JS2,CR-SPCC,T0.6	1	SNA
....5		AH81-09434A	A/S SPEAKER;COVER-REAR & CAP,JS2	1	SNA
....6	R001	AH63-04057A	COVER-REAR;AV SPK, JS2,ABS+PMMA,HB,BLACK	1	SNA
....5		AH81-09555A	A/S SPEAKER;EVA-JS2,400 x 10 x 0.5T	1	SNA
...3		AH82-01133A	A/S ASSY-SPEAKER;FOR HT-J5500,HT-J5530,S	1	SA
...4		AH81-09375A	A/S LABEL-SPEAKER;AV SPK, 3ohm,LABEL,JS1	1	SNA
...4		AH82-01134A	A/S ASSY-SPEAKER;FOR HT-J5500,HT-J5530,S	1	SNA
....5		AH81-09529A	A/S SPEAKER;EVA-JS1,320 x 10 x T0.5	1	SNA
....5		AH81-09556A	A/S SPEAKER;EVA-JS1, JS2,30 x 20 x 0.5T	1	SNA
...3		AH82-01136A	A/S ASSY-SPEAKER;FOR HT-J5500,HT-J5530,S	1	SA
...4		AH81-07343A	A/S SPEAKER;PE-BAG,Speaker,260 x 210 x 0	1	SNA
...4		AH81-09374A	A/S LABEL-SPEAKER;AV SPK, 3ohm,LABEL,JS1	1	SNA
...4		AH82-01135A	A/S ASSY-SPEAKER;FOR HT-J5500,HT-J5530,S	1	SNA
....5		AH81-09423A	A/S SPEAKER;EVA-JS2,450 * 10 * 0.5T	1	SNA
....5		AH81-09428A	A/S SPEAKER;COVER-FRONT & GRILLE,JS1	1	SNA
....6	F001	AH63-04052A	COVER-FRONT;AV SPK, JS1,ABS+PMMA,HB,BLAC	1	SNA
....6		AH64-05888A	GRILLE-METAL;AV SPK, JS1,CR-SPCC	1	SNA
....5		AH81-09433A	A/S SPEAKER;COVER-REAR & CAP,JS1	1	SNA
....6	R001	AH63-04053A	COVER-REAR;AV SPK, JS1,ABS+PMMA,HB,BLACK	1	SNA
....5		AH81-09477A	A/S SPEAKER;SPONGE,FOR WIRE,100*25*3T,us	1	SNA
...3		AH82-01137A	A/S ASSY-SPEAKER;FOR ALL BASIC,CENTER	1	SA
...4		AH81-08877A	A/S SPEAKER;PE-BAG-HC3,400mm*250mm*0.5T	1	SNA
...4		AH81-09379A	A/S LABEL-SPEAKER;CENTER SPK,4ohm,JC2-1,	1	SNA
...4		AH82-01138A	A/S ASSY-SPEAKER;4ohm,FOR ALL BASIC	1	SNA
....5	SCREW	6003-000275	SCREW-TAPTYPE;BH,+,B,M3,L10,ZPC(BLK),SWR	9	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		AH59-02719A	UNIT-SPEAKER WOOFER;HT-J5500K,65	1	SNA
....5	GC01	AH64-05919A	COVER-DUCT;PS-JC2,HIPS,T2,W38.5,D67,HB,B	1	SNA
....5		AH81-04849A	A/S SPEAKER;AV SPK,Silicon Foot,4.8mmx2t	2	SNA
....5		AH81-07447A	CKD-SPEAKER TERMINAL;AV SPK,TERMINAL,24x	1	SNA
....5		AH81-07805A	CKD-SPEAKER NETWORK;AV SPK,AWG 24,FS1-1,	1	SNA
....5		AH81-09420A	A/S SPEAKER;AV SPK,Sound absorber,50 * 4	1	SNA
....5		AH81-09421A	A/S SPEAKER;AV SPK,Sound absorber,80 * 1	2	SNA
....5		AH81-09424A	A/S SPEAKER;EVA-JS2,83.3 * 46.2 * 0.5T	2	SNA
....5		AH81-09430A	A/S SPEAKER;COVER-FRONT & GRILLE,JC2	1	SNA
....6	F001	AH63-04054A	COVER-FRONT;AV SPK, JC1,ABS+PMMA,HB,BLAC	1	SNA
....6		AH64-05889A	GRILLE-METAL;AV SPK, JS2,CR-SPCC	1	SNA
....5		AH81-09435A	A/S SPEAKER;COVER-REAR & CAP,JC2	1	SNA
....6	R001	AH63-04055A	COVER-REAR;AV SPK, JC1,ABS+PMMA,HB,BLACK	1	SNA
....6	H001	AH81-01988A	A/S SPEAKER;PS-X250,COVER-PLATE,FOR PS-X	1	SNA
.....7		0103-004631	RESIN HIPS;HF-1690H,K21294,BK0007,1.5mm	2	SNA
....5		AH81-09444A	A/S SPEAKER;AV SPK,Sound absorber,70 * 5	1	SNA
....5		AH81-09478A	A/S SPEAKER;SPONGE,FOR WIRE,80*25*3T,usi	1	SNA
....5		AH81-09530A	A/S SPEAKER;EVA-JC2,280 x 10 x T0.5	2	SNA
1	D001A	AK90-00309A	ASSY DECK;BD-P8S	1	SNA
.2	DECK	AK96-02203A	ASSY DECK P;BD-P8S,ASSY	1	SA
..3		6002-001086	SCREW-TAPPING;PH,+,B,M1.7,L5,ZPC(WHT),SW	1	SA
..3	SCREW	6003-001795	SCREW-TAPTYPE;PWH,+,B,M2,L6,ZPC(WHT),SWC	4	SA
..3	DH03	AK96-01944A	HINGE-PU;BD-P8,POM,GRAY	1	SNA
...4	ES09	AK61-01148A	SPRING ETC-HINGE PU;BD-P7,STAINLESS-ST53	1	SNA
...4	DH03	AK61-01244A	HINGE-PU;POM,white	1	SNA
..3		AK96-01945G	ASSY DECK P-HOUSING;BD-P8S	1	SNA
...4		6001-001370	SCREW-MACHINE;CH,+,M1.7,L3,ZPC(WHT),SWRC	1	SA
...4	DB02	6602-001076	BELT-RECTANGULAR;CR,T1.2,4.3%,1.2X25.1,B	1	SNA
...4	SNA	AK31-00043C	MOTOR DC-LOADING;JQ24-35H440,5000,0.392,	1	SNA
...4	CF02	AK61-01246B	FRAME-MAIN;BD-P8S,ABS,Black	1	SNA
...4	DS02	AK61-01247A	SLIDER-CAM;ABS,BD-P8,BLACK	1	SNA
...4	FT01	AK63-00873A	TRAY-DISC;BD-P8,ABS,BLACK	1	SNA
...4	CC03	AK64-02550A	CHASSIS-SUB;BD-P8,ABS,BLK	1	SNA
...4	SNA	AK66-00167A	PULLEY-MOTOR;BD-P8S,POM,BLACK	1	SNA
...4	DG06	AK66-00254A	GEAR-PULLEY;BD-P8,POM,M0.5,NTR	1	SNA
...4	DG08	AK66-00255A	GEAR-TRAY;BD-P8S,POM,M0.8(A)/M0.5(B),NTR	1	SNA
...4		AK68-02240A	LABEL-WARNING;BD-P8,ART,T0.1,W25,L50,Yel	1	SNA
...4		AK90-00205A	ASSY MISC-CLAMPER;BD-P8,DYCPN	1	SNA
....5		AK61-01245A	MAGNET-CLAMPER;BD-P8,SPCC	1	SNA
....5		AK62-00049A	YOKE-CLAMPER;BD-P8,CR-SPCC,0.5,SIL	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		AK65-00003A	CLAMPER-DISC;BD-P8,ABS,WHITE	1	SNA
...4		AK96-01821A	ASSY PCB P-DECK;BD-P8	1	SNA
....5		3409-001723	SWITCH-LEVER;30,200,5,36deg	1	SNA
....5		3708-001878	CONNECTOR-FPC/FFC/PIC;6P,1mm,SMD-A,SN,NO	1	SA
....5		AK41-01103A	PCB-FUNCTION;BD-P8,PHENOL,1,T1,118x163mm	1	SNA
...4		AK96-02044G	FFC CABLE;BD-P8S,Fold,L251,14P	1	SNA
...3		AK96-01946E	ASSY DECK P-TRAVERSE;BD-P8S,F5100	1	SNA
...4		6001-001291	SCREW-MACHINE;CH,+,M1.7,L4,ZPC(BLK),SWRC	2	SA
...4	SCREW	6003-000109	SCREW-TAPTYPE;BH,+,B,M2.6,L8,ZPC(BLK),SW	1	SA
...4	SCREW	6003-001444	SCREW-TAPTYPE;BH,+,B,M2,L4,ZPC(BLK)	3	SNA
...4	SNA	AK31-00058A	MOTOR CIRCUIT-STEP FEED;BD-P8	1	SNA
...4		AK31-00059A	MOTOR DC-DECK;20C843H020AV,6000,BD-P8,60	1	SNA
...4	SNA	AK61-01253A	BRACKET-DECK;BD-P8S,ABS-PC + GF 30%,T2,N	1	SNA
...4	S.N.A	AK66-00050A	SHAFT-PU;BD-P,SUS,L98,OD3,NTR	1	SNA
...4		AK73-00092A	RUBBER-DAMPER;BD-P7,BUTYL,BLACK	4	SNA
...4		AK96-02044E	FFC CABLE;BD-P8S,Fold,L209,40P	1	SNA
...3		AK96-02198A	ASSY PICK UP P;SOH-BP10,ASSY	1	SNA
...4		0201-000169	ADHESIVE-CYA;ARCN-A501F,NTR	0	SNA
...4		0201-001081	ADHESIVE-AA;1401C,RED,-,BOND-LOCK SCREW	0	SNA
...4		0201-001525	ADHESIVE-UV;8840L,YEL,TRANS,23000,DISCMA	0	SNA
...4		0201-001819	ADHESIVE-UV;8833M,YELLOW,21000mPas,89%(H	0	SNA
...4		0201-002088	ADHESIVE-UV;IM127S,YEL,13000mPa.s,1mmt,	0	SNA
...4		0201-002865	ADHESIVE-UV;8840N,WHT,21000mPa.s,500mW/c	0	SNA
...4		AK63-00874A	COVER-ACT;SOH-BP8,STAINLESS-ST304,T0.2,	1	SNA
...4		AK67-00050A	LENS-OL DVD;SOH-BP1,PLASTIC,NTR,PI3.8,T1	1	SNA
...4		AK67-00099A	LENS-OL BD;SOH-BP7,PLASTIC,NTR,Pi 3.5,T1	1	SNA
...4		AK68-01760A	LABEL-E PASS;SOH-BP5,T0.1,W10,L15,WHITE	1	SNA
...4		AK96-02036A	ASSY PICK UP P-ACT;SOH-BP8VE,ASSY	1	SNA
....5		0201-001230	ADHESIVE-CYA;LOCTITE 480,BLK,300,-	0	SNA
....5		0201-001537	ADHESIVE-UV;SDM-378,WHT,11000mPas,-	0	SNA
....5		0201-001793	ADHESIVE-UV;8791L3,WHITE,20000mPa.s	0	SNA
....5		3302-001884	MAGNET-RARE EARTH;48MGOe,9x6.1x1.4mm	2	SNA
....5		3812-001419	WIRE-NO SHEATH CU;SCW,0V,L18,1/0.11mm,SI	4	SNA
....5		3812-001456	WIRE-NO SHEATH CU;SCM,0V,L18,YELLOW	2	SNA
....5		6001-001291	SCREW-MACHINE;CH,+,M1.7,L4,ZPC(BLK),SWRC	2	SA
....5	M0114	AK61-00969A	HOLDER-WIRE;SOH-BP6,PPS,BLACK	1	SNA
....5	SNA	AK62-00050A	YOKE-ACT;SOH-BP8,CR-SPCC,1.2,SIL	1	SNA
....5		AK96-01184A	ASSY PICK UP P-BLADE;SOH-BP10,ASSY	1	SNA
.....6	SNA	AK66-00163A	BLADE-ACT;SOH-BP6,E5006L,BEIGE	1	SNA
...4		AK96-02199A	ASSY PICK UP P-OPT;SOH-BP10,ASSY	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		0201-001525	ADHESIVE-UV;8840L,YEL,TRANS,23000,DISCMA	0	SNA
....5		0201-001819	ADHESIVE-UV;8833M,YELLOW,21000mPas,89%(H	0	SNA
....5		0201-002088	ADHESIVE-UV;IM127S,YEL,13000mPa.s,1mmt,	0	SNA
....5		0205-001226	GREASE;FLOIL KG-513,WHT,1KG	0	SNA
....5		0602-001207	DIODE-LASER;5mW,LD2.0/PD5.0,650.78nm,TP	1	SA
....5		0602-001208	DIODE-LASER;25mW,2V,405nm,TP	1	SNA
....5		6001-001370	SCREW-MACHINE;CH,+,M1.7,L3,ZPC(WHT),SWRC	3	SA
....5		AK31-00048A	MOTOR CIRCUIT-STEP CLD;SOH-BP7,3,25~35,3	1	SNA
....5		AK61-00742A	SPRING ETC-GT DVD;SOH-DR4,Cu,OD5.6,L5.6,	1	SNA
....5		AK61-00830A	HOLDER-GT BD;SOH-BP4,Zn,GRY	1	SNA
....5		AK61-00874A	SPRING ETC-PBS BD;SOH-BP5,SUS,T0.15	1	SNA
....5	ES02	AK61-00974A	SPRING ETC-LD DVD;SOH-SBP2,STS304,T0.15,	1	SNA
....5		AK61-01061A	HOLDER-CL;SOH-BP10,PPS,BLACK	1	SNA
....5		AK61-01073A	SPRING ETC-PLATE;SOH-BP7,SUS 304 0.15t,O	1	SNA
....5		AK61-01075A	SPRING ETC-HOLDER DVD;SOH-BP7,SUS 304,L1	1	SNA
....5		AK61-01217A	SPRING ETC-CLD;BP7,sus304,OD1.7,L18	1	SNA
....5		AK61-01271A	BASE-PICK UP;SOH-BP8VE,PPSFZ-3805 S2,BLA	1	SNA
....5		AK61-01272A	HOLDER-LD DVD;SOH-BP8VE,Zn,GRAY	1	SNA
....5		AK61-01273A	HOLDER-LD BD;SOH-BP8VE,Zn,GRAY	1	SNA
....5	SNA	AK63-00717A	COVER-BASE;SOH-BP7,STAINLESS-STS304,T0.2	1	SNA
....5		AK66-00202A	SHAFT-MAIN;SOH-BP7,SUS,L25,OD1.2,SILVER	1	SNA
....5		AK67-00044A	LENS-CL DVD;SOH-BP1,PLASTIC,NTR,PI5.2,T1	1	SNA
....5		AK67-00094A	LENS-GT BD;SOH-BP7,GLASS,NTR,3.0x2.5mm,T	1	SNA
....5		AK67-00095A	LENS-PBS BD;SOH-BP5,GLASS,NTR,6.2x5.0mm,	1	SNA
....5		AK67-00110A	LENS-QWP BD;SOH-BP7,PLASTIC,NTR,4.0x4.0m	1	SNA
....5		AK67-00132A	LENS-MIRROR DVD;SOH-BP7,GLASS,NTR,4.7x5.	1	SNA
....5		AK67-00134A	LENS-CL BD;SOH-BP7,PLASTIC,NTR,4.4x5.3mm	1	SNA
....5		AK67-00135A	LENS-ASL BD;SOH-BP7,PLASTIC,NTR,7.4x6.4m	1	SNA
....5		AK67-00159A	LENS-MIRROR BD;SOH-BP7,GLASS,NTR,6.0x5.8	1	SNA
....5		AK67-00165A	LENS-PBS DVD;SOH-BDP8VE,GLASS,NTR,9.0x5.	1	SNA
....5		AK67-00166A	LENS-PLATE DVD;SOH-BDP8VE,GLASS,NTR,3.1x	1	SNA
....5		AK96-02202A	ASSY PICK UP P-PCB;SOH-BP10,ASSY	1	SNA