

5. Exploded View & Part List

5-1	Exploded View	5-2
5-2	DECK Exploded View.....	5-4
5-3	Speaker System.....	5-6
5-4	Electrical Part List.....	5-7

5-1 Exploded View

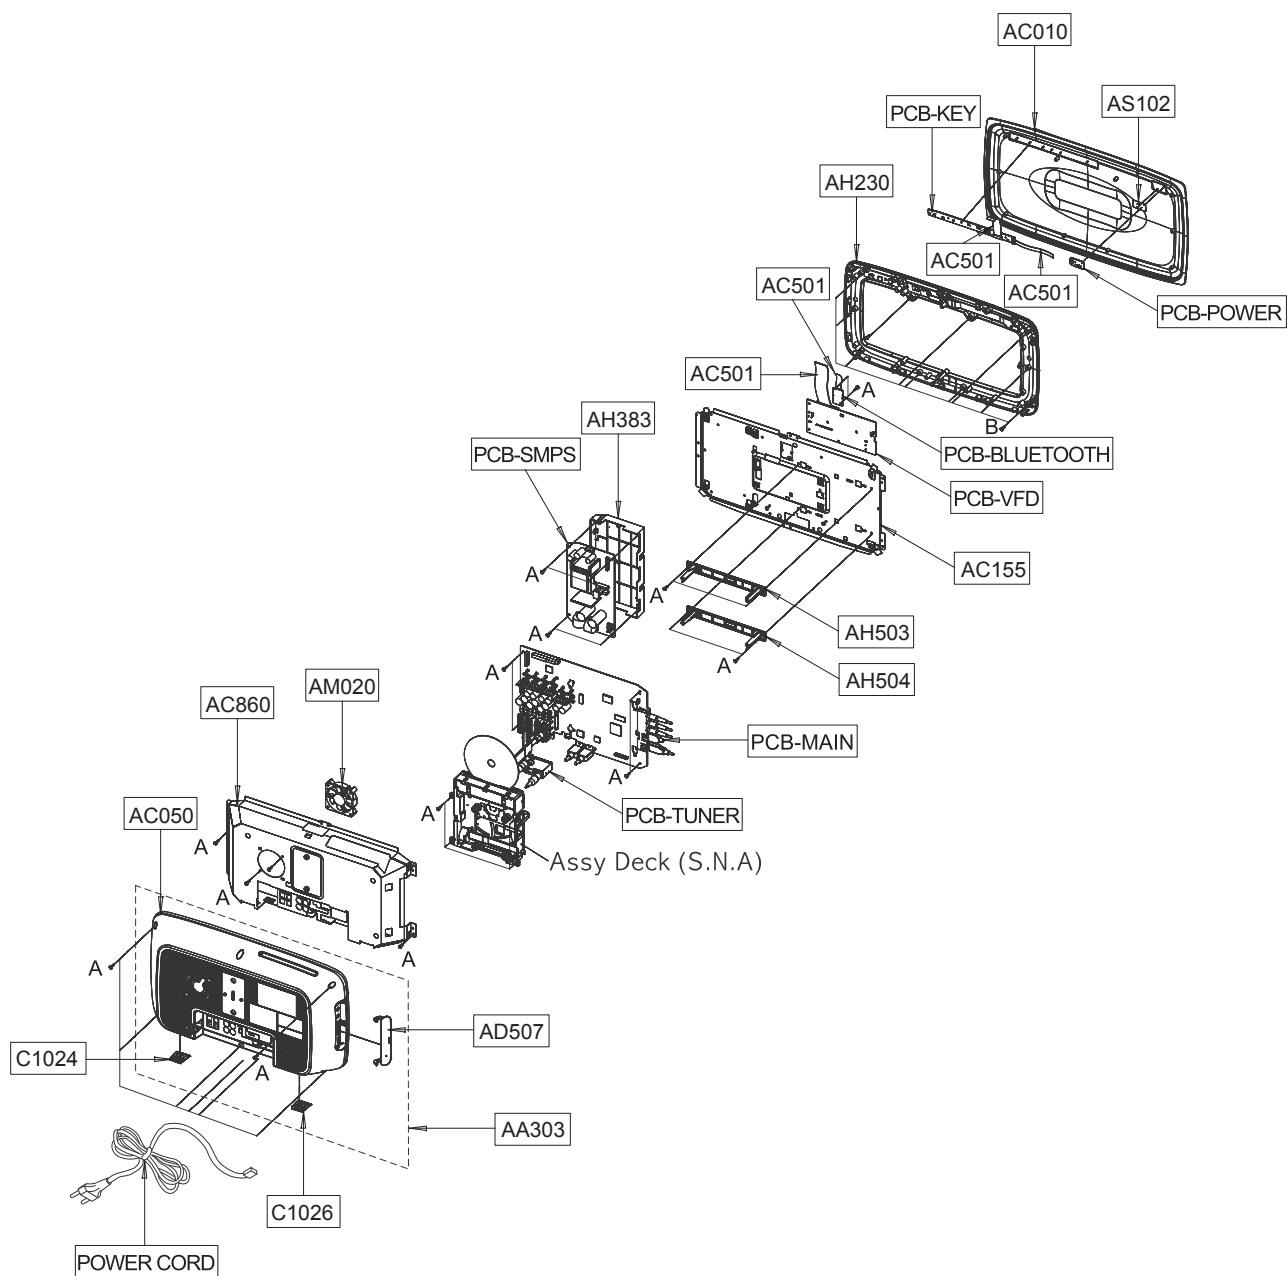


※ S.N.A: Service Not Available

■ Part List

Loc. No.	Code No.	Description;Specification	Q'ty	SNA	Remark
AA303	AH97-03091E	ASSY CABINET-REAR;HTS,HT-TX725/XAA,5.1CH	1	SA	
AC010	AH64-04839C	CABINET-FRONT;HT-X720/XAA,PMMA,ABS+PMMA,	1	SA	
AC050	AH64-04840E	CABINET-REAR;HT-TX725/XAA,ABS+PMMA,T2.5,	1	SA	
AC155	AH64-04843A	CHASSIS-FRONT;HT-X720,SPTe,0.5,217.6,L41	1	SA	
AC501	3809-002228	CABLE-FLAT;30V,80C,130mm,22P,1.25mm,UL20	1	SA	
AC501	3809-002229	CABLE-FLAT;30V,80C,75mm,11P,1.0mm,UL2069	1	SA	
AC501	3809-002230	CABLE-FLAT;30V,80C,140mm,7P,1.0mm,UL2069	1	SA	
AC501	3809-002231	CABLE-FLAT;30V,80C,50mm,7P,1.0mm,UL20696	1	SA	
AC860	AH64-04842B	CHASSIS-REAR;HT-X720/EXP,SPTe,0.5,217.8,	1	SA	
AD507	AH64-04841A	DOOR-JACK;HT-X720,ABS,T2.5,24.9,W19.5,L1	1	SA	
AH230	AH61-02706A	HOLDER-FRONT;HT-X720,ABS,T2.5,W240.1,L43	1	SA	
AH383	AH61-02708A	HOLDER-SMPS;HT-X720,HIPS 94 V0,T2.5,W109	1	SA	
AH503	AH61-02730A	HOLDER-DECK-TOP;HT-X720,HI-PS,T2.5,W 200	1	SA	
AH504	AH61-02731A	HOLDER-DECK-BOTTOM;HT-X720,HI-PS,T2.5,W	1	SA	
AM020	AH31-00029E	MOTOR FAN;C161NK10B0110,MX-GT88,0.15A,1.	1	SA	
AS102	AH63-01837A	SHEET-POWER;HT-X720,PC,T0.2,W 16.6,L28.3	1	SA	
C1024	AH61-02710A	LEG-LEFT;HT-X720,ABS,BLACK,L21.8	1	SA	
C1026	AH61-02711A	LEG-RIGHT;HT-X720,ABS,BLACK,L21.8	1	SA	
PCB-BLUETOOTH	AH92-02839A	ASSY PCB-BLUETOOTH;-;HT-X715,BLUETOOTH,-	1	SA	
PCB-KEY	AH92-02968A	ASSY PCB-KEY;HOME THEATER,HT-X725,KEY PC	1	SA	
PCB-MAIN	AH92-02969D	ASSY PCB MAIN-EUR;HOME THEATER,HT-X720,M	1	SA	
PCB-POWER	AH92-03080A	ASSY PCB-POWER;HOME THEATER,HT-X725,KEY	1	SA	
PCB-SMPS	AH44-00199A	SMPS;HT-X715,HT-X715,HALF BRIDGE,15	1	SA	
PCB-TUNER	AH92-03025C	ASSY PCB-TUNER;HOME THEATER,HT-X720,TUNE	1	SA	
PCB-VFD	AH92-02967A	ASSY PCB-VFD;HOME THEATER,HT-X725,VFD PC	1	SA	
POWER CORD	3903-000396	CBF-POWER CORD;AT,EU,CP2,HOUSING(2P),250	1	SA	
A	6003-000275	SCREW-TAPTYPE;BH,+,-,B,M3,L10,ZPC(BLK),S	33	SA	
B	6003-000282	SCREW-TAPTYPE;BH,+,-,B,M3,L8,ZPC(BLK),SW	10	SA	


5-2 DECK Exploded View

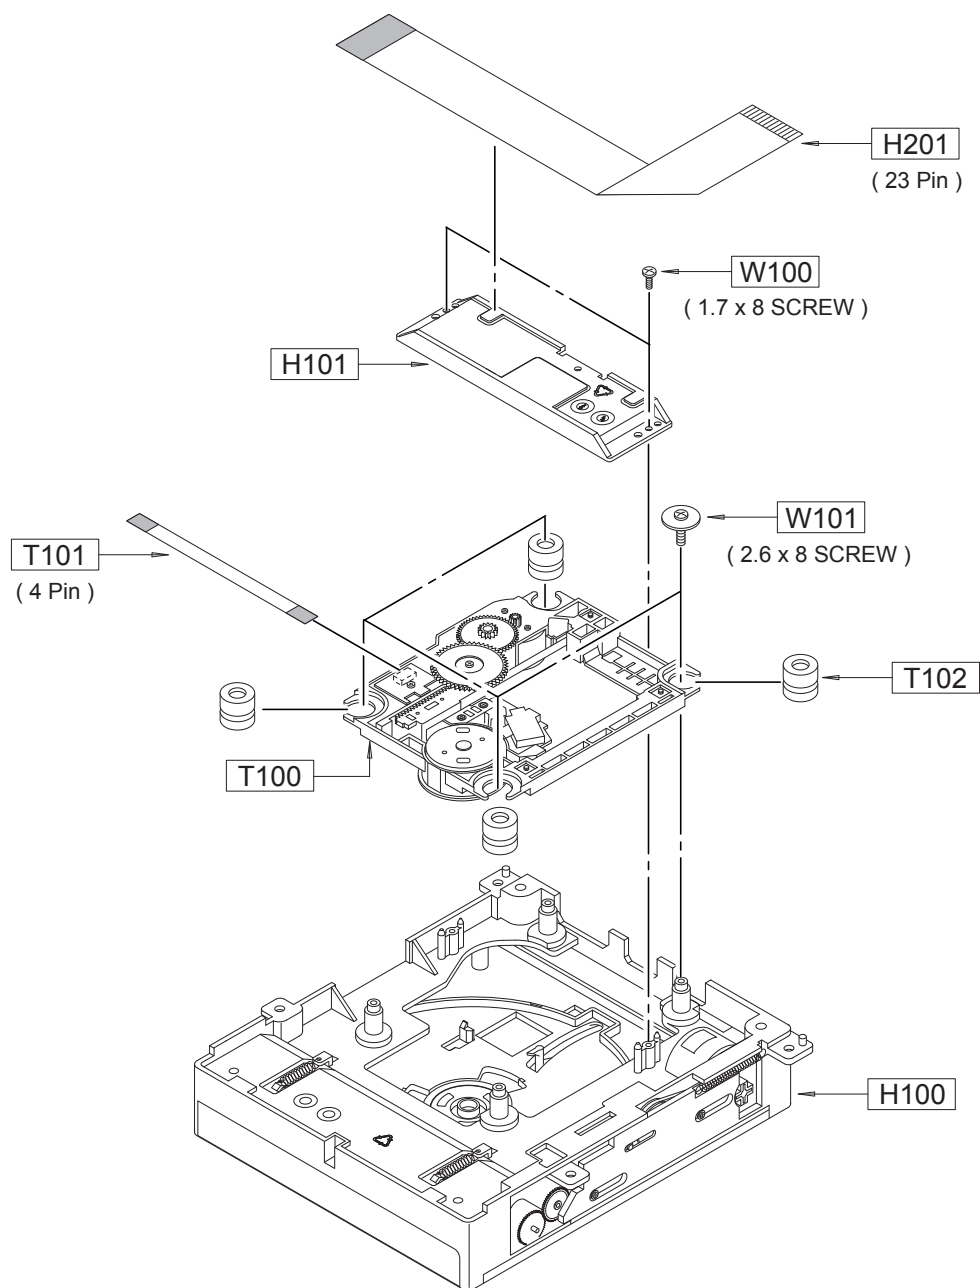

Part List

Loc. No.	Code No.	Description;Specification	Q'ty	SNA	Remark
H100	AH82-00192A	A/S ASSY-HOUSING;SDM-S13V,VSH-M33D,HOUSING	1	SA	
H101	AH81-05443A	BRACKET-FFC;SDM-S13V,DVD SLOT-IN,ABS	1	SA	
H201	AH81-05444A	FFC-PU;SDM-S13V,DVD SLOT-IN,23PIN,1.0P L194	1	SA	
T100	AH97-02666A	ASSY-TRAVERSE;CMS-S78RB,DVD DECK	1	SA	
T101	AH81-05445A	FFC-TRAVERSE;SDM-S13V,SVS SLOT-IN,4PIN,1.0P	1	SA	
T102	AH81-05440A	INSULATOR-DECK DVD;SDM-S13V,DVD SLOT-IN	4	SA	
W100	AH81-05441A	SCREW-TAPTITE;SDM-S13V,DVD SLOT-IN,M1.7X8	2	SA	
W101	AH81-05442A	SCREW-INSULATOR;SDM-S13V,DVD SLOT-IN	4	SA	

5-3 Speaker System

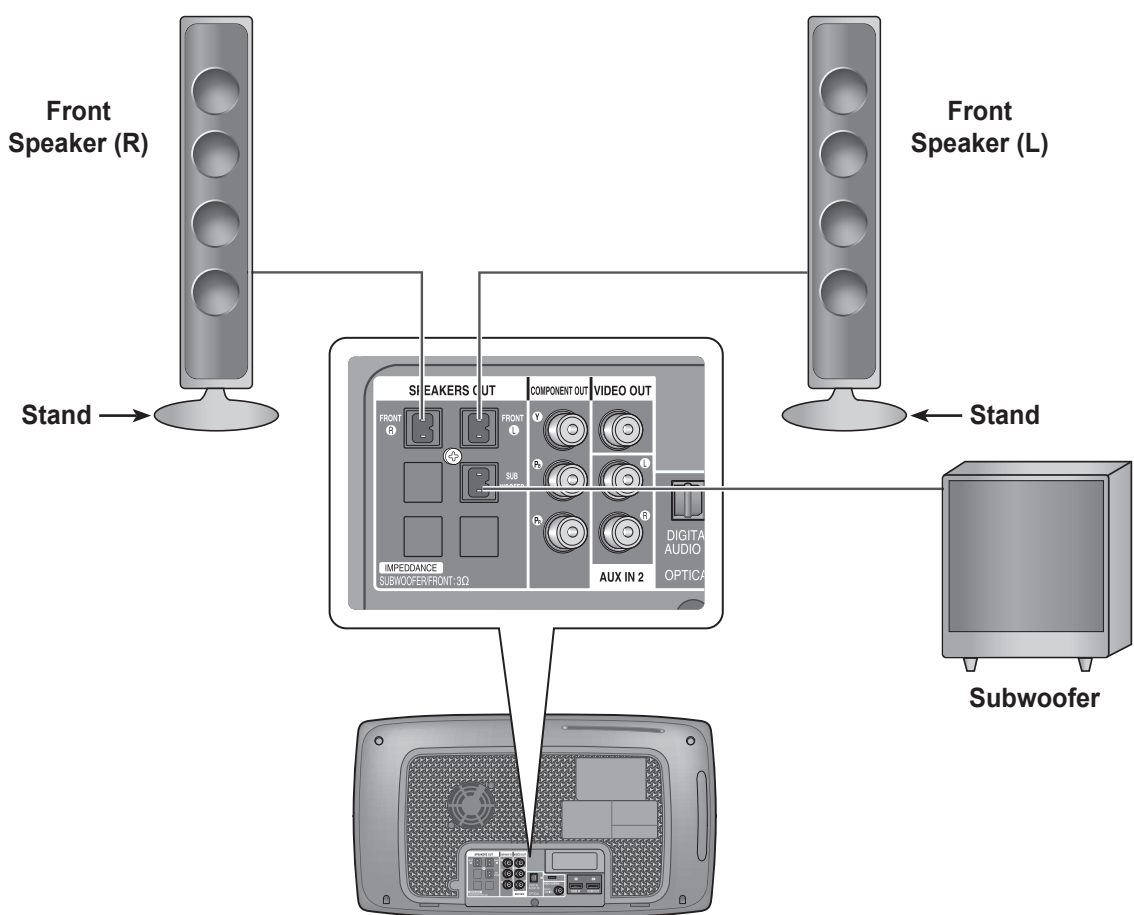

Part List

Loc. No.	Code No.	Description;Specification	Q'ty	SNA	Remark
Front Speaker (L)	AH81-04787A	SPEAKER-FRONT-LEFT;PS-X725,FRONT SPEAKER,CHANNEL :LEFT,-,-,-,-	1	SA	
Front Speaker (R)	AH81-04786A	SPEAKER-FRONT-RIGHT; PS-X725,FRONT SPEAKER,CHANNEL :RIGHT,-,-,-,-	1	SA	
Subwoofer	AH81-05021A	SPEAKER-SUBWOOFER SPEAKER SYSTEM;PS-X720,SPEAKER SYSTEM,FOR SUBWOOFER SPK,-	1	SA	
Speaker Wire	AH81-04798A	SPEAKER-SPK WIRE;PS-X720,SPK WIRE,3 PCS IN A BAG,4M*3,-,-,-	1	SA	
Stand	AH81-04993A	SPEAKER-STAND ASS'Y;PS-X725,STAND ASS'Y,-,-,-,-	2	SA	

5-4 Electrical Part List

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
	AH59-02144C	REMOCON-ASSY;HT-X720-EXP,SAMSUNG,23	1	SA			AH63-01838A	COVER-STAND SATELLITE;PS-X720,ABS+P	1	SA	
	AH83-00021A	CKD-CASE-TOP;VR9060,PMMA+ABS(SF-050	1	SNA							
	AH83-00022A	CKD-CASE-BOTTOM;VR9060,ABS(HF-0680	1	SNA			AH63-01840A	COVER-STAND BASE;PS-X720,ABS+PMMA	1	SA	
	AH83-00023A	CKD-RUBBER-KEY;VR9060,SILICONE-RUBB	1	SNA			AH81-03945A	SPEAKER-FOOT;PS-X725,PORON FOOT,FOR	4	SA	
	AH83-00024A	CKD-SPRING-REMOCON(+);VR9060,SUS 30	1	SNA			AH81-04792A	SPEAKER-FRONT CUSHION-TOP;PS-X725,F	1	SA	
							AH81-04793A	SPEAKER-FRONT CUSHION-BTM;PS-X725,F	1	SA	
	AH83-00025A	CKD-SPRING-REMOCON(-);VR9060,SUS 30	1	SNA							
	AH83-00026A	CKD-SPRING-REMOCON(C);VR9060,SUS 30	1	SNA			AH59-02169B	SPEAKER SYSTEM-SUBWOOFER;PS-X720,SU	1	SNA	
	AH83-00027A	CKD-SCREW;VR9060,TAP,M2*5	1	SNA			AH81-04796A	SPEAKER-SUBWOOFER CUSHION-TOP;PS-X7	2	SA	
	AH83-00028A	CKD-PE-BAG;VR9060,HDPE/NITRON/HDPE,	1	SNA			AH81-04798A	SPEAKER-SPK WIRE;PS-X720,SPK WIRE,3	1	SA	
	AH83-00029A	CKD-PASSED-LABEL;VR9060,ART 90g(WHI	1	SNA			AH81-05021A	SPEAKER-SUBWOOFER SPEAKER SYST;PS-X	1	SA	
							AH64-05009A	PANEL-TOP SUBWOOFER;PS-X725,HIPS	1	SA	
	AH83-00030A	CKD-PCB;VR9060,FR-1,40.0*213*1.6T	1	SNA							
	AH83-00031A	CKD-R-CHIP;VR9060,22,J,1/8W,2012,SM	1	SNA			AH64-05010A	PANEL-BTM SUBWOOFER;PS-X725,HIPS	1	SA	
	AH83-00032A	CKD-C-CHIP;VR9060,104,Z,50V,2012,SM	1	SNA			AH64-05060A	PANEL FRONT-SUBWOOFER;PS-X725,HIPS,	1	SA	
	AH83-00033A	CKD-LED-IR;VR9060,S15312-H,CLEAR,5.	1	SNA			AH81-03859A	SPEAKER-UNIT;PS-X310,SPEAKER UNIT,-	1	SA	
	AH83-00034A	CKD-LED-CHIP;VR9060,SY1216-C,ORANGE	2	SNA			AH81-04797A	SPEAKER-SUBWOOFER FOOT;PS-X725,SUB	4	SA	
							AH81-04801A	SPEAKER-TREMINAL;PS-X725,TERMINAL,-	1	SNA	
	AH83-00035A	CKD-R-CHIP;VR9060,4.7,J,1/8W,2012,S	1	SNA							
	AH83-00036A	CKD-TR-CHIP;VR9060,STC3265Y/2SC5344	1	SNA			AH81-04810A	SPEAKER-SUBWOOFER LABEL;PS-X725,SU	1	SNA	
	AH83-00040A	CKD-IC-MCU;VR9047,SILICONE-RUBBER,	1	SNA							
	AK83-01003A	CKD-DOOR-BATTERY;VR9047,ABS(HF-0680	1	SNA			AH97-00846A	ASSY SUB MATERIAL;AH97-00846A,-,-,-	1	SNA	
	AK83-01013A	CKD-E-CAPACITOR;VR9047,47uF,16V,M,5	1	SNA			0201-001356	CEMEDINE;A121		0.003	SNA
	AK83-01017A	CKD-RESONATOR-CERAMIC;VR9047,4.0MHz	1	SNA			0201-001357	ADHESIVE-STRL;THREE BOND 1401B,GRN,		0.5	SNA
						FIL	0203-000007	TAPE-FILAMENT;T0.15,L55M,TRP		0.1	SNA
	AH59-02168B	SPEAKER SYSTEM;PS-X720,FRONT SPEAKE	1	SNA			0203-001100	TAPE-OPP MASKING;OPP/W75/CLR,T0.05,		1.5	SNA
	AH81-04786A	SPEAKER-FRONT-RIGHT;PS-X725,FRONT S	1	SA							
	AH81-04987A	SPEAKER-SPEAKER ASSY--RIGHT;PS-X72	1	SA			0203-001362	TAPE-DOUBLE FACE;#570 W10X50M CLR		0.1	SNA
	AH61-02759A	CASE-REAR FRONT;PS-X720,ABS+PMMA,2.	1	SA			0205-001366	GREASE-SILICON;T4110		1.4	SNA
	AH61-02764A	FRAME-NET FRONT;PS-X720,ABS+PMMA	1	SA							
	AH63-01839A	COVER-STAND SUPPORT;PS-X720,ABS+PMM	1	SA			PCB-BLUETOOTH	AH92-02839A	ASSY PCB-BLUETOOTH;-,-,HT-X715,BLUETO	1	SA
	AH64-04943A	PANEL FRONT-FRONT;PS-X720,ABS+PMMA,	1	SA			ANT1	AH42-00029A	ANTENNA PIFA;ACS2450OCBXX,HT-X310,2	1	SA
	AH64-04950A	DECORATION-BTM;PS-X720,HIPS,2.7	1	SA			BD1	3301-001364	BEAD-SMD;1000ohm,1608,150mA,TP,1085	1	SA
	AH81-04801A	SPEAKER-TREMINAL;PS-X725,TERMINAL,-	1	SNA			BD2	3301-001364	BEAD-SMD;1000ohm,1608,150mA,TP,1085	1	SA
	AH81-04804A	SPEAKER-FRONT CONNECT WIRE;PS-X725	1	SA			BD3	3301-001364	BEAD-SMD;1000ohm,1608,150mA,TP,1085	1	SA
	AH81-04805A	SPEAKER-FORNT LABEL-RIGHT;PS-X725,	1	SNA		BT_PCB	AH41-01170A	PCB-BLUETOOTH;HT-X810,FR4,2,T1.6,98		0.05	SA
	AH81-04814A	SPEAKER-FRONT SPK UNIT;PS-X725,FRON	2	SA		C10	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,1608		1	SA
	AH81-04818A	SPEAKER-TWEETER SPK UNIT;PS-X725,TW	1	SA		C11	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160		1	SA
	AH81-04991A	SPEAKER-NET ASSY--FRONT;PS-X725,NE	1	SA		C12	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160		1	SA
	AH81-04993A	SPEAKER-STAND ASSY;PS-X725,STAND A	1	SA		C13	2203-006427	C-CER,CHIP;4700nF,10%,16V,X5R,TP,20		1	SA
	AH61-02767A	NECK-STAND FRONT;PS-X720,ABS	1	SA		C14	2203-006427	C-CER,CHIP;4700nF,10%,16V,X5R,TP,20		1	SA
	AH63-01838A	COVER-STAND SATELLITE;PS-X720,ABS+P	1	SA		C16	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160		1	SA
	AH63-01840A	COVER-STAND BASE;PS-X720,ABS+PMMA	1	SA		C17	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160		1	SA
	AH81-03945A	SPEAKER-FOOT;PS-X725,PORON FOOT,FOR	4	SA		C18	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608		1	SA
	AH81-04787A	SPEAKER-FRONT-LEFT;PS-X725,FRONT SP	1	SA		C19	2203-000332	C-CER,CHIP;0.012nF,5%,50V,C0G,1608		1	SA
	AH81-04988A	SPEAKER-SPEAKER ASSY--LEFT;PS-X725	1	SA		C2	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,1608		1	SA
	AH61-02759A	CASE-REAR FRONT;PS-X720,ABS+PMMA,2.	1	SA		C21	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160		1	SA
	AH61-02764A	FRAME-NET FRONT;PS-X720,ABS+PMMA	1	SA		C22	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608		1	SA
	AH63-01839A	COVER-STAND SUPPORT;PS-X720,ABS+PMM	1	SA		C23	2203-006427	C-CER,CHIP;4700nF,10%,16V,X5R,TP,20		1	SA
	AH64-04943A	PANEL FRONT-FRONT;PS-X720,ABS+PMMA,	1	SA		C4	2203-001083	C-CER,CHIP;0.0050nF,0.1pF,50V,NP0,1		1	SA
	AH64-04950A	DECORATION-BTM;PS-X720,HIPS,2.7	1	SA		C5	2203-001083	C-CER,CHIP;0.0050nF,0.1pF,50V,NP0,1		1	SA
	AH81-04801A	SPEAKER-TREMINAL;PS-X725,TERMINAL,-	1	SNA		C6	2203-006427	C-CER,CHIP;4700nF,10%,16V,X5R,TP,20		1	SA
	AH81-04804A	SPEAKER-FRONT CONNECT WIRE;PS-X725	1	SA		C7	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,1608		1	SA
	AH81-04806A	SPEAKER-FORNT LABEL-LEFT;PS-X725,F	1	SNA		C8	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160		1	SA
	AH81-04814A	SPEAKER-FRONT SPK UNIT;PS-X725,FRON	2	SA		C9	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608		1	SA
	AH81-04818A	SPEAKER-TWEETER SPK UNIT;PS-X725,TW	1	SA		CON1	3708-002061	CONNECTOR-FPC/FFC/PIC;7P,1mm,SMD-A,		1	SA
	AH81-04991A	SPEAKER-NET ASSY--FRONT;PS-X725,NE	1	SA		IC1	4709-001606	IC-BLUETOOTH MODULE;BTM39B2SB,-,-,		1	SA
	AH81-04993A	SPEAKER-STAND ASSY;PS-X725,STAND A	1	SA		IC2	1203-002776	IC-POS.FIXED REG.;G914D/MIC5255,SO		1	SA
	AH61-02767A	NECK-STAND FRONT;PS-X720,ABS	1	SA		IC3	1203-002776	IC-POS.FIXED REG.;G914D/MIC5255,SO		1	SA

Exploded View & Part List

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
IC4	0801-000305	IC-CMOS LOGIC;7SU04,INVERTER,SOP,5P	1	SA		KEYC11	2203-002709	C-CER,CHIP;100nF,+80-20%,16V,Y5V,10	1	SA	
						KEYC12	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,1005	1	SA	
L1	2203-002663	C-CER,CHIP;3pF,10%,50V,X7R,TP,1608,	1	SA							
L2	2703-003354	INDUCTOR-SMD;8.2nH,5%,1608	1	SNA		KEYC13	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,1005	1	SA	
R1	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	1	SA		KEYC14	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,1005	1	SA	
R2	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	1	SA		KEYC15	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,1005	1	SA	
R3	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA		KEYC16	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
						KEYC18	2203-002709	C-CER,CHIP;100nF,+80-20%,16V,Y5V,10	1	SA	
R4	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA							
R5	2007-001026	R-CHIP;560Kohm,5%,1/10W,TP,1608	1	SA		KEYC19	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,1005	1	SA	
R6	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		KEYC2	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,1005	1	SA	
R7	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		KEYC3	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,1005	1	SA	
R8	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		KEYC4	2203-002709	C-CER,CHIP;100nF,+80-20%,16V,Y5V,10	1	SA	
						KEYC5	2203-002709	C-CER,CHIP;100nF,+80-20%,16V,Y5V,10	1	SA	
R9	2007-000305	R-CHIP;10Mohm,5%,1/10W,TP,1608	1	SA							
X-TAL1	2801-003856	CRYSTAL-SMD;0.032768MHz,20ppm,28-AC	1	SA		KEYC6	2203-002709	C-CER,CHIP;100nF,+80-20%,16V,Y5V,10	1	SA	
	AH44-00199A	SMPS;HT-X715,HT-X715,HALF BRIDGE,15	1	SA		KEYC7	2203-002709	C-CER,CHIP;100nF,+80-20%,16V,Y5V,10	1	SA	
	AH61-02708A	HOLDER-SMPS;HT-X720,HIPS 94 V0,T2.5	1	SA		KEYC8	2203-002709	C-CER,CHIP;100nF,+80-20%,16V,Y5V,10	1	SA	
	AH63-01195F	CUSHION-EMI;HT-A100,T10,W10,L10,WHI	1	SNA		KEYC9	2203-002709	C-CER,CHIP;100nF,+80-20%,16V,Y5V,10	1	SA	
						KEYCN1	3708-001686	CONNECTOR-FPC/FFC/PIC;11P,1mm,SMD-A	1	SA	
	AH63-01439B	SHEET-CONDUCTIVE;MAX-DA70,PC,T1,W10	1	SA							
	AH99-10014D	ASSY AUTO INSERT-PCB-BLUETOOTH;-HT	1	SNA		KEYCN2	3708-002061	CONNECTOR-FPC/FFC/PIC;7P,1mm,SMD-A,	1	SA	
						KEYD1	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA	
						KEYD2	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA	
PCB-VFD	AH92-02967A	ASSY PCB-VFD;HOME THEATER,HT-X725,V	1	SA		KEYD3	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA	
BTCN1	3708-001839	CONNECTOR-FPC/FFC/PIC;7P,1mm,STRAIG	1	SA		KEYD4	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA	
BUZZER1	3002-001134	BUZZER-PIEZO;85dB,12V,2K-4KHz,BK	1	SA							
FCN1	3708-001438	CONNECTOR-FPC/FFC/PIC;22P,1.25mm,AN	1	SA		KEYD5	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA	
FJMP2	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SA		KEYD6	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA	
						KEYD7	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA	
FJMP4	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SA		KEYD9	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA	
FJMP5	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SA		KEYIC1	1209-001851	IC-SENSOR;MST08S16,SOP,16P,9.9x3.9m	1	SA	
FJMP6	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SA							
FJMP8	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SA		KEYR1	2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	1	SA	
FJMP9	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SA		KEYR10	2007-003012	R-CHIP;2.2Mohm,5%,1/16W,TP,1005	1	SA	
						KEYR11	2007-003012	R-CHIP;2.2Mohm,5%,1/16W,TP,1005	1	SA	
HOLDER-VFD	AH61-02709A	HOLDER-VFD;HT-X720,ABS,T2.5,W45.5,L	1	SA		KEYR12	2007-003012	R-CHIP;2.2Mohm,5%,1/16W,TP,1005	1	SA	
REM1	0609-001202	MODULE REMOCON;HORIZONTAL,12.4mm,TR	1	SA		KEYR13	2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	1	SA	
VFD1	AH97-02494A	ASSY-VFD DISPLAY;VFD (Driver IC+,GP	1	SA							
VFDC1	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,+80-20%,5	1	SA		KEYR14	2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	1	SA	
VFDC10	2401-000414	C-AL;10uF,20%,16V,GP,TP,4x7,5	1	SA		KEYR15	2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	1	SA	
						KEYR16	2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	1	SA	
VFDC11	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	1	SA		KEYR19	2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	1	SA	
VFDC2	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	1	SA		KEYR2	2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	1	SA	
VFDC3	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,+80-20%,5	1	SA							
VFDC4	2401-000385	C-AL;10uF,20%,100V,GP,TP,6.3x11,5	1	SA		KEYR3	2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	1	SA	
VFDC5	2202-000121	C-CERAMIC,MLC-AXIAL;0.1nF,10%,50V,Y	1	SA		KEYR4	2007-003012	R-CHIP;2.2Mohm,5%,1/16W,TP,1005	1	SA	
						KEYR5	2007-003012	R-CHIP;2.2Mohm,5%,1/16W,TP,1005	1	SA	
VFDC6	2401-000414	C-AL;10uF,20%,16V,GP,TP,4x7,5	1	SA		KEYR6	2007-003012	R-CHIP;2.2Mohm,5%,1/16W,TP,1005	1	SA	
VFDC7	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,+80-20%,5	1	SA		KEYR7	2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	1	SA	
VFDC8	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,+80-20%,5	1	SA							
VFDC9	2401-000414	C-AL;10uF,20%,16V,GP,TP,4x7,5	1	SA		KEYR8	2007-003012	R-CHIP;2.2Mohm,5%,1/16W,TP,1005	1	SA	
VFDR1	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3	1	SA		KEYR9	2007-003012	R-CHIP;2.2Mohm,5%,1/16W,TP,1005	1	SA	
						X725_KEY_PCB	AH41-01187A	PCB-KEY;HT-X725 KEY PCB,EPOXY,2,0,T	0.125	SNA	
VFDR2	2001-000302	R-CARBON;10ohm,5%,1/8W,AA,TP,1.8x3.	1	SA		AH99-00191A	ASSY AUTO INSERT-KEY;HOME THEATER,H	1	SNA		
VFDR3	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3	1	SA							
VFDR4	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3	1	SA		PCB-MAIN	AH92-02969D	ASSY PCB MAIN-EUR;HOME THEATER,HT-X	1	SA	
VFDR5	2001-000302	R-CARBON;10ohm,5%,1/8W,AA,TP,1.8x3.	1	SA		AD20	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA	
VFDR6	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3	1	SA		AD21	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA	
						AD22	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA	
VFDR7	2001-000319	R-CARBON;120Kohm,5%,1/8W,AA,TP,1.8x	1	SA		AD23	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA	
VFDR8	2001-000290	R-CARBON;10Kohm,5%,1/8W,AA,TP,1.8x3	1	SA							
VFDZD1	0403-001131	DIODE-ZENER;UZ3.3BSA,3.16-3.38V,500	1	SA		AD24	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA	
X725_VFD_PCB	AH41-01186A	PCB-VFD;HT-X725 VFD PCB,FR1,1,0,T1.	0.5	SNA		AD25	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA	
	AH99-00190A	ASSY AUTO INSERT-VFD;HOME THEATER,H	1	SNA		ADC1	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	SA	
						ADC10	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
PCB-KEY	AH92-02968A	ASSY PCB-KEY;HOME THEATER,HT-X725,K	1	SA		ADC12	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
KEYC1	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,1005	1	SA							
KEYC10	2203-002709	C-CER,CHIP;100nF,+80-20%,16V,Y5V,10	1	SA		ADC13	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
ADC14	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608	1	SA		AJ01	3716-001275	TERMINAL-BLOCK;WIRE TYPE,12P,21mm,4	1	SA	
ADC15	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608	1	SA		AJ02	3711-000814	HEADER-BOARD TO CABLE;BOX,2P,1R,2.5	1	SA	
ADC16	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		AJ03	AH39-01039A	WIRE HARNESS;HT-X725,6P-6B F.L/W #2	1	SA	
ADC17	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		AL01	AH27-00069A	COIL FILTER;8019P-02-220L,22uH,0.1o	1	SA	
ADC18	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		AL02	AH27-00069A	COIL FILTER;8019P-02-220L,22uH,0.1o	1	SA	
ADC19	2203-000783	C-CER,CHIP;0.33nF,5%,50V,C0G,1608	1	SA		AL03	AH27-00069A	COIL FILTER;8019P-02-220L,22uH,0.1o	1	SA	
ADC2	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		AMC1	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA	
ADC20	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		AMC10	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA	
ADC21	2402-000130	C-AL,SMD;2.2uF,20%,50V,GP,TP,4.3x4.	1	SA		AMC100	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	SA	
ADC22	2402-000130	C-AL,SMD;2.2uF,20%,50V,GP,TP,4.3x4.	1	SA		AMC101	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADC23	2203-000783	C-CER,CHIP;0.33nF,5%,50V,C0G,1608	1	SA		AMC102	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
ADC24	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		AMC103	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	SA	
ADC25	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		AMC104	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADC26	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		AMC105	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
ADC27	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		AMC106	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	SA	
ADC28	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2	1	SA		AMC107	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADC29	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		AMC108	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
ADC3	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		AMC109	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	SA	
ADC32	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		AMC11	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA	
ADC33	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		AMC110	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADC4	2402-000130	C-AL,SMD;2.2uF,20%,50V,GP,TP,4.3x4.	1	SA		AMC111	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
ADC5	2402-000130	C-AL,SMD;2.2uF,20%,50V,GP,TP,4.3x4.	1	SA		AMC112	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	SA	
ADC6	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		AMC113	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADC7	2402-000130	C-AL,SMD;2.2uF,20%,50V,GP,TP,4.3x4.	1	SA		AMC114	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
ADC8	2402-000130	C-AL,SMD;2.2uF,20%,50V,GP,TP,4.3x4.	1	SA		AMC115	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADC9	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		AMC116	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADCL1	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		AMC117	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA	
ADCL2	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		AMC118	2203-001386	C-CER,CHIP;100nF,10%,100V,X7R,TP,32	1	SA	
ADCL4	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		AMC119	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADCL5	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		AMC12	2203-000140	C-CER,CHIP;1.5nF,10%,50V,X7R,1608	1	SA	
ADIC1	1002-001548	IC-A/D CONVERTER;CS5345,24,LQFP,48P	1	SA		AMC120	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADQ1	0504-000128	TR-DIGITAL;:NPN,200MW,22K/22K,SOT-	1	SA		AMC121	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADQ2	0504-000156	TR-DIGITAL;KSR2103,PNP,200MW,22K/22	1	SA		AMC122	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR1	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	1	SA		AMC123	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR10	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		AMC124	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA	
ADR11	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		AMC125	2203-001386	C-CER,CHIP;100nF,10%,100V,X7R,TP,32	1	SA	
ADR12	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		AMC126	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR13	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		AMC127	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR14	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA		AMC128	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR15	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	1	SA		AMC129	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR16	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	1	SA		AMC13	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA	
ADR17	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA		AMC130	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR18	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	1	SA		AMC131	2203-001386	C-CER,CHIP;100nF,10%,100V,X7R,TP,32	1	SA	
ADR19	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	1	SA		AMC132	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR2	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	1	SA		AMC133	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR3	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA		AMC134	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR4	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA		AMC135	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR5	2007-000106	R-CHIP;220Kohm,5%,1/10W,TP,1608	1	SA		AMC136	2203-001386	C-CER,CHIP;100nF,10%,100V,X7R,TP,32	1	SA	
ADR6	2007-000106	R-CHIP;220Kohm,5%,1/10W,TP,1608	1	SA		AMC137	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR7	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	1	SA		AMC138	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ADR8	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	1	SA		AMC139	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA	
ADR9	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		AMC14	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA	
AIC1	1003-002143	IC-GATE DRIVER;IRS2092STRPBF,SOP,16	1	SA		AMC140	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AIC10	AH14-10003E	IC;KIA7812PI,TO-220	1	SA		AMC141	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AIC11	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,P	1	SA		AMC142	2402-000130	C-AL,SMD;2.2uF,20%,50V,GP,TP,4.3x4.	1	SA	
AIC2	1003-002143	IC-GATE DRIVER;IRS2092STRPBF,SOP,16	1	SA		AMC143	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AIC3	1003-002143	IC-GATE DRIVER;IRS2092STRPBF,SOP,16	1	SA		AMC144	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AIC7	1201-000163	IC-OP AMP;4560,SOP,8P,173MIL,DUAL,1	1	SA		AMC145	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.	1	SA	
AIC8	1201-000163	IC-OP AMP;4560,SOP,8P,173MIL,DUAL,1	1	SA							

Exploded View & Part List

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
AMC146	2203-001386	C-CER,CHIP;100nF,10%,100V,X7R,TP,32	1	SA		AMC27	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA	
AMC147	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC28	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA	
						AMC29	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA	
AMC148	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC3	2203-000140	C-CER,CHIP;1.5nF,10%,50V,X7R,1608	1	SA	
AMC15	2203-000140	C-CER,CHIP;1.5nF,10%,50V,X7R,1608	1	SA							
AMC150	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC30	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA	
AMC151	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC31	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
AMC153	2203-001386	C-CER,CHIP;100nF,10%,100V,X7R,TP,32	1	SA		AMC32	2402-001049	C-AL,SMD;10uF,20%,16V,GP,TP,3.3x3.3	1	SA	
						AMC33	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AMC154	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC34	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
AMC155	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA							
AMC157	2305-000407	C-FILM,LEAD-PEF;470nF,5%,100V,TP,10	1	SA		AMC35	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AMC158	2305-000704	C-FILM,LEAD-PEF;100nF,5%,250V,TP,16	1	SA		AMC36	2402-001049	C-AL,SMD;10uF,20%,16V,GP,TP,3.3x3.3	1	SA	
AMC159	2305-000407	C-FILM,LEAD-PEF;470nF,5%,100V,TP,10	1	SA		AMC37	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
						AMC38	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
AMC16	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA		AMC39	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AMC160	2305-000704	C-FILM,LEAD-PEF;100nF,5%,250V,TP,16	1	SA							
AMC161	2305-000407	C-FILM,LEAD-PEF;470nF,5%,100V,TP,10	1	SA		AMC4	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA	
AMC162	2305-000704	C-FILM,LEAD-PEF;100nF,5%,250V,TP,16	1	SA		AMC40	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AMC169	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608	1	SA		AMC41	2402-001049	C-AL,SMD;10uF,20%,16V,GP,TP,3.3x3.3	1	SA	
						AMC42	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
AMC17	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA		AMC43	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
AMC170	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608	1	SA							
AMC171	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608	1	SA		AMC44	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AMC172	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608	1	SA		AMC45	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AMC173	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608	1	SA		AMC46	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
						AMC47	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
AMC174	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608	1	SA		AMC49	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AMC175	2203-000989	C-CER,CHIP;47nF,10%,50V,X7R,2012	1	SA							
AMC176	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608	1	SA		AMC5	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA	
AMC177	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC50	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AMC179	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC51	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
						AMC53	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AMC18	2203-000140	C-CER,CHIP;1.5nF,10%,50V,X7R,1608	1	SA		AMC54	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
AMC180	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA							
AMC181	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC55	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AMC182	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC56	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
AMC183	2401-004447	C-AL;680uF,20%,50V,LZ,TP,12.5x25mm,	1	SA		AMC58	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
						AMC59	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA	
AMC184	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC6	2203-000140	C-CER,CHIP;1.5nF,10%,50V,X7R,1608	1	SA	
AMC185	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA							
AMC186	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC60	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
AMC187	2402-000008	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6	1	SA		AMC61	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA	
AMC188	2203-000975	C-CER,CHIP;47nF,10%,25V,X7R,TP,1608	1	SA		AMC62	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA	
						AMC63	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA	
AMC189	2402-000120	C-AL,SMD;10uF,20%,50V,GP,TP,6.6x6.6	1	SA		AMC64	2203-005886	C-CER,CHIP;0.15nF,5%,200V,COG,TP,20	1	SA	
AMC19	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA							
AMC190	2402-000008	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6	1	SA		AMC65	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA	
AMC191	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC66	2203-006336	C-CER,CHIP;1000nF,10%,25V,X5R,3216	1	SA	
AMC192	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2	1	SA		AMC67	2203-005886	C-CER,CHIP;0.15nF,5%,200V,COG,TP,20	1	SA	
						AMC68	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA	
AMC193	2402-000120	C-AL,SMD;10uF,20%,50V,GP,TP,6.6x6.6	1	SA		AMC69	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA	
AMC194	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6	1	SA							
AMC195	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC7	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA	
AMC196	2402-000120	C-AL,SMD;10uF,20%,50V,GP,TP,6.6x6.6	1	SA		AMC70	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA	
AMC2	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA		AMC71	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA	
						AMC72	2203-006336	C-CER,CHIP;1000nF,10%,25V,X5R,3216	1	SA	
AMC20	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA		AMC73	2203-005886	C-CER,CHIP;0.15nF,5%,200V,COG,TP,20	1	SA	
AMC21	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA							
AMC210	2401-004447	C-AL;680uF,20%,50V,LZ,TP,12.5x25mm,	1	SA		AMC74	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA	
AMC211	2401-004447	C-AL;680uF,20%,50V,LZ,TP,12.5x25mm,	1	SA		AMC75	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA	
AMC212	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		AMC76	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA	
						AMC77	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA	
AMC213	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		AMC78	2203-006336	C-CER,CHIP;1000nF,10%,25V,X5R,3216	1	SA	
AMC22	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA							
AMC23	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA		AMC79	2203-005886	C-CER,CHIP;0.15nF,5%,200V,COG,TP,20	1	SA	
AMC24	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA		AMC8	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA	
AMC25	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA		AMC80	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA	
						AMC81	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA	
AMC26	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		AMC82	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA	

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
AMC83	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA		AMR108	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SA	
AMC84	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	SA		AMR109	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
AMC85	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA		AMR11	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA	
AMC86	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA		AMR110	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AMC87	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA		AMR111	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA	
						AMR112	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
AMC88	2203-005886	C-CER,CHIP;0.15NF,5%,200V,C0G,TP,20	1	SA		AMR113	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SA	
AMC89	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA							
AMC9	2203-000140	C-CER,CHIP;1.5nF,10%,50V,X7R,1608	1	SA		AMR114	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AMC90	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	SA		AMR115	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA	
AMC91	2203-005886	C-CER,CHIP;0.15NF,5%,200V,C0G,TP,20	1	SA		AMR116	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
						AMR117	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SA	
AMC92	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA		AMR118	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AMC93	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA							
AMC94	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA		AMR119	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA	
AMC95	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	1	SA		AMR12	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA	
AMC96	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	SA		AMR120	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
						AMR121	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AMC97	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	1	SA		AMR122	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA	
AMC98	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA							
AMC99	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,1608	1	SA		AMR123	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
AMD1	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA		AMR124	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMD10	0402-001427	DIODE-RECTIFIER;ES1D,200V,1A,DO-214	1	SA		AMR125	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
						AMR127	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMD11	0401-001166	DIODE-SWITCHING;BAV20WS-V,150V,250m	1	SA		AMR128	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AMD12	0402-001427	DIODE-RECTIFIER;ES1D,200V,1A,DO-214	1	SA							
AMD19	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA		AMR129	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA	
AMD2	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA		AMR13	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
AMD20	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		AMR130	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
						AMR131	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMD21	0403-001483	DIODE-ZENER;UDZS18B,17.56-18.35V,20	1	SA		AMR133	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMD22	0403-001398	DIODE-ZENER;UDZ2.4B,2.43-2.63V,200M	1	SA							
AMD3	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA		AMR134	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMD4	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA		AMR135	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AMD5	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA		AMR136	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA	
						AMR137	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMD6	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,	1	SA		AMR139	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
AMD7	0401-001166	DIODE-SWITCHING;BAV20WS-V,150V,250m	1	SA							
AMD8	0402-001427	DIODE-RECTIFIER;ES1D,200V,1A,DO-214	1	SA		AMR14	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA	
AMD9	0401-001166	DIODE-SWITCHING;BAV20WS-V,150V,250m	1	SA		AMR140	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMPD1	0402-000309	DIODE-RECTIFIER;1SR154-400,400V,1A,	1	SA		AMR141	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
						AMR142	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AMPD2	0402-000309	DIODE-RECTIFIER;1SR154-400,400V,1A,	1	SA		AMR143	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA	
AMPD3	0401-001166	DIODE-SWITCHING;BAV20WS-V,150V,250m	1	SA							
AMPR1	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA		AMR144	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMPR10	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA		AMR145	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
AMPR11	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA		AMR146	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
						AMR148	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMPR12	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA		AMR149	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AMPR2	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA							
AMPR3	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA		AMR15	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
AMPR4	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA		AMR150	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA	
AMPR5	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA		AMR151	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
						AMR152	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMPR6	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA		AMR153	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMPR7	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA							
AMPR8	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA		AMR155	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMR1	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA		AMR156	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AMR10	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA		AMR157	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA	
						AMR158	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
AMR100	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA		AMR159	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMR101	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SA							
AMR102	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA		AMR16	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA	
AMR103	2003-000674	R-METAL OXIDE(S);39ohm,5%,1W,AA,TP,	1	SA		AMR160	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
AMR104	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA		AMR162	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
						AMR163	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA	
AMR105	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SA		AMR164	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA	
AMR106	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA							
AMR107	2007-007790	R-CHIP;20ohm,1%,1W,TP,6432	1	SA		AMR165	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA	

Exploded View & Part List

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
AMR166	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA		AMR219	2007-007790	R-CHIP;20ohm,1%,1W,TP,6432	1	SA	
AMR167	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA		AMR22	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA	
AMR168	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA		AMR220	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	1	SA	
AMR169	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA		AMR221	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	SA	
						AMR222	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	1	SA	
AMR17	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA							
AMR170	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA		AMR223	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	1	SA	
AMR171	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA		AMR224	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA	
AMR172	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA		AMR225	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AMR173	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA		AMR226	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	1	SA	
						AMR227	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA	
AMR174	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA							
AMR175	2007-007065	R-CHIP;10ohm,5%,1W,TP,6432	1	SA		AMR228	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA	
AMR176	2007-000496	R-CHIP;2.2Kohm,5%,1/4W,TP,3216	1	SA		AMR229	2007-000087	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	1	SA	
AMR177	2007-007065	R-CHIP;10ohm,5%,1W,TP,6432	1	SA		AMR23	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA	
AMR178	2007-000496	R-CHIP;2.2Kohm,5%,1/4W,TP,3216	1	SA		AMR230	2007-000091	R-CHIP;12Kohm,5%,1/10W,TP,1608	1	SA	
						AMR231	2007-000087	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	1	SA	
AMR179	2007-007065	R-CHIP;10ohm,5%,1W,TP,6432	1	SA							
AMR18	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA		AMR232	2007-000087	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	1	SA	
AMR180	2007-000496	R-CHIP;2.2Kohm,5%,1/4W,TP,3216	1	SA		AMR233	2007-000079	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	1	SA	
AMR181	2007-007065	R-CHIP;10ohm,5%,1W,TP,6432	1	SA		AMR234	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	SA	
AMR182	2007-000496	R-CHIP;2.2Kohm,5%,1/4W,TP,3216	1	SA		AMR235	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
						AMR236	2007-000100	R-CHIP;68Kohm,5%,1/10W,TP,1608	1	SA	
AMR183	2007-007065	R-CHIP;10ohm,5%,1W,TP,6432	1	SA							
AMR184	2007-000496	R-CHIP;2.2Kohm,5%,1/4W,TP,3216	1	SA		AMR237	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	1	SA	
AMR185	2007-007065	R-CHIP;10ohm,5%,1W,TP,6432	1	SA		AMR238	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	1	SA	
AMR186	2007-000496	R-CHIP;2.2Kohm,5%,1/4W,TP,3216	1	SA		AMR239	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	1	SA	
AMR187	2007-000039	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		AMR24	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA	
						AMR240	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	1	SA	
AMR188	2007-000039	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA							
AMR189	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	1	SA		AMR241	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	1	SA	
AMR19	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA		AMR242	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	1	SA	
AMR190	2007-000303	R-CHIP;10Kohm,5%,1/4W,TP,3216	1	SA		AMR243	2007-000100	R-CHIP;68Kohm,5%,1/10W,TP,1608	1	SA	
AMR191	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA		AMR244	2007-000100	R-CHIP;68Kohm,5%,1/10W,TP,1608	1	SA	
						AMR245	2007-000100	R-CHIP;68Kohm,5%,1/10W,TP,1608	1	SA	
AMR192	2007-000285	R-CHIP;100Kohm,5%,1/4W,TP,3216	1	SA							
AMR193	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA		AMR246	2007-000100	R-CHIP;68Kohm,5%,1/10W,TP,1608	1	SA	
AMR194	2007-000253	R-CHIP;1.5ohm,5%,1/4W,TP,3216	1	SA		AMR247	2007-000100	R-CHIP;68Kohm,5%,1/10W,TP,1608	1	SA	
AMR195	2007-000253	R-CHIP;1.5ohm,5%,1/4W,TP,3216	1	SA		AMR248	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
AMR196	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA		AMR249	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
						AMR25	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR197	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	1	SA							
AMR198	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA		AMR250	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
AMR199	2007-000464	R-CHIP;18ohm,5%,1/4W,TP,3216	1	SA		AMR251	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
AMR2	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA		AMR252	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
AMR20	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA		AMR253	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
						AMR254	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA	
AMR200	1404-001483	THERMISTOR-PTC;470ohm,50%,32V,TP	1	SA							
AMR201	2007-000285	R-CHIP;100Kohm,5%,1/4W,TP,3216	1	SA		AMR255	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	SA	
AMR202	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA		AMR256	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA	
AMR203	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA		AMR257	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	SA	
AMR204	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA		AMR258	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA	
						AMR259	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA	
AMR205	2007-001300	R-CHIP;56ohm,5%,1/2W,TP,5025	1	SA							
AMR206	2007-007750	R-CHIP;39ohm,1%,1W,TP,6432	1	SA		AMR26	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
AMR207	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA		AMR260	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	SA	
AMR208	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA		AMR261	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	SA	
AMR209	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA		AMR262	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA	
						AMR263	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA	
AMR21	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA							
AMR210	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA		AMR264	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA	
AMR211	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA		AMR265	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA	
AMR212	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	1	SA		AMR27	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
AMR213	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	1	SA		AMR28	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA	
						AMR29	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR214	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA							
AMR215	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	1	SA		AMR3	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR216	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA		AMR30	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
AMR217	2007-007790	R-CHIP;20ohm,1%,1W,TP,6432	1	SA		AMR300	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	1	SA	
AMR218	2007-007790	R-CHIP;20ohm,1%,1W,TP,6432	1	SA							

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
AMR301	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA		AMR76	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	1	SA	
AMR31	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA		AMR77	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	SA	
						AMR78	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR310	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA		AMR79	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR311	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA							
AMR312	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA		AMR8	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA	
AMR313	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA		AMR80	2007-000039	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
AMR314	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA		AMR81	2007-000265	R-CHIP;1.8Kohm,1%,1/10W,TP,1608	1	SA	
						AMR83	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR315	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	1	SA		AMR84	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR316	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA							
AMR317	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA		AMR85	2007-000039	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
AMR32	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA		AMR86	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	SA	
AMR33	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA		AMR87	2007-000265	R-CHIP;1.8Kohm,1%,1/10W,TP,1608	1	SA	
						AMR89	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR34	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA		AMR9	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR35	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA							
AMR36	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA		AMR90	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR37	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA		AMR91	2007-000039	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
AMR38	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA		AMR92	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	SA	
						AMR93	2007-000265	R-CHIP;1.8Kohm,1%,1/10W,TP,1608	1	SA	
AMR39	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	1	SA		AMR95	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR4	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA							
AMR40	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA		AMR96	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA	
AMR41	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA		AMR97	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SA	
AMR42	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	1	SA		AMR98	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
						AMR99	2003-000587	R-METAL OXIDE(S);22ohm,5%,1W,AA,TP,	1	SA	
AMR43	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA		AQ1	0501-000150	TR-SMALL SIGNAL;2SA1037,PNP,200mW,S	1	SA	
AMR44	2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA							
AMR45	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA		AQ10	0501-000479	TR-SMALL SIGNAL;KST42,NPN,350mW,SOT	1	SA	
AMR46	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA		AQ11	0504-000128	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-	1	SA	
AMR47	2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA		AQ12	0504-000128	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-	1	SA	
						AQ13	0501-000457	TR-SMALL SIGNAL;MMBT2222A/KST2222A,	1	SA	
AMR48	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA		AQ14	0504-000156	TR-DIGITAL;KSR2103,PNP,200MW,22K/22	1	SA	
AMR49	2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA							
AMR5	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA		AQ15	0502-001176	TR-POWER;KTC2026,NPN,2000mW,TO-220I	1	SA	
AMR50	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA		AQ16	0504-000128	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-	1	SA	
AMR51	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA		AQ17	0501-000150	TR-SMALL SIGNAL;2SA1037,PNP,200mW,S	1	SA	
						AQ2	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW	1	SA	
AMR52	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA		AQ3	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW	1	SA	
AMR53	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA							
AMR54	2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA		AQ4	0504-000128	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-	1	SA	
AMR55	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA		AQ5	0501-000150	TR-SMALL SIGNAL;2SA1037,PNP,200mW,S	1	SA	
AMR56	2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA		AQ6	0501-000150	TR-SMALL SIGNAL;2SA1037,PNP,200mW,S	1	SA	
						AQ7	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW	1	SA	
AMR57	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA		AQ8	0501-000457	TR-SMALL SIGNAL;MMBT2222A/KST2222A,	1	SA	
AMR58	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA							
AMR59	2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA		AQ9	0501-000479	TR-SMALL SIGNAL;KST42,NPN,350mW,SOT	1	SA	
AMR6	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA		ASSY	AH94-02237D	ASSY-NOR FLASH;HT-Z320,MX25L1605A,M	1	SNA	
AMR60	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	1	SA		AUXC1	2203-000236	C-CER,CHIP;0.1nF,5%,50V,COG,1608	1	SA	
						AUXC2	2203-000236	C-CER,CHIP;0.1nF,5%,50V,COG,1608	1	SA	
AMR61	2007-000039	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		AUXD1	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA	
AMR62	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	SA							
AMR63	2007-000265	R-CHIP;1.8Kohm,1%,1/10W,TP,1608	1	SA		AUXD2	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA	
AMR64	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	1	SA		AUXD3	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA	
AMR65	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	SA		AUXD4	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA	
						AUXD5	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA	
AMR66	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA		AUXD6	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA	
AMR67	2007-000039	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA							
AMR68	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	SA		AUXR1	2007-000106	R-CHIP;220Kohm,5%,1/10W,TP,1608	1	SA	
AMR69	2007-000265	R-CHIP;1.8Kohm,1%,1/10W,TP,1608	1	SA		AUXR2	2007-000106	R-CHIP;220Kohm,5%,1/10W,TP,1608	1	SA	
AMR7	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	1	SA		AUXR3	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	1	SA	
						AUXR4	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	1	SA	
AMR70	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	1	SA		AVC01	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
AMR71	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	1	SA							
AMR72	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA		AVC02	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
AMR73	2007-000039	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		AVC03	2203-005819	C-CER,CHIP;1000nF,+80-20%,16V,Y5V,T	1	SA	
AMR74	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	SA		AVC04	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
						AVC05	2203-005819	C-CER,CHIP;1000nF,+80-20%,16V,Y5V,T	1	SA	
AMR75	2007-000265	R-CHIP;1.8Kohm,1%,1/10W,TP,1608	1	SA		AVC06	2203-005819	C-CER,CHIP;1000nF,+80-20%,16V,Y5V,T	1	SA	

Exploded View & Part List

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
AVC07	2203-005819	C-CER,CHIP;1000nF,+80-20%,16V,Y5V,T	1	SA		DSPR15	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	1	SA	
AVC08	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		DSPR16	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	1	SA	
AVC09	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		DSPR17	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
AVC10	2402-001096	C-AL,SMD;220UF,20%,16V,GP,TP,6.6x6.	1	SA		DSPR18	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
AVC11	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.	1	SA		DSPR19	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
AVC12	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.	1	SA		DSPR2	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
AVC13	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.	1	SA		DSPR20	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
AVC14	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,160	1	SA		DSPR21	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
AVC15	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,160	1	SA		DSPR22	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
AVC16	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,160	1	SA		DSPR23	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
AVC17	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,160	1	SA		DSPR24	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,	1	SA	
AVJACK1	3722-002574	JACK-PIN;6P,TIN,RD/BU/GN/RD/WT/YL,S	1	SA		DSPR25	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AVR01	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		DSPR26	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
AVR02	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		DSPR27	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	1	SA	
AVR03	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		DSPR28	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AVR04	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		DSPR3	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
AVR05	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		DSPR4	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
AVR06	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		DSPR5	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	1	SA	
AVR08	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		DSPR6	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P	1	SA	
AVR09	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		DSPR7	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
AVR10	2007-000125	R-CHIP;3.9Kohm,5%,1/10W,TP,1608	1	SA		DSPR8	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	1	SA	
AVR11	2007-000125	R-CHIP;3.9Kohm,5%,1/10W,TP,1608	1	SA		DSPR9	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
AVR12	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA		DSPX1	2801-004021	CRYSTAL-SMD;24.576MHz,20ppm,28-AAN,	1	SA	
AVR13	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		ESD1	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA	
AVR14	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		ESD2	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA	
AVR15	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		FET01	0505-002365	FET-SILICON;IRF6645,N,100V,5.7A,0.0	1	SA	
AVR16	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SA		FET02	0505-002365	FET-SILICON;IRF6645,N,100V,5.7A,0.0	1	SA	
BRACKET,JACK	AH61-02713A	BRACKET-JACK;HT-X720,SPT,0.3,18.9,	1	SA		FET03	0505-002365	FET-SILICON;IRF6645,N,100V,5.7A,0.0	1	SA	
CECX1	2802-001179	RESONATOR-CERAMIC;4MHZ,0.5%,BK,8X3X	1	SA		FET04	0505-002365	FET-SILICON;IRF6645,N,100V,5.7A,0.0	1	SA	
CEIC1	AK09-00159A	IC MICOM;MC80C0316-MC015 D32,44,2.7	1	SA		FET05	0505-002365	FET-SILICON;IRF6645,N,100V,5.7A,0.0	1	SA	
CEIC2	1103-001333	IC-EEPROM;24C08A,8Kbit,1Kx8,SOP,8P,	1	SA		FET06	0505-002365	FET-SILICON;IRF6645,N,100V,5.7A,0.0	1	SA	
CEIC3	1203-002425	IC-POS.I.FIXED REG.;1117,SOT-223,3P,	1	SA		HC100	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1	1	SA	
CEIC4	0505-001679	FET-SILICON;FDC6301N,N,25V,0.22A,50	1	SA		HC101	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
CON4	3708-001266	CONNECTOR-FPC/FFC/PIC;11P,1mm,STRAI	1	SA		HC102	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
DESD1	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA		HC103	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
DSPC10	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	SA		HC104	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPC11	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		HC105	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
DSPC12	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		HC106	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPC13	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		HC107	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
DSPC14	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		HC108	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPC3	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		HC111	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
DSPC4	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		HC112	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
DSPC5	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		HC113	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
DSPC6	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		HC116	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
DSPC7	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		HC52	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPC8	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	SA		HC53	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPC9	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		HC55	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPIC1	0904-002330	IC-DSP;CS48540,LQFP,48P,7x7mm,150MH	1	SA		HC59	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPL1	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HC60	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPL2	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HC61	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPL3	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HC62	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPL4	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HC63	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPR1	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		HC64	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPR10	2007-000962	R-CHIP;5.1Kohm,1%,1/10W,TP,1608	1	SA		HC65	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPR11	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		HC66	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPR12	2007-000475	R-CHIP;1Mohm,1%,1/10W,TP,1608	1	SA		HC75	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPR13	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		HC76	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	
DSPR14	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		HC77	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
HC78	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HQ2	0504-000128	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-	1	SA	
HC79	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		HQ3	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5o	1	SA	
HC80	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HQ4	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5o	1	SA	
HC81	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HR100	2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	1	SA	
HC82	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HR101	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
HC83	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		HR102	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
HC86	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HR103	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P	1	SA	
HC87	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HR104	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P	1	SA	
HC88	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1	1	SA		HR105	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P	1	SA	
HC89	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1	1	SA		HR110	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
HC90	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HR111	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	1	SA	
HC91	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1	1	SA		HR112	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
HC92	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HR113	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
HC93	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1	1	SA		HR122	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HC94	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HR123	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
HC95	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1	1	SA		HR13	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HC96	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		HR23	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
HC97	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		HR26	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HC98	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HR27	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
HC99	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HR28	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
HD2	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA		HR34	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
HD3	0404-001089	DIODE-SCHOTTKY;RB551V-30,20V,500MA,	1	SA		HR35	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
HD4	0402-000309	DIODE-RECTIFIER;1SR154-400,400V,1A,	1	SA		HR4	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HD5	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA		HR44	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P	1	SA	
HDMIJACK2	3701-001320	CONNECTOR-HDMI;19P,2R,FEMALE,DIP,4U	1	SA		HR47	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
HEATSINK-MPEG	AH62-00062G	HEAT SINK-TR;HT-DS400,AL EXTR	1	SA		HR49	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
HESD2	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA		HR5	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
HIC2	1205-003381	IC-TRANSMITTER;ES7108S,LQFP,80P,12x	1	SA		HR51	2007-000129	R-CHIP;27Kohm,5%,1/10W,TP,1608	1	SA	
HIC3	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,S	1	SA		HR52	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	1	SA	
HIC4	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,S	1	SA		HR55	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	1	SA	
HL10	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HR56	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
HL11	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HR58	2007-000643	R-CHIP;270ohm,5%,1/10W,TP,1608	1	SA	
HL13	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HR59	2007-000116	R-CHIP;120ohm,5%,1/10W,TP,1608	1	SA	
HL15	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HR6	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HL16	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HR60	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA	
HL17	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HR61	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	1	SA	
HL18	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HR62	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	1	SA	
HL7	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HR63	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	1	SA	
HL9	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HR64	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
HPC1	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA		HR65	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
HPC2	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	1	SA		HR66	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
HPC3	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HR67	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	1	SA	
HPC4	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		HR68	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	1	SA	
HPC5	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		HR71	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA	
HPC6	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA		HR72	2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P	1	SA	
HPC7	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		HR73	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608	1	SA	
HPD1	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		HR74	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HPD2	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		HR75	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HPD3	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		HR76	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HPD4	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		HR77	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HPIC11	AH14-10003E	IC;KIA7812PI,-TO-220	1	SA		HR78	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HPJACK1	3722-000143	JACK-PHONE;1P(VER),AG,BLK,ANGLE	1	SA		HR79	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HPL1	2703-000275	INDUCTOR-SMD;33UH,10%,2012	1	SA		HR80	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
HPL2	2703-000275	INDUCTOR-SMD;33UH,10%,2012	1	SA		HR81	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
HPL3	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HR82	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
HPL4	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		HR83	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
HPL5	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	SA		HR84	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
HPL6	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	SA		HR85	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
HQ1	0504-000156	TR-DIGITAL;KSR2103,PNP,200MW,22K/22	1	SA							

Exploded View & Part List

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
HR86	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		MC134	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
HR87	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		MC135	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
						MC136	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
HR88	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		MC139	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
HR89	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA							
HR90	2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	1	SA		MC14	2402-001009	C-AL,SMD;100uF,20%,6.3V,GP,TP,5.3x5	1	SA	
HR91	2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	1	SA		MC140	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA	
HR92	2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	1	SA		MC143	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA	
						MC144	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA	
HR93	2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	1	SA		MC146	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.	1	SA	
HR94	2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	1	SA							
HR95	2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	1	SA		MC148	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
HR96	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		MC149	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
HR99	2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	1	SA		MC14X	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA	
						MC15	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA	
HS_7812	AH62-00062C	HEAT SINK-TR;HT-DM550,AL EXTR,2,25	1	SA		MC16	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
HS_7905	AH62-00204A	HEAT SINK;HT-Z320,A6063S-T5,15,11,S	1	SA							
IPC1	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.	1	SA		MC17	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
IPC2	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		MC18	2203-001086	C-CER,CHIP;0.0050nF,0.25pF,50V,NP0,	1	SA	
IPL1	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MC19	2203-001086	C-CER,CHIP;0.0050nF,0.25pF,50V,NP0,	1	SA	
						MC20	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA	
IPL2	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MC21	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA	
JIC01	1204-001978	IC-VIDEO PROCESS;LA73054,36P,SSOP,7	1	SA							
LINC1	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		MC22	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
LINC2	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		MC23	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608	1	SA	
LINC3	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA		MC24	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.	1	SA	
						MC25	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA	
LINJACK1	3722-000143	JACK-PHONE;1P(VER),AG,BLK,ANGLE	1	SA		MC26	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
LINL1	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	SA							
LINL2	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	SA		MC27	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
LINR3	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MC28	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608	1	SA	
LINR4	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MC29	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
						MC3	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
MC1	2203-001086	C-CER,CHIP;0.0050nF,0.25pF,50V,NP0,	1	SA		MC30	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
MC10	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA							
MC100	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC31	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.	1	SA	
MC101	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC32	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
MC102	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		MC34	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
						MC35	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
MC103	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC36	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
MC104	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA							
MC105	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		MC37	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
MC106	2203-000062	C-CER,CHIP;47nF,+80-20%,50V,Y5V,16	1	SA		MC38	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
MC107	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2	1	SA		MC39	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA	
						MC4	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
MC108	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2	1	SA		MC40	2203-001652	C-CER,CHIP;470nF,+80-20%,16V,Y5V,16	1	SA	
MC11	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA							
MC110	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		MC41	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA	
MC111	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC42	2203-001652	C-CER,CHIP;470nF,+80-20%,16V,Y5V,16	1	SA	
MC112	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC43	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA	
						MC44	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA	
MC113	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC45	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA	
MC114	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA							
MC115	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC46	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
MC116	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC47	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
MC117	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC48	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
						MC49	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA	
MC118	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC5	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
MC119	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA							
MC12	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		MC50	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
MC120	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC51	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	1	SA	
MC121	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC52	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
						MC53	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
MC122	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		MC54	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
MC127	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA							
MC128	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MC55	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
MC13	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608	1	SA		MC56	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
MC131	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		MC57	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
						MC58	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA	
MC132	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		MC59	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA	

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
MC6	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		ML22	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
MC60	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		ML23	2703-002238	INDUCTOR-SMD;1UH,5%,2012	1	SA	
MC61	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608	1	SA		ML24	2703-002238	INDUCTOR-SMD;1UH,5%,2012	1	SA	
MC62	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		ML25	2703-002238	INDUCTOR-SMD;1UH,5%,2012	1	SA	
MC63	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		ML26	2703-002238	INDUCTOR-SMD;1UH,5%,2012	1	SA	
MC64	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		ML27	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
MC65	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,160	1	SA		ML3	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
MC66	2203-001086	C-CER,CHIP;0.0050nF,0.25pF,50V,NP0,	1	SA		ML4	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
MC67	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608	1	SA		ML5	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
MC68	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		ML6	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
MC7	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		ML7	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
MC70	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		ML8	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
MC72	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		ML9	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
MC73	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1	1	SA		MQ1	0504-000128	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-	1	SA	
MC74	2203-000888	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,160	1	SA		MQ2	0504-000128	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-	1	SA	
MC75	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MQ3	0501-000632	TR-SMALL SIGNAL;2SB1197K,PNP,200mW,	1	SA	
MC76	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608	1	SA		MQ4	0504-000128	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-	1	SA	
MC77	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MQ5	0501-000632	TR-SMALL SIGNAL;2SB1197K,PNP,200mW,	1	SA	
MC78	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA		MR1	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA	
MC79	2203-005015	C-CER,CHIP;150nF,+80-20%,16V,Y5V,16	1	SA		MR100	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MC8	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MR101	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA	
MC80	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MR102	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MC81	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		MR103	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MC82	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MR104	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MC83	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MR105	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
MC84	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MR106	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
MC85	2203-001086	C-CER,CHIP;0.0050nF,0.25pF,50V,NP0,	1	SA		MR107	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
MC86	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		MR11	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA	
MC87	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608	1	SA		MR110	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
MC88	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		MR112	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
MC9	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		MR115	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
MC93	2203-000681	C-CER,CHIP;0.027nF,5%,50V,C0G,1608	1	SA		MR117	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
MC96	2203-000646	C-CER,CHIP;0.024nF,5%,50V,C0G,TP,16	1	SA		MR119	2007-000107	R-CHIP;470Kohm,5%,1/10W,TP,1608	1	SA	
MC98	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		MR12	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA	
MD1	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		MR120	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
MD16	0407-000116	DIODE-ARRAY;KDS181, DAP202K,80V,100	1	SA		MR121	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
MD2	0402-000309	DIODE-RECTIFIER;1SR154-400,400V,1A,	1	SA		MR122	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	1	SA	
MD3	0402-000309	DIODE-RECTIFIER;1SR154-400,400V,1A,	1	SA		MR123	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
MD5	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		MR124	2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608	1	SA	
MD6	0404-001089	DIODE-SCHOTTKY;RB551V-30,20V,500MA,	1	SA		MR125	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
MIC1	1204-002989	IC-PAL/NTSC DECODER;ES8391SCCB,LQFP	1	SA		MR126	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MIC2	1105-001573	IC-DRAM;K4S281632,-,128Mbit,8Mx16Bi	1	SA		MR127	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
MIC3	1107-001600	IC-NOR FLASH;MX25L1605A,16Mbit,2Mx8	1	SA		MR128	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	1	SA	
MIC4	1003-001978	IC-MOTOR DRIVER;AM5766,HSOP28H,28P,	1	SA		MR129	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
MIC6	1103-001333	IC-EEPROM;24C08A,8Kbit,1Kx8,SOP,8P,	1	SA		MR13	2007-000106	R-CHIP;220Kohm,5%,1/10W,TP,1608	1	SA	
MIC8	1201-001842	IC-OP AMP;TL3472CD,SO,TP,8P,-,DUAL,	1	SA		MR130	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	1	SA	
ML1	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MR132	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
ML10	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MR133	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
ML12	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MR134	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	SA	
ML13	2703-003362	INDUCTOR-SMD;4.7uH,20%,7070	1	SA		MR135	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
ML14	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MR136	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,	1	SA	
ML15	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MR137	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
ML17	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MR138	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
ML18	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MR140	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,	1	SA	
ML19	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MR141	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	1	SA	
ML2	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MR142	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
ML20	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MR144	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
ML21	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		MR145	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	

Exploded View & Part List

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
MR146	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		MR28	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
MR148	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		MR29	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
MR15	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA		MR3	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
MR152	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	1	SA		MR30	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA	
MR155	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	1	SA		MR31	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
MR158	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA		MR32	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA	
MR16	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA		MR33	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR162	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		MR34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR163	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA		MR35	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MR164	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA		MR36	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	1	SA	
MR165	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		MR37	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
MR166	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		MR38	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
MR167	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	1	SA		MR40	2007-000504	R-CHIP;2.2ohm,5%,1/4W,TP,3216	1	SA	
MR168	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	1	SA		MR41	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR169	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,	1	SA		MR42	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA	
MR17	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA		MR43	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MR170	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		MR47	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR171	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		MR48	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MR172	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		MR49	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MR173	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		MR5	2007-000106	R-CHIP;220Kohm,5%,1/10W,TP,1608	1	SA	
MR174	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MR50	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR177	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA		MR51	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MR178	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA		MR52	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	1	SA	
MR179	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		MR53	2007-000087	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	1	SA	
MR180	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA		MR54	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
MR181	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	1	SA		MR55	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR182	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA		MR56	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	1	SA	
MR183	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		MR57	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA	
MR184	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA		MR58	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MR185	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA		MR59	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
MR186	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA		MR5A	2007-000039	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
MR187	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA		MR6	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR188	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA		MR60	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR189	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA		MR61	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MR19	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	1	SA		MR62	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR190	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA		MR63	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR191	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA		MR64	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
MR195	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	1	SA		MR66	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MR196	2007-000129	R-CHIP;27Kohm,5%,1/10W,TP,1608	1	SA		MR67	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	1	SA	
MR197	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	1	SA		MR68	2007-000130	R-CHIP;39Kohm,5%,1/10W,TP,1608	1	SA	
MR2	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MR69	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MR20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		MR7	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR200	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA		MR70	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	SA	
MR201	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		MR71	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	SA	
MR202	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		MR72	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	1	SA	
MR208	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA		MR73	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	1	SA	
MR209	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA		MR74	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
MR21	2007-000504	R-CHIP;2.2ohm,5%,1/4W,TP,3216	1	SA		MR75	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	SA	
MR210	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MR76	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
MR211	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MR77	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	SA	
MR212	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MR78	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR213	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MR79	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
MR214	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MR8	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
MR22	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA		MR80	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	1	SA	
MR23	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA		MR81	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	1	SA	
MR24	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA		MR82	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
MR25	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MR83	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
MR26	2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA		MR84	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	1	SA	
MR27	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA							

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
MR85	2007-000094	R-CHIP;22Kohm,5%, 1/10W,TP,1608	1	SA		PWMC51	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA	
MR86	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		PWMC52	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
						PWMC53	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
MR9	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		PWMC54	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
MR94	2007-000120	R-CHIP;680ohm,5%, 1/10W,TP,1608	1	SA							
MR95	2007-000078	R-CHIP;1Kohm,5%, 1/10W,TP,1608	1	SA		PWMC55	2203-000646	C-CER,CHIP;0.024NF,5%,50V,C0G,TP,16	1	SA	
MR96	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		PWMC57	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
MR97	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		PWMC58	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
						PWMC59	2203-000646	C-CER,CHIP;0.024NF,5%,50V,C0G,TP,16	1	SA	
MR98	2007-000082	R-CHIP;3.3Kohm,5%, 1/10W,TP,1608	1	SA		PWMC60	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
MR99	2007-000122	R-CHIP;1.2Kohm,5%, 1/10W,TP,1608	1	SA							
MX01	2801-004284	CRYSTAL-SMD;27MHZ,10PPM,28-AAN,20PF	1	SA		PWMC61	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ODR1	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		PWMC65	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
ODR2	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		PWMC66	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
						PWMC67	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
OHPR1	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		PWMC68	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
OKC1	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA							
OKR1	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		PWMC8	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA	
OKR3	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		PWMD1	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA	
OMR34	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		PWMIC1	1204-002969	IC-MODULATOR;PS9831,TQFP,100P,14x14	1	SA	
						PWMIC2	1203-001212	IC-VOL. DETECTOR;7029,SOT-89,3P,-,P	1	SA	
OPTR4	2007-000076	R-CHIP;330ohm,5%, 1/10W,TP,1608	1	SA		PWMIC4	1201-000163	IC-OP AMP;4560,SOP,8P,173MIL,DUAL,1	1	SA	
OUR1	2007-000102	R-CHIP;100Kohm,5%, 1/10W,TP,1608	1	SA							
OUR2	2007-000102	R-CHIP;100Kohm,5%, 1/10W,TP,1608	1	SA		PWML2	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
OUR3	2007-000102	R-CHIP;100Kohm,5%, 1/10W,TP,1608	1	SA		PWML3	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
PCN1	AH39-01038A	WIRE HARNESS;HT-X725,13P-13B F.L/W	1	SA		PWML4	2703-000404	INDUCTOR-SMD;220uH,10%,3225	1	SA	
						PWML5	2703-000404	INDUCTOR-SMD;220uH,10%,3225	1	SA	
PIC1	1203-002935	IC-POSI.ADJUST REG.;AIC1117ACE,TO-2	1	SA		PWML6	3301-001069	BEAD-SMD;120ohm,1.6x0.8x0.8mm,200mA	1	SA	
PIC7	1203-002935	IC-POSI.ADJUST REG.;AIC1117ACE,TO-2	1	SA							
PWMC1	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6	1	SA		PWML7	3301-001069	BEAD-SMD;120ohm,1.6x0.8x0.8mm,200mA	1	SA	
PWMC10	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		PWML8	3301-001069	BEAD-SMD;120ohm,1.6x0.8x0.8mm,200mA	1	SA	
PWMC11	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		PWMR1	2007-007790	R-CHIP;20ohm,1%,1W,TP,6432	1	SA	
						PWMR10	2007-000113	R-CHIP;33ohm,5%, 1/10W,TP,1608	1	SA	
PWMC13	2402-000120	C-AL,SMD;10UF,20%,50V,GP,TP,6.6X6.6	1	SA		PWMR16	2007-000132	R-CHIP;180Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC14	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA							
PWMC15	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		PWMR17	2007-000102	R-CHIP;100Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC17	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6	1	SA		PWMR18	2007-000132	R-CHIP;180Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC18	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6	1	SA		PWMR19	2007-000097	R-CHIP;47Kohm,5%, 1/10W,TP,1608	1	SA	
						PWMR2	2007-007790	R-CHIP;20ohm,1%,1W,TP,6432	1	SA	
PWMC19	2203-000998	C-CER,CHIP;0.047nF,5%,50V,C0G,1608	1	SA		PWMR22	2007-000097	R-CHIP;47Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC2	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA							
PWMC20	2203-000998	C-CER,CHIP;0.047nF,5%,50V,C0G,1608	1	SA		PWMR3	2007-000132	R-CHIP;180Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC21	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		PWMR31	2007-000052	R-CHIP;10Kohm,1%, 1/10W,TP,1608	1	SA	
PWMC22	2203-000998	C-CER,CHIP;0.047nF,5%,50V,C0G,1608	1	SA		PWMR32	2007-000052	R-CHIP;10Kohm,1%, 1/10W,TP,1608	1	SA	
						PWMR33	2007-000094	R-CHIP;22Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC24	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		PWMR34	2007-000052	R-CHIP;10Kohm,1%, 1/10W,TP,1608	1	SA	
PWMC25	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA							
PWMC26	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		PWMR38	2007-000052	R-CHIP;10Kohm,1%, 1/10W,TP,1608	1	SA	
PWMC27	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		PWMR39	2007-000102	R-CHIP;100Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC28	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		PWMR4	2007-000309	R-CHIP;10ohm,5%, 1/10W,TP,1608	1	SA	
						PWMR40	2007-000094	R-CHIP;22Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC29	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		PWMR44	2007-000094	R-CHIP;22Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC30	2203-000998	C-CER,CHIP;0.047nF,5%,50V,C0G,1608	1	SA							
PWMC31	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		PWMR47	2007-000094	R-CHIP;22Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC32	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		PWMR48	2007-000094	R-CHIP;22Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC33	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		PWMR5	2007-000077	R-CHIP;470ohm,5%, 1/10W,TP,1608	1	SA	
						PWMR50	2007-000109	R-CHIP;1Mohm,5%, 1/10W,TP,1608	1	SA	
PWMC34	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		PWMR51	2007-000116	R-CHIP;120ohm,5%, 1/10W,TP,1608	1	SA	
PWMC35	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA							
PWMC36	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		PWMR52	2011-001344	R-NETWORK;100ohm,5%, 1/16W,L,CHIP,8P	1	SNA	
PWMC37	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA		PWMR6	2007-000052	R-CHIP;10Kohm,1%, 1/10W,TP,1608	1	SA	
PWMC4	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		PWMR7	2007-000113	R-CHIP;33ohm,5%, 1/10W,TP,1608	1	SA	
						PWMR8	2007-000132	R-CHIP;180Kohm,5%, 1/10W,TP,1608	1	SA	
PWMC40	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		PWMR9	2007-000052	R-CHIP;10Kohm,1%, 1/10W,TP,1608	1	SA	
PWMC41	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA							
PWMC42	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		RCN1	3708-000491	CONNECTOR-FPC/FFC/PIC;23P,1mm,STRAI	1	SA	
PWMC44	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		RCN2	3708-001439	CONNECTOR-FPC/FFC/PIC;4P,1mm,STRAIG	1	SA	
PWMC5	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		RCN3	3708-001928	CONNECTOR-FPC/FFC/PIC;5P,1mm,STRAIG	1	SA	
						SCREW-HS 6003-001375	SCREW-TAPTYPE;BH,+,-,B,M3,L8,ZPC(WH	2	SNA		
PWMC50	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		TC1	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SA	

Exploded View & Part List

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
TL1	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		UIC5	1203-005188	IC-DC/DC CONVERTER;AOZ1021AIL,SOP,8	1	SA	
TL2	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA		UL1	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
TPIC1	1203-002835	IC-POS.I.FIXED REG.;KIA7805AF,DPAK,3	1	SA		UL10	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
TR1	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA		UL11	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC1	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		UL12	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC10	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608	1	SA		UL13	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC11	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608	1	SA		UL14	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC12	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		UL15	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC13	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		UL16	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC14	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		UL18	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC15	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		UL19	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC16	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.	1	SA		UL2	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC17	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		UL21	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC2	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		UL22	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC22	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		UL3	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC23	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		UL4	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC25	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		UL5	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC27	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		UL6	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC3	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		UL7	2703-003362	INDUCTOR-SMD;4.7uH,20%,7070	1	SA	
UC30	2203-001607	C-CER,CHIP;0.22nF,5%,50V,NP0,1608	1	SA		UL8	2703-003362	INDUCTOR-SMD;4.7uH,20%,7070	1	SA	
UC31	2203-001607	C-CER,CHIP;0.22nF,5%,50V,NP0,1608	1	SA		UL9	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UC32	2203-001607	C-CER,CHIP;0.22nF,5%,50V,NP0,1608	1	SA		UQ1	0504-000128	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-	1	SA	
UC34	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA		UQ10	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150MW,SO	1	SA	
UC37	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		UQ2	0504-000156	TR-DIGITAL;KSR2103,PNP,200MW,22K/22	1	SA	
UC39	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		UQ3	0501-002184	TR-SMALL SIGNAL;KTD1304,NPN,200mW,S	1	SA	
UC4	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		UQ4	0501-002184	TR-SMALL SIGNAL;KTD1304,NPN,200mW,S	1	SA	
UC40	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		UQ6	0504-000156	TR-DIGITAL;KSR2103,PNP,200MW,22K/22	1	SA	
UC41	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		UQ7	0501-002184	TR-SMALL SIGNAL;KTD1304,NPN,200mW,S	1	SA	
UC42	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		UQ9	0504-000156	TR-DIGITAL;KSR2103,PNP,200MW,22K/22	1	SA	
UC44	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		UR1	2007-000451	R-CHIP;180ohm,5%,1/4W,TP,3216	1	SA	
UC45	2203-000972	C-CER,CHIP;47nF,10%,16V,X7R,1608	1	SA		UR10	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
UC46	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		UR101	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA	
UC48	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,160	1	SA		UR102	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608	1	SA	
UC5	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,160	1	SA		UR103	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
UC51	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.	1	SA		UR104	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
UC52	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		UR105	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
UC54	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.	1	SA		UR106	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
UC6	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		UR107	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
UC7	2203-005819	C-CER,CHIP;1000nF,+80-20%,16V,Y5V,T	1	SA		UR11	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA	
UC8	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SA		UR12	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
UC9	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA		UR13	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
UD10	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		UR14	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
UD11	0402-001427	DIODE-RECTIFIER;ES1D,200V,1A,DO-214	1	SA		UR15	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
UD16	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		UR16	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
UD17	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		UR17	2011-000660	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,8	1	SA	
UD18	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		UR18	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
UD2	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA		UR19	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
UD3	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA		UR2	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	1	SA	
UD4	0402-000309	DIODE-RECTIFIER;1SR154-400,400V,1A,	1	SA		UR20	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
UD5	0402-000309	DIODE-RECTIFIER;1SR154-400,400V,1A,	1	SA		UR21	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
UD6	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		UR22	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
UD7	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA		UR23	2007-000417	R-CHIP;15ohm,5%,1/4W,TP,3216	1	SA	
UD8	0402-000309	DIODE-RECTIFIER;1SR154-400,400V,1A,	1	SA		UR24	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P	1	SNA	
UD9	0402-000309	DIODE-RECTIFIER;1SR154-400,400V,1A,	1	SA		UR25	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	
UIC1	0903-001565	IC-MICROCONTROLLER;LC87F5NC8AVU,QFP	1	SA		UR26	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	1	SA	
UIC2	1103-001333	IC-EEPROM;24C08A,8Kbit,1Kx8,SOP,8P,	1	SA		UR27	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA	
UIC3	1203-000523	IC-VOL. DETECTOR;7039,SOT-89,4P,PLA	1	SA		UR28	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
UIC4	0505-001170	FET-SILICON;S19933ADY-T1,P,-20V,3.4	1	SA		UR29	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA	

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
UR3	2007-000451	R-CHIP;180ohm,5%, 1/4W,TP,3216	1	SA							
UR30	2011-001344	R-NETWORK;100ohm,5%, 1/16W,L,CHIP,8P	1	SNA		UR91	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA	
UR31	2011-001344	R-NETWORK;100ohm,5%, 1/16W,L,CHIP,8P	1	SNA		UR92	2007-000084	R-CHIP;4.7Kohm,5%, 1/10W,TP,1608	1	SA	
UR32	2007-000078	R-CHIP;1Kohm,5%, 1/10W,TP,1608	1	SA		UR93	2007-000084	R-CHIP;4.7Kohm,5%, 1/10W,TP,1608	1	SA	
						UR94	2011-001261	R-NETWORK;33ohm,5%, 1/16W,L,CHIP,8P,	1	SA	
UR34	2011-001344	R-NETWORK;100ohm,5%, 1/16W,L,CHIP,8P	1	SNA		UR95	2011-001261	R-NETWORK;33ohm,5%, 1/16W,L,CHIP,8P,	1	SA	
UR35	2007-000109	R-CHIP;1Mohm,5%, 1/10W,TP,1608	1	SA							
UR36	2007-000052	R-CHIP;10Kohm,1%, 1/10W,TP,1608	1	SA		UR96	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA	
UR37	2007-000402	R-CHIP;150ohm,5%, 1/10W,TP,1608	1	SA		UR97	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA	
UR39	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		UR98	2007-000084	R-CHIP;4.7Kohm,5%, 1/10W,TP,1608	1	SA	
						USBJACK1	3722-001051	JACK-USB;4P/1C,AU,BLK,ANGLE,A TYPE	1	SA	
UR40	2007-000074	R-CHIP;100ohm,5%, 1/10W,TP,1608	1	SA		USC1	2203-005148	C-CER,CHIP;100nF,10%, 16V,X7R,TP,160	1	SA	
UR41	2011-001344	R-NETWORK;100ohm,5%, 1/16W,L,CHIP,8P	1	SNA							
UR42	2011-001344	R-NETWORK;100ohm,5%, 1/16W,L,CHIP,8P	1	SNA		USC2	2203-000257	C-CER,CHIP;10nF,10%, 50V,X7R,TP,1608	1	SA	
UR43	2011-001344	R-NETWORK;100ohm,5%, 1/16W,L,CHIP,8P	1	SNA		USC3	2402-000008	C-AL,SMD;47uF,20%, 16V,GP,TP,6.6x6.6	1	SA	
UR44	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		USC4	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,COG,160	1	SA	
						USC5	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,COG,160	1	SA	
UR45	2007-000084	R-CHIP;4.7Kohm,5%, 1/10W,TP,1608	1	SA		USC6	2203-005148	C-CER,CHIP;100nF,10%, 16V,X7R,TP,160	1	SA	
UR46	2007-000094	R-CHIP;22Kohm,5%, 1/10W,TP,1608	1	SA							
UR47	2007-000074	R-CHIP;100ohm,5%, 1/10W,TP,1608	1	SA		USD1	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA	
UR48	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		USD2	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SO	1	SA	
UR49	2007-000084	R-CHIP;4.7Kohm,5%, 1/10W,TP,1608	1	SA		USD3	0406-001128	DIODE-TVS;MLVS-0603-E08,50V	1	SA	
						USL1	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UR5	2007-000084	R-CHIP;4.7Kohm,5%, 1/10W,TP,1608	1	SA		USL2	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UR50	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA							
UR51	2007-000074	R-CHIP;100ohm,5%, 1/10W,TP,1608	1	SA		USR1	2007-000552	R-CHIP;20ohm,5%, 1/10W,TP,1608	1	SA	
UR52	2007-000074	R-CHIP;100ohm,5%, 1/10W,TP,1608	1	SA		USR2	2007-000552	R-CHIP;20ohm,5%, 1/10W,TP,1608	1	SA	
UR53	2007-000643	R-CHIP;270ohm,5%, 1/10W,TP,1608	1	SA		USR3	2007-000092	R-CHIP;15Kohm,5%, 1/10W,TP,1608	1	SA	
						USR4	2007-000092	R-CHIP;15Kohm,5%, 1/10W,TP,1608	1	SA	
UR54	2007-000084	R-CHIP;4.7Kohm,5%, 1/10W,TP,1608	1	SA		USR5	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA	
UR55	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA							
UR56	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		VFDCN1	3708-001033	CONNECTOR-FPC/FFC/PIC;22P,1.25mm,ST	1	SA	
UR58	2007-000074	R-CHIP;100ohm,5%, 1/10W,TP,1608	1	SA		WCN1	3710-002749	SOCKET-BOARD TO CABLE;22P,2R,2.0MM,	1	SA	
UR59	2007-000084	R-CHIP;4.7Kohm,5%, 1/10W,TP,1608	1	SA		X75_MAIN_PCB	AH41-01188A	PCB-MAIN;HT-X725 MAIN PCB,EPOXY,2,0	1	SNA	
						X-TAL4	2802-001174	RESONATOR-CERAMIC;10MHZ,0.5%,BK,8X3	1	SA	
UR6	2007-000084	R-CHIP;4.7Kohm,5%, 1/10W,TP,1608	1	SA		X-TAL5	2801-004354	CRYSTAL-UNIT;12.288MHZ,30PPM,ATS-49	1	SA	
UR60	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA							
UR61	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		AH99-00415A	ASSY AUTO INSERT-MAIN PCB;-;HT-X720	1	SNA		
UR62	2007-000098	R-CHIP;56Kohm,5%, 1/10W,TP,1608	1	SA							
UR64	2007-000093	R-CHIP;20Kohm,5%, 1/10W,TP,1608	1	SA		PCB-TUNER	AH92-03025C	ASSY PCB-TUNER;HOME THEATER,HT-X720	1	SA	
UR65	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		OPTC1	2203-000626	C-CER,CHIP;0.022nF,5%, 50V,COG,1608	1	SA	
UR66	2007-000074	R-CHIP;100ohm,5%, 1/10W,TP,1608	1	SA		OPTC2	2203-006361	C-CER,CHIP;1000nF,10%, 10V,X5R,TP,2	1	SA	
UR67	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		OPTC3	2203-005148	C-CER,CHIP;100nF,10%, 16V,X7R,TP,160	1	SA	
UR68	2007-000134	R-CHIP;33Kohm,5%, 1/10W,TP,1608	1	SA		OPTC4	2203-000257	C-CER,CHIP;10nF,10%, 50V,X7R,TP,1608	1	SA	
UR69	2007-000039	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA							
						OPTJ1	0603-001164	OPTIC TRANSMITTER;5V,16Mb/s,0m,0dBm	1	SA	
UR7	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		OPTL1	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UR70	2007-000052	R-CHIP;10Kohm,1%, 1/10W,TP,1608	1	SA		OPTR1	2007-000076	R-CHIP;330ohm,5%, 1/10W,TP,1608	1	SA	
UR72	2007-000074	R-CHIP;100ohm,5%, 1/10W,TP,1608	1	SA		TUC1	2203-006361	C-CER,CHIP;1000nF,10%, 10V,X5R,TP,2	1	SA	
UR73	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		TUC2	2203-005148	C-CER,CHIP;100nF,10%, 16V,X7R,TP,160	1	SA	
UR75	2011-001344	R-NETWORK;100ohm,5%, 1/16W,L,CHIP,8P	1	SNA							
						TUL1	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115o	1	SA	
UR76	2011-001344	R-NETWORK;100ohm,5%, 1/16W,L,CHIP,8P	1	SNA		TUPACK1	AH40-00141A	TUNER-MODULE;KST-MW104FV1-S55,MAX-D	1	SA	
UR77	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		WCON12	3711-006891	HEADER-BOARD TO BOARD;NOWALL,22P,2R	1	SA	
UR78	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		X725_TUNER_PCB	AH41-01212A	PCB-TUNER;HT-X725 TUNER PCB,EPOXY,2	0.125	SNA	
UR79	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		AH99-00425A	ASSY AUTO INSERT-TUNER;HOME THEATER	1	SNA		
UR80	2007-000107	R-CHIP;470Kohm,5%, 1/10W,TP,1608	1	SA							
						PCB-POWER	AH92-03080A	ASSY PCB-POWER;HOME THEATER,HT-X725	1	SA	
UR81	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		KEYC17	2203-000189	C-CER,CHIP;100nF,+80-20%, 25V,Y5V,16	1	SA	
UR82	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		KEYCN3	3708-002061	CONNECTOR-FPC/FFC/PIC;7P,1mm,SMD-A,	1	SA	
UR83	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		KEYD8	0403-001064	DIODE-ZENER;RLZ5.1B,4.94-5.2V,500mW	1	SA	
UR85	2007-000123	R-CHIP;1.5Kohm,5%, 1/10W,TP,1608	1	SA		KEYIC2	1209-001866	IC-SENSOR;SS501,SOT-26,6P,2.9x1.6mm	1	SA	
UR86	2007-000123	R-CHIP;1.5Kohm,5%, 1/10W,TP,1608	1	SA							
						KEYLED1	0601-002657	LED;SMD,2.1x0.6x0.9mm,465nm,2.1x0.	1	SA	
UR87	2007-000090	R-CHIP;10Kohm,5%, 1/10W,TP,1608	1	SA		KEYR17	2007-000134	R-CHIP;33Kohm,5%, 1/10W,TP,1608	1	SA	
UR88	2007-000102	R-CHIP;100Kohm,5%, 1/10W,TP,1608	1	SA		KEYR18	2007-000092	R-CHIP;15Kohm,5%, 1/10W,TP,1608	1	SA	
UR89	2007-000102	R-CHIP;100Kohm,5%, 1/10W,TP,1608	1	SA		PWR_PCB	AH41-01243A	PCB-POWER;HT-X725 PWR KEY PCB,EPOXY	0.032	SNA	
UR9	2007-000070	R-CHIP;0ohm,5%, 1/10W,TP,1608	1	SA		AH99-00424A	ASSY AUTO INSERT-POWER;HOME THEATER	1	SNA		
UR90	2007-000097	R-CHIP;47Kohm,5%, 1/10W,TP,1608	1	SA							

Exploded View & Part List

Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark	Loc. No.	Part No.	Description;Specification	Q'ty	SNA	Remark
	AH97-02665A	ASSY DECK;SDM-S13V,CMS-S78RB(T/DEC,	1	SA							
	AH98-00147A	ASSY LABEL;-;ht-x720,-;-	1	SNA							
	AH63-01301A	SHEET-SET;HT-Q40	1	SNA							
	AH68-00371A	LABEL-BAR CODE;DVD-611/XAA,MOJO2000	1.05	SNA							
	AH68-01929H	LABEL RATING;HT-A100,ELS,SLIVER PET	1.05	SNA							
	AH68-01984A	MANUAL-CLEANING;HT-X200,ART PAPER	1	SNA							
	AH68-02204A	LABEL-POP;HT-X720,W/W,SILVER SHEET,	1	SA							
	AH69-02452A	CUSHION-BOTTOM;HT-X720,EPS,T20,W380	1	SA							
	AH69-02453A	CUSHION-TOP;HT-X720,EPS,T20,W380,L5	1	SA							
	AH98-00151A	ASSY ACCESSORY;-;ht-x720,-;-	1	SNA							
	4301-000116	BATTERY-ALKALINE;1.5V,AAA,10.5x44.5	2	SA							
	6801-001763	CARD-REGISTRATION;Europe Registrati	1	SA							
	6902-000385	BAG PE;LDPE,T0.03,W250,L350,TRP,8,1	1	SA							
	AH39-40001V	CABLE-AUDIO CABLE;1P-1P,3000mm,YELL	1	SA							
	AH42-00021A	ANT FM T;T18011F-1,75 ohm,1800mm	1	SA							
	AH68-00650L	MARK RECYCLE-CARD-WARRANTY;YP-P2,EL	1	SA							
	AH68-02177C	MANUAL USERS;HT-X720,XEF,FRN/NL/GER,MO	1	SA							
	AH68-50254B	LABEL-SERIAL;T0.1,L10,W45,SME/SEHZ	1.05	SNA							
	AH81-02286C	A/S-EYEGLOSS CLOTH;HT-TXQ120,POLY-B	1	SA							
	3903-000396	CBF-POWER CORD;AT,EU,CP2,HOUSING(2P	1	SA							
	AH69-02461E	MASTER CARTON;HT-X720/EXP,PAPER,7,W	1.03	SA							