


1. HW-E350/ZF

Exploded View

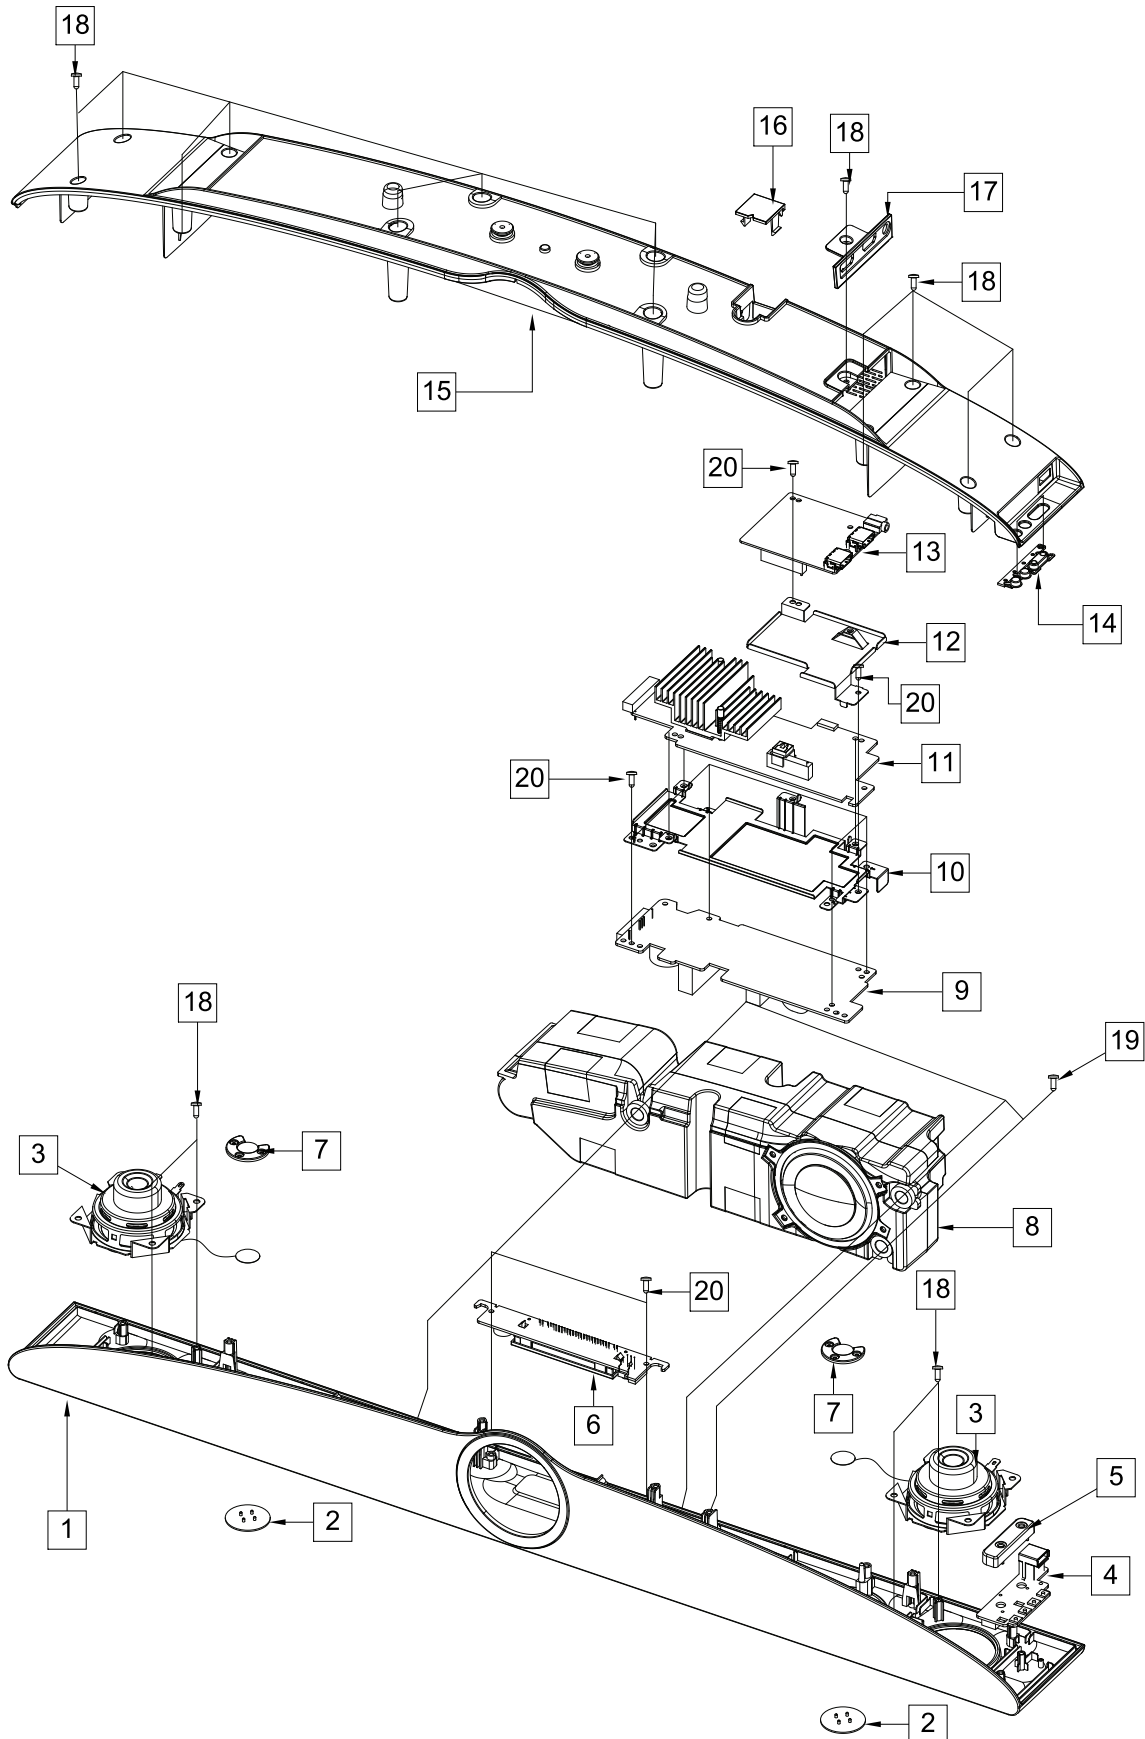

Parts List

No.	Parent	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	AH96-01609A	3		AH96-01647A	ASSY COVER P-FRONT_SVC; HW-E350,SERVICE	SA	1
2	AH96-01647A	4		AH64-05535A	DECORATION-DUST; HW-E350,ABS	SNA	2
3	AH96-01647A	4		AH96-01617A	ASSY SPEAKER P-E350 AIR TRACK; AV SPK,FRO	SA	1
4	AH90-00906A	2		AH94-02924A	ASSY PCB TACT S/W-USB; HW-E350,SBE3	SA	1
5	AH90-00908A	2	HDP01	AH61-03351A	HOLDER-PCB; HW-E350,HIPS,BLACK	SNA	1
6	AH90-00906A	2		AH94-02921A	ASSY PCB FRONT-VFD; HW-E350,SBE3	SA	1
7	AH96-01647A	4		AH61-03386A	HOLDER-PIEZO; HW-E350,HIPS,BLACK	SNA	2
8	AH96-01609A	3		AH96-01616A	ASSY SPEAKER P-SUBWOOFER; AV SPK,4ohm,FOR	SA	1
9	AH90-00906A	2	M0014	AH94-02673A	ASSY PCB MAIN; HW-E350,SBE3	SA	1
10	AH90-00906A	2	RS01	AH63-02542A	SHIELD-PCB; HW-E350,SECC,0.6	SNA	1
11	AH91-00464B	2	P001A	AH44-00272A	DC VSS-HP; HW-E350,SSAV-A5AEBOT,AC/DC,120	SA	1
12	AH90-00906A	2		AH63-02811A	SHIELD-HDMI; HW-E350,SECC,0.6	SNA	1
13	AH90-00906A	2	MH01A	AH94-02925A	ASSY PCB HDMI; HW-E350,SBE3	SA	1
14	AH96-01611A	3	FK04	AH64-05528A	KNOB-FUNCTION; HW-E450,ABS,BLACK	SNA	1
15	AH90-00908A	2	R001A	AH96-01611A	ASSY COVER P-REAR; HW-E350,PC+ABS,BLACK	SA	1
16	AH90-00908A	2	AC169	AH63-02538A	COVER-AC-CORD; HW-E450,ABS+PC,BLACK	SNA	1
17	AH90-00908A	2		AH63-02554A	COVER-HDMI; HW-E350,ABS+PC,BLACK	SNA	1
18	AH90-00908A	2	W391	6003-000275	SCREW-TAPTYPE; BH,+,B,M3,L10,ZPC(BLK),SWR	SA	13
19	AH96-01609A	3	M0081	6003-001465	SCREW-TAPTYPE; BWH,+,-,B,M3,L8,ZPC(WHT),S	SC	3
20	AH90-00906A	2	M0081	6003-001375	SCREW-TAPTYPE; BH,+,B,M3,L8,ZPC(WHT),SW	SA	14

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			HW-E350/ZF (ZZ01)		
1		AH90-00906A	ASSY COVER FRONT;HW-E350	1	SNA
.2	M0081	6003-001375	SCREW-TAPTYPE;BH,+, -,B,M3,L8,ZPC(WHT),SW	14	SA
.2	RS01	AH63-02542A	SHIELD-PCB;HW-E350,SECC,0.6	1	SNA
.2		AH63-02811A	SHIELD-HDMI;HW-E350,SECC,0.6	1	SNA
.2	M0014	AH94-02673A	ASSY PCB MAIN;HW-E350,SBE3	1	SA
..3	MCON	3710-002036	SOCKET-BOARD TO BOARD;12P,1R,2.5mm,STRAI	1	SA
..3	EH01	3711-000178	HEADER-BOARD TO CABLE;1WALL,2P,1R,3.96mm	1	SA
..3	FANCN	3711-003942	HEADER-BOARD TO CABLE;BOX,2P,1R,2mm,STRA	1	SA
..3		3711-008031	HEADER-BOARD TO BOARD;NOWALL,23P,2R,2mm,	1	SA
..3		AH62-00243A	HEAT SINK-ES;HT-D550,A6063,1,NTR,23*23*5	1	SNA
..3		AH62-00261A	HEAT SINK-ES;HW-E350,A6063,BLACK,67.25*5	1	SNA
..3		AH97-06229A	ASSY SMD;HW-E350,ASSY PCB MAIN SMD,AH94-	1	SNA
...4		0403-001172	DIODE-ZENER;UDZ6.8B,6.65-6.93V,200MW,SOD	1	SNA
...4		0403-001446	DIODE-ZENER;UDZS 16B,15.85/16.51V,200mW,	1	SA
...4		0501-000150	TR-SMALL SIGNAL;2SA1037,PNP,200mW,SOT-23	5	SA
...4	Q1	0501-000479	TR-SMALL SIGNAL;KST42,NPN,350mW,SOT-23,T	2	SA
...4		0504-000110	TR-DIGITAL;DTC114EU,NPN,200MW,10K/10K,SC	2	SA
...4		0505-002790	FET-SILICON;ZXMP6A17G,P,-60V,-4.3A,0.190	1	SA
...4		0801-003386	IC-CMOS LOGIC;7SZ32,2-INPUT OR GATE,SC-7	1	SNA
...4		0904-002707	IC-DSP;LQFP,128P,16X16,128.5MHz,1.35V,0t	1	SNA
...4		1001-001545	IC-ANALOG MULTIPLEX;TS3USB221ERSER,R-PQF	1	SA
...4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	SNA
...4	MIC2	1105-001573	IC-DRAM;K4S281632,SDR,128Mbit,8Mx16bit,T	1	SA
...4		1201-003186	IC-AUDIO AMP;TAS5612PHD,HTQFP,64P,14x14m	2	SA
...4		1203-004363	IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P,	1	SA
...4		1203-006067	IC-POWER SUPERVISOR;TPS2553DBVR,SOT-23,6	1	SNA
...4	IC012	1203-006239	IC-POSILADJUST REG.;AP1117EGZ-13-89,SOT-	2	SA
...4		1203-007080	IC-DC/DC CONVERTER;AOZ1051PI,SO-8,8P,4.9	2	SA
...4		1203-007144	IC-DC/DC CONVERTER;TPS54331D,SOIC8,8P,4.	1	SA
...4	J914	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	4	SNA
...4		2007-000039	R-CHIP;0ohm,1%,1/10W,TP,1608	1	SA
...4	DR1	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SNA
...4	PR4	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	1	SA
...4	ND51C2	2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SA
...4	AR164	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	6	SNA
...4	CER04	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	1	SA
...4	R637	2007-000096	R-CHIP;30Kohm,5%,1/10W,TP,1608	2	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AR108	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	4	SA
...4	R512	2007-000107	R-CHIP;470Kohm,5%,1/10W,TP,1608	1	SNA
...4	ZR24	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	1	SA
...4	DR10	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA
...4	R105	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	23	SA
...4	HDR7	2007-000139	R-CHIP;220ohm,5%,1/16W,TP,1005	2	SA
...4	MR306	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	2	SNA
...4	R102	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	3	SA
...4	MR36	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	8	SA
...4	MR16	2007-000168	R-CHIP;470Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000253	R-CHIP;1.5ohm,5%,1/4W,TP,3216	1	SA
...4	VR8	2007-000256	R-CHIP;1.6Kohm,1%,1/10W,TP,1608	1	SA
...4	WR18B	2007-000463	R-CHIP;18ohm,5%,1/10W,TP,1608	6	SA
...4		2007-000504	R-CHIP;2.2ohm,5%,1/4W,TP,3216	2	SA
...4	R726	2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	14	SNA
...4	AR60	2007-000708	R-CHIP;3.9Kohm,1%,1/10W,TP,1608	1	SNA
...4	R124	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	6	SA
...4	MR14	2007-000842	R-CHIP;3Kohm,1%,1/10W,TP,1608	1	SNA
...4	AR42	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	SNA
...4	R3508	2007-001038	R-CHIP;56Kohm,1%,1/10W,TP,1608	2	SA
...4	AR161	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	1	SNA
...4	OTR1	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	26	SNA
...4	R1	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	2	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005	1	SA
...4	DR4	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	6	SA
...4	ZR47	2007-007277	R-CHIP;392ohm,1%,1/10W,TP,1608	1	SA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007834	R-CHIP;16.5Kohm,1%,1/10W,TP,1608	1	SA
...4	HR37	2007-008107	R-CHIP;698ohm,1%,1/10W,TP,1608	1	SA
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005	1	SA
...4	ZRN10	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	5	SA
...4	HRP2	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	3	SA
...4	DC54	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	1	SA
...4	C507	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	8	SNA
...4	ZC14	2203-000626	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1608	1	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	2	SA
...4	CK40B	2203-000838	C-CER,CHIP;0.39nF,5%,50V,C0G,TP,1608	1	SNA
...4	AD480	2203-001391	C-CER,CHIP;150nF,10%,25V,X7R,TP,2012	1	SA
...4	AD480	2203-006005	C-CER,CHIP;10nF,10%,100V,X7R,TP,1608	6	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,0.	1	SA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	2	SNA
...4	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	6	SNA
...4	C390	2203-006977	C-CER,CHIP;47000nF,10%,16V,X5R,TP,3225	2	SA
...4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	6	SNA
...4		2402-001398	C-AL,SMD;220uF,20%,35V,TP,8X10	4	SA
...4		2703-003930	INDUCTOR-SMD;4.7uH,20%,5050	2	SA
...4		2703-004226	INDUCTOR-SMD;8.2uH,20%,11X10x3.8mm	6	SA
...4		2703-004251	INDUCTOR-SMD;10uH,20%,7070 (5.5T),0.044o	1	SA
...4	X202	2801-003954	CRYSTAL-SMD;27MHz,30ppm,28-AAN,16pF,50oh	1	SA
...4	HB01A	3711-005939	HEADER-BOARD TO CABLE;BOX,3P,1R,2mm,SMD-	1	SNA
...4		6302-001232	GASKET;Conductive Fabric,4.0mm,GRAY,SMR-	2	SNA
...4		AH41-01487A	PCB MAIN;HW-E350,FR-4,4,1.6T,178X168,2,M	1	SNA
...4		AH97-08915A	ASSY MICOM-MAIN;HW-E350,AIR-TRACK	1	SNA
....5		0903-001781	IC-MICROCONTROLLER;LQFP,64P,10x10mm,32MH	1	SNA
...4		AH97-08916A	ASSY MICOM-DSP ASSY;HW-E350,AIR-TRACK	1	SNA
....5		1107-001916	IC-NOR FLASH;W25Q16BVSSIG,16Mbit,2Mbitx8	1	SNA
.2		AH94-02921A	ASSY PCB FRONT-VFD;HW-E350,SBE3	1	SA
..3	D0254	0609-001204	MODULE REMOCON;HORIZONTAL,6.5mm,TRAY	1	SA
..3	EV01	AH07-00280A	VFD DISPLAY;HW-E450,6-BD-02INK,Green/Red	1	SNA
..3	AH410	AH61-03335A	HOLDER-VFD;HW-E450,ABS,BLACK	1	SNA
..3	AF020	AH63-02539A	FILTER-VFD;HW-E450,PC,WINE	1	SNA
..3		AH63-02725A	SHEET-VFD TAPE;HW-E350,TAPE,0.1,14,14,WH	1	SNA
..3		AH63-02726A	SHEET-SPK EVA;HW-E350,EVA,5,5,19,WHITE	1	SNA
..3		AH97-08891A	ASSY SMD-VFD;HW-E350,VFD SMD,AH94-02921A	1	SNA
...4	PPD1	0402-000309	DIODE-RECTIFIER;1SR154-400,400V,1A,SOD-1	4	SC
...4		0403-000596	DIODE-ZENER;Z02W2.4V,2.5,200mW,SOT-23,TP	1	SA
...4		0403-001499	DIODE-ZENER;MMSZ5252B,22.8/25.2V,500mW,S	1	SA
...4	D0254	0404-001314	DIODE-SCHOTTKY;B260A,60V,2000mA,SMA,TP	2	SNA
...4		0501-002651	TR-SMALL SIGNAL;KTC4378,NPN,500mW,SOT-89	2	SA
...4	R401	2007-000034	R-CHIP;1ohm,5%,1/4W,TP,3216	1	SNA
...4	CER02	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	1	SA
...4	PR6	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SNA
...4	AR30	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	4	SNA
...4	AR150	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA
...4	MROPI	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA
...4	AR02	2007-000125	R-CHIP;3.9Kohm,5%,1/10W,TP,1608	1	SA
...4	R15	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	2	SNA
...4	MR112	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	4	SNA
...4	RT01	2007-000483	R-CHIP;1ohm,5%,1/8W,TP,2012	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	R3505	2007-000950	R-CHIP;47ohm,5%,1/4W,TP,3216	3	SA
...4	C254	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	2	SNA
...4	DC87	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,TP,1005	3	SNA
...4	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	6	SNA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005	1	SA
...4		3708-003037	CONNECTOR-FPC/FFC/PIC;15P,0.5mm,SMD-A,AU	1	SA
...4		AH26-00389B	TRANS SWITCHING;DR1265,HT-E4500,DC12V,DR	1	SA
...4		AH41-01484B	PCB-VFD;HW-E350,FR-4,2,1.6T,151X168,5,VF	1	SNA
.2		AH94-02924A	ASSY PCB TACT S/W-USB;HW-E350,SBE3	1	SA
...3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
...3		0202-001768	SOLDER-BAR;HSE-16,S60S-20,D3,SN/0.5CU/0.	3	SNA
...3		0204-002514	THINNER;TS4500,OXIGEN,NO,13.15KG,14KG/BO	3	SNA
...3		0204-002606	FLUX;LF-715K,OXIGEN,NO,16000L,14%,16kg,G	2	SNA
...3		3722-003295	JACK-USB;4P/1C,AU30U,BLK,ANGLE	1	SA
...3	AS161	AH63-02892A	SHEET-USB;HW-E350,EVA,1.0,10,13,BLACK	1	SNA
...3	AS111	AH63-02908A	SHEET-REAR;HW-E350,EVA,1.0,15,BLACK	1	SNA
...3		AH97-08897A	ASSY SMD-USB;HW-E350,USB SMD,AH94-02924A	1	SNA
...4	R331	2007-000079	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	1	SA
...4	AAR39	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	1	SA
...4	PFRF2	2007-000219	R-CHIP;1.2Kohm,1%,1/10W,TP,1608	1	SA
...4	MC2	2203-000254	C-CER,CHIP;10nF,10%,16V,X7R,TP,1005	1	SA
...4	AAC1	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	SNA
...4	T0313	3404-001379	SWITCH-TACT;12V,50mA,250gf,4.9x4.9x1.5mm	4	SA
...4		3711-007838	CONNECTOR-HEADER;BOX,6P,1R,1.25mm,SMD-A,	1	SA
...4		AH41-01485A	PCB-BUTTON;HW-E350,FR-4,2,1.6T,158X168,1	1	SNA
.2	MH01A	AH94-02925A	ASSY PCB HDMI;HW-E350,SBE3	1	SA
...3		0201-001059	ADHESIVE-SIL;#9590,WHT,CARTRIGE	0	SNA
...3		AH63-02529D	SHEET-VIB-HDMI-COVER;HW-E350,PORON,0.2,9	1	SNA
...3		AH97-08899A	ASSY SMD;HW-E350,HDMI SMD,AH94-02925A	1	SNA
...4	S.N.A	0202-001459	SOLDER-CREAM;S3X58-M405,D20~38um,96.5Sn/	1	SNA
...4		0204-002606	FLUX;LF-715K,OXIGEN,NO,16000L,14%,16kg,G	2	SNA
...4	D1	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	2	SA
...4	D0254	0404-001006	DIODE-SCHOTTKY;RB751V,40V,30mA,SOD-323,T	1	SA
...4	D2505	0404-001036	DIODE-SCHOTTKY;SDB30A40,40V,3000mA,SOD-1	1	SA
...4	MD1	0404-001089	DIODE-SCHOTTKY;RB551V-30,20V,500MA,SOD-3	2	SA
...4	T0139	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	4	SNA
...4	KQ1	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	1	SA
...4	AQ7	0504-000128	TR-DIGITAL;FJV3103R,NPN,200mW,22K/22Kohm	2	SA
...4		0505-001377	FET-SILICON;BSN20,N,50V,100mA,15ohm,250W	1	SA
...4		1203-006700	IC-POSI.ADJUST REG.;AP7311-WG-7,SOT25,6P	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1203-007137	IC-POSI.ADJUST REG.;AP7361-Y,SOT89,5P,4.	2	SA
...4		1405-001253	VARISTOR;12Vdc,1.6x0.8x0.4mm,TP,100V,0.2	8	SA
...4		1405-001306	VARISTOR;11Vdc,45A,0603,TP,50V	2	SA
...4	KAR21	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	2	SA
...4	MR604	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	4	SA
...4	AR49	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	3	SNA
...4	R319	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	2	SNA
...4	R104	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	9	SA
...4	AR43	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SNA
...4	MR13	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	2	SNA
...4	R123	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	2	SA
...4	DR39	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SNA
...4	R111	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	41	SNA
...4	R338	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000231	R-CHIP;1.3Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000336	R-CHIP;120Kohm,1%,1/10W,TP,1608	1	SA
...4	MR17	2007-000566	R-CHIP;220Kohm,5%,1/16W,TP,1005	2	SNA
...4	R19	2007-000763	R-CHIP;330ohm,1%,1/10W,TP,1608	1	SA
...4	R980	2007-000929	R-CHIP;470ohm,1%,1/10W,TP,1608	1	SA
...4	DR37	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	2	SA
...4	FR18	2007-000982	R-CHIP;5.6Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001284	R-CHIP;4.7ohm,5%,1/16W,TP,1005	1	SNA
...4	DR43	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	2	SA
...4	DR1	2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	2	SA
...4	R19548	2007-001311	R-CHIP;270ohm,5%,1/16W,TP,1005	1	SA
...4	R16	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	2	SNA
...4	MR316	2007-002796	R-CHIP;510ohm,5%,1/16W,TP,1005	6	SNA
...4		2007-007100	R-CHIP;10Mohm,5%,1/16W,TP,1005	1	SA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005	1	SNA
...4	MR601	2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	2	SNA
...4	R8	2007-007721	R-CHIP;560ohm,1%,1/10W,TP,1608	1	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	2	SNA
...4	PC43	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	1	SNA
...4	DC1	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,TP,1005	2	SA
...4	MC9	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	2	SNA
...4	PC8	2203-005642	C-CER,CHIP;.22nF,5%,50V,NP0,TP,1005	2	SA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	1	SNA
...4	VC37	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	34	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	C102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	7	SA
...4	AD480	2203-006257	C-CER,CHIP;470nF,10%,6.3V,X5R,TP,1005,0.	1	SNA
...4	AD480	2203-006399	C-CER,CHIP;1000nF,10%,6.3V,X5R,TP,1005	7	SA
...4	HDC11	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	SNA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005	1	SA
...4	AD480	2203-007230	C-CER,CHIP;47000nF,20%,6.3V,X5R,TP,2012,	6	SNA
...4	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	15	SA
...4	X202	2801-003843	CRYSTAL-SMD;18.432MHz,30ppm,SMD,20pF,50o	1	SA
...4	T0568	3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz,-	12	SA
...4		3701-001293	CONNECTOR-HDMI;19P,2R,FEMALE,SMD-A,AU	2	SA
...4		3710-003381	SOCKET-BOARD TO BOARD;24P,2R,2mm,AU,BLK	1	SA
...4		3722-003159	JACK-PHONE;1/7P,NI,YEL,ANGLE	1	SA
...4		AH41-01486A	PCB-HDMI;HW-E350,FR-4,4,1.2T,155x142,4,4	1	SNA
...4		AH97-08900A	ASSY MICOM;SBE3,AH94-02925A	1	SNA
....5		1205-004431	IC-REPEATER;EP92A2S,LQFP,128P,14x14mm,PL	1	SNA
...3	T0066	BN62-00072A	HEAT SINK-ES;40*40*2.5,A6063,T2.6,TAPE,N	1	SNA
.2	F001A	AH96-01609A	ASSY COVER P-FRONT;HW-E350,PC,BLACK	1	SNA
...3	M0081	6003-001465	SCREW-TAPTYPE;BWH,+,-,B,M3,L8,ZPC(WHT),S	3	SC
...3		AH96-01616A	ASSY SPEAKER P-SUBWOOFER;AV SPK,4ohm,FOR	1	SA
...4		AH59-02393A	UNIT-SUBWOOFER;HW-E350,65Hz~230Hz,61mm,A	1	SNA
...4		AH63-02659A	COVER-SUBWF-BTM;HW-E350,HIPS,Subwoofer c	1	SNA
...4		AH63-02662A	COVER-SUBWF TOP;HW-E350,HIPS,Subwoofer c	1	SNA
...4		AH64-05620A	CHASSIS-SHIELD;AV SPK,EGI-SECC,0.6t,Natu	1	SNA
...4	SPEAKER	AH81-05693A	SPEAKER-DAMPER;AV SPK,RUBBER-DAMPER,GRAY	3	SNA
...4		AH81-07334A	SPEAKER-WIRE;AV SPK,FOR HW-E350,SUBWOOFER	1	SNA
...4		AH81-07335A	SPEAKER-WHITE WOOL;AV SPK,FOR HW-E350,WH	1	SNA
...4		AH81-07336A	SPEAKER-PE FOAM;AV SPK,FOR HW-E350,PE-FO	10	SNA
...4		AH81-07337A	SPEAKER-PE FOAM;AV SPK,FOR HW-E350,PE- F	1	SNA
...4		AH81-07563A	SPEAKER-EVA GASKET;AV SPK,FOR HT-E350 SW	1	SNA
...4		AH81-07652A	SPEAKER-EVA;AV SPK,FOR HW-E350,EVA,50X10	1	SNA
...3		AH96-01647A	ASSY COVER P-FRONT_SVC;HW-E350,SERVICE	1	SA
...4	W391	6003-000275	SCREW-TAPTYPE;BH,+,-,B,M3,L10,ZPC(BLK),SWR	4	SA
...4		AH61-03386A	HOLDER-PIEZO;HW-E350,HIPS,BLACK	2	SNA
...4	F001	AH63-02540A	COVER-FRONT;HW-E350,PC,BLACK	1	SNA
...4		AH63-02541A	SHEET-PROTECTION-FRONT;HW-E350,PET,0.06,	1	SNA
...4		AH63-02727A	SHEET-FRONT EVA;HW-E350,EVA,0.2,7,20,BLA	7	SNA
...4		AH63-02750A	SHEET-EVA;HW-E350,EVA,5,8,11,BLACK	3	SNA
...4		AH64-05535A	DECORATION-DUST;HW-E350,ABS	2	SNA
...4		AH96-01617A	ASSY SPEAKER P-E350 AIR TRACK;AV SPK,FRO	1	SA
....5		AH59-02394A	UNIT-WOOFER;HW-E350,200Hz~20kHz,50mm,AV	2	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		AH81-07328A	SPEAKER-LEFT WIRE;AV SPK,FOR HW-E350,SPK	1	SNA
....5		AH81-07329A	SPEAKER-RIGHT WIRE;AV SPK,FOR HW-E350,SP	1	SNA
....5		AH81-07650A	SPEAKER-EVA1;AV SPK,FOR HW-E350,EVA,15X1	2	SNA
....5		AH81-07651A	SPEAKER-EVA2;AV SPK,FOR HW-E350,EVA,15X1	2	SNA
1	R001A	AH90-00908A	ASSY COVER REAR;HW-E350	1	SNA
.2	W391	6003-000275	SCREW-TAPTYPE;BH,+,B,M3,L10,ZPC(BLK),SWR	13	SA
.2	HDP01	AH61-03351A	HOLDER-PCB;HW-E350,HIPS,BLACK	1	SNA
.2	AC169	AH63-02538A	COVER-AC-CORD;HW-E450,ABS+PC,BLACK	1	SNA
.2		AH63-02554A	COVER-HDMI;HW-E350,ABS+PC,BLACK	1	SNA
.2	R001A	AH96-01611A	ASSY COVER P-REAR;HW-E350,PC+ABS,BLACK	1	SA
..3	AF501	AH61-02935A	FOOT-HANGER;HT-SB1,RUBBER,BLACK,1	2	SNA
..3	AH506	AH61-02951A	HOLDER-INSERT;HT-WS1,SWCH18A,10.4,14,14,	2	SNA
..3		AH63-02529C	SHEET-VIB-POWER KEY;HW-E350,PORON,0.2,15	1	SNA
..3		AH63-02535A	SHEET-SEALING-PARTITION;HW-E450,FELT,0.5	2	SNA
..3		AH63-02535B	SHEET-SEALING-PARTITION;HW-E350,FELT,1.0	2	SNA
..3	R001	AH63-02544A	COVER-REAR;HW-E350,ABS+PC,BLACK	1	SNA
..3		AH63-02545A	SHEET-SEALING-REAR;HW-E350,FELT,0.5,BLAC	4	SNA
..3	AS109	AH63-02893A	SHEET-SIDE;HW-E350,EVA,0.5,7,72,BLACK	2	SNA
..3	FK04	AH64-05528A	KNOB-FUNCTION;HW-E450,ABS,BLACK	1	SNA
..3	M0126	AH73-00154A	RUBBER-FOOT;HW-C450,RUBBER,CLEAR	2	SNA
1		AH91-00464B	ASSY SHIELD;HW-E350,ZC,SBE3	1	SNA
.2	FIL	0203-000007	TAPE-FILAMENT;T0.15,L55M,TRP,FILAMENT	0	SNA
.2		3711-008047	HEADER-BOARD TO BOARD;NOWALL,12P,1R,2.5m	1	SA
.2	T0268	3903-000717	CBF-POWER CORD;AT,EUROPE,LP-21,2P,250V,2	1	SA
.2	EC13	AH39-01171B	LEAD CONNECTOR;HW-E350,Shield Connector,	1	SA
.2	P001A	AH44-00272A	DC VSS-HP;HW-E350,SSAV-A5AEBOT,AC/DC,120	1	SA
.2	AP028	AH69-03527A	PAD-THERMAL;HW-E350,Rubber,1.0t,10,40,3,	2	SNA
.2	FL06	AH96-01477X	ASSY CABLE P;HW-E350,FFC,140mm,15P,0.5mm	1	SA
1	ACCE1	AH92-03980C	ASSY ACCESSORY;HW-E350,ZF,SBE3	1	SNA
.2	REMO2	AH59-02433A	REMOCON;TM930C,32Key,3V,SAT, HW-E350, SI	1	SA
.2	HWN01	AH61-02952A	HOLDER-WALL NEW;HT-WS1,SECC T2.0,13,53.5	1	SA
.2		AH96-01597C	ASSY ACCESSORY-MANUAL/CABLE;HW-E350,ZF,S	1	SNA
..3	VS062	3301-000144	CORE-FERRITE;34.5x12.5x32.5mm,1500,2800G	1	SNA
..3		3301-001068	CORE-FERRITE;13x5x25mm	1	SA
..3	T0685	4301-000116	BATTERY-ALKALINE;1.5V,R03,10.5x44.5mm,AA	2	SNA
..3	EC19	AH39-01077A	CBF CABLE;ALDSX185,HT-WS1,1P-2P,1500mm,D	1	SC
..3		AH39-01178A	USB CABLE;HW-E450,4,100mm,BLK	1	SA
..3		AH63-02236D	SHEET-PEBAG;ALL MODEL,PE*,0.2,CLEAR	1	SNA
..3		AH68-02430E	MANUAL;HW-E350,ZF,FR/IT/SPA/POR,MOJO80,1	1	SNA
..3		AH68-50254B	LABEL-SERIAL;-,-,TETRON,T0.1,W42,L10,-,-	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3		AK68-01811H	LEAFLET-05,WARRANTY CARD;comm,Samsung,La	1	SNA
1		AH92-03983C	ASSY LABEL;HW-E350,EUROPE,SBE3	1	SNA
.2		AH68-02444S	LABEL-POP STICKER;HW-E350/ZF,SEF,PET,W12	1	SNA
.2		AK68-01986B	LABEL RATING-01;BD-D,WW,PET 0.05,50,23.5	1	SNA
1		AH92-03996B	ASSY BOX;HW-E350	1	SNA
.2		AH68-01981M	LABEL-BOX;ALL MODEL,ALL BUYER,heat sensi	1	SNA
.2		AH69-03525B	BOX-SET;HW-E350/ZF,CB,SW,A-01,SW2,WHT,OF	2	SNA
1		AH92-04064A	ASSY P/MATERIAL;HW-E350	1	SNA
.2	S.N.A	0203-001100	TAPE-OPP MASKING;OPP/W75/CLR,T0.075,W75,	2	SNA
.2		AH69-03523A	CUSHION-SET;HW-E350,EPS,500,300,200	1	SNA
.2		AK63-00934B	SHEET-NITRON;HW-E350,NITRON(HDPE+PE FOAM	1	SNA