


5. Exploded View & Part List

5-1. LE32C45**** Exploded View

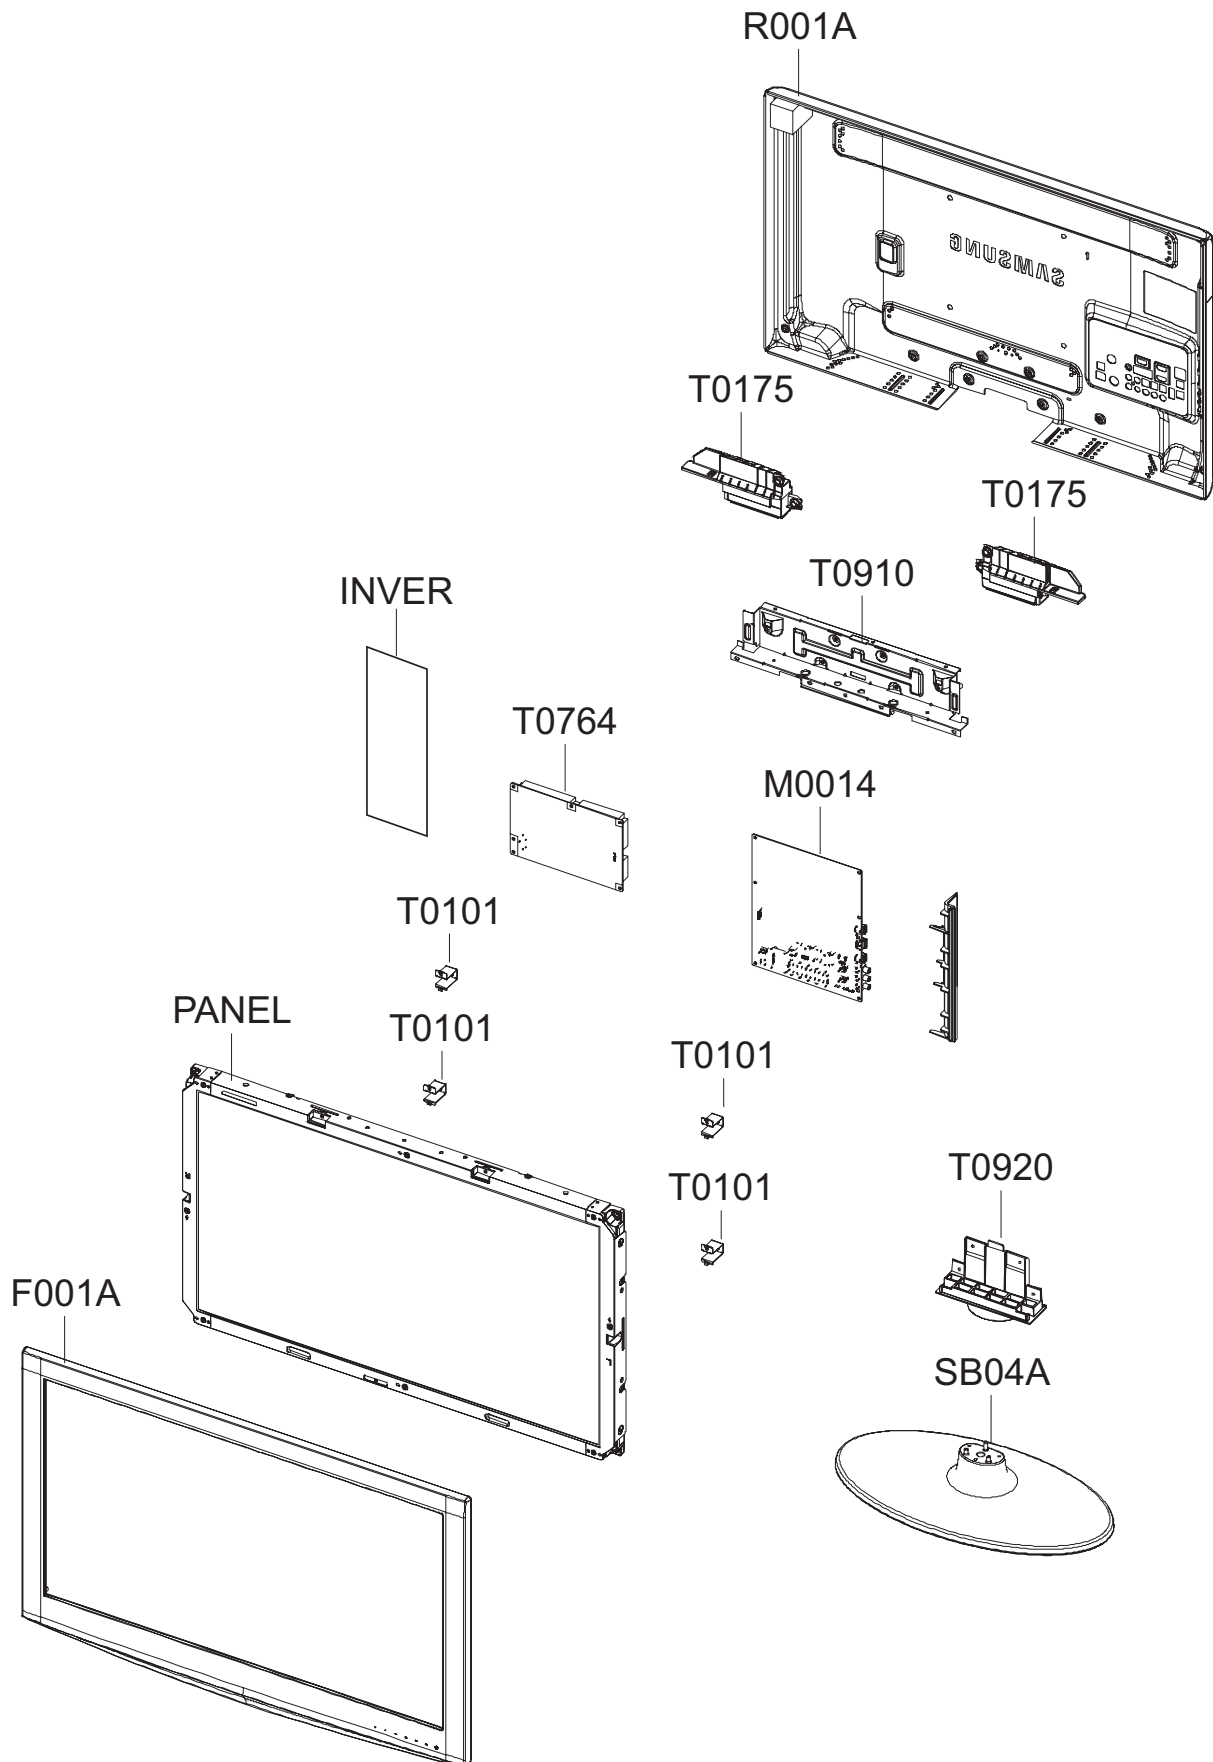

5-2. LE32C45** Parts List**

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
F001A	BN96-12733B	ASSY COVER P-FRONT;LC450 32,EO,PC+ABS,V0	1	SA	
PANEL	BN07-00825A	LCD-PANEL;T315XW03 V2,AU31X32,8bit,31.5,	1	SA	
INVER	BN81-04435A	A/S-INV T315XW03 V2;T315XW03 V2	1	SA	
T0101	BN61-05996A	BRACKET-WALL;LC650 40,SECC,T1.2	4	SNA	
T0764	BN44-00338A	SMPS-LCD TV;P2632HD_ASM,P2632HD_ASM,AC/D	1	SA	
M0014	BN94-02699F	ASSY PCB MAIN;LE32C450E1WX*	1	SA	
	BN61-06023A	HOLDER-SIDE AV;LC450 32,EO,PC+ABS,V0,BK0	1	SNA	
T0910	BN96-13341A	ASSY BRACKET P-STAND LINK;LC530 32,SECC,	1	SNA	
T0175	BN96-12871A	ASSY SPEAKER P;6ohm,4pin,10W,L:530 R:170	1	SA	
R001A	BN96-12737B	ASSY COVER P-REAR;LC450 32,EO,PCM T0.5,B	1	SA	
T0920	BN61-06139A	GUIDE-STAND;LC450 32,ABS,V0,BK0020	1	SA	
SB04A	BN96-12870B	ASSY STAND P-BASE;LC350 32,PC+ABS,V0,BK0	1	SA	

5-2-1. LE32C45** Parts List**

Service Bom (SA: SERVICE AVAILABLE, SNA: SERVICE NOT AVAILABLE)

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
			LE32C450E1WXZG			
0.1		BN90-02428B	ASSY COVER FRONT;LC450 32	1	SNA	
..2	F001A	BN96-12733B	ASSY COVER P-FRONT;LC450 32,EO,PC+ABS,V0	1	SA	
...3	W391	6003-000275	SCREW-TAPTYPE;BH,+,B,M3,L10,ZPC(BLK),SWR	4	SA	
...3	M0081	6003-001003	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	4	SA	
...3	AB326	BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	2	SNA	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.001	SNA	
...3		BN61-04731B	BOSS-TAPE;AMBER,ACRYL,T1.1,W12.0mm,WHITE	0.5	SNA	
...3	CCM1	BN63-02183F	COVER-SHEET;Rhcm,PE Vinyl,T0.04,900mm,20	0.35	SNA	
...3	CCM1	BN63-05199P	COVER-SHEET;AMBER,PE,T0.08,W1000,200M,CL	0.31	SNA	
...3	F001	BN63-06502B	COVER-FRONT;LC450 32,EO,PC,V0,RD0053,S/M	1	SNA	
...4		0103-005030	RESIN-PC;V0,PC	495	SNA	
...3	AD070	BN64-01259A	DECORATION-BOTTOM;LC450 32,PC CLEAR,V2,T	1	SNA	
...3	M0125	BN96-13046D	ASSY BOARD P-TOUCH FUNCTION&IR;LN32C450,	1	SA	
...3		BN60-00162V	SPACER-FOAM;FOAM,50000mm,Dark Gray,0.5T,	2.18	SNA	
...3		BN60-00162Y	SPACER-FOAM;FOAM,50000mm,Dark Gray,0.35T	2.18	SA	
...3		BN61-06138A	HOLDER-BOSS BOTTOM;LC450 32,ABS,HB,WT003	1	SNA	
...3	RS01	BN63-06503B	COVER-REAR SUB;LC450 32,HIPS,V0,BK0020	1	SNA	
..2	T0175	BN96-12871A	ASSY SPEAKER P;6ohm,4pin,10W,L:530 R:170	1	SA	
0.1	R001A	BN90-02432C	ASSY COVER REAR;LC450 32	1	SNA	
..2	M0081	6003-001003	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	13	SA	
..2	R001A	BN96-12737B	ASSY COVER P-REAR;LC450 32,EO,PCM T0.5,B	1	SA	
...3	R001	BN63-06392C	COVER-REAR;32,LC550/530,EO,PCM,T0.5,BLK,	1	SNA	
...3	T0071	BN64-01297B	INLAY-TERMINAL;LC450,EO,PS SHEET,T0.5,BL	1	SNA	
...3	T0139	BN65-00003A	CLAMPER BAG;42C7,LDPE,HB,BLK	1	SNA	
...3		BN60-00162X	SPACER-FOAM;FOAM,30000mm,Dark Gray,1T,15	1.77	SNA	
...3		BN64-01269E	INLAY-AV;LC450,EO,PS SHEET,T0.5,BLK	1	SNA	
...3	AH358	BN61-06544A	HOLDER-REAR;LC650 32,PP,BLK	1	SNA	
...3	M0131	BN63-03845A	GASKET;EMT4-10-4-110R-DM8,4T,10MM,100MM	2	SNA	
0.1		BN91-04663A	ASSY SHIELD;LE32C450E1WX*	1	SNA	
..2	T0081	6001-002284	SCREW-MACHINE;BH,+,M4,L8,ZPC(WHT),SWRCH1	8	SA	
..2	M0081	6003-000337	SCREW-TAPTYPE;BH,+,S,M4,L10,ZPC(BLK),SWR	6	SA	
..2	M2893	BN39-01267A	LEAD CONNECTOR;LA32B450,UL 2651 AWG#26,1	1	SA	
..2	M2893	BN39-01274A	LEAD CONNECTOR;LC5F,UL 1007 #26,14P,80mm	1	SA	
..2	T0764	BN44-00338A	SMPS-LCD TV;P2632HD_ASM,P2632HD_ASM,AC/D	1	SA	
..2		BN61-06023A	HOLDER-SIDE AV;LC450 32,EO,PC+ABS,V0,BK0	1	SNA	
..2	T0920	BN61-06139A	GUIDE-STAND;LC450 32,ABS,V0,BK0020	1	SA	
..2	M0523	BN96-12973A	ASSY BRACKET P-WALL;32,37,40,LC650,SECC,	4	SNA	
...3	T0101	BN61-05996A	BRACKET-WALL;LC650 40,SECC,T1.2	4	SNA	
...3		BN60-00188B	SPACER-FOAM;LCD,FELT,20,3.0,20,Center :	4	SNA	
..2	T0081	6001-002604	SCREW-MACHINE;BH,+,M4,L10,ZPC(WHT),SWRCH	2	SA	
..2		BN61-06441A	HOLDER-INLET;LC530,ABS,V0	1	SNA	
..2	T0910	BN96-13341A	ASSY BRACKET P-STAND LINK;LC530 32,SECC,	1	SNA	
...3		BN61-02429K	STUD-PEM;PNB,M3.8,D7,L14.9,ZPC(SIL),SUM2	4	SNA	
...3	M0115	BN61-06024A	BRACKET-STAND LINK;LC550 32",SECC,T1.2	1	SNA	
...3		BN61-05281A	HOLDER-CLAMP;LCD,NYLON 66,WHT	2	SNA	
..2	FL06	BN96-12469Q	ASSY CABLE P;LE32C450,FFC CABLE,403mm,30	1	SA	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
..2		BN61-06559A	HOLDER-GROUND;LC550,SUS304,0.3	2	SNA	
..2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	7	SA	
0.1		BN91-04912A	ASSY LCD-AUO;BN07-00825A	1	SNA	
..2	PANEL	BN07-00825A	LCD-PANEL;T315XW03 V2,AU31X32,8bit,31.5,	1	SA	
...3	INVER	BN81-04435A	A/S-INV T315XW03 V2;T315XW03 V2	1	SA	
0.1		BN92-05530C	ASSY BOX;LC450 32	1	SNA	
..2		BH68-00662A	LABEL BOX-00;ALL MODEL,MOJO 90G,60,110,W	1	SNA	
..2		BN69-05098A	BOX-SET;32LC450-SEH,CB,A-01,DW3,YEL,W852	1	SNA	
0.1		BN92-05534A	ASSY P/MATERIAL;LC450 32	1	SNA	
..2		6902-001104	BAG ROLL;HDPE/HDPE/NITRON,T0.5,W800,L175	1.9	SNA	
..2		BN69-03934A	WRAP STRETCH FILM;All,HDPE,0.012,500,300	5	SNA	
..2		BN81-02321A	BAG-AIR;LIGHT FLEX PLASTIK,PE WHITE,L120	1	SNA	
..2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P 100	1	SNA	
..2		AA01-00004A	FOIL;2000,2000,NTR,SEH	1	SNA	
..2		BN69-04046A	PAD PACKING-EDGE;CB,B800,W50x50,L2000,YE	1	SNA	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	2.3	SNA	
..2		BN69-02871A	PALLET-WOOD;2233BW,WOOD,L1200,W890,H120,	1	SNA	
..2		BN69-04996A	CUSHION-SET;32LC450,EPS,Horizontal packi	1	SNA	
0.1		BN92-05716C	ASSY LABEL;LE32C450E1WX*	1	SNA	
..2	T0527	BP68-00052B	LABEL-00,RATING;CCTV,TETRON PAPER,T0.05,	1	SNA	
0.1	ACCE1	BN92-05717F	ASSY ACCESSORY;LE26C450E1WX*,32	1	SNA	
..2	ACCE2	BN96-13112C	ASSY ACCESSORY-CABLE;LE22C450E1WX*,26,32	1	SNA	
...3	T0268	3903-000456	CBF-POWER CORD;DT,EU/KR,CP3,IEC320 C13-R	1	SA	
...3	T0120	4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,HOLDER,7.	2	SNA	
...3	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	3	SA	
...3	T0524	6902-001107	BAG PE;LDPE,T0.05,W450,L400,TRP,0,3Separ	1	SNA	
...3	T0074	BN59-01012A	REMOCON;TM950,SAMSUNG,20PIN SINGLE,48KEY	1	SA	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	SA	
...3	T0524	6902-001169	BAG PE;LDPE,T0.1,W60,L60,Sealing	1	SNA	
..2		BN96-13112H	ASSY ACCESSORY-MANUAL;LE26C450E1WX*,32	1	SNA	
...3		AA69-02656A	BAG ACCESSORY;PJTV,LDPE,T0,05,L400,W280,	1	SNA	
...3		BN68-00514E	MANUAL FLYER-05,WARRANTY CARD;comm,Samsu	1	SNA	
...3		BN68-02592B	MANUAL USERS;C450,SAMSUNG,4LANGS,GERMANY	1	SNA	
...3		BN68-02765B	MANUAL FLYER-STAND GUIDE;L450(26~32),SAM	1	SNA	
...3		AA68-03242V	MANUAL FLYER-SAFETY GUIDE;comm,Samsung,1	1	SNA	
0.1	S001A	BN90-02527B	ASSY STAND;LC350 32	1	SNA	
..2	SB04A	BN96-12870B	ASSY STAND P-BASE;LC350 32,PC+ABS,V0,BK0	1	SA	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.04,680mm,20	0.4	SNA	
...3		BN63-06688B	COVER-STAND BASE;LC350 32,PC+ABS,V0,BK00	1	SNA	
....4		0103-005041	RESIN-PC;V0,PC+ABS	519	SNA	
...3	M0126	BN73-00052B	RUBBER-FOOT;42Q9,c9,CR Rubber Gray,T3.0	5	SNA	
0.1	M0017	BN91-04883B	ASSY CHASSIS;LC450,N82A	1	SNA	
..2	M0014	BN94-02699F	ASSY PCB MAIN;LE32C450E1WX*	1	SA	
...3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	SNA	
...3		3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	SA	
...3	CN906	3707-001096	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA	
...3		3709-001601	CONNECTOR-CARD SLOT;68P W/L,1.27mm,PCMC	1	SA	
...3		3711-007302	HEADER-BOARD TO BOARD;BOX,18P,2R,2mm,ANG	1	SA	
...3		3722-003037	JACK-USB;4P/1C W/L,AU/NI,BLK,ANGLE,A	1	SA	
...3	JA330	3722-003038	JACK-PHONE;7P/1C W/L,SN,BLK	2	SA	
...3		3722-003039	JACK-SCART;21P,Sn,BLK	1	SA	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3	JA333	3722-003040	JACK-PIN;3P W/L,SN,BLK/YEL/WHT/RED,ANGLE	1	SA	
...3		3722-003041	JACK-PIN;5P RCA(SCART) W/L,NI,RED/WHT/RE	1	SA	
...3	CIS3	BN40-00173A	TUNER;DTOS40CVL081A,DVB-T/C,164CH,38.9MH	1	SA	
...3	T0066	BN62-00040A	HEAT SINK-ES;SAPPHIRE,T2.0,36*36*6.6,BLK	1	SNA	
...3	M0412	BN96-11826C	ASSY BRACKET P-PCB;LB450 40,SPTE T0.5 +	1	SNA	
....4		BN61-04928C	BRACKET-SUPPORT PCB;SPTE,T 0.5,SCREW-M4	1	SNA	
....4		BN61-05262B	HOLDER-BOSS PCB;52,LB550(E0),PBT+G/F(30%	1	SNA	
...3		BN97-04027F	ASSY SMD;LE32C450E1WX*,BN94-02699F	1	SNA	
....4		0202-001767	SOLDER-CREAM;LST-5710,D20~38,Sn-57Bi-1Ag	0.409	SNA	
....4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	16	SA	
....4	D0254	0402-000553	DIODE-SCHOTTKY;SS24/B240,40V,2000mA,DO-2	2	SA	
....4		0403-001164	DIODE-ZENER;MMSZ5232B,5.32-5.88V,500MW,S	1	SA	
....4		0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	SA	
....4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	16	SNA	
....4	D0254	0404-001271	DIODE-SCHOTTKY;SSA34,40V,3000mA,SMA,TP	1	SA	
....4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	SA	
....4	T0139	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	SA	
....4	T0139	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	6	SNA	
....4	SD3	0407-000114	DIODE-SWITCHING;KDS184,80V,100mA,SOT-23,	3	SNA	
....4	KQ1	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	1	SA	
....4	Q101	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	12	SA	
....4	CEQ2	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	5	SA	
....4	Q409	0505-000274	FET-SILICON;AO4435L,P,-30V,-11A,0.014ohm	1	SNA	
....4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	SA	
....4	ND51C2	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	SA	
....4	IC104	0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	3	SA	
....4	IC104	0802-001012	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,DQFN,	1	SNA	
....4	T0596	0904-002554	IC-USC;AU6256-JBF,QFN,28P,5x5mm,12MHz,TP	1	SA	
....4	IC106	1001-001573	IC-VIDEO SWITCH;Sil9287BCNUTR,QFN,72P,10	1	SNA	
....4		1006-001474	IC-LINE DRIVER;DRV604PWP,HPSSOP,28P,9.8x	1	SA	
....4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	2	SA	
....4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	SA	
....4		1105-002058	IC-DDR2 SDRAM;K4T1G164QE-HCF8,DDR2,1Gbit	2	SA	
....4	T0124	1201-002992	IC-POWER AMP;STA369BWS,PSSO,36P,10.3x7.5	1	SA	
....4	T0087	1203-001815	IC-POSIFIXED REG.;78M09,TO-252,3P,PLAST	1	SA	
....4	T0087	1203-002835	IC-POSIFIXED REG.;KIA7805AF,DPAK,3P,6.6	1	SA	
....4	T0087	1203-002898	IC-POSIFIXED REG.;G950T45R,TO-252,3P,6.	1	SA	
....4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA	
....4		1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	SA	
....4		1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	SA	
....4		1203-006013	IC-DC/DC CONVERTER;AOZ1031AI,SO-8,8P,4.9	1	SA	
....4		1203-006017	IC-VOL. DETECTOR;RT9824GJ8,TSOT23,8P,2.9	1	SA	
....4	T0087	1203-006135	IC-POSIFIXED REG.;AP1117D-33-GZ-13-89,T	1	SA	
....4	T0087	1203-006136	IC-POSIFIXED REG.;AP1117D-18-GZ-13-89,T	1	SA	
....4	IC012	1203-006138	IC-POSIFIXED REG.;AP1117DGZ-13-89,TO-2	1	SA	
....4		1203-006288	IC-VOL. DETECTOR;RT9818B-18GV,SOT-23-3,3	1	SA	
....4		1204-003088	IC-DEMODULATOR;DRX39XYK,PQFN,64P,9x9x0.8	1	SA	
....4		1204-003096	IC-VIDEO DECODER;HIDTVPRO-SX,PBGA,580P,P	1	SA	
....4		1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	2	SA	
....4		1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	SA	
....4		1205-003733	IC-SWITCH;AP2191MPG-13,MSOP-8L-EP,8P,2.9	1	SA	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4		1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	SA	
....4		1405-001271	VARISTOR;20Vdc,5A,1.0x0.5x0.6mm,TP	24	SA	
....4	PR6	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	4	SNA	
....4	R105	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	34	SNA	
....4	HDR7	2007-000139	R-CHIP;220ohm,5%,1/16W,TP,1005	3	SNA	
....4	AR49	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	7	SNA	
....4	MR306	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	14	SNA	
....4	R319	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	48	SNA	
....4		2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	2	SNA	
....4	R104	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	52	SNA	
....4	R102	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	8	SA	
....4	HDR2	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	SNA	
....4	HDR9	2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	2	SNA	
....4	MR36	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	8	SNA	
....4	AR43	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	2	SNA	
....4	MR13	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	6	SNA	
....4	R123	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	3	SNA	
....4	DR39	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	2	SNA	
....4	MR16	2007-000168	R-CHIP;470Kohm,5%,1/16W,TP,1005	1	SA	
....4	R509	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	SNA	
....4	R111	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	10	SNA	
....4	HDR17	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	4	SNA	
....4	R338	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	11	SNA	
....4	UR23	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	2	SNA	
....4	MR9	2007-000455	R-CHIP;18Kohm,1%,1/10W,TP,1608	1	SA	
....4	ER13	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	SNA	
....4	R726	2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	1	SNA	
....4		2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	SA	
....4	R124	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	3	SNA	
....4	HR3	2007-000903	R-CHIP;430ohm,1%,1/10W,TP,1608	1	SNA	
....4	DR37	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SNA	
....4		2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	2	SA	
....4	OTR1	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	9	SNA	
....4	DR43	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	SNA	
....4		2007-001317	R-CHIP;910ohm,5%,1/16W,TP,1005	1	SNA	
....4	R326	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	11	SNA	
....4		2007-002768	R-CHIP;6.2Kohm,1%,1/10W,TP,1608	1	SA	
....4	MR316	2007-002796	R-CHIP;510ohm,5%,1/16W,TP,1005	1	SA	
....4	PR24	2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	2	SA	
....4	TR30	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	11	SNA	
....4		2007-007134	R-CHIP;39Kohm,1%,1/16W,TP,1005	1	SA	
....4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	1	SNA	
....4	DR4	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	3	SNA	
....4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	6	SNA	
....4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	SA	
....4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005	1	SA	
....4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	8	SNA	
....4		2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	3	SNA	
....4	MR11	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	13	SA	
....4		2007-008134	R-CHIP;12.4Kohm,1%,1/16W,TP,1005	1	SC	
....4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	1	SNA	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4		2007-008563	R-CHIP;270ohm,1%,1/16W,TP,1005	1	SA	
....4		2007-008593	R-CHIP;750ohm,1%,1/16W,TP,1005	1	SA	
....4	ZRN10	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SA	
....4	DAR09	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	5	SA	
....4		2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,T,1010	4	SA	
....4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	7	SA	
....4	DRP9	2011-001474	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	SA	
....4		2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	2	SA	
....4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	7	SNA	
....4		2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	16	SNA	
....4	DC30	2203-000138	C-CER,CHIP;1.5nF,10%,50V,X7R,TP,1005,-	2	SNA	
....4	PC43	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	4	SA	
....4	MC302	2203-000425	C-CER,CHIP;018nF,5%,50V,C0G,TP,1005	4	SA	
....4	C254	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	13	SA	
....4	AC139	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608	2	SA	
....4	V1233	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	6	SNA	
....4	MC9	2203-000627	C-CER,CHIP;.022nF,5%,50V,C0G,TP,1005	2	SNA	
....4	DC374	2203-000659	C-CER,CHIP;0.27nF,5%,50V,C0G,1608	1	SA	
....4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	SNA	
....4	DC25	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,1005	11	SA	
....4	CK40B	2203-000838	C-CER,CHIP;0.39NF,5%,50V,C0G,TP,1608	3	SNA	
....4	KFC6	2203-000872	C-CER,CHIP;0.0030nF,0.25pF,50V,C0G,1608	2	SNA	
....4	HDC5	2203-001072	C-CER,CHIP;0.056nF,5%,50V,NP0,1005	4	SA	
....4	C101	2203-001124	C-CER,CHIP;0.68NF,10%,50V,X7R,TP,1005	1	SNA	
....4	DC87	2203-001153	C-CER,CHIP;.068nF,5%,50V,NP0,1005	2	SA	
....4	AD480	2203-001428	C-CER,CHIP;470nF,10%,50V,X7R,TP,2012	2	SNA	
....4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	17	SNA	
....4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	8	SNA	
....4	C711	2203-002982	C-CER,CHIP;6.8nF,10%,50V,X7R,1005	1	SA	
....4	AAC1	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	7	SNA	
....4	DC9	2203-005481	C-CER,CHIP;47nF,10%,10V,X7R,TP,1005	3	SA	
....4	AD480	2203-005511	C-CER,CHIP;27nF,10%,10V,X7R,TP,1005	1	SA	
....4	AD480	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	1	SNA	
....4	PC11	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	1	SNA	
....4	C102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	121	SNA	
....4	JC10	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,1608	2	SA	
....4	AD480	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	18	SA	
....4	C125	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	47	SC	
....4	HE4	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,2012	3	SA	
....4	HDC11	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	14	SNA	
....4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,1608	1	SNA	
....4	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,1005	15	SNA	
....4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	2	SNA	
....4	T0052	2703-000158	INDUCTOR-SMD;1uH,10%,2012	4	SA	
....4	T0052	2703-000296	INDUCTOR-SMD;680nH,10%,1608	1	SA	
....4	VL6	2703-000398	INDUCTOR-SMD;10uH,10%,3225	5	SA	
....4	L1103	2703-000403	INDUCTOR-SMD;22uH,10%,3225	1	SA	
....4	T0052	2703-001239	INDUCTOR-SMD;3.3uH,10%,1608	3	SA	
....4	L607	2703-001254	INDUCTOR-SMD;1.8uH,10%,2012	1	SA	
....4	T0052	2703-002268	INDUCTOR-SMD;8.2nH,5%,1005	2	SNA	
....4	T0052	2703-003149	INDUCTOR-SMD;2.2uH,20%,5050	2	SA	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	T0052	2703-003150	INDUCTOR-SMD;4.7uH,20%,5050	4	SNA	
....4	X202	2801-003326	CRYSTAL-SMD;24MHz,30ppm,28-ABX,20pF,50oh	1	SA	
....4	X202	2801-004004	CRYSTAL-SMD;20.25MHz,20ppm,28-AAN,13pF,2	1	SA	
....4	X202	2801-004775	CRYSTAL-SMD;12MHz,30ppm,16pF,30ohm,TP	1	SNA	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	2	SA	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608	7	SA	
....4	T0568	3301-002039	BEAD-SMD;26ohm,1608,TP	37	SA	
....4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,Hi	1	SNA	
....4		3701-001591	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-S,AU	2	SNA	
....4		3701-001693	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-A	1	SA	
....4	AC510	3708-001150	CONNECTOR-FPC/FFC/PIC;30P,1mm,SMD-A,SN,Y	1	SA	
....4	CON_US	3711-005616	HEADER-BOARD TO CABLE;BOX,10P,1R,2mm,SMD	1	SNA	
....4	HB01A	3711-007336	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,SM	1	SA	
....4		BN41-01331B	PCB MAIN;SX1 DVB (4/5series),FR-4,4,1.0,	1	SNA	
....4		BN97-04023A	ASSY MICOM-MAIN;N82A,2009.11.10,T-TDT5DE	1	SNA	
.....5		1107-001818	IC-NAND FLASH;KFG1G16U2C-DIB6,1024Mbit,6	1	SNA	
....4		BN97-04024A	ASSY MICOM-SUB;N82A,2009.11.10,T-TDT5DEU	1	SNA	
.....5	IC115	1107-001580	IC-FLASH MEMORY;MX25L4005,4Mbit,512Kx8,S	1	SNA	
....4		1203-006337	IC-POSIFIXED REG.;G9091-330T11U,SOT-23-	1	SA	
...3		BN97-04098A	ASSY CI PLUS;BN46-00025A,LC5F,SX1 platfo	1	SNA	
....4		BN46-00025A	KEY CODE-CI PLUS KEY;CI PLUS KEY,TCTC,SE	1	SNA	
...3		BN73-00273B	SILICON/RUBBER-GAPPAD;UE32C6500,SILICON+	1	SNA	