


1. Exploded View & Part List

Exploded View

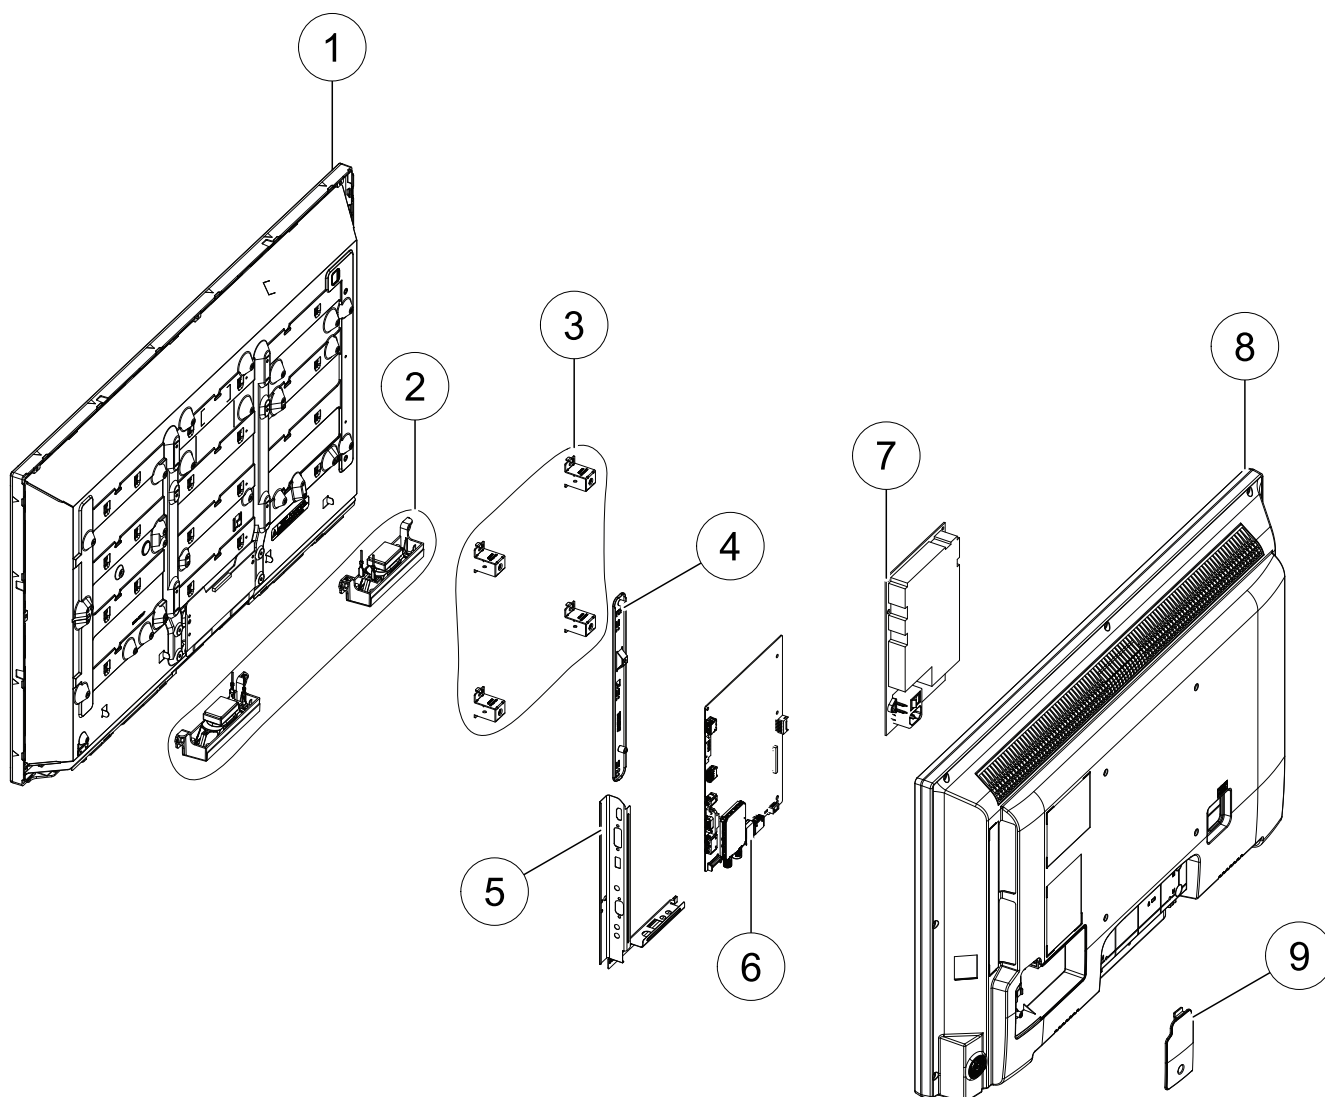

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-00586A	PRODUCT LCD-AMLCD; 5k 32" Direct-LED,LTJ3	SA	1
2	2	SP01A	BN96-23514H	ASSY SPEAKER P; 6ohm,4pin,10W,MDC_32inch	SA	1
3	2	CB20	BN61-07952A	BRACKET-WALL; UE5000 40",EGI-SECC PL,T1.2	SNA	4
4	2	CB07	BN61-09255C	BRACKET-PCB; MDC,EGI SECC,T0.8,32inch	SNA	1
5	4	CB01	BN61-09253B	BRACKET-AV; MDC 32" 40",PCM,T0.4,Non Tune	SNA	1
6	2	M0014	BN94-06438C	ASSY PCB MAIN; MDC 32",W/W	SA	1
7	2	P001A	BN44-00528A	DC VSS-LFD; PD32AV1_LFD,PSLF760501A,AC/DC	SA	1
8	2	R001A	BN96-27915B	ASSY COVER P-REAR; MDC 32",W/W,PC+ABS+G.F	SA	1
9	2	FC05	BN63-10712A	COVER-JACK; MD32C,ABS+PC,NH-1017D,V0	SNA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			LH32MDCPLGC/EN (SS01)		
1	R001A	BN90-04868B	ASSY COVER REAR;MDC 32",W/W	1	SNA
.2		6001-002755	SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1	4	SA
.2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	8	SA
.2	FC05	BN63-10712A	COVER-JACK;MD32C,ABS+PC,NH-1017D,V0	1	SNA
..3		0103-005041	RESIN-PC;FR3200TV,901408,BK0008,1.2mm V-	30	SNA
.2	R001A	BN96-27915B	ASSY COVER P-REAR;MDC 32",W/W,PC+ABS+G.F	1	SA
..3	SCREW	6003-000115	SCREW-TAPTYPE;BH,+,B,M3,L6,ZPC(BLK),SWRC	2	SA
..3	R001	BN63-10698A	COVER-REAR;MD32C,PC+ABS+G.F15%,BK0007,21	1	SNA
..3		BN68-04937A	LABEL-TERMINAL SIDE;MDC,PET,T0.05	1	SNA
..3		BN68-04938B	LABEL-TERMINAL BOTTOM;MDC,PET,T0.05,NON	1	SNA
..3	FB01A	BN96-28778B	ASSY BOARD P-FUNCTION;LH32MDC,CT20SD11BA	1	SA
1		BN91-08711A	ASSY LCM-AMLCD;BN95-00586A,LTJ320HN07-V	1	SNA
.2	PANEL	BN95-00586A	PRODUCT LCD-AMLCD;5k 32" Direct-LED,LTJ3	1	SA
..3	FL06	3809-002684	FFC CABLE-FLAT;60V,105C,47mm,66P,0.5mm,U	2	SNA
..3		6001-002757	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	2	SA
..3		BN02-00043C	TAPE ETC-SHEET FIXING;F-LED 32/40/46,3M	2	SNA
..3	T0073	BN63-03561A	GASKET-EMI;42Q9,Conductive Fabric,7.0,6.	1	SNA
..3		BN63-09395B	COVER-T CON;Y12 F-LED (60Hz/120Hz),CC105	1	SNA
..3		BN67-00327R	RUBBER-FOOT;RUBBER-FOOT,SILICONE,SQUARE,	2	SNA
..3		BN68-02471A	LABEL-STICKER;WW,Art Paper,80,40,AV	1	SNA
..3		BN90-03653A	ASSY MISC-BLU;F-LED	1	SNA
...4		BN61-08057A	LGP-DIFFUSER PLATE;32" Diffuser Plate,P	1	SNA
...4		BN63-09292A	SHEET-REFLECTOR;32",F-LED, SY70 188, H4	1	SNA
...4		BN63-09486A	SHEET-DIFFUSER;32inch DLED UTE24B-10E(8)	1	SNA
...4		BN63-09487A	SHEET-DIFFUSER;32inch DLED UTE24B-10B(0)	1	SNA
...4		BN96-21623B	ASSY FRAME P-MOLD MIDDLE U;Y12 FULL LED	1	SNA
....5		BN60-00440A	SPACER-PANEL (UD);F-LED 32,GASKET,MGT-30	2	SNA
....5		BN60-00441A	SPACER-PANEL (LR);F-LED 32,GASKET,MGT-30	2	SNA
....5		BN61-07890B	FRAME-MOLD MIDDLE;Y12 FULL_LED 32" _FHD,P	1	SNA
...4		BN96-22347E	ASSY MISC P-CHASSIS BOTTOM;F-LED 32" SLI	1	SNA
....5		BN02-00094A	TAPE PET;Y12 F-LED,MT-PFR,T 0.05,W30,L40	1	SNA
....5		BN02-00102B	TAPE FILAMENT;UE7000,#893,0.15,25,50,WHI	0	SNA
....5		BN02-00134C	TAPE ETC-SHEET FIXING;F-LED 32/40/46/55/	5	SNA
....5	EC13	BN39-01587A	LEAD CONNECTOR;32" Direct wire-harness,L	1	SNA
....5		BN61-08161A	HOLDER-LED-PCB;Direct-LED,PC,white	2	SNA
....6		0103-009493	RESIN-PC;LH-1070W,W92853,WT0107,V-2	2	SNA
....5		BN63-09500A	GASKET-EMI;Y12 Direct LED,Conductive Fab	4	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5	CC02	BN64-01895C	CHASSIS-BOTTOM;F-LED 32" SLIDE,EGI-SECC,	1	SNA
....5		BN96-21485A	ASSY MISC P-SUB PCB;32" Sub PCB,2pin*4ea	1	SNA
...4		BN96-24146A	ASSY MISC P-LED BAR;Direct 32 FHD _ Slid	4	SA
...3	XX12-T	BN95-00569B	ASSY T CON;FHD,60Hz 32	1	SC
...4		BN97-06361B	ASSY SMD;BN95-00569B	1	SNA
....5		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,25-36um,S	1	SNA
....5		0404-001314	DIODE-SCHOTTKY;B260A,60V,2000mA,SMA,TP	1	SNA
....5		0404-001373	DIODE-SCHOTTKY;PD3S160,60V,1000mA,PowerD	2	SNA
....5		0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	SA
....5		0406-001317	DIODE-TVS;SMAJ14A,15.6/-17.2V,400W,SMA	1	SNA
....5		0406-001445	DIODE-TVS;RClamp7512N,2.7/2.8/2.9,300W,S	2	SA
....5		0501-000465	TR-SMALL SIGNAL;MMBT3904,NPN,350mW,SOT-2	1	SA
....5		0502-001331	TR-POWER;NSS30100LT1G,PNP,310mW,SOT-23,T	1	SA
....5		0502-001345	TR-POWER;FCX491A,NPN,1000mW,SOT89,TR,900	2	SA
....5		0502-001346	TR-POWER;FCX591A,PNP,1000mW,SOT89,TR,30/	2	SA
....5		0505-002485	FET-SILICON;FDC658AP,P,-30V,-4A,0.075ohm	1	SA
....5		0505-002826	FET-SILICON;ZXMN6A07F,N,60V,1A,0.4ohm,0.	1	SNA
....5		1203-006905	IC-VOL. GENERATOR;iML7939AKD-TR,TQFN,48P	1	SNA
....5		1203-006999	IC-DC/DC CONVERTER;SM4152,QFN,48P,7x7mm,	1	SNA
....5		1404-001152	THERMISTOR-NTC;10KOHM,5%,3380K,1MW/C,TP	1	SA
....5		2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	4	SA
....5		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-000063	R-CHIP;150Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	2	SNA
....5		2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	3	SNA
....5		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	10	SA
....5		2007-000108	R-CHIP;510Kohm,5%,1/10W,TP,1608	1	SA
....5		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	4	SA
....5		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SNA
....5		2007-000231	R-CHIP;1.3Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000256	R-CHIP;1.6Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000516	R-CHIP;2.7Kohm,1%,1/10W,TP,1608	3	SNA
....5		2007-000570	R-CHIP;220ohm,1%,1/10W,TP,1608	3	SA
....5		2007-000701	R-CHIP;3.6Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-000726	R-CHIP;300ohm,1%,1/10W,TP,1608	1	SA
....5		2007-000779	R-CHIP;33ohm,1%,1/10W,TP,1608	7	SA
....5		2007-000962	R-CHIP;5.1Kohm,1%,1/10W,TP,1608	4	SA
....5		2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000999	R-CHIP;510ohm,1%,1/10W,TP,1608	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		2007-001175	R-CHIP;8.2Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-001433	R-CHIP;12Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-002768	R-CHIP;6.2Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	2	SNA
....5		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	10	SNA
....5		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	2	SNA
....5		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	12	SNA
....5		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,0.35	2	SA
....5		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007645	R-CHIP;51.1ohm,1%,1/10W,TP,1608	1	SA
....5		2007-007768	R-CHIP;13Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-007798	R-CHIP;10ohm,1%,1/16W,TP,1005	16	SA
....5		2007-008596	R-CHIP;0.1ohm,1%,1/4W,TP,3216	1	SC
....5		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	4	SA
....5	AD480	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1608	2	SA
....5	AD480	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,TP,1608	1	SNA
....5	AD480	2203-001697	C-CER,CHIP;0.082nF,5%,50V,NP0,TP,1608	2	SA
....5	AD480	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,TP,1608	1	SNA
....5	AD480	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	1	SNA
....5	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	5	SNA
....5	AD480	2203-005918	C-CER,CHIP;1000nF,10%,6.3V,X7R,TP,1608	2	SNA
....5	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	35	SNA
....5	AD480	2203-006320	C-CER,CHIP;2200nF,10%,16V,X7R,TP,2012	1	SNA
....5	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,0.	11	SNA
....5	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	2	SNA
....5	AD480	2203-007132	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3216,1	3	SA
....5	AD480	2203-007193	C-CER,CHIP;10000nF,10%,6.3V,X7R,TP,2012	3	SA
....5	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608,	3	SA
....5	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	3	SNA
....5	AD480	2203-007423	C-CER,CHIP;10000nF,10%,35V,X7R,TP,3216	7	SA
....5	AD480	2203-007424	C-CER,CHIP;4700nF,10%,50V,X7R,TP,3216	4	SA
....5		2409-001240	C-ORGANIC,SMD;33uF,20%,25V,LR,TP,7343(1.	1	SA
....5		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	2	SA
....5		2703-003803	INDUCTOR-SMD;4.7uH,20%,6060,0.031ohm,270	1	SA
....5		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	2	SA
....5		2703-003867	INDUCTOR-SMD;22uH,20%,4040,1.8T,0.29Ohm,	1	SA
....5		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	4	SNA
....5		3301-001864	BEAD-SMD;100ohm,1608,TP,55ohm/29MHz,145o	11	SA
....5		3601-001038	FUSE-SURFACE MOUNT;125V,3A,FAST-ACTING,C	1	SA
....5		3708-002656	CONNECTOR-FPC/FFC/PIC;68P,0.5mm,SMD-A,Au	2	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5	EH01	3711-005601	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,SMD-	1	SA
....5	EH01	3711-005925	HEADER-BOARD TO CABLE;BOX,51P,1R,0.5mm,S	1	SA
....5		BN13-00044A	IC ASIC;LPFC041T0A-Q1,32,40,46 60Hz FHD	1	SA
....5		BN41-01797A	PCB MAIN;2012 60Hz Tcon,FR-4,2,1.2T,170	1	SNA
....5		BN97-06433B	ASSY MICOM;J320HN030F_BIN,2012.02.13,EEP	1	SNA
.....6		1103-001321	IC-EEPROM;24WC128,128Kbit,16Kx8,SOP,8P,5	1	SA
....5		BN97-06447A	ASSY MICOM;LSJ320HN03,320HN03,2011.10.10	1	SNA
.....6		1103-001254	IC-EEPROM;24C02,2Kbit,256x8,TSSOP,8P,4.4	1	SA
...3	XX12-C	BN96-21514A	ASSY OPEN CELL;LSJ320HN03-E,8bit,32 INCH	1	SA
...4		BN81-07433A	A/S-ADHESIVE-A.C.F(CF);ADHESIVE-A.C.F,1-	1	SNA
...4		BN81-07434A	A/S-ADHESIVE-A.C.F(CP);ADHESIVE-A.C.F,1-	1	SNA
...4		BN81-07439A	A/S-ASSY PCB-SOURCE LEFT;ASSY PCB-SOURCE	1	SNA
...4		BN81-07452A	A/S-ASSY PCB-SOURCE RIGHT;ASSY PCB-SOURC	1	SNA
...4		BN81-07469A	A/S-IC DRIVER SOURCE;IC DRIVER SOURCE,1-	1	SNA
...4		BN81-07482A	A/S-POLARIZER-C/F;POLARIZER-C/F,1-POLARI	1	SNA
...4		BN81-07490A	A/S-POLARIZER-TFT;POLARIZER-TFT,1-POLARI	1	SNA
...3	TC01A	BN96-21618A	ASSY MISC P-CHASSIS TOP;Y12 Full LED, 32	1	SA
...4	T0069	AA63-60122K	SPACER-FELT;SPD-42P3S,FELT,L60,D20,NTR,T	4	SNA
...4		BN60-00438A	SPACER-TOP (UD);Full-LED 32",GASKET,FG20	2	SNA
...4		BN60-00439A	SPACER-TOP (LR);Full-LED 32",FG200A,L417	2	SNA
...4		BN60-00446A	SPACER-GASKET;Full-LED,GASKET,FG200A,L25	4	SNA
...4		BN60-00472B	SPACER-BLOCK;F-LED 32",MTU-R,702,BLK,T0.	1	SNA
...4		BN63-07229T	COVER-SHEET;Y12 F-LED,SILICONE,T0.052,W	2	SNA
...4		BN63-09517A	SHEET-THERMAL;GAP PAD,2.5,W 12,L 45,BLAC	1	SNA
...4	AC157	BN64-01900A	CHASSIS-TOP;Y12 F-LED 32",PC+ABS+G/F15%,	1	SNA
1		BN91-10872A	ASSY SHIELD;MDC 32"	1	SNA
.2		6001-002789	SCREW-MACHINE;BH,+,M4,L6,ZPC(WHT),SWRCH1	1	SA
.2		6001-003016	SCREW-MACHINE;PWH,+,M3.0,L5.0,ZPC(WHT),S	15	SA
.2		BN02-00102B	TAPE FILAMENT;UE7000,#893,0.15,25,50,WHI	0	SNA
.2	EC13	BN39-01652Z	LEAD CONNECTOR;LFD MDC32,Lead Connector,	1	SA
.2	P001A	BN44-00528A	DC VSS-LFD;PD32AV1_LFD,PSLF760501A,AC/DC	1	SA
.2	CB20	BN61-07952A	BRACKET-WALL;UE5000 40",EGI-SECC PL,T1.2	4	SNA
.2	CB07	BN61-09255C	BRACKET-PCB;MDC,EGI SECC,T0.8,32inch	1	SNA
...3		BN61-09553A	BRACKET-PEM;MDC,SUM24L,M3,D7,L9.6,ZPC(SI	2	SNA
.2		BN62-00427A	PAD GAP;LFD MDC,SILICON,30*45,18.5T,GRAY	1	SNA
.2	T0527	BN68-00798D	LABEL-ENERGY,STAR;L/M,W/W,PET,T0.05,9.3,	1	SNA
.2	SP01A	BN96-23514H	ASSY SPEAKER P;6ohm,4pin,10W,MDC_32inch	1	SA
.2	FL06	BN96-26699Y	ASSY CABLE P-FFC;MDC 32,FFC,1H,300mm,51P	1	SA
1	M0017	BN91-10876C	ASSY CHASSIS;MDC 32",W/W	1	SNA
.2	M0014	BN94-06438C	ASSY PCB MAIN;MDC 32",W/W	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3		6011-001445	BOLT-SOCKET;4-40 UNC,L7,NI PLT,BRASS,HEX	4	SNA
..3		BN62-00099A	HEAT SINK-ES;LH46LBTLCB/ZA,A6063,20*20*1	1	SNA
..3		BN62-00103A	HEAT SINK-ES;LH46LBTLCB/ZA,A6063,40*40*1	2	SNA
..3		BN62-00286B	HEAT SINK-PS;LFD(LH40DECPLBA/ZA),A5052*,	1	SNA
..3		BN96-28701B	ASSY BRACKET P-AV;MDC 32"40",EU,PCM, T0.	1	SNA
...4	CB01	BN61-09253B	BRACKET-AV;MDC 32" 40",PCM,T0.4,Non Tune	1	SNA
...4	M0131	GK63-00065A	GASKET;71TSFK 10-7-10-15,Conductive Fabr	1	SNA
..3		BN97-06219A	ASSY DRM-KEY CODE-ASS`Y;COM_001,TV,-,Gen	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
..3		BN97-07386B	ASSY SMD;MDC 32~46,NETHERLANDS(W/W)	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,25-36um,S	7	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	9	SA
...4	DS01A	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	3	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	7	SNA
...4		0404-001089	DIODE-SCHOTTKY;RB551V-30,20V,500MA,SOD-3	7	SA
...4		0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	SA
...4		0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	2	SNA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	7	SC
...4		0501-002654	TR-SMALL SIGNAL;2PD601ASL,NPN,250mW,SOT-	2	SA
...4		0504-000126	TR-DIGITAL;KSR1101,NPN,200mW,4.7K/4.7Koh	1	SA
...4		0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	10	SA
...4		0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	2	SA
...4		0904-002306	IC-UART;SC16IS740IPW,TSSOP,16P,5.1x4.5mm	1	SNA
...4		0909-001032	IC-REAL TIME CLOCK;PCF8563,SOP,8P,4.9x3.	1	SA
...4		1001-001109	IC-ANALOG SWITCH;FST3125M,BUS SWITCH & C	2	SA
...4		1001-001545	IC-ANALOG MULTIPLEX;TS3USB221ERSER,R-PQF	2	SA
...4		1001-001680	IC-ANALOG MULTIPLEX;TC7SB3157CFU,CMOS,US	8	SA
...4		1006-001509	IC-DRIVER/RECEIVER;MAX3222ECPWR,TSSOP,20	2	SA
...4		1103-001500	IC-EEPROM;AT24C02C-SSHM-T,2Kbit,256x8,SO	5	SA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA
...4		1105-002153	IC-DDR2 SDRAM;K4T1G164QF-BCF8,DDR2,1Gbit	1	SNA
...4		1105-002269	IC-DDR3 SDRAM;K4B2G1646C-HCMA,DDR3 1866,	4	SA
...4		1201-003341	IC-AUDIO AMP;TAS5735PHPR,HTQFP,48P,7x7mm	1	SA
...4		1203-002945	IC-POSI.FIXED REG.;AP1117E25A,SOT-223,3P	2	SA
...4		1203-003121	IC-POSI.FIXED REG.;FAN1112,SOT-223,3P,6.	1	SA
...4		1203-004363	IC-VOL. DETECTOR;SOT-23,3Z30,2.9x1.6mm,P	3	SA
...4		1203-006017	IC-VOL. DETECTOR;RT9824GJ8,TSOT23,8P,2.9	1	SA
...4		1203-006067	IC-POWER SUPERVISOR;TPS2553DBVR,SOT-23,6	1	SNA
...4		1203-006136	IC-POSI.FIXED REG.;AP1117D-18-GZ-13-89,T	1	SA
...4		1203-006141	IC-POSI.FIXED REG.;S-1172B33-U5T1G,SOT-8	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1203-006167	IC-POS.FIXED REG.;S-1172B12-U5T1G,SOT-8	2	SA
...4		1203-006266	IC-POS.FIXED REG.;AP1117E33GZ-13-89,SOT	2	SA
...4		1203-006339	IC-POS.FIXED REG.;AP1117E18GZ,SOT-223,3	1	SA
...4		1203-007018	IC-DC/DC CONVERTER;TPS54821RHL,QFN,14P,3	1	SA
...4		1203-007137	IC-POS.ADJUST REG.;AP7361-Y,SOT89,5P,4.	1	SA
...4		1203-007151	IC-PWM CONTROLLER;TPS54328DDAR,SO PowerP	1	SNA
...4		1203-007502	IC-DC/DC CONVERTER;AOZ3011PI,SO-8,8Z30,4	3	SA
...4		1204-003317	IC-VIDEO PROCESS;SDP1101,FBGA,196P,11.5x	1	SA
...4		1204-003318	IC-DECODER;SDP1106,FCBGA,1188P,35x35mm,P	1	SA
...4		1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	2	SA
...4		1205-004385	IC-ETHERNET CONTROLLER;RTL8201F-VB-CGT,Q	1	SA
...4		1205-004449	IC-REPEATER;PCA9509DP,TSSOP,8P,5.1X3.1X	1	SNA
...4		1205-004524	IC-LCD CONTROLLER;STDP7320-BB,LFBGA,361P	1	SNA
...4		1205-004608	IC-EXPANDER;STMPE1600QTR,QFN,24Z30,4X4mm	1	SA
...4		1404-001386	THERMISTOR-NTC;10Kohm,3975K,2.1mW/C,TP	1	SA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5x0.6mm,TP,1	21	SA
...4		2007-000039	R-CHIP;0ohm,1%,1/10W,TP,1608	4	SA
...4		2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	2	SA
...4		2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA
...4		2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	2	SA
...4		2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	4	SA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	44	SA
...4		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	19	SNA
...4		2007-000142	R-CHIP;2.7Kohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	81	SNA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	29	SA
...4		2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	4	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	67	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	9	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	39	SNA
...4		2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	5	SNA
...4		2007-000231	R-CHIP;1.3Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000583	R-CHIP;22Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000736	R-CHIP;30Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	4	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000962	R-CHIP;5.1Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001153	R-CHIP;750ohm,1%,1/10W,TP,1608	2	SA
...4		2007-001168	R-CHIP;75ohm,5%,1/4W,TP,3216	1	SA
...4		2007-001175	R-CHIP;8.2Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001284	R-CHIP;4.7ohm,5%,1/16W,TP,1005	4	SNA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	10	SNA
...4		2007-001329	R-CHIP;7.5Kohm,5%,1/16W,TP,1005	6	SA
...4		2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	3	SNA
...4		2007-003112	R-CHIP;27ohm,5%,1/16W,TP,1005	10	SNA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005	11	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	30	SNA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	27	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	20	SNA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	22	SNA
...4		2007-007469	R-CHIP;110ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	7	SNA
...4		2007-007617	R-CHIP;2.49Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	24	SNA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	10	SNA
...4		2007-008137	R-CHIP;24Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-008263	R-CHIP;3Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005	3	SA
...4		2007-008308	R-CHIP;249ohm,1%,1/16W,TP,1005	5	SNA
...4		2007-008391	R-CHIP;6.34Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	1	SA
...4		2007-009853	R-CHIP;1.6Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-009894	R-CHIP;11.8Kohm,1%,1/16W,TP,1005	2	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4		2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	9	SA
...4		2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	2	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	9	SA
...4		2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	SNA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	2	SNA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	5	SNA
...4		2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP-V,4P,TP,	1	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	SNA
...4		2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	1	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	3	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	3	SA
...4	AD480	2203-000330	C-CER,CHIP;0.012nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,TP,1005	9	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	14	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	3	SA
...4	AD480	2203-000626	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1608	2	SNA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	3	SNA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	8	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	3	SA
...4	AD480	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,TP,1005	1	SA
...4	AD480	2203-001428	C-CER,CHIP;470nF,10%,50V,X7R,TP,2012	5	SNA
...4	AD480	2203-001634	C-CER,CHIP;33nF,10%,50V,X7R,TP,1608	2	SNA
...4	AD480	2203-002050	C-CER,CHIP;47nF,10%,50V,X7R,TP,1608	1	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	10	SNA
...4	AD480	2203-002443	C-CER,CHIP;0.33nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-002519	C-CER,CHIP;5.6nF,10%,50V,X7R,TP,1005	1	SNA
...4	AD480	2203-002720	C-CER,CHIP;10nF,10%,25V,X7R,TP,1005,0.5T	2	SNA
...4	AD480	2203-002982	C-CER,CHIP;6.8nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-005054	C-CER,CHIP;0.0047nF,0.25pF,50V,NP0,TP,10	3	SA
...4	AD480	2203-005221	C-CER,CHIP;15nF,10%,50V,X7R,TP,1608	1	SNA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	18	SNA
...4	AD480	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,TP,1005	4	SNA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	3	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	241	SA
...4	AD480	2203-006088	C-CER,CHIP;330nF,10%,10V,X7R,TP,1608	1	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	5	SNA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	4	SA
...4	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	16	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	37	SNA
...4	AD480	2203-006636	C-CER,CHIP;220nF,10%,25V,X7R,TP,1608	6	SA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608,-	8	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	32	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	9	SNA
...4	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	79	SA
...4		2409-001118	C-POLYMER ,CHIP;47uF,20%,10V,WT,TP,3.5X2	3	SA
...4		2409-001168	C-EDL;200000uF,3.3V,0.01mA,TP,D6.8x11.3m	1	SA
...4		2503-001051	C-NETWORK;100nFx4,20%,16V,2012	2	SA
...4		2703-000158	INDUCTOR-SMD;1uH,10%,2012,.4Ohm,50mA,45,	2	SA
...4		2703-000408	INDUCTOR-SMD;3.3uH,20%,3225,.28ohm,500mA	1	SA
...4		2703-001229	INDUCTOR-SMD;2.2uH,10%,1608,1.15Ohm,15mA	1	SC
...4		2703-002683	INDUCTOR-SMD;2.2uH,20%,13x9.4mm,.015ohm,	1	SNA
...4		2703-003149	INDUCTOR-SMD;2.2uH,20%,5050,0.055Ohm,300	2	SA
...4		2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	2	SA
...4		2703-003930	INDUCTOR-SMD;4.7uH,20%,5050,0.072Ohm,245	4	SA
...4		2801-000258	CRYSTAL-SMD;0.032768MHz,20ppm,SMD,12.5pF	1	SA
...4		2801-003331	CRYSTAL-SMD;28.6363MHz,30ppm,HC-49,16pF,	1	SA
...4		2801-003948	CRYSTAL-SMD;12MHz,30ppm,28-AAN,12pF,60oh	1	SA
...4		2801-004300	CRYSTAL-SMD;18.432MHz,30ppm,28-ABX,13pF,	1	SA
...4		2801-004629	CRYSTAL-SMD;27MHz,20ppm,12pF,50ohm,TP	1	SNA
...4		2801-004734	CRYSTAL-SMD;25.000000MHz,20ppm,28-AAN,12	1	SA
...4		2801-004774	CRYSTAL-SMD;24MHz,30ppm,14pF,30ohm,TP	2	SA
...4		2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	4	SA
...4		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	6	SNA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	75	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	2	SA
...4		3601-001376	FUSE-SURFACE MOUNT;32V,3A,FAST-ACTING,Hi	1	SNA
...4		3701-001736	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-A	1	SA
...4		3701-001737	CONNECTOR-DVI;24P,3ROW,FEMALE,ANGLE,AU	1	SA
...4		3701-001812	CONNECTOR-DSUB;15P,3ROW,FEMALE,ANGLE,AU	1	SA
...4		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SNA
...4	EH01	3711-007582	HEADER-BOARD TO CABLE;BOX,8P,1R,2.0mm,AN	1	SA
...4		3711-007585	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,ANGLE-D	1	SA
...4	EH01	3711-007742	HEADER-BOARD TO CABLE;BOX,20P,2R,2mm,ANG	1	SA
...4		3722-003199	JACK-MODULAR;8P/8C,ANGLE,AU,1P	1	SA
...4		3722-003208	JACK-PHONE;1P/7C,P-BRONZE,YEL,SMD-A(DIP)	1	SA
...4		3722-003394	JACK-PHONE;1P/6C,AU,BLK,ANGLE	4	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,A	1	SA
...4		BN13-00050A	IC ASIC;XC6SLX4-2CSG225C,SA750,225,3.3V,	1	SA
...4		BN41-02004A	PCB MAIN;LFD_MDC,FR-4,4,1.2,195*230*1.2,	1	SNA
...4		BN97-07330A	ASSY MICOM-SUB;L-EPLDWWS1-1000,2013.04.0	1	SNA
....5		0903-001747	IC-MICROCONTROLLER;WT61P806-RG480,LQFP,4	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN97-07331A	ASSY MICOM-ATHENA;L-EPMWWM0-1001,2013.04	1	SNA
....5		1107-001916	IC-NOR FLASH;W25Q16BVSSIG,16Mbit,2Mbitx8	1	SNA
...4		BN97-07332A	ASSY MICOM-FPGA;new_lvds_ttl_mux_6ma,201	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SNA
...4		BN97-07493A	ASSY MICOM-MAIN(%)LGC;T-ECPLCDWWC-1003.0	1	SNA
....5		1107-002077	IC-NAND FLASH;KLM4G1FE3B-B001,4Gbyte,32G	1	SNA
1		BN92-10674L	ASSY LABEL;MDB	1	SNA
.2	T0527	AA68-03752B	LABEL-STICKER;WW,ALL,Art Paper(90g),25,3	1	SNA
.2	T0527	BP68-00052B	LABEL-00,RATING;FPTV,PET,T0.02,93,73	1	SNA
1		BN92-12717A	ASSY P/MATERIAL;MDC 32",W/W	1	SNA
.2		6902-000379	BAG AIR;LDPE,T0.2,W1000,L1800,TRP,1260.0	1	SNA
.2		6902-001578	BAG PE;HDPE/NITRON,T0.015/T0.5,W1000,L60	1	SNA
.2		6922-000003	BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014	0	SNA
.2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P 100	1	SNA
.2		BN69-00257B	PACKING-PAD;PAPER,CB-SW4,1130,820,300g,Y	1	SNA
.2		BN69-00257F	PACKING-BAG SHEET;-CB,-,1200,500,-,-,WH	1	SNA
.2		BN69-00257W	PACKING-SHEET PALLET;PACKING SHEET PALLE	1	SNA
.2		BN69-03982L	PAD PACKING-EDGE;EDGE,PAPER,-,T5,W100,L2	1	SNA
.2		BN69-05418A	PACKING-BAG WRAPPING;-LDPE,-,0,019,500,	2	SNA
.2		BN69-07609W	PALLET;-WOOD,-,1120,830,135,-,-,sesk-11	1	SNA
.2		BN69-08692A	CUSHION-01,SET;MD32C,EPS,16.7g/L	1	SNA
...3		0103-005099	RESIN-EPS;BASF303,Natural,Natural	265	SNA
.2		BN74-00008D	TAPE-OPP MASKING;OPP,T0.05,W75,L800M,CLR	2	SNA
1		BN92-12721B	ASSY BOX;MDC 32"	1	SNA
.2		BN68-03920A	LABEL BOX;All Monitor,ART-PAPER 100G,WHT	1	SNA
.2		BN69-08962A	BOX-SET;LH32MDC,CB,A-01,SW2,YEL,W821,D15	1	SNA
1	ACCE1	BN92-12726C	ASSY ACCESSORY;MDC 32"	1	SNA
.2		BN96-27134Q	ASSY ACCESSORY CABLE;EDC	1	SNA
...3		4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,7.5g,AAA	2	SNA
...3	REMO2	AA59-00714A	REMOCON;TM1240,44,3.0V,TM1240, LFD Remoc	1	SA
...3	EC29	BN39-00244H	CBF SIGNAL-D-SUB TO D-SUB;D-sub cable,15	1	SA
.2		BN96-27922C	ASSY ACCESSORY MANUAL/CABLE;MDC 32"	1	SNA
...3	T0268	3903-000770	CBF-POWER CORD;DT,EU/KR,LP-34A,LS-13LF I	1	SA
.2		BN96-28626A	ASSY ACCESSORY MANUAL;LFD ACCESSORY	1	SNA
...3		6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,9.2	1	SNA
...3		AA68-03576C	LEAFLET-02,CIS CALL CENTER;comm,Samsung,	1	SNA
...3		BH68-00633B	LEAFLET-07,WARRANTY CARD;comm,Samsung,15	1	SNA
...3	M0019	BH68-70448A	MARK RECYCLE-02,CARD;TFT LCD,SRC,Russia,	1	SNA
...3		BN46-00097B	S/W CD-06,MAGIC INFO LITE;comm,Magic Inf	1	SNA
...3		BN46-00098S	S/W DRIVER-05,IB;MD**C,Echo-P,W/W,CD	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),50X15,	1	SNA
..3		BN68-01925U	LEAFLET-01,WARRANTY CARD;comm,Samsung,14	1	SNA
..3		BN68-02462F	LABEL-STICKER;CIS,Art Paper,T0.05,93,40,	1	SNA
..3		BN68-03548E	LEAFLET-04,WARRANTY CARD;comm,Samsung,17	1	SNA
..3		BN68-03728T	LEAFLET-01,QSG;MD**C,W/W L18,W/W,Mojo 80	1	SNA
..3		BN68-04657A	LEAFLET-01,REGULATORY COMPLIANCE;ALL,SAM	1	SNA