


1. MM-D430D/ZF


Exploded View

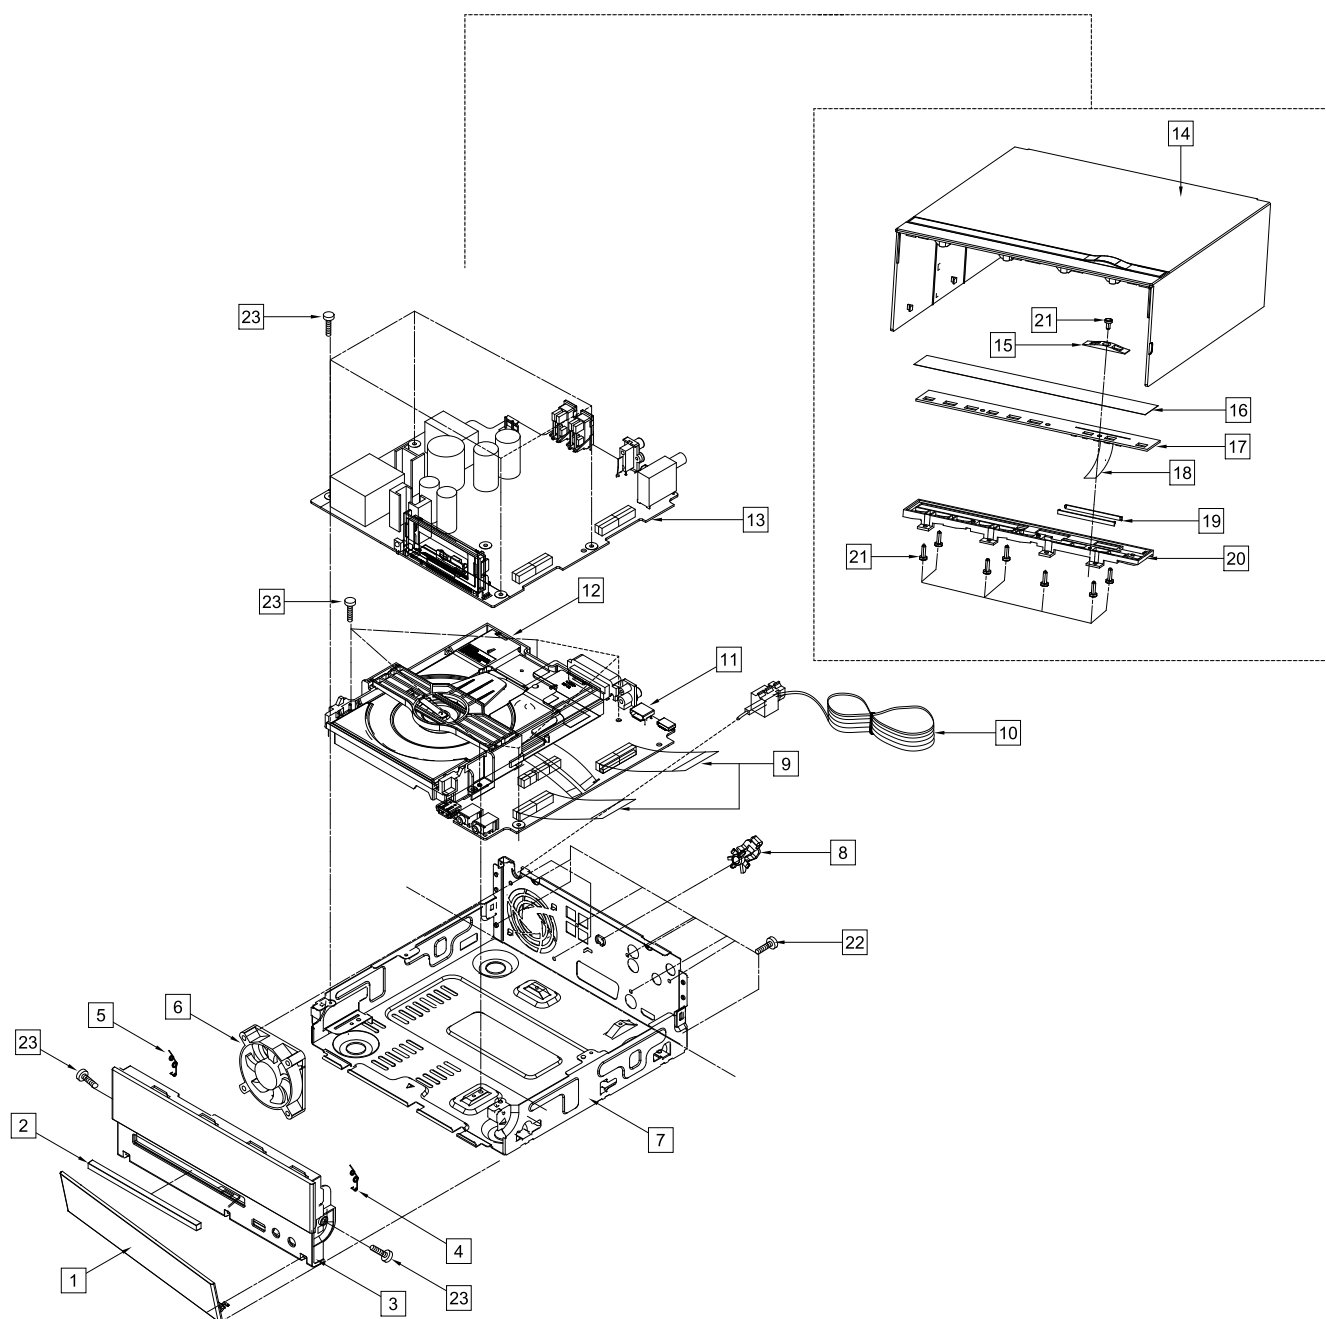

Parts List

No.	Parent	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	AH96-00822B	3	AC227	AH63-02285A	COVER-DOOR; MM-D530,ABS,3.0mm,37.5mm,230m	SNA	1
2	AH90-00789D	2	AD502	AH64-05323C	DOOR-DVD; MM-D530,ABS,KHL-917	SA	1
3	AH96-00822B	3	F001	AH63-02308B	COVER-FRONT; MM-D530D,ABS+PMMA,2.5mm,86.7	SNA	1
4	AH96-00822B	3	AS270	AH61-03107C	SPRING ETC-DOOR_L; MM-D530D/D430D,EGI-SEC	SA	1
5	AH96-00822B	3	AS280	AH61-03107D	SPRING ETC-DOOR_R; MM-D530D/D430D,EGI-SEC	SA	1
6	AH96-00823K	4	T0136	AH31-00057A	FAN; G6015M12D-BA	SA	1
7	AH96-00823K	4	BC01	AH64-05435K	CABINET-BOTTOM; MM-D530D,EGI-SECC	SNA	1
8	AH96-00823K	4	CLAMPE	AK65-00001A	CLAMPER CORE-CORD POWER; EXINO,ABS 94HB	SNA	1
9	AH94-02487A	4	FL261	3809-002314	FFC CABLE-FLAT; 30V,80C,90mm,24P,1.25mm,A	SA	2
10	AH96-00060E	3	T0268	3903-000396	CBF-POWER CORD; AT,EU,CP2,HOUSING(2P),250	SA	1
11	AH94-02487A	4	DP01A	AH82-00200L	A/S ASSY-(MPEG PCB); MM-C430D,EUR	SA	1
12	AH96-01065K	3	D001A	AK97-02255C	ASSY DECK-DVD; DP-24A,S78RFL-DL5FL,FFC 23	SA	1
13	AH94-02487A	4	M0014	AH82-00199L	A/S ASSY-(MAIN PCB); MM-C430D,EUR	SA	1
14	AH96-01064A	3	T001	AH63-02307B	COVER-TOP; MM-D430,ABS+PMMA,2.5mm,230mm,2	SNA	1
15	AH96-01064A	3		AH64-05428A	DECO COVER-FUNCTION; MM-D530,ABS,2.5,9.3m	SNA	1
16	AH96-01064A	3		AH63-02408B	FELT-SHEET-SAFETY; MM-D530D,PC,0.5,BLK	SNA	1
17	AH96-01064A	3	MK01A	AH94-02650B	ASSY PCB KEY-TOUCH KEY; MM-D530D,1	SNA	1
18	AH96-01064A	3	FL006	3809-002568	CABLE-FLAT; 30V,80C,120mm,13P,1.25mm,UL20	SA	1
19	AH96-01064A	3	AL210	AH67-00606A	LENS-VOLUME; MM-D530,ABS,CLEAR,1.0	SNA	2
20	AH96-01064A	3		AH61-03220A	HOLDER-TOUCH-KEY; MM-D530,ABS,2.5mm,45.5m	SNA	1
21	AH96-01064A	3	SCREW	6003-000119	SCREW-TAPTYPE; BH,+,B,M3,L8,ZPC(BLK),SWRC	SNA	8
22	AH90-00789D	2	W391	6003-000275	SCREW-TAPTYPE; BH,+,B,M3,L10,ZPC(BLK),SWR	SA	10
23	AH96-01065K	3	M0081	6003-001375	SCREW-TAPTYPE; BH,+,-,B,M3,L8,ZPC(WHT),SW	SA	9

2. Speaker System

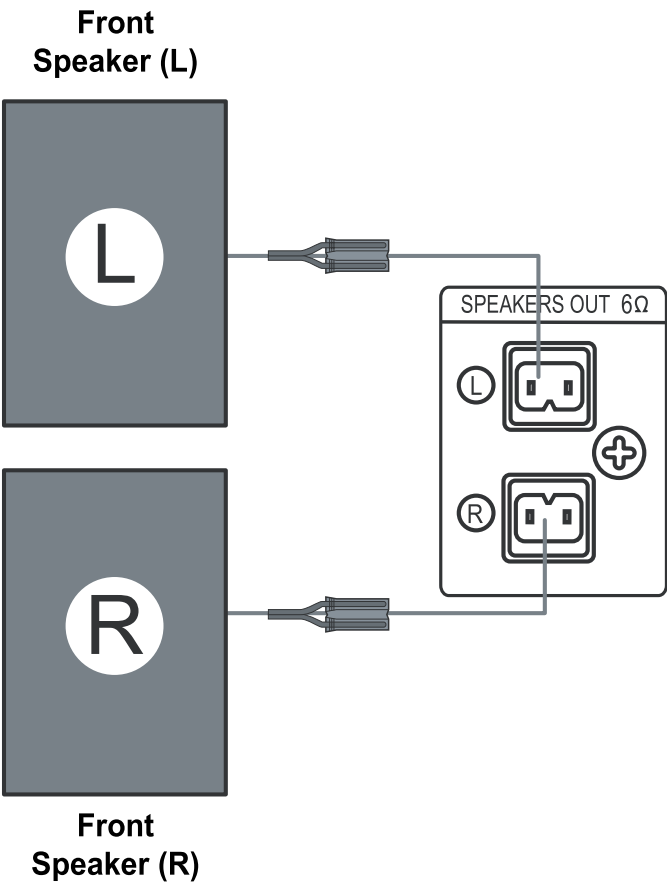

Parts List

Loc. No.	Part No.	Description;Specification	Qty.	SNA
Front Speaker (L)	AH82-00234A	A/S ASSY; PS-D430,FRONT SPK SYSTEM-LEFT	1	SA
Front Speaker (R)	AH82-00234F	A/S ASSY-SPK; PS-D430D,SPK SYSTEM-RIGHT	1	SA

3. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			MM-D430D/ZF (ZZ01)		
1		AH90-00758A	ASSY COVER TOP;MM-D430D	1	SNA
2	KT01A	AH96-01064A	ASSY MISC P-KITTING TOP;MM-D430D,ALL BUY	1	SA
3	FL006	3809-002568	CABLE-FLAT;30V,80C,120mm,13P,1.25mm,UL20	1	SA
3	SCREW	6003-000119	SCREW-TAPTYPE;BH,+,B,M3,L8,ZPC(BLK),SWRC	8	SNA
3		AH61-03220A	HOLDER-TOUCH-KEY;MM-D530,ABS,2.5mm,45.5m	1	SNA
3	T001	AH63-02307B	COVER-TOP;MM-D430,ABS+PMMA,2.5mm,230mm,2	1	SNA
3		AH63-02408B	FELT-SHEET-SAFETY;MM-D530D,PC,0.5,BLK	1	SNA
3		AH63-02409A	FELT-TOUCH-KEY;MM-D430D,PC,0.1,BLK	1	SNA
3		AH64-05428A	DECO COVER-FUNCTION;MM-D530,ABS,2.5,9.3m	1	SNA
3	AL210	AH67-00606A	LENS-VOLUME;MM-D530,ABS,CLEAR,1.0	2	SNA
3	MK01A	AH94-02650B	ASSY PCB KEY-TOUCH KEY;MM-D530D,1	1	SNA
4		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
4		AH97-07381A	ASSY SMD-TOUCH KEY;MM-D530D,1,AH94-02650	1	SNA
5	D1	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	8	SA
5	KQ6	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	1	SA
5	AQ7	0504-000128	TR-DIGITAL;FJV3103R,NPN,200mW,22K/22Kohm	1	SA
5	L0405	0601-001754	LED;SMD,BLUE,1.6X0.8X0.4MM,468NM,1.6X0.8	10	SNA
5	L0405	0601-002705	LED;SMD(SIDE VIEW),WHT,3.8x1.2x0.6mm,632	8	SA
5	IS01	1209-001866	IC-SENSOR;SS501,SOT-26,6P,2.9x1.6mm,PLAS	1	SA
5		1405-001253	VARISTOR;12Vdc,1.6x0.8x0.4mm,TP	2	SA
5	KAR21	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	3	SA
5	AR30	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA
5	RR2	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	16	SA
5	AR150	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	2	SA
5	MROP1	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA
5	R512	2007-000107	R-CHIP;470Kohm,5%,1/10W,TP,1608	2	SA
5	MR34	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	8	SA
5	MR166	2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608	2	SA
5	KAR7	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	2	SA
5	KAR11	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	1	SA
5	MR33	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	6	SA
5	AC14	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,1608	1	SA
5	PPC2	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	4	SA
5	ZVL3	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115ohm/10	2	SA
5	AC510	3708-001958	CONNECTOR-FPC/FFC/PIC;13P,1.25mm,SMD-S,S	1	SA
5		AH41-01397A	PCB-KEY;MM-D530D,FR-4,2,DV,T1.6,235*235,	1	SNA
5		AH97-06216A	ASSY MICOM-TOUCHKEY IC;HMC-D430WWT-1000.	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.....6	IS01A	1209-001864	IC-SENSOR;TOUCHCORE1.0,QFN,20P,4x4mm,PLA	1	SNA
1		AH90-00789D	ASSY COVER BOTTOM;MM-D430D,EU	1	SNA
.2	W391	6003-000275	SCREW-TAPTYPE;BH,+,B,M3,L10,ZPC(BLK),SWR	10	SA
.2	M0081	6003-001375	SCREW-TAPTYPE;BH,+,B,M3,L8,ZPC(WHT),SW	2	SA
.2	AD502	AH64-05323C	DOOR-DVD;MM-D530,ABS,KHL-917	1	SA
.2	F001A	AH96-00822B	ASSY COVER P-FRONT;MM-D530,ASSY,BLACK	1	SA
..3	AS270	AH61-03107C	SPRING ETC-DOOR_L;MM-D530D/D430D,EGI-SEC	1	SA
..3	AS280	AH61-03107D	SPRING ETC-DOOR_R;MM-D530D/D430D,EGI-SEC	1	SA
..3	AC227	AH63-02285A	COVER-DOOR;MM-D530,ABS,3.0mm,37.5mm,230m	1	SNA
..3	F001	AH63-02308B	COVER-FRONT;MM-D530D,ABS+PMMA,2.5mm,86.7	1	SNA
.2		AH96-01065K	ASSY MISC P-KITTING-BOTTOM;MM-D530D	1	SNA
..3	M0081	6003-001375	SCREW-TAPTYPE;BH,+,B,M3,L8,ZPC(WHT),SW	9	SA
..3		AH63-02171A	SHEET-FUNCTION-2;MM-C530D,0.1,15,20	2	SNA
..3	M0014	AH94-02487A	ASSY PCB MAIN;MAIN PCB ASSY,MM-C430D/EDC	1	SNA
...4		0201-001059	ADHESIVE-SIL;#9590,WHT,CARTRIGE	0	SNA
...4		0201-001082	ADHESIVE-TS;1603HFR-HS,YEL,1800 - 2200CP	3	SNA
...4	NULL1	0202-001214	SOLDER-WIRE FLUX;HSE04 SR-34 SUPER,-,D1.	4	SNA
...4		0202-001463	SOLDER-WIRE;LFC2-W3.0,-,D3,99.79Sn/0.2Cu	15	SNA
...4	CAPTON	0203-001814	TAPE-POLY;ANT-2301,T0.065,W16,W12500(25X	0	SNA
...4		0204-002420	SOLVENT;1M-1000,C3H70H,96	8	SNA
...4		0204-002607	FLUX;DF-234U,13%,14KG,Gravity 0.82	3	SNA
...4		0205-001154	OIL-SILICON;G746	0	SNA
...4	MPD8	0402-000156	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD	2	SA
...4	SBD5	0402-001258	DIODE-BRIDGE;GBU606,600V,6A,SIP-4,BK	1	SA
...4	DR3503	0402-001783	DIODE-RECTIFIER;SF35G,300V,3A,DO-201AD,T	7	SA
...4		0502-001176	TR-POWER;KTC2026,NPN,2000mW,TO-220IS,ST,	1	SA
...4	Q409	0505-001981	FET-SILICON;SPA11N80C3,N,800V,11A,0.45OH	1	SA
...4	OC2	0604-000117	PHOTO-COUPLER;TR,130-260%,200mW,DIP-4,ST	3	SA
...4	D0254	0609-001200	MODULE REMOCON;VERTICAL,9.6mm,TR,0.85g	1	SA
...4	U3	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,PLASTI	1	SNA
...4	IC3301	1203-001586	IC-POSI.FIXED REG.;278R33,TO-220F,4P,-,P	1	SA
...4	PIC2	1203-002185	IC-POSI.FIXED REG.;3RD13,TO-220,4P,402MI	1	SA
...4	IC1	1203-004788	IC-PWM CONTROLLER;ICE2QS01,DIP,8P,9.52X6	1	SA
...4	1SIC01	1203-005401	IC-PWM CONTROLLER;ICE3BR0665J,DIP,8P,9x6	1	SA
...4	T0900	1404-001195	THERMISTOR-NTC;5.1ohm,3.84A,3000K,21mW/C	1	SA
...4		1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	1	SA
...4		2003-000376	R-METAL OXIDE;8.2ohm,5%,1W,AA,TP,4.3x12m	1	SA
...4	PCD02	2201-000963	C-CERAMIC,DISC;1nF,20%,400V,Y5U,9.5x6mm,	1	SA
...4	PC50	2201-000987	C-CERAMIC,DISC;2.2nF,20%,400V,Y5U,TP,12.	2	SA
...4	C01	2201-002044	C-CERAMIC,DISC;0.1nF,10%,400V,Y5P,8.5x6m	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	CX2	2301-001511	C-FILM,LEAD-PEF;330nF,10%,275V,BK,16X18X	2	SNA
...4	C608	2401-000118	C-AL;1000uF,20%,10V,GP,TP,10x12.5,5	2	SA
...4	C	2401-001067	C-AL;3300uF,20%,50V,GP,BK,18x35.5mm,7.5m	2	SA
...4	C	2401-001992	C-AL;2200UF,20%,10V,WT,TP,10X20MM,5	1	SA
...4	C	2401-003030	C-AL;220uF,20%,450V,GP,BK,30x35,10	1	SA
...4	C	2401-004106	C-AL;680uF,20%,50V,-,BK,12.5 x 35,5	4	SNA
...4	X-TAL	2801-001394	CRYSTAL-UNIT;032768MHz,20ppm,28-AAY,12.	1	SA
...4	UX2	2802-001174	RESONATOR-CERAMIC;10MHZ,0.5%,BK,8X3.5X3M	1	SA
...4	T0122	2802-001179	RESONATOR-CERAMIC;4MHZ,0.5%,BK,8X3X5.5MM	1	SA
...4	HDMI	3701-001313	CONNECTOR-HDMI;19P,2R,PLUG,ANGLE,AU30U	1	SA
...4	UCW1	3708-000237	CONNECTOR-FPC/FFC/PIC;24P,1.25mm,STRAIGH	4	SNA
...4	CN1	3708-000491	CONNECTOR-FPC/FFC/PIC;23P,1mm,STRAIGHT,S	1	SA
...4	CN701	3708-001094	CONNECTOR-FPC/FFC/PIC;13P,1.25mm,STRAIGH	1	SA
...4	CN8	3708-001616	CONNECTOR-FPC/FFC/PIC;9P,1mm,STRAIGHT,SN	1	SA
...4	PCNS2	3711-000203	HEADER-BOARD TO CABLE;1WALL,2P/3P,1R,7.9	1	SA
...4	FAN1	3711-000820	HEADER-BOARD TO CABLE;BOX,2P,1R,2.5MM,ST	1	SA
...4	T0415	3716-001311	TERMINAL-BLOCK;TERMINAL JOINT,2P,4.6mm,4	1	SNA
...4	JA330	3722-000143	JACK-PHONE;1P(VER),AG,BLK,ANGLE	1	SA
...4	USBJK	3722-001051	JACK-USB;4P/1C,AU,BLK,ANGLE,A TYPE	1	SA
...4	T702	3722-001373	JACK-SCART;21P,SN,BLACK	1	SA
...4	T3	3722-002042	JACK-PIN;2P/2C,NI,WHT/RED,ANGLE	1	SA
...4		3722-002874	JACK-DIN;4P,SN,GRN,ANGLE	1	SNA
...4	FL261	3809-002314	FFC CABLE-FLAT;30V,80C,90mm,24P,1.25mm,A	2	SA
...4	W272	6003-001464	SCREW-TAPTYPE;BH,+,B,M3,L10,ZPC(WHT)	1	SA
...4	EV01	AH07-00263A	VF DISPLAY;HNA-09SS84T,MM-C530,89.6*25*6	1	SNA
...4	MPIC1	AH14-10003E	IC;KIA7812PI,,TO-220	1	SA
...4		AH26-00364A	TRANS SWITCHING;EER-3541,MAX-DG35,AC120V	1	SA
...4		AH26-00366A	TRANS SWITCHING;EE2525,MM-DG35,EE2525,65	1	SA
...4	WL06	AH27-00062A	COIL FILTER;HXD77,22.8uH,55mOHM,19.5,13.	1	SA
...4		AH27-00069A	COIL FILTER;8019P-02-220L,22uH,0.1ohm MA	2	SA
...4	LF2_1	AH29-00016B	FILTER LINE;HT-Z320,TR16 4.0mH,0.08,4.0m	2	SA
...4	JP6	AH37-00005A	JACK-RCA;1P,S-440B,YELLOW,-,SHIELD PLATE	1	SA
...4		AH61-02958A	BRACKET-GROUND;MM-DG36,Cu,0.5,5,8.9	2	SNA
...4	AH410	AH61-03095A	HOLDER-VFD;MM-C330,ABS,2.5,20,60,BLACK	1	SNA
...4		AH61-40022A	STUD-TAP;T0.5,BT2	1	SNA
...4		AH62-00062J	HEAT SINK-MPEG;AL,T2.0	1	SNA
...4	HSD11A	AH62-30122A	HEAT SINK-POWER;DVD-860,A6063S-T5,T1.3,W	1	SNA
...4	AS170	AH63-02129A	SHEET-VFD;MM-C330,PC,1,25,90,RED	1	SNA
...4	AC160	AH65-30013A	CLAMP-CORD;-,-,-,-,-	1	SNA
...4	M0014	AH82-00199L	A/S ASSY-(MAIN PCB);MM-C430D,EUR	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	DP01A	AH82-00200L	A/S ASSY-(MPEG PCB);MM-C430D,EUR	1	SA
...4		AH97-04579A	ASSY AUTO-MAIN;MAIN PCB ASSY,MM-C430D/ED	1	SNA
....5	KD2	0401-000005	DIODE-SWITCHING;1N4148,75V,150mA,DO-35,T	1	SA
....5	PDS11	0402-000012	DIODE-RECTIFIER;UF4007,1000V,1A,DO-41,TP	5	SA
....5	D1P130	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	1	SA
....5	DX55PD	0402-000151	DIODE-RECTIFIER;1N5392,100V,1.5A,DO-15,T	1	SA
....5	DR01A	0402-000274	DIODE-RECTIFIER;UF4004,400V,1A,DO-41,TP	4	SA
....5	ZVD1	0403-000355	DIODE-ZENER;UZ5.1BSB,5-5.2V,500MW,DO-35,	1	SA
....5	ZD401	0403-000390	DIODE-ZENER;UZP33B,1N4752A,31.4-34.6V,10	1	SA
....5		0403-000537	DIODE-ZENER;1N4749A,5%,1000mW,DO-41,TP	2	SA
....5	PZD04	0403-001036	DIODE-ZENER;1N4745A,5%,1000MW,DO-41,TP	3	SA
....5	ZD1SF	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	1	SA
....5	Q1P107	0501-000362	TR-SMALL SIGNAL;KSC2328A-Y,NPN,1000mW,TO	1	SA
....5	FAQ2	0501-000422	TR-SMALL SIGNAL;KTA1273,PNP,-30V,-30V,-2	1	SA
....5	TQ11A	0501-002176	TR-SMALL SIGNAL;KTD863,NPN,1W,TO-92L,TP,	1	SA
....5	PQ44	0501-002409	TR-SMALL SIGNAL;KTC945B,NPN,625mW,T0-92,	3	SA
....5	MPQ3	0504-001128	TR-DIGITAL;KRA103M,PNP,400MW,22K/22K,TO-	1	SA
....5	IC012	1203-001217	IC-POS. ADJUST REG.;431,TO-92,3P,4.58MIL	2	SA
....5	FR11	2001-000022	R-CARBON(S);33ohm,5%,1/2W,AA,TP,2.4x6.4mm	1	SA
....5	KR1	2001-000036	R-CARBON;330ohm,5%,1/4W,AA,TP,2.4x6.4mm	1	SA
....5	R1P10B	2001-000290	R-CARBON;10Kohm,5%,1/8W,AA,TP,1.8x3.2mm	1	SA
....5	R1P110	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2mm	1	SA
....5		2001-001088	R-CARBON(S);1Kohm,5%,1/2W,AA,TP,2.4x6.4mm	3	SA
....5	FAR13	2001-001165	R-CARBON(S);56ohm,5%,1/2W,AA,TP,2.4x6.4mm	2	SA
....5	R1	2002-001115	R-COMPOSITION;1.5Mohm,5%,1/2W,AA,TP,4x12	1	SA
....5	HR0	2003-000009	R-METAL OXIDE(S);220ohm,5%,1W,AA,TP,3.3x	1	SA
....5		2003-000468	R-METAL OXIDE(S);10ohm,5%,1W,AA,TP,3.3x9	2	SA
....5	UR186	2003-000542	R-METAL OXIDE(S);1ohm,5%,1W,AA,TP,3.3x9mm	1	SNA
....5	PR2	2003-000708	R-METAL OXIDE(S);47ohm,5%,1W,AA,TP,3.3x9	1	SA
....5	PRS13	2003-000994	R-METAL OXIDE(S);33Kohm,5%,2W,AF,TP,3.9x	4	SA
....5	PPR2	2008-000003	R-FUSIBLE;0.22ohm,5%,1/2W,AA,TP,3.5x9.4mm	2	SA
....5	PSCZ2	2201-000129	C-CERAMIC,DISC;0.1nF,10%,1000V,Y5P,-,7x4	4	SA
....5		2303-000311	C-FILM,LEAD-PPF;100nF,5%,100V,TP,10x13.5	2	SNA
....5	DC7	2303-000312	C-FILM,LEAD-PPF;100nF,5%,63V,TP,7.5x12.5	3	SC
....5	WC31	2305-000407	C-FILM,LEAD-PEF;470nF,5%,100V,TP,10.5x6x	3	SA
....5	CY5	2305-001016	C-FILM,LEAD-PEF;10nF,10%,630V,TP,12.5x6.	3	SA
....5	C	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	1	SA
....5	PC9	2401-001355	C-AL;470uF,20%,10V,GP,TP,8x11.5mm,5mm	3	SA
....5	C	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5mm	2	SA
....5	C	2401-003010	C-AL;1000uF,20%,6.3V,GP,TP,8x11.5mm	2	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.....5	HPL1R	2701-000179	INDUCTOR-AXIAL;33UH,10%,4298	1	SA
.....5	BD707	3301-000297	BEAD-AXIAL;25ohm,3.6x1.2x5.7mm,-,TP,-,-,	4	SNA
.....5		3601-001496	FUSE-RADIAL LEAD;250V,5A,TIME DELAY,RESI	1	SNA
.....5	PBS01	AC27-92001M	COIL-INDUCTOR;RH3.5x6.5RS,BEAD(RADIAL)	7	SC
.....5		AH97-04580A	ASSY SMD-MAIN;MAIN PCB ASSY,MM-C430D/EDC	1	SNA
.....6	NULL1	0202-001214	SOLDER-WIRE FLUX;HSE04 SR-34 SUPER,-,D1.	0	SNA
.....6		0202-001477	SOLDER-CREAM;LST309-M,D20~45um,96.5Sn/3A	3	SNA
.....6	D1	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	15	SA
.....6	PPD1	0402-000309	DIODE-RECTIFIER;1SR154-400,400V,1A,SOD-1	2	SA
.....6	DR01A	0402-001427	DIODE-RECTIFIER;ES1D,200V,1A,DO-214AC,TP	2	SA
.....6		0403-001164	DIODE-ZENER;MMSZ5232B,5.32-5.88V,500MW,S	1	SA
.....6		0403-001561	DIODE-ZENER;MMSZ5226B,3.135/3.465V(5%),5	1	SA
.....6	D0254	0404-001006	DIODE-SCHOTTKY;RB751V,40V,30mA,SOD-323,T	1	SA
.....6		0406-001128	DIODE-TVS;MLVS-0603-E08,50V	6	SA
.....6	SD3	0407-000114	DIODE-SWITCHING;KDS184,80V,100mA,SOT-23,	1	SNA
.....6	AD1	0407-000116	DIODE-SWITCHING;KDS181,DAP202K,SDS2836,8	2	SA
.....6	VQ4	0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	4	SNA
.....6		0501-000150	TR-SMALL SIGNAL;2SA1037,PNP,200mW,SOT-23	1	SA
.....6	KQ1	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	2	SA
.....6	KQ6	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW,SOT-	13	SA
.....6	Q4	0501-000632	TR-SMALL SIGNAL;2SB1197K,PNP,200mW,SOT-2	4	SA
.....6	CQ3	0501-002184	TR-SMALL SIGNAL;KTD1304,NPN,200mW,SOT-23	1	SA
.....6	AQ7	0504-000128	TR-DIGITAL;FJV3103R,NPN,200mW,22K/22Kohm	5	SA
.....6	AQ8	0504-000156	TR-DIGITAL;KSR2103,PNP,200MW,22K/22K,SOT	2	SA
.....6	Q409	0505-001679	FET-SILICON;FDC6301N,N,25V,0.22A,5ohm,0.	1	SA
.....6	Q409	0505-002365	FET-SILICON;IRF6645,N,100V,5.7A,0.035ohm	4	SNA
.....6	Q409	0505-002572	FET-SILICON;AO4801AL,P,-30V,-5.6A,0.075o	1	SA
.....6	IC104	0801-001159	IC-CMOS LOGIC;74HC4052,DE/MULTIPLEXER,SO	1	SA
.....6	IC104	0801-002683	IC-CMOS LOGIC;74HCT245,TRANSCEIVER,TSSOP	1	SA
.....6		1001-001298	IC-ANALOG SWITCH;L10X,10P,2.1x1.6,1,1.65	1	SNA
.....6	MIC1	1003-001978	IC-MOTOR DRIVER;AM5766,HSOP28H,28P,17.9x	1	SA
.....6		1003-002143	IC-GATE DRIVER;IRS2092STRPBF,SOP,16P,9.9	2	SA
.....6		1003-002176	IC-VFD;MC3401,LQFP,44P,10x10mm,-40mA/-15	1	SA
.....6		1006-001438	IC-BUS DRIVER;R5H30201NA04NQ08,QFN,20P,4	1	SA
.....6	IC112	1103-001410	IC-EEPROM;S-24CS08AFJ-TB-1GE,8Kbit,1Kx8,	2	SNA
.....6	IC113	1105-001585	IC-DRAM;M12L64164, K4S641632,64Mbit,4x1M	1	SA
.....6	KOP1	1201-000163	IC-OP AMP;4560,SOP,8P,173MIL,DUAL,100V/m	3	SA
.....6	HIC1	1201-001285	IC-OP AMP;4556,SOP,8P,150MIL,+/-18V,100d	1	SA
.....6	DU501	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,PLASTIC,	1	SA
.....6	U504	1203-002425	IC-POSIFIXED REG.;1117,SOT-223,3P,138MI	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.....6	PIC2	1203-002779	IC-POSIFIXED REG.;G952T63U,SOT-223,3P,6	1	SA
.....6	REG3	1203-002935	IC-POSIAJUST REG.;AIC1117AGE,TO-252,3P	1	SA
.....6		1203-006067	IC-POWER SUPERVISOR;TPS2553DBVR,SOT-23,6	1	SNA
.....6		1204-002924	IC-TUNER;SI4705-B20-GMR,QFN,20P,3x3mm,PL	1	SA
.....6		1204-002957	IC-DECODER;ZR36976PQCG,-,128P,20x14mm,-,	1	SA
.....6		1204-002971	IC-MODULATOR;STA321,LQFP,64P,10x10mm,PLA	1	SNA
.....6	J914	2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	1	SA
.....6		2007-000039	R-CHIP;0ohm,1%,1/10W,TP,1608	4	SA
.....6	DR1	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	6	SA
.....6	KAR13	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	2	SA
.....6	KR24	2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	3	SA
.....6	KAR21	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	16	SA
.....6	CER02	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	3	SA
.....6	PR6	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	1	SA
.....6	AR30	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	41	SA
.....6	RR2	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	6	SA
.....6	AR164	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	2	SA
.....6	AR158	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	1	SA
.....6	AR150	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	25	SA
.....6	R331	2007-000079	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	16	SA
.....6	FMR4	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	2	SA
.....6	R329	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	6	SA
.....6	FAR22	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	14	SA
.....6	CER04	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	38	SA
.....6	R227	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	5	SA
.....6	MR19	2007-000087	R-CHIP;6.8Kohm,5%,1/10W,TP,1608	8	SA
.....6	AHR40	2007-000088	R-CHIP;7.5Kohm,5%,1/10W,TP,1608	2	SA
.....6	MROP1	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	51	SA
.....6	R3A08	2007-000091	R-CHIP;12Kohm,5%,1/10W,TP,1608	1	SA
.....6	MR13	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	6	SA
.....6	KAR9	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	2	SA
.....6	MR122	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	7	SA
.....6	AR108	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	26	SA
.....6	MR16	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	1	SA
.....6	R3A13	2007-000100	R-CHIP;68Kohm,5%,1/10W,TP,1608	6	SA
.....6	R830	2007-000101	R-CHIP;82Kohm,5%,1/10W,TP,1608	3	SA
.....6	ARR2	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	15	SA
.....6	AR37	2007-000104	R-CHIP;150Kohm,5%,1/10W,TP,1608	1	SA
.....6	R510	2007-000108	R-CHIP;510Kohm,5%,1/10W,TP,1608	1	SA
.....6	ZR24	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	4	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.....6	DR10	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	12	SA
.....6	IDR23	2007-000116	R-CHIP;120ohm,5%,1/10W,TP,1608	5	SA
.....6	MR34	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	5	SA
.....6	MR166	2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608	2	SA
.....6	KAR7	2007-000120	R-CHIP;680ohm,5%,1/10W,TP,1608	5	SA
.....6	R1P151	2007-000121	R-CHIP;820ohm,5%,1/10W,TP,1608	4	SA
.....6	R893B	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	4	SA
.....6	AAR39	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	4	SA
.....6	KAR11	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	10	SA
.....6	AR02	2007-000125	R-CHIP;3.9Kohm,5%,1/10W,TP,1608	1	SA
.....6	AR174	2007-000129	R-CHIP;27Kohm,5%,1/10W,TP,1608	1	SA
.....6	MR2	2007-000130	R-CHIP;39Kohm,5%,1/10W,TP,1608	9	SA
.....6	R15	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	5	SA
.....6	RHE1	2007-000290	R-CHIP;100ohm,5%,1/8W,TP,2012	1	SA
.....6	R109	2007-000293	R-CHIP;100ohm,5%,1/4W,TP,3216	1	SA
.....6	UR53	2007-000305	R-CHIP;10Mohm,5%,1/10W,TP,1608	1	SA
.....6	MR112	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	18	SA
.....6	AAR11	2007-000312	R-CHIP;10ohm,5%,1/4W,TP,3216	2	SA
.....6	ZR45	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	2	SA
.....6	KR7	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	1	SA
.....6	MR312	2007-000450	R-CHIP;180ohm,5%,1/10W,TP,1608	5	SA
.....6	R320	2007-000458	R-CHIP;18Kohm,5%,1/10W,TP,1608	2	SA
.....6	R1S36	2007-000491	R-CHIP;2.2Kohm,1%,1/10W,TP,1608	4	SA
.....6	R505	2007-000496	R-CHIP;2.2Kohm,5%,1/4W,TP,3216	3	SA
.....6	MR8	2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	1	SA
.....6		2007-000504	R-CHIP;2.2ohm,5%,1/4W,TP,3216	2	SA
.....6	HR12	2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	SNA
.....6	TR100B	2007-000598	R-CHIP;22ohm,5%,1/4W,TP,3216	1	SA
.....6	R813	2007-000643	R-CHIP;270ohm,5%,1/10W,TP,1608	1	SA
.....6	AR28	2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA
.....6	MR1	2007-000805	R-CHIP;36Kohm,5%,1/10W,TP,1608	2	SA
.....6	AR61	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	1	SA
.....6	R419	2007-000882	R-CHIP;4.7ohm,5%,1/10W,TP,1608	6	SA
.....6		2007-000944	R-CHIP;47Kohm,5%,1/4W,TP,3216	1	SNA
.....6	AR39	2007-000965	R-CHIP;5.1Kohm,5%,1/10W,TP,1608	1	SA
.....6	AR132	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	2	SA
.....6	UR28	2007-001026	R-CHIP;560Kohm,5%,1/10W,TP,1608	1	SA
.....6	R506	2007-001056	R-CHIP;6.2Kohm,5%,1/10W,TP,1608	1	SA
.....6	VR88	2007-001116	R-CHIP;680ohm,1%,1/10W,TP,1608	1	SA
.....6	RR17	2007-001146	R-CHIP;7.5ohm,5%,1/8W,TP,2012	2	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.....6	ZR10	2007-001164	R-CHIP;75ohm,1%,1/10W,TP,1608	8	SA
.....6	R509	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	6	SA
.....6		2007-001219	R-CHIP;82ohm,5%,1/4W,TP,3216	1	SA
.....6	R1	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	8	SA
.....6	ER19	2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	8	SA
.....6	ZR47	2007-007277	R-CHIP;392ohm,1%,1/10W,TP,1608	2	SA
.....6		2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	2	SA
.....6	UC2C	2203-000062	C-CER,CHIP;47nF,+80-20%,50V,Y5V,1608	2	SA
.....6	AC14	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,1608	1	SA
.....6	C3507	2203-000206	C-CER,CHIP;100nF,10%,50V,X7R,TP,2012	4	SA
.....6	C258	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1608	9	SA
.....6	C134	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	14	SA
.....6	RC34	2203-000280	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,1608	11	SA
.....6	ZC4	2203-000332	C-CER,CHIP;0.012nF,5%,50V,C0G,TP,1608	1	SA
.....6	C212	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,TP,1608	13	SA
.....6	AC139	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608	10	SA
.....6	AC10	2203-000531	C-CER,CHIP;2.7nF,10%,50V,X7R,1608	2	SA
.....6	V1233	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	SA
.....6	C338	2203-000609	C-CER,CHIP;22nF,10%,50V,X7R,TP,2012	1	SA
.....6	ZC14	2203-000626	C-CER,CHIP;0.022nF,5%,50V,C0G,1608	4	SA
.....6	ZC52	2203-000669	C-CER,CHIP;27nF,10%,25V,X7R,1608	2	SNA
.....6	ZC35	2203-000681	C-CER,CHIP;0.027nF,5%,50V,C0G,1608	2	SA
.....6	AD480	2203-000696	C-CER,CHIP;0.002nF,0.25pF,50V,C0G,1005	4	SA
.....6	JC31	2203-000715	C-CER,CHIP;3.3nF,10%,50V,X7R,1608	6	SA
.....6	AC109	2203-000783	C-CER,CHIP;0.33nF,5%,50V,C0G,1608	4	SA
.....6	ZC165	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608	1	SA
.....6	AAC14	2203-000888	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1608	2	SA
.....6	C263	2203-000972	C-CER,CHIP;47nF,10%,16V,X7R,1608	1	SA
.....6	KAC5	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,1608	4	SA
.....6	AD480	2203-001128	C-CER,CHIP;0.68nF,10%,50V,X7R,2012	2	SA
.....6	C3502	2203-001222	C-CER,CHIP;0.82nF,10%,50V,X7R,1608	2	SNA
.....6	AD480	2203-001524	C-CER,CHIP;0.047nF,5%,50V,NP0,2012	1	SNA
.....6	AD480	2203-001537	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012	1	SA
.....6	MC22R	2203-001596	C-CER,CHIP;2200nF,+80-20%,50V,Y5V,2012	2	SA
.....6	AC28	2203-001607	C-CER,CHIP;0.22nF,5%,50V,NP0,1608	11	SA
.....6	C637	2203-001656	C-CER,CHIP;0.47nF,5%,50V,NP0,1608	7	SA
.....6	C100	2203-005065	C-CER,CHIP;1000nF,+80-20%,10V,Y5V,1608	2	SA
.....6	PPC2	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	78	SA
.....6	C745	2203-005171	C-CER,CHIP;1000nF,10%,16V,X7R,2012	2	SA
.....6	AAC1	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	42	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.....6	C24	2203-005565	C-CER,CHIP;1nF,5%,50V,NP0,TP,1608	7	SA
.....6	AD480	2203-006143	C-CER,CHIP;22000nF,20%,6.3V,X5R,3216	3	SNA
.....6	C510	2203-006170	C-CER,CHIP;220nF,10%,16V,X7R,1608	2	SA
.....6	AD480	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,TP,3216	6	SA
.....6	C802	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608	3	SA
.....6	C125	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	31	SC
.....6	AD480	2203-006391	C-CER,CHIP;1000nF,10%,10V,X7R,TP,1608	6	SNA
.....6	AD480	2203-006427	C-CER,CHIP;4700nF,10%,16V,X5R,TP,2012	1	SA
.....6	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,1608	1	SA
.....6	C23	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,1608	7	SNA
.....6	AD480	2203-007338	C-CER,CHIP;470nF,10%,100V,X7R,TP,3225	2	SNA
.....6		2402-000009	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	2	SA
.....6	S1H022	2402-000120	C-AL,SMD;10uF,20%,50V,GP,TP,6.6X6.6X5.4M	3	SA
.....6		2402-000130	C-AL,SMD;2.2uF,20%,50V,GP,TP,4.3x4.3x5.	6	SA
.....6	C1025	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.4	1	SA
.....6	RE6	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	6	SA
.....6	AC6	2402-001049	C-AL,SMD;10uF,20%,16V,GP,TP,3.3x3.3x5.4	7	SA
.....6	MC68	2402-001096	C-AL,SMD;220uF,20%,16V,GP,TP,6.6X6.6X7.7	1	SA
.....6	MC68	2402-001198	C-AL,SMD;330uF,20%,6.3V,GP,TP,6.6X6.6X7.	2	SA
.....6	PE11	2402-001276	C-AL,SMD;47uF,20%,35V,TP,6.6x6.6x5.8mm	1	SNA
.....6	AL1	2703-000275	INDUCTOR-SMD;33UH,10%,2012	4	SA
.....6	T0052	2703-000404	INDUCTOR-SMD;220uH,10%,3225	2	SA
.....6	L607	2703-001254	INDUCTOR-SMD;1.8uH,10%,2012	4	SA
.....6	T0052	2703-001838	INDUCTOR-SMD;100nH,5%,1608	1	SA
.....6	X202	2801-003856	CRYSTAL-SMD;0.032768MHz,20ppm,28-ACP,7pF	1	SA
.....6	MX1	2801-004284	CRYSTAL-SMD;27MHz,10ppm,28-AAN,20pF,30oh	1	SA
.....6	X202	2801-004371	CRYSTAL-SMD;12.288MHz,50ppm,SX-1,18pF,50	1	SNA
.....6	F103	2901-001302	FILTER-EMI SMD;20V,0.3A,0pF,2.0x1.2x1.3m	1	SA
.....6	DR32	3301-000314	BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-	1	SA
.....6	BD605	3301-001345	BEAD-SMD;600ohm,2012,300mA,TP,679ohm/112	7	SA
.....6	T0568	3301-001364	BEAD-SMD;1000ohm,1608,150mA,TP,1085ohm/1	2	SNA
.....6	ZVL3	3301-001495	BEAD-SMD;120ohm,2012,2500mA,TP,115ohm/10	24	SA
.....6		3710-002628	SOCKET-INTERFACE;18P,1R,0.5mm,SMD-A,NI	1	SA
.....6		AH41-01185D	PCB MAIN;MM-C530,FR-4,2,T1.6,235*305,PCB	1	SNA
.....6		AH97-05311E	ASSY MICOM-NOR-FLASH;HMC-C430DWWB-1007.0	1	SNA
.....7	ZIC3	1107-001709	IC-FLASH MEMORY;MX25L1605DM2I-12G,16Mbit	1	SNA
.....6		AH97-05316A	ASSY MICOM-MICOM (LC87F5NC8AVU);HMC-C530	1	SNA
.....7	IC520	0903-001565	IC-MICROCONTROLLER;LC87F5NC8AVU,QFP,100P	1	SNA
.....6	CEIC1	AK09-00159A	IC MICOM;MC80C0316-MC015 D32,44,2.7~5.5,	1	SA
...4	E-PASS	AK68-00156W	LABEL;LABEL-E Pass DVD-VCR,SEIN,ART PAPE	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3	B001A	AH96-00823K	ASSY COVER P-BOTTOM;MM-D530D	1	SNA
...4	W391	6003-000275	SCREW-TAPTYPE;BH,+,B,M3,L10,ZPC(BLK),SWR	2	SA
...4	T0136	AH31-00057A	FAN;G6015M12D-BA	1	SA
...4	AS062	AH63-02438A	SHEET-BOTTOM;MM-D530	2	SNA
...4	BC01	AH64-05435K	CABINET-BOTTOM;MM-D530D,EGI-SECC	1	SNA
...4	M0126	AH73-00011B	RUBBER-FOOT;MM-N7,URETAN T3,PI14.5	4	SNA
...4	CLAMP	AK65-00001A	CLAMPER CORE-CORD POWER;EXINO,ABS 94HB	1	SNA
..3	D001A	AK97-02255C	ASSY DECK-DVD;DP-24A,S78RFL-DL5FL,FFC 23	1	SA
...4	S.N.A	0205-001033	GREASE;PL-30G,W050030019	1	SNA
...4	FL627	3809-001839	FFC CABLE-FLAT;30V,80C,217mm,23P,1.0mm,U	1	SA
...4	DH02A	AK97-02033A	ASSY HOLDER-CHUCK;-DP-21,-,-	1	SNA
....5	H212	AK61-00777A	HOLDER-CHUCK;DP-21,ABS,1.6,137.0,87.8,BL	1	SNA
....5	H102	AK61-00778A	BODY-CLAMPER DISC;DP-21,POM,1.0,4.5(H),3	1	SNA
....5	H213	AK61-00779A	SPRING ETC-CLAMPER;DP-21,SUS304CSP,42.0,	1	SNA
...4	C353	AK97-02034C	ASSY HOUSING;DP-24A,9P,RIGHT-SIDE,-	1	SNA
....5	W274	6001-001730	SCREW-MACHINE;BH,+,M1.7,L2.5,ZPC(WHT),SW	2	SA
....5	W396	6003-001620	SCREW-TAPTYPE;CH,+,B,M1.4,L5,NI PLT,SWRC	1	SNA
....5	BTR01	6602-001076	BELT-RECTANGULAR;CR,T1.2,4.3%,1.2X25.1,B	1	SNA
....5	H401	AK61-00780A	FRAME-MAIN;DP-21,ABS,BLK,34.0,150.0,188.	1	SNA
....5	H108	AK63-00478A	TRAY-DISC;DP-21,ABS,T6.0,124.4,186.0,BLK	1	SA
....5	T037	AK66-00093A	SLIDER-CAM;DP-21,POM,1.8,87.0,20.6,WHT	1	SNA
....5	H106	AK66-00094A	GEAR-TRAY;DP-21,POM,0.4(A)/0.8(B),80(A)/	1	SNA
....5	H103	AK66-00095A	GEAR-PULLY;DP-21,POM,0.4,14,19.2(OD)x3.3	1	SNA
....5	DP01A	AK97-02035C	ASSY DECK-PCB DP-24A;9P,DP-24A,RIGHT-SID	1	SNA
....6	DSW1	3409-001201	SWITCH-LEVER;5V,1mA,2,72deg	1	SNA
....6		AK41-00693B	PCB-DECK;DP-26,PHENOL,1,T1.6,T1.6*163*16	1	SNA
....6	FL07	AK41-00706E	FFC-DECK;DP-24A,PITCH1.0,PET,9P,180(L)X1	1	SNA
....5	DM01A	AK97-02036A	ASSY MOTOR;DP-21,-,-,-	1	SA
....6	S.N.A	AK31-00037A	MOTOR DC-LOADING;JQ24-35H440L,DP-21,86mA	1	SNA
....6	S.N.A	AK66-00096A	PULLEY MOTOR;DP-21,POM,GRY,1.9,7.0,3.2(H	1	SNA
...4	H211	AK97-02037C	ASSY PICK UP-DECK;CMS-S78RFL	1	SA
....5		AK81-00015A	MOTOR-SPINDLE DVDP;JQ24-35I350,3V,AJ84-	1	SNA
....5		AK81-00016A	MOTOR-FEED DVDP;JQ24-35H440,2V,3101-0013	1	SNA
....5		AK90-00008A	ASSY SUB MATERIAL-TRAVERSE DECK;DP-24	1	SNA
....5	H211	AK97-02231A	ASSY PICK UP;SOH-DL5FL,-,PICK-UP,-	1	SNA
1		AH91-00314A	ASSY SHIELD;MM-D430D,RU	1	SNA
.2	TAPE	0203-001509	TAPE-FILAMENT;T0.15,W50,L55M,TRP	0	SNA
.2	EC11	AH96-00060E	ASSY POWER CORD;3903-000396 Folded,CP2 (	1	SA
..3	T0268	3903-000396	CBF-POWER CORD;AT,EU,CP2,HOUSING(2P),250	1	SA
1		AH92-03764C	ASSY LABEL;MM-D430D,EU	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2	L-PQS	AC68-01040A	LABEL-STICKER;SV-D200G/SENI,ART PAPER,YE	1	SNA
.2	AL006	AH68-01981A	LABEL-CAUTION;HT-X200,KOR,ART PAPER,W80,	1	SNA
.2		AH68-02296A	LABEL RATING;MM-C330,EDC,SILVER PET (GR	1	SNA
.2		AH68-02326B	LABEL-STAND POP;MM-D430D/ZF,SEF,ART PAPE	1	SNA
.2		AK68-01677A	LABEL-STICKER;RDR-VX450, SEIN,-,THERMAL	1	SA
1		AH92-03765D	ASSY BOX;MM-D430D,EU	1	SNA
.2	L-BARC	AH68-00371A	LABEL-BAR CODE;ALL,ALL,ART PAPER,0.1,80,	1	SNA
.2		AH69-03206A	BOX-SET;MM-D430,CB,DW-1,364,367,310	1	SNA
1	ACCE1	AH92-03766J	ASSY ACCESSORY;MM-D430D,ZF	1	SNA
.2	A001	AH59-02146M	REMOCON-ASSY;MM-DG35-EUR,SAMSUNG,237*48,	1	SA
.2	CRA1A	AH96-00051A	ASSY MISC P-IPOD CRADLE;HT-Z520,XAA,89*5	1	SA
.2		AH96-00926A	ASSY SPEAKER P-SYSTEM;PS-D430D,SPK SYSTE	1	SNA
...3	H041	AH82-00234A	A/S ASSY;PS-D430,FRONT SPK SYSTEM-LEFT	1	SA
...4	H001	AH81-06990A	SPEAKER-PART;PS-D430D,SPK CORD ASSY-LEFT	1	SNA
...3	H042	AH82-00234F	A/S ASSY-SPK;PS-D430D,SPK SYSTEM-RIGHT	1	SA
...4		AH64-05276A	PANEL FRONT-PART;MM-C230,ABS,3T,144,260,	1	SNA
...4		AH81-04723F	A/S PART-FOOT;PS-DG25,-,FOOT,-,-,-	4	SNA
...4	H001	AH81-05779A	SPEAKER;TWEETER,16MM MM-C530,BH	1	SNA
...4		AH81-05800A	AUDIO-RECEIVER-PART;PS-C330,EVA RING	1	SNA
...4		AH81-05801A	AUDIO-RECEIVER-PART;PS-C330,PAPER DUCT	1	SNA
...4		AH81-05804A	AUDIO-RECEIVER-PART;PS-C330,SCREW,FOR TW	2	SNA
...4		AH81-05805A	AUDIO-RECEIVER-PART;PS-C330,SCREW,FOR WF	4	SNA
...4		AH81-05807A	AUDIO-RECEIVER-PART;PS-C330,BAG	1	SNA
...4		AH81-05967A	AUDIO-RECEIVER-PART;PS-C430D,WOOFER UNIT	1	SNA
...4	H001	AH81-06939A	SPEAKER-PART;PS-D430D,CABINET	1	SNA
...4	H001	AH81-06940A	SPEAKER-PART;PS-D430D,LABEL	1	SNA
...4	H001	AH81-06991A	SPEAKER-PART;PS-D430D,SPK CORD ASSY-RIGH	1	SNA
...3		AH82-00235A	A/S ASSY;PS-D430,ASSY-CUSHION	1	SNA
...4		AH81-05965A	AUDIO-RECEIVER-PART;PS-C430,CUSHION-TOP	1	SNA
...4		AH81-05966A	AUDIO-RECEIVER-PART;PS-C430,CUSHION-BOTT	1	SNA
.2		AH96-00969L	ASSY ACCESSORY-MANUAL/CABLE;MM-D430D,ZF	1	SNA
...3	T0120	4301-000115	BATTERY-MN;1.5V,750mAH,R03,10.5x44.5mm,-	2	SA
...3	C-AUD1	AH39-40001V	CABLE-AUDIO CABLE;-,-,1P-1P,3000mm,-,-,-	1	SA
...3	M0025	AH42-00021A	ANT FM T;T18011F-1,75 ohm,1800mm	1	SA
.2		AH96-01274D	ASSY MANUAL P;MM-D530D/ZF,IB,CARD,PE-BAG	1	SNA
...3		6801-001763	CARD-REGISTRATION;Europe Registration,XE	1	SNA
...3	PE I/B	6902-000385	BAG PE;LDPE,T0.03,W250,L350,TRP,8,1PE MA	1	SNA
...3		AH68-02344D	MANUAL USERS;MM-D430D,ZF,FR/ITA/SPA/POR,	1	SNA
...3	L-BARC	AK68-01695A	LABEL-BARCODE;DVD-P380, SEIN,Art paper +	1	SNA
...3		AK68-01811H	LEAFLET-WARRANTY CARD;comm,Samsung,Lang1	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
1		AH92-03767A	ASSY P/MATERIAL;MM-D430D,RU	1	SNA
.2	NITRON	6902-000039	BAG SHEET;HDPE/NITRON,T0.5,W630,L680,WHT	1	SNA
.2	M040	6922-000003	BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014	0	SNA
.2		AH69-02954A	CUSHION-LEFT;80,350,132	1	SNA
.2		AH69-02955A	CUSHION-RIGHT;MM-C430,80,350,135	1	SNA
.2		AK69-00831H	PALLET;DVD-D360,WOOD,W1140,L1300,H130	1	SNA
.2		AK69-00886P	PAD-FOAM;DVD-D350,T3,W1140,L1300	1	SNA
.2		AK69-00993A	PAD-FLAT;DVD-D350,PAPER,T5,W1100,L1300,S	1	SNA
.2		AK69-01006A	PAD-FLAT;DVD-D350,PAPER,T5,W1140,L1300,S	1	SNA
.2		BN74-00008E	TAPE-OPP MASKING;OPP,T0.05,W75,L400M,CLR	2	SNA
.2		MF69-00505A	PAD-EDGE;SIR-TS360,CB,T3,W50,L1000,YEL	1	SNA
.2		MF69-00640A	BOX(P)-EDGE;DSB-P880N/DIR,PAPER,H2075,W1	1	SNA