


1. QE65Q900RATXXC (FA01)

Exploded View

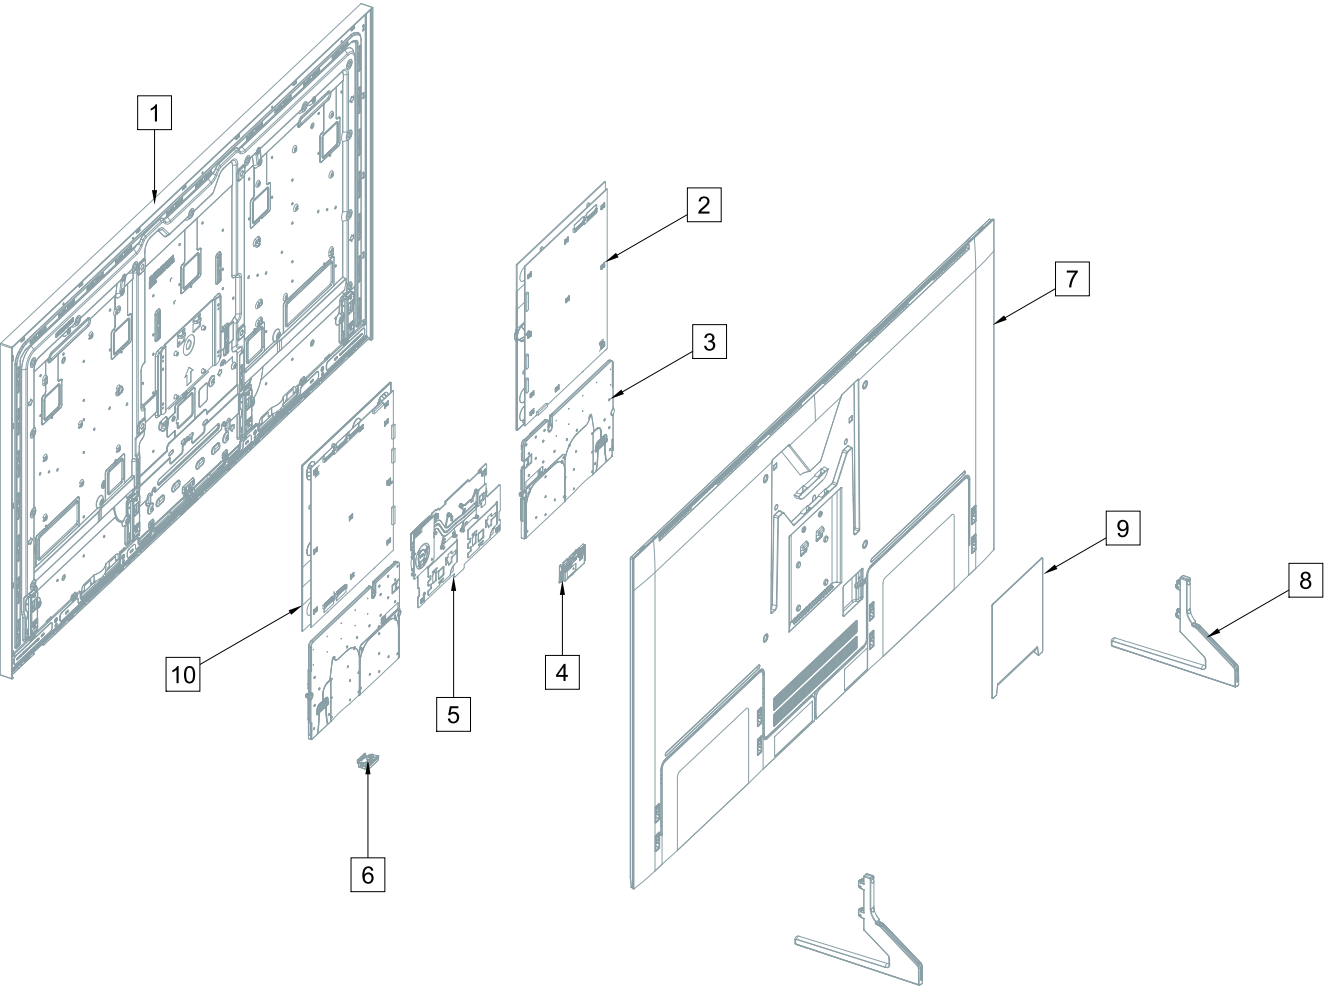


Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2		BN95-05315A	PRODUCT LCD-SDC; CY-TN065JLLV1V/H,Q9S,BAS	SA	1
2	3		BN44-00963A	DC VSS-DRIVER BOARD; L65S9SNA_NHS,DC/DC,4	SA	1
3	2		BN96-47523B	ASSY SPEAKER P-FRONT; TV-SPK,Q900,6ohm,10	SA	1
4	2		BN59-01264B	NETWORK-WLAN CLIENT; WCM730Q,78.3x29.3x7.	SA	1
5	2	M0014	BN94-13427B	ASSY PCB MAIN; QRQ900A	SA	1
6	2		BN96-47777A	ASSY BOARD P-FUNCTION TACT; QN65Q900R,CT2	SA	1
7	2	R001A	BN96-47639A	ASSY COVER P-REAR; 65QNQ90A,PC+ABS+ED20%,	SA	1
8	1	S001A	BN90-10201D	ASSY STAND; QRQ900A	SNA	1
9	2		BN96-48104A	ASSY COVER P-CLEAN BACK WALL MOUNT; 65QRQ	SA	1
10	3		BN44-00964A	DC VSS-DRIVER BOARD; L65S9SNB_NHS,DC/DC,4	SA	1

2. ONE CONNECT Exploded View & Part List

ONE CONNECT Exploded View

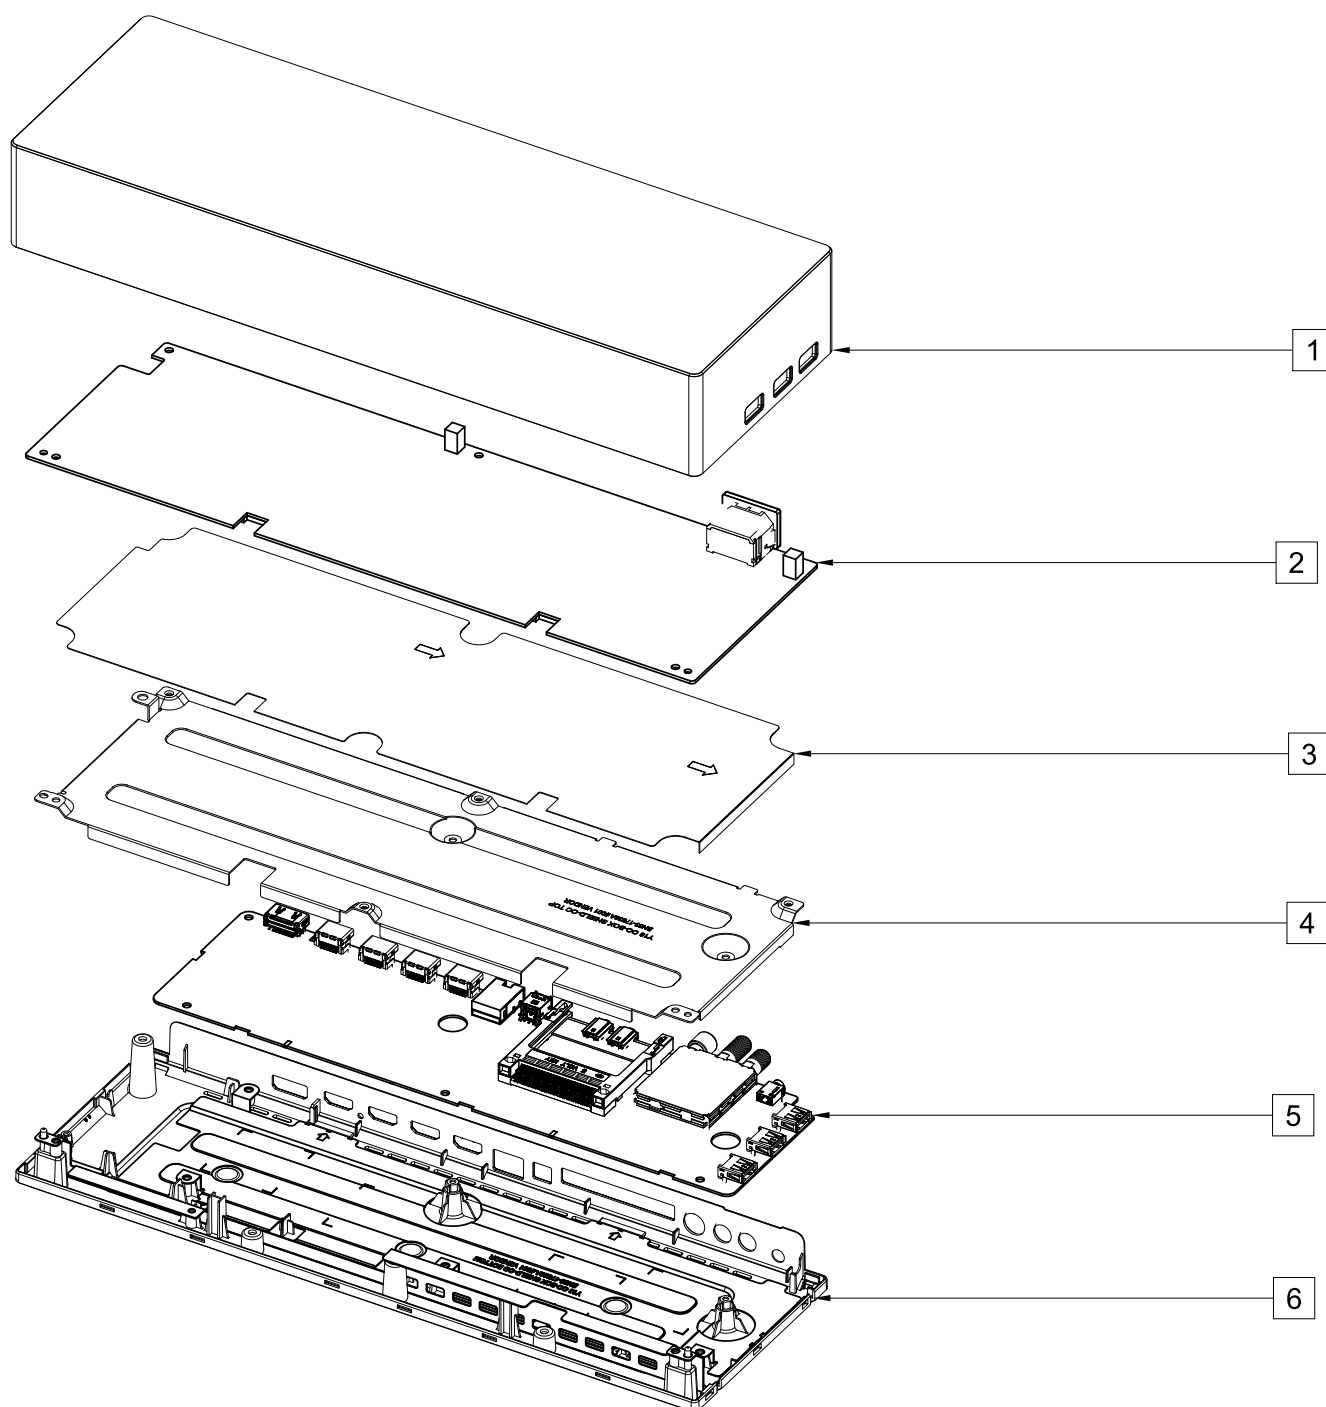

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2		BN96-47703A	ASSY COVER P-OC TOP; 65QRQ900A,PC,V-1,TP0	SA	1
2	2		BN44-00937A	DC VSS-POWER BOARD; P400NQ_NSM,AC/DC,400W	SA	1
3	2		BN63-17541A	INSULATOR-SMPS; 65QNNQ9FA,PC,BLACK,L126.9,	SNA	1
4	2		BN63-17538A	SHIELD-OC TOP; 65QNNQ9FA,EGI-SECC,T0.8	SA	1
5	2		BN94-13293C	ASSY PCB OC; QRQ900A	SA	1
6	2		BN96-45941S	ASSY COVER P-OC BOTTOM; 65QRQ900A,PC+ABS+	SA	1

3. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			QE65Q900RATXXC (FA01)		
1	R001A	BN90-10200C	ASSY COVER REAR;QRQ900A	1	SNA
.2		6001-003168	SCREW-MACHINE;CH,+,M3,L5,ZPC(BLK),SWRCH1	8	SA
.2	R001A	BN96-47639A	ASSY COVER P-REAR;65Q900A,PC+ABS+ED20%,	1	SA
..3		BN02-00094A	TAPE SINGLE FACE;Y12 F-LED,PET,T0.05,W30	1	SNA
..3	R001	BN63-17802A	COVER-REAR;65QRQ900A,PC+ABS+ED20%,V-1,BK	1	SNA
...4		0103-010818	RESIN PC ABS;CM20G/BK00749,BLACK,BK0007,	5000	SNA
..3		BN63-18054A	SHEET-THERMAL;85QRQ900A,GRAPHITE,T0.3,W6	1	SNA
..3		BN63-18056A	SHEET-THERMAL;65QRQ900A,GRAPHITE,T0.6,W1	1	SNA
..3		BN63-18138A	SHEET-THERMAL;65QRQ900A,GRAPHITE,T1,W334	2	SNA
..3		BN63-18158A	INSULATOR-SMPS;65QRQ900A,PC,BLACK,L336.3	2	SNA
..3		BN63-18163A	SHEET-THERMAL;75QRQ900A,GRAPHITE,T0.3,W1	1	SNA
..3	RF01	BN67-00338J	FOOT-RUBBER;32K5300,Si,BLACK,W10,L10,T1.	4	SNA
..3		BN68-08413H	LABEL-STICKER LICENSE;75QRQ900A,PC,T0.25	1	SNA
1	S001A	BN90-10201D	ASSY STAND;QRQ900A	1	SNA
.2		BN96-47687A	ASSY STAND P-COVER TOP LEFT;65Q900A,ALD	1	SA
..3		0201-003279	ADHESIVE-AA;UPUV,CLEAR	1	SNA
..3	RF01	BN61-13520F	FOOT-RUBBER;55Q8,RUBBER,GRAY,W6,L25,T3	4	SNA
..3		BN63-17848A	COVER-STAND TOP LEFT;65QRQ900A,ALDC12,BL	1	SNA
..3		BN68-09340A	LABEL-STICKER;85QRQ900A,PET,T0.05,W15,L3	2	SNA
.2		BN96-47689A	ASSY STAND P-COVER TOP RIGHT;65Q900A,AL	1	SA
..3		0201-003279	ADHESIVE-AA;UPUV,CLEAR	1	SNA
..3	RF01	BN61-13520F	FOOT-RUBBER;55Q8,RUBBER,GRAY,W6,L25,T3	4	SNA
..3		BN63-17849A	COVER-STAND TOP RIGHT;65QRQ900A,ALDC12,B	1	SNA
..3		BN68-09340A	LABEL-STICKER;85QRQ900A,PET,T0.05,W15,L3	2	SNA
1		BN90-10230C	ASSY W/I;QRQ900A	1	SNA
.2		BN81-08159Z	A/S PART SET-ELEC W/I;LED TV ELEC spec-C	1	SNA
.2		BN81-16101R	A/S PART SET-MECH W/I;QRQ900A,Q65NZ*	1	SNA
1		BN91-20386C	ASSY ONE CONNECT;QRQ900A	1	SNA
.2		0203-001598	TAPE-SINGLE FACE;PP,T0.15,W12,N/A,CLEAR	0	SNA
.2	SCREW	6003-000282	SCREW-TAPTYPE;BH,+,-,B,M3,L8,ZPC(BLK),SW	3	SA
.2	SCREW	6003-000283	SCREW-TAPTYPE;BH,+,-,B,M3,L8,ZPC(WHT),SW	11	SNA
.2		6902-002971	BAG PE;HDPE/PE FOAM,-,T0.015/T0.5,W250,L	1	SNA
.2	M0131	AA63-01071A	GASKET-EMI;EMI Shielding,Conductive Tape	2	SNA
.2	M0909	AA63-01387A	GASKET-EMI;EMI Shielding,Conductive Tape	1	SNA
.2		BN39-02437A	LEAD CONNECTOR-POWER;QN65Q900R,UL21516,2	1	SA
.2		BN44-00937A	DC VSS-POWER BOARD;P400NQ_NSM,AC/DC,400W	1	SA
.2		BN62-00731A	PAD GAP-THERMAL;HS01-13040-SST-3535,SILI	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN62-00855A	PAD GAP-THERMAL;QN75Q9FNAFXZA,SILICON,T2	2	SA
.2	M0131	BN63-02627A	GASKET-EMI;Oxford,Conductive Fabric,T8,W	1	SNA
.2		BN63-17538A	SHIELD-OC TOP;65QNNQ9FA,EGI-SECC,T0.8	1	SA
.2		BN63-17541A	INSULATOR-SMPS;65QNNQ9FA,PC,BLACK,L126.9,	1	SNA
.2	M0019	BN68-00970A	LABEL-SECURITY;ALL,PET,T0.05,W60,L60,SEA	1	SNA
.2		BN68-07104D	LABEL-RATING;Monitor,WW,PP,T0.161,W90,L5	1	SNA
.2		BN68-08730A	LABEL-E PASS;QTV,WW,ART,T0.161,W60,L15,P	6	SNA
.2		BN69-17693B	BOX ACCESSORY;65QRQ900A,CB,SW-E,Non Stan	1	SNA
.2		BN69-17702C	PAD-EPE;Y18 OC,EPE,-,W40,L390,H18,WHITE	1	SNA
.2		BN94-13293C	ASSY PCB OC;QRQ900A	1	SA
..3		BN97-14792F	ASSY SMD;QRQ900A	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,20-38um,S	8	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4		0403-000489	DIODE-ZENER;MMSZ5228B,3.705~4.095V,500mW	7	SA
...4		0403-001785	DIODE-ZENER;NZH5V1B,4.94~5.2V,500mW,SOD-	2	SA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	5	SA
...4		0406-001200	DIODE-TVS;RClamp0504F,6V,1MAV,TP	8	SA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2V,24.5V,5MAV,30	1	SNA
...4		0406-001810	DIODE-TVS;uClamp2461P,27V,32V,36V,23000M	1	SA
...4		0501-000462	TR-SMALL SIGNAL;MMBT2907A,PNP,350mW,SOT-	3	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,20V,-4.2A,0.052oh	2	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,30V,-5A,2W,SOIC-8	2	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,0.38A,1.19ohm,	9	SA
...4		0601-003620	LED-IR;SMD Angle Type,1.4mm,200mW,5V,940	2	SA
...4		0801-003603	IC-CMOS LOGIC;MC74LCX244MN2TWG,Octal buf	1	SA
...4		0904-002882	IC-USC;GL852G-OHY38,QFN,28P,5x5mm,12MHz,	2	SA
...4		1006-001595	IC-DRIVER/RECEIVER;UT3221G-P16-R,TSSOP-1	1	SA
...4		1203-004363	IC-VOL. DETECTOR;SOT-23,3Z30,2.9x1.6mm,P	2	SA
...4		1203-008392	IC-VOL. DETECTOR;S-6414AAB-L800X,TSOT-23	2	SA
...4		1203-008777	IC-DC/DC CONVERTER;TPS563201,SOT-23,6,1.	12	SA
...4		1203-008918	IC-DC/DC CONVERTER;TPS65235,WQFN,20P,3x3	1	SA
...4		1203-009067	IC-DC/DC CONVERTER;TPS564201,SOT-23,6P,3	4	SA
...4		1204-003762	IC-DECODER;SDP1705,FCBGA,358P,17x17x1.54	1	SA
...4		1205-005519	IC-SWITCH;ET20163,SOT23-5,5P,2.95x3.02mm	5	SA
...4		1205-005749	IC-SWITCH;G2897KD1U,TDFN2X3-14,14P,2x3mm	2	SA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005,T0.35	11	SA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005,T0.35	25	SA
...4		2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005,T0.35	32	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005,T0.35	3	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005,T0.35	8	SNA
...4		2007-000591	R-CHIP;22ohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000779	R-CHIP;33ohm,1%,1/10W,TP,1608	8	SA
...4		2007-000879	R-CHIP;4.7ohm,1%,1/10W,TP,1608	1	SA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005,T0.35	3	SNA
...4		2007-001116	R-CHIP;680ohm,1%,1/10W,TP,1608	2	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005,T0.35	19	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005,T0.35	17	SNA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005,T0.35,-	35	SNA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005,T0.35	120	SNA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005,T0.35	60	SNA
...4		2007-007231	R-CHIP;110Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005,T0.35	29	SNA
...4		2007-007308	R-CHIP;33Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,T0.35	13	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005,T0.35	21	SA
...4		2007-007313	R-CHIP;6.8Kohm,1%,1/16W,TP,1005,T0.35	14	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005,T0.35	28	SNA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005,T0.35	34	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	6	SA
...4		2007-008026	R-CHIP;56ohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SA
...4		2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	SA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	SNA
...4		2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP,4P,TP,1.	1	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP,4P,TP,1	4	SNA
...4		2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP,4P,TP,1.0	8	SNA
...4		2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP,4P,TP,1	4	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005,T0.5	15	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,T0.	3	SNA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	6	SA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005,T0	8	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	23	SNA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005,T0.5	9	SNA
...4	AD480	2203-006307	C-CER,CHIP;1000nF,10%,25V,X5R,TP,2012	3	SNA
...4	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012,	7	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005,T0	37	SNA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005,T	5	SA
...4	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005,T0	28	SNA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	15	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608,	168	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	19	SA
...4	AD480	2203-007271	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1005,T0	18	SNA
...4	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,T	78	SNA
...4	AD480	2203-007393	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1005,T0	18	SNA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,T0.	74	SA
...4	AD480	2203-007795	C-CER,CHIP;10000nF,20%,10V,X5R,TP,1005,T	167	SA
...4	AD480	2203-007809	C-CER,CHIP;22nF,10%,50V,X7R,TP,1005,T0.5	1	SNA
...4	AD480	2203-008315	C-CER,CHIP;22000nF,20%,25V,X5R,TP,2012,T	42	SA
...4		2703-000125	INDUCTOR-SMD;10uH,10%,2012,T1.25,1.15Ohm	2	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,T0.8,1.35Ohm	1	SA
...4		2703-002269	INDUCTOR-SMD;56nH,5%,1005,T0.5,1.4Ohm,15	7	SA
...4		2703-003803	INDUCTOR-SMD;4.7uH,20%,6060,0.031ohm,270	1	SA
...4		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	6	SA
...4		2703-004630	INDUCTOR-SMD;2.2uH,20%,7070,T5,0.0025Ohm	1	SNA
...4		2703-005191	INDUCTOR-SMD;1.5uH,20%,6060,T4.5,0.02Ohm	12	SA
...4		2801-000102	CRYSTAL-SMD;12MHz,30ppm,12pF,100ohm,TP	4	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	15	SA
...4		3701-001967	CONNECTOR-HDMI;19P,A,FEMALE,AU,0.5mm,BLK	4	SA
...4		3707-001123	CONNECTOR-OPTICAL;ANGLE,SPDIF,2.5PI	1	SA
...4		3709-001712	CONNECTOR-CARD SLOT;68P,1.27mm,ANGLE,AU,	1	SA
...4		3710-004375	CONNECTOR-SOCKET;34P,2R,0.8mm,SMD-A,Au,B	1	SA
...4	EH01	3711-008492	HEADER-BOARD TO CABLE;BOX,26P,2R,2mm,ANG	1	SA
...4		3722-003199	JACK-MODULAR;8P/8C,Y,ANGLE,NONE,AU,1PORT	1	SA
...4		3722-003216	JACK-PHONE;1P/7C,AU,BLK,SMD-A,3.6PI,10.2	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,ANGLE,A,2.0,13.1x1	3	SA
...4		BN13-00070A	IC ASIC;UEI1702,UEI1702,20P,3.3V,-20to+7	1	SA
...4		BN40-00333B	TUNER-DTV AIR CABLE SAT;GT2S2-7D31,DVB-T	1	SA
...4		BN41-02680B	PCB-OC;Q900,FR-4,4L,T1.2,330x142mm,1,Lux	1	SNA
...4		BN97-15150A	ASSY MICOM;KM2MICOM_OCL_JP,Q900,W25Q16JV	1	SNA
....5		1107-002547	IC-NOR FLASH;W25Q16JVSSIQ,16Mbit,2Mbitx8	1	SNA
.2		BN96-45941S	ASSY COVER P-OC BOTTOM;65QRQ900A,PC+ABS+	1	SA
..3		BN62-00302A	PAD GAP-THERMAL;SILICON,T8,L40,H40,GRAY,	2	SNA
..3	M0131	BN63-02627A	GASKET-EMI;Oxford,Conductive Fabric,T8,W	1	SNA
..3		BN63-17244A	SHEET-PROTECTION COVER;55LS003,PO,T0.06,	0	SNA
..3		BN63-17488R	COVER-OC BOTTOM;65QRQ900A,PC+ABS+GF15%,T	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		0103-010275	RESIN PC ABS;235GNH15/6919H,Black,BK0007	230	SNA
..3		BN63-17520A	SHIELD-OC BOTTOM;65QNNQ9FA,EGI-SECC,T0.5,	1	SNA
..3		BN63-17718A	SHIELD-OC TOP FRONT;65QNNQ9FA,EGI-SECC,T0	1	SNA
..3	RF01	BN67-00327J	FOOT-RUBBER;PE400,RUBBER,GRAY,T2.5,,	4	SNA
..3		BN68-05603A	LABEL-E PASS;ART,W/W,90g	3	SNA
.2		BN96-47703A	ASSY COVER P-OC TOP;65QRQ900A,PC,V-1,TP0	1	SA
..3		0203-000007	TAPE-FILAMENT;PE,T0.1,W18,L55M,CLEAR,-	0	SNA
..3		BN02-00303A	TAPE-DOUBLE FACE;PET,T0.2,W8,CLEAR,DOUBL	0	SNA
..3		BN61-07463K	TAPE-DOUBLE FACE;ACRYL,T0.25,W10,CLEAR	0	SNA
..3		BN61-15817A	BRACKET-OC EMI;65QNNQ9FA,STS,T0.3,NATURAL	1	SNA
..3		BN62-00858A	HEAT SINK-PS;65QRQ900A,A1050,T1.5,W120.1	1	SNA
..3		BN63-16151A	SHEET-PROTECTION COVER;40K6200,PO,T0.068	0	SNA
..3		BN63-17487A	COVER-OC TOP;65QNNQ9FA,PC,V-1,TP0116,ONE	1	SNA
...4		0103-011270	RESIN PC;NH3022PN3/3354M,Violet,TP0116,V	370	SNA
..3		BN63-17734A	SHEET-THERMAL;75QNNQ9FA,GRAPHITE,T1,W115,	1	SNA
..3		BN63-17820A	INSULATOR-SMPS;65QRQ900A,PC,BLACK,L427.2	1	SNA
1		BN91-20425E	ASSY SHIELD;QRQ900A	1	SNA
.2		6001-003168	SCREW-MACHINE;CH,+,M3,L5,ZPC(BLK),SWRCH1	8	SA
.2		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L50M,WHIT	2	SNA
.2	EC13	BN39-02211F	LEAD CONNECTOR-SUB ASSY;Q7F,Q7C,Q8C,UL21	1	SA
.2		BN39-02429A	LEAD CONNECTOR-POWER;Q900R_65",UL21016,1	1	SA
.2		BN59-01264B	NETWORK-WLAN CLIENT;WCM730Q,78.3x29.3x7.	1	SA
.2		BN61-14942A	HOLDER-WIFI;75Q9F,ABS,BK0007,HB	1	SNA
.2		BN63-18124A	SHEET-EVA;65QRA900A,EVA,T10,W18,L45,BLAC	1	SNA
.2		BN63-18125A	SHEET-EVA;65QRQ900A,EVA,T10,W22,L45,BLAC	1	SNA
.2		BN96-39488A	FFC CABLE;KS9500,Straight,L57,96P	4	SA
.2		BN96-47523B	ASSY SPEAKER P-FRONT;TV-SPK,Q900,6ohm,10	1	SA
.2		BN96-47750A	FFC CABLE;Q900R_65 75 82",Fold,L180,68P,	1	SA
.2		BN96-47752A	FFC CABLE;Q900R_65 75 82",Fold,L180,68P,	1	SA
.2		BN96-47777A	ASSY BOARD P-FUNCTION TACT;QN65Q900R,CT2	1	SA
.2		BN96-47865A	FFC CABLE;QN65Q900R,Fold,L570,24P	1	SA
.2		BN96-48104A	ASSY COVER P-CLEAN BACK WALL MOUNT;65QRQ	1	SA
..3		BN61-15056A	MAGNET NEODYMIUM;55LS003,Nd,T2,W10,L20	2	SNA
..3		BN63-18131A	COVER-CLEAN BACK WALL MOUNT;65QRQ900A,PC	1	SNA
.2	T0382	BP61-00492C	TAPE SINGLE FACE;ACRYL,ACRYL,T0.25,W50,L	0	SNA
1	M0017	BN91-20426B	ASSY CHASSIS;QRQ900A	1	SNA
.2	M0014	BN94-13427B	ASSY PCB MAIN;QRQ900A	1	SA
..3	M0131	AA63-01071A	GASKET-EMI;EMI Shielding,Conductive Tape	1	SNA
..3		BN62-00574A	HEAT SINK-ES;F7000,A6063,W28,L14,BLACK,t	1	SNA
..3		BN62-00865A	HEAT SINK-HEAT PIPE MODULE;Q900R,Cu,W112	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3		BN62-00867A	HEAT SINK-PS;Q900R,A1050,W120,L70,BLACK,	2	SNA
..3		BN62-00868A	HEAT SINK-PS;65QRQ900A,A1050,W160,L60,BL	1	SNA
..3		BN62-00871A	PAD GAP-THERMAL;Q900R,RUBBER,T2.5,L40,H2	3	SNA
..3		BN62-00872A	PAD GAP-THERMAL;Q900R,RUBBER,T2,L40,H20,	2	SNA
..3		BN63-10803A	GASKET-EMI;PS43F4900,FABRIC,T4,W10,L36,G	3	SNA
..3		BN97-14214A	ASSY DRM;Kant-M2,DVB,NagSam, MAC, HDCP,	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFICATION;MAC,TV/AV,General	1	SNA
...4		BN46-00110P	KEY CODE-CERTIFICATION;MIRACAST(HDCP2.2)	1	SNA
...4		BN46-00772A	KEY CODE-CERTIFICATION;KANT-M2,Nagra CSC	1	SNA
...4		BN46-00774A	KEY CODE-CERTIFICATION;KANT-M2,CI PLUS,S	1	SNA
..3		BN97-15159D	ASSY SMD;QRQ900A	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,20-38um,S	8	SNA
...4		0403-000489	DIODE-ZENER;MMSZ5228B,3.705~4.095V,500mW	7	SA
...4		0403-001411	DIODE-ZENER;BZT52-B5V6S,5.49~5.73V,200mW	1	SA
...4		0403-001900	DIODE-ZENER;SMFZ6.2V,6.5~7V,1000mW,SOD-1	1	SA
...4		0403-002014	DIODE-ZENER;KDZ16B,16.2~18.3V,1000mW,SOD	1	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	2	SA
...4		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	1	SA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	5	SA
...4		0404-001953	DIODE-SCHOTTKY;MBRA340F-HAF,40V,3000mA,S	6	SA
...4		0404-001976	DIODE-SCHOTTKY;SV540,40V,5000mA,TO-277,T	4	SA
...4		0406-001438	DIODE-TVS;SMCJ14A,15.6V,17.2V,1MAV,6.5VP	2	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V,6.7V,7V,200MAV,20	13	SA
...4		0406-001718	DIODE-TVS;SMF36A,40V,44.2V,3.8MAV,1.25VP	1	SA
...4		0406-001778	DIODE-TVS;PUSB3FR4,6V,9V,0.2MAV,0.7VPA,0	10	SA
...4		0406-001786	DIODE-TVS;PJEC5V0V6TM,5V,7V,8V,0.1MAV,9V	1	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	7	SC
...4		0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	1	SA
...4		0504-000126	TR-DIGITAL;KSR1101,NPN,200mW,4.7K/4.7K,S	1	SA
...4		0505-001844	FET-SILICON;SI4435DDY-T1-GE3,P,30V,-11.4	2	SA
...4		0505-002660	FET-SILICON;Si2308BDS,N,60V,2.3A,0.156oh	1	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,30V,-5A,2W,SOIC-8	2	SA
...4		0505-003205	FET-SILICON;DMG4435SSS-13,P,30V,-7.3A,1.	2	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,0.38A,1.19ohm,	9	SA
...4		0505-003507	FET-SILICON;AO3424,N,30V,3.8A,1.4W,SOT-2	4	SA
...4		0505-003620	FET-SILICON;AOD4286,N,100V,14A,55.5mohm,	2	SA
...4		0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	SA
...4		0801-003580	IC-CMOS LOGIC;TC7WB66CFK,SSOP,8P,2.0X2.3	3	SA
...4		1003-002949	IC-LEVEL DRIVER;VLS2SM,QFN,40P,6x6x0.9mm	1	SA
...4		1103-001584	IC-EEPROM;M24512-DFMN6TP,512Kbit,64K x 8	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1105-002896	IC-DDR4 SDRAM;MT53B256M32D1,LPDDR4-SDRAM	1	SA
...4		1105-002926	IC-DDR4 SDRAM;H9HCNNN4KUMLHR,LPDDR4-SDRA	5	SA
...4		1105-002933	IC-DDR4 SDRAM;MT53B384M32D2NP-062 WT:B,L	1	SA
...4		1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	SA
...4		1201-004170	IC-AUDIO AMP;TAS880021A,TSSOP,48P,12.5x6	3	SA
...4		1203-006288	IC-VOL. DETECTOR;RT9818B-18GV,SOT-23-3,3	3	SA
...4		1203-008139	IC-DC/DC CONVERTER;TPS56C20PWPR,HTSSOP,2	3	SA
...4		1203-008392	IC-VOL. DETECTOR;S-6414AAB-L800X,TSOT-23	2	SA
...4		1203-008777	IC-DC/DC CONVERTER;TPS563201,SOT-23,6,1.	12	SA
...4		1203-008920	IC-DC/DC CONVERTER;SYD105ADC,TSOT23,6P,2	1	SA
...4		1203-009057	IC-POS1.ADJUST REG.;G943F11U,SOP-8,8P,4.	6	SA
...4		1203-009063	IC-DC/DC CONVERTER;VPM2SM,QFN,56P,7x7x0.	2	SA
...4		1203-009067	IC-DC/DC CONVERTER;TPS564201,SOT-23,6P,3	4	SA
...4		1203-009069	IC-DC/DC CONVERTER;TPS566250,SOP,8P,6.2x	2	SA
...4		1203-009164	IC-DC/DC CONVERTER;CSD95378BQ5M,SON,13P,	2	SA
...4		1203-009166	IC-PWM CONTROLLER;TPS40428RHAR,VQFN,40P,	1	SA
...4		1204-003753	IC-DECODER;SDP1703,FCBGA,1147P,31x31x2.1	1	SA
...4		1204-003758	IC-DECODER;SDP1715,TFBGA,227P,13x13x1.54	1	SA
...4		1204-003766	IC-DECODER;SDP1801,FCBGA,935P,31x31x2.19	1	SA
...4		1204-003770	IC-DECODER;SDP1802,FCBGA,672P,27x27x2.4m	2	SA
...4		1205-005519	IC-SWITCH;ET20163,SOT23-5,5P,2.95x3.02mm	5	SA
...4		1205-005749	IC-SWITCH;G2897KD1U,TDFN2X3-14,14P,2x3mm	2	SA
...4	IS01	1209-002183	IC-SENSOR;S-5851AAA-M6T1U,SOT,6Z30,2.9x1	1	SA
...4		1404-001731	THERMISTOR-NTC;33Kohm,4050K,1MWC,TP,1.6x	1	SNA
...4		1405-001185	VARISTOR;500V,24VDC,1608,TP,150V,0.055pF	2	SA
...4		1405-001232	VARISTOR;6.4V,5.6VDC,30A,1608,TP,19V,200	38	SNA
...4		1405-001271	VARISTOR;35V,20VDC,5A,1005,TP,100V,10pF	17	SA
...4		1405-001381	VARISTOR;11V,8VDC,30A,1608,TP,25V,500pF	13	SA
...4		1405-001382	VARISTOR;24.5V,16VDC,120A,2012,TP,42V,40	5	SA
...4		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608,T0.45	8	SA
...4		2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	12	SNA
...4		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005,T0.35	3	SNA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005,T0.35	14	SNA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005,T0.35	25	SA
...4		2007-000154	R-CHIP;24Kohm,5%,1/16W,TP,1005	4	SA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005,T0.35	32	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005,T0.35	8	SNA
...4		2007-000475	R-CHIP;1Mohm,1%,1/10W,TP,1608	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000772	R-CHIP;33Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	4	SA
...4		2007-002437	R-CHIP;2ohm,5%,1/10W,TP,1608	4	SNA
...4		2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	33	SA
...4		2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005,T0.35,-	35	SNA
...4		2007-007131	R-CHIP;13Kohm,1%,1/16W,TP,1005,T0.35	3	SA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007134	R-CHIP;39Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005,T0.35	120	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005,T0.35	5	SA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005,T0.35	6	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005,T0.35	60	SNA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-007305	R-CHIP;120ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005,T0.35	29	SNA
...4		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005,T0.35	27	SA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005,T0.35	18	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005,T0.35	21	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005,T0.35	4	SNA
...4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005,T0.35	28	SNA
...4		2007-007319	R-CHIP;390ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005,T0.35	2	SNA
...4		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-007489	R-CHIP;150Kohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005,T0.35	16	SNA
...4		2007-007520	R-CHIP;20ohm,1%,1/10W,TP,1608	12	SA
...4		2007-007528	R-CHIP;1.5Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005,T0.35	3	SA
...4		2007-007588	R-CHIP;1.8Kohm,1%,1/16W,TP,1005,T0.3	3	SA
...4		2007-007671	R-CHIP;11Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-007733	R-CHIP;51ohm,1%,1/10W,TP,1608	3	SA
...4		2007-007736	R-CHIP;510Kohm,1%,1/10W,TP,1608	4	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005,T0.35	34	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	6	SA
...4		2007-007798	R-CHIP;10ohm,1%,1/16W,TP,1005,T0.35	28	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007992	R-CHIP;1ohm,1%,1/10W,TP,1608	2	SA
...4		2007-008067	R-CHIP;21Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-008117	R-CHIP;2.7Kohm,1%,1/16W,TP,1005,T0.35	2	SA
...4		2007-008134	R-CHIP;12.4Kohm,1%,1/16W,TP,1005	2	SC
...4		2007-008137	R-CHIP;24Kohm,1%,1/16W,TP,1005,T0.35	3	SNA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005,T0.35	1	SNA
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005,T0.35	9	SA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005,T0.35	13	SA
...4		2007-008517	R-CHIP;240Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-008596	R-CHIP;0.1ohm,1%,1/4W,TP,3216	5	SC
...4		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	4	SA
...4		2007-009322	R-CHIP;1.3Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-009777	R-CHIP;4.99Kohm,1%,1/16W,TP,1005	1	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	48	SNA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	11	SA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	1	SNA
...4		2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP,4P,TP,1.0	8	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005,T0.5	15	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,TP,1005	14	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	6	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	7	SA
...4	AD480	2203-000530	C-CER,CHIP;2.7nF,10%,50V,X7R,TP,1005,-	1	SNA
...4	AD480	2203-000715	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1608	4	SNA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005,T0	8	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	23	SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	SNA
...4	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	5	SA
...4	AD480	2203-005054	C-CER,CHIP;0.0047nF,0.25pF,50V,C0G,TP,10	1	SA
...4	AD480	2203-005057	C-CER,CHIP;0.0082nF,0.25pF,50V,C0G,TP,10	2	SA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,T0.	12	SA
...4	AD480	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005,T0.	67	SA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,T0.	646	SNA
...4	AD480	2203-006260	C-CER,CHIP;220nF,10%,10V,X5R,TP,1005	1	SNA
...4	AD480	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	2	SC
...4	AD480	2203-006391	C-CER,CHIP;1000nF,10%,10V,X7R,TP,1608	1	SNA
...4	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,T0	14	SNA
...4	AD480	2203-006844	C-CER,CHIP;470nF,10%,10V,X5R,TP,1005	5	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,T	29	SNA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	19	SA
...4	AD480	2203-007423	C-CER,CHIP;10000nF,10%,35V,X7R,TP,3216	4	SA
...4	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,T	1	SA
...4	AD480	2203-008096	C-CER,CHIP;2200nF,10%,50V,X5R,TP,2012,1.	2	SA
...4	AD480	2203-008315	C-CER,CHIP;22000nF,20%,25V,X5R,TP,2012,T	42	SA
...4	AD480	2203-008412	C-CER,CHIP;4700nF,10%,50V,X5R,TP,2012,T1	4	SNA
...4		2409-001213	C-ORGANIC,SMD;150uF,20%,6.3V,-,TP,3.5x2.	7	SNA
...4		2409-001240	C-ORGANIC,SMD;33uF,20%,25V,LR,TP,7343	2	SA
...4		2601-001378	TRANS-SMD,MATCHING;350uH	1	SNA
...4		2703-003488	INDUCTOR-SMD;10uH,20%,6965,T2.8,0.071Ohm	2	SA
...4		2703-003637	INDUCTOR-SMD;22uH,20%,7070,0.18ohm,2000m	1	SA
...4		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	1	SA
...4		2703-003937	INDUCTOR-SMD;1uH,20%,70647,T3,0.008Ohm,9	3	SA
...4		2703-004226	INDUCTOR-SMD;8.2uH,20%,10.7x10mm,T3.8,0.	2	SA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,5050,T4,0.072Ohm,	12	SA
...4		2703-005191	INDUCTOR-SMD;1.5uH,20%,6060,T4.5,0.02Ohm	12	SA
...4		2703-005193	INDUCTOR-SMD;2.2uH,20%,6060,T4.5,0.024Oh	5	SA
...4		2703-005700	INDUCTOR-SMD;470nH,20%,11x10mm,T3.8,0.00	2	SA
...4		2801-000102	CRYSTAL-SMD;12MHz,30ppm,12pF,100ohm,TP	4	SA
...4		2801-004938	CRYSTAL-SMD;24MHz,20ppm,SMD,12pF,60Ohm,T	3	SA
...4		2801-005372	CRYSTAL-SMD;24.576MHz,20ppm,HCX-3SB,12 p	1	SA
...4		3301-001364	BEAD-SMD;1000ohm/100Mhz 1000ohm/100Mhz,1	6	SNA
...4		3301-001901	BEAD-SMD;220ohm,1.6x0.8mm 1.6x0.8mm,TP,2	49	SA
...4		3301-002039	BEAD-SMD;26ohm/100Mhz 26ohm/100Mhz,1.6x0	127	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	15	SA
...4		3601-001376	FUSE-SURFACE MOUNT;32V,3A,FAST-ACTING,Hi	3	SNA
...4		3708-003062	CONNECTOR-FPC/FFC/PIC;24P,0.5mm,SMD-A,AU	1	SA
...4		3708-003176	CONNECTOR-FPC/FFC/PIC;68P,0.5mm,SMD-A,AU	2	SA
...4		3708-003241	CONNECTOR-FPC/FFC/PIC;96P,0.5mm,SMD-A,AU	4	SNA
...4		3710-004374	CONNECTOR-SOCKET;34P,1R,0.8mm,SMD-A,Au,B	1	SA
...4	EH01	3711-007412	HEADER-BOARD TO CABLE;BOX,3P,1R,1.25mm,S	1	SA
...4		3711-007776	CONNECTOR-HEADER;BOX,8P,1R,1.25mm,SMD-A,	1	SA
...4	EH01	3711-007838	HEADER-BOARD TO CABLE;BOX,6P,1R,1.25mm,S	1	SA
...4	EH01	3711-008453	HEADER-BOARD TO CABLE;BOX,18P,2R,2mm,ANG	1	SA
...4	EH01	3711-008488	HEADER-BOARD TO CABLE;BOX,14P,2R,2mm,ANG	1	SA
...4	EH01	3711-008739	HEADER-BOARD TO CABLE;BOX,30P,2R,2mm,ANG	1	SA
...4		3711-009090	CONNECTOR-HEADER;BOX,16P,1R,1.25mm,SMD-A	1	SA
...4		6302-001232	GASKET-EMI;SMT Gasket,Sn/Cu plated PI-Fi	25	SNA
...4		BN41-02679B	PCB-MAIN;Q900, 8K,FR-4,8L,T1.6,330x245mm	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	CB07	BN61-13312B	BRACKET-SCREWLESS PCB;55KS8000,SK5,T0.3,	4	SNA
...4		BN97-15191A	ASSY MICOM;KM2MICOM_8K_TV,Q900,W25Q40CLS	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SA
...4		BN97-15316A	ASSY MICOM;T-KTM2DEUC,ASSY MICOM-MAIN,QR	1	SNA
....5		1107-002590	IC-EMMC;KLM8G1GETF-B041007,8Gbyte,64Gbx1	1	SNA
...4		BN97-15465A	ASSY MICOM;TCON DATA,65A1ME9TN,65inch SD	1	SNA
....5		1107-002566	IC-NOR FLASH;W25Q32JVSSIQ,32Mbit,16384x2	2	SNA
1		BN92-23846A	ASSY BOX;QRQ900A	1	SNA
.2		BH68-00662A	LABEL BOX;ALL,ART,W60,L110,WHT,NO SILK,9	1	SNA
.2		BN69-18883A	BOX UNIT-OUT;65QRQ900A,CB,DW4,F3,L1606,W	1	SNA
1	ACCE1	BN92-23848D	ASSY ACCESSORY;QRQ900A	1	SNA
.2		BN96-47512A	ASSY ACCESSORY MANUAL CABLE;QE65Q900RATX	1	SNA
..3	T0268	3903-001118	POWER CORD-DT;EUR,2P-F,250V,2.5A,BLK,L15	1	SA
..3		4301-000103	BATTERY-ALKALINE;1.5V,750mAh,LR03,10.2x4	2	SNA
..3		BN39-02436A	ONECONNECT CABLE;Q900A,31P/31P,L5000,UL2	1	SA
..3		BN59-01300J	REMOCON-SMART CONTROL;2018 TV,SAMSUNG,14	1	SA
..3	T0527	BN68-00513A	LABEL-E PASS;ALL MODEL,WW,YUPO,W50,L15,W	1	SNA
..3		BN68-00514K	LEAFLET-WARRANTY;comm,Samsung,W.Europe,W	1	SNA
..3		BN68-07598A	LEAFLET-REGULATORY GUIDE;QT/UT/LFD/LM/HD	1	SNA
..3		BN68-08112A	LABEL-SECURITY;ALL,PET,T0.05,W55,L52,GLO	1	SNA
..3		BN68-08114Q	LEAFLET-REGULATORY GUIDE;QT/UT,W/W,MOJO,	1	SNA
..3		BN68-09300A	MANUAL USERS;Q900,XC,SPAIN,MOJO,0,1 COLO	1	SNA
..3		BN68-09310A	LEAFLET-ACCESSORY KIT;Q900,ZG & XC & XN & XH & Z	1	SNA
..3		BN69-13935A	BAG ACCESSORY;LDPE,T0.07,W700,L350,TRP,R	1	SNA
..3	EH03A	BN96-46480A	ASSY HOLDER P-RING;65Q9NQ9FA,ABS,BLACK,HB	1	SA
...4		6902-001404	BAG PE;LDPE,T0.05,W80,L100,TRP,Bio. N	1	SNA
...4		BN61-15782A	HOLDER-WALL RING;55Q9NQ9FA,ABS,T2,BK0007,	4	SNA
..3		BN96-48018A	ASSY HOLDER P-OC CABLE;85QRQ900A,PC,TP00	1	SA
...4	SCREW	6003-001208	SCREW-TAPTYPE;BH,+,S,M4,L12,ZPC(BLK),SWR	1	SA
...4		6902-000683	BAG PE;LDPE,T0.05,W60,L60,TRP,Bio. N,Zip	1	SNA
...4	AH089	BN61-14021A	HOLDER-CABLE;55KS8000,PA66,BK0007,V-2	1	SA
...4		BN61-15791A	HOLDER-OC CABLE;65Q9NQ8CB,PC,TP0003,V-2	1	SNA
..3		BN96-49298A	ASSY ACCESSORY-SCREW;65QRQ60T,ALL,W/W,60	1	SNA
...4	SCREW	6003-001907	SCREW-TAPTYPE;BH,+,S,M4,L14,ZPC(BLK),SWR	4	SA
...4		6902-003076	BAG SCREW;LDPE,T0.05,W70,L90,TRP,RECYCLE	1	SNA
1		BN92-23930D	ASSY LABEL;QRQ900A	1	SNA
.2		0203-001598	TAPE-SINGLE FACE;PP,T0.15,W12,N/A,CLEAR	0	SNA
.2		BN68-07519B	LABEL-ENERGY;ALL JORDAN,WW,PP,T0.135,W60	1	SNA
.2		BN68-08409B	LABEL-RATING;QTV,WW,PP,T0.161,W150,L48,T	1	SNA
.2		BN68-09304B	LEAFLET-QUICK SETUP GUIDE;Q900RA,W/W,W/W	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
1		BN92-24079A	ASSY P/MATERIAL;QRQ900A	1	SNA
.2		6902-002233	BAG AIR;LDPE,-,T0.2,W900,L1850,TRP,-,-,-	0	SNA
.2		6902-003237	BAG ROLL;HDPE/PE FOAM,T0.02,W1650,L400,W	2	SA
.2		6922-000003	BAND;PP,T0.8,W18,L1650M,TRP,DA69-90145A	6	SNA
.2		BN02-00319B	TAPE-SINGLE FACE;OPP,T0.05,W75,L800M,CLE	2	SNA
.2		BN68-02422B	LABEL WARNING;ALL,ART,T0.05,W240,L100,Wh	0	SNA
.2		BN69-03982J	PACKING ANGLE;ALL,PAPER,T5,W1900,L60,-,-	0	SNA
.2		BN69-05418M	WRAP;T0.017,500,2000000,2000000,500	0	SNA
.2		BN69-17603A	CUSHION-SET FRONT;65QNQ9FA,EPS,16.7g/l,W	1	SNA
..3		0103-005099	RESIN EPS;BASF303,Natural,Natural	509	SNA
.2		BN69-18440A	CUSHION-SET SIDE;65QRQ900A,EPS,16.7g/l,W	2	SNA
..3		0103-005099	RESIN EPS;BASF303,Natural,Natural	509	SNA
.2		BN69-18588U	PALLET;Y18 LED TV,WOOD,-,W1175,L1620,H14	0	SNA
.2		BN96-45139B	ASSY PACKING P-PAD;65Q7F,PP/EPE,WITH WAR	2	SNA
..3		BN68-08908A	LABEL WARNING;ALL MODEL,ART,W70,L100,90g	2	SNA
..3		BN69-16841B	PAD-EPE;65Q7F,EPE,T1.2/T3,W100,L810,MIXE	2	SNA
.2		BN96-47994A	ASSY PACKING P-CUSHION SET;GQ65Q900R,-,E	1	SNA
..3		BN69-18436A	CUSHION-SET;65QRQ900A,EPS,16.7g/l,WHITE	1	SNA
..3		BN69-18882A	BOX UNIT-IN;65QRQ900A,CB,DW1,C1,L1944,W5	1	SNA
1		BN95-05393L	PRODUCT LCD DP;BN95-05315A; CY-TN065JLLV	1	SA
.2		BN95-05315A	PRODUCT LCD-SDC;CY-TN065JLLV1V/H,Q9S,BAS	1	SA
..3		6001-002343	SCREW-MACHINE;CH,+,M3,L12,ZPC(BLK),SWRCH	11	SA
..3		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L50M,WHIT	1	SNA
..3		BN02-00105J	TAPE SINGLE FACE;65Q900,PET,T0.1,W50,L24	2	SNA
..3		BN39-02432A	LEAD CONNECTOR-POWER;Q900R_65",UL21516,3	1	SA
..3		BN44-00963A	DC VSS-DRIVER BOARD;L65S9SNA_NHS,DC/DC,4	1	SA
..3		BN44-00964A	DC VSS-DRIVER BOARD;L65S9SNB_NHS,DC/DC,4	1	SA
..3	M0131	BN63-00520A	GASKET-EMI;APPOLO_PAL,Conductive Fabric,	2	SNA
..3		BN68-05722A	LABEL-E PASS;POLYPROPYLENE,NON-COATING	1	SNA
..3		BN90-10062A	ASSY BACK LIGHT UNIT;QNQ9*	1	SNA
...4		BN61-15563B	OPTICAL SHEET-COMPLEX;18Y_Q9F_65INCH_COM	1	SNA
...4		BN61-15641A	OPTICAL SHEET-HIGH COLOR;18Y_Q9F_65INCH_	1	SNA
...4		BN61-15642A	DIFFUSER PLATE;18Y_Q9F_65INCH_D.PLATE,PS	1	SNA
...4		BN61-15870A	OPTICAL SHEET-DBEF;18Y_Q8F_65INCH_DBEF,P	1	SNA
...4		BN61-15929A	FRAME-CHASSIS REAR BOTTOM;65QRQ900A,PC+G	1	SNA
...4		BN61-15930A	FRAME-CHASSIS REAR LEFT RIGHT;65QRQ900A,	2	SNA
....5		0103-011284	RESIN PC;LS-3104G/FW9931,White,WT0134,V-	264	SNA
...4		BN90-10386A	ASSY BACK LIGHT UNIT;65Q900,-,-,BN95-053	1	SNA
....5		6001-003336	SCREW-MACHINE;CH,+,M3,L4,ZPC(WHT),SWRCH1	65	SA
....5		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L50M,WHIT	0	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		BN02-00105H	TAPE SINGLE FACE;65QRQ900A,PET,T0.05,W70	4	SNA
....5		BN63-17855A	INSULATOR-SMPS;75QRQ900A,PC,BLACK,L337.8	2	SNA
....5		BN63-17895A	INSULATOR-LED PCB;65Q900A,PET,WHITE,L139	1	SNA
....5		BN95-05344A	ASSY LED BAR;Q9S_65,LED BAR	1	SNA
.....6		BN97-15323A	ASSY SMD BIN;Q900_65	10	SNA
.....7		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,20-38um,S	13	SNA
.....7		0204-007920	PASTE SILICONE;Hi-poxy 9600W,30~40 PaS,H	2	SNA
.....7	DS01A	0401-001099	DIODE-SWITCHING;1N4148WS,75V,150mA,SOD-3	30	SA
.....7		0406-001778	DIODE-TVS;PUSB3FR4,6V,9V,0.2MAV,0.7VPA,0	10	SA
.....7		0406-001823	DIODE-TVS;PJUSB208,85V,0.1MAV,0.715VPA,2	20	SA
.....7	DS01A	0407-000112	DIODE-SWITCHING;BAV70,70V,200mA,SOT-23,T	240	SA
.....7		0505-003397	FET-SILICON;2N7002K,N,60V,0.38A,1.19ohm,	990	SA
.....7		0601-003690	LED-BIN;SMD(TOP VIEW),BLU,1x1mm,2.8x3.2x	960	SNA
.....7		1003-002953	IC-LED DRIVER;AS3824A1-ZQFT,QFN,48P,7x7x	30	SA
.....7		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	90	SA
.....7		2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	150	SA
.....7		2007-000107	R-CHIP;470Kohm,5%,1/10W,TP,1608	480	SA
.....7		2007-000946	R-CHIP;47ohm,1%,1/10W,TP,1608	90	SA
.....7		2007-001258	R-CHIP;10ohm,1%,1/4W,TP,3216	960	SA
.....7		2007-007736	R-CHIP;510Kohm,1%,1/10W,TP,1608	30	SA
.....7	AD480	2203-001607	C-CER,CHIP;0.22nF,5%,50V,C0G,TP,1608	90	SA
.....7	AD480	2203-007370	C-CER,CHIP;1000nF,10%,10V,X7R,TP,2012	120	SA
.....7	AD480	2203-009641	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,T0	60	SNA
.....7		3708-003322	CONNECTOR-FPC/FFC/PIC;68P,0.5mm,SMD-A,AU	10	SNA
.....7		BN41-02684A	PCB-LED MODULE;Q900A 65INCH,CEM-3,2L,T0.	10	SNA
.....7		BN61-15965A	SUPPORT-PLATE;65QRQ900A,ABS+PMMA,V-2,WT0	60	SNA
.....7		BN61-16059A	OPTICAL SHEET-REFLECTOR;18Y_65INCH_8K_RE	10	SNA
.....7		BN67-00561A	LENS-OPTICAL LED;Q9FB_VE Model,PMMA,CLEA	960	SNA
....5		BN96-47344A	ASSY CHASSIS REAR P;65QNQ90A,EGI-SECC	1	SNA
.....6	SCREW	6001-002756	SCREW-MACHINE;BH,+,M3,L6,ZPC(WHT),SWRCH1	4	SA
.....6	SCREW	6001-003016	SCREW-MACHINE;PWH,+,M3,L5.0,ZPC(WHT),SWR	16	SA
.....6		BN02-00102B	TAPE-SINGLE FACE;OPP,T0.15,W25,L50M,WHIT	2	SNA
.....6		BN02-00352B	TAPE-SINGLE FACE;PET,T0.05,W30,L50M,BLAC	0	SNA
.....6		BN60-00162C	SPACER-FOAM;PE FOAM,L50M,GRAY,T0.5,W15	0	SNA
.....6	CB20	BN61-11982C	BRACKET-WALL;65QNQ7FC,CR-SPCC,BLACK,M8,L	4	SNA
.....6		BN61-13557P	BRACKET-WIRE;75QNQ8CB,SW-C,T1,SILVER,L66	6	SNA
.....6		BN61-13557T	BRACKET-WIRE;65UNU7100X,SW-C,T1,SILVER,L	2	SNA
.....6		BN61-13557X	BRACKET-WIRE;65UNU7100X,SW-C,T1,SILVER,L	2	SNA
.....6	CB18	BN61-15914A	BRACKET-STAND LINK;75QRQ900A,EGI-SECC,T1	4	SNA
.....7		BN61-15975A	STUD-PEM;65NU7100,SUM24L,T0.5,L8,HEAD 7m	8	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.....6	CB18	BN61-15918A	BRACKET-STAND LINK;65QRQ900A,HGI,T2.5,NA	1	SNA
.....7		BN61-02428D	STUD-PEM;HAYDN,SUM24L,T0.5,L8,PRESS,ZPC(	4	SNA
.....6		BN63-17863A	INSULATOR-SOURCE PCB;65QRQ900A,PET,BLACK	1	SNA
.....6		BN63-18142A	INSULATOR-SHEET;65QRQ900A,PET,BLACK,L100	0	SNA
.....6	CC04	BN64-04101A	CHASSIS-REAR;65QRQ900A,EGI-SECC,-,T0.8,N	1	SNA
.....7		BN01-00571A	STEEL;65Q7F,EGI-SECC,L0,0.8mm,880mm,SESK	8	SNA
.....6	T0527	BN68-00513A	LABEL-E PASS;ALL MODEL,WW,YUPO,W50,L15,W	1	SNA
.....6		BN96-47761A	FFC CABLE;Q9S 65,Fold,L300,68P,#1	1	SNA
.....6		BN96-47762A	FFC CABLE;Q9S 65,Fold,L440,68P,#2	1	SNA
.....6		BN96-47763A	FFC CABLE;Q9S 65,Fold,L680,68P,#3	1	SNA
.....6		BN96-47764A	FFC CABLE;Q9S 65,Fold,L510,68P,#4	1	SNA
.....6		BN96-47765A	FFC CABLE;Q9S 65,Fold,L310,68P,#5	1	SNA
.....6		BN96-47766A	FFC CABLE;Q9S 65,Fold,L320,68P,#6	1	SNA
.....6		BN96-47767A	FFC CABLE;Q9S 65,Fold,L510,68P,#7	1	SNA
.....6		BN96-47768A	FFC CABLE;Q9S 65,Fold,L690,68P,#8	1	SNA
.....6		BN96-47769A	FFC CABLE;Q9S 65,Fold,L450,68P,#9	1	SNA
.....6		BN96-47770A	FFC CABLE;Q9S 65,Fold,L310,68P,#10	1	SNA
...4		BN96-47337A	ASSY FRAME P-MIDDLE BOTTOM;65Q9N90A,PC+G	1	SNA
....5		BN60-01606A	SPACER-FOAM;65UNU8000F,PU FOAM,L50M,BLAC	1	SNA
....5		BN61-15922A	FRAME-MIDDLE BOTTOM;65QRQ900A,PC+GF10%,V	1	SNA
.....6		0103-007368	RESIN PC;LS-3104G/K2495,K2495,BK0048,V-2	58	SNA
...4		BN96-47340A	ASSY FRAME P-CHASSIS REAR TOP;65Q9N90A,P	1	SNA
....5		BN60-01459A	SPACER-SILICONE;55PMF,Si,L10,WHITE,T1.8,	2	SNA
....5		BN61-15928A	FRAME-CHASSIS REAR TOP;65QRQ900A,PC+GF10	1	SNA
.....6		0103-011284	RESIN PC;LS-3104G/FW9931,White,WT0134,V-	150	SNA
...3		BN96-46960A	ASSY OPEN CELL;SDC,65Inch,Y18 New Model,	1	SNA
...4		BN81-12945A	A/S-ADHESIVE ACF;ADHESIVE ACF,0201-00237	1	SNA
...4		BN81-16789A	A/S-ADHESIVE-A.C.F;ADHESIVE-A.C.F,0201-0	1	SNA
...4		BN81-16790A	A/S-IC DRIVER SOURCE-ODD;IC DRIVER SOURC	1	SNA
...4		BN81-16791A	A/S-IC DRIVER SOURCE- EVEN;IC DRIVER SOU	1	SNA
...4		BN81-16792A	A/S-POLARIZER TFT;POLARIZER TFT,LJ01-119	1	SNA
...4		BN81-16793A	A/S-POLARIZER CF;POLARIZER CF,S010-14107	1	SNA
...4		BN81-16794A	A/S-ASSY PCB-SOURCE(F-L);ASSY PCB-SOURCE	1	SNA
...4		BN81-16795A	A/S-ASSY PCB-SOURCE(F-R);ASSY PCB-SOURCE	1	SNA
...4		BN81-16796A	A/S-ASSY PCB-SOURCE(B-L);ASSY PCB-SOURCE	1	SNA
...4		BN81-16797A	A/S-ASSY PCB-SOURCE(B-R);ASSY PCB-SOURCE	1	SNA
...3		BN96-47324A	ASSY COVER P-DECORATION;65Q9N90A,STS430J	1	SNA
...4		BN60-01606A	SPACER-FOAM;65UNU8000F,PU FOAM,L50M,BLAC	1	SNA
...4	FD01	BN63-17806A	COVER-DECORATION;65QRQ900A,STS430J1L,T0.	1	SNA
...3		BN96-47326A	ASSY COVER P-SOURCE PCB LEFT;65Q9N90A,EG	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN63-17810A	COVER-SOURCE PCB LEFT;65QRQ900A,EGI-SECC	1	SNA
...4		BN63-17864A	INSULATOR-SOURCE PCB COVER LEFT;65QRQ900	1	SNA
..3		BN96-47333A	ASSY COVER P-SOURCE PCB RIGHT;65QNNQ90A,E	1	SNA
...4		BN63-17811A	COVER-SOURCE PCB RIGHT;65QRQ900A,EGI-SEC	1	SNA
...4		BN63-17865A	INSULATOR-SOURCE PCB COVER RIGHT;65QRQ90	1	SNA
..3		BN96-47348A	ASSY CHASSIS FRONT P;65QNNQ90A,Al,8K	1	SNA
...4		6001-002912	SCREW-MACHINE;CH,+,M3,L3,ZPC(BLK),SWRCH1	2	SA
...4		BN02-00074E	TAPE SINGLE FACE;U7201,PET,T0.05,W10,L20	4	SNA
...4		BN02-00486A	TAPE-DOUBLE FACE;PU FOAM,T0.5,W3.2,L33M,	3	SNA
...4		BN02-00595A	TAPE SINGLE FACE;65QRQ80C,PET,T0.2,W3,L2	3	SNA
...4		BN63-17419D	SHEET-PROTECTION COVER;65QNNQ7FC,PO,T0.04	3	SNA
...4		BN63-17419E	SHEET-PROTECTION COVER;UNU8000F,PO,T0.04	3	SNA
...4	AC155	BN64-04106A	CHASSIS-FRONT;65QRQ900A,Al,-,-,NATURAL,S	1	SNA
...4		BN64-04109A	CHASSIS-FRONT BOTTOM;65QRQ900A,PC+GF10%,	1	SNA
..3		BN96-47863A	FFC CABLE;QN65Q900R,Fold,L952,24P,DCDC-D	1	SA
.2		BN98-00008L	ASSY K/D-PACKING MATERIAL SESK;65Q900,SE	1	SNA
..3		6902-002572	BAG PANEL;LDPE,-,T0.05*,W1600,L1100,TRP,	1	SNA
..3		BN69-06890B	BAND;PP,18000g,T0,8,W16,L1650,BLACK,LCM-	0	SNA
..3		BN69-18461A	CUSHION-PANEL TOP;65QRQ900A,EPS,20g/l,WH	0	SNA
..3		BN69-18462A	CUSHION-PANEL BOTTOM;65QRQ900A,EPS,20g/l	0	SNA
...4		0103-005099	RESIN EPS;BASF303,Natural,Natural	1921	SNA
..3		BN69-18588S	PALLET;Y18 LED TV,WOOD,OSB,W1130,L1580,H	0	SNA