

SECTION 8

REPAIR PARTS LIST

8-1. EXPLODED VIEWS

NOTE:

- -XX, -X mean standardized parts, so they may have some differences from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.


- Color Indication of Appearance Parts
Example:
KNOB, BALANCE (WHITE) . . . (RED)

↑
Parts Color
↑
Cabinet's Color
- Abbreviation
AUS : Australian model

The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety. Replace only with part number specified.


The components identified by mark $\triangle$ contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

8-1-1. OVERALL SECTION

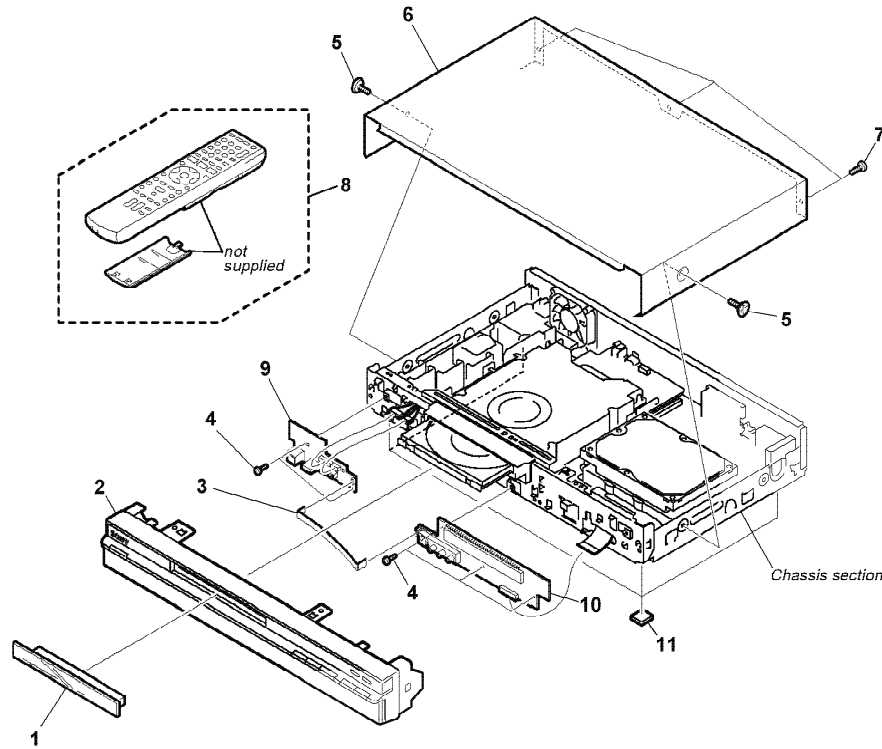

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
1	X-2187-503-1	COVER ASSY (DT), TRAY		2	A-1528-355-A	PANEL BLOCK ASSY, FRONT (BLACK)	
2	A-1526-898-A	PANEL BLOCK ASSY, FRONT (BLACK)	(HXD895)	3	1-834-076-21	CABLE, FLEXIBLE FLAT (FLR-010)	(HXD990: AUS)
2	A-1526-918-A	PANEL BLOCK ASSY, FRONT (SILVER)	(HXD895)	3	1-834-077-21	CABLE, FLEXIBLE FLAT (FLR-012)	(HXD790/HXD890/HXD990/HXD1090)
2	A-1526-934-A	PANEL BLOCK ASSY, FRONT (BLACK)	(HXD890: AEP, UK)	4	3-077-331-01	+BV3 (3-CR)	(HXD795/HXD895/HXD995/HXD1095)
2	A-1526-959-A	PANEL BLOCK ASSY, FRONT (SILVER)	(HXD890: AEP, UK)	5	3-070-883-41	SCREW, TAPPING (SILVER)	
2	A-1527-003-A	PANEL BLOCK ASSY, FRONT (BLACK)	(HXD790)	5	3-070-883-71	SCREW, TAPPING (BLACK)	
2	A-1527-007-A	PANEL BLOCK ASSY, FRONT (SILVER)	(HXD790)	6	2-899-646-01	CASE, UPPER (BLACK) (AEP, UK)	
2	A-1527-023-A	PANEL BLOCK ASSY, FRONT (BLACK)	(HXD795)	6	2-899-646-21	CASE, UPPER (SILVER) (AEP, UK)	
2	A-1527-031-A	PANEL BLOCK ASSY, FRONT (SILVER)	(HXD795)	6	A-1550-899-A	CASE BLOCK ASSY(SERVICE USE) (SILVER)	(AUS)
2	A-1527-063-A	PANEL BLOCK ASSY, FRONT (BLACK)	(HXD995)	6	A-1554-331-A	CASE BLCOK ASSY(SERVICE USE) (BLACK)	(AUS)
2	A-1527-086-A	PANEL BLOCK ASSY, FRONT (BLACK)	(HXD990: AEP, UK)	7	3-076-563-11	SCREW, SPECIAL FRONT POINT	
2	A-1527-109-A	PANEL BLOCK ASSY, FRONT (BLACK)	(HXD1095)	8	1-480-698-11	REMOTE COMMANDER (RMT-D251P)	(AEP, UK)
2	A-1527-121-A	PANEL BLOCK ASSY, FRONT (BLACK)	(HXD1090)	8	1-480-700-11	REMOTE COMMANDER (RMT-D251O)(AUS)	
2	A-1528-248-A	PANEL BLOCK ASSY, FRONT (BLACK)	(HXD890: AUS)	9	A-1520-886-A	FL-184 (AG) COMPL (AEP, UK)	
2	A-1528-249-A	PANEL BLOCK ASSY, FRONT (SILVER)	(HXD890: AUS)	9	A-1543-613-A	FL-184 (AS) COMPL (AUS)	
				10	A-1520-888-A	FR-291 (AG) COMPL (AEP, UK)	
				10	A-1543-615-A	FR-291 (AS) COMPL (AUS)	
				* 11	3-087-319-01	CUSHION, FOOT	

8-1-2. CHASSIS SECTION

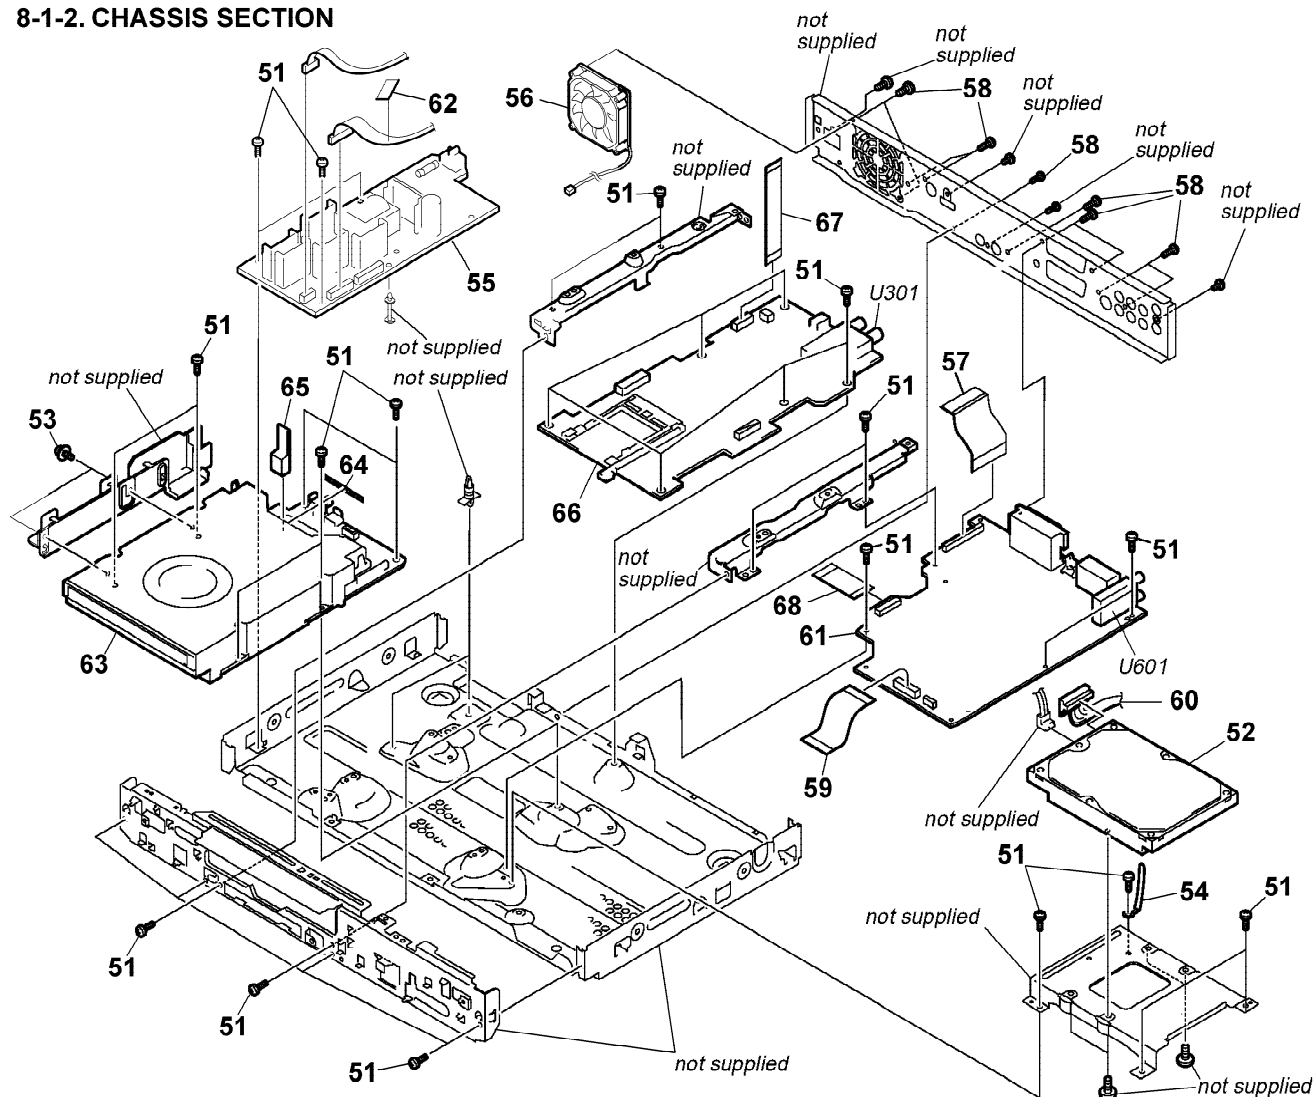

Ref. No.	Part No.	Description	Remarks
51	3-077-331-01	+BV3 (3-CR)	
52	A-1544-210-A	HDD (SG-SUPERHAWK-S (250GB)-GA)	(HXD990: AUS)
52	A-1556-069-A	HDD (SG-NIGHTHAWK-S (160GB)-E) A	(HXD790/HXD795/HXD890: AEP, UK/HXD895)
52	A-1556-070-A	HDD (SG-SUPERHAWK-S (250GB)-E)	(HXD990: AEP, UK/HXD995)
52	A-1556-071-A	HDD (HG-GEMINI-S (500GB)-E) A	(HXD1090/HXD1095)
52	A-1556-072-A	HDD (SG-NIGHTHAWK-S (160GB)-GA)	(HXD890: AUS)
53	7-682-947-01	SCREW +PSW 3X6	
54	4-237-065-01	CLAMP (L35)	
△ 55	1-474-047-11	REGULATOR, SWITCHING (SRV2057EK) (AUS)	
△ 55	1-474-047-42	REGULATOR, SWITCHING (SRV2100EK)	(AEP, UK)
56	1-787-624-11	FAN, DC	
57	1-834-075-21	CABLE, FLEXIBLE FLAT (FRA-006)	
58	3-077-331-31	+BV3 (3-CR)	
* 59	1-835-081-11	CABLE, FLEXIBLE FLAT (FAR-008)	
60	1-965-191-21	HARNESS (RH-059)	

Ref. No.	Part No.	Description	Remarks
61	A-1520-892-A	AV-133 (CG) COMPL (AEP, UK)	
61	A-1550-351-A	AV-133 (AS) COMPL (AUS)	
62	3-087-220-01	TAPE, NON-HALOGENE	
△ 63	A-1543-920-A	DVR-U13HDD ASSY S COMPL (Note)	
64	2-684-970-01	SHIELD TAPE 1 (A)	
65	3-268-333-02	SHIELD, GASKET	
66	A-1520-890-A	DT-124 (AG) COMPL	(HXD790/HXD890: AEP, UK/HXD990: AEP, UK/HXD1090)
66	A-1520-894-A	DT-124 (BG) COMPL	(HXD795/HXD895/HXD995/HXD1095)
66	A-1550-357-A	DT-124 (AS) COMPL (AUS)	
* 67	1-834-168-21	CABLE, FLEXIBLE FLAT (FVR-001)	
* 68	1-835-082-11	CABLE, FLEXIBLE FLAT (FAD-010)	
△ U301	1-693-772-11	TUNER (TDQD5) (AEP, UK)	
△ U301	1-693-772-21	TUNER (TDQD5) (AUS)	
△ U601	1-693-741-11	TUNER (TMFE2-407A) (AUS)	
△ U601	1-693-753-21	TUNER (TMFE2-408B) (AEP, UK)	

Note: When exchanging Traverse Mechanism in Ref No.63, please refer to the SERVICE MANUAL of "RW6G/7G TRAVERSE MECHANISM REPAIR MANUAL"

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

The components identified by mark △ contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

8-2. ELECTRICAL PARTS LIST

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX, -X mean standardized parts, so they may have some difference from the original one.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- CAPACITORS:
uF: μ F
COILS
uH: μ H
- RESISTORS
All resistors are in ohms.
METAL: metal-film resistor
METAL OXIDE: Metal Oxide-film resistor
F: nonflammable
- SEMICONDUCTORS
In each case, u: μ , for example:
uA..., μ A..., uPA..., μ PA...,
uPB..., μ PB..., uPC..., μ PC...,
uPD..., μ PD...
- Abbreviation
AUS : Australian model

When indicating parts by reference number, please include the board name.

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
	A-1520-892-A	AV-133 (CG) BOARD, COMPLETE (AEP, UK)		C302	1-164-156-11	CERAMIC CHIP 0.1uF	25V
	A-1550-351-A	AV-133 (AS) BOARD, COMPLETE (AUS)		C303	1-126-933-11	ELECT 100uF	20% 16V
		(REF. NO.; 10,000 SERIES)		C305	1-164-156-11	CERAMIC CHIP 0.1uF	25V
		*****		C306	1-164-156-11	CERAMIC CHIP 0.1uF	25V
		< CAPACITOR >		C307	1-126-933-11	ELECT 100uF	20% 16V
C104	1-104-662-91	ELECT 22uF	20% 25V	C308	1-126-933-11	ELECT 100uF	20% 16V
C105	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C309	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C106	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C310	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C107	1-162-959-11	CERAMIC CHIP 330PF	5% 50V	C311	1-126-934-11	ELECT 220uF	20% 16V
C109	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C312	1-126-933-11	ELECT 100uF	20% 16V
C110	1-165-908-11	CERAMIC CHIP 1uF	10% 10V	C314	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C111	1-162-913-11	CERAMIC CHIP 8PF	0.5PF 50V	C315	1-126-933-11	ELECT 100uF	20% 16V
C112	1-162-914-11	CERAMIC CHIP 9PF	0.5PF 50V	C316	1-126-933-11	ELECT 100uF	20% 16V
C113	1-115-156-11	CERAMIC CHIP 1uF	10V	C318	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C114	1-162-915-11	CERAMIC CHIP 10PF	0.5PF 50V	C319	1-126-933-11	ELECT 100uF	20% 16V
C115	1-162-915-11	CERAMIC CHIP 10PF	0.5PF 50V	C320	1-126-933-11	ELECT 100uF	20% 16V
C118	1-115-456-21	DOUBLE LAYER 0.22F	5.5V	C322	1-162-927-11	CERAMIC CHIP 100PF	5% 50V
C120	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C323	1-100-162-91	CERAMIC CHIP 1uF	50V
C121	1-115-156-11	CERAMIC CHIP 1uF	10V	C324	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C122	1-115-156-11	CERAMIC CHIP 1uF	10V	C326	1-126-964-11	ELECT 10uF	20% 50V
C124	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C328	1-165-621-91	CERAMIC CHIP 0.1uF	50V
C125	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C329	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C126	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C401	1-115-156-11	CERAMIC CHIP 1uF	10V
C127	1-126-933-11	ELECT 100uF	20% 16V	C402	1-162-927-11	CERAMIC CHIP 100PF	5% 50V
C131	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C403	1-162-927-11	CERAMIC CHIP 100PF	5% 50V
C132	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C404	1-115-156-11	CERAMIC CHIP 1uF	10V
C133	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C406	1-107-826-11	CERAMIC CHIP 0.1uF	10% 16V
C134	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C407	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C135	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C408	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C138	1-126-961-11	ELECT 2.2uF	20% 50V	C409	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C139	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C410	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C140	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C411	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C141	1-115-156-11	CERAMIC CHIP 1uF	10V	C412	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C142	1-100-831-91	CERAMIC CHIP 0.001uF	2% 50V	C413	1-107-826-11	CERAMIC CHIP 0.1uF	10% 16V
C149	1-162-915-11	CERAMIC CHIP 10PF	0.5PF 50V	C414	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C150	1-115-156-11	CERAMIC CHIP 1uF	10V	C415	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C152	1-115-156-11	CERAMIC CHIP 1uF	10V	C418	1-115-156-11	CERAMIC CHIP 1uF	10V
C156	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C419	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C157	1-107-826-11	CERAMIC CHIP 0.1uF	10% 16V	C420	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
G202	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C421	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
G204	1-126-933-11	ELECT 100uF	20% 16V	C422	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
G205	1-104-662-91	ELECT 22uF	20% 25V	C423	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
G206	1-164-315-11	CERAMIC CHIP 470PF	5% 50V	C424	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
G208	1-107-826-11	CERAMIC CHIP 0.1uF	10% 16V	C428	1-107-826-11	CERAMIC CHIP 0.1uF	10% 16V
C301	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C429	1-165-908-11	CERAMIC CHIP 1uF	10% 10V

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
C430	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C518	1-100-831-91	CERAMIC CHIP	0.001uF	2%	50V
C431	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C519	1-164-315-11	CERAMIC CHIP	470PF	5%	50V
C432	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	C520	1-100-831-91	CERAMIC CHIP	0.001uF	2%	50V
C434	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C528	1-104-655-91	ELECT	470uF	20%	6.3V
C435	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	C529	1-104-655-91	ELECT	470uF	20%	6.3V
C436	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	C530	1-104-655-91	ELECT	470uF	20%	6.3V
C437	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	C531	1-104-655-91	ELECT	470uF	20%	6.3V
C438	1-115-156-11	CERAMIC CHIP	1uF		10V	C532	1-104-655-91	ELECT	470uF	20%	6.3V
C439	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C541	1-126-963-11	ELECT	4.7uF	20%	50V
C440	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C542	1-126-963-11	ELECT	4.7uF	20%	50V
C441	1-115-156-11	CERAMIC CHIP	1uF		10V	C543	1-126-963-11	ELECT	4.7uF	20%	50V
C442	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C544	1-126-963-11	ELECT	4.7uF	20%	50V
C443	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	C545	1-126-933-11	ELECT	100uF	20%	16V
C444	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	C547	1-104-662-91	ELECT	22uF	20%	25V
C445	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	C550	1-104-662-91	ELECT	22uF	20%	25V
C446	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	C551	1-104-662-91	ELECT	22uF	20%	25V
C447	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V	C552	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C450	1-107-713-11	ELECT	4.7uF	20%	50V	C602	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C451	1-107-713-11	ELECT	4.7uF	20%	50V	C603	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C452	1-104-658-91	ELECT	100uF	20%	10V	C604	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C453	1-104-658-91	ELECT	100uF	20%	10V	C605	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V
C454	1-104-658-91	ELECT	100uF	20%	10V	C606	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V
C455	1-126-963-11	ELECT	4.7uF	20%	50V	C608	1-125-891-11	CERAMIC CHIP	0.47uF	10%	10V
C456	1-126-960-11	ELECT	1uF	20%	50V	C609	1-104-658-91	ELECT	100uF	20%	10V
C457	1-126-964-11	ELECT	10uF	20%	50V	C611	1-126-947-11	ELECT	47uF	20%	35V
C458	1-104-658-91	ELECT	100uF	20%	10V	C613	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C463	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C614	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C464	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C615	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C468	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C616	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V
C469	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C617	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C471	1-126-964-11	ELECT	10uF	20%	50V	C618	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C472	1-126-964-11	ELECT	10uF	20%	50V	C619	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C473	1-126-933-11	ELECT	100uF	20%	16V	C620	1-115-156-11	CERAMIC CHIP	1uF		10V
C474	1-126-964-11	ELECT	10uF	20%	50V	C621	1-162-924-11	CERAMIC CHIP	56PF	5%	50V
C475	1-126-964-11	ELECT	10uF	20%	50V	C622	1-162-924-11	CERAMIC CHIP	56PF	5%	50V
C476	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V	C623	1-162-908-11	CERAMIC CHIP	3PF	0.25PF	50V
C481	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C624	1-162-908-11	CERAMIC CHIP	3PF	0.25PF	50V
C482	1-164-315-11	CERAMIC CHIP	470PF	5%	50V	C625	1-115-156-11	CERAMIC CHIP	1uF		10V
C484	1-164-315-11	CERAMIC CHIP	470PF	5%	50V	C626	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C486	1-104-655-91	ELECT	470uF	20%	6.3V	C627	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C487	1-104-655-91	ELECT	470uF	20%	6.3V	C628	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V
C488	1-104-655-91	ELECT	470uF	20%	6.3V	C629	1-164-173-11	CERAMIC CHIP	0.0039uF	10%	50V
C489	1-104-655-91	ELECT	470uF	20%	6.3V	C630	1-164-739-11	CERAMIC CHIP	560PF	5%	50V
C490	1-104-655-91	ELECT	470uF	20%	6.3V	C631	1-107-726-91	CERAMIC CHIP	0.01uF	10%	16V
C491	1-126-947-11	ELECT	47uF	20%	35V	C632	1-164-173-11	CERAMIC CHIP	0.0039uF	10%	50V
C492	1-126-923-91	ELECT	220uF	20%	10V	C633	1-164-739-11	CERAMIC CHIP	560PF	5%	50V
C493	1-126-947-11	ELECT	47uF	20%	35V	C635	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C496	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C636	1-162-919-11	CERAMIC CHIP	22PF	5%	50V
C497	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C638	1-126-964-11	ELECT	10uF	20%	50V
C498	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C639	1-126-962-11	ELECT	3.3uF	20%	50V
C503	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C640	1-104-658-91	ELECT	100uF	20%	10V
C505	1-100-831-91	CERAMIC CHIP	0.001uF	2%	50V	C641	1-126-964-11	ELECT	10uF	20%	50V
C506	1-164-315-11	CERAMIC CHIP	470PF	5%	50V	C642	1-104-658-91	ELECT	100uF	20%	10V
C507	1-100-831-91	CERAMIC CHIP	0.001uF	2%	50V	C643	1-104-658-91	ELECT	100uF	20%	10V
C508	1-164-315-11	CERAMIC CHIP	470PF	5%	50V	C751	1-164-156-11	CERAMIC CHIP	0.1uF		25V (AEP, UK)
C510	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C752	1-162-927-11	CERAMIC CHIP	100PF	5%	50V (AEP, UK)
C511	1-164-230-11	CERAMIC CHIP	220PF	5%	50V	C753	1-162-927-11	CERAMIC CHIP	100PF	5%	50V (AEP, UK)
C515	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C754	1-162-927-11	CERAMIC CHIP	100PF	5%	50V (AEP, UK)
C516	1-164-315-11	CERAMIC CHIP	470PF	5%	50V						
C517	1-164-230-11	CERAMIC CHIP	220PF	5%	50V						

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
< DIODE >				< IC >			
D101	8-719-081-97	DIODE MMDL914T1		* IC102	6-711-071-01	IC BD4846G-TR	
D102	8-719-081-97	DIODE MMDL914T1		* IC103	6-711-072-01	IC BU4220G-TR	
D103	8-719-081-97	DIODE MMDL914T1		* IC104	6-711-188-01	IC TC7MB3257FK (EL)	
D104	8-719-053-18	DIODE 1SR154-400TE-25		* IC401	6-711-073-01	IC HA118326APFR-E	
D106	8-719-081-97	DIODE MMDL914T1		IC402	8-759-909-71	IC BA4558F	
D108	8-719-941-09	DIODE DAP202U		IC406	8-759-082-60	IC TC7S66FU	
D201	8-719-081-97	DIODE MMDL914T1		IC601	6-702-714-01	IC MSP3417G-QG-B8V3	
D301	8-719-083-83	DIODE UDZSNPTE-1715B		< JACK >			
D302	6-500-028-01	DIODE MM3Z9V1ST1		JA401	1-794-198-11	CONNECTOR, S TERMINAL (LINE2 OUT)	
D303	8-719-081-97	DIODE MMDL914T1		JA751	1-764-188-31	JACK (SMALL TYPE) (DIA. 3.5) (G-LINK)	(AEP, UK)
D304	8-719-081-97	DIODE MMDL914T1		< TERMINAL >			
D409	8-719-081-42	DIODE UMZ6.8N-T106		KN101	1-537-771-21	TERMINAL BOARD, GROUND	
D410	8-719-081-42	DIODE UMZ6.8N-T106		KN102	1-537-771-21	TERMINAL BOARD, GROUND	
D413	8-719-081-42	DIODE UMZ6.8N-T106		< COIL >			
D414	8-719-081-42	DIODE UMZ6.8N-T106		L102	1-410-517-11	INDUCTOR 47uH	
D415	8-719-081-42	DIODE UMZ6.8N-T106		L201	1-412-549-31	INDUCTOR 1mH	
D416	8-719-081-42	DIODE UMZ6.8N-T106		L303	1-500-245-11	INDUCTOR, FERRITE BEAD	
D418	8-719-081-97	DIODE MMDL914T1		L304	1-408-621-31	INDUCTOR 330uH	
D419	8-719-081-97	DIODE MMDL914T1		L305	1-500-245-11	INDUCTOR, FERRITE BEAD	
D420	8-719-941-09	DIODE DAP202U		L501	1-414-594-11	INDUCTOR, FERRITE BEAD	
D421	6-501-486-01	DIODE NNCD3.9F-T1B		L502	1-414-594-11	INDUCTOR, FERRITE BEAD	
D422	6-501-486-01	DIODE NNCD3.9F-T1B		L601	1-500-245-11	INDUCTOR, FERRITE BEAD	
D501	8-719-976-99	DIODE DTZ5.1B		L602	1-500-245-11	INDUCTOR, FERRITE BEAD	
D502	8-719-976-99	DIODE DTZ5.1B		L604	1-414-760-21	INDUCTOR, FERRITE BEAD	
D503	6-501-486-01	DIODE NNCD3.9F-T1B		L605	1-414-760-21	INDUCTOR, FERRITE BEAD	
D504	8-719-081-42	DIODE UMZ6.8N-T106		L606	1-500-245-11	INDUCTOR, FERRITE BEAD	
D505	8-719-081-42	DIODE UMZ6.8N-T106		L607	1-412-963-11	INDUCTOR 100uH	
D506	8-719-081-42	DIODE UMZ6.8N-T106		L608	1-500-245-11	INDUCTOR, FERRITE BEAD	
D507	8-719-081-42	DIODE UMZ6.8N-T106		L609	1-412-951-11	INDUCTOR 10uH	
D508	6-501-486-01	DIODE NNCD3.9F-T1B		L751	1-414-760-21	INDUCTOR, FERRITE BEAD (AEP, UK)	
D509	8-719-081-42	DIODE UMZ6.8N-T106		L801	1-414-228-11	INDUCTOR, FERRITE BEAD	
D510	6-501-486-01	DIODE NNCD3.9F-T1B		L802	1-414-228-11	INDUCTOR, FERRITE BEAD	
D511	8-719-081-42	DIODE UMZ6.8N-T106		L803	1-216-864-11	SHORT CHIP 0	
D512	6-501-486-01	DIODE NNCD3.9F-T1B		L851	1-414-228-11	INDUCTOR, FERRITE BEAD	
D513	8-719-081-42	DIODE UMZ6.8N-T106		L852	1-414-228-11	INDUCTOR, FERRITE BEAD	
D514	8-719-081-42	DIODE UMZ6.8N-T106		L853	1-414-228-11	INDUCTOR, FERRITE BEAD	
D515	8-719-081-42	DIODE UMZ6.8N-T106		L854	1-414-228-11	INDUCTOR, FERRITE BEAD	
D516	8-719-081-42	DIODE UMZ6.8N-T106		L855	1-500-283-11	INDUCTOR, FERRITE BEAD	
D517	8-719-081-42	DIODE UMZ6.8N-T106		L856	1-414-228-11	INDUCTOR, FERRITE BEAD	
D518	8-719-081-42	DIODE UMZ6.8N-T106		L857	1-414-228-11	INDUCTOR, FERRITE BEAD	
D519	8-719-081-42	DIODE UMZ6.8N-T106		L858	1-414-228-11	INDUCTOR, FERRITE BEAD	
D520	8-719-081-42	DIODE UMZ6.8N-T106		L859	1-414-228-11	INDUCTOR, FERRITE BEAD	
D521	8-719-081-42	DIODE UMZ6.8N-T106		L860	1-500-283-11	INDUCTOR, FERRITE BEAD	
D522	8-719-081-42	DIODE UMZ6.8N-T106		L861	1-469-876-11	INDUCTOR, FERRITE BEAD	
D523	6-500-319-01	DIODE BAV99WT1		L862	1-469-796-21	FERRITE, CHIP	
D524	6-500-319-01	DIODE BAV99WT1		< TRANSISTOR >			
D526	8-719-081-97	DIODE MMDL914T1		Q101	8-729-029-06	TRANSISTOR DTC124EUA-T106	
D527	8-719-081-97	DIODE MMDL914T1		Q102	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
D528	8-719-081-97	DIODE MMDL914T1		Q103	6-550-375-01	TRANSISTOR UMD2N-TR	
D529	8-719-083-63	DIODE UDZSNPTE-1713B		Q104	6-550-375-01	TRANSISTOR UMD2N-TR	
D530	8-719-083-63	DIODE UDZSNPTE-1713B		Q105	8-729-023-22	TRANSISTOR 2SD2114K	
D531	8-719-081-42	DIODE UMZ6.8N-T106		< FUSE >			
D801	8-719-081-42	DIODE UMZ6.8N-T106		△IC150	1-576-796-11	FUSE 0.5A 32V	
				△IC317	1-576-796-11	FUSE 0.5A 32V	

Note : The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
Q108	8-729-029-06	TRANSISTOR	DTC124EUA-T106	R112	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q110	8-729-028-86	TRANSISTOR	DTA143EUA-T106 (AEP, UK)	R113	1-216-864-11	SHORT CHIP	0
Q111	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R116	1-216-864-11	SHORT CHIP	0
Q112	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R117	1-216-857-11	METAL CHIP	1M 5% 1/10W
Q201	8-729-023-22	TRANSISTOR	2SD2114K	R118	1-216-864-11	SHORT CHIP	0
Q301	6-550-375-01	TRANSISTOR	UMD2N-TR	R123	1-216-815-11	METAL CHIP	330 5% 1/10W
Q302	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R124	1-216-815-11	METAL CHIP	330 5% 1/10W
Q303	6-550-375-01	TRANSISTOR	UMD2N-TR	R125	1-216-809-11	METAL CHIP	100 5% 1/10W
Q304	8-729-044-09	TRANSISTOR	2SD2153T100V	R126	1-216-809-11	METAL CHIP	100 5% 1/10W
Q305	6-550-375-01	TRANSISTOR	UMD2N-TR	R127	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q306	8-729-901-91	TRANSISTOR	2SC2411K-T-146-CQ	R129	1-216-815-11	METAL CHIP	330 5% 1/10W
Q307	6-550-375-01	TRANSISTOR	UMD2N-TR	R130	1-216-864-11	SHORT CHIP	0
Q308	8-729-901-91	TRANSISTOR	2SC2411K-T-146-CQ	R131	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
* Q309	6-551-719-01	TRANSISTOR	2SC5876T106QR	R132	1-216-867-11	METAL CHIP	6.8K 0.5% 1/10W
Q310	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R133	1-216-845-11	METAL CHIP	100K 5% 1/10W
Q311	8-729-427-70	TRANSISTOR	XP4401	R134	1-216-821-11	METAL CHIP	1K 5% 1/10W
Q401	8-729-029-06	TRANSISTOR	DTC124EUA-T106	R135	1-216-845-11	METAL CHIP	100K 5% 1/10W
Q402	8-729-023-22	TRANSISTOR	2SD2114K	R137	1-216-809-11	METAL CHIP	100 5% 1/10W
Q403	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R138	1-216-817-11	METAL CHIP	470 5% 1/10W
Q404	6-550-375-01	TRANSISTOR	UMD2N-TR	R139	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W
Q406	8-729-023-22	TRANSISTOR	2SD2114K	R140	1-216-864-11	SHORT CHIP	0
Q407	8-729-023-22	TRANSISTOR	2SD2114K	R141	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W
Q408	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R142	1-216-864-11	SHORT CHIP	0
Q410	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R143	1-216-809-11	METAL CHIP	100 5% 1/10W
Q411	6-550-375-01	TRANSISTOR	UMD2N-TR	R144	1-216-864-11	SHORT CHIP	0
Q413	8-729-029-06	TRANSISTOR	DTC124EUA-T106	R145	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q501	6-551-718-01	TRANSISTOR	UMH1NTN	R146	1-216-809-11	METAL CHIP	100 5% 1/10W
Q502	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R147	1-216-821-11	METAL CHIP	1K 5% 1/10W
Q503	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R148	1-216-809-11	METAL CHIP	100 5% 1/10W
Q504	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R149	1-216-864-11	SHORT CHIP	0
Q505	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R150	1-216-864-11	SHORT CHIP	0
Q506	8-729-013-26	TRANSISTOR	HN1C03FU-TE85R	R151	1-216-864-11	SHORT CHIP	0
Q507	8-729-013-26	TRANSISTOR	HN1C03FU-TE85R	R152	1-216-864-11	SHORT CHIP	0
Q508	8-729-028-83	TRANSISTOR	DTA124EUA-T106	R153	1-216-809-11	METAL CHIP	100 5% 1/10W
Q509	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R154	1-216-809-11	METAL CHIP	100 5% 1/10W
Q510	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R155	1-216-809-11	METAL CHIP	100 5% 1/10W
Q511	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R156	1-216-809-11	METAL CHIP	100 5% 1/10W
Q601	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R157	1-216-845-11	METAL CHIP	100K 5% 1/10W
Q602	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R158	1-216-845-11	METAL CHIP	100K 5% 1/10W
Q604	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R159	1-216-864-11	SHORT CHIP	0
Q605	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R160	1-216-809-11	METAL CHIP	100 5% 1/10W
Q606	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R161	1-216-864-11	SHORT CHIP	0
Q751	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF (AEP, UK)	R165	1-216-864-11	SHORT CHIP	0
Q752	8-729-620-13	TRANSISTOR	2SC4154TP-1EF (AEP, UK)	R167	1-216-809-11	METAL CHIP	100 5% 1/10W
Q801	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R168	1-216-812-11	METAL CHIP	180 5% 1/10W
< RESISTOR >				R169	1-216-833-11	METAL CHIP	10K 5% 1/10W
R101	1-216-809-11	METAL CHIP	100 5% 1/10W	R171	1-216-809-11	METAL CHIP	100 5% 1/10W
R102	1-216-809-11	METAL CHIP	100 5% 1/10W	R172	1-216-809-11	METAL CHIP	100 5% 1/10W
R103	1-216-809-11	METAL CHIP	100 5% 1/10W	R173	1-216-845-11	METAL CHIP	100K 5% 1/10W
R104	1-216-841-11	METAL CHIP	47K 5% 1/10W	R174	1-216-845-11	METAL CHIP	100K 5% 1/10W
R105	1-216-809-11	METAL CHIP	100 5% 1/10W	R175	1-216-815-11	METAL CHIP	330 5% 1/10W
R106	1-216-864-11	SHORT CHIP	0	R176	1-216-821-11	METAL CHIP	1K 5% 1/10W
R107	1-216-833-11	METAL CHIP	10K 5% 1/10W	R177	1-216-809-11	METAL CHIP	100 5% 1/10W
R109	1-216-815-11	METAL CHIP	330 5% 1/10W	R178	1-216-809-11	METAL CHIP	100 5% 1/10W
R110	1-216-809-11	METAL CHIP	100 5% 1/10W	R179	1-216-809-11	METAL CHIP	100 5% 1/10W
R111	1-216-809-11	METAL CHIP	100 5% 1/10W	R180	1-216-809-11	METAL CHIP	100 5% 1/10W
				R181	1-216-809-11	METAL CHIP	100 5% 1/10W
				R182	1-216-809-11	METAL CHIP	100 5% 1/10W
				R188	1-216-815-11	METAL CHIP	330 5% 1/10W
				R189	1-216-817-11	METAL CHIP	470 5% 1/10W

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
R193	1-216-845-11	METAL CHIP	100K	5%	1/10W	R431	1-216-857-11	METAL CHIP	1M	5%	1/10W
R194	1-216-845-11	METAL CHIP	100K	5%	1/10W	R432	1-216-857-11	METAL CHIP	1M	5%	1/10W
R195	1-216-845-11	METAL CHIP	100K	5%	1/10W	R433	1-216-857-11	METAL CHIP	1M	5%	1/10W
R197	1-216-864-11	SHORT CHIP	0			R435	1-216-857-11	METAL CHIP	1M	5%	1/10W
R199	1-216-809-11	METAL CHIP	100	5%	1/10W	R436	1-216-809-11	METAL CHIP	100	5%	1/10W
R200	1-216-815-11	METAL CHIP	330	5%	1/10W	R437	1-216-809-11	METAL CHIP	100	5%	1/10W
R201	1-216-864-11	SHORT CHIP	0 (AEP, UK)			R439	1-216-860-11	METAL CHIP	1.8M	5%	1/10W
R202	1-216-864-11	SHORT CHIP	0			R444	1-208-755-11	METAL CHIP	75	0.5%	1/10W
R203	1-216-864-11	SHORT CHIP	0			R445	1-208-755-11	METAL CHIP	75	0.5%	1/10W
R204	1-216-809-11	METAL CHIP	100	5%	1/10W	R447	1-208-755-11	METAL CHIP	75	0.5%	1/10W
R205	1-216-809-11	METAL CHIP	100	5%	1/10W	R453	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W
R207	1-216-817-11	METAL CHIP	470	5%	1/10W	R454	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R208	1-216-864-11	SHORT CHIP	0 (AEP, UK)			R455	1-216-805-11	METAL CHIP	47	5%	1/10W
R209	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R458	1-216-817-11	METAL CHIP	470	5%	1/10W
R210	1-218-845-11	METAL CHIP	820	0.5%	1/10W	R460	1-216-864-11	SHORT CHIP	0		
R214	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R461	1-216-819-11	METAL CHIP	680	5%	1/10W
R215	1-216-819-11	METAL CHIP	680	5%	1/10W	R462	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R216	1-218-844-11	METAL CHIP	750	0.5%	1/10W	R463	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W
R217	1-216-821-11	METAL CHIP	1K	5%	1/10W	R465	1-216-817-11	METAL CHIP	470	5%	1/10W
R219	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R468	1-208-754-11	METAL CHIP	68	0.5%	1/10W
R220	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R469	1-216-306-11	RES-CHIP	3.9	5%	1/10W
R221	1-216-809-11	METAL CHIP	100	5%	1/10W	R470	1-208-755-11	METAL CHIP	75	0.5%	1/10W
R222	1-216-864-11	SHORT CHIP	0			R471	1-216-295-91	SHORT CHIP	0		
R223	1-216-864-11	SHORT CHIP	0			R472	1-208-754-11	METAL CHIP	68	0.5%	1/10W
R224	1-216-864-11	SHORT CHIP	0			R473	1-216-306-11	RES-CHIP	3.9	5%	1/10W
R225	1-216-835-11	METAL CHIP	15K	5%	1/10W	R474	1-208-754-11	METAL CHIP	68	0.5%	1/10W
R228	1-216-864-11	SHORT CHIP	0			R475	1-216-306-11	RES-CHIP	3.9	5%	1/10W
R233	1-216-845-11	METAL CHIP	100K	5%	1/10W	R476	1-208-754-11	METAL CHIP	68	0.5%	1/10W
R240	1-216-864-11	SHORT CHIP	0			R477	1-216-306-11	RES-CHIP	3.9	5%	1/10W
R241	1-216-864-11	SHORT CHIP	0			R478	1-208-754-11	METAL CHIP	68	0.5%	1/10W
R242	1-216-864-11	SHORT CHIP	0			R479	1-216-817-11	METAL CHIP	470	5%	1/10W
R255	1-216-809-11	METAL CHIP	100	5%	1/10W	R480	1-216-306-11	RES-CHIP	3.9	5%	1/10W
R256	1-216-809-11	METAL CHIP	100	5%	1/10W	R482	1-216-809-11	METAL CHIP	100	5%	1/10W
R304	1-216-809-11	METAL CHIP	100	5%	1/10W	R484	1-216-821-11	METAL CHIP	1K	5%	1/10W
R305	1-216-803-11	METAL CHIP	33	5%	1/10W	R485	1-216-837-11	METAL CHIP	22K	5%	1/10W
R306	1-216-803-11	METAL CHIP	33	5%	1/10W	R486	1-216-821-11	METAL CHIP	1K	5%	1/10W
R309	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R487	1-216-837-11	METAL CHIP	22K	5%	1/10W
R310	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R488	1-216-817-11	METAL CHIP	470	5%	1/10W
R311	1-216-820-11	METAL CHIP	820	5%	1/10W	R490	1-216-809-11	METAL CHIP	100	5%	1/10W
R312	1-216-833-11	METAL CHIP	10K	5%	1/10W	R501	1-208-755-11	METAL CHIP	75	0.5%	1/10W
R313	1-216-848-11	METAL CHIP	180K	5%	1/10W	R502	1-208-755-11	METAL CHIP	75	0.5%	1/10W
R314	1-216-837-11	METAL CHIP	22K	5%	1/10W	R503	1-208-755-11	METAL CHIP	75	0.5%	1/10W
R315	1-218-895-11	METAL CHIP	100K	0.5%	1/10W	R504	1-208-754-11	METAL CHIP	68	0.5%	1/10W
R316	1-218-879-11	METAL CHIP	22K	0.5%	1/10W						(AEP, UK)
R402	1-216-818-11	METAL CHIP	560	5%	1/10W	R504	1-216-295-91	SHORT CHIP	0 (AUS)		
R403	1-216-818-11	METAL CHIP	560	5%	1/10W	R505	1-208-755-11	METAL CHIP	75	0.5%	1/10W
R408	1-216-817-11	METAL CHIP	470	5%	1/10W						(AUS)
R413	1-216-817-11	METAL CHIP	470	5%	1/10W	R505	1-216-306-11	RES-CHIP	3.9	5%	1/10W
R414	1-216-817-11	METAL CHIP	470	5%	1/10W						(AEP, UK)
R415	1-216-817-11	METAL CHIP	470	5%	1/10W	R506	1-216-864-11	SHORT CHIP	0		
R416	1-216-817-11	METAL CHIP	470	5%	1/10W	R507	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R417	1-216-817-11	METAL CHIP	470	5%	1/10W	R508	1-216-841-11	METAL CHIP	47K	5%	1/10W
R418	1-216-817-11	METAL CHIP	470	5%	1/10W	R509	1-216-838-11	METAL CHIP	27K	5%	1/10W
R419	1-216-817-11	METAL CHIP	470	5%	1/10W	R510	1-216-861-11	METAL CHIP	2.2M	5%	1/10W
R420	1-216-860-11	METAL CHIP	1.8M	5%	1/10W	R511	1-216-849-11	METAL CHIP	220K	5%	1/10W
R421	1-216-860-11	METAL CHIP	1.8M	5%	1/10W	R512	1-216-845-11	METAL CHIP	100K	5%	1/10W
R422	1-216-833-11	METAL CHIP	10K	5%	1/10W	R513	1-216-845-11	METAL CHIP	100K	5%	1/10W
R425	1-216-845-11	METAL CHIP	100K	5%	1/10W	R514	1-208-755-11	METAL CHIP	75	0.5%	1/10W
R428	1-216-864-11	SHORT CHIP	0								
R430	1-216-857-11	METAL CHIP	1M	5%	1/10W						

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
R515	1-216-043-91	RES-CHIP	560 5% 1/10W	R602	1-216-821-11	METAL CHIP	1K 5% 1/10W
R516	1-216-822-11	METAL CHIP	1.2K 5% 1/10W	R603	1-216-864-11	SHORT CHIP	0
R517	1-216-823-11	METAL CHIP	1.5K 5% 1/10W	R605	1-216-833-11	METAL CHIP	10K 5% 1/10W
R518	1-216-797-11	METAL CHIP	10 5% 1/10W	R606	1-216-833-11	METAL CHIP	10K 5% 1/10W
R519	1-216-842-11	METAL CHIP	56K 5% 1/10W	R607	1-216-821-11	METAL CHIP	1K 5% 1/10W
R520	1-216-813-11	METAL CHIP	220 5% 1/10W	R609	1-216-864-11	SHORT CHIP	0
R521	1-208-754-11	METAL CHIP	68 0.5% 1/10W	R616	1-216-864-11	SHORT CHIP	0
R522	1-216-306-11	RES-CHIP	3.9 5% 1/10W	R619	1-216-833-11	METAL CHIP	10K 5% 1/10W
R523	1-208-754-11	METAL CHIP	68 0.5% 1/10W	R620	1-216-864-11	SHORT CHIP	0
R524	1-216-306-11	RES-CHIP	3.9 5% 1/10W	R621	1-216-809-11	METAL CHIP	100 5% 1/10W
R525	1-208-754-11	METAL CHIP	68 0.5% 1/10W	R622	1-216-809-11	METAL CHIP	100 5% 1/10W
R526	1-216-306-11	RES-CHIP	3.9 5% 1/10W	R623	1-216-821-11	METAL CHIP	1K 5% 1/10W
R527	1-216-295-91	SHORT CHIP	0	R624	1-216-827-11	METAL CHIP	3.3K 5% 1/10W
R528	1-208-755-11	METAL CHIP	75 0.5% 1/10W	R625	1-216-827-11	METAL CHIP	3.3K 5% 1/10W
R529	1-216-845-11	METAL CHIP	100K 5% 1/10W	R626	1-216-821-11	METAL CHIP	1K 5% 1/10W
R530	1-208-755-11	METAL CHIP	75 0.5% 1/10W	R627	1-216-827-11	METAL CHIP	3.3K 5% 1/10W
R531	1-216-295-91	SHORT CHIP	0	R628	1-216-827-11	METAL CHIP	3.3K 5% 1/10W
R532	1-208-755-11	METAL CHIP	75 0.5% 1/10W	R630	1-216-815-11	METAL CHIP	330 5% 1/10W
R534	1-216-828-11	METAL CHIP	3.9K 5% 1/10W	R631	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R535	1-216-828-11	METAL CHIP	3.9K 5% 1/10W	R632	1-216-801-11	METAL CHIP	22 5% 1/10W
R536	1-216-817-11	METAL CHIP	470 5% 1/10W	R633	1-216-809-11	METAL CHIP	100 5% 1/10W
R537	1-216-809-11	METAL CHIP	100 5% 1/10W	R634	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R538	1-216-817-11	METAL CHIP	470 5% 1/10W	R635	1-400-330-21	INDUCTOR, FERRITE BEAD (1608)	
R539	1-216-809-11	METAL CHIP	100 5% 1/10W	R636	1-400-330-21	INDUCTOR, FERRITE BEAD (1608)	
R540	1-216-845-11	METAL CHIP	100K 5% 1/10W	R637	1-400-330-21	INDUCTOR, FERRITE BEAD (1608)	
R541	1-216-845-11	METAL CHIP	100K 5% 1/10W	R638	1-216-809-11	METAL CHIP	100 5% 1/10W
R542	1-216-809-11	METAL CHIP	100 5% 1/10W	R701	1-216-849-11	METAL CHIP	220K 5% 1/10W
R543	1-216-809-11	METAL CHIP	100 5% 1/10W	R751	1-216-821-11	METAL CHIP	1K 5% 1/10W
R544	1-216-809-11	METAL CHIP	100 5% 1/10W				(AEP, UK)
R545	1-216-809-11	METAL CHIP	100 5% 1/10W	R752	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R546	1-216-845-11	METAL CHIP	100K 5% 1/10W				(AEP, UK)
R547	1-216-845-11	METAL CHIP	100K 5% 1/10W	R753	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R548	1-216-845-11	METAL CHIP	100K 5% 1/10W				(AEP, UK)
R549	1-216-845-11	METAL CHIP	100K 5% 1/10W	R754	1-216-811-11	METAL CHIP	150 5% 1/10W
R550	1-216-817-11	METAL CHIP	470 5% 1/10W				(AEP, UK)
R551	1-216-809-11	METAL CHIP	100 5% 1/10W	R755	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R552	1-216-817-11	METAL CHIP	470 5% 1/10W				(AEP, UK)
R553	1-216-809-11	METAL CHIP	100 5% 1/10W	R756	1-216-821-11	METAL CHIP	1K 5% 1/10W
R554	1-216-845-11	METAL CHIP	100K 5% 1/10W				(AEP, UK)
R555	1-216-845-11	METAL CHIP	100K 5% 1/10W	R802	1-216-857-11	METAL CHIP	1M 5% 1/10W
R556	1-216-828-11	METAL CHIP	3.9K 5% 1/10W	R810	1-216-805-11	METAL CHIP	47 5% 1/10W
R557	1-216-828-11	METAL CHIP	3.9K 5% 1/10W	R811	1-216-817-11	METAL CHIP	470 5% 1/10W
R558	1-216-833-11	METAL CHIP	10K 5% 1/10W			< TUNER >	
R559	1-216-864-11	SHORT CHIP	0	△ U601	1-693-741-11	TUNER (TMFE2-407A) (AUS)	
R560	1-216-835-11	METAL CHIP	15K 5% 1/10W	△ U601	1-693-753-21	TUNER (TMFE2-408B) (AEP, UK)	
R561	1-216-819-11	METAL CHIP	680 5% 1/10W			< VIBRATOR >	
R562	1-216-833-11	METAL CHIP	10K 5% 1/10W	* X101	1-813-965-31	VIBRATOR, CRYSTAL (15MHz)	
R563	1-216-864-11	SHORT CHIP	0	X102	1-795-950-11	VIBRATOR, CRYSTAL (32.768kHz)	
R564	1-216-835-11	METAL CHIP	15K 5% 1/10W	* X601	1-813-713-21	VIBRATOR, CRYSTAL (18.432MHz)	
R565	1-216-819-11	METAL CHIP	680 5% 1/10W				
R566	1-216-837-11	METAL CHIP	22K 5% 1/10W				
R568	1-216-834-11	METAL CHIP	12K 5% 1/10W				
R569	1-216-821-11	METAL CHIP	1K 5% 1/10W				
R571	1-208-755-11	METAL CHIP	75 0.5% 1/10W				
R573	1-500-283-11	INDUCTOR, FERRITE BEAD					

Note : The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
A-1520-890-A	DT-124 (AG) BOARD, COMPLETE	(HXD790/HXD890: AEP, UK/HXD990: AEP, UK/HXD1090)		C194	1-115-156-11	CERAMIC CHIP 1uF	10V
A-1520-894-A	DT-124 (BG) BOARD, COMPLETE	(HXD795/HXD895/HXD995/HXD1095)		C209	1-164-156-11	CERAMIC CHIP 0.1uF	25V
A-1550-357-A	DT-124 (AS) BOARD, COMPLETE (AUS)	(REF. NO.: 40,000 SERIES)		C210	1-117-681-11	ELECT CHIP 100uF	20% 16V
*****						(HXD795/HXD895/HXD995/HXD1095)	
7-621-255-55	SCREW +P 2X8	(HXD795/HXD895/HXD995/HXD1095)		C211	1-126-204-11	ELECT CHIP 47uF	20% 16V
	< CAPACITOR >			C212	1-114-130-11	CERAMIC CHIP 1uF	10% 6.3V
C101	1-115-156-11	CERAMIC CHIP 1uF	10V	C213	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C102	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C221	1-117-681-11	ELECT CHIP 100uF	20% 16V
C103	1-162-964-11	CERAMIC CHIP 0.001uF	10% 50V			(HXD795/HXD895/HXD995/HXD1095)	
C104	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C222	1-114-130-11	CERAMIC CHIP 1uF	10% 6.3V
C105	1-162-964-11	CERAMIC CHIP 0.001uF	10% 50V			(HXD795/HXD895/HXD995/HXD1095)	
C106	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C301	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C107	1-115-156-11	CERAMIC CHIP 1uF	10V	C302	1-117-681-11	ELECT CHIP 100uF	20% 16V
C108	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C303	1-162-927-11	CERAMIC CHIP 100PF	5% 50V
C109	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C304	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C110	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C307	1-117-681-11	ELECT CHIP 100uF	20% 16V
C111	1-115-156-11	CERAMIC CHIP 1uF	10V	C309	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C112	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C312	1-100-966-91	CERAMIC CHIP 10uF	20% 10V
C113	1-115-156-11	CERAMIC CHIP 1uF	10V	C313	1-127-760-11	CERAMIC CHIP 4.7uF	10% 6.3V
C114	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C314	1-127-760-11	CERAMIC CHIP 4.7uF	10% 6.3V
C115	1-126-210-21	ELECT CHIP 220uF	20% 4V			(HXD795/HXD895/HXD995/HXD1095)	
C116	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C315	1-127-760-11	CERAMIC CHIP 4.7uF	10% 6.3V
C117	1-115-156-11	CERAMIC CHIP 1uF	10V	C318	1-117-681-11	ELECT CHIP 100uF	20% 16V
C118	1-164-156-11	CERAMIC CHIP 0.1uF	25V			(HXD795/HXD895/HXD995/HXD1095)	
C119	1-115-156-11	CERAMIC CHIP 1uF	10V	C319	1-117-681-11	ELECT CHIP 100uF	20% 16V
C120	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C320	1-127-760-11	CERAMIC CHIP 4.7uF	10% 6.3V
C121	1-115-156-11	CERAMIC CHIP 1uF	10V	C324	1-124-778-00	ELECT CHIP 22uF	20% 6.3V
C122	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C329	1-117-681-11	ELECT CHIP 100uF	20% 16V
C124	1-164-156-11	CERAMIC CHIP 0.1uF	25V			(HXD795/HXD895/HXD995/HXD1095)	
C125	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C332	1-125-889-11	CERAMIC CHIP 2.2uF	10% 10V
C126	1-115-156-11	CERAMIC CHIP 1uF	10V	C334	1-127-760-11	CERAMIC CHIP 4.7uF	10% 6.3V
C127	1-164-156-11	CERAMIC CHIP 0.1uF	25V			(HXD795/HXD895/HXD995/HXD1095)	
C128	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C339	1-117-681-11	ELECT CHIP 100uF	20% 16V
C129	1-115-156-11	CERAMIC CHIP 1uF	10V	C340	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C130	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C341	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C131	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C342	1-126-204-11	ELECT CHIP 47uF	20% 16V
C134	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C343	1-126-204-11	ELECT CHIP 47uF	20% 16V
C135	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C353	1-124-779-00	ELECT CHIP 10uF	20% 16V
C136	1-115-156-11	CERAMIC CHIP 1uF	10V	C354	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C137	1-115-156-11	CERAMIC CHIP 1uF	10V	C356	1-162-919-11	CERAMIC CHIP 22PF	5% 50V
C138	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C359	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C140	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C361	1-162-919-11	CERAMIC CHIP 22PF	5% 50V
C142	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C364	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C144	1-117-681-11	ELECT CHIP 100uF	20% 16V	C367	1-126-197-11	ELECT CHIP 10uF	20% 50V
C147	1-126-204-11	ELECT CHIP 47uF	20% 16V	C368	1-117-681-11	ELECT CHIP 100uF	20% 16V
C148	1-162-907-11	CERAMIC CHIP 2PF	0.25PF 50V	C370	1-162-927-11	CERAMIC CHIP 100PF	5% 50V
C149	1-162-907-11	CERAMIC CHIP 2PF	0.25PF 50V	C372	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C155	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C373	1-125-889-11	CERAMIC CHIP 2.2uF	10% 10V
C191	1-115-156-11	CERAMIC CHIP 1uF	10V	C380	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C192	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C381	1-117-681-11	ELECT CHIP 100uF	20% 16V
C193	1-115-156-11	CERAMIC CHIP 1uF	10V	C382	1-117-681-11	ELECT CHIP 100uF	20% 16V
				C383	1-164-156-11	CERAMIC CHIP 0.1uF	25V
				C385	1-126-204-11	ELECT CHIP 47uF	20% 16V
				C388	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
				C391	1-162-970-11	CERAMIC CHIP 0.01uF	10% 25V
				C392	1-125-889-11	CERAMIC CHIP 2.2uF	10% 10V
				C393	1-125-889-11	CERAMIC CHIP 2.2uF	10% 10V

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
C395	1-126-204-11	ELECT CHIP	47uF 20% 16V	C3004	1-107-820-11	CERAMIC CHIP 0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)	
C396	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V	C3005	1-107-820-11	CERAMIC CHIP 0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)	
C397	1-162-915-11	CERAMIC CHIP	10PF 0.5PF 50V	C3006	1-114-130-11	CERAMIC CHIP 1uF 10% 6.3V (HXD795/HXD895/HXD995/HXD1095)	
C398	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C3007	1-114-130-11	CERAMIC CHIP 1uF 10% 6.3V (HXD795/HXD895/HXD995/HXD1095)	
C399	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C3008	1-107-820-11	CERAMIC CHIP 0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)	
C400	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V	C3009	1-107-820-11	CERAMIC CHIP 0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)	
C402	1-162-916-11	CERAMIC CHIP	12PF 5% 50V	C3010	1-107-820-11	CERAMIC CHIP 0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)	
C404	1-125-889-11	CERAMIC CHIP	2.2uF 10% 10V	C3011	1-107-820-11	CERAMIC CHIP 0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)	
C406	1-115-156-11	CERAMIC CHIP	1uF 10V	C3012	1-107-820-11	CERAMIC CHIP 0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)	
C408	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C3013	1-107-820-11	CERAMIC CHIP 0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)	
C409	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3016	1-114-130-11	CERAMIC CHIP 1uF 10% 6.3V (HXD795/HXD895/HXD995/HXD1095)	
C412	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C3017	1-126-204-11	ELECT CHIP 47uF 20% 16V (HXD795/HXD895/HXD995/HXD1095)	
C413	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3022	1-125-889-11	CERAMIC CHIP 2.2uF 10% 10V (HXD795/HXD895/HXD995/HXD1095)	
C415	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C3023	1-107-820-11	CERAMIC CHIP 0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)	
C416	1-164-156-11	CERAMIC CHIP	0.1uF 25V			< CONNECTOR >	
C417	1-115-156-11	CERAMIC CHIP	1uF 10V	CN103	1-779-287-11	FFC CONNECTOR (LIF (NON-ZIF)) 19P	
C418	1-115-156-11	CERAMIC CHIP	1uF 10V	* CN202	1-564-728-11	PIN, CONNECTOR (SMALL TYPE) 12P	
C421	1-115-156-11	CERAMIC CHIP	1uF 10V	CN203	1-564-704-41	PIN, CONNECTOR (SMALL TYPE) 2P	
C422	1-164-156-11	CERAMIC CHIP	0.1uF 25V			< DIODE >	
C423	1-164-156-11	CERAMIC CHIP	0.1uF 25V (HXD795/HXD895/HXD995/HXD1095)	* D302	6-501-864-01	DIODE SM15T6V8A	
C431	1-125-889-11	CERAMIC CHIP	2.2uF 10% 10V	D303	8-719-081-97	DIODE MMDL914T1	
C433	1-127-760-11	CERAMIC CHIP	4.7uF 10% 6.3V			< FUSE >	
C522	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F101	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C524	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F102	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C528	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V	F103	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C590	1-162-915-11	CERAMIC CHIP	10PF 0.5PF 50V	F104	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C591	1-162-915-11	CERAMIC CHIP	10PF 0.5PF 50V	F105	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C592	1-162-915-11	CERAMIC CHIP	10PF 0.5PF 50V	F106	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C593	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F108	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C594	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F202	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C595	1-126-210-21	ELECT CHIP	220uF 20% 4V	F300	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C596	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F301	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C597	1-126-210-21	ELECT CHIP	220uF 20% 4V	F302	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C598	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F306	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C599	1-117-681-11	ELECT CHIP	100uF 20% 16V	F309	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C600	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F310	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C601	1-117-681-11	ELECT CHIP	100uF 20% 16V	F313	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C602	1-127-760-11	CERAMIC CHIP	4.7uF 10% 6.3V	F314	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C603	1-124-778-00	ELECT CHIP	22uF 20% 6.3V	F317	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C614	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F318	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C615	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F321	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C616	1-125-889-11	CERAMIC CHIP	2.2uF 10% 10V	F397	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C618	1-100-966-91	CERAMIC CHIP	10uF 20% 10V	F398	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C620	1-100-966-91	CERAMIC CHIP	10uF 20% 10V				
C801	1-115-156-11	CERAMIC CHIP	1uF 10V				
C802	1-115-156-11	CERAMIC CHIP	1uF 10V				
C803	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V				
C804	1-126-205-11	ELECT CHIP	47uF 20% 6.3V				
C805	1-164-874-11	CERAMIC CHIP	100PF 5% 50V				
C806	1-164-874-11	CERAMIC CHIP	100PF 5% 50V				
C807	1-164-858-11	CERAMIC CHIP	22PF 5% 50V				
C808	1-164-858-11	CERAMIC CHIP	22PF 5% 50V				
C3001	1-107-820-11	CERAMIC CHIP	0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)				
C3002	1-107-820-11	CERAMIC CHIP	0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)				
C3003	1-107-820-11	CERAMIC CHIP	0.1uF 16V (HXD795/HXD895/HXD995/HXD1095)				

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
< IC >				< RESISTOR >			
IC101	6-705-306-01	IC HYB25DC256160CE-6		R100	1-216-864-11	SHORT CHIP	0
* IC104	6-711-077-01	IC KA5SDKAS01TSN		R101	1-216-833-11	METAL CHIP	10K 5% 1/10W
IC106	6-711-206-01	IC uPD61111GM-200-UEV-A		R104	1-216-833-11	METAL CHIP	10K 5% 1/10W
IC207	6-712-693-01	IC AAT4610AIJS-1-T1 (HXD795/HXD895/HXD995/HXD1095)		R107	1-216-864-11	SHORT CHIP	0
* IC304	6-712-691-01	IC S-1132B50-U5T1G		R109	1-216-864-11	SHORT CHIP	0
IC306	6-711-050-01	IC S-1170B50UC-OUJTFG (HXD795/HXD895/HXD995/HXD1095)		R110	1-216-806-11	METAL CHIP	56 5% 1/10W
* IC307	6-711-027-01	IC MM1689FHBE		R111	1-216-806-11	METAL CHIP	56 5% 1/10W
* IC309	6-711-146-01	IC FPF2007		R114	1-216-803-11	METAL CHIP	33 5% 1/10W
* IC312	6-712-691-01	IC S-1132B50-U5T1G		R116	1-216-833-11	METAL CHIP	10K 5% 1/10W
* IC313	6-711-223-01	IC DRX3975D		R121	1-218-823-11	METAL CHIP	100 0.5% 1/10W
IC3001	6-707-850-01	IC TC74LCX245FT (EKJ) (HXD795/HXD895/HXD995/HXD1095)		R122	1-218-823-11	METAL CHIP	100 0.5% 1/10W
IC3002	6-707-853-01	IC TC74LCX541FT (EKJ) (HXD795/HXD895/HXD995/HXD1095)		R123	1-218-823-11	METAL CHIP	100 0.5% 1/10W
IC3003	6-707-853-01	IC TC74LCX541FT (EKJ) (HXD795/HXD895/HXD995/HXD1095)		R124	1-218-823-11	METAL CHIP	100 0.5% 1/10W
IC3004	6-707-853-01	IC TC74LCX541FT (EKJ) (HXD795/HXD895/HXD995/HXD1095)		R125	1-218-823-11	METAL CHIP	100 0.5% 1/10W
IC3005	6-707-853-01	IC TC74LCX541FT (EKJ) (HXD795/HXD895/HXD995/HXD1095)		R126	1-218-823-11	METAL CHIP	100 0.5% 1/10W
IC3006	8-759-475-49	IC TC74LCX257FT (EL) (HXD795/HXD895/HXD995/HXD1095)		R127	1-218-823-11	METAL CHIP	100 0.5% 1/10W
IC3007	8-759-475-49	IC TC74LCX257FT (EL) (HXD795/HXD895/HXD995/HXD1095)		R128	1-218-823-11	METAL CHIP	100 0.5% 1/10W
IC3008	8-759-475-49	IC TC74LCX257FT (EL) (HXD795/HXD895/HXD995/HXD1095)		R141	1-216-833-11	METAL CHIP	10K 5% 1/10W
IC3009	6-707-853-01	IC TC74LCX541FT (EKJ) (HXD795/HXD895/HXD995/HXD1095)		R145	1-216-833-11	METAL CHIP	10K 5% 1/10W
IC3010	6-707-853-01	IC TC74LCX541FT (EKJ) (HXD795/HXD895/HXD995/HXD1095)		R146	1-216-833-11	METAL CHIP	10K 5% 1/10W
IC3011	6-707-858-01	IC TC74VHC00FT (EKJ) (HXD795/HXD895/HXD995/HXD1095)		R148	1-216-833-11	METAL CHIP	10K 5% 1/10W
IC3015	6-707-851-01	IC TC74LCX32FT (EKJ) (HXD795/HXD895/HXD995/HXD1095)		R149	1-216-841-11	METAL CHIP	47K 5% 1/10W
< COIL >				R151	1-216-841-11	METAL CHIP	47K 5% 1/10W
L314	1-469-110-21	FERRITE, EMI (SMD) (1608)		R153	1-216-841-11	METAL CHIP	47K 5% 1/10W
L315	1-400-703-21	(3216, EMI FERRITE (SMD)		R154	1-216-841-11	METAL CHIP	47K 5% 1/10W
L801	1-469-555-21	INDUCTOR 10uH		R155	1-216-841-11	METAL CHIP	47K 5% 1/10W
L3001	1-543-949-22	BEAD, FERRITE (CHIP) (1608) (HXD795/HXD895/HXD995/HXD1095)		R159	1-216-809-11	METAL CHIP	100 5% 1/10W
< TRANSISTOR >				R160	1-216-809-11	METAL CHIP	100 5% 1/10W
Q202	8-729-028-86	TRANSISTOR DTA143EUA-T106 (HXD795/HXD895/HXD995/HXD1095)		R166	1-218-846-11	METAL CHIP	910 0.5% 1/10W
Q203	8-729-620-13	TRANSISTOR 2SC4154TP-1EF (HXD795/HXD895/HXD995/HXD1095)		R167	1-218-846-11	METAL CHIP	910 0.5% 1/10W
Q204	8-729-029-06	TRANSISTOR DTC124EUA-T106 (HXD795/HXD895/HXD995/HXD1095)		R168	1-218-831-11	METAL CHIP	220 0.5% 1/10W
Q205	8-729-427-72	TRANSISTOR XP4501 (HXD795/HXD895/HXD995/HXD1095)		R169	1-218-827-11	METAL CHIP	150 0.5% 1/10W
Q306	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF		R170	1-216-803-11	METAL CHIP	33 5% 1/10W
Q307	8-729-620-13	TRANSISTOR 2SC4154TP-1EF		R173	1-216-806-11	METAL CHIP	56 5% 1/10W
Q308	8-729-620-13	TRANSISTOR 2SC4154TP-1EF		R174	1-216-806-11	METAL CHIP	56 5% 1/10W
Q309	8-729-029-09	TRANSISTOR DTC143EUA-T106		R175	1-216-806-11	METAL CHIP	56 5% 1/10W
Q310	8-729-029-09	TRANSISTOR DTC143EUA-T106		R178	1-216-806-11	METAL CHIP	56 5% 1/10W
Q801	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF		R179	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q802	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF		R180	1-216-806-11	METAL CHIP	56 5% 1/10W
Q803	8-729-620-13	TRANSISTOR 2SC4154TP-1EF		R182	1-216-864-11	SHORT CHIP	0
Q804	8-729-620-13	TRANSISTOR 2SC4154TP-1EF		R183	1-216-864-11	SHORT CHIP	0
				* R185	1-234-714-11	RES, NETWORK	56 (1005X4)
				* R186	1-234-714-11	RES, NETWORK	56 (1005X4)
				R187	1-234-791-21	RES, NETWORK	150X4 (2010) (AEP, UK)
				R187	1-200-051-21	RES, NETWORK	150 (1005X4) (AUS)
				R188	1-234-372-11	RES, NETWORK	100 (1005X4)
				R189	1-234-372-11	RES, NETWORK	100 (1005X4)
				R190	1-234-372-11	RES, NETWORK	100 (1005X4)
				R191	1-234-372-11	RES, NETWORK	100 (1005X4)
				R192	1-234-372-11	RES, NETWORK	100 (1005X4)
				* R193	1-234-714-11	RES, NETWORK	56 (1005X4)
				* R194	1-234-714-11	RES, NETWORK	56 (1005X4)
				R197	1-216-864-11	SHORT CHIP	0
				R198	1-216-833-11	METAL CHIP	10K 5% 1/10W
				R199	1-216-864-11	SHORT CHIP	0

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
R231	1-216-820-11	METAL CHIP 820 5% 1/10W (HXD795/HXD895/HXD995/HXD1095)		R341	1-216-828-11	METAL CHIP 3.9K 5% 1/10W	
R239	1-234-791-21	RES, NETWORK 150X4 (2010) (AEP, UK)		R342	1-216-828-11	METAL CHIP 3.9K 5% 1/10W	
R239	1-200-051-21	RES, NETWORK 150 (1005X4) (AUS)		R343	1-216-864-11	SHORT CHIP 0	
R240	1-234-791-21	RES, NETWORK 150X4 (2010) (AEP, UK)		R345	1-216-864-11	SHORT CHIP 0	
R240	1-200-051-21	RES, NETWORK 150 (1005X4) (AUS)		R347	1-216-864-11	SHORT CHIP 0	
R241	1-234-791-21	RES, NETWORK 150X4 (2010) (AEP, UK)		R348	1-216-864-11	SHORT CHIP 0	
R241	1-200-051-21	RES, NETWORK 150 (1005X4) (AUS)		R349	1-216-864-11	SHORT CHIP 0	
R242	1-234-791-21	RES, NETWORK 150X4 (2010) (AEP, UK)		R350	1-216-864-11	SHORT CHIP 0	
R242	1-200-051-21	RES, NETWORK 150 (1005X4) (AUS)		R351	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R243	1-234-791-21	RES, NETWORK 150X4 (2010) (AEP, UK)		R352	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R243	1-200-051-21	RES, NETWORK 150 (1005X4) (AUS)		R353	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R244	1-234-791-21	RES, NETWORK 150X4 (2010) (AEP, UK)		R357	1-216-864-11	SHORT CHIP 0	
R244	1-200-051-21	RES, NETWORK 150 (1005X4) (AUS)		R358	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R245	1-234-791-21	RES, NETWORK 150X4 (2010) (AEP, UK)		R359	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R245	1-200-051-21	RES, NETWORK 150 (1005X4) (AUS)		R363	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R246	1-234-371-21	RES, NETWORK 47 (1005X4)		R532	1-216-864-11	SHORT CHIP 0	
R247	1-234-371-21	RES, NETWORK 47 (1005X4)		R534	1-216-864-11	SHORT CHIP 0	
R248	1-234-371-21	RES, NETWORK 47 (1005X4)		R535	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R249	1-234-371-21	RES, NETWORK 47 (1005X4)		R538	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R250	1-218-965-11	RES-CHIP 10K 5% 1/16W		R540	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R251	1-218-965-11	RES-CHIP 10K 5% 1/16W		R542	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R253	1-218-937-11	RES-CHIP 47 5% 1/16W		R544	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R254	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)		R546	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R258	1-218-965-11	RES-CHIP 10K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)		R547	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R259	1-218-965-11	RES-CHIP 10K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)		R550	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R269	1-218-971-11	RES-CHIP 33K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)		R551	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R270	1-218-973-11	RES-CHIP 47K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)		R554	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R271	1-218-969-11	RES-CHIP 22K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)		R556	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R272	1-218-965-11	RES-CHIP 10K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)		R558	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R273	1-218-965-11	RES-CHIP 10K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)		R560	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R275	1-218-965-11	RES-CHIP 10K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)		R561	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R304	1-216-833-11	METAL CHIP 10K 5% 1/10W		R564	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R306	1-216-864-11	SHORT CHIP 0		R566	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R307	1-216-864-11	SHORT CHIP 0		R568	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R309	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		R569	1-216-809-11	METAL CHIP 100 5% 1/10W	
R310	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		R570	1-216-809-11	METAL CHIP 100 5% 1/10W	
R311	1-216-819-11	METAL CHIP 680 5% 1/10W		R571	1-216-864-11	SHORT CHIP 0	
R312	1-216-809-11	METAL CHIP 100 5% 1/10W		R572	1-216-864-11	SHORT CHIP 0	
R313	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		R575	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R314	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		R577	1-216-864-11	SHORT CHIP 0	
R315	1-216-833-11	METAL CHIP 10K 5% 1/10W		R580	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R319	1-216-841-11	METAL CHIP 47K 5% 1/10W		R589	1-216-864-11	SHORT CHIP 0	
R321	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		R594	1-216-806-11	METAL CHIP 56 5% 1/10W	
R325	1-216-836-11	METAL CHIP 18K 5% 1/10W		R595	1-216-938-11	RES-CHIP 56 5% 1/16W	
R326	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		R597	1-216-807-11	METAL CHIP 68 5% 1/10W	
R327	1-216-833-11	METAL CHIP 10K 5% 1/10W		R598	1-216-807-11	METAL CHIP 68 5% 1/10W	
R331	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		R604	1-216-864-11	SHORT CHIP 0	
R333	1-216-809-11	METAL CHIP 100 5% 1/10W		R605	1-216-864-11	SHORT CHIP 0	
R336	1-216-864-11	SHORT CHIP 0		R606	1-216-864-11	SHORT CHIP 0	
R337	1-216-864-11	SHORT CHIP 0		R607	1-216-864-11	SHORT CHIP 0	
				R608	1-216-805-11	METAL CHIP 47 5% 1/10W	
				R609	1-216-805-11	METAL CHIP 47 5% 1/10W	
				R610	1-216-805-11	METAL CHIP 47 5% 1/10W	
				R616	1-216-805-11	METAL CHIP 47 5% 1/10W	
				R617	1-216-806-11	METAL CHIP 56 5% 1/10W	
				R618	1-216-806-11	METAL CHIP 56 5% 1/10W	
				R619	1-216-806-11	METAL CHIP 56 5% 1/10W	
				R620	1-216-806-11	METAL CHIP 56 5% 1/10W	
				R621	1-216-837-11	METAL CHIP 22K 5% 1/10W	
				R622	1-216-837-11	METAL CHIP 22K 5% 1/10W	

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
R641	1-234-400-21	CONDUCTOR, NETWORK (1005X4)		R3011	1-216-864-11	SHORT CHIP 0 (HXD795/HXD895/HXD995/HXD1095)	
R642	1-216-864-11	SHORT CHIP 0		R3012	1-218-965-11	RES-CHIP 10K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R660	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		R3013	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R661	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		R3014	1-218-965-11	RES-CHIP 10K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R662	1-216-864-11	SHORT CHIP 0		R3015	1-234-400-21	CONDUCTOR, NETWORK (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R668	1-216-864-11	SHORT CHIP 0		R3016	1-234-400-21	CONDUCTOR, NETWORK (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R672	1-216-818-11	METAL CHIP 560 5% 1/10W		R3017	1-218-990-81	SHORT CHIP 0 (HXD795/HXD895/HXD995/HXD1095)	
R678	1-234-723-11	RES, NETWORK 75 (1005X4)		R3019	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R679	1-234-723-11	RES, NETWORK 75 (1005X4)		R3023	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R680	1-216-803-11	METAL CHIP 33 5% 1/10W		R3024	1-218-965-11	RES-CHIP 10K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R681	1-216-803-11	METAL CHIP 33 5% 1/10W		R3025	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R682	1-216-803-11	METAL CHIP 33 5% 1/10W		R3026	1-234-370-21	RES, NETWORK 22 (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R685	1-216-833-11	METAL CHIP 10K 5% 1/10W		R3034	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R686	1-216-833-11	METAL CHIP 10K 5% 1/10W		R3035	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R687	1-216-816-11	METAL CHIP 390 5% 1/10W		R3036	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R689	1-216-864-11	SHORT CHIP 0		R3037	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R690	1-216-864-11	SHORT CHIP 0		R3038	1-234-400-21	CONDUCTOR, NETWORK (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R691	1-216-864-11	SHORT CHIP 0		R3039	1-234-400-21	CONDUCTOR, NETWORK (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R692	1-216-864-11	SHORT CHIP 0		R3040	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R693	1-216-864-11	SHORT CHIP 0		R3041	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R694	1-242-963-21	RES, NETWORK 33 (1005X4)		R3042	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R695	1-242-963-21	RES, NETWORK 33 (1005X4)		R3043	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R696	1-242-963-21	RES, NETWORK 33 (1005X4)		R3044	1-234-400-21	CONDUCTOR, NETWORK (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R698	1-218-935-11	RES-CHIP 33 5% 1/16W		R3045	1-234-400-21	CONDUCTOR, NETWORK (1005X4) (HXD795/HXD895/HXD995/HXD1095)	
R699	1-218-935-11	RES-CHIP 33 5% 1/16W		R3046	1-218-935-11	RES-CHIP 33 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R700	1-218-935-11	RES-CHIP 33 5% 1/16W		R3047	1-218-935-11	RES-CHIP 33 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R701	1-218-935-11	RES-CHIP 33 5% 1/16W		R3048	1-218-935-11	RES-CHIP 33 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R702	1-218-935-11	RES-CHIP 33 5% 1/16W		R3049	1-218-935-11	RES-CHIP 33 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R704	1-218-935-11	RES-CHIP 33 5% 1/16W		R3050	1-218-935-11	RES-CHIP 33 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R705	1-218-935-11	RES-CHIP 33 5% 1/16W		R3051	1-218-935-11	RES-CHIP 33 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R706	1-218-935-11	RES-CHIP 33 5% 1/16W					
R707	1-218-935-11	RES-CHIP 33 5% 1/16W					
R801	1-218-953-11	RES-CHIP 1K 5% 1/16W					
R802	1-218-951-11	RES-CHIP 680 5% 1/16W					
R803	1-218-953-11	RES-CHIP 1K 5% 1/16W					
R804	1-218-951-11	RES-CHIP 680 5% 1/16W					
R805	1-218-965-11	RES-CHIP 10K 5% 1/16W					
R806	1-218-965-11	RES-CHIP 10K 5% 1/16W					
R807	1-218-965-11	RES-CHIP 10K 5% 1/16W					
R808	1-218-965-11	RES-CHIP 10K 5% 1/16W					
R809	1-218-953-11	RES-CHIP 1K 5% 1/16W					
R810	1-218-953-11	RES-CHIP 1K 5% 1/16W					
R811	1-218-953-11	RES-CHIP 1K 5% 1/16W					
R812	1-218-953-11	RES-CHIP 1K 5% 1/16W					
R813	1-218-839-11	METAL CHIP 470 0.5% 1/10W					
R814	1-218-839-11	METAL CHIP 470 0.5% 1/10W					
R1057	1-216-864-11	SHORT CHIP 0					
R3001	1-234-378-21	RES, NETWORK 10K (1005X4)					
R3002	1-234-378-21	RES, NETWORK 10K (1005X4)					
R3003	1-234-378-21	RES, NETWORK 10K (1005X4)					
R3004	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)					
R3005	1-234-370-21	RES, NETWORK 22 (1005X4) (HXD795/HXD895/HXD995/HXD1095)					
R3006	1-234-370-21	RES, NETWORK 22 (1005X4) (HXD795/HXD895/HXD995/HXD1095)					
R3007	1-234-370-21	RES, NETWORK 22 (1005X4) (HXD795/HXD895/HXD995/HXD1095)					
R3009	1-234-371-21	RES, NETWORK 47 (1005X4) (HXD795/HXD895/HXD995/HXD1095)					

Ref. No.	Part No.	Description	Remarks
R3052	1-218-935-11	RES-CHIP 33 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3053	1-218-935-11	RES-CHIP 33 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3054	1-218-965-11	RES-CHIP 10K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3055	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R3056	1-234-373-21	RES, NETWORK 220 (1005X4) (HXD790/HXD890/HXD990/HXD1090)	
R3057	1-234-373-21	RES, NETWORK 220 (1005X4) (HXD790/HXD890/HXD990/HXD1090)	
R3059	1-218-965-11	RES-CHIP 10K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3060	1-218-965-11	RES-CHIP 10K 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3061	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3062	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3063	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3064	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3065	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3066	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3067	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3070	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3071	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3072	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3073	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3074	1-218-933-11	RES-CHIP 22 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3075	1-218-933-11	RES-CHIP 22 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3076	1-218-933-11	RES-CHIP 22 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3077	1-218-933-11	RES-CHIP 22 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3078	1-218-943-11	RES-CHIP 150 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3079	1-218-943-11	RES-CHIP 150 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3080	1-218-943-11	RES-CHIP 150 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3081	1-218-943-11	RES-CHIP 150 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3082	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3083	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3084	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	

Ref. No.	Part No.	Description	Remarks
R3085	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3086	1-218-933-11	RES-CHIP 22 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3087	1-218-933-11	RES-CHIP 22 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3088	1-218-933-11	RES-CHIP 22 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3089	1-218-933-11	RES-CHIP 22 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3090	1-218-943-11	RES-CHIP 150 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3091	1-218-943-11	RES-CHIP 150 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3092	1-218-943-11	RES-CHIP 150 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3093	1-218-943-11	RES-CHIP 150 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3094	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3095	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3096	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3097	1-218-933-11	RES-CHIP 22 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3098	1-218-933-11	RES-CHIP 22 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3099	1-218-933-11	RES-CHIP 22 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3100	1-218-943-11	RES-CHIP 150 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3101	1-218-943-11	RES-CHIP 150 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3102	1-218-943-11	RES-CHIP 150 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3103	1-218-990-81	SHORT CHIP 0 (HXD790/HXD890/HXD990/HXD1090)	
R3104	1-218-990-81	SHORT CHIP 0 (HXD790/HXD890/HXD990/HXD1090)	
R3105	1-218-990-81	SHORT CHIP 0 (HXD790/HXD890/HXD990/HXD1090)	
R3106	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3107	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3108	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R3110	1-216-864-11	SHORT CHIP 0	
R3111	1-216-809-11	METAL CHIP 100 5% 1/10W	
R3112	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R3114	1-216-864-11	SHORT CHIP 0	
R3115	1-216-864-11	SHORT CHIP 0	
R3116	1-216-864-11	SHORT CHIP 0	
R3117	1-216-864-11	SHORT CHIP 0	
R3118	1-216-825-11	METAL CHIP 2.2K 5% 1/10W (HXD795/HXD895/HXD995/HXD1095)	
R3119	1-216-829-11	METAL CHIP 4.7K 5% 1/10W (HXD795/HXD895/HXD995/HXD1095)	
R3120	1-216-833-11	METAL CHIP 10K 5% 1/10W (HXD795/HXD895/HXD995/HXD1095)	
R3121	1-216-821-11	METAL CHIP 1K 5% 1/10W (HXD795/HXD895/HXD995/HXD1095)	

Ref. No.	Part No.	Description	Remarks
R3122	1-216-825-11	METAL CHIP 2.2K 5% 1/10W (HXD795/HXD895/HXD995/HXD1095)	
R3123	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
R3124	1-218-937-11	RES-CHIP 47 5% 1/16W (HXD795/HXD895/HXD995/HXD1095)	
< TUNER >			
△ U301	1-693-772-11	TUNER (TDQD5) (AEP, UK)	
△ U301	1-693-772-21	TUNER (TDQD5) (AUS)	
< VIBRATOR >			
* X300	1-813-966-21	VIBRATOR, CRYSTAL (SMD, 20.000MH) (20MHz)	

A-1520-886-A	FL-184 (AG) BOARD, COMPLETE (AEP, UK)		
A-1543-613-A	FL-184 (AS) BOARD, COMPLETE (AUS) (REF. NO.: 30,000 SERIES)		

< CAPACITOR >			
C101	1-115-156-11	CERAMIC CHIP 1uF 10V	
C102	1-115-156-11	CERAMIC CHIP 1uF 10V	
C107	1-107-726-91	CERAMIC CHIP 0.01uF 10% 16V	
C111	1-117-681-11	ELECT CHIP 100uF 20% 16V	
< CONNECTOR >			
CN104	1-819-866-11	CONNECTOR, USB (A) (USB A TYPE)	
CN105	1-817-693-11	CONNECTOR, USB (B) (USB B TYPE)	
CN106	1-815-381-11	CONNECTOR, FPC/FFC 5P	
< CHOKE COIL >			
FL101	1-456-390-21	COMMOM MODE CHOKE COIL	
FL102	1-456-390-21	COMMOM MODE CHOKE COIL	
< IC >			
IC101	6-600-392-01	IC GP1UM27XK0SF	
< COIL >			
L102	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
L103	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
L104	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
L105	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
< RESISTOR >			
R104	1-216-803-11	METAL CHIP 33 5% 1/10W	
R105	1-216-803-11	METAL CHIP 33 5% 1/10W	
R108	1-216-803-11	METAL CHIP 33 5% 1/10W	
R109	1-216-803-11	METAL CHIP 33 5% 1/10W	
R112	1-216-864-11	SHORT CHIP 0	
R113	1-216-864-11	SHORT CHIP 0	
< SWITCH >			
S101	1-786-726-11	SWITCH, TACTILE (POWER)	
S102	1-771-410-21	SWITCH, TACTILE (ONE TOUCH DUB)	

Ref. No.	Part No.	Description	Remarks
< VARISTOR >			
VDR102	1-802-071-21	VARISTOR, CHIP	
VDR104	1-802-071-21	VARISTOR, CHIP	

A-1520-888-A	FR-291 (AG) BOARD, COMPLETE (AEP, UK)		
A-1543-615-A	FR-291 (AS) BOARD, COMPLETE (AUS) (REF. NO.: 30,000 SERIES)		

* 2-319-520-01	SPACER, FL (AEP, UK)		
* 2-319-520-11	SPACER, FL (AUS)		
< CAPACITOR >			
C201	1-117-681-11	ELECT CHIP 100uF 20% 16V	
C204	1-164-230-11	CERAMIC CHIP 220PF 5% 50V	
C206	1-164-230-11	CERAMIC CHIP 220PF 5% 50V	
C211	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	
C213	1-165-621-91	CERAMIC CHIP 0.1uF 50V	
C215	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V	
C216	1-126-400-11	ELECT CHIP 22uF 20% 35V	
C217	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V	
C221	1-107-726-91	CERAMIC CHIP 0.01uF 10% 16V	
C222	1-107-726-91	CERAMIC CHIP 0.01uF 10% 16V	
C223	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V	
< CONNECTOR >			
CN201	1-815-381-11	CONNECTOR, FPC/FFC 5P	
CN202	1-816-497-11	CONNECTOR, FFC/FPC 24P	
< DIODE >			
D202	8-719-067-40	DIODE STZ6.8N-T146	
D203	8-719-067-40	DIODE STZ6.8N-T146	
D204	8-719-067-40	DIODE STZ6.8N-T146	
D205	8-719-067-40	DIODE STZ6.8N-T146	
D206	8-719-067-40	DIODE STZ6.8N-T146	
D207	8-719-067-40	DIODE STZ6.8N-T146	
D208	8-719-081-97	DIODE MMDL914T1	
D209	8-719-081-97	DIODE MMDL914T1	
D210	8-719-081-97	DIODE MMDL914T1	
D211	8-719-081-97	DIODE MMDL914T1	
* D212	6-501-884-01	DIODE SDPB31H3C0100	
D214	6-501-437-01	DIODE SLI-343YC3F	
D216	8-719-056-82	DIODE UDZ-TE-17-6.2B	
< FERRITE BEAD >			
FB201	1-414-228-11	INDUCTOR, FERRITE BEAD	
FB202	1-414-228-11	INDUCTOR, FERRITE BEAD	
< IC >			
IC201	6-701-729-01	IC PT6315	
< COIL >			
L201	1-411-919-11	INDUCTOR 100uH	
< FLUORESCENT INDICATOR TUBE >			
ND201	1-519-964-11	INDICATOR TUBE, FLUORESCENT	

Note : The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remarks			
< TRANSISTOR >						
Q201	8-729-052-91	TRANSISTOR	2SD1898T100R			
Q202	8-729-052-91	TRANSISTOR	2SD1898T100R			
Q203	8-729-024-43	TRANSISTOR	2SA1365-T112-1EF			
Q204	8-729-421-19	TRANSISTOR	UN2213			
Q205	8-729-029-06	TRANSISTOR	DTC124EUA-T106			
Q206	8-729-029-10	TRANSISTOR	DTC143TUA-T106			
< RESISTOR >						
R201	1-216-295-91	SHORT CHIP	0			
R205	1-216-864-11	SHORT CHIP	0			
R206	1-216-864-11	SHORT CHIP	0			
R207	1-216-864-11	SHORT CHIP	0			
R209	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R210	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R213	1-216-864-11	SHORT CHIP	0			
R215	1-216-830-11	METAL CHIP	5.6K	5%	1/10W	
R216	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R217	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R218	1-216-849-11	METAL CHIP	220K	5%	1/10W	
R220	1-216-849-11	METAL CHIP	220K	5%	1/10W	
R222	1-216-295-91	SHORT CHIP	0			
R223	1-216-826-11	METAL CHIP	2.7K	5%	1/10W	
R225	1-216-814-11	METAL CHIP	270	5%	1/10W	
R227	1-216-838-11	METAL CHIP	27K	5%	1/10W	
R228	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R229	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	
R230	1-216-830-11	METAL CHIP	5.6K	5%	1/10W	
R231	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R232	1-216-864-11	SHORT CHIP	0			
R233	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R235	1-216-864-11	SHORT CHIP	0			
R236	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R237	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R238	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R239	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R240	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R241	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	
R242	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R243	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R244	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R245	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	
R246	1-216-830-11	METAL CHIP	5.6K	5%	1/10W	
R250	1-216-805-11	METAL CHIP	47	5%	1/10W	
R251	1-216-805-11	METAL CHIP	47	5%	1/10W	
R252	1-216-805-11	METAL CHIP	47	5%	1/10W	
< SWITCH >						
S201	1-786-726-11	SWITCH, TACTILE (REC STOP)				
S202	1-771-410-21	SWITCH, TACTILE (INPUT SELECT)				
S203	1-786-726-11	SWITCH, TACTILE (REC)				
S204	1-771-410-21	SWITCH, TACTILE (CH+)				
S205	1-771-410-21	SWITCH, TACTILE (CH-)				
S206	1-786-726-11	SWITCH, TACTILE (STOP)				
S207	1-786-726-11	SWITCH, TACTILE (PLAY)				
S208	1-786-726-11	SWITCH, TACTILE (DVD)				
S209	1-786-726-11	SWITCH, TACTILE (OPEN/CLOSE)				
S210	1-786-726-11	SWITCH, TACTILE (HDD)				

Ref. No.	Part No.	Description	Remarks			
< TRANSFORMER >						
* T201	1-445-207-11	TRANSFORMER, DC-DC CONVERTER				

RD-66 (AS) BOARD (REF. NO.: 20,000 SERIES)						

< CAPACITOR >						
C100	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	
C101	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	
C103	1-126-210-21	ELECT CHIP	220uF	20%	4V	
C104	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	
C105	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	
C107	1-164-936-11	CERAMIC CHIP	680PF	10%	50V	
C115	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	
C116	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C117	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	
C120	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C121	1-164-939-11	CERAMIC CHIP	0.0022uF	10%	50V	
C122	1-164-939-11	CERAMIC CHIP	0.0022uF	10%	50V	
C124	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C125	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	
C127	1-119-923-11	CERAMIC CHIP	0.047uF	10%	10V	
C128	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C129	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	
C130	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	
C131	1-137-987-81	CERAMIC CHIP	0.068uF	10%	10V	
C133	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C134	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C135	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	
C136	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C137	1-164-942-11	CERAMIC CHIP	0.0068uF	10%	16V	
C142	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	
C143	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	
C144	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	
C145	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	
C146	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	
C149	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	
C152	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	
C153	1-124-779-00	ELECT CHIP	10uF	20%	16V	
C154	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	
C157	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	
C158	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	
C162	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	
C163	1-126-210-21	ELECT CHIP	220uF	20%	4V	
C164	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	
C165	1-164-858-11	CERAMIC CHIP	22PF	5%	50V	
C166	1-164-858-11	CERAMIC CHIP	22PF	5%	50V	
C169	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C170	1-164-866-11	CERAMIC CHIP	47PF	5%	50V	
C171	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C172	1-164-866-11	CERAMIC CHIP	47PF	5%	50V	
C173	1-164-866-11	CERAMIC CHIP	47PF	5%	50V	
C174	1-164-866-11	CERAMIC CHIP	47PF	5%	50V	
C176	1-164-858-11	CERAMIC CHIP	22PF	5%	50V	
C177	1-164-858-11	CERAMIC CHIP	22PF	5%	50V	
C180	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	
C181	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
C182	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C1032	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C187	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	C1033	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C188	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	C1034	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C189	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1035	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C194	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	C1036	1-126-209-11	ELECT CHIP	100uF	20%	4V
C197	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1037	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C280	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1038	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C281	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1039	1-126-209-11	ELECT CHIP	100uF	20%	4V
C282	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1040	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C283	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1041	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C284	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1044	1-164-840-11	CERAMIC CHIP	1PF	0.25PF	50V
C285	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1045	1-164-840-11	CERAMIC CHIP	1PF	0.25PF	50V
C286	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C1047	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C287	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1048	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C289	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1049	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C291	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1050	1-126-209-11	ELECT CHIP	100uF	20%	4V
C503	1-162-962-11	CERAMIC CHIP	470PF	10%	50V	C1051	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C504	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1052	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C505	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V	C1053	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C508	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1056	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C509	1-164-862-11	CERAMIC CHIP	33PF	5%	50V	C1058	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C510	1-164-870-11	CERAMIC CHIP	68PF	5%	50V	C1059	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C511	1-127-573-11	CERAMIC CHIP	1uF	10%	16V	C1061	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C512	1-164-360-11	CERAMIC CHIP	0.1uF		16V	C1062	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C513	1-164-360-11	CERAMIC CHIP	0.1uF		16V	C1064	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C514	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V	C1065	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C515	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V	C1066	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C516	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1068	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C532	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1101	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1001	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1102	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1002	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1104	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1003	1-126-209-11	ELECT CHIP	100uF	20%	4V	C1113	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1004	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1202	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1005	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1204	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1006	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1205	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C1007	1-126-210-21	ELECT CHIP	220uF	20%	4V	C1206	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C1008	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1207	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1009	1-126-210-21	ELECT CHIP	220uF	20%	4V	C1208	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1010	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1209	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1011	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1210	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1012	1-126-209-11	ELECT CHIP	100uF	20%	4V	C1215	1-126-209-11	ELECT CHIP	100uF	20%	4V
C1013	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1216	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1014	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1217	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1015	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1218	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1016	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1219	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1017	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1220	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1018	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1221	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1019	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1223	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1020	1-124-779-00	ELECT CHIP	10uF	20%	16V	C1224	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C1021	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C1225	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C1022	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1226	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1023	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1227	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1024	1-126-209-11	ELECT CHIP	100uF	20%	4V	C1228	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1025	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C1229	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1026	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1231	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C1027	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1235	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C1028	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1236	1-126-209-11	ELECT CHIP	100uF	20%	4V
C1029	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1301	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V
C1030	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1304	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C1031	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1316	1-100-966-91	CERAMIC CHIP	10uF	20%	10V

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
C1401	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	C3333	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1421	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C3334	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1801	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C3335	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1802	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V	C3339	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1803	1-164-882-11	CERAMIC CHIP	220PF	5%	16V	C3340	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1804	1-164-934-11	CERAMIC CHIP	330PF	10%	50V	C3341	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1805	1-119-923-11	CERAMIC CHIP	0.047uF	10%	10V	C3342	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1811	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C3701	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C1812	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V	C3703	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C1813	1-164-874-11	CERAMIC CHIP	100PF	5%	50V	C3704	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C1814	1-164-878-11	CERAMIC CHIP	150PF	5%	50V	C3705	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1815	1-119-923-11	CERAMIC CHIP	0.047uF	10%	10V	C3706	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C2305	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C3707	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C2501	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C3738	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C2502	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C3801	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C2503	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C3802	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C2504	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C3803	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C2505	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C3804	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C2506	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C4501	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3103	1-117-681-11	ELECT CHIP	100uF	20%	16V	C4502	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3104	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C4503	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3106	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C4505	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3107	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C4507	1-117-681-11	ELECT CHIP	100uF	20%	16V
C3108	1-126-210-21	ELECT CHIP	220uF	20%	4V	C4508	1-126-210-21	ELECT CHIP	220uF	20%	4V
C3201	1-126-916-11	ELECT	1000uF	20%	6.3V	C4509	1-126-210-21	ELECT CHIP	220uF	20%	4V
C3203	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C4511	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3204	1-164-934-11	CERAMIC CHIP	330PF	10%	50V	C4513	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3207	1-126-205-11	ELECT CHIP	47uF	20%	6.3V	C4515	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C3211	1-117-681-11	ELECT CHIP	100uF	20%	16V	C4516	1-124-779-00	ELECT CHIP	10uF	20%	16V
* C3213	1-100-741-81	CERAMIC CHIP	560PF	5%	50V	C4522	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
* C3214	1-100-741-81	CERAMIC CHIP	560PF	5%	50V	C4524	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3215	1-164-872-11	CERAMIC CHIP	82PF	5%	50V	C4525	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3216	1-164-872-11	CERAMIC CHIP	82PF	5%	50V	C4526	1-218-967-11	RES-CHIP	15K	5%	1/16W
C3219	1-126-210-21	ELECT CHIP	220uF	20%	4V	C4531	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3220	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C4532	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C3301	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V	C4533	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3302	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V	C4534	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C3303	1-164-845-11	CERAMIC CHIP	5PF	0.25PF	50V	C4535	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C3304	1-164-870-11	CERAMIC CHIP	68PF	5%	50V	C4536	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C3305	1-164-854-11	CERAMIC CHIP	15PF	5%	50V	C4537	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C3307	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C4539	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C3311	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V	C4540	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C3312	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V	C4541	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3313	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C4542	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V
C3314	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V	C4543	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C3315	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V	C4553	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C3316	1-164-845-11	CERAMIC CHIP	5PF	0.25PF	50V	C4555	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3317	1-164-870-11	CERAMIC CHIP	68PF	5%	50V	C4556	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3318	1-164-854-11	CERAMIC CHIP	15PF	5%	50V	C4557	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C3319	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C4558	1-117-681-11	ELECT CHIP	100uF	20%	16V
C3320	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V	C4559	1-117-681-11	ELECT CHIP	100uF	20%	16V
C3321	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V	C4562	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3322	1-164-845-11	CERAMIC CHIP	5PF	0.25PF	50V	C4563	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3323	1-164-870-11	CERAMIC CHIP	68PF	5%	50V	C4567	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3324	1-164-854-11	CERAMIC CHIP	15PF	5%	50V	C4570	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3325	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C4571	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3329	1-164-845-11	CERAMIC CHIP	5PF	0.25PF	50V	C4572	1-126-210-21	ELECT CHIP	220uF	20%	4V
C3330	1-164-870-11	CERAMIC CHIP	68PF	5%	50V	C4573	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V
C3331	1-164-854-11	CERAMIC CHIP	15PF	5%	50V	C5105	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C3332	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5106	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
C5107	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5803	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C5108	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5804	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C5110	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5805	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C5111	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5806	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C5112	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5807	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C5115	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5808	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C5116	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5809	1-126-210-21	ELECT CHIP	220uF	20%	4V
C5117	1-164-852-11	CERAMIC CHIP	12PF	5%	50V	C5814	1-164-360-11	CERAMIC CHIP	0.1uF		16V
C5118	1-164-852-11	CERAMIC CHIP	12PF	5%	50V	C5815	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V
C5119	1-100-574-81	CERAMIC CHIP	270PF	10%	50V	C5816	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V
C5120	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5817	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V
C5121	1-126-209-11	ELECT CHIP	100uF	20%	4V	C5818	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V
C5122	1-126-209-11	ELECT CHIP	100uF	20%	4V	C5819	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C5123	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5820	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C5132	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5821	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C5133	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5822	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C5205	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5830	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C5210	1-117-681-11	ELECT CHIP	100uF	20%	16V	C5831	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C5211	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C5832	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C5213	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	C5833	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V
C5216	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	< CONNECTOR >					
C5219	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	CN501	1-766-767-51	CONNECTOR, FPC 12P			
C5223	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	CN601	1-784-857-51	CONNECTOR, FFC (LIF (NON-ZIF)) 5P			
C5601	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	CN1402	1-764-177-11	PIN, CONNECTOR (SMD) (1.5MM) 7P			
C5602	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V	* CN4501	1-564-729-11	PIN, CONNECTOR (SMALL TYPE) 13P			
C5604	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	CN5101	1-819-414-11	PIN, CONNECTOR (1.5MM) 6P			
C5605	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	CN5201	1-820-176-11	PIN, CONNECTOR (1.5MM) 10P			
C5606	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	< DIODE >					
C5607	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	D1401	8-719-081-42	DIODE UMZ6.8N-T106			
C5608	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	D3201	8-719-941-86	DIODE DAN202U			
C5609	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	D4521	8-719-058-24	DIODE RB501V-40TE-17			
C5610	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	D4552	8-719-058-24	DIODE RB501V-40TE-17			
C5611	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	D4571	8-719-058-24	DIODE RB501V-40TE-17			
C5612	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	< IC >					
C5613	1-126-209-11	ELECT CHIP	100uF	20%	4V	IC201	6-712-191-01	IC W9864G6GH-6-ER10 (T&R)			
C5614	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC1201	6-708-812-01	IC HYB25DC512160CE-6			
C5615	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	IC1221	6-708-812-01	IC HYB25DC512160CE-6			
C5616	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	IC3202	8-759-100-96	IC uPC4558G2			
C5617	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC3701	8-759-679-05	IC TC7WH34FU (TE12R)			
C5622	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC3702	6-706-487-01	IC TC7SH08FU (T5RSOYJF)			
C5623	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC3707	6-707-472-01	IC PST3813UL			
C5624	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC4541	6-702-362-01	IC MM1563DFBE			
C5625	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC4561	6-711-116-01	IC NJM2878F3-05 (TE2)			
C5626	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC4562	6-711-237-01	IC NJM2878F3-33 (TE2)			
C5627	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC5103	6-706-365-01	IC uPD72852AGB-8EU-A			
C5628	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC5203	6-706-487-01	IC TC7SH08FU (T5RSOYJF)			
C5629	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC5602	6-806-103-01	IC 88SA8040-TBC1C000			
C5630	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC5701	6-707-858-01	IC TC74VHC00FT (EKJ)			
C5631	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	IC5804	8-759-680-49	IC TC7WB125FK (TE85R)			
C5632	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	< JACK >					
C5640	1-164-854-11	CERAMIC CHIP	15PF	5%	50V	JA5701	1-793-446-21	JACK, PIN 1P (DIGITAL OUT)			
C5641	1-164-854-11	CERAMIC CHIP	15PF	5%	50V	JA5801	1-821-450-12	CONNECTOR, HDMI			
C5702	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V						
C5705	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V						
C5706	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V						
C5707	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V						
C5708	1-126-210-21	ELECT CHIP	220uF	20%	4V						
C5709	1-165-908-11	CERAMIC CHIP	1uF	10%	10V						
C5801	1-114-130-11	CERAMIC CHIP	1uF	10%	6.3V						
C5802	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V						

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
< COIL >				R116	1-218-959-11	RES-CHIP 3.3K	5% 1/16W
L105	1-469-967-21	INDUCTOR 10uH		R117	1-218-939-11	RES-CHIP 68	5% 1/16W
L1005	1-412-008-31	INDUCTOR 15uH		R119	1-218-990-81	SHORT CHIP 0	
L1801	1-412-958-21	INDUCTOR 39uH		R124	1-218-990-81	SHORT CHIP 0	
L1811	1-412-953-11	INDUCTOR 15uH		R128	1-218-990-81	SHORT CHIP 0	
L3301	1-412-954-11	INDUCTOR 18uH		R129	1-218-990-81	SHORT CHIP 0	
L3302	1-412-951-11	INDUCTOR 10uH		R130	1-218-945-11	RES-CHIP 220	5% 1/16W
L3303	1-412-954-11	INDUCTOR 18uH		R131	1-218-945-11	RES-CHIP 220	5% 1/16W
L3304	1-412-951-11	INDUCTOR 10uH		R132	1-218-945-11	RES-CHIP 220	5% 1/16W
L3305	1-412-954-11	INDUCTOR 18uH		R133	1-218-945-11	RES-CHIP 220	5% 1/16W
L3306	1-412-951-11	INDUCTOR 10uH		R134	1-218-973-11	RES-CHIP 47K	5% 1/16W
L3307	1-412-954-11	INDUCTOR 18uH		R135	1-218-945-11	RES-CHIP 220	5% 1/16W
L3308	1-412-951-11	INDUCTOR 10uH		R136	1-218-945-11	RES-CHIP 220	5% 1/16W
L4551	1-469-967-21	INDUCTOR 10uH		R137	1-218-945-11	RES-CHIP 220	5% 1/16W
L5101	1-414-235-22	INDUCTOR, FERRITE BEAD		R138	1-218-973-11	RES-CHIP 47K	5% 1/16W
L5201	1-456-799-11	COIL, COMMON MODE CHOKE		R139	1-218-945-11	RES-CHIP 220	5% 1/16W
L5202	1-456-799-11	COIL, COMMON MODE CHOKE		R165	1-218-952-11	RES-CHIP 820	5% 1/16W
L5701	1-400-330-21	INDUCTOR, FERRITE BEAD (1608)		R166	1-218-952-11	RES-CHIP 820	5% 1/16W
L5801	1-457-374-21	COMMON MODE CHOKE COIL		R167	1-218-952-11	RES-CHIP 820	5% 1/16W
L5802	1-457-374-21	COMMON MODE CHOKE COIL		R168	1-218-990-81	SHORT CHIP 0	
L5803	1-457-374-21	COMMON MODE CHOKE COIL		R170	1-218-959-11	RES-CHIP 3.3K	5% 1/16W
L5804	1-457-374-21	COMMON MODE CHOKE COIL		R171	1-218-959-11	RES-CHIP 3.3K	5% 1/16W
< TRANSISTOR >				R172	1-218-959-11	RES-CHIP 3.3K	5% 1/16W
Q1801	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R174	1-218-863-11	METAL CHIP 4.7K	0.5% 1/10W
Q1811	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R192	1-216-833-11	METAL CHIP 10K	5% 1/10W
Q2501	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R193	1-218-990-81	SHORT CHIP 0	
Q2502	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R202	1-218-935-11	RES-CHIP 33	5% 1/16W
Q2503	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R203	1-218-935-11	RES-CHIP 33	5% 1/16W
Q2504	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R204	1-242-963-21	RES, NETWORK 33 (1005X4)	
Q2505	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R205	1-242-963-21	RES, NETWORK 33 (1005X4)	
Q3301	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R206	1-242-963-21	RES, NETWORK 33 (1005X4)	
Q3302	8-729-905-35	TRANSISTOR 2SC4081-R		R210	1-218-935-11	RES-CHIP 33	5% 1/16W
Q3303	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R211	1-218-990-81	SHORT CHIP 0	
Q3304	8-729-905-35	TRANSISTOR 2SC4081-R		R219	1-234-377-21	RES, NETWORK 4.7K (1005X4)	
Q3305	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R220	1-234-377-21	RES, NETWORK 4.7K (1005X4)	
Q3306	8-729-905-35	TRANSISTOR 2SC4081-R		R221	1-218-973-11	RES-CHIP 47K	5% 1/16W
Q3307	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R222	1-218-973-11	RES-CHIP 47K	5% 1/16W
Q3308	8-729-905-35	TRANSISTOR 2SC4081-R		R223	1-218-933-11	RES-CHIP 22	5% 1/16W
Q5701	8-729-905-35	TRANSISTOR 2SC4081-R		R230	1-218-990-81	SHORT CHIP 0	
Q5801	6-550-376-01	TRANSISTOR UMX1N-TN		R233	1-218-990-81	SHORT CHIP 0	
Q5804	8-729-029-06	TRANSISTOR DTC124EUA-T106		R234	1-218-990-81	SHORT CHIP 0	
Q5805	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R248	1-218-965-11	RES-CHIP 10K	5% 1/16W
Q5808	8-729-031-34	TRANSISTOR 2SK2034		R252	1-218-965-11	RES-CHIP 10K	5% 1/16W
Q5809	8-729-029-06	TRANSISTOR DTC124EUA-T106		R253	1-218-965-11	RES-CHIP 10K	5% 1/16W
Q5811	8-729-028-83	TRANSISTOR DTA124EUA-T106		R256	1-218-965-11	RES-CHIP 10K	5% 1/16W
< RESISTOR >				R257	1-218-965-11	RES-CHIP 10K	5% 1/16W
R104	1-218-966-11	RES-CHIP 12K	5% 1/16W	R271	1-216-295-91	SHORT CHIP 0	
R105	1-218-990-81	SHORT CHIP 0		R273	1-216-295-91	SHORT CHIP 0	
R107	1-218-973-11	RES-CHIP 47K	5% 1/16W	R274	1-216-295-91	SHORT CHIP 0	
R108	1-218-963-11	RES-CHIP 6.8K	5% 1/16W	R281	1-218-990-81	SHORT CHIP 0	
R109	1-208-702-11	METAL CHIP 6.2K	0.5% 1/16W	R301	1-218-973-11	RES-CHIP 47K	5% 1/16W
R110	1-218-953-11	RES-CHIP 1K	5% 1/16W	R306	1-218-957-11	RES-CHIP 2.2K	5% 1/16W
R111	1-218-985-11	RES-CHIP 470K	5% 1/16W	R307	1-218-957-11	RES-CHIP 2.2K	5% 1/16W
R112	1-218-985-11	RES-CHIP 470K	5% 1/16W	R310	1-218-953-11	RES-CHIP 1K	5% 1/16W
R114	1-218-971-11	RES-CHIP 33K	5% 1/16W	R311	1-218-953-11	RES-CHIP 1K	5% 1/16W
R115	1-218-990-81	SHORT CHIP 0		R312	1-218-953-11	RES-CHIP 1K	5% 1/16W
				R313	1-218-973-11	RES-CHIP 47K	5% 1/16W
				R314	1-218-953-11	RES-CHIP 1K	5% 1/16W
				R317	1-242-963-21	RES, NETWORK 33 (1005X4)	
				R318	1-242-963-21	RES, NETWORK 33 (1005X4)	

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R319	1-242-963-21	RES, NETWORK	33 (1005X4)			R1197	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R320	1-242-963-21	RES, NETWORK	33 (1005X4)			R1199	1-218-965-11	RES-CHIP	10K	5%	1/16W
R503	1-218-953-11	RES-CHIP	1K	5%	1/16W	R1205	1-218-965-11	RES-CHIP	10K	5%	1/16W
R504	1-218-953-11	RES-CHIP	1K	5%	1/16W	R1219	1-218-990-81	SHORT CHIP	0		
R505	1-218-966-11	RES-CHIP	12K	5%	1/16W	R1240	1-218-933-11	RES-CHIP	22	5%	1/16W
R506	1-218-953-11	RES-CHIP	1K	5%	1/16W	R1241	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R507	1-218-953-11	RES-CHIP	1K	5%	1/16W	R1242	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R510	1-217-907-11	RES-CHIP	1.8	5%	1/10W	R1243	1-218-990-81	SHORT CHIP	0		
R511	1-217-907-11	RES-CHIP	1.8	5%	1/10W	R1244	1-218-935-11	RES-CHIP	33	5%	1/16W
R515	1-218-971-11	RES-CHIP	33K	5%	1/16W	R1245	1-234-370-21	RES, NETWORK	22 (1005X4)		
R516	1-218-966-11	RES-CHIP	12K	5%	1/16W	R1246	1-234-370-21	RES, NETWORK	22 (1005X4)		
R601	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1247	1-218-933-11	RES-CHIP	22	5%	1/16W
R602	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1248	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R603	1-218-953-11	RES-CHIP	1K	5%	1/16W	R1249	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R604	1-218-953-11	RES-CHIP	1K	5%	1/16W	R1250	1-218-990-81	SHORT CHIP	0		
R1001	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1251	1-218-935-11	RES-CHIP	33	5%	1/16W
R1003	1-218-843-11	METAL CHIP	680	0.5%	1/10W	R1252	1-218-935-11	RES-CHIP	33	5%	1/16W
R1004	1-218-839-11	METAL CHIP	470	0.5%	1/10W	R1255	1-234-370-21	RES, NETWORK	22 (1005X4)		
R1005	1-218-967-11	RES-CHIP	15K	5%	1/16W	R1256	1-234-370-21	RES, NETWORK	22 (1005X4)		
R1006	1-218-967-11	RES-CHIP	15K	5%	1/16W	R1257	1-218-933-11	RES-CHIP	22	5%	1/16W
R1013	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1258	1-218-933-11	RES-CHIP	22	5%	1/16W
R1016	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1260	1-218-933-11	RES-CHIP	22	5%	1/16W
R1017	1-218-990-81	SHORT CHIP	0			R1261	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R1018	1-218-990-81	SHORT CHIP	0			R1262	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R1019	1-218-990-81	SHORT CHIP	0			R1263	1-218-990-81	SHORT CHIP	0		
R1021	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1264	1-218-935-11	RES-CHIP	33	5%	1/16W
R1027	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1265	1-234-370-21	RES, NETWORK	22 (1005X4)		
R1028	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1266	1-234-370-21	RES, NETWORK	22 (1005X4)		
R1029	1-218-940-11	RES-CHIP	82	5%	1/16W	R1267	1-218-933-11	RES-CHIP	22	5%	1/16W
R1030	1-218-937-11	RES-CHIP	47	5%	1/16W	R1268	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R1031	1-218-943-11	RES-CHIP	150	5%	1/16W	R1269	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R1032	1-234-378-21	RES, NETWORK	10K (1005X4)			R1270	1-218-990-81	SHORT CHIP	0		
R1033	1-234-378-21	RES, NETWORK	10K (1005X4)			R1271	1-218-935-11	RES-CHIP	33	5%	1/16W
R1034	1-234-378-21	RES, NETWORK	10K (1005X4)			R1272	1-218-935-11	RES-CHIP	33	5%	1/16W
R1035	1-234-378-21	RES, NETWORK	10K (1005X4)			R1273	1-234-370-21	RES, NETWORK	22 (1005X4)		
R1036	1-211-984-11	METAL CHIP	43	0.5%	1/10W	R1274	1-234-370-21	RES, NETWORK	22 (1005X4)		
R1037	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R1275	1-218-933-11	RES-CHIP	22	5%	1/16W
R1039	1-211-984-11	METAL CHIP	43	0.5%	1/10W	R1276	1-218-933-11	RES-CHIP	22	5%	1/16W
R1040	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R1277	1-218-990-81	SHORT CHIP	0		
R1060	1-218-990-81	SHORT CHIP	0			R1278	1-218-990-81	SHORT CHIP	0		
R1061	1-218-990-81	SHORT CHIP	0			R1279	1-218-940-11	RES-CHIP	82	5%	1/16W
R1062	1-218-990-81	SHORT CHIP	0			R1281	1-234-371-21	RES, NETWORK	47 (1005X4)		
R1063	1-218-990-81	SHORT CHIP	0			R1282	1-234-371-21	RES, NETWORK	47 (1005X4)		
R1067	1-218-973-11	RES-CHIP	47K	5%	1/16W	R1283	1-234-371-21	RES, NETWORK	47 (1005X4)		
R1068	1-218-973-11	RES-CHIP	47K	5%	1/16W	R1284	1-218-937-11	RES-CHIP	47	5%	1/16W
R1069	1-218-973-11	RES-CHIP	47K	5%	1/16W	R1285	1-218-937-11	RES-CHIP	47	5%	1/16W
R1071	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1286	1-218-937-11	RES-CHIP	47	5%	1/16W
R1103	1-218-990-81	SHORT CHIP	0			R1287	1-234-371-21	RES, NETWORK	47 (1005X4)		
R1107	1-218-990-81	SHORT CHIP	0			R1288	1-218-933-11	RES-CHIP	22	5%	1/16W
R1110	1-218-990-81	SHORT CHIP	0			R1289	1-218-933-11	RES-CHIP	22	5%	1/16W
R1111	1-218-977-11	RES-CHIP	100K	5%	1/16W	R1301	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R1132	1-218-937-11	RES-CHIP	47	5%	1/16W	R1302	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1153	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1303	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1161	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1305	1-218-990-81	SHORT CHIP	0		
R1163	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1312	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1165	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1313	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1181	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1315	1-216-864-11	SHORT CHIP	0		
R1182	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1401	1-218-933-11	RES-CHIP	22	5%	1/16W
R1191	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1402	1-218-933-11	RES-CHIP	22	5%	1/16W
R1195	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1403	1-218-933-11	RES-CHIP	22	5%	1/16W

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R1404	1-218-933-11	RES-CHIP	22	5%	1/16W	R3207	1-218-937-11	RES-CHIP	47	5%	1/16W
R1405	1-218-933-11	RES-CHIP	22	5%	1/16W	R3208	1-218-937-11	RES-CHIP	47	5%	1/16W
R1406	1-218-933-11	RES-CHIP	22	5%	1/16W	R3209	1-218-977-11	RES-CHIP	100K	5%	1/16W
R1407	1-218-933-11	RES-CHIP	22	5%	1/16W	R3210	1-218-849-11	METAL CHIP	1.2K	0.5%	1/10W
R1411	1-234-378-21	RES, NETWORK	10K (1005X4)			R3211	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R1412	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3213	1-218-951-11	RES-CHIP	680	5%	1/16W
R1413	1-218-973-11	RES-CHIP	47K	5%	1/16W	R3214	1-218-963-11	RES-CHIP	6.8K	5%	1/16W
R1414	1-218-933-11	RES-CHIP	22	5%	1/16W	R3215	1-218-969-11	RES-CHIP	22K	5%	1/16W
R1415	1-218-933-11	RES-CHIP	22	5%	1/16W	R3216	1-218-849-11	METAL CHIP	1.2K	0.5%	1/10W
R1416	1-218-933-11	RES-CHIP	22	5%	1/16W	R3217	1-218-871-11	METAL CHIP	10K	0.5%	1/10W
R1421	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3218	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R1422	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3219	1-218-963-11	RES-CHIP	6.8K	5%	1/16W
R1802	1-218-945-11	RES-CHIP	220	5%	1/16W	R3220	1-218-941-81	RES-CHIP	100	5%	1/16W
R1803	1-218-947-11	RES-CHIP	330	5%	1/16W	R3221	1-218-941-81	RES-CHIP	100	5%	1/16W
R1804	1-218-935-11	RES-CHIP	33	5%	1/16W	R3222	1-218-963-11	RES-CHIP	6.8K	5%	1/16W
R1812	1-218-945-11	RES-CHIP	220	5%	1/16W	R3223	1-218-879-11	METAL CHIP	22K	0.5%	1/10W
R1813	1-218-947-11	RES-CHIP	330	5%	1/16W	R3224	1-218-941-81	RES-CHIP	100	5%	1/16W
R1814	1-218-935-11	RES-CHIP	33	5%	1/16W	R3227	1-218-941-81	RES-CHIP	100	5%	1/16W
R2301	1-218-959-11	RES-CHIP	3.3K	5%	1/16W	R3228	1-218-965-11	RES-CHIP	10K	5%	1/16W
R2302	1-218-990-81	SHORT CHIP	0			R3229	1-218-965-11	RES-CHIP	10K	5%	1/16W
R2304	1-218-990-81	SHORT CHIP	0			R3230	1-216-295-91	SHORT CHIP	0		
R2316	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3232	1-218-990-81	SHORT CHIP	0		
R2501	1-218-951-11	RES-CHIP	680	5%	1/16W	R3233	1-218-990-81	SHORT CHIP	0		
R2502	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R3234	1-218-990-81	SHORT CHIP	0		
R2504	1-218-951-11	RES-CHIP	680	5%	1/16W	R3301	1-218-937-11	RES-CHIP	47	5%	1/16W
R2505	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R3302	1-218-937-11	RES-CHIP	47	5%	1/16W
R2506	1-216-864-11	SHORT CHIP	0			R3305	1-218-947-11	RES-CHIP	330	5%	1/16W
R2507	1-218-951-11	RES-CHIP	680	5%	1/16W	R3306	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R2508	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R3307	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W
R2510	1-218-951-11	RES-CHIP	680	5%	1/16W	R3308	1-218-929-11	RES-CHIP	10	5%	1/16W
R2511	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R3309	1-218-951-11	RES-CHIP	680	5%	1/16W
R2513	1-218-951-11	RES-CHIP	680	5%	1/16W	R3312	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R2514	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R3313	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W
R3002	1-218-939-11	RES-CHIP	68	5%	1/16W	R3314	1-218-929-11	RES-CHIP	10	5%	1/16W
R3003	1-218-940-11	RES-CHIP	82	5%	1/16W	R3315	1-218-951-11	RES-CHIP	680	5%	1/16W
R3004	1-218-940-11	RES-CHIP	82	5%	1/16W	R3317	1-218-947-11	RES-CHIP	330	5%	1/16W
R3005	1-234-378-21	RES, NETWORK	10K (1005X4)			R3318	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R3006	1-218-990-81	SHORT CHIP	0			R3319	1-218-929-11	RES-CHIP	10	5%	1/16W
R3007	1-218-990-81	SHORT CHIP	0			R3320	1-218-951-11	RES-CHIP	680	5%	1/16W
R3008	1-218-990-81	SHORT CHIP	0			R3322	1-218-947-11	RES-CHIP	330	5%	1/16W
R3009	1-218-990-81	SHORT CHIP	0			R3323	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R3010	1-218-990-81	SHORT CHIP	0			R3324	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W
R3011	1-218-990-81	SHORT CHIP	0			R3325	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W
R3012	1-218-990-81	SHORT CHIP	0			R3326	1-218-929-11	RES-CHIP	10	5%	1/16W
R3101	1-218-990-81	SHORT CHIP	0			R3327	1-218-951-11	RES-CHIP	680	5%	1/16W
R3102	1-218-990-81	SHORT CHIP	0			R3336	1-218-937-11	RES-CHIP	47	5%	1/16W
R3103	1-218-990-81	SHORT CHIP	0			R3341	1-218-937-11	RES-CHIP	47	5%	1/16W
R3104	1-218-990-81	SHORT CHIP	0			R3344	1-218-947-11	RES-CHIP	330	5%	1/16W
R3105	1-218-989-11	RES-CHIP	1M	5%	1/16W	R3703	1-218-941-81	RES-CHIP	100	5%	1/16W
R3106	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3704	1-218-941-81	RES-CHIP	100	5%	1/16W
R3107	1-218-937-11	RES-CHIP	47	5%	1/16W	R3705	1-218-941-81	RES-CHIP	100	5%	1/16W
R3108	1-218-937-11	RES-CHIP	47	5%	1/16W	R3708	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3109	1-218-937-11	RES-CHIP	47	5%	1/16W	R3715	1-218-990-81	SHORT CHIP	0		
R3111	1-218-990-81	SHORT CHIP	0			R3716	1-218-935-11	RES-CHIP	33	5%	1/16W
R3113	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3720	1-218-990-81	SHORT CHIP	0		
R3201	1-218-937-11	RES-CHIP	47	5%	1/16W	R3737	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3202	1-218-937-11	RES-CHIP	47	5%	1/16W	R3738	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3203	1-218-937-11	RES-CHIP	47	5%	1/16W	R3808	1-218-941-81	RES-CHIP	100	5%	1/16W
R3204	1-218-990-81	SHORT CHIP	0			R3810	1-242-963-21	RES, NETWORK	33 (1005X4)		
R3206	1-218-937-11	RES-CHIP	47	5%	1/16W	R3811	1-242-963-21	RES, NETWORK	33 (1005X4)		

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R3812	1-242-963-21	RES, NETWORK	33 (1005X4)			R4708	1-234-378-21	RES, NETWORK	10K (1005X4)		
R3813	1-242-963-21	RES, NETWORK	33 (1005X4)			R4709	1-234-378-21	RES, NETWORK	10K (1005X4)		
R3814	1-218-933-11	RES-CHIP	22	5%	1/16W	R4710	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3816	1-218-940-11	RES-CHIP	82	5%	1/16W	R4711	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3817	1-218-940-11	RES-CHIP	82	5%	1/16W	R4712	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3818	1-218-933-11	RES-CHIP	22	5%	1/16W	R4713	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3820	1-218-940-11	RES-CHIP	82	5%	1/16W	R4714	1-218-990-81	SHORT CHIP	0		
R3821	1-218-933-11	RES-CHIP	22	5%	1/16W	R4721	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R3823	1-218-940-11	RES-CHIP	82	5%	1/16W	R4722	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R3824	1-242-962-21	RES, NETWORK	82 (1005X4)			R4723	1-218-990-81	SHORT CHIP	0		
* R3828	1-234-380-21	RES, NETWORK	47K (1005X4)			R4724	1-218-990-81	SHORT CHIP	0		
* R3829	1-234-380-21	RES, NETWORK	47K (1005X4)			R4725	1-218-990-81	SHORT CHIP	0		
* R3830	1-234-380-21	RES, NETWORK	47K (1005X4)			R4726	1-218-990-81	SHORT CHIP	0		
* R3831	1-234-380-21	RES, NETWORK	47K (1005X4)			R4727	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3832	1-234-379-21	RES, NETWORK	22K (1005X4)			R4728	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3833	1-234-379-21	RES, NETWORK	22K (1005X4)			R4729	1-218-990-81	SHORT CHIP	0		
R3835	1-218-935-11	RES-CHIP	33	5%	1/16W	R4731	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3837	1-242-963-21	RES, NETWORK	33 (1005X4)			R4732	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3838	1-242-963-21	RES, NETWORK	33 (1005X4)			R5101	1-234-381-11	RES, NETWORK	100K (1005X4)		
R3839	1-242-963-21	RES, NETWORK	33 (1005X4)			R5102	1-234-381-11	RES, NETWORK	100K (1005X4)		
R3840	1-242-963-21	RES, NETWORK	33 (1005X4)			R5103	1-218-977-11	RES-CHIP	100K	5%	1/16W
R3841	1-218-940-11	RES-CHIP	82	5%	1/16W	R5104	1-218-977-11	RES-CHIP	100K	5%	1/16W
R3842	1-218-962-11	RES-CHIP	5.6K	5%	1/16W	R5105	1-234-702-11	RES, NETWORK	68 (1005X4)		
R3843	1-218-933-11	RES-CHIP	22	5%	1/16W	R5106	1-234-702-11	RES, NETWORK	68 (1005X4)		
R3844	1-218-933-11	RES-CHIP	22	5%	1/16W	R5107	1-218-939-11	RES-CHIP	68	5%	1/16W
R3845	1-218-940-11	RES-CHIP	82	5%	1/16W	R5108	1-218-939-11	RES-CHIP	68	5%	1/16W
R3846	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5109	1-218-937-11	RES-CHIP	47	5%	1/16W
R3847	1-218-933-11	RES-CHIP	22	5%	1/16W	R5110	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3848	1-218-940-11	RES-CHIP	82	5%	1/16W	R5111	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3849	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5113	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3850	1-218-935-11	RES-CHIP	33	5%	1/16W	R5114	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3851	1-242-963-21	RES, NETWORK	33 (1005X4)			R5115	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3857	1-218-990-81	SHORT CHIP	0			R5116	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3862	1-218-990-81	SHORT CHIP	0			R5117	1-218-977-11	RES-CHIP	100K	5%	1/16W
R3871	1-218-969-11	RES-CHIP	22K	5%	1/16W	R5118	1-218-870-11	METAL CHIP	9.1K	0.5%	1/10W
R4501	1-216-295-91	SHORT CHIP	0			R5119	1-211-987-11	METAL CHIP	56	0.5%	1/10W
R4504	1-216-059-00	RES-CHIP	2.7K	5%	1/10W	R5120	1-211-987-11	METAL CHIP	56	0.5%	1/10W
R4505	1-216-059-00	RES-CHIP	2.7K	5%	1/10W	R5121	1-211-987-11	METAL CHIP	56	0.5%	1/10W
R4507	1-216-059-00	RES-CHIP	2.7K	5%	1/10W	R5122	1-211-987-11	METAL CHIP	56	0.5%	1/10W
R4511	1-218-990-81	SHORT CHIP	0			R5123	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4521	1-218-963-11	RES-CHIP	6.8K	5%	1/16W	R5124	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4531	1-218-990-81	SHORT CHIP	0			R5125	1-218-953-11	RES-CHIP	1K	5%	1/16W
R4541	1-218-990-81	SHORT CHIP	0			R5127	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4552	1-216-295-91	SHORT CHIP	0			R5129	1-218-940-11	RES-CHIP	82	5%	1/16W
R4553	1-216-295-91	SHORT CHIP	0			R5130	1-218-990-81	SHORT CHIP	0		
R4554	1-216-295-91	SHORT CHIP	0			R5131	1-218-864-11	METAL CHIP	5.1K	0.5%	1/10W
R4556	1-216-295-91	SHORT CHIP	0			R5132	1-218-990-81	SHORT CHIP	0		
R4558	1-218-969-11	RES-CHIP	22K	5%	1/16W	R5133	1-218-990-81	SHORT CHIP	0		
R4559	1-218-990-81	SHORT CHIP	0			R5134	1-218-990-81	SHORT CHIP	0		
R4573	1-218-990-81	SHORT CHIP	0			R5135	1-218-990-81	SHORT CHIP	0		
R4574	1-216-864-11	SHORT CHIP	0			R5140	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4575	1-216-864-11	SHORT CHIP	0			R5141	1-218-990-81	SHORT CHIP	0		
R4582	1-216-295-91	SHORT CHIP	0			R5201	1-218-990-81	SHORT CHIP	0		
* R4701	1-234-714-11	RES, NETWORK	56 (1005X4)			R5202	1-218-990-81	SHORT CHIP	0		
* R4702	1-234-714-11	RES, NETWORK	56 (1005X4)			R5205	1-218-939-11	RES-CHIP	68	5%	1/16W
R4703	1-218-929-11	RES-CHIP	10	5%	1/16W	R5207	1-218-990-81	SHORT CHIP	0		
R4704	1-218-941-81	RES-CHIP	100	5%	1/16W	R5212	1-218-990-81	SHORT CHIP	0		
R4705	1-218-941-81	RES-CHIP	100	5%	1/16W	R5213	1-218-990-81	SHORT CHIP	0		
R4706	1-218-935-11	RES-CHIP	33	5%	1/16W	R5214	1-218-973-11	RES-CHIP	47K	5%	1/16W
R4707	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5215	1-218-973-11	RES-CHIP	47K	5%	1/16W

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R5216	1-218-990-81	SHORT CHIP	0			R5806	1-218-953-11	RES-CHIP	1K	5%	1/16W
R5217	1-218-990-81	SHORT CHIP	0			R5807	1-218-962-11	RES-CHIP	5.6K	5%	1/16W
R5220	1-218-851-11	METAL CHIP	1.5K	0.5%	1/10W	R5808	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5221	1-218-973-11	RES-CHIP	47K	5%	1/16W	R5809	1-218-958-11	RES-CHIP	2.7K	5%	1/16W
R5222	1-218-929-11	RES-CHIP	10	5%	1/16W	R5812	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5445	1-216-295-91	SHORT CHIP	0			R5813	1-218-958-11	RES-CHIP	2.7K	5%	1/16W
R5606	1-218-940-11	RES-CHIP	82	5%	1/16W	R5814	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5607	1-218-940-11	RES-CHIP	82	5%	1/16W	R5815	1-218-958-11	RES-CHIP	2.7K	5%	1/16W
R5608	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5817	1-218-958-11	RES-CHIP	2.7K	5%	1/16W
R5609	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5818	1-218-958-11	RES-CHIP	2.7K	5%	1/16W
R5610	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5821	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5612	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5822	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5613	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5824	1-163-038-91	CERAMIC CHIP	0.1uF		25V
R5614	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5825	1-234-370-21	RES, NETWORK	22 (1005X4)		
R5615	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5826	1-234-370-21	RES, NETWORK	22 (1005X4)		
R5617	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5827	1-234-370-21	RES, NETWORK	22 (1005X4)		
R5618	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5828	1-234-370-21	RES, NETWORK	22 (1005X4)		
R5619	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5829	1-218-938-11	RES-CHIP	56	5%	1/16W
R5622	1-218-940-11	RES-CHIP	82	5%	1/16W	R5831	1-218-990-81	SHORT CHIP	0		
R5623	1-218-940-11	RES-CHIP	82	5%	1/16W	R5833	1-218-933-11	RES-CHIP	22	5%	1/16W
R5624	1-218-940-11	RES-CHIP	82	5%	1/16W	R5834	1-218-933-11	RES-CHIP	22	5%	1/16W
R5626	1-218-933-11	RES-CHIP	22	5%	1/16W	R5836	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5627	1-218-940-11	RES-CHIP	82	5%	1/16W	R5837	1-218-990-81	SHORT CHIP	0		
R5628	1-218-933-11	RES-CHIP	22	5%	1/16W	R5838	1-218-935-11	RES-CHIP	33	5%	1/16W
R5629	1-218-940-11	RES-CHIP	82	5%	1/16W	R5839	1-218-949-11	RES-CHIP	470	5%	1/16W
R5630	1-218-940-11	RES-CHIP	82	5%	1/16W	R5842	1-218-947-11	RES-CHIP	330	5%	1/16W
R5631	1-218-933-11	RES-CHIP	22	5%	1/16W	R5843	1-218-947-11	RES-CHIP	330	5%	1/16W
R5632	1-242-963-21	RES, NETWORK	33 (1005X4)			R5844	1-218-947-11	RES-CHIP	330	5%	1/16W
R5638	1-242-963-21	RES, NETWORK	33 (1005X4)			R5845	1-218-947-11	RES-CHIP	330	5%	1/16W
R5642	1-242-963-21	RES, NETWORK	33 (1005X4)			R5846	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5646	1-242-963-21	RES, NETWORK	33 (1005X4)			R5848	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5650	1-218-940-11	RES-CHIP	82	5%	1/16W	R5852	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5651	1-218-873-11	METAL CHIP	12K	0.5%	1/10W	R5853	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5652	1-218-941-81	RES-CHIP	100	5%	1/16W	R5854	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5657	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5855	1-234-369-21	RES, NETWORK	10 (1005X4)		
R5658	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5856	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5659	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5857	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5661	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5859	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5664	1-216-864-11	SHORT CHIP	0			R5861	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5672	1-216-864-11	SHORT CHIP	0			R5862	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5688	1-218-989-11	RES-CHIP	1M	5%	1/16W	R5863	1-218-951-11	RES-CHIP	680	5%	1/16W
R5689	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5864	1-218-953-11	RES-CHIP	1K	5%	1/16W
R5690	1-218-990-81	SHORT CHIP	0			R5865	1-218-990-81	SHORT CHIP	0		
R5692	1-218-990-81	SHORT CHIP	0			R5867	1-218-950-11	RES-CHIP	560	5%	1/16W
R5693	1-218-990-81	SHORT CHIP	0			R5868	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R5701	1-218-949-11	RES-CHIP	470	5%	1/16W	R5869	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5702	1-218-949-11	RES-CHIP	470	5%	1/16W	R5870	1-218-970-11	RES-CHIP	27K	5%	1/16W
R5703	1-218-951-11	RES-CHIP	680	5%	1/16W	R5880	1-218-977-11	RES-CHIP	100K	5%	1/16W
R5704	1-218-943-11	RES-CHIP	150	5%	1/16W	R6001	1-218-990-81	SHORT CHIP	0		
R5705	1-216-864-11	SHORT CHIP	0			< VIBRATOR >					
R5706	1-211-990-11	METAL CHIP	75	0.5%	1/10W	X5101	1-813-049-21	VIBRATOR, CRYSTAL (24.576MHz)			
R5707	1-218-977-11	RES-CHIP	100K	5%	1/16W	X5201	1-795-904-21	OSCILLATOR, CRYSTAL (48MHz)			
R5803	1-164-360-11	CERAMIC CHIP	0.1uF		16V	X5502	1-813-052-21	VIBRATOR, CRYSTAL (25MHz)			
R5804	1-218-973-11	RES-CHIP	47K	5%	1/16W	*****					
R5805	1-218-961-11	RES-CHIP	4.7K	5%	1/16W						

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Remarks</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Remarks</u>
		ACCESSORIES					

	1-480-698-11	REMOTE COMMANDER (RMT-D251P)					
		(AEP, UK)					
	1-480-700-11	REMOTE COMMANDER (RMT-D2510) (AUS)					
△	1-575-131-82	CORD, POWER (AEP)					
	1-759-586-41	CONTROLLER, VIDEO (AV MOUSE) (AEP, UK)					
	1-696-593-11	CORD, CONNECTION (PAL)					
	1-828-145-11	CORD, CONNECTION (AV) (AUS)					
△	1-827-269-12	CORD, POWER (UK)					
△	1-555-074-52	CORD, POWER (AUS)					
	1-769-451-21	CORD, CONNECTION					
	3-295-080-11	MANUAL, INSTRUCTION (ENGLISH) (UK)					
	3-295-080-21	MANUAL, INSTRUCTION (FRENCH)					
		(AEP1, AEP3)					
	3-295-080-31	MANUAL, INSTRUCTION (GERMAN) (AEP1)					
	3-295-080-41	MANUAL, INSTRUCTION (ITALIAN) (AEP1)					
	3-295-080-51	MANUAL, INSTRUCTION (SPANISH) (AEP1)					
	3-295-080-61	MANUAL, INSTRUCTION (DUTCH)					
		(AEP1, AEP2)					
	3-295-080-71	MANUAL, INSTRUCTION (DANISH) (AEP2)					
	3-295-080-81	MANUAL, INSTRUCTION (SWEDISH) (AEP2)					
	3-295-080-91	MANUAL, INSTRUCTION (FINNISH) (AEP2)					
	3-879-466-11	MANUAL, INSTRUCTION (ENGLISH) (AUS)					

Note : The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.