

SECTION 8

REPAIR PARTS LIST

8-1. EXPLODED VIEWS

NOTE:


- -XX, -X mean standardized parts, so they may have some differences from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- When replacing parts, refer to “SERVICE NOTE 5. CHANGED POINTS OF SERVICE MANUAL Revised-2”. (See page 12)

- The mechanical parts with no reference number in the exploded views are not supplied.
- Color Indication of Appearance Parts
Example:
KNOB, BALANCE (WHITE) . . . (RED)
Parts Color Cabinet's Color

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.


- Abbreviation
AUS : Australian model

8-1-1. OVERALL SECTION

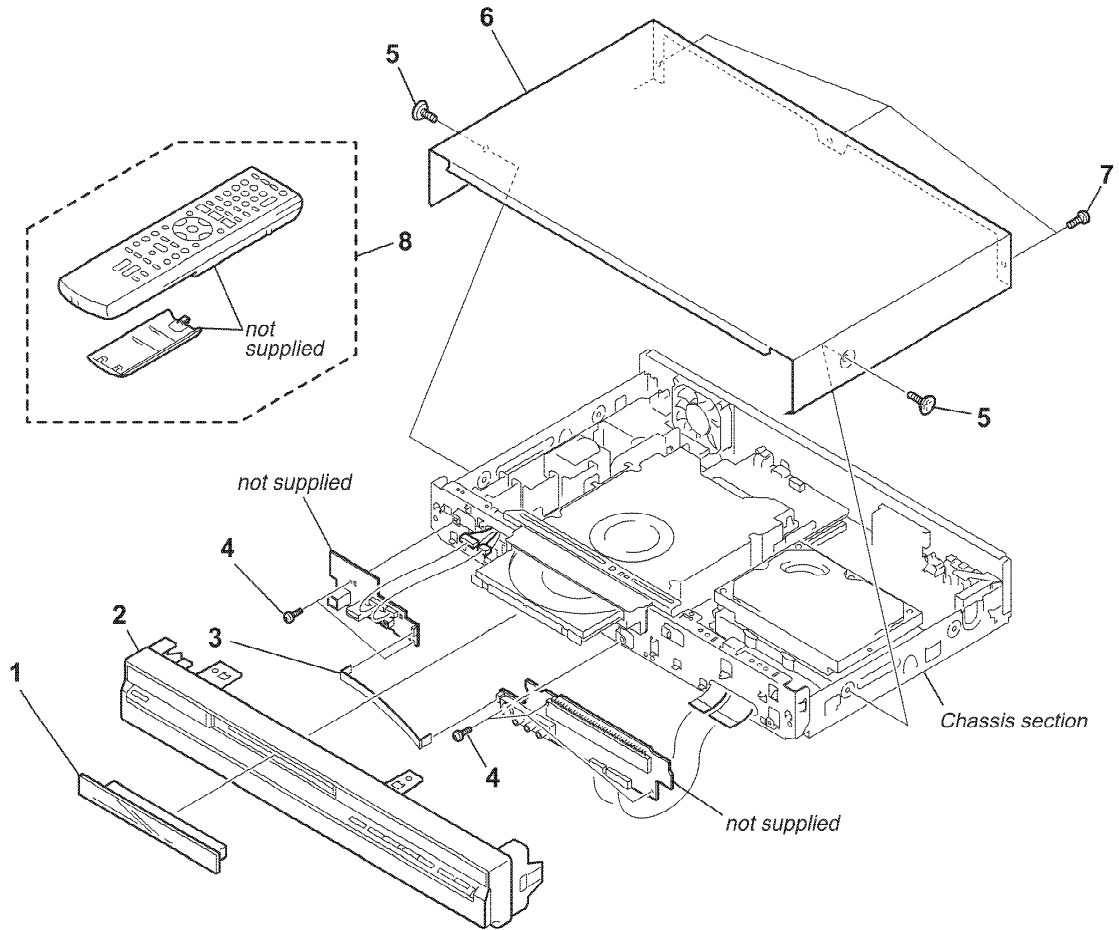

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
1	X-2176-442-1	COVER ASSY, TRAY (AEP, UK)		2	A-1367-718-A	PANEL BLOCK ASSY, FRONT (HXD970:AUS)	
1	X-2177-245-1	COVER ASSY, TRAY (AUS)		* 3	1-834-077-11	CABLE, FLEXIBLE FLAT (FLR-012)	
2	A-1259-528-A	PANEL BLOCK ASSY, FRONT (BLACK) (HXD870(BLACK):AEP1, AEP3, UK)		4	3-077-331-01	+BV3 (3-CR)	
2	A-1267-797-A	PANEL BLOCK ASSY, FRONT (SILVER) (HXD870(SILVER):AEP1, AEP3, UK)		5	3-070-883-41	SCREW, TAPPING (SILVER) (HXD870(SILVER))	
2	A-1267-983-A	PANEL BLOCK ASSY, FRONT (HXD870(BLACK):AEP2)		5	3-070-883-71	SCREW, TAPPING, CASE (BLACK) (HXD870(BLACK):AEP, UK/HXD970(BLACK):AEP, UK/HXD1070)	
2	A-1268-004-A	PANEL BLOCK ASSY, FRONT (HXD870(SILVER):AEP2)		6	2-899-646-01	CASE (DT), UPPER (BLACK) (EXCEPT HXD870(SILVER))	
2	A-1268-009-A	PANEL BLOCK ASSY, FRONT (HXD970:AEP1, AEP3, UK)		6	2-899-646-21	CASE (DT), UPPER (SILVER) (HXD870(SILVER))	
2	A-1268-031-A	PANEL BLOCK ASSY, FRONT (HXD1070:AEP1, UK)		6	A-1382-868-A	CASE (DT), BLOCK ASSY (SERVICE) (BLACK) (HXD870:AUS/HXD970:AUS)	
2	A-1268-074-A	PANEL BLOCK ASSY, FRONT (HXD970:AEP2)		6	A-1382-874-A	CASE (DT), BLOCK ASSY (SERVICE) (SILVER) (HXD870:AUS)	
2	A-1268-084-A	PANEL BLOCK ASSY, FRONT (HXD1070:AEP2)		7	3-076-563-11	SCREW, SPECIAL FRONT POINT	
2	A-1367-716-A	PANEL BLOCK ASSY, FRONT (BLACK) (HXD870(BLACK):AUS)		8	1-480-167-11	REMOTE COMMANDER (RMT-D248P) (AEP, UK)	
2	A-1367-717-A	PANEL BLOCK ASSY, FRONT (SILVER) (HXD870(SILVER):AUS)		8	1-480-526-11	REMOTE COMMANDER (RMT-D2480) (AUS)	

8-1-2. CHASSIS SECTION

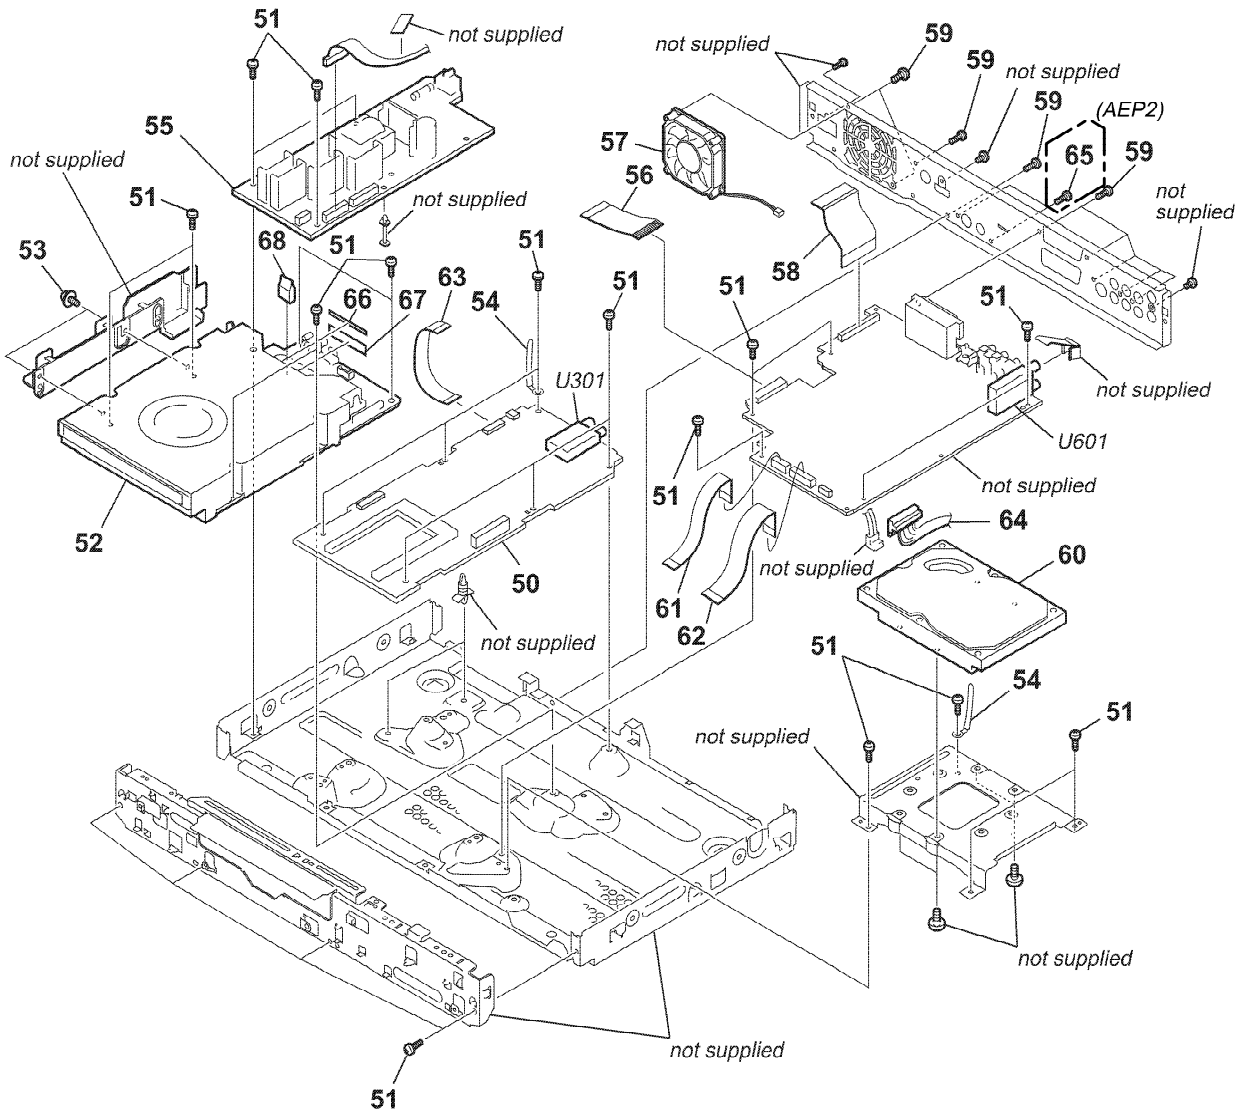

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
50	A-1259-526-A	DT-120 (AG) COMPL (AEP1, AEP3, UK)		60	A-1318-134-A	HDD(S-TONKA2-S(160GB)-E)ASSY (HXD870:AEP, UK)	
50	A-1267-979-A	DT-120 (BG) COMPL (AEP2)		61	1-834-072-11	CABLE, FLEXIBLE FLAT (FAR-006)	
50	A-1382-627-A	DT-120 (AS) COMPL (AUS)		62	1-834-074-11	CABLE, FLEXIBLE FLAT (FAR-007)	
50	A-1337-335-A	DT-123 (AG) EM COMPL (AEP1, AEP3, UK)		* 63	1-834-168-11	CABLE, FLEXIBLE FLAT (FVR-001)	
50	A-1337-337-A	DT-123 (BG) EM COMPL (AEP2)		64	1-965-191-11	HARNESS (RH-059)	
51	3-077-331-01	+BV3 (3-CR)		65	7-621-255-55	SCREW +P 2X8 (AEP2)	
△ 52	A-1271-316-A	DRW-U12SO S COMPL		66	2-684-970-01	SHIELD TAPE 1 (A)	
△ 52	A-1382-914-A	DRW-U12EM (HDD)ASSY S COMPL (AUS)		* 67	3-087-220-01	TAPE, NON-HOLOGENE	
53	7-682-947-01	SCREW +PSW 3X6		68	3-268-333-02	SHIELD, GASKET	
54	4-237-065-01	CLAMP (L35)		△ U301	1-693-743-11	TUNER (TUPADTC-D101HB)	
△ 55	1-474-047-11	REGULATOR SWITCHING (SRV2057EK)		△ U601	1-693-741-11	TUNER (TMFE2-407A)	
* 56	1-834-073-11	CABLE, FLEXIBLE FLAT (FAD-008) 24P					
* 56	1-834-481-11	CABLE, FLEXIBLE FLAT (FAD-009) 15P					
57	1-787-624-11	FAN, DC					
58	1-834-075-11	CABLE, FLEXIBLE FLAT (FRA-006)					
59	3-077-331-31	+BV3 (3-CR)					
60	A-1314-555-A	HDD(S-GALAXY-S (250GB)-E)ASSY (HXD970:AEP, UK)					
60	A-1314-556-A	HDD(S-GALAXY-S (500GB)-E)ASSY (HXD1070)					
60	A-1314-557-A	HDD(W-XL160-S (160GB)-GA)ASSY (HXD870:AUS)					
60	A-1317-949-A	HDD(S-GALAXY-S (250GB)-GA)ASSY (HXD970:AUS)					

Note : The components identified by mark △ contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

Note : The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

8-2. ELECTRICAL PARTS LIST

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX, -X mean standardized parts, so they may have some difference from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- CAPACITORS:
uF: μ F
- When replacing parts, refer to “SERVICE NOTE 5. CHANGED POINTS OF SERVICE MANUAL Revised-2”. (See page 12)

- RESISTORS
All resistors are in ohms.
METAL: metal-film resistor
METAL OXIDE: Metal Oxide-film resistor
F: nonflammable
- COILS
uH: μ H
- SEMICONDUCTORS
In each case, u: μ , for example:
uA..., μ A..., uPA..., μ PA...,
uPB..., μ PB..., uPC..., μ PC...,
uPD..., μ PD...

When indicating parts by reference number, please include the board name.

The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety. Replace only with part number specified.

- Abbreviation
AUS : Australian model
BS : RD-065 (BS) BOARD
DS : RD-065 (DS) EM BOARD

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
		AV-114 (CG) BOARD (not supplied) (AEP, UK)		C301	1-164-156-11	CERAMIC CHIP 0.1uF	25V
		AV-114 (AS) BOARD (not supplied) (AUS)		C302	1-164-156-11	CERAMIC CHIP 0.1uF	25V
		AV-118 (CG) BOARD (not supplied)		C303	1-126-933-11	ELECT 100uF	20% 16V
		(Ref.No.:10000 series)		C305	1-164-156-11	CERAMIC CHIP 0.1uF	25V
		*****		C306	1-164-156-11	CERAMIC CHIP 0.1uF	25V
		< CAPACITOR >		C307	1-126-933-11	ELECT 100uF	20% 16V
C104	1-104-662-91	ELECT 22uF	20% 25V	C308	1-126-933-11	ELECT 100uF	20% 16V
C105	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C309	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C106	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C310	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C107	1-162-959-11	CERAMIC CHIP 330PF	5% 50V	C311	1-126-934-11	ELECT 220uF	20% 16V
C109	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C312	1-126-933-11	ELECT 100uF	20% 16V
C110	1-165-908-11	CERAMIC CHIP 1uF	10% 10V	C314	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C111	1-162-919-11	CERAMIC CHIP 22PF	5% 50V	C315	1-126-933-11	ELECT 100uF	20% 16V
C112	1-162-919-11	CERAMIC CHIP 22PF	5% 50V	C316	1-126-933-11	ELECT 100uF	20% 16V
C113	1-115-156-11	CERAMIC CHIP 1uF	10V	C318	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C114	1-162-915-11	CERAMIC CHIP 10PF	0.5PF 50V	C319	1-126-933-11	ELECT 100uF	20% 16V
C115	1-162-915-11	CERAMIC CHIP 10PF	0.5PF 50V	C320	1-126-933-11	ELECT 100uF	20% 16V
C118	1-115-456-21	DOUBLE LAYER 0.22F	5.5V	C322	1-162-927-11	CERAMIC CHIP 100PF	5% 50V
C120	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C323	1-100-162-91	CERAMIC CHIP 1uF	50V
C121	1-115-156-11	CERAMIC CHIP 1uF	10V	C324	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C122	1-115-156-11	CERAMIC CHIP 1uF	10V	C326	1-126-964-11	ELECT 10uF	20% 50V
C123	1-104-655-91	ELECT 470uF	20% 6.3V	C328	1-165-621-91	CERAMIC CHIP 0.1uF	50V
C124	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C329	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C125	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C401	1-115-156-11	CERAMIC CHIP 1uF	10V
C126	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C402	1-162-927-11	CERAMIC CHIP 100PF	5% 50V
C127	1-126-933-11	ELECT 100uF	20% 16V	C403	1-162-927-11	CERAMIC CHIP 100PF	5% 50V
C131	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C404	1-115-156-11	CERAMIC CHIP 1uF	10V
C132	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C406	1-107-826-11	CERAMIC CHIP 0.1uF	10% 16V
C133	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C407	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C134	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C408	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C135	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C409	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C138	1-126-961-11	ELECT 2.2uF	20% 50V	C410	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C139	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C411	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C140	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C412	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C141	1-115-156-11	CERAMIC CHIP 1uF	10V	C413	1-107-826-11	CERAMIC CHIP 0.1uF	10% 16V
C142	1-100-831-91	CERAMIC CHIP 0.001uF	2% 50V	C414	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C149	1-162-915-11	CERAMIC CHIP 10PF	0.5PF 50V	C415	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C150	1-115-156-11	CERAMIC CHIP 1uF	10V	C418	1-115-156-11	CERAMIC CHIP 1uF	10V
C152	1-115-156-11	CERAMIC CHIP 1uF	10V	C419	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C156	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C420	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C157	1-107-826-11	CERAMIC CHIP 0.1uF	10% 16V	C421	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C202	1-164-156-11	CERAMIC CHIP 0.1uF	25V	C422	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C204	1-126-933-11	ELECT 100uF	20% 16V	C423	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C205	1-104-662-91	ELECT 22uF	20% 25V	C424	1-165-908-11	CERAMIC CHIP 1uF	10% 10V
C206	1-164-315-11	CERAMIC CHIP 470PF	5% 50V	C428	1-107-826-11	CERAMIC CHIP 0.1uF	10% 16V
C208	1-107-826-11	CERAMIC CHIP 0.1uF	10% 16V				

AV-114/118

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
C431	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C508	1-164-315-11	CERAMIC CHIP	470PF 5% 50V
C432	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C510	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C434	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C511	1-164-230-11	CERAMIC CHIP	220PF 5% 50V
C435	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C515	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C436	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C516	1-164-315-11	CERAMIC CHIP	470PF 5% 50V
C437	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C517	1-164-230-11	CERAMIC CHIP	220PF 5% 50V
C438	1-115-156-11	CERAMIC CHIP	1uF 10V	C518	1-100-831-91	CERAMIC CHIP	0.001uF 2% 50V
C439	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C519	1-164-315-11	CERAMIC CHIP	470PF 5% 50V
C440	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C520	1-100-831-91	CERAMIC CHIP	0.001uF 2% 50V
C441	1-115-156-11	CERAMIC CHIP	1uF 10V	C528	1-104-655-91	ELECT	470uF 20% 6.3V
C442	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C529	1-104-655-91	ELECT	470uF 20% 6.3V
C443	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C530	1-104-655-91	ELECT	470uF 20% 6.3V
C444	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C531	1-104-655-91	ELECT	470uF 20% 6.3V
C445	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C532	1-104-655-91	ELECT	470uF 20% 6.3V
C446	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C541	1-126-963-11	ELECT	4.7uF 20% 50V
C447	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C542	1-126-963-11	ELECT	4.7uF 20% 50V
C450	1-107-713-11	ELECT	4.7uF 20% 50V	C543	1-126-963-11	ELECT	4.7uF 20% 50V
C451	1-107-713-11	ELECT	4.7uF 20% 50V	C544	1-126-963-11	ELECT	4.7uF 20% 50V
C452	1-104-658-91	ELECT	100uF 20% 10V	C545	1-126-933-11	ELECT	100uF 20% 16V
C453	1-104-658-91	ELECT	100uF 20% 10V	C547	1-104-662-91	ELECT	22uF 20% 25V
C454	1-104-658-91	ELECT	100uF 20% 10V	C550	1-104-662-91	ELECT	22uF 20% 25V
C455	1-126-963-11	ELECT	4.7uF 20% 50V	C551	1-104-662-91	ELECT	22uF 20% 25V
C456	1-126-960-11	ELECT	1uF 20% 50V	C552	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C457	1-126-964-11	ELECT	10uF 20% 50V	C602	1-162-966-11	CERAMIC CHIP	0.0022uF 10% 50V
C458	1-104-658-91	ELECT	100uF 20% 10V	C603	1-162-966-11	CERAMIC CHIP	0.0022uF 10% 50V
C460	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C604	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C461	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C605	1-162-915-11	CERAMIC CHIP	10PF 0.5PF 50V
C462	1-115-156-11	CERAMIC CHIP	1uF 10V	C606	1-162-915-11	CERAMIC CHIP	10PF 0.5PF 50V
C463	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C608	1-125-891-11	CERAMIC CHIP	0.47uF 10% 10V
C464	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C609	1-104-658-91	ELECT	100uF 20% 10V
C468	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C611	1-126-947-11	ELECT	47uF 20% 35V
C469	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C613	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C471	1-126-964-11	ELECT	10uF 20% 50V	C614	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C472	1-126-964-11	ELECT	10uF 20% 50V	C615	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C473	1-126-933-11	ELECT	100uF 20% 16V	C616	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C474	1-126-964-11	ELECT	10uF 20% 50V	C617	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C475	1-126-964-11	ELECT	10uF 20% 50V	C618	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C476	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C619	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C478	1-216-864-11	SHORT CHIP	0	C620	1-115-156-11	CERAMIC CHIP	1uF 10V
C481	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C621	1-162-924-11	CERAMIC CHIP	56PF 5% 50V
C482	1-164-315-11	CERAMIC CHIP	470PF 5% 50V	C622	1-162-924-11	CERAMIC CHIP	56PF 5% 50V
C484	1-164-315-11	CERAMIC CHIP	470PF 5% 50V	C623	1-162-908-11	CERAMIC CHIP	3PF 0.25PF 50V
C485	1-216-864-11	SHORT CHIP	0	C624	1-162-908-11	CERAMIC CHIP	3PF 0.25PF 50V
C486	1-104-655-91	ELECT	470uF 20% 6.3V	C625	1-115-156-11	CERAMIC CHIP	1uF 10V
C487	1-104-655-91	ELECT	470uF 20% 6.3V	C626	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C488	1-104-655-91	ELECT	470uF 20% 6.3V	C627	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C489	1-104-655-91	ELECT	470uF 20% 6.3V	C628	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C490	1-104-655-91	ELECT	470uF 20% 6.3V	C629	1-164-173-11	CERAMIC CHIP	0.0039uF 10% 50V
C491	1-126-947-11	ELECT	47uF 20% 35V	C630	1-164-739-11	CERAMIC CHIP	560PF 5% 50V
C492	1-126-923-91	ELECT	220uF 20% 10V	C631	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C493	1-126-947-11	ELECT	47uF 20% 35V	C632	1-164-173-11	CERAMIC CHIP	0.0039uF 10% 50V
C496	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C633	1-164-739-11	CERAMIC CHIP	560PF 5% 50V
C497	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C635	1-162-919-11	CERAMIC CHIP	22PF 5% 50V
C498	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C636	1-162-919-11	CERAMIC CHIP	22PF 5% 50V
C499	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C638	1-126-964-11	ELECT	10uF 20% 50V
C500	1-164-156-11	CERAMIC CHIP	0.1uF 25V	C639	1-126-962-11	ELECT	3.3uF 20% 50V
C503	1-162-927-11	CERAMIC CHIP	100PF 5% 50V	C640	1-104-658-91	ELECT	100uF 20% 10V
C505	1-100-831-91	CERAMIC CHIP	0.001uF 2% 50V	C641	1-126-964-11	ELECT	10uF 20% 50V
C506	1-164-315-11	CERAMIC CHIP	470PF 5% 50V	C642	1-104-658-91	ELECT	100uF 20% 10V
C507	1-100-831-91	CERAMIC CHIP	0.001uF 2% 50V	C643	1-104-658-91	ELECT	100uF 20% 10V

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
C751	1-164-156-11	CERAMIC CHIP 0.1uF	25V (AEP, UK)	D522	8-719-081-42	DIODE UMZ6.8N-T106	
C752	1-162-927-11	CERAMIC CHIP 100PF 5%	50V (AEP, UK)	* D523	6-501-855-01	DIODE DAN217UT106	
C753	1-162-927-11	CERAMIC CHIP 100PF 5%	50V (AEP, UK)	* D524	6-501-855-01	DIODE DAN217UT106	
C754	1-162-927-11	CERAMIC CHIP 100PF 5%	50V (AEP, UK)	D526	8-719-988-61	DIODE 1SS355TE-17	
< CONNECTOR >				D527	8-719-988-61	DIODE 1SS355TE-17	
CN103	1-779-277-11	CONNECTOR, FFC (LIF (NON-ZIF)) 9P		D528	8-719-988-61	DIODE 1SS355TE-17	
CN105	1-784-496-11	CONNECTOR, FFC/FPC 17P		D529	8-719-083-63	DIODE UDZSTE-1713B	
CN106	1-568-830-11	CONNECTOR SOCKET 11P		D530	8-719-083-63	DIODE UDZSTE-1713B	
CN302	1-784-737-11	CONNECTOR, FFC 15P (AV-118)		D531	8-719-081-42	DIODE UMZ6.8N-T106	
* CN302	1-784-746-11	CONNECTOR, FFC 24P (AV-114)		D801	8-719-081-42	DIODE UMZ6.8N-T106	
< DIODE >				< FUSE >			
D101	8-719-988-61	DIODE 1SS355TE-17		△ IC150	1-576-863-21	FUSE 0.5A 32V	
D102	8-719-988-61	DIODE 1SS355TE-17		△ IC317	1-576-863-21	FUSE 0.5A 32V	
D103	8-719-988-61	DIODE 1SS355TE-17		< IC >			
D104	8-719-053-18	DIODE 1SR154-400TE-25		IC101	6-807-412-01	IC LC87F06J2A-F58W3-E	
D106	8-719-988-61	DIODE 1SS355TE-17		* IC102	6-711-071-01	IC BD4846G-TR	
D108	8-719-941-09	DIODE DAP202UT106		* IC103	6-711-072-01	IC BU4220G-TR	
D201	8-719-988-61	DIODE 1SS355TE-17		* IC104	6-711-188-01	IC TC7MB3257FK (EL)	
D301	8-719-083-83	DIODE UDZSTE-1715B		* IC401	6-711-073-01	IC HA118326APFR-E	
D302	8-719-069-60	DIODE UDZSTE-179.1B		IC402	8-759-909-71	IC BA4558F	
D303	8-719-988-61	DIODE 1SS355TE-17		IC403	6-703-623-01	IC MM1503XNRE	
D304	8-719-988-61	DIODE 1SS355TE-17		IC406	8-759-082-60	IC TC7S66FU	
D401	8-719-083-61	DIODE UDZSTE-1711B		IC601	6-702-714-01	IC MSP3417G-QG-B8V3	
D402	8-719-978-33	DIODE UDZSTE-176.8B		< JACK >			
D409	8-719-081-42	DIODE UMZ6.8N-T106		JA401	1-794-198-11	CONNECTOR, S TERMINAL	
D410	8-719-081-42	DIODE UMZ6.8N-T106		JA751	1-764-188-31	JACK (SMALL TYPE) (DIA. 3.5) (AEP, UK)	
D413	8-719-081-42	DIODE UMZ6.8N-T106		< TERMINAL >			
D414	8-719-081-42	DIODE UMZ6.8N-T106		KN101	1-537-771-21	TERMINAL BOARD, GROUND	
D415	8-719-081-42	DIODE UMZ6.8N-T106		KN102	1-537-771-21	TERMINAL BOARD, GROUND	
D416	8-719-081-42	DIODE UMZ6.8N-T106		< COIL >			
D418	8-719-988-61	DIODE 1SS355TE-17		L102	1-410-517-11	INDUCTOR 47uH	
D419	8-719-988-61	DIODE 1SS355TE-17		L201	1-412-549-31	INDUCTOR 1mH	
D420	8-719-941-09	DIODE DAP202UT106		L303	1-500-245-11	INDUCTOR, FERRITE BEAD	
D421	6-501-486-01	DIODE NNCD3.9F-T1B		L304	1-408-621-31	INDUCTOR 330uH	
D422	6-501-486-01	DIODE NNCD3.9F-T1B		L305	1-500-245-11	INDUCTOR, FERRITE BEAD	
D501	8-719-069-54	DIODE UDZSTE-175.1B		L501	1-414-594-11	INDUCTOR, FERRITE BEAD	
D502	8-719-069-54	DIODE UDZSTE-175.1B		L502	1-414-594-11	INDUCTOR, FERRITE BEAD	
D503	6-501-486-01	DIODE NNCD3.9F-T1B		L601	1-500-245-11	INDUCTOR, FERRITE BEAD	
D504	8-719-081-42	DIODE UMZ6.8N-T106		L602	1-500-245-11	INDUCTOR, FERRITE BEAD	
D505	8-719-081-42	DIODE UMZ6.8N-T106		L604	1-414-760-21	INDUCTOR, FERRITE BEAD	
D506	8-719-081-42	DIODE UMZ6.8N-T106		L605	1-414-760-21	INDUCTOR, FERRITE BEAD	
D507	8-719-081-42	DIODE UMZ6.8N-T106		L606	1-500-245-11	INDUCTOR, FERRITE BEAD	
D508	6-501-486-01	DIODE NNCD3.9F-T1B		L607	1-412-963-11	INDUCTOR 100uH	
D509	8-719-081-42	DIODE UMZ6.8N-T106		L608	1-500-245-11	INDUCTOR, FERRITE BEAD	
D510	6-501-486-01	DIODE NNCD3.9F-T1B		L609	1-412-951-11	INDUCTOR 10uH	
D511	8-719-081-42	DIODE UMZ6.8N-T106		L751	1-414-760-21	INDUCTOR, FERRITE BEAD (AEP, UK)	
D512	6-501-486-01	DIODE NNCD3.9F-T1B		L801	1-414-228-11	INDUCTOR, FERRITE BEAD	
D513	8-719-081-42	DIODE UMZ6.8N-T106		L802	1-414-228-11	INDUCTOR, FERRITE BEAD	
D514	8-719-081-42	DIODE UMZ6.8N-T106		L803	1-216-864-11	SHORT CHIP 0	
D515	8-719-081-42	DIODE UMZ6.8N-T106		L851	1-414-228-11	INDUCTOR, FERRITE BEAD	
D516	8-719-081-42	DIODE UMZ6.8N-T106		L852	1-414-228-11	INDUCTOR, FERRITE BEAD	
D517	8-719-081-42	DIODE UMZ6.8N-T106		L853	1-414-228-11	INDUCTOR, FERRITE BEAD	
D518	8-719-081-42	DIODE UMZ6.8N-T106		L854	1-414-228-11	INDUCTOR, FERRITE BEAD	
D519	8-719-081-42	DIODE UMZ6.8N-T106		L855	1-500-283-11	INDUCTOR, FERRITE BEAD	
D520	8-719-081-42	DIODE UMZ6.8N-T106		Note : The components identified by mark △ or dotted line with mark △ are critical for safety.			
D521	8-719-081-42	DIODE UMZ6.8N-T106		Replace only with part number specified.			

AV-114/118

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
L856	1-414-228-11	INDUCTOR, FERRITE BEAD		Q752	8-729-620-13	TRANSISTOR	2SC4154TP-1EF (AEP, UK)
L857	1-414-228-11	INDUCTOR, FERRITE BEAD				< RESISTOR >	
L858	1-414-228-11	INDUCTOR, FERRITE BEAD		R101	1-216-809-11	METAL CHIP	100 5% 1/10W
L859	1-414-228-11	INDUCTOR, FERRITE BEAD		R102	1-216-809-11	METAL CHIP	100 5% 1/10W
L860	1-500-283-11	INDUCTOR, FERRITE BEAD		R103	1-216-809-11	METAL CHIP	100 5% 1/10W
L861	1-469-876-11	INDUCTOR, FERRITE BEAD		R104	1-216-841-11	METAL CHIP	47K 5% 1/10W
L862	1-469-796-21	FERRITE, CHIP		R105	1-216-809-11	METAL CHIP	100 5% 1/10W
		< TRANSISTOR >		R106	1-216-864-11	SHORT CHIP	0
Q101	8-729-029-06	TRANSISTOR	DTC124EUA-T106	R107	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q102	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R109	1-216-815-11	METAL CHIP	330 5% 1/10W
Q103	6-550-375-01	TRANSISTOR	UMD2N-TR	R110	1-216-809-11	METAL CHIP	100 5% 1/10W
Q104	6-550-375-01	TRANSISTOR	UMD2N-TR	R111	1-216-809-11	METAL CHIP	100 5% 1/10W
Q105	8-729-023-22	TRANSISTOR	2SD2114K	R112	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q108	8-729-029-06	TRANSISTOR	DTC124EUA-T106	R113	1-216-864-11	SHORT CHIP	0
Q110	8-729-028-86	TRANSISTOR	DTA143EUA-T106 (AEP, UK)	R116	1-216-864-11	SHORT CHIP	0
Q111	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R117	1-216-857-11	METAL CHIP	1M 5% 1/10W
Q112	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R118	1-216-864-11	SHORT CHIP	0
Q201	8-729-023-22	TRANSISTOR	2SD2114K	R123	1-216-815-11	METAL CHIP	330 5% 1/10W
Q301	6-550-375-01	TRANSISTOR	UMD2N-TR	R124	1-216-815-11	METAL CHIP	330 5% 1/10W
Q302	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R125	1-216-809-11	METAL CHIP	100 5% 1/10W
Q303	6-550-375-01	TRANSISTOR	UMD2N-TR	R126	1-216-809-11	METAL CHIP	100 5% 1/10W
Q304	8-729-044-09	TRANSISTOR	2SD2153T100V	R127	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q305	6-550-375-01	TRANSISTOR	UMD2N-TR	R129	1-216-815-11	METAL CHIP	330 5% 1/10W
Q306	8-729-901-87	TRANSISTOR	2SC2411K-CQ	R130	1-216-864-11	SHORT CHIP	0
Q307	6-550-375-01	TRANSISTOR	UMD2N-TR	R131	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
Q308	8-729-901-87	TRANSISTOR	2SC2411K-CQ	R132	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W
* Q309	6-551-719-01	TRANSISTOR	2SC5876T106QR	R133	1-216-845-11	METAL CHIP	100K 5% 1/10W
Q310	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R134	1-216-821-11	METAL CHIP	1K 5% 1/10W
Q311	8-729-427-70	TRANSISTOR	XP4401	R135	1-216-845-11	METAL CHIP	100K 5% 1/10W
Q401	8-729-029-06	TRANSISTOR	DTC124EUA-T106	R137	1-216-809-11	METAL CHIP	100 5% 1/10W
Q402	8-729-023-22	TRANSISTOR	2SD2114K	R138	1-216-817-11	METAL CHIP	470 5% 1/10W
Q403	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R139	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W
Q404	6-550-375-01	TRANSISTOR	UMD2N-TR	R140	1-216-809-11	METAL CHIP	100 5% 1/10W
Q406	8-729-023-22	TRANSISTOR	2SD2114K	R141	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W
Q407	8-729-023-22	TRANSISTOR	2SD2114K	R142	1-216-809-11	METAL CHIP	100 5% 1/10W
Q408	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R143	1-216-809-11	METAL CHIP	100 5% 1/10W
Q410	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R144	1-216-864-11	SHORT CHIP	0
Q411	6-550-375-01	TRANSISTOR	UMD2N-TR	R145	1-216-833-11	METAL CHIP	10K 5% 1/10W
Q413	8-729-029-06	TRANSISTOR	DTC124EUA-T106	R146	1-216-809-11	METAL CHIP	100 5% 1/10W
* Q501	6-551-718-01	TRANSISTOR	UMH1NTN	R147	1-216-821-11	METAL CHIP	1K 5% 1/10W
Q502	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R148	1-216-809-11	METAL CHIP	100 5% 1/10W
Q503	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R149	1-216-864-11	SHORT CHIP	0
Q504	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R150	1-216-864-11	SHORT CHIP	0
Q505	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R151	1-216-864-11	SHORT CHIP	0
Q506	8-729-013-26	TRANSISTOR	HN1C03FU-TE85R	R152	1-216-864-11	SHORT CHIP	0
Q507	8-729-013-26	TRANSISTOR	HN1C03FU-TE85R	R153	1-216-809-11	METAL CHIP	100 5% 1/10W
Q508	8-729-028-83	TRANSISTOR	DTA124EUA-T106	R154	1-216-809-11	METAL CHIP	100 5% 1/10W
Q509	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R155	1-216-809-11	METAL CHIP	100 5% 1/10W
Q510	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R156	1-216-809-11	METAL CHIP	100 5% 1/10W
Q511	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R157	1-216-845-11	METAL CHIP	100K 5% 1/10W
Q601	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R158	1-216-845-11	METAL CHIP	100K 5% 1/10W
Q602	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R159	1-216-864-11	SHORT CHIP	0
Q604	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R160	1-216-809-11	METAL CHIP	100 5% 1/10W
Q605	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R161	1-216-864-11	SHORT CHIP	0
Q606	8-729-620-13	TRANSISTOR	2SC4154TP-1EF	R165	1-216-864-11	SHORT CHIP	0
Q751	6-551-699-01	TRANSISTOR	ISA1602AM1TP-1EF	R167	1-216-809-11	METAL CHIP	100 5% 1/10W
		(AEP, UK)		R168	1-216-812-11	METAL CHIP	180 5% 1/10W

Ref. No.	Part No.	Description				Remarks	Ref. No.	Part No.	Description				Remarks
R169	1-216-833-11	METAL CHIP	10K	5%	1/10W		R310	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	
R171	1-216-809-11	METAL CHIP	100	5%	1/10W		R311	1-216-820-11	METAL CHIP	820	5%	1/10W	
R172	1-216-809-11	METAL CHIP	100	5%	1/10W		R312	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R173	1-216-845-11	METAL CHIP	100K	5%	1/10W		R313	1-216-848-11	METAL CHIP	180K	5%	1/10W	
R174	1-216-845-11	METAL CHIP	100K	5%	1/10W		R314	1-216-837-11	METAL CHIP	22K	5%	1/10W	
R175	1-216-815-11	METAL CHIP	330	5%	1/10W		R315	1-218-895-11	METAL CHIP	100K	0.5%	1/10W	
R176	1-216-821-11	METAL CHIP	1K	5%	1/10W		R316	1-218-879-11	METAL CHIP	22K	0.5%	1/10W	
R177	1-216-809-11	METAL CHIP	100	5%	1/10W		R318	1-216-864-11	SHORT CHIP	0			
R178	1-216-809-11	METAL CHIP	100	5%	1/10W		R401	1-216-295-91	SHORT CHIP	0			
R179	1-216-809-11	METAL CHIP	100	5%	1/10W		R402	1-216-818-11	METAL CHIP	560	5%	1/10W	
R180	1-216-809-11	METAL CHIP	100	5%	1/10W		R403	1-216-818-11	METAL CHIP	560	5%	1/10W	
R181	1-216-809-11	METAL CHIP	100	5%	1/10W		R404	1-216-295-91	SHORT CHIP	0			
R182	1-216-809-11	METAL CHIP	100	5%	1/10W		R407	1-216-295-91	SHORT CHIP	0			
R183	1-216-815-11	METAL CHIP	100	5%	1/10W		R408	1-216-817-11	METAL CHIP	470	5%	1/10W	
R184	1-216-809-11	METAL CHIP	100	5%	1/10W		R413	1-216-817-11	METAL CHIP	470	5%	1/10W	
R185	1-216-809-11	METAL CHIP	100	5%	1/10W		R414	1-216-817-11	METAL CHIP	470	5%	1/10W	
R186	1-216-809-11	METAL CHIP	100	5%	1/10W		R415	1-216-817-11	METAL CHIP	470	5%	1/10W	
R187	1-216-809-11	METAL CHIP	100	5%	1/10W		R416	1-216-817-11	METAL CHIP	470	5%	1/10W	
R188	1-216-815-11	METAL CHIP	330	5%	1/10W		R417	1-216-817-11	METAL CHIP	470	5%	1/10W	
R189	1-216-817-11	METAL CHIP	470	5%	1/10W		R418	1-216-817-11	METAL CHIP	470	5%	1/10W	
R193	1-216-845-11	METAL CHIP	100K	5%	1/10W		R419	1-216-817-11	METAL CHIP	470	5%	1/10W	
R194	1-216-845-11	METAL CHIP	100K	5%	1/10W		R420	1-216-860-11	METAL CHIP	1.8M	5%	1/10W	
R195	1-216-845-11	METAL CHIP	100K	5%	1/10W		R421	1-216-860-11	METAL CHIP	1.8M	5%	1/10W	
R196	1-216-809-11	METAL CHIP	100	5%	1/10W		R422	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R197	1-216-864-11	SHORT CHIP	0				R425	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R199	1-216-809-11	METAL CHIP	100	5%	1/10W		R428	1-216-864-11	SHORT CHIP	0			
R200	1-216-815-11	METAL CHIP	330	5%	1/10W		R430	1-216-857-11	METAL CHIP	1M	5%	1/10W	
R201	1-216-864-11	SHORT CHIP	0 (AEP, UK)				R431	1-216-857-11	METAL CHIP	1M	5%	1/10W	
R202	1-216-864-11	SHORT CHIP	0				R432	1-216-857-11	METAL CHIP	1M	5%	1/10W	
R203	1-216-864-11	SHORT CHIP	0				R433	1-216-857-11	METAL CHIP	1M	5%	1/10W	
R204	1-216-809-11	METAL CHIP	100	5%	1/10W		R435	1-216-857-11	METAL CHIP	1M	5%	1/10W	
R205	1-216-809-11	METAL CHIP	100	5%	1/10W		R436	1-216-809-11	METAL CHIP	100	5%	1/10W	
R207	1-216-817-11	METAL CHIP	470	5%	1/10W		R437	1-216-809-11	METAL CHIP	100	5%	1/10W	
R208	1-216-864-11	SHORT CHIP	0 (AEP, UK)				R438	1-216-295-91	SHORT CHIP	0			
R209	1-216-827-11	METAL CHIP	3.3K	5%	1/10W		R439	1-216-860-11	METAL CHIP	1.8M	5%	1/10W	
R210	1-218-845-11	METAL CHIP	820	0.5%	1/10W		R444	1-208-755-11	METAL CHIP	75	0.5%	1/10W	
R214	1-216-827-11	METAL CHIP	3.3K	5%	1/10W		R445	1-208-755-11	METAL CHIP	75	0.5%	1/10W	
R215	1-216-819-11	METAL CHIP	680	5%	1/10W		R447	1-208-755-11	METAL CHIP	75	0.5%	1/10W	
R216	1-218-844-11	METAL CHIP	750	0.5%	1/10W		R448	1-216-295-91	SHORT CHIP	0			
R217	1-216-821-11	METAL CHIP	1K	5%	1/10W		R453	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W	
R218	1-216-295-91	SHORT CHIP	0				R454	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	
R219	1-216-827-11	METAL CHIP	3.3K	5%	1/10W		R455	1-216-805-11	METAL CHIP	47	5%	1/10W	
R220	1-216-825-11	METAL CHIP	2.2K	5%	1/10W		R458	1-216-817-11	METAL CHIP	470	5%	1/10W	
R221	1-216-809-11	METAL CHIP	100	5%	1/10W		R459	1-208-755-11	METAL CHIP	75	0.5%	1/10W	
R222	1-216-864-11	SHORT CHIP	0				R461	1-216-819-11	METAL CHIP	680	5%	1/10W	
R223	1-216-809-11	METAL CHIP	100	5%	1/10W		R462	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	
R224	1-216-809-11	METAL CHIP	100	5%	1/10W		R463	1-218-869-11	METAL CHIP	8.2K	0.5%	1/10W	
R225	1-216-835-11	METAL CHIP	15K	5%	1/10W		R465	1-216-817-11	METAL CHIP	470	5%	1/10W	
R228	1-216-864-11	SHORT CHIP	0				R468	1-208-754-11	METAL CHIP	68	0.5%	1/10W	
R233	1-216-845-11	METAL CHIP	100K	5%	1/10W		R469	1-216-306-11	RES-CHIP	3.9	5%	1/10W	
R251	1-216-295-91	SHORT CHIP	0				R470	1-208-755-11	METAL CHIP	75	0.5%	1/10W	
R301	1-216-295-91	SHORT CHIP	0				R471	1-216-295-91	SHORT CHIP	0			
R302	1-216-295-91	SHORT CHIP	0				R472	1-208-754-11	METAL CHIP	68	0.5%	1/10W	
R303	1-216-295-91	SHORT CHIP	0				R473	1-216-306-11	RES-CHIP	3.9	5%	1/10W	
R304	1-216-809-11	METAL CHIP	100	5%	1/10W		R474	1-208-754-11	METAL CHIP	68	0.5%	1/10W	
R305	1-216-803-11	METAL CHIP	33	5%	1/10W		R475	1-216-306-11	RES-CHIP	3.9	5%	1/10W	
R306	1-216-803-11	METAL CHIP	33	5%	1/10W		R476	1-208-754-11	METAL CHIP	68	0.5%	1/10W	
R307	1-216-295-91	SHORT CHIP	0				R477	1-216-306-11	RES-CHIP	3.9	5%	1/10W	
R308	1-216-295-91	SHORT CHIP	0				R478	1-208-754-11	METAL CHIP	68	0.5%	1/10W	
R309	1-216-823-11	METAL CHIP	1.5K	5%	1/10W		R479	1-216-817-11	METAL CHIP	470	5%	1/10W	

AV-114/118

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R480	1-216-306-11	RES-CHIP	3.9	5%	1/10W	R551	1-216-809-11	METAL CHIP	100	5%	1/10W
R482	1-216-809-11	METAL CHIP	100	5%	1/10W	R552	1-216-817-11	METAL CHIP	470	5%	1/10W
R484	1-216-821-11	METAL CHIP	1K	5%	1/10W	R553	1-216-809-11	METAL CHIP	100	5%	1/10W
R485	1-216-837-11	METAL CHIP	22K	5%	1/10W	R554	1-216-845-11	METAL CHIP	100K	5%	1/10W
R486	1-216-821-11	METAL CHIP	1K	5%	1/10W	R555	1-216-845-11	METAL CHIP	100K	5%	1/10W
R487	1-216-837-11	METAL CHIP	22K	5%	1/10W	R556	1-216-828-11	METAL CHIP	3.9K	5%	1/10W
R488	1-216-817-11	METAL CHIP	470	5%	1/10W	R557	1-216-828-11	METAL CHIP	3.9K	5%	1/10W
R490	1-216-809-11	METAL CHIP	100	5%	1/10W	R558	1-216-833-11	METAL CHIP	10K	5%	1/10W
R501	1-208-755-11	METAL CHIP	75	0.5%	1/10W	R559	1-216-864-11	SHORT CHIP	0		
R502	1-208-755-11	METAL CHIP	75	0.5%	1/10W	R560	1-216-835-11	METAL CHIP	15K	5%	1/10W
R503	1-208-755-11	METAL CHIP	75	0.5%	1/10W	R561	1-216-819-11	METAL CHIP	680	5%	1/10W
R504	1-208-754-11	METAL CHIP	68	0.5%	1/10W						
					(AEP, UK)	R562	1-216-833-11	METAL CHIP	10K	5%	1/10W
R504	1-216-295-91	SHORT CHIP	0 (AUS)			R563	1-216-864-11	SHORT CHIP	0		
R505	1-208-755-11	METAL CHIP	75	0.5%	1/10W	R564	1-216-835-11	METAL CHIP	15K	5%	1/10W
					(AUS)	R565	1-216-819-11	METAL CHIP	680	5%	1/10W
R505	1-216-306-11	RES-CHIP	3.9	5%	1/10W	R566	1-216-837-11	METAL CHIP	22K	5%	1/10W
					(AEP, UK)						
R506	1-216-864-11	SHORT CHIP	0			R568	1-216-834-11	METAL CHIP	12K	5%	1/10W
R507	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R569	1-216-821-11	METAL CHIP	1K	5%	1/10W
R508	1-216-841-11	METAL CHIP	47K	5%	1/10W	R571	1-208-755-11	METAL CHIP	75	0.5%	1/10W
R509	1-216-838-11	METAL CHIP	27K	5%	1/10W	R573	1-500-283-11	INDUCTOR, FERRITE BEAD			
R510	1-216-861-11	METAL CHIP	2.2M	5%	1/10W	R574	1-216-864-11	SHORT CHIP	0		
R511	1-216-849-11	METAL CHIP	220K	5%	1/10W	R602	1-216-821-11	METAL CHIP	1K	5%	1/10W
R512	1-216-845-11	METAL CHIP	100K	5%	1/10W	R603	1-216-864-11	SHORT CHIP	0		
R513	1-216-845-11	METAL CHIP	100K	5%	1/10W	R605	1-216-833-11	METAL CHIP	10K	5%	1/10W
R514	1-208-755-11	METAL CHIP	75	0.5%	1/10W	R606	1-216-833-11	METAL CHIP	10K	5%	1/10W
R515	1-216-043-91	RES-CHIP	560	5%	1/10W	R607	1-216-821-11	METAL CHIP	1K	5%	1/10W
R516	1-216-822-11	METAL CHIP	1.2K	5%	1/10W	R609	1-216-864-11	SHORT CHIP	0		
R517	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R616	1-216-864-11	SHORT CHIP	0		
R518	1-216-797-11	METAL CHIP	10	5%	1/10W	R619	1-216-833-11	METAL CHIP	10K	5%	1/10W
R519	1-216-842-11	METAL CHIP	56K	5%	1/10W	R620	1-216-864-11	SHORT CHIP	0		
R520	1-216-813-11	METAL CHIP	220	5%	1/10W	R621	1-216-809-11	METAL CHIP	100	5%	1/10W
R521	1-208-754-11	METAL CHIP	68	0.5%	1/10W	R622	1-216-809-11	METAL CHIP	100	5%	1/10W
R522	1-216-306-11	RES-CHIP	3.9	5%	1/10W	R623	1-216-821-11	METAL CHIP	1K	5%	1/10W
R523	1-208-754-11	METAL CHIP	68	0.5%	1/10W	R624	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R524	1-216-306-11	RES-CHIP	3.9	5%	1/10W	R625	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R525	1-208-754-11	METAL CHIP	68	0.5%	1/10W	R626	1-216-821-11	METAL CHIP	1K	5%	1/10W
R526	1-216-306-11	RES-CHIP	3.9	5%	1/10W	R627	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R527	1-216-295-91	SHORT CHIP	0			R628	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R528	1-208-755-11	METAL CHIP	75	0.5%	1/10W	R630	1-216-815-11	METAL CHIP	330	5%	1/10W
R529	1-216-845-11	METAL CHIP	100K	5%	1/10W	R631	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R530	1-208-755-11	METAL CHIP	75	0.5%	1/10W	R632	1-216-801-11	METAL CHIP	22	5%	1/10W
R531	1-216-295-91	SHORT CHIP	0			R633	1-216-809-11	METAL CHIP	100	5%	1/10W
R532	1-208-755-11	METAL CHIP	75	0.5%	1/10W	R634	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R534	1-216-828-11	METAL CHIP	3.9K	5%	1/10W	R635	1-400-330-21	INDUCTOR, FERRITE BEAD (1608)			
R535	1-216-828-11	METAL CHIP	3.9K	5%	1/10W	R636	1-400-330-21	INDUCTOR, FERRITE BEAD (1608)			
R536	1-216-817-11	METAL CHIP	470	5%	1/10W	R637	1-400-330-21	INDUCTOR, FERRITE BEAD (1608)			
R537	1-216-809-11	METAL CHIP	100	5%	1/10W	R638	1-216-809-11	METAL CHIP	100	5%	1/10W
R538	1-216-817-11	METAL CHIP	470	5%	1/10W	R701	1-216-849-11	METAL CHIP	220K	5%	1/10W
R539	1-216-809-11	METAL CHIP	100	5%	1/10W	R703	1-216-864-11	SHORT CHIP	0		
R540	1-216-845-11	METAL CHIP	100K	5%	1/10W	R751	1-216-821-11	METAL CHIP	1K	5%	1/10W
R541	1-216-845-11	METAL CHIP	100K	5%	1/10W						
						R752	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
											(AEP, UK)
R542	1-216-809-11	METAL CHIP	100	5%	1/10W						(AEP, UK)
R543	1-216-809-11	METAL CHIP	100	5%	1/10W	R753	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R544	1-216-809-11	METAL CHIP	100	5%	1/10W						(AEP, UK)
R545	1-216-809-11	METAL CHIP	100	5%	1/10W	R754	1-216-811-11	METAL CHIP	150	5%	1/10W
R546	1-216-845-11	METAL CHIP	100K	5%	1/10W						(AEP, UK)
R547	1-216-845-11	METAL CHIP	100K	5%	1/10W	R755	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R548	1-216-845-11	METAL CHIP	100K	5%	1/10W						(AEP, UK)
R549	1-216-845-11	METAL CHIP	100K	5%	1/10W	R756	1-216-821-11	METAL CHIP	1K	5%	1/10W
R550	1-216-817-11	METAL CHIP	470	5%	1/10W						(AEP, UK)
						R801	1-216-864-11	SHORT CHIP	0		

Ref. No.	Part No.	Description	Remarks
		< TUNER >	
△ U601	1-693-741-11	TUNER(TMFE2-407A)	
		< VIBRATOR >	
* X101	1-813-965-31	VIBRATOR, CRYSTAL (15MHz)	
X102	1-579-463-11	VIBRATOR, CRYSTAL (32.768kHz)	
* X601	1-813-713-21	VIBRATOR, CRYSTAL (18.432MHz)	
	A-1259-526-A	DT-120 (AG) BOARD (AEP1, AEP3, UK)	
	A-1267-979-A	DT-120 (BG) BOARD (AEP2)	
	A-1382-627-A	DT-120 (AS) BOARD (AUS)	
(Ref.No.;40000 series)			

		< CAPACITOR >	
C101	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C102	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C103	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C104	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C105	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C106	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C107	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C108	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C109	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C110	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C111	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C112	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C113	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C114	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C115	1-126-204-11	ELECT CHIP 47uF 20%	16V
C116	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C117	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C118	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C119	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C120	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C121	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C124	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C125	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C126	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C127	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C128	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C129	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C130	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C131	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C134	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C135	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C136	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C137	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C138	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C140	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C142	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C144	1-117-681-11	ELECT CHIP 100uF 20%	16V
C147	1-126-204-11	ELECT CHIP 47uF 20%	16V
C148	1-164-842-11	CERAMIC CHIP 2PF 0.25PF	50V
C149	1-164-842-11	CERAMIC CHIP 2PF 0.25PF	50V
C154	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C155	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C191	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C192	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C193	1-114-130-11	CERAMIC CHIP 1uF	6.3V

Ref. No.	Part No.	Description	Remarks
C194	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C201	1-107-820-11	CERAMIC CHIP 0.1uF	16V (AEP2)
C202	1-107-820-11	CERAMIC CHIP 0.1uF	16V (AEP2)
C203	1-107-820-11	CERAMIC CHIP 0.1uF	16V (AEP2)
C204	1-107-820-11	CERAMIC CHIP 0.1uF	16V (AEP2)
C205	1-107-820-11	CERAMIC CHIP 0.1uF	16V (AEP2)
C206	1-107-820-11	CERAMIC CHIP 0.1uF	16V (AEP2)
C207	1-107-820-11	CERAMIC CHIP 0.1uF	16V (AEP2)
C208	1-107-820-11	CERAMIC CHIP 0.1uF	16V (AEP2)
C209	1-107-820-11	CERAMIC CHIP 0.1uF	16V (AEP2)
C210	1-126-204-11	ELECT CHIP 47uF 20%	16V (AEP2)
C211	1-126-204-11	ELECT CHIP 47uF 20%	16V
C212	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C213	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C221	1-126-204-11	ELECT CHIP 47uF 20%	16V (AEP2)
C222	1-114-130-11	CERAMIC CHIP 1uF	6.3V (AEP2)
C301	1-165-908-11	CERAMIC CHIP 1uF 10%	10V
C302	1-117-681-11	ELECT CHIP 100uF 20%	16V
C303	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C304	1-165-908-11	CERAMIC CHIP 1uF 10%	10V
C306	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C307	1-117-681-11	ELECT CHIP 100uF 20%	16V
C309	1-165-908-11	CERAMIC CHIP 1uF 10%	10V
C313	1-127-760-11	CERAMIC CHIP 4.7uF 10%	6.3V
C314	1-127-760-11	CERAMIC CHIP 4.7uF 10%	6.3V (AEP2)
C315	1-127-760-11	CERAMIC CHIP 4.7uF 10%	6.3V
C318	1-117-681-11	ELECT CHIP 100uF 20%	16V (AEP2)
C319	1-117-681-11	ELECT CHIP 100uF 20%	16V
C320	1-127-760-11	CERAMIC CHIP 4.7uF 10%	6.3V
C324	1-124-778-00	ELECT CHIP 22uF 20%	6.3V
C326	1-164-315-11	CERAMIC CHIP 470PF 5%	50V
C329	1-126-204-11	ELECT CHIP 47uF 20%	16V (AEP2)
C332	1-125-889-91	CERAMIC CHIP 2.2uF 10%	10V
C334	1-127-760-11	CERAMIC CHIP 4.7uF 10%	6.3V (AEP2)
C335	1-126-204-11	ELECT CHIP 47uF 20%	16V (AEP2)
C338	1-165-908-11	CERAMIC CHIP 1uF 10%	10V (AEP2)
C339	1-126-204-11	ELECT CHIP 47uF 20%	16V
C340	1-165-908-11	CERAMIC CHIP 1uF 10%	10V
C341	1-165-908-11	CERAMIC CHIP 1uF 10%	10V
C342	1-126-204-11	ELECT CHIP 47uF 20%	16V
C343	1-126-204-11	ELECT CHIP 47uF 20%	16V
C353	1-124-779-00	ELECT CHIP 10uF 20%	16V
C354	1-165-908-11	CERAMIC CHIP 1uF 10%	10V
C356	1-162-919-11	CERAMIC CHIP 22PF 5%	50V

Note : The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
C358	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C598	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C359	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C599	1-117-681-11	ELECT CHIP	100uF	20%	16V
C361	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	C600	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C364	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C601	1-117-681-11	ELECT CHIP	100uF	20%	16V
C366	1-126-204-11	ELECT CHIP	47uF	20%	16V	C602	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V
C367	1-126-197-11	ELECT CHIP	10uF	20%	50V	C603	1-124-778-00	ELECT CHIP	22uF	20%	6.3V
C368	1-126-204-11	ELECT CHIP	47uF	20%	16V	C614	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C369	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	C615	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C370	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C616	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V
C372	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C618	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C373	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V	C620	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C375	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C621	1-163-037-11	CERAMIC CHIP	0.022uF	10%	50V
C378	1-124-779-00	ELECT CHIP	10uF	20%	16V	C623	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C379	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C626	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C380	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C628	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C381	1-126-204-11	ELECT CHIP	47uF	20%	16V	C629	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V
C382	1-126-204-11	ELECT CHIP	47uF	20%	16V	C630	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C383	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C633	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V
C384	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C634	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C385	1-126-204-11	ELECT CHIP	47uF	20%	16V	C636	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C388	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	C637	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C389	1-126-204-11	ELECT CHIP	47uF	20%	16V	C638	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C391	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C639	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C392	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V	C640	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C393	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V	C1001	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C394	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1002	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C395	1-126-204-11	ELECT CHIP	47uF	20%	16V	C1003	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C396	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V	C1004	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C397	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V	C1005	1-164-858-11	CERAMIC CHIP	22PF	5%	50V
C398	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1006	1-164-858-11	CERAMIC CHIP	22PF	5%	50V
C399	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1007	1-164-858-11	CERAMIC CHIP	22PF	5%	50V
C400	1-127-715-91	CERAMIC CHIP	0.22uF	10%	16V	C1008	1-164-858-11	CERAMIC CHIP	22PF	5%	50V
C401	1-164-315-11	CERAMIC CHIP	470PF	5%	50V	C1009	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C402	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V	C1010	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C404	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V	C1011	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C406	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1012	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C408	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1013	1-164-872-11	CERAMIC CHIP	82PF	5%	50V
C409	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C1014	1-164-872-11	CERAMIC CHIP	82PF	5%	50V
C412	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1015	1-164-872-11	CERAMIC CHIP	82PF	5%	50V
C413	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C1016	1-164-872-11	CERAMIC CHIP	82PF	5%	50V
C414	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1017	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C415	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1018	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C416	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1019	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C417	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1020	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C418	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1021	1-164-854-11	CERAMIC CHIP	15PF	5%	50V
C421	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1022	1-164-854-11	CERAMIC CHIP	15PF	5%	50V
C422	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1023	1-164-854-11	CERAMIC CHIP	15PF	5%	50V
C423	1-164-156-11	CERAMIC CHIP	0.1uF		25V (AEP2)	C1024	1-164-854-11	CERAMIC CHIP	15PF	5%	50V
C431	1-125-889-91	CERAMIC CHIP	2.2uF	10%	10V	C1025	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C433	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	C1026	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C522	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1027	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C524	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1028	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C590	1-164-850-11	CERAMIC CHIP	10PF	0.5PF	50V	C1029	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C591	1-164-850-11	CERAMIC CHIP	10PF	0.5PF	50V	C1030	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C592	1-164-850-11	CERAMIC CHIP	10PF	0.5PF	50V	C1031	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C593	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1032	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C594	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1033	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C595	1-126-210-21	ELECT CHIP	220uF	20%	4V	C1034	1-126-210-21	ELECT CHIP	220uF	20%	4V
C596	1-164-156-11	CERAMIC CHIP	0.1uF		25V	C1035	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C597	1-126-210-21	ELECT CHIP	220uF	20%	4V	C1036	1-107-820-11	CERAMIC CHIP	0.1uF		16V
						C1037	1-107-820-11	CERAMIC CHIP	0.1uF		16V

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
C1038	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1098	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1039	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1099	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1040	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1100	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1041	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1101	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1042	1-126-210-21	ELECT CHIP	220uF	20%	4V	C1103	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1043	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1104	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1044	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1105	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1045	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1106	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C1046	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1107	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1047	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1108	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1048	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1109	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1049	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1110	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1050	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1111	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1051	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1112	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1052	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1113	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C1053	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1114	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1054	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1115	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1055	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1116	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1056	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1117	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1057	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1118	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1058	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1119	1-126-210-21	ELECT CHIP	220uF	20%	4V
C1059	1-124-779-00	ELECT CHIP	10uF	20%	16V	C1120	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1060	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1121	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1061	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1122	1-117-681-11	ELECT CHIP	100uF	20%	16V
C1062	1-114-130-11	CERAMIC CHIP	1uF		6.3V	< CONNECTOR >					
C1063	1-107-820-11	CERAMIC CHIP	0.1uF		16V	CN102	1-779-338-51	CONNECTOR, FFC/FPC 28P			
C1064	1-114-130-11	CERAMIC CHIP	1uF		6.3V	* CN103	1-569-940-11	SOCKET, CONNECTOR 24P			
C1065	1-114-130-11	CERAMIC CHIP	1uF		6.3V	* CN202	1-564-728-11	PIN, CONNECTOR (SMALL TYPE) 12P			
C1066	1-114-130-11	CERAMIC CHIP	1uF		6.3V	CN203	1-564-704-41	PIN, CONNECTOR (SMALL TYPE) 2P			
C1067	1-114-130-11	CERAMIC CHIP	1uF		6.3V	< DIODE >					
C1068	1-114-130-11	CERAMIC CHIP	1uF		6.3V	* D302	6-501-864-01	DIODE SM15T6V8A			
C1069	1-114-130-11	CERAMIC CHIP	1uF		6.3V	D303	8-719-988-61	DIODE 1SS355TE-17			
C1070	1-114-130-11	CERAMIC CHIP	1uF		6.3V	D304	8-719-988-61	DIODE 1SS355TE-17			
C1071	1-114-130-11	CERAMIC CHIP	1uF		6.3V	< FERRITE BEAD >					
C1072	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F101	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1073	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F102	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1074	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F103	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1075	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F104	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1076	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F105	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1077	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F106	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1078	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F108	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1079	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	F202	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1080	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F203	1-543-949-22	BEAD, FERRITE (CHIP) (1608) (AEP2)			
C1081	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	F204	1-543-949-22	BEAD, FERRITE (CHIP) (1608) (AEP2)			
C1082	1-126-210-21	ELECT CHIP	220uF	20%	4V	F205	1-543-949-22	BEAD, FERRITE (CHIP) (1608) (AEP2)			
C1083	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F206	1-543-949-22	BEAD, FERRITE (CHIP) (1608) (AEP2)			
C1084	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F300	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1085	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F301	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1086	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F302	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1087	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F305	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1088	1-107-820-11	CERAMIC CHIP	0.1uF		16V	F306	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1089	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F309	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1090	1-114-130-11	CERAMIC CHIP	1uF		6.3V	F310	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1091	1-126-210-21	ELECT CHIP	220uF	20%	4V	F311	1-543-949-22	BEAD, FERRITE (CHIP) (1608)			
C1092	1-114-130-11	CERAMIC CHIP	1uF		6.3V						
C1093	1-114-130-11	CERAMIC CHIP	1uF		6.3V						
C1094	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V						
C1095	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V						
C1096	1-114-130-11	CERAMIC CHIP	1uF		6.3V						
C1097	1-114-130-11	CERAMIC CHIP	1uF		6.3V						

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
F312	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		Q1006	8-729-905-35	TRANSISTOR 2SC4081-R	
F313	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		Q1007	8-729-905-35	TRANSISTOR 2SC4081-R	
F314	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		Q1008	8-729-905-35	TRANSISTOR 2SC4081-R	
F316	1-543-949-22	BEAD, FERRITE (CHIP) (1608)				< RESISTOR >	
F317	1-543-949-22	BEAD, FERRITE (CHIP) (1608)					
F318	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		R100	1-218-990-81	SHORT CHIP 0	
F321	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		R101	1-218-965-11	RES-CHIP 10K 5%	1/16W
F397	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		R104	1-218-965-11	RES-CHIP 10K 5%	1/16W
F398	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		R105	1-218-935-11	RES-CHIP 33 5%	1/16W
		< IC >		R107	1-216-864-11	SHORT CHIP 0	
IC101	6-705-306-01	IC HYB25DC256160CE-6		R109	1-218-990-81	SHORT CHIP 0	
* IC104	6-711-077-01	IC KA5SDKAS01TSN		R110	1-218-938-11	RES-CHIP 56 5%	1/16W
IC106	6-711-206-01	IC uPD61111GM-200-UEV-A		R111	1-218-938-11	RES-CHIP 56 5%	1/16W
IC110	6-706-484-01	IC TC7SH04FU (T5RSOYJF)		R114	1-218-935-11	RES-CHIP 33 5%	1/16W
* IC201	6-711-207-01	IC CIMAX-SP2L (AEP2)		R116	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC202	6-710-050-01	IC TC74LCX245FK (EL) (AEP2)		R121	1-218-823-11	METAL CHIP 100 0.5%	1/10W
* IC203	6-711-290-01	IC TC74LCX373FK (EL, K) (AEP2)		R122	1-218-823-11	METAL CHIP 100 0.5%	1/10W
* IC204	6-711-290-01	IC TC74LCX373FK (EL, K) (AEP2)		R123	1-218-823-11	METAL CHIP 100 0.5%	1/10W
IC208	6-707-361-01	IC ST890BDR (AEP2)		R124	1-218-823-11	METAL CHIP 100 0.5%	1/10W
IC302	6-702-362-01	IC MM1563DFBE		R125	1-218-823-11	METAL CHIP 100 0.5%	1/10W
* IC304	6-711-026-01	IC MM1685ANRE		R126	1-218-823-11	METAL CHIP 100 0.5%	1/10W
* IC307	6-711-027-01	IC MM1689FHBE		R127	1-218-823-11	METAL CHIP 100 0.5%	1/10W
* IC309	6-711-146-01	IC FPF2007		R128	1-218-823-11	METAL CHIP 100 0.5%	1/10W
* IC311	6-708-075-01	IC uPC3221GV		R138	1-218-965-11	RES-CHIP 10K 5%	1/16W
* IC312	6-711-026-01	IC MM1685ANRE		R139	1-218-965-11	RES-CHIP 10K 5%	1/16W
* IC313	6-711-223-01	IC DRX3975D		R141	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC318	8-759-693-13	IC NJM12904V (TE2)		R142	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC320	6-708-708-01	IC MM1561FFBE		R143	1-218-965-11	RES-CHIP 10K 5%	1/16W
IC1001	6-711-285-01	IC uPD64015AGM-UEU-A		R144	1-218-965-11	RES-CHIP 10K 5%	1/16W
		< COIL >		R145	1-218-965-11	RES-CHIP 10K 5%	1/16W
L304	1-412-938-61	INDUCTOR 0.82uH		R146	1-218-965-11	RES-CHIP 10K 5%	1/16W
L314	1-469-110-21	FERRITE, EMI (SMD) (1608)		R147	1-218-965-11	RES-CHIP 10K 5%	1/16W
L315	1-400-703-21	(3216, EMI FERRITE (SMD)		R148	1-218-965-11	RES-CHIP 10K 5%	1/16W
L1001	1-412-951-11	INDUCTOR 10uH		R149	1-218-973-11	RES-CHIP 47K 5%	1/16W
L1002	1-412-951-11	INDUCTOR 10uH		R151	1-218-973-11	RES-CHIP 47K 5%	1/16W
L1003	1-412-951-11	INDUCTOR 10uH		R153	1-218-973-11	RES-CHIP 47K 5%	1/16W
L1004	1-412-951-11	INDUCTOR 10uH		R154	1-218-973-11	RES-CHIP 47K 5%	1/16W
L1005	1-412-954-11	INDUCTOR 18uH		R155	1-218-973-11	RES-CHIP 47K 5%	1/16W
L1006	1-412-954-11	INDUCTOR 18uH		R159	1-218-941-81	RES-CHIP 100 5%	1/16W
L1007	1-412-954-11	INDUCTOR 18uH		R160	1-218-941-81	RES-CHIP 100 5%	1/16W
L1008	1-412-954-11	INDUCTOR 18uH		R166	1-218-846-11	METAL CHIP 910 0.5%	1/10W
		< TRANSISTOR >		R167	1-218-846-11	METAL CHIP 910 0.5%	1/10W
Q201	8-729-029-06	TRANSISTOR DTC124EUA-T106 (AEP2)		R168	1-218-831-11	METAL CHIP 220 0.5%	1/10W
Q202	8-729-028-86	TRANSISTOR DTA143EUA-T106 (AEP2)		R169	1-218-827-11	METAL CHIP 150 0.5%	1/10W
Q203	8-729-905-35	TRANSISTOR 2SC4081-R (AEP2)		R170	1-218-935-11	RES-CHIP 33 5%	1/16W
Q305	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R172	1-218-965-11	RES-CHIP 10K 5%	1/16W
Q306	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R173	1-218-990-81	SHORT CHIP 0	
Q307	8-729-905-35	TRANSISTOR 2SC4081-R		R174	1-218-941-81	RES-CHIP 100 5%	1/16W
Q308	8-729-905-35	TRANSISTOR 2SC4081-R		R179	1-218-965-11	RES-CHIP 10K 5%	1/16W
Q309	8-729-029-09	TRANSISTOR DTC143EUA-T106		R182	1-218-990-81	SHORT CHIP 0	
Q310	8-729-029-09	TRANSISTOR DTC143EUA-T106		R183	1-218-990-81	SHORT CHIP 0	
Q312	8-729-029-06	TRANSISTOR DTC124EUA-T106		R185	1-234-714-11	RES, NETWORK 56 (1005X4)	
Q1001	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R186	1-234-714-11	RES, NETWORK 56 (1005X4)	
Q1002	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R187	1-234-791-21	RES, NETWORK 150X4 (2010)	
Q1003	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R188	1-234-372-11	RES, NETWORK 100 (1005X4)	
Q1004	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		R189	1-234-372-11	RES, NETWORK 100 (1005X4)	
Q1005	8-729-905-35	TRANSISTOR 2SC4081-R		R190	1-234-372-11	RES, NETWORK 100 (1005X4)	
				R191	1-234-372-11	RES, NETWORK 100 (1005X4)	
				R192	1-234-372-11	RES, NETWORK 100 (1005X4)	
				R193	1-234-714-11	RES, NETWORK 56 (1005X4)	

Ref. No.	Part No.	Description	Remarks				Ref. No.	Part No.	Description	Remarks			
R194	1-234-714-11	RES, NETWORK	56 (1005X4)				R256	1-218-937-11	RES-CHIP	47	5%	1/16W	
R197	1-218-990-81	SHORT CHIP	0									(AEP2)	
R199	1-218-990-81	SHORT CHIP	0				R257	1-218-937-11	RES-CHIP	47	5%	1/16W	(AEP2)
R201	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)				R269	1-218-962-11	RES-CHIP	5.6K	5%	1/16W	(AEP2)
R202	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)									(AEP2)	
R203	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)				R270	1-218-965-11	RES-CHIP	10K	5%	1/16W	(AEP2)
R204	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)									(AEP2)	
R205	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)				R271	1-218-969-11	RES-CHIP	22K	5%	1/16W	(AEP2)
R206	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)									(AEP2)	
R207	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)				R272	1-218-965-11	RES-CHIP	10K	5%	1/16W	(AEP2)
R208	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)									(AEP2)	
R209	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)				R273	1-218-965-11	RES-CHIP	10K	5%	1/16W	(AEP2)
R210	1-218-990-81	SHORT CHIP	0 (AEP2)									(AEP2)	
R211	1-218-965-11	RES-CHIP	10K	5%	1/16W	(AEP2)	R277	1-218-937-11	RES-CHIP	47	5%	1/16W	(AEP2)
R213	1-218-937-11	RES-CHIP	47	5%	1/16W	(AEP2)	R278	1-234-372-11	RES, NETWORK	100 (1005X4) (AEP2)			
R214	1-218-941-81	RES-CHIP	100	5%	1/16W	(AEP2)	R279	1-234-372-11	RES, NETWORK	100 (1005X4) (AEP2)			
R215	1-218-941-81	RES-CHIP	100	5%	1/16W	(AEP2)	R280	1-234-372-11	RES, NETWORK	100 (1005X4) (AEP2)			
R216	1-218-990-81	SHORT CHIP	0 (AEP2)				R281	1-218-965-11	RES-CHIP	10K	5%	1/16W	(AEP2)
R217	1-216-864-11	SHORT CHIP	0 (AEP2)				R300	1-216-864-11	SHORT CHIP	0			
R219	1-218-965-11	RES-CHIP	10K	5%	1/16W	(AEP2)	R303	1-216-864-11	SHORT CHIP	0			
R221	1-218-937-11	RES-CHIP	47	5%	1/16W	(AEP2)	R304	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R222	1-218-965-11	RES-CHIP	10K	5%	1/16W	(AEP2)	R305	1-216-864-11	SHORT CHIP	0			
R223	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)				R306	1-216-864-11	SHORT CHIP	0			
R224	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)				R308	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	
R225	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)				R309	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R226	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)				R310	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R227	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)				R311	1-216-819-11	METAL CHIP	680	5%	1/10W	
R228	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)				R312	1-216-809-11	METAL CHIP	100	5%	1/10W	
R229	1-218-965-11	RES-CHIP	10K	5%	1/16W	(AEP2)	R313	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	
R230	1-218-965-11	RES-CHIP	10K	5%	1/16W		R314	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	
R231	1-218-952-11	RES-CHIP	820	5%	1/16W	(AEP2)	R315	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R233	1-218-937-11	RES-CHIP	47	5%	1/16W	(AEP2)	R316	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	
R234	1-218-937-11	RES-CHIP	47	5%	1/16W	(AEP2)	R317	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	
R236	1-218-990-81	SHORT CHIP	0 (AEP2)				R318	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R239	1-234-371-21	RES, NETWORK	47 (1005X4)				R319	1-218-973-11	RES-CHIP	47K	5%	1/16W	
R240	1-234-371-21	RES, NETWORK	47 (1005X4)				R320	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R241	1-234-371-21	RES, NETWORK	47 (1005X4)				R321	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	
R242	1-234-371-21	RES, NETWORK	47 (1005X4)				R322	1-216-839-11	METAL CHIP	33K	5%	1/10W	
R243	1-234-371-21	RES, NETWORK	47 (1005X4)				R323	1-216-864-11	SHORT CHIP	0			
R244	1-234-371-21	RES, NETWORK	47 (1005X4)				R325	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R245	1-234-371-21	RES, NETWORK	47 (1005X4)				R326	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	
R246	1-234-371-21	RES, NETWORK	47 (1005X4)				R327	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	
R247	1-234-371-21	RES, NETWORK	47 (1005X4)				R331	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	
R248	1-234-371-21	RES, NETWORK	47 (1005X4)				R333	1-216-809-11	METAL CHIP	100	5%	1/10W	
R249	1-234-371-21	RES, NETWORK	47 (1005X4)				R336	1-216-864-11	SHORT CHIP	0			
R250	1-218-965-11	RES-CHIP	10K	5%	1/16W		R337	1-216-864-11	SHORT CHIP	0			
R251	1-218-965-11	RES-CHIP	10K	5%	1/16W		R341	1-218-960-11	RES-CHIP	3.9K	5%	1/16W	
R252	1-218-990-81	SHORT CHIP	0 (AEP2)				R342	1-218-960-11	RES-CHIP	3.9K	5%	1/16W	
R253	1-218-937-11	RES-CHIP	47	5%	1/16W		R343	1-216-864-11	SHORT CHIP	0			
R254	1-218-937-11	RES-CHIP	47	5%	1/16W		R344	1-216-864-11	SHORT CHIP	0			
							R345	1-216-864-11	SHORT CHIP	0			
							R346	1-216-864-11	SHORT CHIP	0			
							R347	1-216-864-11	SHORT CHIP	0			
							R348	1-216-864-11	SHORT CHIP	0			
							R349	1-216-864-11	SHORT CHIP	0			
							R350	1-216-864-11	SHORT CHIP	0			

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R351	1-218-965-11	RES-CHIP	10K	5%	1/16W	R625	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)	(AEP2)	
R352	1-218-965-11	RES-CHIP	10K	5%	1/16W	R626	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)	(AEP2)	
R353	1-218-969-11	RES-CHIP	22K	5%	1/16W	R627	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R354	1-216-864-11	SHORT CHIP	0						(AEP1,AEP3,UK,AUS)		
R355	1-216-864-11	SHORT CHIP	0			R628	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
									(AEP1,AEP3,UK,AUS)		
R356	1-216-864-11	SHORT CHIP	0			R629	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R357	1-216-864-11	SHORT CHIP	0						(AEP1,AEP3,UK,AUS)		
R358	1-218-969-11	RES-CHIP	22K	5%	1/16W						
R359	1-218-965-11	RES-CHIP	10K	5%	1/16W	R641	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R361	1-216-864-11	SHORT CHIP	0 (AEP2)			R642	1-218-990-81	SHORT CHIP	0		
						R643	1-218-990-81	SHORT CHIP	0		
R363	1-218-965-11	RES-CHIP	10K	5%	1/16W	R644	1-216-864-11	SHORT CHIP	0		
R527	1-218-990-81	SHORT CHIP	0			R650	1-216-295-91	SHORT CHIP	0		
R528	1-218-990-81	SHORT CHIP	0								
R529	1-218-990-81	SHORT CHIP	0			R651	1-216-864-11	SHORT CHIP	0		
R530	1-218-990-81	SHORT CHIP	0			R660	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
						R661	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R531	1-218-990-81	SHORT CHIP	0			R662	1-216-864-11	SHORT CHIP	0		
R532	1-218-990-81	SHORT CHIP	0			R666	1-216-864-11	SHORT CHIP	0		
R534	1-218-990-81	SHORT CHIP	0								
R535	1-218-969-11	RES-CHIP	22K	5%	1/16W	R668	1-216-864-11	SHORT CHIP	0		
R538	1-218-969-11	RES-CHIP	22K	5%	1/16W	R671	1-216-857-11	METAL CHIP	1M	5%	1/10W
						R672	1-216-820-11	METAL CHIP	820	5%	1/10W
R540	1-218-969-11	RES-CHIP	22K	5%	1/16W	R673	1-216-864-11	SHORT CHIP	0		
R542	1-218-969-11	RES-CHIP	22K	5%	1/16W	R674	1-216-864-11	SHORT CHIP	0		
R544	1-218-969-11	RES-CHIP	22K	5%	1/16W						
R546	1-218-969-11	RES-CHIP	22K	5%	1/16W	R678	1-234-372-11	RES, NETWORK	100 (1005X4)		
R547	1-218-969-11	RES-CHIP	22K	5%	1/16W				(AEP1,AEP3,UK,AUS)		
						R678	1-242-963-21	RES, NETWORK	33 (1005X4)	(AEP2)	
R550	1-218-969-11	RES-CHIP	22K	5%	1/16W	R679	1-234-372-11	RES, NETWORK	100 (1005X4)		
R551	1-218-969-11	RES-CHIP	22K	5%	1/16W				(AEP1,AEP3,UK,AUS)		
R554	1-218-969-11	RES-CHIP	22K	5%	1/16W	R679	1-242-963-21	RES, NETWORK	33 (1005X4)	(AEP2)	
R556	1-218-969-11	RES-CHIP	22K	5%	1/16W	R680	1-216-809-11	METAL CHIP	100	5%	1/10W
R558	1-218-969-11	RES-CHIP	22K	5%	1/16W				(AEP1,AEP3,UK,AUS)		
						R680	1-216-803-11	METAL CHIP	33	5%	1/10W
R560	1-218-969-11	RES-CHIP	22K	5%	1/16W				(AEP2)		
R561	1-218-969-11	RES-CHIP	22K	5%	1/16W	R681	1-216-809-11	METAL CHIP	100	5%	1/10W
R564	1-218-969-11	RES-CHIP	22K	5%	1/16W				(AEP1,AEP3,UK,AUS)		
R566	1-218-969-11	RES-CHIP	22K	5%	1/16W	R681	1-216-803-11	METAL CHIP	33	5%	1/10W
R568	1-218-969-11	RES-CHIP	22K	5%	1/16W				(AEP2)		
						R682	1-216-809-11	METAL CHIP	100	5%	1/10W
R569	1-218-941-81	RES-CHIP	100	5%	1/16W				(AEP1,AEP3,UK,AUS)		
R570	1-218-941-81	RES-CHIP	100	5%	1/16W	R682	1-216-803-11	METAL CHIP	33	5%	1/10W
R571	1-218-990-81	SHORT CHIP	0						(AEP2)		
R572	1-218-990-81	SHORT CHIP	0								
R575	1-218-965-11	RES-CHIP	10K	5%	1/16W	R683	1-216-864-11	SHORT CHIP	0		
						R685	1-216-833-11	METAL CHIP	10K	5%	1/10W
R576	1-218-965-11	RES-CHIP	10K	5%	1/16W	R686	1-216-833-11	METAL CHIP	10K	5%	1/10W
R577	1-218-990-81	SHORT CHIP	0			R687	1-216-811-11	METAL CHIP	150	5%	1/10W
R579	1-218-965-11	RES-CHIP	10K	5%	1/16W	R688	1-216-864-11	SHORT CHIP	0		
R580	1-218-965-11	RES-CHIP	10K	5%	1/16W						
R589	1-218-990-81	SHORT CHIP	0			R689	1-216-864-11	SHORT CHIP	0		
						R690	1-216-864-11	SHORT CHIP	0		
R594	1-218-938-11	RES-CHIP	56	5%	1/16W	R691	1-216-864-11	SHORT CHIP	0		
R595	1-218-938-11	RES-CHIP	56	5%	1/16W	R692	1-216-864-11	SHORT CHIP	0		
R597	1-218-939-11	RES-CHIP	68	5%	1/16W	R693	1-216-864-11	SHORT CHIP	0		
R598	1-218-939-11	RES-CHIP	68	5%	1/16W						
R605	1-218-990-81	SHORT CHIP	0			R694	1-242-963-21	RES, NETWORK	33 (1005X4)		
						R695	1-242-963-21	RES, NETWORK	33 (1005X4)		
R606	1-218-990-81	SHORT CHIP	0			R696	1-242-963-21	RES, NETWORK	33 (1005X4)		
R607	1-218-990-81	SHORT CHIP	0			R698	1-218-935-11	RES-CHIP	33	5%	1/16W
R608	1-218-937-11	RES-CHIP	47	5%	1/16W	R699	1-218-935-11	RES-CHIP	33	5%	1/16W
R609	1-218-937-11	RES-CHIP	47	5%	1/16W						
R610	1-218-937-11	RES-CHIP	47	5%	1/16W	R700	1-218-935-11	RES-CHIP	33	5%	1/16W
						R701	1-218-935-11	RES-CHIP	33	5%	1/16W
R616	1-218-937-11	RES-CHIP	47	5%	1/16W	R702	1-218-935-11	RES-CHIP	33	5%	1/16W
R621	1-218-969-11	RES-CHIP	22K	5%	1/16W	R703	1-216-295-91	SHORT CHIP	0		
R622	1-218-969-11	RES-CHIP	22K	5%	1/16W	R704	1-218-935-11	RES-CHIP	33	5%	1/16W
R623	1-218-990-81	SHORT CHIP	0								
R624	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)	(AEP2)							

Ref. No.	Part No.	Description	Remarks		
R705	1-218-935-11	RES-CHIP	33	5%	1/16W
R706	1-218-935-11	RES-CHIP	33	5%	1/16W
R707	1-218-935-11	RES-CHIP	33	5%	1/16W
R709	1-218-965-11	RES-CHIP	10K	5%	1/16W
R714	1-216-295-91	SHORT CHIP	0		
R715	1-218-990-81	SHORT CHIP	0		
R719	1-218-971-11	RES-CHIP	33K	5%	1/16W
R720	1-218-965-11	RES-CHIP	10K	5%	1/16W
R721	1-234-372-11	RES, NETWORK	100 (1005X4)		
R722	1-234-372-11	RES, NETWORK	100 (1005X4)		
R723	1-234-791-21	RES, NETWORK	150X4 (2010)		
R724	1-234-791-21	RES, NETWORK	150X4 (2010)		
R725	1-218-965-11	RES-CHIP	10K	5%	1/16W
R726	1-218-965-11	RES-CHIP	10K	5%	1/16W
R728	1-218-990-81	SHORT CHIP	0		
R729	1-218-990-81	SHORT CHIP	0		
R733	1-218-990-81	SHORT CHIP	0		
R1001	1-218-937-11	RES-CHIP	47	5%	1/16W
R1002	1-218-937-11	RES-CHIP	47	5%	1/16W
R1003	1-218-937-11	RES-CHIP	47	5%	1/16W
R1004	1-218-937-11	RES-CHIP	47	5%	1/16W
R1017	1-218-947-11	RES-CHIP	330	5%	1/16W
R1018	1-218-947-11	RES-CHIP	330	5%	1/16W
R1019	1-218-947-11	RES-CHIP	330	5%	1/16W
R1020	1-218-947-11	RES-CHIP	330	5%	1/16W
R1021	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R1022	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R1023	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R1024	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R1025	1-208-893-11	METAL CHIP	1.8K	0.5%	1/16W
R1026	1-208-893-11	METAL CHIP	1.8K	0.5%	1/16W
R1027	1-208-893-11	METAL CHIP	1.8K	0.5%	1/16W
R1028	1-208-893-11	METAL CHIP	1.8K	0.5%	1/16W
R1029	1-218-929-11	RES-CHIP	10	5%	1/16W
R1030	1-218-929-11	RES-CHIP	10	5%	1/16W
R1031	1-218-929-11	RES-CHIP	10	5%	1/16W
R1032	1-218-929-11	RES-CHIP	10	5%	1/16W
R1033	1-218-951-11	RES-CHIP	680	5%	1/16W
R1034	1-218-951-11	RES-CHIP	680	5%	1/16W
R1035	1-218-951-11	RES-CHIP	680	5%	1/16W
R1036	1-218-951-11	RES-CHIP	680	5%	1/16W
R1037	1-218-973-11	RES-CHIP	47K	5%	1/16W
R1038	1-218-973-11	RES-CHIP	47K	5%	1/16W
R1039	1-218-973-11	RES-CHIP	47K	5%	1/16W
R1040	1-234-378-21	RES, NETWORK	10K (1005X4)		
R1042	1-234-372-11	RES, NETWORK	100 (1005X4)		
R1043	1-234-372-11	RES, NETWORK	100 (1005X4)		
R1044	1-234-372-11	RES, NETWORK	100 (1005X4)		
R1045	1-234-372-11	RES, NETWORK	100 (1005X4)		
R1046	1-218-941-81	RES-CHIP	100	5%	1/16W
R1047	1-234-372-11	RES, NETWORK	100 (1005X4)		
R1048	1-234-372-11	RES, NETWORK	100 (1005X4)		
R1049	1-218-990-81	SHORT CHIP	0		
R1050	1-234-372-11	RES, NETWORK	100 (1005X4)		
R1051	1-234-372-11	RES, NETWORK	100 (1005X4)		
R1052	1-234-372-11	RES, NETWORK	100 (1005X4)		
R1053	1-218-953-11	RES-CHIP	1K	5%	1/16W
R1054	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1055	1-218-973-11	RES-CHIP	47K	5%	1/16W
R1057	1-216-864-11	SHORT CHIP	0		

Ref. No.	Part No.	Description	Remarks		
R1058	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1059	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1060	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R1061	1-218-961-11	RES-CHIP	4.7K	5%	1/16W

< TRANSFORMER >

* T300 1-445-211-11 TRANSFORMER, HIGH-FREQUENCY

< TUNER >

△ U301 1-693-743-11 TUNER (TUPADTC-D101HB)

< VIBRATOR >

* X300 1-813-966-21 VIBRATOR, CRYSTAL (SMD, 20MHZ)

A-1337-335-A DT-123 (AG) BOARD (AEP1, AEP3, UK)

A-1337-337-A DT-123 (BG) BOARD (AEP2)

(Ref.No.:40000 series)

< CAPACITOR >

C101	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C102	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C103	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C104	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C105	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C106	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C107	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C108	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C109	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C110	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C111	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C112	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C113	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C114	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C115	1-126-204-11	ELECT CHIP	47uF	20%	16V
C116	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C117	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C118	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C119	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C120	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C121	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C124	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C125	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C126	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C127	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C128	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C129	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C130	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C131	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C134	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C135	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C136	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C137	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C138	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C140	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C142	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C144	1-117-681-11	ELECT CHIP	100uF	20%	16V

Note : The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
C147	1-126-204-11	ELECT CHIP	47uF 20% 16V	C339	1-126-204-11	ELECT CHIP	47uF 20% 16V
C148	1-164-842-11	CERAMIC CHIP	2PF 0.25PF 50V	C340	1-165-908-11	CERAMIC CHIP	1uF 10% 10V
C149	1-164-842-11	CERAMIC CHIP	2PF 0.25PF 50V	C341	1-165-908-11	CERAMIC CHIP	1uF 10% 10V
C154	1-107-820-11	CERAMIC CHIP	0.1uF 16V	C342	1-126-204-11	ELECT CHIP	47uF 20% 16V
C155	1-107-820-11	CERAMIC CHIP	0.1uF 16V	C343	1-126-204-11	ELECT CHIP	47uF 20% 16V
C191	1-114-130-11	CERAMIC CHIP	1uF 6.3V	C353	1-124-779-00	ELECT CHIP	10uF 20% 16V
C192	1-107-820-11	CERAMIC CHIP	0.1uF 16V	C354	1-165-908-11	CERAMIC CHIP	1uF 10% 10V
C193	1-114-130-11	CERAMIC CHIP	1uF 6.3V	C356	1-162-919-11	CERAMIC CHIP	22PF 5% 50V
C194	1-114-130-11	CERAMIC CHIP	1uF 6.3V	C358	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C201	1-107-820-11	CERAMIC CHIP	0.1uF 16V (AEP2)	C359	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C202	1-107-820-11	CERAMIC CHIP	0.1uF 16V (AEP2)	C361	1-162-919-11	CERAMIC CHIP	22PF 5% 50V
C203	1-107-820-11	CERAMIC CHIP	0.1uF 16V (AEP2)	C364	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C204	1-107-820-11	CERAMIC CHIP	0.1uF 16V (AEP2)	C366	1-126-204-11	ELECT CHIP	47uF 20% 16V
C205	1-107-820-11	CERAMIC CHIP	0.1uF 16V (AEP2)	C367	1-126-197-11	ELECT CHIP	10uF 20% 50V
C206	1-107-820-11	CERAMIC CHIP	0.1uF 16V (AEP2)	C368	1-126-204-11	ELECT CHIP	47uF 20% 16V
C207	1-107-820-11	CERAMIC CHIP	0.1uF 16V (AEP2)	C369	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V
C208	1-107-820-11	CERAMIC CHIP	0.1uF 16V (AEP2)	C370	1-162-927-11	CERAMIC CHIP	100PF 5% 50V
C209	1-107-820-11	CERAMIC CHIP	0.1uF 16V (AEP2)	C372	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C210	1-126-204-11	ELECT CHIP	47uF 20% 16V (AEP2)	C373	1-125-889-11	CERAMIC CHIP	2.2uF 10% 10V
C211	1-126-204-11	ELECT CHIP	47uF 20% 16V	C375	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C212	1-107-820-11	CERAMIC CHIP	0.1uF 16V	C378	1-124-779-00	ELECT CHIP	10uF 20% 16V
C213	1-107-820-11	CERAMIC CHIP	0.1uF 16V	C379	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C221	1-126-204-11	ELECT CHIP	47uF 20% 16V (AEP2)	C380	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C222	1-114-130-11	CERAMIC CHIP	1uF 6.3V (AEP2)	C381	1-126-204-11	ELECT CHIP	47uF 20% 16V
C301	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C382	1-126-204-11	ELECT CHIP	47uF 20% 16V
C302	1-117-681-11	ELECT CHIP	100uF 20% 16V	C383	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C303	1-162-927-11	CERAMIC CHIP	100PF 5% 50V	C384	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C304	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C385	1-126-204-11	ELECT CHIP	47uF 20% 16V
C307	1-117-681-11	ELECT CHIP	100uF 20% 16V	C388	1-165-908-11	CERAMIC CHIP	1uF 10% 10V
C309	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C389	1-126-204-11	ELECT CHIP	47uF 20% 16V
C313	1-127-760-11	CERAMIC CHIP	4.7uF 10% 6.3V	C391	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C314	1-127-760-11	CERAMIC CHIP	4.7uF 10% 6.3V (AEP2)	C392	1-125-889-11	CERAMIC CHIP	2.2uF 10% 10V
C315	1-127-760-11	CERAMIC CHIP	4.7uF 10% 6.3V	C393	1-125-889-11	CERAMIC CHIP	2.2uF 10% 10V
C318	1-117-681-11	ELECT CHIP	100uF 20% 16V (AEP2)	C394	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C319	1-117-681-11	ELECT CHIP	100uF 20% 16V	C395	1-126-204-11	ELECT CHIP	47uF 20% 16V
C320	1-127-760-11	CERAMIC CHIP	4.7uF 10% 6.3V	C396	1-127-715-11	CERAMIC CHIP	0.22uF 10% 16V
C324	1-124-778-00	ELECT CHIP	22uF 20% 6.3V	C397	1-162-915-11	CERAMIC CHIP	10PF 0.5PF 50V
C326	1-164-315-11	CERAMIC CHIP	470PF 5% 50V	C398	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C329	1-126-204-11	ELECT CHIP	47uF 20% 16V (AEP2)	C399	1-164-156-11	CERAMIC CHIP	0.1uF 25V
C332	1-125-889-11	CERAMIC CHIP	2.2uF 10% 10V	C400	1-127-715-11	CERAMIC CHIP	0.22uF 10% 16V
C334	1-127-760-11	CERAMIC CHIP	4.7uF 10% 6.3V (AEP2)	C401	1-164-315-11	CERAMIC CHIP	470PF 5% 50V
C335	1-126-204-11	ELECT CHIP	47uF 20% 16V (AEP2)	C402	1-162-915-11	CERAMIC CHIP	10PF 0.5PF 50V
C338	1-165-908-11	CERAMIC CHIP	1uF 10% 10V (AEP2)	C404	1-125-889-11	CERAMIC CHIP	2.2uF 10% 10V
				C406	1-164-156-11	CERAMIC CHIP	0.1uF 25V
				C408	1-164-156-11	CERAMIC CHIP	0.1uF 25V
				C409	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
				C412	1-164-156-11	CERAMIC CHIP	0.1uF 25V
				C413	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
				C414	1-164-156-11	CERAMIC CHIP	0.1uF 25V
				C415	1-164-156-11	CERAMIC CHIP	0.1uF 25V
				C416	1-164-156-11	CERAMIC CHIP	0.1uF 25V
				C417	1-164-156-11	CERAMIC CHIP	0.1uF 25V
				C418	1-164-156-11	CERAMIC CHIP	0.1uF 25V
				C421	1-164-156-11	CERAMIC CHIP	0.1uF 25V
				C422	1-164-156-11	CERAMIC CHIP	0.1uF 25V
				C423	1-164-156-11	CERAMIC CHIP	0.1uF 25V (AEP2)
				C431	1-125-889-11	CERAMIC CHIP	2.2uF 10% 10V

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
C433	1-127-760-11	CERAMIC CHIP	4.7uF 10% 6.3V	F305	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C522	1-107-820-11	CERAMIC CHIP	0.1uF 16V	F306	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C524	1-107-820-11	CERAMIC CHIP	0.1uF 16V	F309	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C590	1-164-850-11	CERAMIC CHIP	10PF 0.5PF 50V	F310	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C591	1-164-850-11	CERAMIC CHIP	10PF 0.5PF 50V	F311	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C592	1-164-850-11	CERAMIC CHIP	10PF 0.5PF 50V	F312	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C593	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F313	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C594	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F314	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C595	1-126-210-21	ELECT CHIP	220uF 20% 4V	F316	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C596	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F317	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C597	1-126-210-21	ELECT CHIP	220uF 20% 4V	F318	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C598	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F321	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C599	1-117-681-11	ELECT CHIP	100uF 20% 16V	F397	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C600	1-164-156-11	CERAMIC CHIP	0.1uF 25V	F398	1-543-949-22	BEAD, FERRITE (CHIP) (1608)	
C601	1-117-681-11	ELECT CHIP	100uF 20% 16V			< IC >	
C602	1-127-760-11	CERAMIC CHIP	4.7uF 10% 6.3V	IC101	6-705-306-01	IC HYB25DC256160CE-6	
C603	1-124-778-00	ELECT CHIP	22uF 20% 6.3V	* IC104	6-711-077-01	IC KA5SDKAS01TSN	
C614	1-107-820-11	CERAMIC CHIP	0.1uF 16V	IC106	6-711-206-01	IC uPD61111GM-200-UEV-A	
C615	1-107-820-11	CERAMIC CHIP	0.1uF 16V	IC110	6-706-484-01	IC TC7SH04FU (T5RSOYJF)	
C616	1-125-889-11	CERAMIC CHIP	2.2uF 10% 10V	* IC201	6-711-207-01	IC CIMAX-SP2L (AEP2)	
C618	1-100-966-91	CERAMIC CHIP	10uF 20% 10V	IC202	6-710-050-01	IC TC74LCX245FK (EL) (AEP2)	
C620	1-100-966-91	CERAMIC CHIP	10uF 20% 10V	* IC203	6-711-290-01	IC TC74LCX373FK (EL, K) (AEP2)	
C621	1-163-037-11	CERAMIC CHIP	0.022uF 10% 50V	* IC204	6-711-290-01	IC TC74LCX373FK (EL, K) (AEP2)	
C623	1-114-130-11	CERAMIC CHIP	1uF 6.3V	IC208	6-707-361-01	IC ST890BDR (AEP2)	
C628	1-114-130-11	CERAMIC CHIP	1uF 6.3V	* IC304	6-711-026-01	IC MM1685ANRE	
C634	1-114-130-11	CERAMIC CHIP	1uF 6.3V	* IC307	6-711-027-01	IC MM1689FHBE	
C637	1-114-130-11	CERAMIC CHIP	1uF 6.3V	* IC309	6-711-146-01	IC FPF2007	
C638	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	* IC311	6-708-075-01	IC uPC3221GV	
C639	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	* IC312	6-711-026-01	IC MM1685ANRE	
C640	1-114-130-11	CERAMIC CHIP	1uF 6.3V	* IC313	6-711-223-01	IC DRX3975D	
		< CONNECTOR >		IC318	8-759-693-13	IC NJM12904V (TE2)	
CN102	1-779-338-51	CONNECTOR, FFC/FPC 28P				< COIL >	
* CN202	1-564-728-11	PIN, CONNECTOR (SMALL TYPE) 12P		L304	1-412-938-61	INDUCTOR 0.82uH	
CN203	1-564-704-41	PIN, CONNECTOR (SMALL TYPE) 2P		L314	1-469-110-21	FERRITE, EMI (SMD) (1608)	
CN204	1-568-834-11	SOCKET, CONNECT 15P		L315	1-400-703-21	(3216, EMI FERRITE (SMD)	
		< DIODE >				< TRANSISTOR >	
* D302	6-501-864-01	DIODE SM15T6V8A		Q201	8-729-029-06	TRANSISTOR DTC124EUA-T106 (AEP2)	
D303	8-719-988-61	DIODE 1SS355TE-17		Q202	8-729-028-86	TRANSISTOR DTA143EUA-T106 (AEP2)	
D304	8-719-988-61	DIODE 1SS355TE-17		Q203	8-729-905-35	TRANSISTOR 2SC4081-R (AEP2)	
		< FERRITE BEAD >		Q305	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
F101	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		Q306	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	
F102	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		Q307	8-729-905-35	TRANSISTOR 2SC4081-R	
F103	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		Q308	8-729-905-35	TRANSISTOR 2SC4081-R	
F104	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		Q309	8-729-029-09	TRANSISTOR DTC143EUA-T106	
F105	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		Q310	8-729-029-09	TRANSISTOR DTC143EUA-T106	
F106	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		Q312	8-729-029-06	TRANSISTOR DTC124EUA-T106	
F108	1-543-949-22	BEAD, FERRITE (CHIP) (1608)				< RESISTOR >	
F202	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		R100	1-218-990-81	SHORT CHIP 0	
F203	1-543-949-22	BEAD, FERRITE (CHIP) (1608) (AEP2)		R101	1-218-965-11	RES-CHIP 10K 5% 1/16W	
F204	1-543-949-22	BEAD, FERRITE (CHIP) (1608) (AEP2)		R104	1-218-965-11	RES-CHIP 10K 5% 1/16W	
F205	1-543-949-22	BEAD, FERRITE (CHIP) (1608) (AEP2)		R105	1-218-935-11	RES-CHIP 33 5% 1/16W	
F206	1-543-949-22	BEAD, FERRITE (CHIP) (1608) (AEP2)		R107	1-216-864-11	SHORT CHIP 0	
F300	1-543-949-22	BEAD, FERRITE (CHIP) (1608)		R108	1-218-990-81	SHORT CHIP 0	
F301	1-543-949-22	BEAD, FERRITE (CHIP) (1608)					
F302	1-543-949-22	BEAD, FERRITE (CHIP) (1608)					

Ref. No.	Part No.	Description	Remarks			
R109	1-218-990-81	SHORT CHIP	0			
R110	1-218-938-11	RES-CHIP	56	5%	1/16W	
R111	1-218-938-11	RES-CHIP	56	5%	1/16W	
R114	1-218-935-11	RES-CHIP	33	5%	1/16W	
R116	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R121	1-218-823-11	METAL CHIP	100	0.5%	1/10W	
R122	1-218-823-11	METAL CHIP	100	0.5%	1/10W	
R123	1-218-823-11	METAL CHIP	100	0.5%	1/10W	
R124	1-218-823-11	METAL CHIP	100	0.5%	1/10W	
R125	1-218-823-11	METAL CHIP	100	0.5%	1/10W	
R126	1-218-823-11	METAL CHIP	100	0.5%	1/10W	
R127	1-218-823-11	METAL CHIP	100	0.5%	1/10W	
R128	1-218-823-11	METAL CHIP	100	0.5%	1/10W	
R138	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R139	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R141	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R142	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R143	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R144	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R145	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R146	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R147	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R148	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R149	1-218-973-11	RES-CHIP	47K	5%	1/16W	
R151	1-218-973-11	RES-CHIP	47K	5%	1/16W	
R153	1-218-973-11	RES-CHIP	47K	5%	1/16W	
R154	1-218-973-11	RES-CHIP	47K	5%	1/16W	
R155	1-218-973-11	RES-CHIP	47K	5%	1/16W	
R159	1-218-941-81	RES-CHIP	100	5%	1/16W	
R160	1-218-941-81	RES-CHIP	100	5%	1/16W	
R166	1-218-846-11	METAL CHIP	910	0.5%	1/10W	
R167	1-218-846-11	METAL CHIP	910	0.5%	1/10W	
R168	1-218-831-11	METAL CHIP	220	0.5%	1/10W	
R169	1-218-827-11	METAL CHIP	150	0.5%	1/10W	
R170	1-218-935-11	RES-CHIP	33	5%	1/16W	
R172	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R173	1-218-990-81	SHORT CHIP	0			
R174	1-218-941-81	RES-CHIP	100	5%	1/16W	
R179	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R182	1-218-990-81	SHORT CHIP	0			
R183	1-218-990-81	SHORT CHIP	0			
R185	1-234-714-11	RES, NETWORK	56 (1005X4)			
R186	1-234-714-11	RES, NETWORK	56 (1005X4)			
R187	1-234-791-21	RES, NETWORK	150X4 (2010)			
R188	1-234-372-11	RES, NETWORK	100 (1005X4)			
R189	1-234-372-11	RES, NETWORK	100 (1005X4)			
R190	1-234-372-11	RES, NETWORK	100 (1005X4)			
R191	1-234-372-11	RES, NETWORK	100 (1005X4)			
R192	1-234-372-11	RES, NETWORK	100 (1005X4)			
R193	1-234-714-11	RES, NETWORK	56 (1005X4)			
R194	1-234-714-11	RES, NETWORK	56 (1005X4)			
R197	1-218-990-81	SHORT CHIP	0			
R199	1-218-990-81	SHORT CHIP	0			
R201	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R202	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R203	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R204	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R205	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			

Ref. No.	Part No.	Description	Remarks			
R206	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R207	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R208	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R209	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R210	1-218-990-81	SHORT CHIP	0 (AEP2)			
R211	1-218-965-11	RES-CHIP	10K	5%	1/16W (AEP2)	
R213	1-218-937-11	RES-CHIP	47	5%	1/16W (AEP2)	
R214	1-218-941-81	RES-CHIP	100	5%	1/16W (AEP2)	
R215	1-218-941-81	RES-CHIP	100	5%	1/16W (AEP2)	
R216	1-218-990-81	SHORT CHIP	0 (AEP2)			
R217	1-216-864-11	SHORT CHIP	0 (AEP2)			
R219	1-218-965-11	RES-CHIP	10K	5%	1/16W (AEP2)	
R221	1-218-937-11	RES-CHIP	47	5%	1/16W (AEP2)	
R222	1-218-965-11	RES-CHIP	10K	5%	1/16W (AEP2)	
R223	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R224	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R225	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R226	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R227	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R228	1-234-371-21	RES, NETWORK	47 (1005X4) (AEP2)			
R229	1-218-965-11	RES-CHIP	10K	5%	1/16W (AEP2)	
R230	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R231	1-218-952-11	RES-CHIP	820	5%	1/16W (AEP2)	
R233	1-218-937-11	RES-CHIP	47	5%	1/16W (AEP2)	
R234	1-218-937-11	RES-CHIP	47	5%	1/16W (AEP2)	
R236	1-218-990-81	SHORT CHIP	0 (AEP2)			
R239	1-234-371-21	RES, NETWORK	47 (1005X4)			
R240	1-234-371-21	RES, NETWORK	47 (1005X4)			
R241	1-234-371-21	RES, NETWORK	47 (1005X4)			
R242	1-234-371-21	RES, NETWORK	47 (1005X4)			
R243	1-234-371-21	RES, NETWORK	47 (1005X4)			
R244	1-234-371-21	RES, NETWORK	47 (1005X4)			
R245	1-234-371-21	RES, NETWORK	47 (1005X4)			
R246	1-234-371-21	RES, NETWORK	47 (1005X4)			
R247	1-234-371-21	RES, NETWORK	47 (1005X4)			
R248	1-234-371-21	RES, NETWORK	47 (1005X4)			
R249	1-234-371-21	RES, NETWORK	47 (1005X4)			
R250	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R251	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R252	1-218-990-81	SHORT CHIP	0 (AEP2)			
R253	1-218-937-11	RES-CHIP	47	5%	1/16W	
R254	1-218-937-11	RES-CHIP	47	5%	1/16W (AEP2)	
R256	1-218-937-11	RES-CHIP	47	5%	1/16W (AEP2)	
R257	1-218-937-11	RES-CHIP	47	5%	1/16W (AEP2)	
R269	1-218-962-11	RES-CHIP	5.6K	5%	1/16W (AEP2)	

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R270	1-218-965-11	RES-CHIP	10K	5%	1/16W (AEP2)	R356	1-216-864-11	SHORT CHIP	0		
						R357	1-216-864-11	SHORT CHIP	0		
R271	1-218-969-11	RES-CHIP	22K	5%	1/16W (AEP2)	R358	1-218-969-11	RES-CHIP	22K	5%	1/16W
						R359	1-218-965-11	RES-CHIP	10K	5%	1/16W
R272	1-218-965-11	RES-CHIP	10K	5%	1/16W (AEP2)	R361	1-216-864-11	SHORT CHIP	0 (AEP2)		
						R363	1-218-965-11	RES-CHIP	10K	5%	1/16W
R273	1-218-965-11	RES-CHIP	10K	5%	1/16W (AEP2)	R527	1-218-990-81	SHORT CHIP	0		
						R528	1-218-990-81	SHORT CHIP	0		
R277	1-218-937-11	RES-CHIP	47	5%	1/16W (AEP2)	R529	1-218-990-81	SHORT CHIP	0		
R278	1-234-372-11	RES, NETWORK	100 (1005X4)	(AEP2)		R530	1-218-990-81	SHORT CHIP	0		
						R531	1-218-990-81	SHORT CHIP	0		
R279	1-234-372-11	RES, NETWORK	100 (1005X4)	(AEP2)		R532	1-218-990-81	SHORT CHIP	0		
R280	1-234-372-11	RES, NETWORK	100 (1005X4)	(AEP2)		R534	1-218-990-81	SHORT CHIP	0		
R281	1-218-965-11	RES-CHIP	10K	5%	1/16W (AEP2)	R535	1-218-969-11	RES-CHIP	22K	5%	1/16W
R300	1-216-864-11	SHORT CHIP	0			R538	1-218-969-11	RES-CHIP	22K	5%	1/16W
R303	1-216-864-11	SHORT CHIP	0			R540	1-218-969-11	RES-CHIP	22K	5%	1/16W
						R542	1-218-969-11	RES-CHIP	22K	5%	1/16W
R304	1-216-833-11	METAL CHIP	10K	5%	1/10W	R544	1-218-969-11	RES-CHIP	22K	5%	1/16W
R305	1-216-864-11	SHORT CHIP	0			R546	1-218-969-11	RES-CHIP	22K	5%	1/16W
R306	1-216-864-11	SHORT CHIP	0								
R308	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R547	1-218-969-11	RES-CHIP	22K	5%	1/16W
R309	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R550	1-218-969-11	RES-CHIP	22K	5%	1/16W
						R551	1-218-969-11	RES-CHIP	22K	5%	1/16W
R310	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R554	1-218-969-11	RES-CHIP	22K	5%	1/16W
R311	1-216-819-11	METAL CHIP	680	5%	1/10W	R556	1-218-969-11	RES-CHIP	22K	5%	1/16W
R312	1-216-809-11	METAL CHIP	100	5%	1/10W						
R313	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R558	1-218-969-11	RES-CHIP	22K	5%	1/16W
R314	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R560	1-218-969-11	RES-CHIP	22K	5%	1/16W
						R561	1-218-969-11	RES-CHIP	22K	5%	1/16W
R315	1-218-965-11	RES-CHIP	10K	5%	1/16W	R564	1-218-969-11	RES-CHIP	22K	5%	1/16W
R316	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R566	1-218-969-11	RES-CHIP	22K	5%	1/16W
R317	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W						
R318	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R568	1-218-969-11	RES-CHIP	22K	5%	1/16W
R319	1-218-973-11	RES-CHIP	47K	5%	1/16W	R569	1-218-941-81	RES-CHIP	100	5%	1/16W
						R570	1-218-941-81	RES-CHIP	100	5%	1/16W
R320	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R571	1-218-990-81	SHORT CHIP	0		
R321	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R572	1-218-990-81	SHORT CHIP	0		
R322	1-216-839-11	METAL CHIP	33K	5%	1/10W						
R323	1-216-864-11	SHORT CHIP	0			R575	1-218-965-11	RES-CHIP	10K	5%	1/16W
R325	1-216-833-11	METAL CHIP	10K	5%	1/10W	R576	1-218-965-11	RES-CHIP	10K	5%	1/16W
						R577	1-218-990-81	SHORT CHIP	0		
R326	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R579	1-218-965-11	RES-CHIP	10K	5%	1/16W
R327	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R580	1-218-965-11	RES-CHIP	10K	5%	1/16W
R331	1-216-823-11	METAL CHIP	1.5K	5%	1/10W						
R333	1-216-809-11	METAL CHIP	100	5%	1/10W	R589	1-218-990-81	SHORT CHIP	0		
R336	1-216-864-11	SHORT CHIP	0			R594	1-218-938-11	RES-CHIP	56	5%	1/16W
						R595	1-218-938-11	RES-CHIP	56	5%	1/16W
R337	1-216-864-11	SHORT CHIP	0			R597	1-218-939-11	RES-CHIP	68	5%	1/16W
R341	1-218-960-11	RES-CHIP	3.9K	5%	1/16W	R598	1-218-939-11	RES-CHIP	68	5%	1/16W
R342	1-218-960-11	RES-CHIP	3.9K	5%	1/16W						
R343	1-216-864-11	SHORT CHIP	0			R605	1-218-990-81	SHORT CHIP	0		
R344	1-216-864-11	SHORT CHIP	0			R606	1-218-990-81	SHORT CHIP	0		
						R607	1-218-990-81	SHORT CHIP	0		
R345	1-216-864-11	SHORT CHIP	0			R608	1-218-937-11	RES-CHIP	47	5%	1/16W
R346	1-216-864-11	SHORT CHIP	0			R609	1-218-937-11	RES-CHIP	47	5%	1/16W
R347	1-216-864-11	SHORT CHIP	0								
R348	1-216-864-11	SHORT CHIP	0			R610	1-218-937-11	RES-CHIP	47	5%	1/16W
R349	1-216-864-11	SHORT CHIP	0			R616	1-218-937-11	RES-CHIP	47	5%	1/16W
						R621	1-218-969-11	RES-CHIP	22K	5%	1/16W
R350	1-216-864-11	SHORT CHIP	0			R622	1-218-969-11	RES-CHIP	22K	5%	1/16W
R351	1-218-965-11	RES-CHIP	10K	5%	1/16W	R623	1-218-990-81	SHORT CHIP	0		
R352	1-218-965-11	RES-CHIP	10K	5%	1/16W						
R353	1-218-969-11	RES-CHIP	22K	5%	1/16W	R624	1-234-400-21	CONDUCTOR, NETWORK	(1005X4) (AEP2)		
R354	1-216-864-11	SHORT CHIP	0			R625	1-234-400-21	CONDUCTOR, NETWORK	(1005X4) (AEP2)		
						R626	1-234-400-21	CONDUCTOR, NETWORK	(1005X4) (AEP2)		
R355	1-216-864-11	SHORT CHIP	0								

Ref. No.	Part No.	Description	Remarks
R627	1-234-400-21	CONDUCTOR, NETWORK (1005X4) (AEP1,AEP3,UK,AUS)	
R628	1-234-400-21	CONDUCTOR, NETWORK (1005X4) (AEP1,AEP3,UK,AUS)	
R629	1-234-400-21	CONDUCTOR, NETWORK (1005X4) (AEP1,AEP3,UK,AUS)	
R641	1-234-400-21	CONDUCTOR, NETWORK (1005X4)	
R642	1-218-990-81	SHORT CHIP 0	
R643	1-218-990-81	SHORT CHIP 0	
R644	1-216-864-11	SHORT CHIP 0	
R650	1-216-295-91	SHORT CHIP 0	
R651	1-216-864-11	SHORT CHIP 0	
R660	1-218-847-11	METAL CHIP 1K 0.5% 1/10W	
R661	1-218-847-11	METAL CHIP 1K 0.5% 1/10W	
R662	1-216-864-11	SHORT CHIP 0	
R666	1-216-864-11	SHORT CHIP 0	
R668	1-216-864-11	SHORT CHIP 0	
R671	1-216-857-11	METAL CHIP 1M 5% 1/10W	
R672	1-216-820-11	METAL CHIP 820 5% 1/10W	
R673	1-216-864-11	SHORT CHIP 0	
R674	1-216-864-11	SHORT CHIP 0	
R678	1-234-372-11	RES, NETWORK 100 (1005X4) (AEP1,AEP3,UK,AUS)	
R678	1-242-963-21	RES, NETWORK 33 (1005X4) (AEP2)	
R679	1-234-372-11	RES, NETWORK 100 (1005X4) (AEP1,AEP3,UK,AUS)	
R679	1-242-963-21	RES, NETWORK 33 (1005X4) (AEP2)	
R680	1-216-809-11	METAL CHIP 100 5% 1/10W (AEP1,AEP3,UK,AUS)	
R680	1-216-803-11	METAL CHIP 33 5% 1/10W (AEP2)	
R681	1-216-809-11	METAL CHIP 100 5% 1/10W (AEP1,AEP3,UK,AUS)	
R681	1-216-803-11	METAL CHIP 33 5% 1/10W (AEP2)	
R682	1-216-809-11	METAL CHIP 100 5% 1/10W (AEP1,AEP3,UK,AUS)	
R682	1-216-803-11	METAL CHIP 33 5% 1/10W (AEP2)	
R683	1-216-864-11	SHORT CHIP 0	
R685	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R686	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R687	1-216-811-11	METAL CHIP 150 5% 1/10W	
R688	1-216-864-11	SHORT CHIP 0	
R689	1-216-864-11	SHORT CHIP 0	
R690	1-216-864-11	SHORT CHIP 0	
R691	1-216-864-11	SHORT CHIP 0	
R692	1-216-864-11	SHORT CHIP 0	
R693	1-216-864-11	SHORT CHIP 0	
R694	1-242-963-21	RES, NETWORK 33 (1005X4)	
R695	1-242-963-21	RES, NETWORK 33 (1005X4)	
R696	1-242-963-21	RES, NETWORK 33 (1005X4)	
R698	1-218-935-11	RES-CHIP 33 5% 1/16W	
R699	1-218-935-11	RES-CHIP 33 5% 1/16W	
R700	1-218-935-11	RES-CHIP 33 5% 1/16W	
R701	1-218-935-11	RES-CHIP 33 5% 1/16W	
R702	1-218-935-11	RES-CHIP 33 5% 1/16W	
R703	1-216-295-91	SHORT CHIP 0	
R704	1-218-935-11	RES-CHIP 33 5% 1/16W	

Ref. No.	Part No.	Description	Remarks
R705	1-218-935-11	RES-CHIP 33 5% 1/16W	
R706	1-218-935-11	RES-CHIP 33 5% 1/16W	
R707	1-218-935-11	RES-CHIP 33 5% 1/16W	
R715	1-218-990-81	SHORT CHIP 0	
R721	1-234-372-11	RES, NETWORK 100 (1005X4)	
R722	1-234-372-11	RES, NETWORK 100 (1005X4)	
R723	1-234-791-21	RES, NETWORK 150X4 (2010)	
R724	1-234-791-21	RES, NETWORK 150X4 (2010)	
R725	1-218-965-11	RES-CHIP 10K 5% 1/16W	
R726	1-218-965-11	RES-CHIP 10K 5% 1/16W	
R733	1-218-990-81	SHORT CHIP 0	
R1017	1-218-947-11	RES-CHIP 330 5% 1/16W	
R1057	1-216-864-11	SHORT CHIP 0	
< TRANSFORMER >			
* T300	1-445-211-11	TRANSFORMER, HIGH-FREQUENCY	
< TUNER >			
△ U301	1-693-743-11	TUNER (TUPADTC-D101HB)	
< VIBRATOR >			
* X300	1-813-966-21	VIBRATOR, CRYSTAL (SMD, 20MHz)	
FL-178 (BG) BOARD (not supplied) (AEP, UK)			
FL-178 (1640 HCA) BOARD (not supplied) (AUS)			
(Ref.No.;30000 series)			

< CAPACITOR >			
C101	1-115-156-11	CERAMIC CHIP 1uF 10V	
C102	1-115-156-11	CERAMIC CHIP 1uF 10V	
C107	1-107-726-91	CERAMIC CHIP 0.01uF 10% 16V	
C111	1-125-972-61	ELECT 100uF 20% 16V	
< CONNECTOR >			
CN103	1-785-828-21	CONNECTOR, SQUARE TYPE 4P	
CN105	1-817-693-11	CONNECTOR, USB (B)	
CN106	1-815-381-11	CONNECTOR, FPC/FFC 5P	
< IC >			
IC101	6-600-392-01	IC GP1UM27XK0SF	
< COIL >			
L102	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
L103	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
L104	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
L105	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
< RESISTOR >			
R104	1-216-803-11	METAL CHIP 33 5% 1/10W	
R105	1-216-803-11	METAL CHIP 33 5% 1/10W	
R108	1-216-803-11	METAL CHIP 33 5% 1/10W	
R109	1-216-803-11	METAL CHIP 33 5% 1/10W	
R112	1-216-864-11	SHORT CHIP 0	
R113	1-216-864-11	SHORT CHIP 0	

Note : The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
		< SWITCH >				< JACK >	
S101	1-771-410-21	SWITCH, TACTILE (I/⏻(POWER))		J201	1-780-049-11	TERMINAL BOARD (S TERMINAL+3P)	
S102	1-771-410-21	SWITCH, TACTILE (ONE TOUCH DUB)				< COIL >	
		< VARISTOR >		L201	1-411-919-11	INDUCTOR 100uH	
VDR102	1-802-071-21	VARISTOR, CHIP				< FLUORESCENT INDICATOR TUBE >	
VDR104	1-802-071-21	VARISTOR, CHIP		ND201	1-519-964-11	INDICATOR TUBE, FLUORESCENT	
		FR-274 (BG) BOARD (not supplied) (AEP, UK)				< TRANSISTOR >	
		FR-274 (1640 HCA) BOARD (not supplied)		Q201	8-729-052-91	TRANSISTOR 2SD1898T100R	
		(AUS)		Q202	8-729-052-91	TRANSISTOR 2SD1898T100R	
		(Ref.No.;30000 series)		Q203	8-729-904-87	TRANSISTOR 2SB1197K-R	
		*****		Q204	8-729-421-19	TRANSISTOR UN2213	
				Q205	8-729-029-06	TRANSISTOR DTC124EUA-T106	
* 2-319-520-01		SPACER, FL		Q206	8-729-029-10	TRANSISTOR DTC143TUA-T106	
		< CAPACITOR >				< RESISTOR >	
C201	1-128-111-11	ELECT 100uF 20% 25V		R201	1-216-295-91	SHORT CHIP 0	
C204	1-164-230-11	CERAMIC CHIP 220PF 5% 50V		R205	1-216-864-11	SHORT CHIP 0	
C206	1-164-230-11	CERAMIC CHIP 220PF 5% 50V		R206	1-216-864-11	SHORT CHIP 0	
* C207	1-107-377-21	MYLAR 0.0027uF 5% 200V		R207	1-216-864-11	SHORT CHIP 0	
C211	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V		R209	1-216-833-11	METAL CHIP 10K 5% 1/10W	
C213	1-131-992-91	CERAMIC CHIP 100000PF 35V		R213	1-216-864-11	SHORT CHIP 0	
C215	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V		R215	1-216-830-11	METAL CHIP 5.6K 5% 1/10W	
C216	1-128-131-11	ELECT 22uF 20% 50V		R217	1-216-833-11	METAL CHIP 10K 5% 1/10W	
C217	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V		R218	1-216-849-11	METAL CHIP 220K 5% 1/10W	
C221	1-107-726-91	CERAMIC CHIP 0.01uF 10% 16V		R220	1-216-849-11	METAL CHIP 220K 5% 1/10W	
C222	1-107-726-91	CERAMIC CHIP 0.01uF 10% 16V		R222	1-216-295-91	SHORT CHIP 0	
C223	1-115-339-11	CERAMIC CHIP 0.1uF 10% 50V		R223	1-216-826-11	METAL CHIP 2.7K 5% 1/10W	
		< CONNECTOR >		R225	1-216-814-11	METAL CHIP 270 5% 1/10W	
CN201	1-815-381-11	CONNECTOR, FPC/FFC 5P		R227	1-216-838-11	METAL CHIP 27K 5% 1/10W	
CN202	1-563-614-31	HOUSING, CONNECTOR 11P		R228	1-216-833-11	METAL CHIP 10K 5% 1/10W	
CN203	1-784-739-11	CONNECTOR, FFC 17P		R229	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
		< DIODE >		R230	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
D202	8-719-067-40	DIODE STZ6.8N-T146		R231	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
D203	8-719-067-40	DIODE STZ6.8N-T146		R232	1-216-864-11	SHORT CHIP 0	
D204	8-719-067-40	DIODE STZ6.8N-T146		R233	1-216-845-11	METAL CHIP 100K 5% 1/10W	
D205	8-719-067-40	DIODE STZ6.8N-T146		R235	1-216-864-11	SHORT CHIP 0	
D206	8-719-067-40	DIODE STZ6.8N-T146		R236	1-216-833-11	METAL CHIP 10K 5% 1/10W	
D207	8-719-067-40	DIODE STZ6.8N-T146		R237	1-216-833-11	METAL CHIP 10K 5% 1/10W	
D208	8-719-988-61	DIODE 1SS355TE-17		R238	1-216-833-11	METAL CHIP 10K 5% 1/10W	
D209	8-719-988-61	DIODE 1SS355TE-17		R239	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
D210	8-719-988-61	DIODE 1SS355TE-17		R240	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
D211	8-719-988-61	DIODE 1SS355TE-17		R241	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	
* D212	6-501-884-01	DIODE SDPB31H3C0100		R242	1-216-830-11	METAL CHIP 5.6K 5% 1/10W	
D214	6-501-437-01	DIODE SLI-343YC3F		R243	1-216-833-11	METAL CHIP 10K 5% 1/10W	
D216	8-719-056-82	DIODE MM3Z6V2ST1		R244	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
		< FERRITE BEAD >		R245	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
FB201	1-414-228-11	INDUCTOR, FERRITE BEAD		R246	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	
FB202	1-414-228-11	INDUCTOR, FERRITE BEAD		R248	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	
		< IC >		R250	1-216-805-11	METAL CHIP 47 5% 1/10W	
IC201	6-701-729-01	IC PT6315		R251	1-216-805-11	METAL CHIP 47 5% 1/10W	
				R252	1-216-805-11	METAL CHIP 47 5% 1/10W	

Ref. No.	Part No.	Description	Remarks
< SWITCH >			
S201	1-771-410-21	SWITCH, TACTILE (▲ (OPEN/CLOSE))	
S203	1-786-726-11	SWITCH, TACTILE (■ (REC STOP))	
S204	1-771-410-21	SWITCH, TACTILE (INPUT SELECT)	
S207	1-786-726-11	SWITCH, TACTILE (● (REC))	
S208	1-771-410-21	SWITCH, TACTILE (CHANNEL +)	
S209	1-771-410-21	SWITCH, TACTILE (CHANNEL -)	
S210	1-786-726-11	SWITCH, TACTILE (▶ (PLAY))	
S211	1-786-726-11	SWITCH, TACTILE (■ (STOP))	
S212	1-786-726-11	SWITCH, TACTILE (DVD)	
S213	1-786-726-11	SWITCH, TACTILE (HDD)	
< TRANSFORMER >			
* T201	1-445-207-11	TRANSFORMER, DC-DC CONVERTER	
RD-65 (BS) BOARD (not supplied)			
RD-65 (DS) EM BOARD (not supplied)			
(Ref.No.;20000 series)			

< CAPACITOR >			
C100	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C101	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C103	1-126-210-21	ELECT CHIP 220uF 20%	4V
C104	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C105	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C106	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C107	1-164-936-11	CERAMIC CHIP 680PF 10%	50V
C113	1-100-581-81	CERAMIC CHIP 0.0047uF 10%	50V
C114	1-100-581-81	CERAMIC CHIP 0.0047uF 10%	50V
C115	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V
C116	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C117	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C120	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C121	1-164-939-11	CERAMIC CHIP 0.0022uF 10%	50V
C122	1-164-939-11	CERAMIC CHIP 0.0022uF 10%	50V
C124	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C125	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C127	1-119-923-11	CERAMIC CHIP 0.047uF 10%	10V
C128	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C129	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C130	1-127-760-11	CERAMIC CHIP 4.7uF 10%	6.3V
C131	1-137-987-81	CERAMIC CHIP 0.068uF 10%	10V
C133	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C134	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C135	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V
C136	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C137	1-164-942-11	CERAMIC CHIP 0.0068uF 10%	16V
C140	1-100-415-91	CERAMIC CHIP 0.47uF 10%	6.3V
C141	1-100-415-91	CERAMIC CHIP 0.47uF 10%	6.3V
C142	1-100-966-91	CERAMIC CHIP 10uF 20%	10V
C143	1-100-966-91	CERAMIC CHIP 10uF 20%	10V
C144	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V
C145	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V
C146	1-100-966-91	CERAMIC CHIP 10uF 20%	10V
C149	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V
C152	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V

Ref. No.	Part No.	Description	Remarks
C153	1-124-779-00	ELECT CHIP 10uF 20%	16V
C154	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C155	1-100-415-91	CERAMIC CHIP 0.47uF 10%	6.3V
C156	1-165-448-81	CERAMIC CHIP 0.0018uF 10%	50V
C157	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V
C158	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V
C159	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C162	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C163	1-126-210-21	ELECT CHIP 220uF 20%	4V
C164	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C165	1-164-858-11	CERAMIC CHIP 22PF 5%	50V
C166	1-164-858-11	CERAMIC CHIP 22PF 5%	50V
C167	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C169	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C170	1-164-866-11	CERAMIC CHIP 47PF 5%	50V
C171	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C172	1-164-866-11	CERAMIC CHIP 47PF 5%	50V
C173	1-164-866-11	CERAMIC CHIP 47PF 5%	50V
C174	1-164-866-11	CERAMIC CHIP 47PF 5%	50V
C176	1-164-858-11	CERAMIC CHIP 22PF 5%	50V
C177	1-164-858-11	CERAMIC CHIP 22PF 5%	50V
C180	1-100-966-91	CERAMIC CHIP 10uF 20%	10V
C181	1-127-760-11	CERAMIC CHIP 4.7uF 10%	6.3V
C182	1-100-966-91	CERAMIC CHIP 10uF 20%	10V
C187	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V
C188	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V
C189	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C194	1-127-760-11	CERAMIC CHIP 4.7uF 10%	6.3V
C197	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C199	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C201	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C202	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C280	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C281	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C282	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C283	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C284	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C285	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C286	1-100-966-91	CERAMIC CHIP 10uF 20%	10V
C287	1-114-130-11	CERAMIC CHIP 1uF	6.3V
C288	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C289	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C290	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C291	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C501	1-107-820-11	CERAMIC CHIP 0.1uF	16V
C503	1-162-962-11	CERAMIC CHIP 470PF 10%	50V
C504	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C505	1-100-566-91	CERAMIC CHIP 0.1uF 10%	25V
C508	1-164-937-11	CERAMIC CHIP 0.001uF 10%	50V
C509	1-164-862-11	CERAMIC CHIP 33PF 5%	50V
C510	1-164-870-11	CERAMIC CHIP 68PF 5%	50V
C511	1-127-573-11	CERAMIC CHIP 1uF 10%	16V
C512	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C513	1-164-360-11	CERAMIC CHIP 0.1uF	16V
C514	1-100-566-91	CERAMIC CHIP 0.1uF 10%	25V
C515	1-100-566-91	CERAMIC CHIP 0.1uF 10%	25V
C516	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C532	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
C1001	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1058	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C1002	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1059	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1003	1-126-209-11	ELECT CHIP	100uF	20%	4V	C1060	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1004	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1061	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1005	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1062	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1006	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1063	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1007	1-126-210-21	ELECT CHIP	220uF	20%	4V	C1064	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1008	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1065	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1009	1-126-210-21	ELECT CHIP	220uF	20%	4V	C1066	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1010	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1067	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1011	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1068	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1012	1-126-209-11	ELECT CHIP	100uF	20%	4V	C1101	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1013	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1104	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1014	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1105	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1015	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1113	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1016	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1202	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1017	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1203	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1018	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1204	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1019	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1205	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C1020	1-124-779-00	ELECT CHIP	10uF	20%	16V	C1206	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C1021	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C1207	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1022	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1208	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1023	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1209	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1024	1-126-209-11	ELECT CHIP	100uF	20%	4V	C1210	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1025	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1211	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1026	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1212	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1027	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1213	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1028	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1214	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1029	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1215	1-126-209-11	ELECT CHIP	100uF	20%	4V
C1030	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1216	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1031	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1217	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1032	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1218	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1033	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1219	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1034	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1220	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1035	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1221	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1036	1-126-209-11	ELECT CHIP	100uF	20%	4V	C1222	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1037	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1223	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1038	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1224	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C1039	1-126-209-11	ELECT CHIP	100uF	20%	4V	C1225	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C1040	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1226	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1041	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1227	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C1044	1-164-840-11	CERAMIC CHIP	1P	0.25PF	50V (DS)	C1228	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1044	1-164-842-11	CERAMIC CHIP	2PF	0.25PF	50V (BS)	C1229	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C1045	1-164-840-11	CERAMIC CHIP	1P	0.25PF	50V (DS)	C1230	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1045	1-164-842-11	CERAMIC CHIP	2PF	0.25PF	50V (BS)	C1231	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C1047	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	C1235	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C1048	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1236	1-126-209-11	ELECT CHIP	100uF	20%	4V
C1049	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1291	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1050	1-126-209-11	ELECT CHIP	100uF	20%	4V	C1301	1-125-889-91	CERAMIC CHIP	2.2uF	10%	10V
C1051	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C1302	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1052	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1303	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1053	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C1304	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C1056	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C1312	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C1057	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C1313	1-107-820-11	CERAMIC CHIP	0.1uF		16V
						C1315	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V
						C1316	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
						C1401	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
C1421	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C3313	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C1801	1-114-130-11	CERAMIC CHIP	1uF		6.3V						(DS)
C1802	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V	C3313	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C1803	1-164-882-11	CERAMIC CHIP	220PF	5%	16V						(BS)
C1804	1-164-934-11	CERAMIC CHIP	330PF	10%	50V	C3314	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
											(DS)
C1805	1-119-923-11	CERAMIC CHIP	0.047uF	10%	10V	C3315	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C1811	1-114-130-11	CERAMIC CHIP	1uF		6.3V						(DS)
C1812	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V	C3316	1-164-845-11	CERAMIC CHIP	5PF		50V
C1813	1-164-874-11	CERAMIC CHIP	100PF	5%	50V						(DS)
C1814	1-164-878-11	CERAMIC CHIP	150PF	5%	50V	C3317	1-164-870-11	CERAMIC CHIP	68PF	5%	50V
											(DS)
C1815	1-119-923-11	CERAMIC CHIP	0.047uF	10%	10V	C3318	1-164-854-11	CERAMIC CHIP	15PF	5%	50V
C2305	1-114-130-11	CERAMIC CHIP	1uF		6.3V						(DS)
C2501	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C3319	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C2502	1-114-130-11	CERAMIC CHIP	1uF		6.3V						(DS)
C2503	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C3319	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
											(BS)
C2504	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C3320	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C2505	1-114-130-11	CERAMIC CHIP	1uF		6.3V						(DS)
C2506	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C3321	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C3103	1-117-681-11	ELECT CHIP	100uF	20%	16V						(DS)
C3104	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C3321	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
											(DS)
C3105	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C3322	1-164-845-11	CERAMIC CHIP	5PF		50V
C3106	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V						(DS)
C3107	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C3323	1-164-870-11	CERAMIC CHIP	68PF	5%	50V
C3108	1-126-210-21	ELECT CHIP	220uF	20%	4V						(DS)
C3201	1-126-916-11	ELECT	1000uF	20%	6.3V	C3324	1-164-854-11	CERAMIC CHIP	15PF	5%	50V
											(DS)
C3202	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C3325	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C3203	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V						(DS)
C3204	1-164-934-11	CERAMIC CHIP	330PF	10%	50V	C3325	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C3206	1-107-820-11	CERAMIC CHIP	0.1uF		16V						(BS)
C3207	1-126-205-11	ELECT CHIP	47uF	20%	6.3V	C3329	1-164-845-11	CERAMIC CHIP	5PF		50V
											(DS)
C3211	1-117-681-11	ELECT CHIP	100uF	20%	16V	C3330	1-164-870-11	CERAMIC CHIP	68PF	5%	50V
C3212	1-107-820-11	CERAMIC CHIP	0.1uF		16V						(DS)
* C3213	1-100-741-81	CERAMIC CHIP	560PF	5%	50V	C3331	1-164-854-11	CERAMIC CHIP	15PF	5%	50V
* C3214	1-100-741-81	CERAMIC CHIP	560PF	5%	50V						(DS)
C3215	1-164-872-11	CERAMIC CHIP	82PF	5%	50V	C3332	1-114-130-11	CERAMIC CHIP	1uF		6.3V
						C3333	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C3216	1-164-872-11	CERAMIC CHIP	82PF	5%	50V						(DS)
C3217	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C3334	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C3218	1-117-681-11	ELECT CHIP	100uF	20%	16V						(DS)
C3219	1-126-210-21	ELECT CHIP	220uF	20%	4V	C3335	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C3220	1-114-130-11	CERAMIC CHIP	1uF		6.3V						(DS)
						C3339	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C3301	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V						(DS)
C3302	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V	C3340	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C3303	1-164-845-11	CERAMIC CHIP	5PF		50V						(DS)
					(DS)	C3341	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C3303	1-164-854-11	CERAMIC CHIP	15PF	5%	50V						(DS)
					(BS)	C3342	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C3304	1-164-870-81	CERAMIC CHIP	68PF	5%	50V	C3701	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
					(DS)	C3703	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C3304	1-164-872-11	CERAMIC CHIP	82PF	5%	50V						
					(BS)	C3704	1-100-966-91	CERAMIC CHIP	10uF	20%	10V
C3305	1-164-854-11	CERAMIC CHIP	15PF	5%	50V						(DS)
					(DS)	C3705	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C3305	1-164-858-11	CERAMIC CHIP	22PF	5%	50V						(BS)
					(DS)	C3706	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C3307	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C3707	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C3311	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V						(DS)
					(DS)	C3738	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C3312	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V						
					(DS)	C3801	1-114-130-11	CERAMIC CHIP	1uF		6.3V
						C3802	1-114-130-11	CERAMIC CHIP	1uF		6.3V
						C3803	1-114-130-11	CERAMIC CHIP	1uF		6.3V

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
C3804	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5110	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C4501	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5111	1-114-130-11	CERAMIC CHIP	1uF		6.3V
						C5112	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C4502	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5113	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C4503	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5114	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C4504	1-107-820-11	CERAMIC CHIP	0.1uF		16V						
C4505	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5115	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C4506	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C5116	1-114-130-11	CERAMIC CHIP	1uF		6.3V
						C5117	1-164-852-11	CERAMIC CHIP	12PF	5%	50V
C4507	1-117-681-11	ELECT CHIP	100uF	20%	16V	C5118	1-164-852-11	CERAMIC CHIP	12PF	5%	50V
C4508	1-126-210-21	ELECT CHIP	220uF	20%	4V	C5119	1-100-574-81	CERAMIC CHIP	270PF	10%	50V
C4509	1-126-210-21	ELECT CHIP	220uF	20%	4V						
C4511	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	C5120	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C4513	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	C5121	1-126-209-11	ELECT CHIP	100uF	20%	4V
						C5122	1-126-209-11	ELECT CHIP	100uF	20%	4V
C4515	1-126-205-11	ELECT CHIP	47uF	20%	6.3V	C5123	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C4516	1-124-779-00	ELECT CHIP	10uF	20%	16V	C5132	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C4522	1-114-130-11	CERAMIC CHIP	1uF		6.3V						
C4524	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	C5133	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C4525	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	C5205	1-114-130-11	CERAMIC CHIP	1uF		6.3V
						C5209	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C4526	1-218-967-11	RES-CHIP	15K	5%	1/16W	C5210	1-117-681-11	ELECT CHIP	100uF	20%	16V
C4531	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5211	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C4532	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V						
C4533	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5212	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V
C4534	1-100-966-91	CERAMIC CHIP	10uF	20%	10V	C5213	1-114-130-11	CERAMIC CHIP	1uF		6.3V
						C5216	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C4535	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C5217	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C4536	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C5218	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C4537	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V						
C4539	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C5219	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C4540	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C5222	1-107-820-11	CERAMIC CHIP	0.1uF		16V
						C5223	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V
C4541	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5601	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C4542	1-125-889-11	CERAMIC CHIP	2.2uF	10%	10V	C5602	1-114-130-11	CERAMIC CHIP	1uF		6.3V
C4543	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V						
C4553	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	C5603	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C4555	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	C5604	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
						C5605	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C4556	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	C5606	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C4557	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V	C5607	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C4558	1-117-681-11	ELECT CHIP	100uF	20%	16V						
C4559	1-117-681-11	ELECT CHIP	100uF	20%	16V	C5608	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C4562	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5609	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
						C5610	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C4563	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5611	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C4567	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5612	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C4570	1-114-130-11	CERAMIC CHIP	1uF		6.3V						
C4571	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	C5613	1-126-209-11	ELECT CHIP	100uF	20%	4V
C4572	1-126-210-21	ELECT CHIP	220uF	20%	4V	C5614	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
						C5615	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C4573	1-127-760-11	CERAMIC CHIP	4.7uF	10%	6.3V	C5616	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V
C4585	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C5617	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C4586	1-117-681-11	ELECT CHIP	100uF	20%	16V						
C4701	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5622	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C4702	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5623	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
						C5624	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C4703	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5625	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C4704	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C5626	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C4705	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V						
C4706	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	C5627	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C5104	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C5628	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
						C5629	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C5105	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5630	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C5106	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5631	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C5107	1-114-130-11	CERAMIC CHIP	1uF		6.3V						
C5108	1-114-130-11	CERAMIC CHIP	1uF		6.3V	C5632	1-164-943-81	CERAMIC CHIP	0.01uF	10%	16V
C5109	1-107-820-11	CERAMIC CHIP	0.1uF		16V	C5640	1-164-854-11	CERAMIC CHIP	15PF	5%	50V
						C5641	1-164-854-11	CERAMIC CHIP	15PF	5%	50V

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks	
C5702	1-114-130-11	CERAMIC CHIP	1uF	6.3V	IC5103	6-706-365-01	IC uPD72852AGB-8EU-A	
C5704	1-126-193-11	ELECT CHIP	1uF	20%	50V	IC5202	6-710-887-01	IC R5523N001B-TR-F
C5705	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	IC5203	6-706-487-01	IC TC7SH08FU (T5RSOYJF)
C5706	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	IC5602	6-806-103-01	IC 88SA8040-TBC1C000
C5707	1-114-130-11	CERAMIC CHIP	1uF	6.3V	IC5701	6-707-858-01	IC TC74VHC00FT (EKJ)	
C5708	1-126-210-21	ELECT CHIP	220uF	20%	4V	* IC5802	6-711-188-01	IC TC7MB3257FK (EL)
C5801	1-114-130-11	CERAMIC CHIP	1uF	6.3V			< JACK >	
C5802	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	JA5701	1-793-446-21	JACK, PIN 1P
C5803	1-114-130-11	CERAMIC CHIP	1uF	6.3V	JA5801	1-821-450-12	CONNECTOR, HDMI	
C5804	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V		< COIL >	
C5805	1-114-130-11	CERAMIC CHIP	1uF	6.3V	L105	1-469-967-21	INDUCTOR 10uH	
C5806	1-114-130-11	CERAMIC CHIP	1uF	6.3V	L1005	1-412-008-31	INDUCTOR 15uH	
C5807	1-114-130-11	CERAMIC CHIP	1uF	6.3V	L1801	1-412-958-21	INDUCTOR 39uH	
C5808	1-114-130-11	CERAMIC CHIP	1uF	6.3V	L1811	1-412-953-11	INDUCTOR 15uH	
C5809	1-126-210-21	ELECT CHIP	220uF	20%	4V	L3301	1-412-954-11	INDUCTOR 18uH
C5812	1-107-820-11	CERAMIC CHIP	0.1uF	16V	L3302	1-412-951-11	INDUCTOR 10uH	
C5813	1-107-820-11	CERAMIC CHIP	0.1uF	16V	L3303	1-412-954-11	INDUCTOR 18uH (DS)	
C5814	1-164-360-11	CERAMIC CHIP	0.1uF	16V	L3304	1-412-951-11	INDUCTOR 10uH (DS)	
C5815	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V	L3305	1-412-954-11	INDUCTOR 18uH (DS)
C5816	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V	L3306	1-412-951-11	INDUCTOR 10uH (DS)
C5817	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V	L3307	1-412-954-11	INDUCTOR 18uH (DS)
C5818	1-100-566-91	CERAMIC CHIP	0.1uF	10%	25V	L3308	1-412-951-11	INDUCTOR 10uH (DS)
C5819	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	L4551	1-469-967-21	INDUCTOR 10uH
C5820	1-114-130-11	CERAMIC CHIP	1uF	6.3V	L5101	1-414-235-22	INDUCTOR, FERRITE BEAD	
C5821	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	L5201	1-456-799-11	COIL, COMMON MODE CHOKE
C5822	1-164-937-11	CERAMIC CHIP	0.001uF	10%	50V	L5202	1-456-799-11	COIL, COMMON MODE CHOKE
		< CONNECTOR >			L5701	1-400-330-21	INDUCTOR, FERRITE BEAD (1608)	
CN201	1-817-705-51	CONNECTOR, FPC 10P			L5801	1-457-374-21	COMMOM MODE CHOKE COIL	
CN501	1-766-767-51	CONNECTOR, FPC 12P			L5802	1-457-374-21	COMMOM MODE CHOKE COIL	
CN601	1-784-857-51	CONNECTOR, FFC (LIF (NON-ZIF)) 5P			L5803	1-457-374-21	COMMOM MODE CHOKE COIL	
* CN4501	1-564-729-11	PIN, CONNECTOR (SMALL TYPE) 13P			L5804	1-457-374-21	COMMOM MODE CHOKE COIL	
CN4701	1-779-338-51	CONNECTOR, FFC/FPC 28P				< TRANSISTOR >		
CN5101	1-819-414-11	PIN, CONNECTOR (1.5MM) 6P			Q1801	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
CN5201	1-820-176-11	PIN, CONNECTOR (1.5MM) 10P			Q1811	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
		< DIODE >			Q2501	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
D101	8-719-077-34	DIODE SML-310YTT86			Q2502	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
D3201	8-719-941-86	DIODE DAN202UT106			Q2503	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
D3711	8-719-058-24	DIODE RB501V-40TE-17			Q2504	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
D3712	8-719-058-24	DIODE RB501V-40TE-17			Q2505	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
D4521	8-719-058-24	DIODE RB501V-40TE-17			Q3301	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
D4552	8-719-058-24	DIODE RB501V-40TE-17			Q3302	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
D4571	8-719-058-24	DIODE RB501V-40TE-17			Q3303	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF (DS)	
		< IC >			Q3304	8-729-620-13	TRANSISTOR 2SC4154TP-1EF (DS)	
IC1201	6-708-305-01	IC K4H511638C-UCB3T			Q3305	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF (DS)	
IC1221	6-708-305-01	IC K4H511638C-UCB3T			Q3306	8-729-620-13	TRANSISTOR 2SC4154TP-1EF (DS)	
IC1301	8-759-693-13	IC NJM12904V (TE2)			Q3307	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF (DS)	
IC1302	8-759-693-13	IC NJM12904V (TE2)			Q3308	8-729-620-13	TRANSISTOR 2SC4154TP-1EF (DS)	
IC3101	6-710-840-01	IC AK5358AET-E2			Q4581	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
IC3202	8-759-100-96	IC uPC4558G2			Q5701	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
IC3701	8-759-679-05	IC TC7WH34FU (TE12R)			Q5801	6-550-376-01	TRANSISTOR UMXIN-TN	
IC3702	6-706-487-01	IC TC7SH08FU (T5RSOYJF)			Q5804	8-729-029-06	TRANSISTOR DTC124EUA-T106	
IC3707	6-707-472-01	IC PST3813UL			Q5805	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
IC4541	6-702-362-01	IC MM1563DFBE			Q5808	8-729-031-34	TRANSISTOR 2SK2034	
IC4702	8-759-592-47	IC TC7SZ08FU (TE85R)			Q5809	6-550-375-01	TRANSISTOR UMD2N-TR	

Ref. No.	Part No.	Description	Remarks				Ref. No.	Part No.	Description	Remarks			
< RESISTOR >							R240	1-218-933-11	RES-CHIP	22	5%	1/16W	
R104	1-218-966-11	RES-CHIP	12K	5%	1/16W		R241	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R105	1-218-990-81	SHORT CHIP	0				R242	1-218-933-11	RES-CHIP	22	5%	1/16W	
R107	1-218-973-11	RES-CHIP	47K	5%	1/16W		R243	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R108	1-218-963-11	RES-CHIP	6.8K	5%	1/16W		R244	1-218-933-11	RES-CHIP	22	5%	1/16W	
R109	1-208-702-11	METAL CHIP	6.2K	0.5%	1/16W		R245	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R110	1-218-953-11	RES-CHIP	1K	5%	1/16W		R248	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R111	1-218-985-11	RES-CHIP	470K	5%	1/16W		R252	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R112	1-218-985-11	RES-CHIP	470K	5%	1/16W		R253	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R114	1-218-971-11	RES-CHIP	33K	5%	1/16W		R256	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R115	1-218-990-81	SHORT CHIP	0				R271	1-216-295-91	SHORT CHIP	0			
R116	1-218-959-11	RES-CHIP	3.3K	5%	1/16W		R273	1-216-295-91	SHORT CHIP	0			
R117	1-218-939-11	RES-CHIP	68	5%	1/16W		R274	1-216-295-91	SHORT CHIP	0			
R119	1-218-990-81	SHORT CHIP	0				R281	1-218-990-81	SHORT CHIP	0			
R124	1-218-990-81	SHORT CHIP	0				R301	1-218-973-11	RES-CHIP	47K	5%	1/16W	
R128	1-218-990-81	SHORT CHIP	0				R306	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	
R129	1-218-990-81	SHORT CHIP	0				R307	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	
R130	1-218-945-11	RES-CHIP	220	5%	1/16W		R310	1-218-953-11	RES-CHIP	1K	5%	1/16W	
R131	1-218-945-11	RES-CHIP	220	5%	1/16W		R311	1-218-953-11	RES-CHIP	1K	5%	1/16W	
R132	1-218-945-11	RES-CHIP	220	5%	1/16W		R312	1-218-953-11	RES-CHIP	1K	5%	1/16W	
R133	1-218-945-11	RES-CHIP	220	5%	1/16W		R313	1-218-973-11	RES-CHIP	47K	5%	1/16W	
R134	1-218-973-11	RES-CHIP	47K	5%	1/16W		R314	1-218-953-11	RES-CHIP	1K	5%	1/16W	
R135	1-218-945-11	RES-CHIP	220	5%	1/16W		R317	1-242-963-21	RES, NETWORK	33 (1005X4)			
R136	1-218-945-11	RES-CHIP	220	5%	1/16W		R318	1-242-963-21	RES, NETWORK	33 (1005X4)			
R137	1-218-945-11	RES-CHIP	220	5%	1/16W		R319	1-242-963-21	RES, NETWORK	33 (1005X4)			
R138	1-218-973-11	RES-CHIP	47K	5%	1/16W		R320	1-242-963-21	RES, NETWORK	33 (1005X4)			
R139	1-218-945-11	RES-CHIP	220	5%	1/16W		R503	1-218-953-11	RES-CHIP	1K	5%	1/16W	
R165	1-218-952-11	RES-CHIP	820	5%	1/16W		R504	1-218-953-11	RES-CHIP	1K	5%	1/16W	
R166	1-218-952-11	RES-CHIP	820	5%	1/16W		R505	1-218-966-11	RES-CHIP	12K	5%	1/16W	
R167	1-218-952-11	RES-CHIP	820	5%	1/16W		R506	1-218-953-11	RES-CHIP	1K	5%	1/16W	
R168	1-218-990-81	SHORT CHIP	0				R507	1-218-953-11	RES-CHIP	1K	5%	1/16W	
R170	1-218-959-11	RES-CHIP	3.3K	5%	1/16W		R510	1-217-907-11	RES-CHIP	1.8	5%	1/10W	
R171	1-218-959-11	RES-CHIP	3.3K	5%	1/16W		R511	1-217-907-11	RES-CHIP	1.8	5%	1/10W	
R172	1-218-959-11	RES-CHIP	3.3K	5%	1/16W		R515	1-218-971-11	RES-CHIP	33K	5%	1/16W	
R174	1-218-863-11	METAL CHIP	4.7K	0.5%	1/10W		R516	1-218-966-11	RES-CHIP	12K	5%	1/16W	
R192	1-216-809-11	METAL CHIP	100	5%	1/10W		R601	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R193	1-218-990-81	SHORT CHIP	0				R602	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R201	1-218-965-11	RES-CHIP	10K	5%	1/16W		R603	1-218-953-11	RES-CHIP	1K	5%	1/16W	
R202	1-218-935-11	RES-CHIP	33	5%	1/16W		R604	1-218-953-11	RES-CHIP	1K	5%	1/16W	
R203	1-218-935-11	RES-CHIP	33	5%	1/16W		R1001	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R204	1-242-963-21	RES, NETWORK	33 (1005X4)				R1003	1-218-843-11	METAL CHIP	680	0.5%	1/10W	
R205	1-242-963-21	RES, NETWORK	33 (1005X4)				R1004	1-218-839-11	METAL CHIP	470	0.5%	1/10W	
R206	1-242-963-21	RES, NETWORK	33 (1005X4)				R1005	1-218-967-11	RES-CHIP	15K	5%	1/16W	
R210	1-218-935-11	RES-CHIP	33	5%	1/16W		R1006	1-218-967-11	RES-CHIP	15K	5%	1/16W	
R211	1-218-990-81	SHORT CHIP	0				R1013	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R219	1-234-377-21	RES, NETWORK	4.7K (1005X4)				R1016	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R220	1-234-377-21	RES, NETWORK	4.7K (1005X4)				R1017	1-218-990-81	SHORT CHIP	0			
R221	1-218-973-11	RES-CHIP	47K	5%	1/16W		R1018	1-218-990-81	SHORT CHIP	0			
R222	1-218-973-11	RES-CHIP	47K	5%	1/16W		R1019	1-218-990-81	SHORT CHIP	0			
R223	1-218-933-11	RES-CHIP	22	5%	1/16W		R1021	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R230	1-218-990-81	SHORT CHIP	0				R1027	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R233	1-218-990-81	SHORT CHIP	0				R1028	1-218-965-11	RES-CHIP	10K	5%	1/16W	
R234	1-218-990-81	SHORT CHIP	0				R1029	1-218-940-11	RES-CHIP	82	5%	1/16W	
R236	1-218-933-11	RES-CHIP	22	5%	1/16W		R1030	1-218-937-11	RES-CHIP	47	5%	1/16W	(DS)
R237	1-218-965-11	RES-CHIP	10K	5%	1/16W		R1030	1-218-941-81	RES-CHIP	100	5%	1/16W	(BS)
R238	1-218-933-11	RES-CHIP	22	5%	1/16W								
R239	1-218-965-11	RES-CHIP	10K	5%	1/16W								

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
R1031	1-218-943-11	RES-CHIP	150	5%	1/16W (DS)	R1268	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R1031	1-218-945-11	RES-CHIP	220	5%	1/16W (BS)	R1269	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)		
R1032	1-234-378-21	RES, NETWORK	10K (1005X4)			R1270	1-218-990-81	SHORT CHIP	0		
R1033	1-234-378-21	RES, NETWORK	10K (1005X4)			R1271	1-218-935-11	RES-CHIP	33	5%	1/16W
R1034	1-234-378-21	RES, NETWORK	10K (1005X4)			R1272	1-218-935-11	RES-CHIP	33	5%	1/16W
R1035	1-234-378-21	RES, NETWORK	10K (1005X4)			R1273	1-234-370-21	RES, NETWORK	22 (1005X4)		
R1036	1-211-984-11	METAL CHIP	43	0.5%	1/10W	R1274	1-234-370-21	RES, NETWORK	22 (1005X4)		
R1037	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R1275	1-218-933-11	RES-CHIP	22	5%	1/16W
R1039	1-211-984-11	METAL CHIP	43	0.5%	1/10W	R1276	1-218-933-11	RES-CHIP	22	5%	1/16W
R1040	1-218-823-11	METAL CHIP	100	0.5%	1/10W	R1277	1-218-990-81	SHORT CHIP	0		
R1066	1-218-973-11	RES-CHIP	47K	5%	1/16W	R1278	1-218-990-81	SHORT CHIP	0		
R1067	1-218-973-11	RES-CHIP	47K	5%	1/16W	R1279	1-218-948-11	RES-CHIP	390	5%	1/16W
R1068	1-218-973-11	RES-CHIP	47K	5%	1/16W	R1281	1-234-371-21	RES, NETWORK	47 (1005X4)		
R1069	1-218-973-11	RES-CHIP	47K	5%	1/16W	R1282	1-234-371-21	RES, NETWORK	47 (1005X4)		
R1071	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1283	1-234-371-21	RES, NETWORK	47 (1005X4)		
R1103	1-218-990-81	SHORT CHIP	0			R1284	1-218-937-11	RES-CHIP	47	5%	1/16W
R1107	1-218-990-81	SHORT CHIP	0			R1285	1-218-937-11	RES-CHIP	47	5%	1/16W
R1110	1-218-990-81	SHORT CHIP	0			R1286	1-218-937-11	RES-CHIP	47	5%	1/16W
R1111	1-218-977-11	RES-CHIP	100K	5%	1/16W	R1287	1-234-371-21	RES, NETWORK	47 (1005X4)		
R1132	1-218-937-11	RES-CHIP	47	5%	1/16W	R1288	1-218-933-11	RES-CHIP	22	5%	1/16W
R1153	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1289	1-218-933-11	RES-CHIP	22	5%	1/16W
R1161	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1301	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R1163	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1302	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1164	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1303	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1181	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1312	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1182	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1313	1-218-847-11	METAL CHIP	1K	0.5%	1/10W
R1191	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1314	1-216-864-11	SHORT CHIP	0		
R1195	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R1401	1-218-933-11	RES-CHIP	22	5%	1/16W
R1199	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1402	1-218-933-11	RES-CHIP	22	5%	1/16W
R1205	1-218-965-11	RES-CHIP	10K	5%	1/16W	R1403	1-218-933-11	RES-CHIP	22	5%	1/16W
R1219	1-218-990-81	SHORT CHIP	0			R1404	1-218-933-11	RES-CHIP	22	5%	1/16W
R1240	1-218-933-11	RES-CHIP	22	5%	1/16W	R1405	1-218-933-11	RES-CHIP	22	5%	1/16W
R1241	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)			R1406	1-218-933-11	RES-CHIP	22	5%	1/16W
R1242	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)			R1407	1-218-933-11	RES-CHIP	22	5%	1/16W
R1243	1-218-990-81	SHORT CHIP	0			R1411	1-234-378-21	RES, NETWORK	10K (1005X4)		
R1244	1-218-935-11	RES-CHIP	33	5%	1/16W	R1412	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1245	1-234-370-21	RES, NETWORK	22 (1005X4)			R1413	1-218-973-11	RES-CHIP	47K	5%	1/16W
R1246	1-234-370-21	RES, NETWORK	22 (1005X4)			R1414	1-218-933-11	RES-CHIP	22	5%	1/16W
R1247	1-218-933-11	RES-CHIP	22	5%	1/16W	R1415	1-218-933-11	RES-CHIP	22	5%	1/16W
R1248	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)			R1416	1-218-933-11	RES-CHIP	22	5%	1/16W
R1249	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)			R1421	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1250	1-218-990-81	SHORT CHIP	0			R1422	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1251	1-218-935-11	RES-CHIP	33	5%	1/16W	R1802	1-218-945-11	RES-CHIP	220	5%	1/16W
R1252	1-218-935-11	RES-CHIP	33	5%	1/16W	R1803	1-218-947-11	RES-CHIP	330	5%	1/16W
R1255	1-234-370-21	RES, NETWORK	22 (1005X4)			R1804	1-218-935-11	RES-CHIP	33	5%	1/16W
R1256	1-234-370-21	RES, NETWORK	22 (1005X4)			R1812	1-218-945-11	RES-CHIP	220	5%	1/16W
R1257	1-218-933-11	RES-CHIP	22	5%	1/16W	R1813	1-218-947-11	RES-CHIP	330	5%	1/16W
R1258	1-218-933-11	RES-CHIP	22	5%	1/16W	R1814	1-218-935-11	RES-CHIP	33	5%	1/16W
R1260	1-218-933-11	RES-CHIP	22	5%	1/16W	R2301	1-218-959-11	RES-CHIP	3.3K	5%	1/16W
R1261	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)			R2302	1-218-990-81	SHORT CHIP	0		
R1262	1-234-400-21	CONDUCTOR, NETWORK	(1005X4)			R2304	1-218-990-81	SHORT CHIP	0		
R1263	1-218-990-81	SHORT CHIP	0			R2316	1-218-965-11	RES-CHIP	10K	5%	1/16W
R1264	1-218-935-11	RES-CHIP	33	5%	1/16W	R2501	1-218-951-11	RES-CHIP	680	5%	1/16W
R1265	1-234-370-21	RES, NETWORK	22 (1005X4)			R2502	1-218-827-11	METAL CHIP	150	0.5%	1/10W
R1266	1-234-370-21	RES, NETWORK	22 (1005X4)			R2504	1-218-951-11	RES-CHIP	680	5%	1/16W
R1267	1-218-933-11	RES-CHIP	22	5%	1/16W	R2505	1-218-827-11	METAL CHIP	150	0.5%	1/10W
						R2506	1-216-864-11	SHORT CHIP	0		
						R2507	1-218-951-11	RES-CHIP	680	5%	1/16W

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R2508	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R3302	1-218-937-11	RES-CHIP	47	5%	1/16W (DS)
R2510	1-218-951-11	RES-CHIP	680	5%	1/16W	R3302	1-218-990-81	SHORT CHIP	0 (BS)		
R2511	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R3305	1-218-947-11	RES-CHIP	330	5%	1/16W
R2513	1-218-951-11	RES-CHIP	680	5%	1/16W	R3306	1-218-839-11	METAL CHIP	470	0.5%	1/10W
R2514	1-218-827-11	METAL CHIP	150	0.5%	1/10W	R3307	1-208-893-11	METAL CHIP	1.8K	0.5%	1/16W (BS)
R3002	1-218-990-81	SHORT CHIP	0			R3307	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W (DS)
R3003	1-218-990-81	SHORT CHIP	0			R3308	1-218-929-11	RES-CHIP	10	5%	1/16W
R3004	1-218-990-81	SHORT CHIP	0			R3309	1-218-951-11	RES-CHIP	680	5%	1/16W
R3005	1-234-378-21	RES, NETWORK	10K (1005X4)			R3310	1-218-965-11	RES-CHIP	10K	5%	1/16W (BS)
R3006	1-218-990-81	SHORT CHIP	0			R3312	1-218-839-11	METAL CHIP	470	0.5%	1/10W (DS)
R3007	1-218-990-81	SHORT CHIP	0			R3313	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W (DS)
R3008	1-218-990-81	SHORT CHIP	0			R3314	1-218-929-11	RES-CHIP	10	5%	1/16W (DS)
R3009	1-218-990-81	SHORT CHIP	0			R3315	1-218-951-11	RES-CHIP	680	5%	1/16W
R3010	1-218-990-81	SHORT CHIP	0			R3317	1-218-947-11	RES-CHIP	330	5%	1/16W (DS)
R3011	1-218-990-81	SHORT CHIP	0			R3318	1-218-839-11	METAL CHIP	470	0.5%	1/10W (DS)
R3012	1-218-990-81	SHORT CHIP	0			R3319	1-218-929-11	RES-CHIP	10	5%	1/16W (DS)
R3101	1-218-990-81	SHORT CHIP	0			R3320	1-218-951-11	RES-CHIP	680	5%	1/16W
R3102	1-218-990-81	SHORT CHIP	0			R3322	1-218-947-11	RES-CHIP	330	5%	1/16W (DS)
R3103	1-218-990-81	SHORT CHIP	0			R3323	1-218-839-11	METAL CHIP	470	0.5%	1/10W (DS)
R3104	1-218-990-81	SHORT CHIP	0			R3324	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W (DS)
R3105	1-218-989-11	RES-CHIP	1M	5%	1/16W	R3325	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W (DS)
R3106	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3326	1-218-929-11	RES-CHIP	10	5%	1/16W (DS)
R3107	1-218-937-11	RES-CHIP	47	5%	1/16W	R3327	1-218-951-11	RES-CHIP	680	5%	1/16W
R3108	1-218-937-11	RES-CHIP	47	5%	1/16W	R3336	1-218-937-11	RES-CHIP	47	5%	1/16W (DS)
R3109	1-218-937-11	RES-CHIP	47	5%	1/16W	R3336	1-218-990-81	SHORT CHIP	0 (BS)		
R3111	1-218-990-81	SHORT CHIP	0			R3337	1-218-965-11	RES-CHIP	10K	5%	1/16W (BS)
R3113	1-218-965-11	RES-CHIP	10K	5%	1/16W	R3341	1-218-937-11	RES-CHIP	47	5%	1/16W (DS)
R3201	1-218-937-11	RES-CHIP	47	5%	1/16W	R3341	1-218-990-81	SHORT CHIP	0 (BS)		
R3202	1-218-937-11	RES-CHIP	47	5%	1/16W	R3342	1-218-965-11	RES-CHIP	10K	5%	1/16W (BS)
R3203	1-218-937-11	RES-CHIP	47	5%	1/16W	R3344	1-218-947-11	RES-CHIP	330	5%	1/16W (DS)
R3204	1-218-990-81	SHORT CHIP	0			R3703	1-218-941-81	RES-CHIP	100	5%	1/16W
R3206	1-218-937-11	RES-CHIP	47	5%	1/16W	R3704	1-218-941-81	RES-CHIP	100	5%	1/16W
R3207	1-218-937-11	RES-CHIP	47	5%	1/16W	R3705	1-218-941-81	RES-CHIP	100	5%	1/16W
R3208	1-218-937-11	RES-CHIP	47	5%	1/16W	R3708	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3209	1-218-977-11	RES-CHIP	100K	5%	1/16W	R3715	1-218-990-81	SHORT CHIP	0		
R3210	1-218-849-11	METAL CHIP	1.2K	0.5%	1/10W	R3716	1-218-935-11	RES-CHIP	33	5%	1/16W
R3211	1-218-871-11	METAL CHIP	10K	0.5%	1/10W	R3720	1-218-990-81	SHORT CHIP	0		
R3213	1-218-951-11	RES-CHIP	680	5%	1/16W	R3738	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3214	1-218-963-11	RES-CHIP	6.8K	5%	1/16W	R3808	1-218-941-81	RES-CHIP	100	5%	1/16W
R3215	1-218-969-11	RES-CHIP	22K	5%	1/16W	R3810	1-242-963-21	RES, NETWORK	33 (1005X4)		
R3216	1-218-849-11	METAL CHIP	1.2K	0.5%	1/10W	R3811	1-242-963-21	RES, NETWORK	33 (1005X4)		
R3217	1-218-871-11	METAL CHIP	10K	0.5%	1/10W						
R3218	1-218-879-11	METAL CHIP	22K	0.5%	1/10W						
R3219	1-218-963-11	RES-CHIP	6.8K	5%	1/16W						
R3220	1-218-941-81	RES-CHIP	100	5%	1/16W						
R3221	1-218-941-81	RES-CHIP	100	5%	1/16W						
R3222	1-218-963-11	RES-CHIP	6.8K	5%	1/16W						
R3223	1-218-879-11	METAL CHIP	22K	0.5%	1/10W						
R3224	1-218-941-81	RES-CHIP	100	5%	1/16W						
R3227	1-218-941-81	RES-CHIP	100	5%	1/16W						
R3228	1-218-965-11	RES-CHIP	10K	5%	1/16W						
R3229	1-218-965-11	RES-CHIP	10K	5%	1/16W						
R3230	1-216-295-91	SHORT CHIP	0								
R3232	1-218-990-81	SHORT CHIP	0								
R3233	1-218-990-81	SHORT CHIP	0								
R3234	1-218-990-81	SHORT CHIP	0								
R3301	1-218-937-11	RES-CHIP	47	5%	1/16W						

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R3812	1-242-963-21	RES, NETWORK	33	(1005X4)		R4705	1-218-990-81	SHORT CHIP	0		
R3813	1-242-963-21	RES, NETWORK	33	(1005X4)		R4706	1-218-990-81	SHORT CHIP	0		
R3814	1-218-933-11	RES-CHIP	22	5%	1/16W	R4707	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3816	1-218-940-11	RES-CHIP	82	5%	1/16W	R4708	1-234-378-21	RES, NETWORK	10K	(1005X4)	
R3817	1-218-940-11	RES-CHIP	82	5%	1/16W	R4709	1-234-378-21	RES, NETWORK	10K	(1005X4)	
R3818	1-218-933-11	RES-CHIP	22	5%	1/16W	R4710	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3820	1-218-940-11	RES-CHIP	82	5%	1/16W	R4711	1-218-965-11	RES-CHIP	10K	5%	1/16W
						R4712	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3821	1-218-933-11	RES-CHIP	22	5%	1/16W	R4713	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3823	1-218-940-11	RES-CHIP	82	5%	1/16W	R4714	1-218-990-81	SHORT CHIP	0		
R3824	1-242-962-21	RES, NETWORK	82	(1005X4)		R4721	1-234-372-11	RES, NETWORK	100	(1005X4)	
R3828	1-234-380-21	RES, NETWORK	47K	(1005X4)		R4722	1-234-372-11	RES, NETWORK	100	(1005X4)	
R3829	1-234-380-21	RES, NETWORK	47K	(1005X4)		R4723	1-218-937-11	RES-CHIP	47	5%	1/16W
R3830	1-234-380-21	RES, NETWORK	47K	(1005X4)		R4724	1-218-933-11	RES-CHIP	22	5%	1/16W
R3831	1-234-380-21	RES, NETWORK	47K	(1005X4)		R4725	1-218-933-11	RES-CHIP	22	5%	1/16W
R3832	1-234-379-21	RES, NETWORK	22K	(1005X4)		R4726	1-218-933-11	RES-CHIP	22	5%	1/16W
R3833	1-234-379-21	RES, NETWORK	22K	(1005X4)		R4727	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3835	1-218-935-11	RES-CHIP	33	5%	1/16W	R4728	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3837	1-242-963-21	RES, NETWORK	33	(1005X4)		R4729	1-218-990-81	SHORT CHIP	0		
R3838	1-242-963-21	RES, NETWORK	33	(1005X4)		R4731	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3839	1-242-963-21	RES, NETWORK	33	(1005X4)		R4732	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R3840	1-242-963-21	RES, NETWORK	33	(1005X4)		R5101	1-234-381-11	RES, NETWORK	100K	(1005X4)	
R3841	1-218-940-11	RES-CHIP	82	5%	1/16W	R5102	1-234-381-11	RES, NETWORK	100K	(1005X4)	
R3842	1-218-962-11	RES-CHIP	5.6K	5%	1/16W	R5103	1-218-977-11	RES-CHIP	100K	5%	1/16W
R3843	1-218-933-11	RES-CHIP	22	5%	1/16W	R5104	1-218-977-11	RES-CHIP	100K	5%	1/16W
R3844	1-218-933-11	RES-CHIP	22	5%	1/16W	R5105	1-234-702-11	RES, NETWORK	68	(1005X4)	
R3845	1-218-940-11	RES-CHIP	82	5%	1/16W	R5106	1-234-702-11	RES, NETWORK	68	(1005X4)	
R3846	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5107	1-218-939-11	RES-CHIP	68	5%	1/16W
R3847	1-218-933-11	RES-CHIP	22	5%	1/16W	R5108	1-218-939-11	RES-CHIP	68	5%	1/16W
R3848	1-218-940-11	RES-CHIP	82	5%	1/16W	R5109	1-218-937-11	RES-CHIP	47	5%	1/16W
R3849	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5110	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3850	1-218-935-11	RES-CHIP	33	5%	1/16W	R5111	1-218-953-11	RES-CHIP	1K	5%	1/16W
R3851	1-242-963-21	RES, NETWORK	33	(1005X4)		R5113	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3857	1-218-990-81	SHORT CHIP	0			R5114	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3862	1-218-990-81	SHORT CHIP	0			R5115	1-218-965-11	RES-CHIP	10K	5%	1/16W
R3871	1-218-969-11	RES-CHIP	22K	5%	1/16W	R5116	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4501	1-216-295-91	SHORT CHIP	0			R5117	1-218-977-11	RES-CHIP	100K	5%	1/16W
R4504	1-216-059-00	RES-CHIP	2.7K	5%	1/10W	R5118	1-218-870-11	METAL CHIP	9.1K	0.5%	1/10W
R4505	1-216-059-00	RES-CHIP	2.7K	5%	1/10W	R5119	1-211-987-11	METAL CHIP	56	0.5%	1/10W
R4507	1-216-059-00	RES-CHIP	2.7K	5%	1/10W	R5120	1-211-987-11	METAL CHIP	56	0.5%	1/10W
R4511	1-218-990-81	SHORT CHIP	0			R5121	1-211-987-11	METAL CHIP	56	0.5%	1/10W
R4521	1-218-963-11	RES-CHIP	6.8K	5%	1/16W	R5122	1-211-987-11	METAL CHIP	56	0.5%	1/10W
R4531	1-218-990-81	SHORT CHIP	0			R5123	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4541	1-218-990-81	SHORT CHIP	0			R5124	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4552	1-216-295-91	SHORT CHIP	0			R5125	1-218-953-11	RES-CHIP	1K	5%	1/16W
R4553	1-216-295-91	SHORT CHIP	0			R5127	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4554	1-216-295-91	SHORT CHIP	0			R5129	1-218-940-11	RES-CHIP	82	5%	1/16W
R4556	1-216-295-91	SHORT CHIP	0			R5130	1-218-990-81	SHORT CHIP	0		
R4558	1-218-969-11	RES-CHIP	22K	5%	1/16W	R5131	1-218-864-11	METAL CHIP	5.1K	0.5%	1/10W
R4559	1-218-990-81	SHORT CHIP	0			R5132	1-218-990-81	SHORT CHIP	0		
R4573	1-218-990-81	SHORT CHIP	0			R5133	1-218-990-81	SHORT CHIP	0		
R4574	1-216-864-11	SHORT CHIP	0			R5134	1-218-990-81	SHORT CHIP	0		
R4575	1-216-864-11	SHORT CHIP	0			R5135	1-218-990-81	SHORT CHIP	0		
R4581	1-218-941-81	RES-CHIP	100	5%	1/16W	R5140	1-218-965-11	RES-CHIP	10K	5%	1/16W
R4701	1-234-372-11	RES, NETWORK	100	(1005X4)		R5141	1-218-990-81	SHORT CHIP	0		
R4702	1-234-372-11	RES, NETWORK	100	(1005X4)		R5201	1-218-990-81	SHORT CHIP	0		
R4703	1-218-941-81	RES-CHIP	100	5%	1/16W	R5202	1-218-990-81	SHORT CHIP	0		
R4704	1-218-990-81	SHORT CHIP	0			R5203	1-218-859-11	METAL CHIP	3.3K	0.5%	1/10W

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R5204	1-218-845-11	METAL CHIP	820	0.5%	1/10W	R5706	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R5205	1-218-939-11	RES-CHIP	68	5%	1/16W	R5707	1-218-977-11	RES-CHIP	100K	5%	1/16W
R5207	1-218-990-81	SHORT CHIP	0			R5803	1-164-360-11	CERAMIC CHIP	0.1uF		16V
R5212	1-218-990-81	SHORT CHIP	0			R5804	1-218-973-11	RES-CHIP	47K	5%	1/16W
R5213	1-218-990-81	SHORT CHIP	0			R5805	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5214	1-218-973-11	RES-CHIP	47K	5%	1/16W	R5806	1-218-953-11	RES-CHIP	1K	5%	1/16W
R5215	1-218-973-11	RES-CHIP	47K	5%	1/16W	R5807	1-218-962-11	RES-CHIP	5.6K	5%	1/16W
R5216	1-218-990-81	SHORT CHIP	0			R5808	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5217	1-218-990-81	SHORT CHIP	0			R5809	1-218-958-11	RES-CHIP	2.7K	5%	1/16W
R5220	1-218-851-11	METAL CHIP	1.5K	0.5%	1/10W	R5812	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5221	1-218-973-11	RES-CHIP	47K	5%	1/16W	R5813	1-218-958-11	RES-CHIP	2.7K	5%	1/16W
R5222	1-218-929-11	RES-CHIP	10	5%	1/16W	R5814	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5445	1-216-295-91	SHORT CHIP	0			R5815	1-218-958-11	RES-CHIP	2.7K	5%	1/16W
R5606	1-218-940-11	RES-CHIP	82	5%	1/16W	R5817	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5607	1-218-940-11	RES-CHIP	82	5%	1/16W	R5818	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5608	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5821	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5609	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5822	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5610	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5824	1-163-038-91	CERAMIC CHIP	0.1uF		25V
R5612	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5825	1-234-370-21	RES, NETWORK	22 (1005X4)		
R5613	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5826	1-234-370-21	RES, NETWORK	22 (1005X4)		
R5614	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5827	1-234-370-21	RES, NETWORK	22 (1005X4)		
R5615	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5828	1-234-370-21	RES, NETWORK	22 (1005X4)		
R5617	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5829	1-218-938-11	RES-CHIP	56	5%	1/16W
R5618	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5831	1-218-990-81	SHORT CHIP	0		
R5619	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5832	1-164-360-11	CERAMIC CHIP	0.1uF		16V
R5622	1-218-940-11	RES-CHIP	82	5%	1/16W	R5833	1-218-933-11	RES-CHIP	22	5%	1/16W
R5623	1-218-940-11	RES-CHIP	82	5%	1/16W	R5834	1-218-933-11	RES-CHIP	22	5%	1/16W
R5624	1-218-940-11	RES-CHIP	82	5%	1/16W	R5836	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5626	1-218-933-11	RES-CHIP	22	5%	1/16W	R5837	1-218-990-81	SHORT CHIP	0		
R5627	1-218-940-11	RES-CHIP	82	5%	1/16W	R5838	1-218-935-11	RES-CHIP	33	5%	1/16W
R5628	1-218-933-11	RES-CHIP	22	5%	1/16W	R5839	1-218-949-11	RES-CHIP	470	5%	1/16W
R5629	1-218-940-11	RES-CHIP	82	5%	1/16W	R5842	1-218-947-11	RES-CHIP	330	5%	1/16W
R5630	1-218-940-11	RES-CHIP	82	5%	1/16W	R5843	1-218-947-11	RES-CHIP	330	5%	1/16W
R5631	1-218-933-11	RES-CHIP	22	5%	1/16W	R5844	1-218-947-11	RES-CHIP	330	5%	1/16W
R5632	1-242-963-21	RES, NETWORK	33 (1005X4)			R5845	1-218-947-11	RES-CHIP	330	5%	1/16W
R5638	1-242-963-21	RES, NETWORK	33 (1005X4)			R5846	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5642	1-242-963-21	RES, NETWORK	33 (1005X4)			R5848	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5646	1-242-963-21	RES, NETWORK	33 (1005X4)			R5852	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5650	1-218-940-11	RES-CHIP	82	5%	1/16W	R5853	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5651	1-218-873-11	METAL CHIP	12K	0.5%	1/10W	R5854	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5652	1-218-941-81	RES-CHIP	100	5%	1/16W	R5855	1-234-369-21	RES, NETWORK	10 (1005X4)		
R5657	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5856	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5658	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5857	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5659	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5859	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5661	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5861	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5664	1-216-864-11	SHORT CHIP	0			R5862	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5672	1-216-864-11	SHORT CHIP	0			R5863	1-218-951-11	RES-CHIP	680	5%	1/16W
R5688	1-218-989-11	RES-CHIP	1M	5%	1/16W	R5864	1-218-953-11	RES-CHIP	1K	5%	1/16W
R5689	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5865	1-218-990-81	SHORT CHIP	0		
R5690	1-218-990-81	SHORT CHIP	0			R5867	1-218-950-11	RES-CHIP	560	5%	1/16W
R5692	1-218-990-81	SHORT CHIP	0			R5868	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R5693	1-218-990-81	SHORT CHIP	0			R5869	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R5701	1-218-949-11	RES-CHIP	470	5%	1/16W	R5870	1-218-970-11	RES-CHIP	27K	5%	1/16W
R5702	1-218-949-11	RES-CHIP	470	5%	1/16W	R6001	1-218-990-81	SHORT CHIP	0		
R5703	1-218-951-11	RES-CHIP	680	5%	1/16W	< VIBRATOR >					
R5704	1-218-943-11	RES-CHIP	150	5%	1/16W	X5101	1-813-049-21	VIBRATOR, CRYSTAL (24.576MHz)			
R5705	1-216-864-11	SHORT CHIP	0			X5201	1-795-904-21	OSCILLATOR, CRYSTAL (48MHz)			

RD-65

Ref. No.	Part No.	Description	Remarks
X5502	1-813-052-21	VIBRATOR, CRYSTAL (25MHz)	

ACCESSORIES

	1-480-167-11	REMOTE COMMANDER (RMT-D248P)	(AEP, UK)
	1-480-526-11	REMOTE COMMANDER (RMT-D2480) (AUS)	
△	1-575-131-82	CORD, POWER (AEP)	
	1-696-593-11	CORD, CONNECTION (PAL)	
	1-759-586-41	CONTROLLER, VIDEO (AV MOUSE)	
△	1-555-074-52	CORD, POWER (AUS)	
△	1-827-946-21	CORD, POWER (UK)	
	1-828-145-11	CORD, CONNECTION (AV) (AUS)	
	3-113-760-11	MANUAL, INSTRUCTION (ENGLISH) (UK)	
	3-113-760-21	MANUAL, INSTRUCTION (FRENCH)	(AEP1,AEP3)
	3-113-760-31	MANUAL, INSTRUCTION (GERMAN)(AEP1)	
	3-113-760-41	MANUAL, INSTRUCTION (ITALIAN)(AEP1)	
	3-113-760-51	MANUAL, INSTRUCTION (SPANISH)(AEP1)	
	3-113-760-61	MANUAL, INSTRUCTION (DUTCH)(AEP1)	
	3-196-450-11	MANUAL, INSTRUCTION (DANISH)(AEP2)	
	3-196-450-21	MANUAL, INSTRUCTION (SWEDISH)(AEP2)	
	3-196-450-31	MANUAL, INSTRUCTION (FINNISH)(AEP2)	
	3-196-450-41	MANUAL, INSTRUCTION (DUTCH)(AEP2)	
	3-275-466-11	MANUAL, INSTRUCTION (ENGLISH)(AUS)	

Note : The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.