


5. Exploded View & Part List

5-1. UE32C4000PW Exploded View

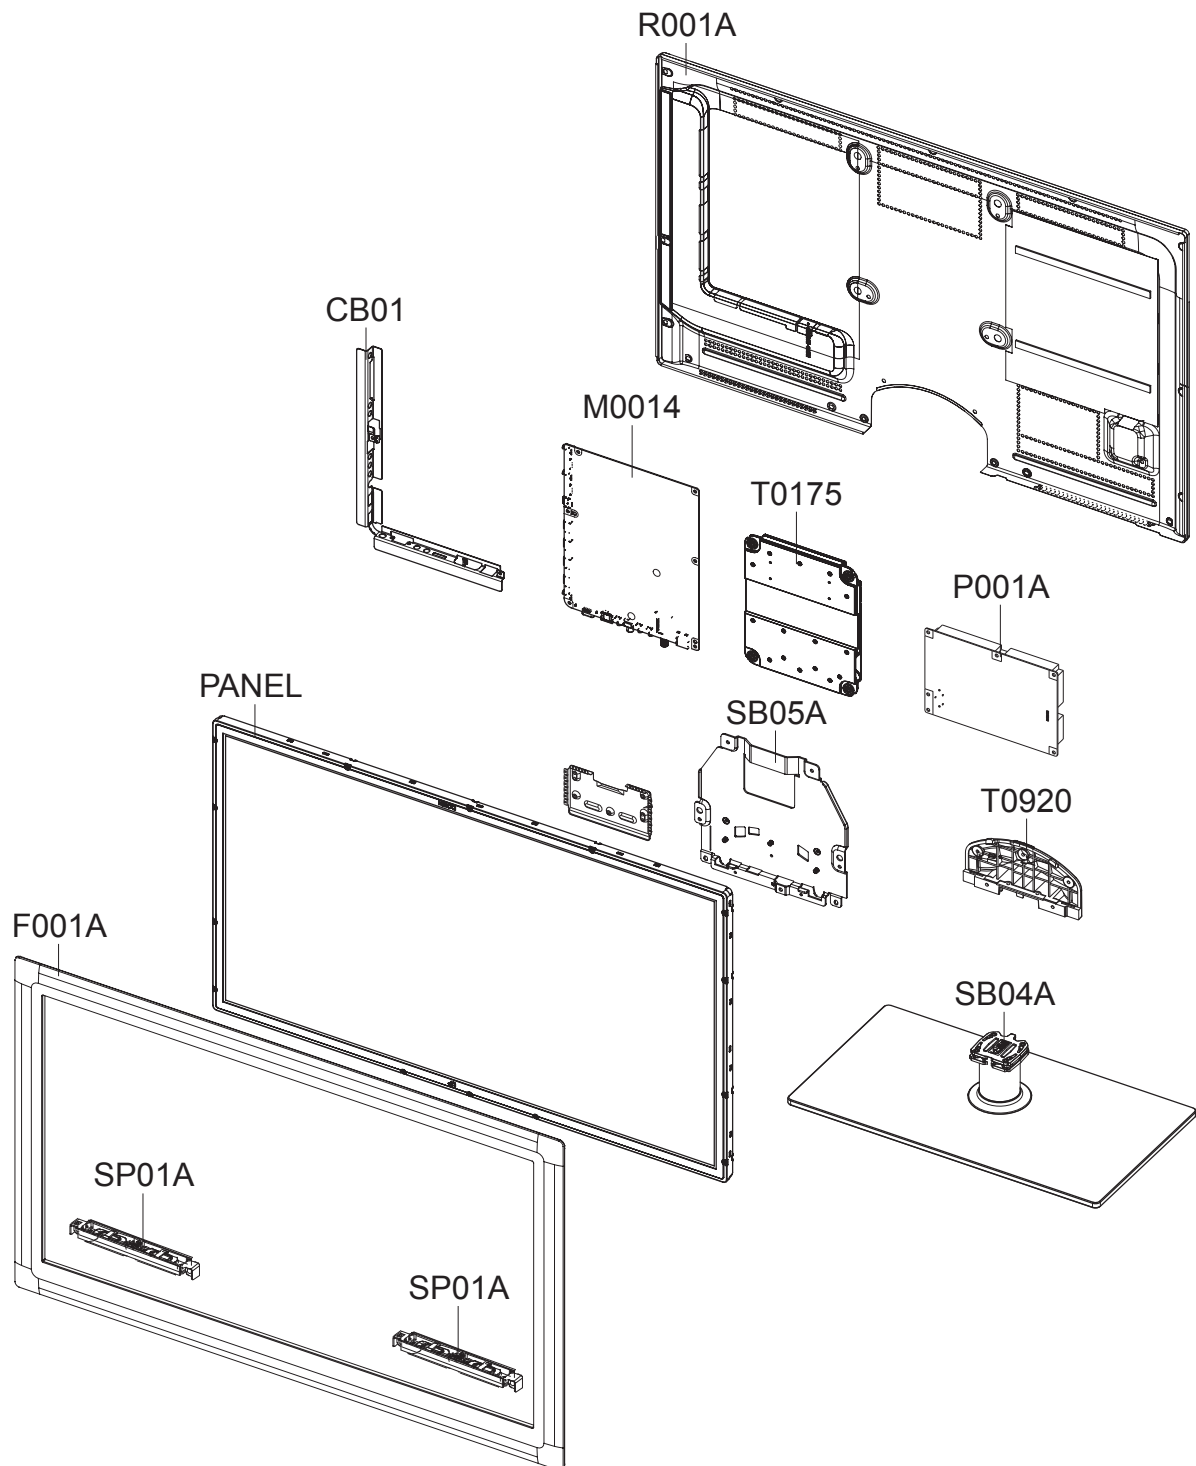

5-2. UE32C4000PW Parts List

Location No.	Code No.	Description & Specification	Q'ty	S.A/S.N.A	Remark
CB01	BN61-04924D	BRACKET-AV;UC4000-32,PCM,T0.5,BKN-P824,	1	SNA	
F001A	BN96-13152C	ASSY COVER P-FRONT;UC4000 32,EO,PC+PC,V2	1	SA	
M0014	BN94-02758B	ASSY PCB MAIN;UE32C4000PFXXC	1	SA	
P001A	BN44-00349B	DC VSS-LED TV PD BD;PD32AF0E_ZDY,PD32AF0	1	SA	
PANEL	BN07-00848A	LCD-PANEL;T320HAE1-DB,CLL4AC1,8bits,32,1	1	SA	
R001	BN63-06516D	COVER-REAR;UC6500 32inch,PCM,T0.5,BKN-P8	1	SNA	
SB04A	BN96-13157B	ASSY STAND P-BASE;UC4000 32,PC+ABS,V0,BK	1	SA	
SB05A	BN96-12927B	ASSY BRACKET P-STAND LINK;UC4000 32,SECC	1	SNA	
SP01A	BN96-12941E	ASSY SPEAKER P;8ohm,4pin,10,L:270 R:490,	1	SA	
T0175	BN96-12944A	ASSY SPEAKER P;4ohm,4pin,10W,R:170,Enclo	1	SA	
T0920	BN61-06220A	GUIDE-STAND;UC6500 32inch,PC,G/F 20%,V2,	1	SNA	

5-2-1. UE32C4000PW Parts List

Service Bom (SA: SERVICE AVAILABLE, SNA: SERVICE NOT AVAILABLE)

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
0.1		BN90-02598C	ASSY COVER FRONT;UC4000 32	1	SNA	
..2	F001A	BN96-13152C	ASSY COVER P-FRONT;UC4000 32,EO,PC+PC,V2	1	SA	
...3	AB326	BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	2	SNA	
...3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0.005	SNA	
...3		BN61-05915A	BOSS-TAPE;LB650 65",T1.1,W12.0mm,DARK GR	0.27	SNA	
...3		BN61-05915B	BOSS-TAPE;LB650 65",3M #4711,T1.1,W6.0mm	0.03	SNA	
...3		BN61-06213A	BRACKET-STOPPER BOSS;C8K,SECC+SK5,T1.2	8	SNA	
...3		BN61-06215A	BRACKET-STOPPER PANEL;C8K,SK5,0.5T	1	SNA	
...3		BN61-06236A	HOLDER-BOSS BOTTOM;UC6100 32inch,ABS,HB	1	SNA	
...3	CCM1	BN63-02183F	COVER-SHEET;Rhcm,PE Vinyl,T0.04,900mm,20	0.35	SNA	
...3	CCM1	BN63-05199P	COVER-SHEET;AMBER,PE,T0.08,W1000,200M,CL	0.31	SNA	
...3	F001	BN63-06562C	COVER-FRONT;UC4000 32,EO,PC+PC,V2,TP0010	1	SNA	
...3	SP01A	BN96-12941E	ASSY SPEAKER P;8ohm,4pin,10,L:270 R:490,	1	SA	
...3	M0125	BN96-13959B	ASSY BOARD P-TOUCH FUNCTION&IR;UN32C5000	1	SA	
...3		BN81-01805C	A/S-TAPE-FILAMENT;ELMATIT,T0.1,W12,L1200	0.03	SNA	
...3		BN60-00162Y	SPACER-FOAM;FOAM,50000mm,Dark Gray,0.35T	2.19	SA	
0.1	R001A	BN90-02601B	ASSY COVER REAR;UC4000 32	1	SNA	
..2	R001A	BN96-13155C	ASSY COVER P-REAR;UC6500 32inch,PCM,T0.5	1	SA	
...3	R001	BN63-06516D	COVER-REAR;UC6500 32inch,PCM,T0.5,BKN-P8	1	SNA	
...3	T0069	AA63-60131R	SPACER-FELT;21Z57,FELT,325,T0.35,7	1	SNA	
...3		BN60-00162A	SPACER-FOAM;FOAM,50000L,BLK,0.35T,20W	0.73	SNA	
...3		BN68-02530F	LABEL-TERMINAL BOTTOM;UC4000 32,EO,PET,T	1	SNA	
...3		BN68-02531G	LABEL-TERMINAL SIDE;UC4000 32,EO,PET,T0.	1	SNA	
...3		BN96-12924A	ASSY MISC P-INSULATOR;UC6500 32,PC,T0.43	1	SNA	
...4	T0278	BN60-00122E	SPACER-SPONGE;UC6500,CR,L200,T2.0,W10	2	SNA	
...4		BN63-06629A	SHEET-INSULATOR SMPS;UC6100 32inch,PC,T0	1	SNA	
...3		BN60-00162Y	SPACER-FOAM;FOAM,50000mm,Dark Gray,0.35T	0.4	SA	
...3	M0909	BP60-00061Q	SPACER-SCREEN;SP20UO,SPONGE,35,T2.0,20,E	2	SNA	
..2	T0081	6001-002610	SCREW-MACHINE;BH,+,M4,L6,ZPC(BLK),SWRCH1	7	SA	
..2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	11	SA	
0.1	S001A	BN90-02604B	ASSY STAND;UC4000 32	1	SNA	
..2	SB04A	BN96-13157B	ASSY STAND P-BASE;UC4000 32,PC+ABS,V0,BK	1	SA	
...3	GSN01	BN61-05993A	GUIDE-STAND NECK;32,LC650,PETG,V2,TP0003	1	SNA	
...4		BN61-06078B	GUIDE-NECK-INSERT;LC650 32,PETG HB,TP000	1	SNA	
...3		BN63-06749B	COVER-STAND BASE;UC4000 32,PC+ABS,V0,BK0	1	SNA	
...3	M0081	6003-001003	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	3	SA	
...3	M0126	BN73-00052B	RUBBER-FOOT;42Q9,c9,CR Rubber Gray,T3.0	7	SNA	
...3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.04,680mm,20	0.6	SNA	
..2	T0920	BN61-06220A	GUIDE-STAND;UC6500 32inch,PC,G/F 20%,V2,	1	SNA	
0.1	M0017	BN91-05038B	ASSY CHASSIS;UE32C4000PFXXC	1	SNA	
..2	M0014	BN94-02758B	ASSY PCB MAIN;UE32C4000PFXXC	1	SA	
...3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0.25	SNA	
...3		3711-007302	HEADER-BOARD TO BOARD;BOX,18P,2R,2mm,ANG	1	SA	
...3	JA330	3722-002844	JACK-PHONE;1/7P,NI,LAUREL-GREEN,ANGLE	1	SA	
...3	JA330	3722-002845	JACK-PHONE;1/7P,NI,YELLOW,ANGLE	1	SA	
...3	JA330	3722-002846	JACK-PHONE;1/6,NI,BLACK,ANGLE	2	SNA	
...3	ET01	BN40-00172A	TUNER;DTOS40CVH081A,DVB-T/C,164CH,38.9MH	1	SA	
...3	T0066	BN62-00042A	HEAT SINK-ES;30*30*5,Ceramic,T1.5,TAPE	1	SNA	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3		BN97-04055B	ASSY SMD;UE32C4000PFXXC,BN94-02758A?	1	SNA	
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	18	SA	
...4		0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	SA	
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	17	SNA	
...4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	1	SA	
...4	T0139	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	SA	
...4	T0139	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	8	SNA	
...4	SD3	0407-000114	DIODE-SWITCHING;KDS184,80V,100mA,SOT-23,	3	SNA	
...4	KQ1	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	1	SA	
...4	Q101	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	12	SA	
...4	CEQ2	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	5	SA	
...4	Q409	0505-000274	FET-SILICON;AO4435L,P,-30V,-11A,0.014ohm	1	SNA	
...4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	SA	
...4	ND51C2	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	SA	
...4	IC104	0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	3	SA	
...4	IC104	0802-001012	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,DQFN,	1	SNA	
...4	IC106	1001-001573	IC-VIDEO SWITCH;Sil9287BCNUTR,QFN,72P,10	1	SNA	
...4		1006-001474	IC-LINE DRIVER;DRV604PWP,HPSSOP,28P,9.8x	1	SA	
...4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	2	SA	
...4	IC112	1103-001385	IC-EEPROM;AT24C256,256Kbit,32Kx8,SOP,8P,	1	SA	
...4		1105-002058	IC-DDR2 SDRAM;K4T1G164QE-HCF8,DDR2,1Gbit	2	SA	
...4	T0124	1201-002992	IC-POWER AMP;STA369BWS,PSSO,36P,10.3x7.5	2	SA	
...4	T0087	1203-001815	IC-POSIFIXED REG.;78M09,TO-252,3P,PLAST	1	SA	
...4	T0087	1203-002835	IC-POSIFIXED REG.;KIA7805AF,DPAK,3P,6.6	1	SA	
...4	T0087	1203-002898	IC-POSIFIXED REG.;G950T45R,TO-252,3P,6.	1	SA	
...4	T0087	1203-005134	IC-POSIFIXED REG.;RT9167A-33PB,SOT-23-5	1	SNA	
...4		1203-005559	IC-BACKLIGHT DRIVER;MP3302DJ,TSOT23,5P,2	1	SA	
...4		1203-006013	IC-DC/DC CONVERTER;AOZ1031AI,SO-8,8P,4.9	1	SA	
...4		1203-006017	IC-VOL. DETECTOR;RT9824GJ8,TSOT23,8P,2.9	1	SA	
...4	T0087	1203-006135	IC-POSIFIXED REG.;AP1117D-33-GZ-13-89,T	1	SA	
...4	T0087	1203-006136	IC-POSIFIXED REG.;AP1117D-18-GZ-13-89,T	1	SA	
...4		1204-003088	IC-DEMULATOR;DRX39XYK,PQFN,64P,9x9x0.8	1	SA	
...4		1204-003096	IC-VIDEO DECODER;HIDTVPRO-SX,PBGA,580P,P	1	SA	
...4		1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	2	SA	
...4		1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	SA	
...4		1205-003733	IC-SWITCH;AP2191MPG-13,MSOP-8L-EP,8P,2.9	1	SA	
...4		1405-001185	VARISTOR;24Vdc,1.6x0.8x0.36mm,TP	1	SA	
...4		1405-001271	VARISTOR;20Vdc,5A,1.0x0.5x0.6mm,TP	22	SA	
...4	R105	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	34	SA	
...4	AR49	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	5	SNA	
...4	MR306	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	15	SNA	
...4	R319	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	42	SNA	
...4		2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	2	SNA	
...4	R104	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	54	SA	
...4	R102	2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	6	SA	
...4	HDR2	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	SNA	
...4	MR36	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	8	SNA	
...4	AR43	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	2	SNA	
...4	MR13	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	9	SNA	
...4	R123	2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	3	SNA	
...4	DR39	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	2	SNA	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	MR16	2007-000168	R-CHIP;470Kohm,5%,1/16W,TP,1005	1	SA	
....4	R509	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	SNA	
....4	R111	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	5	SNA	
....4	HDR17	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	12	SNA	
....4	R338	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	13	SNA	
....4	UR23	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	2	SNA	
....4	MR9	2007-000455	R-CHIP;18Kohm,1%,1/10W,TP,1608	1	SA	
....4	ER13	2007-000669	R-CHIP;2Kohm,1%,1/10W,TP,1608	1	SNA	
....4	R726	2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	2	SNA	
....4		2007-000755	R-CHIP;330Kohm,1%,1/10W,TP,1608	1	SA	
....4	R124	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	3	SNA	
....4	DR37	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SNA	
....4		2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	2	SA	
....4	OTR1	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	9	SNA	
....4	DR43	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	SNA	
....4	R326	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	11	SNA	
....4	MR316	2007-002796	R-CHIP;510ohm,5%,1/16W,TP,1005	1	SA	
....4	PR24	2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	2	SA	
....4	TR30	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	14	SNA	
....4		2007-007134	R-CHIP;39Kohm,1%,1/16W,TP,1005	1	SA	
....4	DR4	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	2	SNA	
....4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	9	SNA	
....4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	2	SA	
....4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	SA	
....4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	10	SNA	
....4		2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	4	SNA	
....4	MR11	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	10	SA	
....4		2007-008134	R-CHIP;12.4Kohm,1%,1/16W,TP,1005	1	SC	
....4		2007-008563	R-CHIP;270ohm,1%,1/16W,TP,1005	1	SA	
....4		2007-008593	R-CHIP;750ohm,1%,1/16W,TP,1005	1	SA	
....4	ZRN10	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SA	
....4	DAR09	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	5	SA	
....4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	8	SA	
....4	DRP9	2011-001474	R-NETWORK;47ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	SA	
....4		2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	3	SA	
....4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	7	SNA	
....4		2011-001589	R-NETWORK;0ohm,5%,1/16W,L,CHIP-V,4P,TP,1	16	SNA	
....4	DC30	2203-000138	C-CER,CHIP;1.5nF,10%,50V,X7R,TP,1005,-	2	SNA	
....4	PC43	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	4	SA	
....4	MC302	2203-000425	C-CER,CHIP;018nF,5%,50V,C0G,TP,1005	2	SA	
....4	C254	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	15	SA	
....4	AC139	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608	2	SA	
....4	V1233	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	9	SNA	
....4	MC9	2203-000627	C-CER,CHIP;022nF,5%,50V,C0G,TP,1005	2	SNA	
....4	DC374	2203-000659	C-CER,CHIP;0.27nF,5%,50V,C0G,1608	1	SA	
....4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,1005	1	SNA	
....4	DC25	2203-000812	C-CER,CHIP;033nF,5%,50V,C0G,1005	11	SA	
....4	CK40B	2203-000838	C-CER,CHIP;0.39NF,5%,50V,C0G,TP,1608	4	SNA	
....4	KFC6	2203-000872	C-CER,CHIP;0.0030nF,0.25pF,50V,C0G,1608	2	SNA	
....4	HDC5	2203-001072	C-CER,CHIP;0.056nF,5%,50V,NP0,1005	4	SA	
....4	C101	2203-001124	C-CER,CHIP;0.68NF,10%,50V,X7R,TP,1005	2	SNA	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4	AD480	2203-001428	C-CER,CHIP;470nF,10%,50V,X7R,TP,2012	2	SNA	
....4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	15	SNA	
....4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	6	SNA	
....4	AAC1	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	9	SNA	
....4	AD480	2203-005511	C-CER,CHIP;27nF,10%,10V,X7R,TP,1005	1	SA	
....4	AD480	2203-005968	C-CER,CHIP;4.7NF,10%,50V,X7R,TP,1005	2	SNA	
....4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,1005	3	SNA	
....4	C102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	122	SNA	
....4	JC10	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,1608	2	SA	
....4	AD480	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,3216	29	SA	
....4	C125	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	38	SC	
....4	HE4	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,2012	3	SA	
....4	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,1005	29	SNA	
....4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	2	SNA	
....4	T0052	2703-000158	INDUCTOR-SMD;1uH,10%,2012	4	SA	
....4	T0052	2703-000296	INDUCTOR-SMD;680nH,10%,1608	1	SA	
....4	VL6	2703-000398	INDUCTOR-SMD;10uH,10%,3225	4	SA	
....4	T0052	2703-001239	INDUCTOR-SMD;3.3uH,10%,1608	3	SA	
....4	L607	2703-001254	INDUCTOR-SMD;1.8uH,10%,2012	1	SA	
....4	T0052	2703-003149	INDUCTOR-SMD;2.2uH,20%,5050	2	SA	
....4	T0052	2703-003150	INDUCTOR-SMD;4.7uH,20%,5050	4	SNA	
....4	X202	2801-003326	CRYSTAL-SMD;24MHz,30ppm,28-ABX,20pF,50oh	1	SA	
....4	X202	2801-004004	CRYSTAL-SMD;20.25MHz,20ppm,28-AAN,13pF,2	1	SA	
....4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	2	SA	
....4	T0568	3301-001236	BEAD-SMD;60ohm,1608	5	SA	
....4	T0568	3301-002039	BEAD-SMD;26ohm,1608,TP	41	SA	
....4		3701-001293	CONNECTOR-HDMI;19P,2R,FEMALE,SMD-A,AU	4	SA	
....4	AC510	3708-001150	CONNECTOR-FPC/FFC/PIC;30P,1mm,SMD-A,SN,Y	1	SA	
....4		3710-002276	SOCKET-INTERFACE;24P,1R,0.5mm,SMD-A,AU,B	1	SA	
....4	CON_US	3711-005616	HEADER-BOARD TO CABLE;BOX,10P,1R,2mm,SMD	1	SNA	
....4	HB01A	3711-007336	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,SM	2	SA	
....4		BN41-01378A	PCB MAIN;SX1 5000 DVB,FR-4,4,1.0,1.2T,19	1	SNA	
....4		BN97-04023A	ASSY MICOM-MAIN;N82A,2009.11.10,T-TDT5DE	1	SNA	
....5		1107-001818	IC-NAND FLASH;KFG1G16U2C-DIB6,1024Mbit,6	1	SNA	
....4		BN97-04024A	ASSY MICOM-SUB;N82A,2009.11.10,T-TDT5DEU	1	SNA	
....5	IC115	1107-001580	IC-FLASH MEMORY;MX25L4005,4Mbit,512Kx8,S	1	SNA	
....4	T0052	2703-003790	INDUCTOR-SMD;4.7uH,20%,8080	2	SA	
....4	D0254	0402-000553	DIODE-SCHOTTKY;SS24/B240,40V,2000mA,DO-2	2	SA	
....4		0403-001164	DIODE-ZENER;MMSZ5232B,5.32-5.88V,500MW,S	1	SA	
....4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA	
....4	L1103	2703-000403	INDUCTOR-SMD;22uH,10%,3225	1	SA	
....4		1203-005538	IC-DC/DC CONVERTER;AOZ1021HAIL,SOP,8P,4.	1	SA	
....4	IC012	1203-006138	IC-POS1.ADJUST REG.;AP1117DGZ-13-89,TO-2	1	SA	
....4		1203-006288	IC-VOL. DETECTOR;RT9818B-18GV,SOT-23-3,3	1	SA	
....4	PR6	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	6	SNA	
....4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	1	SNA	
....4		2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	4	SNA	
....4	DC87	2203-001153	C-CER,CHIP;.068nF,5%,50V,NP0,1005	2	SA	
....4	C711	2203-002982	C-CER,CHIP;6.8nF,10%,50V,X7R,1005	1	SA	
....4	CN906	3707-001095	CONNECTOR-OPTICAL;SMD-A(Ultra Slim),SPDI	1	SA	
....4		3722-003044	JACK-USB;4P/1C,NI,BLK,SMD-A,A-TYPE	1	SA	

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
....4		0202-001767	SOLDER-CREAM;LST-5710,D20~38,Sn-57Bi-1Ag	2.072	SNA	
....4	HR3	2007-000903	R-CHIP;430ohm,1%,1/10W,TP,1608	1	SNA	
....4		2007-002768	R-CHIP;6.2Kohm,1%,1/10W,TP,1608	1	SA	
....4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005	1	SA	
....4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	1	SNA	
....4	T0568	3301-001186	BEAD-SMD;600ohm,3216,2500mA,TP,553ohm/93	1	SA	
...3		BN97-04098A	ASSY CI PLUS;BN46-00025A,LC5F,SX1 platfo	1	SNA	
....4		BN46-00025A	KEY CODE-CI PLUS KEY;CI PLUS KEY,TCTC,SE	1	SNA	
...3	T0066	BP62-00047A	HEAT SINK-ES;DLP,A6063S,T2.5,13,13,TAPE	2	SNA	
...3		3701-001698	CONNECTOR-DSUB;15P,3ROW,FEMALE,ANGLE,NI	1	SA	
...3		3709-001603	CONNECTOR-CARD SLOT;68P(U/S LIM 60mm) W/L	1	SA	
...3		BN96-14860A	ASSY BRACKET P-AV;UC4000 32,E0,PCM,T0.45	1	SNA	
....4	CB01	BN61-04924D	BRACKET-AV;UC4000-32,PCM,T0.5,BKN-P824,	1	SNA	
....4	M0131	BN63-01251A	GASKET;NB24BS,CONDUCTIVE FABRIC,0.7mm,12	1	SNA	
0.1		BN91-05042A	ASSY SHIELD;UE32C4000PFXXC	1	SNA	
..2	T0081	6001-002283	SCREW-MACHINE;BH,+,M3,L5,ZPC(WHT),SWRCH1	9	SNA	
..2	P001A	BN44-00349B	DC VSS-LED TV PD BD;PD32AF0E_ZDY,PD32AF0	1	SA	
..2	M2893	BN39-01267F	LEAD CONNECTOR;LB6T,UL2651#26,18P,350mm,	1	SA	
..2	FL06	BN96-12469N	ASSY CABLE P-FFC;UE32C4000,FFC,0.3mm,394	1	SA	
..2	T0175	BN96-12944A	ASSY SPEAKER P;4ohm,4pin,10W,R:170,Enclo	1	SA	
..2	T0081	6001-000115	SCREW-MACHINE;BH,+,M3,L10,ZPC(WHT),SWR	2	SNA	
..2	T0081	6001-002610	SCREW-MACHINE;BH,+,M4,L6,ZPC(BLK),SWRCH1	4	SA	
..2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	1	SA	
..2	SB05A	BN96-12927B	ASSY BRACKET P-STAND LINK;UC4000 32,SECC	1	SNA	
...3		BN61-02932H	BRACKET-STOPPER NUT;LED-TV,M4,D6,L5.0,BL	2	SNA	
...3	M0115	BN61-06163A	BRACKET-STAND LINK;UC6500 32inch,SECC,T2	1	SNA	
...3		BN60-00184A	SPACER-FOAM;FOAM,30000mm,DARK GRAY,1T,30	0.12	SNA	
...3		BN61-02932K	BRACKET-STOPPER NUT;LED TV,M4,D6,L7.0,BR	3	SNA	
..2	CCMM1	BN73-00211B	SILICON/RUBBER;UN46B9000XFXZA,SILICON+PO	1	SNA	
..2	M0131	BN63-00209A	GASKET;RS24NS,CONDUCTIVE FAB,4mm,10mm,30	3	SNA	
..2		BN81-01805D	A/S-TAPE-FILAMENT;ELMATIT,T0.1,W30,L1200	0.05	SNA	
0.1		BN91-05172A	ASSY LCD-CMO;BN07-00848A	1	SNA	
..2	PANEL	BN07-00848A	LCD-PANEL;T320HAE1-DB,CLL4AC1,8bits,32,1	1	SA	
0.1		BN92-05735A	ASSY BOX;UC4000 32	1	SNA	
..2		BH68-00662A	LABEL BOX-00;ALL MODEL,MOJO 90G,60,110,W	1	SNA	
..2		BN69-05103A	BOX-SET;32UC4000-SEH,CB,A-01,DW3,YEL,W88	1	SNA	
0.1		BN92-05738A	ASSY P/MATERIAL;UC4000 32	1	SNA	
..2		BN69-03934A	WRAP STRETCH FILM;All,HDPE,0.012,500,300	2.4	SNA	
..2		BN81-02321A	BAG-AIR;LIGHT FLEX PLASTIK,PE WHITE,L120	1	SNA	
..2		BN69-05003A	CUSHION-SET;32UC4000,EPS,Horizontal pack	1	SNA	
..2		6902-001116	BAG ROLL;HDPE/HDPE/NITRON,T0.5,W600,L175	1.8	SNA	
..2		BN69-04047A	PAD PACKING-EDGE;CB,B800,W50x50,L1800,YE	1	SNA	
..2		BN69-05205A	PALLET-WOODEN;LE32C45,WOOD-OTH,1200,980,	1	SNA	
..2	T0214	BN74-00008A	TAPE-OPP MASKING;OPP-2,T0.05,W100,L800M,	2.26	SNA	
0.1		BN92-05764B	ASSY LABEL;UE26C4000PFXXC	1	SNA	
..2		BN68-02700A	LABEL-LED-POP;Highlight Sticker Color,PE	1	SNA	
..2	T0527	BP68-00052B	LABEL-00,RATING;CCTV,TETRON PAPER,T0.05,	1	SNA	
0.1	ACCE1	BN92-05765H	ASSY ACCESSORY;UE32C4000PWXZT	1	SNA	
..2		BN96-13189H	ASSY ACCESSORY-MANUAL;UE32C4000PWXZT	1	SNA	
...3		AA69-02656A	BAG ACCESSORY;PJTV,LDPE,T0,05,L400,W280,	1	SNA	
...3		BN68-00514E	MANUAL FLYER-05,WARRANTY CARD;comm,Samsu	1	SNA	

5. Exploded View & Part List

Level	Location No.	Code No.	Description & Specification	Q'ty	SA/SNA	Remark
...3		BN68-02186A	MANUAL FLYER-TOC GUIDE;COMM,SAMSUNG,11 L	1	SNA	
...3		BN68-02722C	MANUAL USERS;C4000,SAMSUNG,4LANGS,ZG ZT,	1	SNA	
...3		AA68-03242V	MANUAL FLYER-SAFETY GUIDE;comm,Samsung,1	1	SNA	
...3		BN68-02732B	MANUAL FLYER-STAND GUIDE;Comm,Samsung,NA	1	SNA	
..2	ACCE2	BN96-14110B	ASSY ACCESSORY-CABEL;UE32C4000PWXXC	1	SNA	
...3	EC11	3903-000525	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SA	
...3	T0120	4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,HOLDER,7.	2	SNA	
...3	T0524	6902-001107	BAG PE;LDPE,T0.05,W450,L400,TRP,0,3Separ	1	SNA	
...3	M0114	BN39-01154C	CBF SIGNAL;Chelsea Slim, STEREO Plug to	1	SA	
...3	M0114	BN39-01154F	CBF SIGNAL;UE40B7000WWXXC,24P/20P,30AWG,	1	SA	
...3	M0114	BN39-01154H	CBF SIGNAL;UE40B7000WWXXC,RCA 3PIN,30AWG	1	SA	
...3	REMO2	BN59-01014A	REMOCON;TM1050,SAMSUNG,20PIN SINGLE,48KE	1	SA	
...3		BN61-05596A	HOLDER-WIRE CABLE;LED TV,LDPE,T0.8,L150,	1	SNA	
...3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	SA	
...3	T0531	BN63-06542B	COVER-BOTTOM;UC4000 32,HIPS,V0,BK0020	1	SA	
...3	M0081	6003-000133	SCREW-TAPTYPE;BH,+,-,S,M4,L8,ZPC(BLK),SW	6	SA	
...3	BAG	6902-000031	BAG ZIPPER;LDPE,T0.05,W80,L160,TRP,0,0,4	1	SNA	
...3		6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,4-PE M	1	SNA	
...3		AA65-30023A	CLAMPER CORE-CABLE;NYLON-66,BLK	1	SNA	
...3	AH365	BN61-05280A	HOLDER-RING;LB7000 46inch,ABS, HB,gray	4	SNA	
...3	M0114	BN61-05373A	HOLDER-WIRE;LB7000 46,NYRON	3	SNA	
...3		BN61-05491A	HOLDER-WIRE STAND;UB7000 46inch,NYRON	1	SNA	
...3		BN69-04419E	PACKING-BAG PE;LB650,LDPE,70,90,6003-000	1	SNA	
...3		BN69-04419J	PACKING-BAG PE;UC5000,LDPE,70,90,Power-C	1	SNA	
...3	M0081	6003-001003	SCREW-TAPTYPE;BH,+,-,B,M4,L12,ZPC(BLK),SWR	5	SA	
...3		BN69-04419D	PACKING-BAG PE;LB650,LDPE,70,90,6003-000	1	SNA	
...3		BN69-04419K	PACKING-BAG PE;UC5000,LDPE,70,90,4X12, 5	1	SNA	