


1. Exploded View & Part List

Exploded View

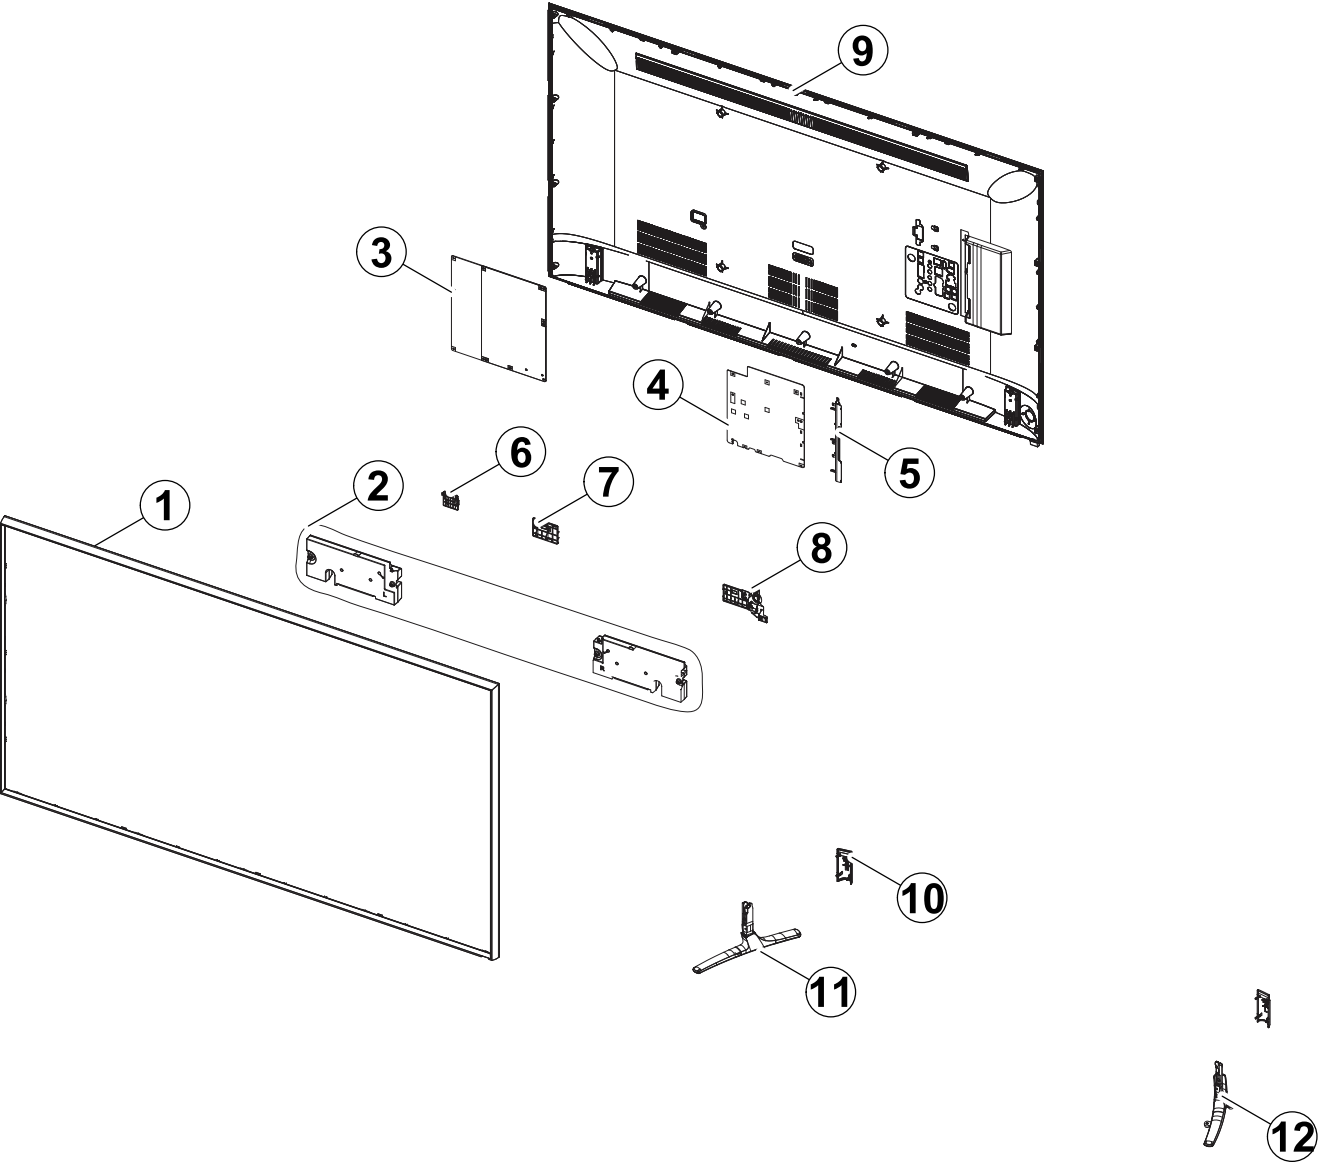

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-01326D	PRODUCT LCD-AMLCD; LSF320HJ02-G,CY-GH032C	SA	1
2	2	SP01A	BN96-30336A	ASSY SPEAKER P; 6ohm,10W,Enclosure_H5k	SA	1
3	2	P001A	BN44-00707A	DC VSS-LED TV PD BD; L32X1T_EHS,L32X1T_EH	SA	1
4	2	M0014	BN94-07548H	ASSY PCB MAIN; UH6P,H641*	SA	1
5	3		BN61-10370B	HOLDER-SIDE AV; H6410,MPPE,GRAY	SNA	1
6	2	WIFI	BN59-01174A	NETWORK-WIFI MODULE; WIDT-30Q,Internal Wi	SA	1
7	2	BT	BN96-30218B	ASSY BOARD P-BT HOLDER; BT Module, Assy H	SA	1
8	2	FB01A	BN96-30902M	ASSY BOARD P-FUNCTION; UH6410,Function As	SA	1
9	2	R001A	BN96-31917A	ASSY COVER P-REAR; H6410 32,MPPE,V1,GY028	SA	1
10	2	SG01A	BN96-32339A	ASSY GUIDE P-STAND; H6410 32,MPPE V1,GY02	SA	1
11	2	STAND L	BN96-31928A	ASSY STAND P-BASE L; H6410 32,ABS+PC,V1,,	SA	1
12	2	STAND R	BN96-31929A	ASSY STAND P-BASE R; H6410 32,ABS+PC,V1,,	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE32H6410SSXZG (TH01)		
1	S001A	BN90-05260A	ASSY STAND;UH6*	1	SNA
..2	STAND L	BN96-31928A	ASSY STAND P-BASE L;H6410 32,ABS+PC,V1,,	1	SA
..3		BN61-10488A	BRACKET-STAND BASE L;UH6410 32"-40",HGI-	1	SNA
..3		BN61-10574A	GUIDE-STAND NECK L;UH6410 32",PPA,GF50%	1	SNA
..3		BN63-12100A	COVER-STAND BASE L;H6410 32-40",ABS+PC,V	1	SNA
..3		BN63-12102A	COVER-STAND MIDDLE L;H6410 32-40",ABS+PC	1	SNA
..3		BN63-12201A	COVER-STAND L;UH6410 32-40",ABS+PC,V0,NC	1	SNA
..2	STAND R	BN96-31929A	ASSY STAND P-BASE R;H6410 32,ABS+PC,V1,,	1	SA
..3	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	2	SA
..3	SCREW	6003-001785	SCREW-TAPTYPE;FH,+,B,M4,L8,ZPC(BLK),SWRC	2	SA
..3		6902-001475	BAG PE;HDPE,T0.015,W250,L300,TRP,27,2,SU	1	SNA
..3		BN61-10489A	BRACKET-STAND BASE R;UH6410 32"-40",HGI-	1	SNA
..3		BN61-10575A	GUIDE-STAND NECK R;UH6410 32",PPA,GF50%	1	SNA
...4		0103-010227	RESIN PPA;MX-4506,BLACK,BK0007,V0	60	SNA
..3		BN63-12101A	COVER-STAND BASE R;H6410 32-40",ABS+PC,V	1	SNA
...4		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	16	SNA
..3		BN63-12103A	COVER-STAND MIDDLE R;H6410 32-40",ABS+PC	1	SNA
..3		BN63-12202A	COVER-STAND R;UH6410 32-40",ABS+PC,V0,NC	1	SNA
..3		BN67-00385D	RUBBER-FOOT;RUBBER-FOOT,SILICONE,ROUND,1	2	SNA
..2	SG01A	BN96-32339A	ASSY GUIDE P-STAND;H6410 32,MPPE V1,GY02	1	SA
..3		6902-002183	BAG PE;LDPE,T0.03,W250,L160,TRP,RECYCLE+	1	SNA
..3		BN63-12199A	COVER-GUIDE STAND L;UH6410 32",MPPE,V1,G	1	SNA
..3		BN63-12200A	COVER-GUIDE STAND R;UH6410 32",MPPE,V1,G	1	SNA
..3		BN96-18013E	ASSY ACCESSORY-SCREW;6003-001782,4EA,ALL	1	SNA
...4	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	4	SA
...4		6902-000341	BAG PE;LDPE,T0.05,L90,W70,TRP,,,PE MARK	1	SNA
1		BN90-05304R	ASSY W/I;UN40F6400AFXZA	1	SNA
..2		BN81-08159Z	PART SET-ELEC W/I;UF4~UF8,UH4~UH9 ELEC	1	SNA
..2		BN81-09498F	PART SET-MECH W/I;UH6P,U32HP*	1	SNA
1	R001A	BN90-05433A	ASSY COVER REAR;UH6*	1	SNA
..2	SCREW	6001-002754	SCREW-MACHINE;BH,+,M3,L6,NI PLT,SWRCH18A	11	SA
..2	SCREW	6003-001783	SCREW-TAPTYPE;BH,+,B,M4,L12,NI PLT,SWRCH	1	SA
..2	R001A	BN96-31917A	ASSY COVER P-REAR;H6410 32,MPPE,V1,GY028	1	SA
..3	R001	BN63-12065A	COVER-REAR;UH6410 32",MPPE,V1,GY0287	1	SNA
..3		BN68-05767M	LABEL-TERMINAL SIDE;H6410,PET,T0.05,15,1	1	SNA
..3		BN68-06093A	LABEL-STICKER-CI SLOT;WW,ALL,PE,134,74,L	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
1		BN91-12034D	ASSY LCM-AMLCD;BN95-01326D,CY-GH032CSLV4	1	SNA
..2	PANEL	BN95-01326D	PRODUCT LCD-AMLCD;LSF320HJ02-G,CY-GH032C	1	SA
...3	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	2	SA
...3	SCREW	6001-003083	SCREW-MACHINE;CH,+,M3,L8,ZPC(BLK),SWRCH1	1	SA
...3		BN60-00667C	SPACER-GASKET;Y13 SF-LED,GASKET(FG200A),	2	SNA
...3		BN68-05722A	LABEL-STICKER;ALL MODEL,POLYPROPYLENE,0.	1	SNA
...3		BN90-05184B	ASSY MISC-BLU;H6300 32",CY-GH032CSLV1V	1	SNA
...4		BN61-10113A	SUPPORT-PLATE;Y14 F-LED,PC,V2,CLEAR,OD-1	4	SNA
....5		0103-005036	RESIN-PC;M2407,550115,TP0003	12	SNA
....5		0103-009493	RESIN-PC;LH-1070W,W92853,WT0107,V-2	16	SNA
...4		BN61-10226A	LGP-DIFFUSER PLATE;32inch Diffuser Plat	1	SNA
...4		BN63-11544A	SHEET-COMPLEX;Y14 VNB 32" FHD DMOP,PET,0	1	SNA
...4		BN63-11812A	SHEET-REFLECTOR;Y14 32inch, SY95S,PET,0.	1	SNA
...4		BN96-30442A	ASSY LED BAR P;32inch FHD Dire,FCPkg,7ea	4	SNA
...4		BN96-30567D	ASSY CHASSIS BOTTOM P;Y14 VNB 32 6.4K,BN	1	SNA
....5	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	1	SA
....5		BN02-00040C	TAPE DOUBLE FACE-D-PLATE;F-LED ALL,MKT50	2	SNA
....5		BN02-00043D	TAPE ETC-SHEET FIXING;Y13 slim F-LED,PET	1	SNA
....5		BN02-00074A	TAPE PET;CCFL 32"/40",3M1360NH(B),T0.05,	4	SNA
....5		BN02-00324A	TAPE ABSORBER-DUST;Y14 4K,3M 244,0.085T,	0	SNA
....5		BN61-10097A	HOLDER-MIDDLE(U);Y14 F-LED 32" (5K),PC+G	1	SNA
....5		BN61-10114A	BRACKET-WALL MOUNT;Y14 F-LED 32",EGI-SEC	1	SNA
....5		BN61-10146A	HOLDER-MIDDLE(LR);Y14 F-LED 32" (5K),PC+	2	SNA
....5		BN61-10187A	HOLDER-MIDDLE(D);Y14 F-LED 32" (5K),PC+G	1	SNA
....6		0103-010237	RESIN PC;LS-3104G/W95265,White,WT0034,V2	39	SNA
....5		BN61-10207A	HOLDER-WALL RIVET;Y14 F-LED 32",SWRCH10A	3	SNA
....5		BN62-00501J	INSULATION-PD BOARD;Y14 VNB 32" 6K,PC-(0	1	SNA
....5	T0073	BN63-03871A	GASKET-EMI;58P9,Fabric,2,15,11	4	SNA
....5	CC02	BN64-02515A	CHASSIS-BOTTOM;Y14 F-LED 32" (VNB),EGI-S	1	SNA
....6		BN01-00173A	STEEL;765,T0.5,455,SECC,AG	1	SNA
....5		BN96-30415A	ASSY BOARD P-LED INTERFACE B'D;32inch FH	1	SNA
...4		BN96-30568A	ASSY MISC P-MOLD MIDDLE;Y14 VNB 32,BN61-	1	SNA
....5		BN60-00735L	SPACER-MIDDLE;Y14 VNB 32,PET,L250,NTR,T0	1	SNA
....5		BN60-00735M	SPACER-MIDDLE;Y14 VNB 32,PET,L380,NTR,T0	1	SNA
....5		BN60-00744A	SPACER-RUBBER;Y13 F-LED SLIM,SH-0140U+AT	2	SNA
....5		BN60-00815P	SPACER-PANEL (UD);Y14 VNB 32,SILICON+TAP	2	SNA
....5		BN60-00816D	SPACER-PANEL (LR);Y14 VNB 32,SILICON+TAP	2	SNA
....5		BN61-10076A	FRAME-MOLD MIDDLE;Y14 F-LED 32" (5K),PC+	1	SNA
....6		0103-007368	RESIN-PC;LS-3104G,K2495,BK0048,3.0mm V-2	72	SNA
...3	TCON	BN95-01307A	ASSY T CON;LSF320HJ02-G,32F120Hz VNB	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN02-00102B	TAPE FILAMENT;UE7000,#8917,0.15,25,50,WH	0	SNA
...4		BN62-00371C	HEAT SINK-PS;F6000,A1050,BLACK,110*61.1*	1	SNA
...4		BN62-00487A	HEAT SINK-ES;F6K,A6063,BLACK,18*14*4.4,t	1	SNA
...4		BN97-07972A	ASSY SMD;BN95-01307A	1	SNA
....5		0202-001830	SOLDER-CREAM;LFM-48W TM-HP,D20~38um,96.5	1	SNA
....5		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	1	SA
....5		0404-001643	DIODE-SCHOTTKY;B360A,60V,3000mA,SMA,TP	1	SA
....5		0406-001317	DIODE-TVS;SMAJ14A,15.6/-17.2V,400W,SMA	2	SNA
....5		0406-001445	DIODE-TVS;RClamp7512N,2.7/2.8/2.9,300W,S	2	SA
....5		0406-001578	DIODE-TVS;P4SMAJ40A,44.4,51.1,400W,SMA	1	SA
....5		0502-001331	TR-POWER;NSS30100LT1G,PNP,310mW,SOT-23,T	1	SA
....5		0502-001345	TR-POWER;FCX491A,NPN,1000mW,SOT89,TR,900	2	SA
....5		0502-001346	TR-POWER;FCX591A,PNP,1000mW,SOT89,TR,30/	2	SA
....5		0505-002660	FET-SILICON;Si2308BDS,N,60V,2.3A,0.156oh	1	SNA
....5		0505-003224	FET-SILICON;AO6405,P,-30V,-5A,0.052ohm,2	1	SA
....5	EL02	0601-002037	LED;SMD(TOP VIEW),BLUE,1.6x0.8mm,465/470	3	SNA
....5		1105-002227	IC-DDR3 SDRAM;K4B1G1646G-BCK0,DDR3 SDRAM	1	SA
....5		1203-006130	IC-POSIFIXED REG.;S-1172B25-U5T1G,SOT-8	1	SA
....5		1203-007956	IC-DC/DC CONVERTER;RT6917,QFN,48P,6x6x1mm	1	SNA
....5		1203-007959	IC-DC/DC CONVERTER;RT6915,QFN,36P,6x6x0.8	1	SNA
....5		1203-008082	IC-DC/DC CONVERTER;TPS54627DDAR,SOP 8P,8	1	SA
....5		1203-008103	IC-POSIFIXED REG.;S-13A1D15-E8001,HSOP,	1	SNA
....5		1204-003472	IC-VIDEO PROCESS;SDP1209,PBGA-H,585P,23x	1	SA
....5	IS01	1209-002183	IC-SENSOR;S-5851AAA-M6T1U,SOT,6Z30,2.9x1	1	SA
....5		1404-001731	THERMISTOR-NTC;33Kohm,4050K,1mW/C,TP,1.6	1	SNA
....5		1405-001381	VARISTOR;11V,8VDC,30A,1.6x0.8x0.9mm,TP,2	6	SA
....5		1405-001382	VARISTOR;24.5V,16VDC,120A,2.0x1.25x1.1mm	2	SA
....5		2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	6	SA
....5		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	3	SA
....5		2007-000063	R-CHIP;150Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	3	SNA
....5		2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	2	SNA
....5		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	16	SA
....5		2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	1	SA
....5		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	11	SA
....5		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	7	SNA
....5		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	13	SNA
....5		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	6	SA
....5		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	SNA
....5		2007-000159	R-CHIP;56Kohm,5%,1/16W,TP,1005	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	2	SNA
....5		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	10	SNA
....5		2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-000265	R-CHIP;1.8Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000336	R-CHIP;120Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-000455	R-CHIP;18Kohm,1%,1/10W,TP,1608	3	SA
....5		2007-000491	R-CHIP;2.2Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000614	R-CHIP;24Kohm,1%,1/10W,TP,1608	2	SNA
....5		2007-000651	R-CHIP;27Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000772	R-CHIP;33Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-000779	R-CHIP;33ohm,1%,1/10W,TP,1608	10	SA
....5		2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-001007	R-CHIP;51Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-001139	R-CHIP;7.5Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SNA
....5		2007-001433	R-CHIP;12Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	3	SA
....5		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	3	SNA
....5		2007-007238	R-CHIP;8.25Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-007268	R-CHIP;0.39ohm,1%,1/4W,TP,2012	1	SNA
....5		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	14	SNA
....5		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	2	SA
....5		2007-007431	R-CHIP;91Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	3	SNA
....5		2007-007651	R-CHIP;9.1Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-007733	R-CHIP;51ohm,1%,1/10W,TP,1608	5	SA
....5		2007-007736	R-CHIP;510Kohm,1%,1/10W,TP,1608	3	SA
....5		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	2	SNA
....5		2007-008622	R-CHIP;0.47ohm,1%,1/10W,TP,1608	1	SNA
....5		2007-010998	R-CHIP;0.3ohm,1%,1/8W,TP,1608,0.45	1	SNA
....5		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SNA
....5	AD480	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1608	1	SA
....5	AD480	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA
....5	AD480	2203-000332	C-CER,CHIP;0.012nF,5%,50V,C0G,TP,1608	2	SA
....5	AD480	2203-000357	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1608	1	SNA
....5	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	2	SA
....5	AD480	2203-001697	C-CER,CHIP;0.082nF,5%,50V,NP0,TP,1608	2	SNA
....5	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	5	SA
....5	AD480	2203-003019	C-CER,CHIP;8.2nF,10%,50V,X7R,TP,1005	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5	AD480	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,TP,1005	3	SA
....5	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	6	SNA
....5	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	3	SNA
....5	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	5	SA
....5	AD480	2203-006088	C-CER,CHIP;330nF,10%,10V,X7R,TP,1608	1	SA
....5	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	59	SNA
....5	AD480	2203-006320	C-CER,CHIP;2200nF,10%,16V,X7R,TP,2012	1	SNA
....5	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	2	SA
....5	AD480	2203-006460	C-CER,CHIP;2200nF,10%,16V,X5R,TP,1608,-	2	SA
....5	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	17	SA
....5	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	4	SNA
....5	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,0.	4	SA
....5	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005	1	SNA
....5	AD480	2203-006844	C-CER,CHIP;470nF,10%,10V,X5R,TP,1005	2	SA
....5	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	4	SA
....5	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	25	SNA
....5	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	13	SNA
....5	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	21	SNA
....5		2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	1	SA
....5		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	3	SA
....5		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	1	SA
....5		2703-004199	INDUCTOR-SMD;10uH,20%,7066,2.2mm,0.101Oh	1	SNA
....5		2703-004847	INDUCTOR-SMD;4.7uH,20%,3838,1.8T,0.075Oh	1	SA
....5		2801-005324	CRYSTAL-SMD;27MHz,30ppm,Ceramic SMD(4pin	1	SA
....5		2901-001362	FILTER-EMI/ESD;5.5V,0A,50pF,2.05x1.25x0.	3	SNA
....5		3301-002039	BEAD-SMD;26ohm,1608,TP	21	SA
....5		3601-001386	FUSE-SURFACE MOUNT;125V,5A,FAST-ACTING,C	1	SA
....5		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
....5		3708-003176	CONNECTOR-FPC/FFC/PIC;68P,0.5mm,SMD-A,AU	2	SA
....5	EH01	3711-005601	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,SMD-	1	SA
....5		6302-001290	GASKET;SMR-TS-4-4.5-3,4.0mm,Ni+Au+SUS+Mg	4	SNA
....5		BN41-02110A	PCB-T CON;2014 FHD 120Hz,FR-4,4,1.2T,150	1	SNA
....5		BN97-08161B	ASSY MICOM;F32A1F608,W25X40,6K,1107-0022	1	SNA
....6		1107-002224	IC-FLASH MEMORY;W25X40CLSSIG,4Mbit,SOP,8	1	SNA
...3		BN96-30046A	ASSY OPEN CELL;LSF320HJ02-G,8bit,32 INCH	1	SNA
...4		BN81-07434A	A/S-ADHESIVE-A.C.F(CP);ADHESIVE-A.C.F,1-	1	SNA
...4		BN81-07943A	A/S-ADHESIVE-A.C.F(TP500B);ADHESIVE-A.C.	1	SNA
...4		BN81-09604A	A/S-IC DRIVER SOURCE;IC DRIVER SOURCE,LJ	1	SNA
...4		BN81-09605A	A/S-POLARIZER-TFT;POLARIZER-TFT,SMLK41FP	1	SNA
...4		BN81-09606A	A/S-POLARIZER-C/F;POLARIZER-C/F,SMLK41FP	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN81-09619A	A/S-ASSY PCB-SOURCE(L);ASSY PCB-SOURCE(L	1	SNA
...4		BN81-09620A	A/S-ASSY PCB-SOURCE(R);ASSY PCB-SOURCE(R	1	SNA
...3	OC-TC	BN96-30720B	ASSY CABLE P-FFC;H5000,FFC,No housing ty	2	SNA
...3	TC01A	BN96-30790A	ASSY CHASSIS TOP P;Y14 H6410 32",BN64-02	1	SA
...4		BN60-00930C	SPACER-TOP(UD);Y14 NNB/VNB 32",GASKET+PE	2	SNA
...4		BN60-00930D	SPACER-TOP(LR);Y14 NNB/VNB 32",GASKET+PE	2	SNA
...4		BN60-00997A	SPACER-GASKET;Y14 SF-LED,GASKET(DW 1200	3	SNA
...4	AS080	BN63-07556N	SHEET-COVER;TOC,PO,T0.068,W40mm,100M,ST-	1	SNA
...4		BN63-11875A	SHEET-COVER;Y14 SF-LED,POLY*,0.068,W25,L	2	SNA
...4		BN63-11875Q	SHEET-COVER;Y14 SF-LED,POLY*,0.068,W37,R	2	SNA
...4		BN64-02130D	BADGE-BRAND;SNB 8.5K,Ni,0.05,30,BLK	1	SNA
...4	AC157	BN64-02509A	CHASSIS-TOP;Y14 F-LED 32 H6410,PC+ABS+G/	1	SNA
....5		0103-010239	RESIN PC ABS;HM-1157/W8067,White,WT0118,	150	SNA
...4	FW04	BN64-02667A	WINDOW-RMC;UH6410,PC,7,22,13,V2,MILKY(WT	1	SNA
....5		0103-010276	RESIN PC;SC-1220R/W0352,Milky White,WT00	3	SNA
1		BN91-12792A	ASSY SHIELD;H65*	1	SNA
.2	SCREW	6001-003016	SCREW-MACHINE;PWH,+,M3.0,L5.0,ZPC(WHT),S	10	SA
.2		BN02-00102B	TAPE FILAMENT;UE7000,#8917,0.15,25,50,WH	0	SNA
.2	EC13	BN39-01884C	LEAD CONNECTOR;UN28H4200AF,Lead Connecto	1	SA
.2	EC13	BN39-01887E	LEAD CONNECTOR;UE32H6400,Flat Connector,	1	SA
.2	M-F	BN39-01888R	LEAD CONNECTOR-FUNCTION;UH6400 32",Lead	1	SA
.2	P001A	BN44-00707A	DC VSS-LED TV PD BD;L32X1T_EHS,L32X1T_EH	1	SA
.2	WIFI	BN59-01174A	NETWORK-WIFI MODULE;WIDT-30Q,Internal Wi	1	SA
.2	HOLDER- SCREW	BN61-09175B	HOLDER-LED SCREW;UD 110,SWRCH18A,10,3,BH	2	SA
.2		BN62-00367A	PAD GAP;F6400,SILICON,35 35 mm,6.5,Grey,	1	SNA
.2	BT	BN96-30218B	ASSY BOARD P-BT HOLDER;BT Module, Assy H	1	SA
.2	SP01A	BN96-30336A	ASSY SPEAKER P;6ohm,10W,Enclosure_H5k	1	SA
.2	FB01A	BN96-30902M	ASSY BOARD P-FUNCTION;UH6410,Function As	1	SA
.2	LVDS	BN96-31530D	ASSY CABLE P-FFC;UE32H6400,FFC,NH,200mm,	1	SA
1	M0017	BN91-12813H	ASSY CHASSIS;UH6P,H641*	1	SNA
.2	M0014	BN94-07548H	ASSY PCB MAIN;UH6P,H641*	1	SA
...3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
...3		BN61-10370B	HOLDER-SIDE AV;H6410,MPPE,GRAY	1	SNA
...4		0103-010281	RESIN MPPE;NH-1904HF/G62373,Gray,GY0287,	13	SNA
...3		BN62-00365B	HEAT SINK-PS;F 4k,5k,6k,A1050,ANODIZING,	1	SNA
...3		BN97-08071Y	ASSY SMD;UH6M,H6400,EUROPE,H6400	1	SNA
...4		0202-001830	SOLDER-CREAM;LFM-48W TM-HP,D20~38um,96.5	5	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4	DR01A	0402-001614	DIODE-RECTIFIER;S1G,400V,1A,DO-214AC,TP	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	4	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	4	SA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	3	SA
...4		0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	3	SA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2/-/24.5V,3000W,	1	SNA
...4		0406-001628	DIODE-TVS;AOZ8804ADI,6/-V,150W,SLP2510	1	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V, 6.7V, 7V,200W,SM	9	SA
...4		0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	2	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	6	SC
...4		0505-002560	FET-SILICON;AO6415,P,-20V,-3.3A,0.15ohm,	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,-30V,-5A,2W,SOIC-	1	SA
...4		0505-002917	FET-SILICON;AO3406,N,30V,3.6A,1.4W,SOT-2	2	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,380mA,1.19ohm,	10	SA
...4		0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	2	SA
...4		0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	4	SA
...4		1001-001860	IC-ANALOG SWITCH;NX5L2750CGU,QFN,10P,1.4	1	SNA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA
...4		1105-002528	IC-DDR3 SDRAM;K4B4G1646D-BCMA,DDR3 1866,	2	SA
...4		1105-002534	IC-DDR3 SDRAM;K4B2G1646Q-BCMA,DDR3 SDRAM	1	SA
...4		1201-003183	IC-AUDIO AMP;DRV612,HTSSOP,14P,5x4.4mm,D	1	SA
...4		1201-003671	IC-AUDIO AMP;NTP7414,MLF,48P,7x7mm,DUAL,	1	SA
...4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
...4		1203-006017	IC-VOL. DETECTOR;RT9824GJ8,TSONT23,8P,2.9	1	SA
...4		1203-006109	IC-POSIFIXED REG.;S-1206B33-M3T1G,SOT-2	1	SA
...4		1203-007211	IC-POSIFIXED REG.;G9915-12T45U,TO-252,3	1	SA
...4		1203-007238	IC-PWM CONTROLLER;TPS54427,DDA,8P,4.8x3.	2	SNA
...4		1203-007242	IC-POSIAJUST REG.;G2992BP11U,SOP-8,8P,	1	SA
...4		1203-007694	IC-DC/DC CONVERTER;SN1106041DDAR,DDA,8Z3	1	SA
...4		1203-007697	IC-DC/DC CONVERTER;LNBH26SPQR,QFN,24Z30,	1	SNA
...4		1203-007984	IC-DC/DC CONVERTER;AOZ3015PI,SO-8,8P,6.2	1	SA
...4		1203-008104	IC-POSIFIXED REG.;S-13A1D18-E8001,HSOP,	2	SNA
...4		1203-008105	IC-POSIFIXED REG.;S-13A1D33-E8001,HSOP,	1	SNA
...4		1203-008118	IC-DC/DC CONVERTER;AOZ3013PI,SO-8,8P,4.9	1	SNA
...4		1203-008183	IC-DC/DC CONVERTER;AOZ3015PI-1,EPAD SO-8	1	SA
...4		1204-003535	IC-DECODER;SEMS31T,PBGA,709P,23x23mm,PLA	1	SA
...4		1205-004447	IC-SWITCH;TPS2051CDBVR,SOT23-5,5P,3x1.65	3	SA
...4		1205-004983	IC-SWITCH;BD82032FVJ,TSSOP-B8J,8P,3.0x4.	1	SA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5x0.6mm,TP,1	29	SA
...4		2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	17	SNA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	35	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-000142	R-CHIP;2.7Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	43	SNA
...4		2007-000147	R-CHIP;8.2Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	39	SA
...4		2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	6	SNA
...4		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	17	SNA
...4		2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	16	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	7	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	17	SNA
...4		2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	4	SA
...4		2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	5	SNA
...4		2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001116	R-CHIP;680ohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001168	R-CHIP;75ohm,5%,1/4W,TP,3216	1	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	12	SNA
...4		2007-001295	R-CHIP;39ohm,5%,1/16W,TP,1005	1	SA
...4		2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	3	SA
...4		2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	2	SNA
...4		2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	4	SA
...4		2007-003015	R-CHIP;2.2ohm,5%,1/16W,TP,1005	4	SA
...4		2007-007001	R-CHIP;3.9Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	5	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	35	SNA
...4		2007-007470	R-CHIP;7.5Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007671	R-CHIP;11Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	8	SA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005	1	SA
...4		2007-008332	R-CHIP;11.5Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	2	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SA
...4		2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	4	SA
...4		2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	6	SA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	3	SNA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	2	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	4	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	7	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	13	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	9	SA
...4	AD480	2203-000530	C-CER,CHIP;2.7nF,10%,50V,X7R,TP,1005,-	2	SNA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	1	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	4	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	13	SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	4	SNA
...4	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	2	SA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,0.8	3	SA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	12	SNA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	3	SNA
...4	AD480	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,TP,1005	1	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	99	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	11	SNA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	7	SNA
...4	AD480	2203-006260	C-CER,CHIP;220nF,10%,10V,X5R,TP,1005	8	SA
...4	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	7	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	5	SA
...4	AD480	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	11	SC
...4	AD480	2203-006399	C-CER,CHIP;1000nF,10%,6.3V,X5R,TP,1005	1	SA
...4	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	21	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	19	SNA
...4	AD480	2203-006636	C-CER,CHIP;220nF,10%,25V,X7R,TP,1608	2	SA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	7	SNA
...4	AD480	2203-006842	C-CER,CHIP;0.47nF,5%,50V,C0G,TP,1005	1	SNA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	24	SA
...4	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	1	SNA
...4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	6	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608,	2	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012,0	35	SNA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	4	SNA
...4	AD480	2203-007401	C-CER,CHIP;10000nF,10%,50V,X5R,TP,3225	2	SA
...4	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	6	SA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005	4	SA
...4	AD480	2203-008096	C-CER,CHIP;2200nF,10%,50V,X5R,TP,2012,1.	1	SA
...4		2703-000158	INDUCTOR-SMD;1uH,10%,2012,.40ohm,50mA,45,	4	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,1.350hm,35mA	1	SA
...4		2703-000408	INDUCTOR-SMD;3.3uH,20%,3225,.28ohm,500mA	1	SA
...4		2703-001938	INDUCTOR-SMD;56nH,5%,1005,1.50hm,200mA,1	1	SA
...4		2703-003149	INDUCTOR-SMD;2.2uH,20%,5050,0.0550hm,300	1	SA
...4		2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	3	SA
...4		2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	2	SA
...4		2703-003930	INDUCTOR-SMD;4.7uH,20%,5050,0.0720hm,245	4	SA
...4		2703-004868	INDUCTOR-SMD;6.8uH,20%,5050,4.0T,0.043Oh	1	SA
...4		2801-003326	CRYSTAL-SMD;24MHz,30ppm,28-ABX,20pF,50oh	1	SA
...4		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	7	SNA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	35	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	1	SA
...4		3701-001856	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-S,AU	2	SA
...4		3701-001861	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-A,AU	2	SA
...4		3707-001106	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA
...4		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4	EH01	3711-008453	HEADER-BOARD TO CABLE;BOX,18P,2R,2mm,ANG	1	SA
...4	EH01	3711-008558	HEADER-BOARD TO CABLE;BOX,26P,2R,1.25mm,	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		3722-003229	JACK-MODULAR;8P/8C W/L,Y,STRAIGHT,N,Au,1	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,A	3	SA
...4	JACK PIN	3722-003546	JACK-PIN;5P+Screw hole,NI+SN,G,Y/BLU/RED	1	SA
...4		3722-003617	JACK-PHONE;14P/2C,SN,BLK,STRAIGHT,3.6PI,	1	SA
...4		3722-003655	JACK-SCART;21P,SN,BLK	1	SA
...4	ET01	BN40-00292A	TUNER;DNSS243IH286A,DNSS243IH286A,DVB-TC	1	SA
...4		BN41-02156A	PCB MAIN;X14H, EU, LED 6 Series,FR-4,4,A	1	SNA
...4		BN97-08274A	ASSY MICOM;T-MST14DEUC-XXXX,X14H,U8DC,EU	1	SNA
....5		1107-002290	IC-EMMC;MTFC4GMCAM-1M WT,4Gbyte,BGA,153P	1	SA
...4		BN97-08278A	ASSY MICOM;T-MST14DEUS-1004,2014.02.27	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SNA
...4		BN97-08425A	ASSY MICOM-BLASTER;Blaster-Version:*.**,	1	SNA
....5		BN13-00067A	PLD;MAXQ636V-2584+T,WLP,9	1	SNA
..3		BN97-08279A	ASSY DRM-KEY;H6*,EU,X14	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00110N	KEY CODE-CERTIFI;MIRACAST,TV,X12 /X13	1	SNA
...4		BN46-00115K	KEY CODE-CERTIFI;CI+,TV,X14, EU	1	SNA
1		BN92-14783C	ASSY BOX;UH6K	1	SNA
.2		BH68-00662A	LABEL BOX-01;ALL MODEL,ART PAPER,60,110,	1	SNA
.2		BN69-10237B	BOX-01,SET;32UH6410,CB,A-01,SW2,YEL,W858	1	SNA
1		BN92-15007A	ASSY LABEL;H6*	1	SNA
.2		BN68-06020A	LEAFLET-QSG;UH6410,SAMSUNG,wordless,EURO	1	SNA
.2		BN68-06129A	LABEL-HIGHLIGHT POP;H70XX, H65XX, H64XX,	1	SNA
.2	T0527	BP68-00052B	LABEL-00,RATING;FPTV,PET,T0.05,93,73	1	SNA
1	ACCE1	BN92-15037Z	ASSY ACCESSORY;H641*	1	SNA
.2		BN68-05417A	LABEL-02,ENERGY;ALL,EDC,Polypropylene,T0	1	SNA
.2	ACCE4	BN96-31598N	ASSY ACCESSORY-MANUAL;UH5K	1	SNA
..3		6902-001964	BAG PE;LDPE,BIOBASED,T0.03,W200,L300,TRP	1	SNA
..3		BN68-00514K	MANUAL FLYER-05,WARRANTY CARD;comm,Samsu	1	SNA
..3		BN68-04972A	MANUAL FLYER-04,REGULATORY GUI;ALL,SAMSU	1	SNA
..3		BN68-05944M	LEAFLET-03,FICHE;UH6400,W/P,B5	1	SNA
..3		BN68-06068D	MANUAL USERS;UH6410,SAMSUNG,ENG/DEU/FRA/	1	SNA
.2		BN96-31647J	ASSY ACCESSORY CABLE;UH5K	1	SNA
..3		3709-001793	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
..3	T0268	3903-000860	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,W	1	SA
..3		4301-000101	BATTERY-ALKALINE;1.5V,1650mAH,LR6,14.5x5	2	SNA
..3		4301-000103	BATTERY-ALKALINE;1.5V,750mAH,LR03,10.2x4	2	SNA
..3		6902-001963	BAG PE;LDPE,BIOBASED,T0.05,W275,L300,TRP	1	SNA
..3	REMO2	BN59-01175Q	REMOCON;TM1240A,44,3.0V,TM1240A_EUROPE_W	1	SA
..3	REMO2	BN59-01182F	REMOCON;TM1460,28,70mA,3.0V,EUROPE WHITE	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3		BN68-02989A	LABEL-PQS;ALL,ALL,Paper,30,65,WHITE,SEH	1	SNA
..3		BN96-15806C	ASSY HOLDER P-WIRE STAND;UF4510,NYLON,WH	1	SNA
...4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0	SNA
...4		BN61-05491D	HOLDER-WIRE STAND;UF4510,NYLON,WHT	1	SNA
..3	CAIR	BN96-31644A	ASSY CABLE P;IR BLASTER,UL1185 28AWG,LS0	1	SA
1		BN92-15038A	ASSY P/MATERIAL;UH6P	1	SNA
.2		6902-001516	BAG ROLL;HDPE/PE FOAM,T0.01/T0.3,W650,L3	2	SNA
.2		6922-000013	BAND PP;PP,W18,L2300/L2900,TRP	1	SNA
.2		BN01-00039A	FOIL-STRETCH-HOOD;LLDPE,T0.08,W930,L1400	0	SNA
.2	AS080	BN63-11096A	SHEET-COVER;PE,T4.0,W890,L1200	1	SNA
.2		BN69-09944A	CUSHION-SET;32UH6410,EPS,16.7g/L	1	SNA
..3		0103-005099	RESIN-EPS;BASF303,Natural,Natural	191	SNA
.2		BN69-10436A	PALLET-WOODEN;UE32H6410,WOOD,870,1140,13	1	SNA
.2		BN74-00008N	TAPE OPP-MASKING;T0.065,W60,L1500M,NTR,S	2	SNA