


1. Exploded View & Part List

Exploded View

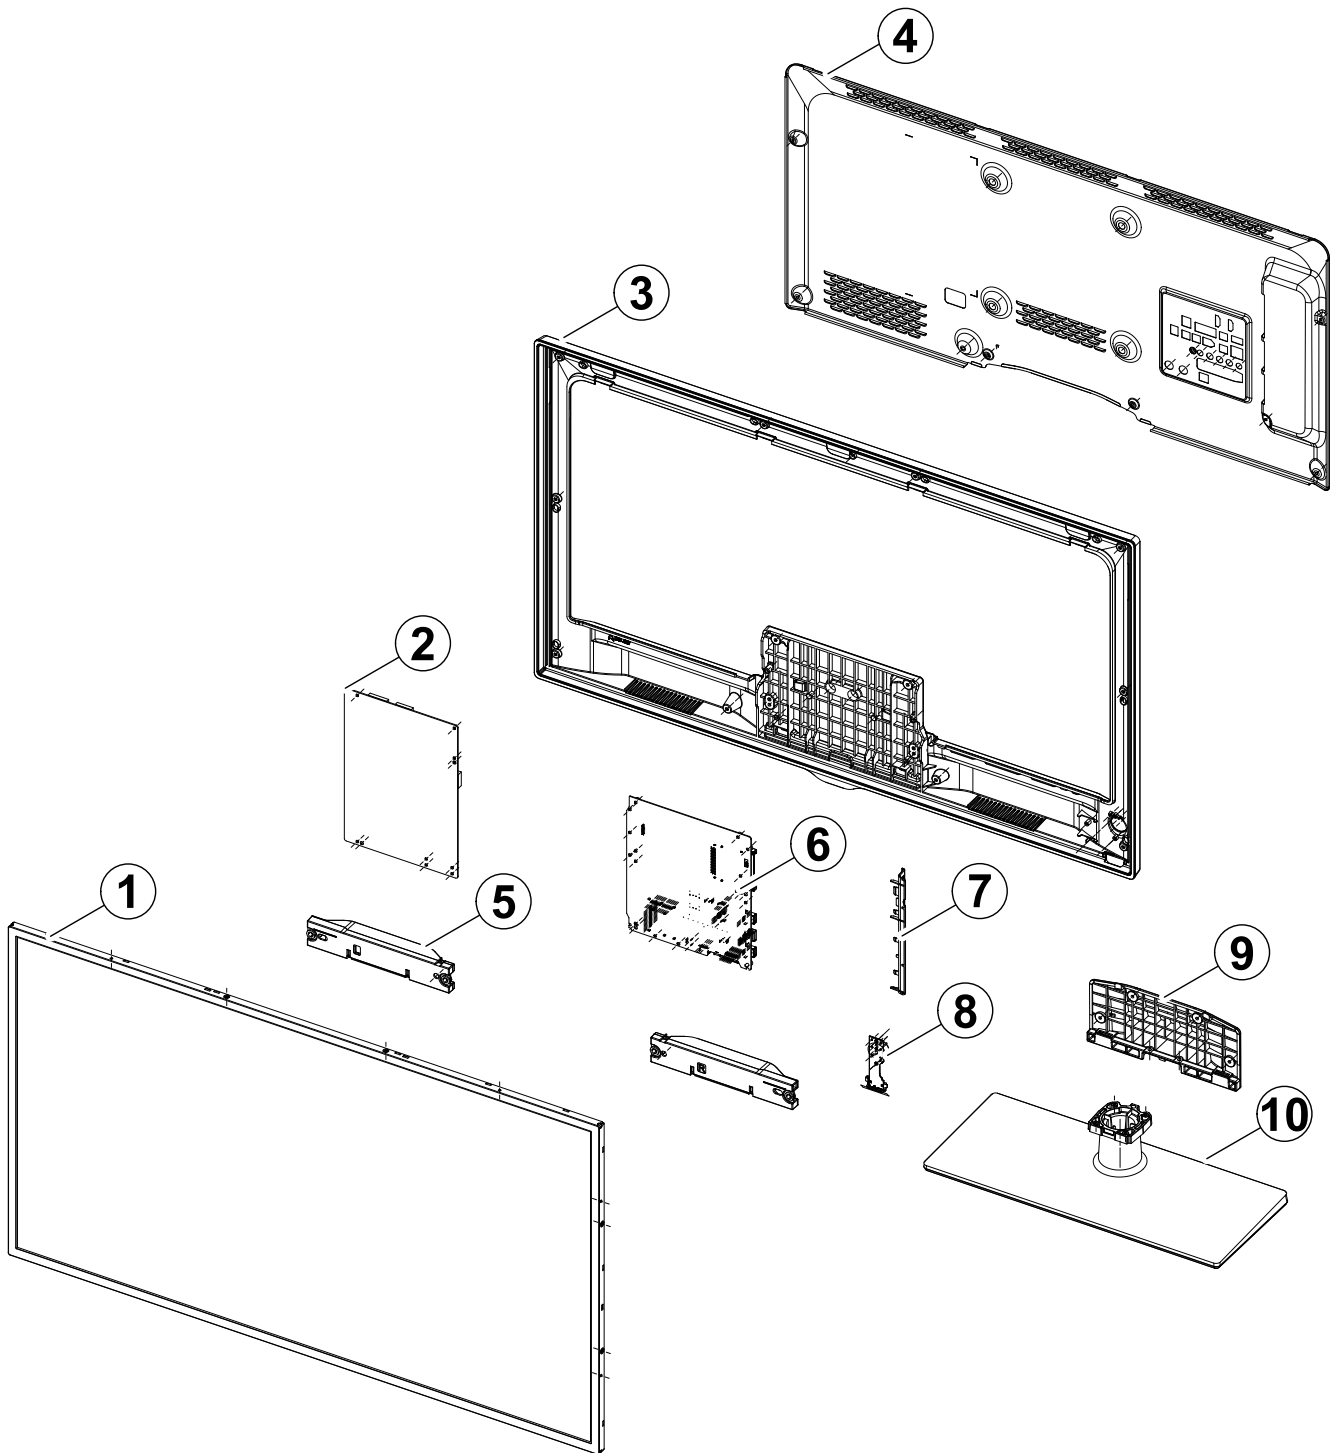

Parts List

No.	Parent	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	BN91-09041A	3		BN95-00603A	PRODUCT LCD-AMLCD; 5.5K, LTJ400HM09-V,2D,	SA	1
2	BN91-09041A	3		BN44-00502A	DC VSS-LED TV PD BD; PD46A1_CSM,PSLF111B0	SA	1
3	BN90-03569K	2	M001A	BN96-21981B	ASSY COVER P-MIDDLE; UE5500 40,PC(Clear)+	SA	1
4	BN90-03777D	2	R001A	BN96-21881D	ASSY COVER P-REAR; UE6100 40,EUROPE(5.5K)	SA	1
5	BN91-06963A	2	SP01A	BN96-21667A	ASSY SPEAKER P; 6ohm,4pin,10W,Enclosure t	SA	1
6	BN91-09654F	2	M0014	BN94-05851J	ASSY PCB MAIN; UE40ES5500WXXC	SA	1
7	BN91-06963A	2		BN61-08037A	HOLDER-SIDE AV; UE6100,ABS,HB,EO,Edge LED	SNA	1
8	BN96-21981B	3		BN96-22457P	ASSY BOARD P-5WAY SWITCH FUNCTION; UE40ES	SA	1
9	BN90-03975B	2	SG03	BN61-07057A	GUIDE-STAND; UD5000 37,PC+G/F 20%,V2,BK00	SA	1
10	BN90-03975B	2	SB04A	BN96-22227B	ASSY STAND P-BASE; UE5500 37~40,PC+ABS,V0	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE40ES5500WXZG (TT03)		
1		BN90-03569K	ASSY COVER MIDDLE;UE6100 40	1	SNA
.2	M001A	BN96-21981B	ASSY COVER P-MIDDLE;UE5500 40,PC(Clear)+	1	SA
..3	M0081	6003-000115	SCREW-TAPTYPE;BH,+,B,M3,L6,ZPC(BLK),SWRC	2	SNA
..3	T0069	AA63-60001V	SPACER-FELT;FELT,BLK,T0.5,200X15	2	SNA
..3		BN02-00112A	TAPE ETC-ALL;POLYESTER,L65.8M,T0.009,W10	0	SNA
..3		BN63-07229G	COVER-SHEET;rose70",urethane,T0.052,W15m	3	SNA
..3	R002A	BN63-09196B	COVER-MIDDLE;UE5500 40,PC(Clear)+PC/ABS(	1	SNA
..4		0103-007268	RESIN-PC;TN-1045M,70784,TP0010,0.8, 3.0	395	SNA
..4		0103-007678	RESIN-PC ABS;CF210M,6209G,BK0007,V-2	1.5	849
..3		BN81-01805C	A/S-TAPE-FILAMENT;ELMATIT,T0.1,W12,L1200	0	SNA
..3		BN96-22457P	ASSY BOARD P-5WAY SWITCH FUNCTION;UE40ES	1	SA
1	R001A	BN90-03777D	ASSY COVER REAR;UE6100 40	1	SNA
.2		6001-002755	SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1	6	SA
.2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	3	SA
.2	R001A	BN96-21881D	ASSY COVER P-REAR;UE6100 40,EUROPE(5.5K)	1	SA
..3		BN60-00162V	SPACER-FOAM;FOAM,50000mm,Dark Gray,0.5T,	0	SNA
..3		BN63-08262A	EARTH-PLATE;UD6500,STAINLESS-ST304,0.15	2	SNA
..3		BN63-09129A	SHEET-INSULATOR SMPS;UE6100,40/46/55,PC,	1	SNA
..3	R001	BN63-09143A	COVER-REAR;UE6700,40,PCM,T0.4,BKN-P824	1	SNA
..3	T0071	BN64-01949A	INLAY-TERMINAL;UE6100,PS SHEET,H/GLOSSY	1	SNA
..3		BN68-03937A	LABEL-TERMINAL SIDE;UE6100,PET,T0.05,Edg	1	SNA
1	S001A	BN90-03975B	ASSY STAND;UE5500 40	1	SNA
.2	SG03	BN61-07057A	GUIDE-STAND;UD5000 37,PC+G/F 20%,V2,BK00	1	SA
..3		0103-007285	RESIN-PC;MW32020GFU,K032202GFV,BK0007,V2	230	SNA
.2	SB04A	BN96-22227B	ASSY STAND P-BASE;UE5500 37~40,PC+ABS,V0	1	SA
..3	M0081	6003-001239	SCREW-TAPTYPE;FH,+,B,M4,L10,ZPC(WHT),SWR	4	SA
..3	SCREW	6003-001785	SCREW-TAPTYPE;FH,+,B,M4,L8,ZPC(BLK),SWRC	6	SA
..3	SG01	BN61-08178A	GUIDE-STAND NECK;UE5500,37"/40",PC+G/F20	1	SNA
..4		0103-007285	RESIN-PC;MW32020GFU,K032202GFV,BK0007,V2	300	SNA
..3		BN61-08183A	BRACKET-STAND BOTTOM;UE5500,37"/40",HGI,	1	SNA
..3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	1	SNA
..3		BN63-09405B	COVER-STAND BASE;UE5500,37/40,PC+ABS,V0,	1	SNA
..4		0103-005041	RESIN-PC;FR3200TV,901408,BK0008,1.2mm V-	585	SNA
..3		BN67-00327D	RUBBER-FOOT;STAND,SILICON,13*13,T2,GRAY(	6	SNA
1		BN91-06963A	ASSY SHIELD;UE40ES5500WX*	1	SNA
.2		6001-002756	SCREW-MACHINE;BH,+,M3,L6,ZPC(WHT),SWRCH1	6	SA
.2	EC13	BN39-01652G	LEAD CONNECTOR;UN40ES6100FXZA,Flat Conne	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN61-08037A	HOLDER-SIDE AV;UE6100,ABS,HB,EO,Edge LED	1	SNA
...3		0103-004609	RESIN-ABS;HF-0680U,K21294,BK0007,1.5mm H	13	SNA
.2		BN81-01805D	A/S-TAPE-FILAMENT;ELMATIT,T0.1,W30,L1200	0	SNA
.2	FL06	BN96-17116F	ASSY CABLE P-FFC;UE37D5000,FFC,345mm,51P	1	SA
.2	SP01A	BN96-21667A	ASSY SPEAKER P;6ohm,4pin,10W,Enclosure t	1	SA
1		BN91-09058A	ASSY LCM-AMLCD;LTJ400HM09-L,BN91-09041A	1	SNA
.2		BN91-09041A	ASSY LCM-AMLCD;BN95-00603A,BN44-00502A	1	SNA
...3		6001-002756	SCREW-MACHINE;BH,+,M3,L6,ZPC(WHT),SWRCH1	6	SA
...3		BN44-00502A	DC VSS-LED TV PD BD;PD46A1_CSM,PSLF111B0	1	SA
...3		BN95-00603A	PRODUCT LCD-AMLCD;5.5K, LTJ400HM09-V,2D,	1	SA
...4		6001-002757	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	6	SA
...4		6001-002759	SCREW-MACHINE;CH,+,M3,L4,ZPC(BLK),SWRCH1	8	SNA
...4		BN02-00102B	TAPE FILAMENT;UE7000,#893,0.15,25,50,WHI	0	SNA
...4		BN68-02471A	LABEL-STICKER;WW,Art Paper,80,40,AV	1	SNA
...4		BN90-03674A	ASSY MISC-BLU;E-LED, E5500, 40,LCD, 2D	1	SNA
....5		6001-002759	SCREW-MACHINE;CH,+,M3,L4,ZPC(BLK),SWRCH1	6	SNA
....5		BN61-08138A	LGP-LED;40",PMMA,896 x 513.5 x 3(T)	1	SNA
....5		BN63-09253A	SHEET-DIFFUSER;40" FHD, NNB, UTE24C-10B(	1	SNA
....5		BN63-09261A	SHEET-REFLECTOR;40inch 12Y SRS910C,SHEET	1	SNA
....5		BN63-09293A	SHEET-DIFFUSER;40" FHD, NNB, UTE24C-10E(	1	SNA
....5		BN96-21460A	ASSY MISC P-LED BAR L;40" NNB_Left,G/D ,	1	SNA
....5		BN96-21461A	ASSY MISC P-LED BAR R;40" NNB_Right,G/D,	1	SNA
....5		BN96-21687A	ASSY MISC P-CHASSIS BOTTOM;NNB 40",BN64-	1	SNA
....6		6001-002617	SCREW-MACHINE;CH,+,M3,L4,NI PLT (White),	8	SNA
....6		BN02-00088A	TAPE THERMAL-GRAPHITE R;NNB 40",7238A-SS	1	SNA
....6		BN02-00089A	TAPE THERMAL-GRAPHITE L;NNB 40",7238A-SS	1	SNA
....6		BN02-00102B	TAPE FILAMENT;UE7000,#893,0.15,25,50,WHI	0	SNA
....6		BN02-00113A	TAPE ETC-FIXING WIRE;Y12 NNB2,PET,0.05T,	1	SNA
....6	EC13	BN39-01600A	LEAD CONNECTOR;E_NNB 40" 2D wire-harness	1	SNA
....6		BN61-07424A	BRACKET-WALL MOUNT;NNB 32/40/46/55,SPCC,	4	SNA
....6		BN61-08235A	HOLDER-LGP;SNB,M3*L4.9*SCALOCK,trap,4.9,	2	SNA
....6		BN62-00240A	INSULATION-S-PCB L;NNB 40",MTU 100,0.1,1	1	SNA
....6		BN62-00241A	INSULATION-S-PCB R;NNB 40",MTU 100,0.1,1	1	SNA
....6		BN62-00242A	INSULATION-PD BOARD;NNB 40",FC1831Q 0.4T	1	SNA
....6	CC02	BN64-01915A	CHASSIS-BOTTOM;NNB 40",EGI-SECC,0.6,910,	1	SNA
....6		BN67-00383A	RUBBER-BOTTOM;NNB2 40",SH0140U(0.26,Hs80	2	SNA
....5		BN96-21701A	ASSY FRAME P-MOLD MIDDLE;NNB 40",BN61-07	1	SNA
....6		BN02-00040B	TAPE DOUBLE FACE-DIFFUSER FIXING;NNB 32/	2	SNA
....6		BN60-00491A	SPACER-LGP LR;NNB 40",SB00 + MKT-Z100,50	2	SNA
....6		BN60-00492A	SPACER-LGP UD;NNB 40",SSP40 gray 0.2T +	4	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.....6		BN60-00493A	SPACER-PANEL LR;NNB 40",SSP40 0.7T + MKT	2	SNA
.....6		BN60-00494A	SPACER-PANEL UD;NNB 40",SSP40 0.7T + MKT	2	SNA
.....6		BN60-00536A	SPACER-PANEL DN B;NNB 40",SSP40 0.7T + M	2	SNA
.....6		BN60-00537A	SPACER-PANEL DN A;NNB 40",SSP40 0.7T + M	2	SNA
.....6		BN60-00538A	SPACER-PANEL UP B;NNB 40",SSP40 0.7T + M	2	SNA
.....6		BN61-07915A	FRAME-MOLD MIDDLE;NNB 40",PC+GF,1.1,524.	1	SNA
...4		BN95-00570A	ASSY T CON;FHD,60Hz 40,LSJ400HM05-S	1	SA
.....5		BN97-06362A	ASSY SMD;BN95-00570A	1	SNA
.....6		0202-001477	SOLDER-CREAM;LST309-M,D20~45um,96.5Sn/3A	1	SNA
.....6	D0254	0404-001314	DIODE-SCHOTTKY;B260A,60V,2000mA,SMA,TP	1	SA
.....6	D0254	0404-001373	DIODE-SCHOTTKY;PD3S160,60V,1000mA,PowerD	2	SNA
.....6	T0139	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	SA
.....6		0406-001317	DIODE-TVS;SMAJ14A,15.6/-17.2V,400W,SMA	1	SNA
.....6		0406-001445	DIODE-TVS;RClamp7512N,2.7/2.8/2.9,300W,S	2	SA
.....6	Q613	0501-000465	TR-SMALL SIGNAL;MMBT3904,NPN,350mW,SOT-2	1	SA
.....6		0502-001331	TR-POWER;NSS30100LT1G,PNP,310mW,SOT-23,T	2	SA
.....6		0502-001345	TR-POWER;FCX491A,NPN,1000mW,SOT89,TR,900	3	SA
.....6		0502-001346	TR-POWER;FCX591A,PNP,1000mW,SOT89,TR,30/	2	SA
.....6		0505-002485	FET-SILICON;FDC658AP,P,-30V,-4A,0.075ohm	1	SA
.....6		0505-002826	FET-SILICON;ZXMN6A07F,N,60V,1A,0.4ohm,0.	1	SNA
.....6		1203-006905	IC-VOL. GENERATOR;iML7939AKD-TR,TQFN,48P	1	SNA
.....6		1203-006999	IC-DC/DC CONVERTER;SM4152,QFN,48P,7x7mm,	1	SNA
.....6		1404-001152	THERMISTOR-NTC;10KOHM,5%,3380K,1MW/C,TP	1	SA
.....6	DR1	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	4	SA
.....6	PR4	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	2	SA
.....6	KAR13	2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	1	SNA
.....6	R104	2007-000063	R-CHIP;150Kohm,1%,1/10W,TP,1608	1	SNA
.....6	ND51C2	2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA
.....6	KR24	2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	2	SNA
.....6	KAR21	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	16	SA
.....6	R510	2007-000108	R-CHIP;510Kohm,5%,1/10W,TP,1608	1	SNA
.....6	R105	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	4	SA
.....6	R111	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SNA
.....6		2007-000231	R-CHIP;1.3Kohm,1%,1/10W,TP,1608	1	SA
.....6	MR9	2007-000455	R-CHIP;18Kohm,1%,1/10W,TP,1608	1	SA
.....6	PRS34	2007-000516	R-CHIP;2.7Kohm,1%,1/10W,TP,1608	3	SA
.....6	HDR7	2007-000570	R-CHIP;220ohm,1%,1/10W,TP,1608	3	SA
.....6	JR11	2007-000614	R-CHIP;24Kohm,1%,1/10W,TP,1608	2	SNA
.....6	PR2	2007-000651	R-CHIP;27Kohm,1%,1/10W,TP,1608	1	SA
.....6	R945	2007-000726	R-CHIP;300ohm,1%,1/10W,TP,1608	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.....6	V8932	2007-000857	R-CHIP;4.3Kohm,1%,1/10W,TP,1608	1	SNA
.....6	HR10	2007-000962	R-CHIP;5.1Kohm,1%,1/10W,TP,1608	5	SA
.....6	PR12	2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	SA
.....6	CER42	2007-000999	R-CHIP;510ohm,1%,1/10W,TP,1608	1	SA
.....6	AHR41	2007-001175	R-CHIP;8.2Kohm,1%,1/10W,TP,1608	1	SA
.....6	R3301	2007-001433	R-CHIP;12Kohm,1%,1/10W,TP,1608	2	SA
.....6		2007-002768	R-CHIP;6.2Kohm,1%,1/10W,TP,1608	1	SA
.....6		2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	2	SNA
.....6		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	10	SNA
.....6	DR4	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	2	SNA
.....6		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	12	SNA
.....6		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,0.35	2	SA
.....6		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005	1	SA
.....6		2007-007645	R-CHIP;51.1ohm,1%,1/10W,TP,1608	1	SA
.....6	V8642	2007-007768	R-CHIP;13Kohm,1%,1/10W,TP,1608	1	SA
.....6		2007-007798	R-CHIP;10ohm,1%,1/16W,TP,1005	16	SA
.....6	S0F1352	2007-008596	R-CHIP;0.1ohm,1%,1/4W,TP,3216	1	SC
.....6		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	4	SA
.....6	AC139	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1608	2	SA
.....6	KAC5	2203-001126	C-CER,CHIP;0.68nF,10%,50V,X7R,TP,1608	1	SNA
.....6	C627	2203-001697	C-CER,CHIP;0.082nF,5%,50V,NP0,TP,1608	2	SNA
.....6	AVC08	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,TP,1608	1	SNA
.....6	PPC2	2203-005148	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	1	SA
.....6	AAC1	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	5	SNA
.....6	C236	2203-005918	C-CER,CHIP;1000nF,10%,6.3V,X7R,TP,1608	2	SNA
.....6	C102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	35	SNA
.....6	AD480	2203-006320	C-CER,CHIP;2200nF,10%,16V,X7R,TP,2012	1	SNA
.....6	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,0.	11	SA
.....6	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	2	SNA
.....6	AD480	2203-007132	C-CER,CHIP;10000nF,10%,25V,X7R,TP,3216,1	3	SA
.....6	AD480	2203-007193	C-CER,CHIP;10000nF,10%,6.3V,X7R,TP,2012	3	SA
.....6	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608,	3	SA
.....6	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	3	SNA
.....6	AD480	2203-007423	C-CER,CHIP;10000nF,10%,35V,X7R,TP,3216	7	SA
.....6	AD480	2203-007424	C-CER,CHIP;4700nF,10%,50V,X7R,TP,3216	5	SA
.....6		2409-001240	C-ORGANIC,SMD;33uF,20%,25V,LR,TP,7343(1.	1	SNA
.....6		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	2	SA
.....6		2703-003803	INDUCTOR-SMD;4.7uH,20%,6060,0.031ohm,270	1	SA
.....6		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	2	SA
.....6		2703-003867	INDUCTOR-SMD;22uH,20%,4040,0.29ohm,720mA	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....6	DR32	3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	4	SNA
....6		3301-001864	BEAD-SMD;100ohm,1608,TP,55ohm/29MHz,145o	11	SA
....6		3601-001038	FUSE-SURFACE MOUNT;125V,3A,FAST-ACTING,C	1	SA
....6		3708-002656	CONNECTOR-FPC/FFC/PIC;68P,0.5mm,SMD-A,Au	2	SA
....6	HB01A	3711-005601	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,SMD-	1	SA
....6	HB01A	3711-005925	HEADER-BOARD TO CABLE;BOX,51P,1R,0.5mm,S	1	SA
....6		BN13-00044A	IC ASIC;LPFC041T0A-Q1,32,40,46 60Hz FHD	1	SA
....6		BN41-01797A	PCB MAIN;2012 60Hz Tcon,FR-4,2,1.2T,170	1	SNA
....6		BN97-06436B	ASSY MICOM;J400HM050K,24C128,2012.01.30,	1	SNA
.....7		1103-001321	IC-EEPROM;24WC128,128Kbit,16Kx8,SOP,8P,5	1	SA
....6		BN97-06450A	ASSY MICOM;LSJ400HM05,400HM05,2011.10.10	1	SNA
.....7		1103-001254	IC-EEPROM;24C02,2Kbit,256x8,TSSOP,8P,4.4	1	SA
...4		BN96-21517A	ASSY OPEN CELL;LSJ400HM05-E,8bit,40 INCH	1	SNA
....5		BN81-07433A	A/S-ADHESIVE-A.C.F;ADHESIVE-A.C.F,1-ADHE	1	SNA
....5		BN81-07435A	A/S-ADHESIVE-A.C.F;ADHESIVE-A.C.F,2-ADHE	1	SNA
....5		BN81-07440A	A/S-ASSY PCB-SOURCE LEFT;ASSY PCB-SOURCE	1	SNA
....5		BN81-07453A	A/S-ASSY PCB-SOURCE RIGHT;ASSY PCB-SOURC	1	SNA
....5		BN81-07470A	A/S-IC DRIVER SOURCE;IC DRIVER SOURCE,2-	1	SNA
....5		BN81-07483A	A/S-POLARIZER-C/F;POLARIZER-C/F,2-POLARI	1	SNA
....5		BN81-07491A	A/S-POLARIZER-TFT;POLARIZER-TFT,2-POLARI	1	SNA
...4		BN96-21682A	ASSY MISC P-CHASSIS TOP;NNB 40",BN64-019	1	SNA
....5		BN60-00499A	SPACER-TOP D;NNB 40",LRS 05 + MKT-Z50,89	1	SNA
....5		BN63-07229G	COVER-SHEET;rose70",urethane,T0.052,W15m	3	SNA
....5	AC157	BN64-01914A	CHASSIS-TOP;NNB 40",SPCC,0.8T,913.6,528.	1	SNA
...4		BN96-21705B	ASSY COVER P-SOURCE;Y12 NNB2 40",LFD	1	SNA
....5		BN60-00342A	SPACER-SOURCE;NNB 32/40/46/55,SH0140U+AT	6	SNA
....5		BN61-08233A	BRACKET-STOPPER NUT;LED TV,M3*D7*L6.5*WH	5	SNA
....5		BN61-08262A	BRACKET-STAND-OFF;H7,B7,H7,B7,HEX 'M', S	1	SNA
....5		BN62-00243B	INSULATION-S-COVER L;NNB 40",PET,0.1,31,	1	SNA
....5		BN62-00244B	INSULATION-S-COVER R;NNB 40",PET,0.1,31,	1	SNA
....5		BN63-09038A	SHIELD-SOURCE COVER;NNB 40",EGI-SECC,0.6	1	SNA
1	M0017	BN91-09654F	ASSY CHASSIS;UE40ES5500WXXC	1	SNA
.2	M0014	BN94-05851J	ASSY PCB MAIN;UE40ES5500WXXC	1	SA
..3		BN97-05394H	ASSY SMD;UE5N, E5500,EUROPE	1	SNA
...4		0202-001477	SOLDER-CREAM;LST309-M,D20~45um,96.5Sn/3A	5	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	2	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	3	SNA
...4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	2	SA
...4	T0139	0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	1	SA
...4	T0139	0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	KQ1	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	1	SA
...4	Q101	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	2	SC
...4	CEQ2	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	4	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	SA
...4	ND51C2	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	SA
...4	IC104	0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	2	SA
...4	IC104	0802-001012	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,DQFN,	1	SNA
...4		0904-002714	IC-USC;QFN,28P,5.0mm X 5.0mm,12MHz,TP,PL	1	SA
...4	IC112	1103-001310	IC-EEPROM;24LC02B,2Kbit,256x8,SOIC,8P,5x	4	SA
...4		1103-001487	IC-EEPROM;AT24C256C-SSHL-T,256Kbit,32Kx8	1	SA
...4		1105-002253	IC-DDR3 SDRAM;K4B2G1646C-HCK0,DDR3 SDRAM	3	SA
...4		1201-003183	IC-AUDIO AMP;DRV612,HTSSOP,14P,5x4.4mm,D	1	SA
...4		1201-003333	IC-POWER AMP;NTP-7412S,MLF,48P,7x7mm,DUA	1	SNA
...4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
...4		1203-006017	IC-VOL. DETECTOR;RT9824GJ8,TSOT23,8P,2.9	1	SA
...4	T0087	1203-006109	IC-POSIFIXED REG.;S-1206B33-M3T1G,SOT-2	1	SA
...4	T0087	1203-006130	IC-POSIFIXED REG.;S-1172B25-U5T1G,SOT-8	1	SA
...4	T0087	1203-006135	IC-POSIFIXED REG.;AP1117D-33-GZ-13-89,T	1	SA
...4	T0087	1203-006136	IC-POSIFIXED REG.;AP1117D-18-GZ-13-89,T	1	SA
...4	IC012	1203-006138	IC-POSIAJUST REG.;AP1117DGZ-13-89,TO-2	1	SA
...4		1203-007080	IC-DC/DC CONVERTER;AOZ1051PI,SO-8,8P,4.9	1	SA
...4		1203-007238	IC-PWM CONTROLLER;TPS54427,DDA,8P,4.8x3.	2	SNA
...4		1203-007242	IC-POSIAJUST REG.;G2992BP11U,SOP-8,8P,	1	SA
...4		1203-007249	IC-SWITCH CUR. REG.;TPS62561DDC,DDA,5P,3	1	SA
...4		1204-003351	IC-DECODER;SEMS27,PBGA,717P,23x23mm,PLAS	1	SNA
...4		1205-003733	IC-SWITCH;AP2191MPG-13,MSOP-8L-EP,8P,2.9	1	SA
...4		1205-004155	IC-SWITCH;AOZ1360AIL,SO-8,8P,4.9X3.9mm,P	1	SA
...4		1205-004447	IC-SWITCH;TPS2051CDBVR,SOT23-5,5P,3x1.65	1	SA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5x0.6mm,TP,1	24	SA
...4	MR604	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	11	SNA
...4	R105	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	11	SA
...4	AR49	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	7	SNA
...4	AVR73	2007-000142	R-CHIP;2.7Kohm,5%,1/16W,TP,1005	1	SA
...4	R319	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	28	SNA
...4	R104	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	38	SA
...4	MR36	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	4	SNA
...4	AR43	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SNA
...4	MR13	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	15	SNA
...4	R509	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	R111	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	13	SNA
...4	HDR17	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	3	SNA
...4	R338	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	6	SNA
...4	UR23	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000336	R-CHIP;120Kohm,1%,1/10W,TP,1608	1	SA
...4	PR6	2007-000583	R-CHIP;22Kohm,1%,1/10W,TP,1608	1	SA
...4	R726	2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	4	SNA
...4	R124	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	SNA
...4	R2007	2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000816	R-CHIP;390Kohm,1%,1/10W,TP,1608	1	SNA
...4	DR6	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	SA
...4	DR37	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SNA
...4	VR88	2007-001116	R-CHIP;680ohm,1%,1/10W,TP,1608	1	SA
...4	S1G0843	2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001168	R-CHIP;75ohm,5%,1/4W,TP,3216	1	SA
...4	OTR1	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	12	SNA
...4	DR43	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	2	SNA
...4	DR1	2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	7	SA
...4	R16	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	2	SNA
...4	R326	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	SNA
...4	PR24	2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	4	SA
...4		2007-003022	R-CHIP;62ohm,5%,1/16W,TP,1005	26	SNA
...4	HDR8	2007-007095	R-CHIP;390ohm,5%,1/16W,TP,1005	1	SA
...4	R365	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	6	SNA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	4	SNA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007313	R-CHIP;6.8Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	15	SNA
...4		2007-007463	R-CHIP;1.1Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	SNA
...4	MR11	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	8	SA
...4		2007-008142	R-CHIP;511Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	4	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	SNA
...4	ZRN10	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4	DAR09	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	SA
...4	HRP2	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	2	SA
...4	DRP29	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	5	SA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	7	SNA
...4		2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	SA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	3	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	5	SNA
...4	PC43	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	7	SA
...4	MC9	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	1	SA
...4	DC1	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,TP,1005	2	SA
...4	C254	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	10	SA
...4	C507	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	5	SA
...4	AD480	2203-000530	C-CER,CHIP;2.7nF,10%,50V,X7R,TP,1005,-	2	SNA
...4	V1233	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	3	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	5	SNA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	4	SA
...4	DC25	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	3	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	18	SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	6	SNA
...4	AC2	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	3	SA
...4	AAC1	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	12	SNA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	2	SNA
...4	VC37	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	110	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	15	SNA
...4	JC10	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	8	SA
...4	C802	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	5	SA
...4	C125	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	26	SC
...4	HE4	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	13	SA
...4	HDC11	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	19	SNA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608,-	3	SNA
...4	C23	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	23	SA
...4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	5	SNA
...4	T0052	2703-000158	INDUCTOR-SMD;1uH,10%,2012,.4ohm,50mA,45,	2	SA
...4		2703-003343	INDUCTOR-SMD;2.2uH,20%,2520,0.104ohm,130	1	SNA
...4	T0052	2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	2	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	T0052	2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	1	SA
...4		2703-003930	INDUCTOR-SMD;4.7uH,20%,5050,0.067ohm,230	4	SA
...4	X202	2801-003326	CRYSTAL-SMD;24MHz,30ppm,28-ABX,20pF,50oh	1	SA
...4	X202	2801-003948	CRYSTAL-SMD;12MHz,30ppm,28-AAN,12pF,60oh	1	SA
...4	X202	2801-004775	CRYSTAL-SMD;12MHz,30ppm,16pF,30ohm,TP	1	SNA
...4	DR32	3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	6	SNA
...4	T0568	3301-002039	BEAD-SMD;26ohm,1608,TP	29	SA
...4	F201	3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	1	SA
...4		3701-001762	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-A,AU	1	SA
...4		3701-001784	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-S,AU	2	SA
...4		3707-001106	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA
...4		3709-001712	CONNECTOR-CARD SLOT;68P,1.27mm,ANGLE,AU,	1	SA
...4	HB01A	3711-005925	HEADER-BOARD TO CABLE;BOX,51P,1R,0.5mm,S	1	SA
...4		3711-007571	CONNECTOR-HEADER;BOX,18P,2R,2.0mm,ANGLE,	1	SA
...4	EH01	3711-007742	HEADER-BOARD TO CABLE;BOX,20P,2R,2mm,ANG	1	SA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4		3722-003213	JACK-PIN;J/B 5P + Screw hole,NI+SN,BLK,S	1	SA
...4		3722-003225	JACK-USB;4P/1C,Au,BLK,SMD-A(DIP),A	2	SA
...4		3722-003226	JACK-PHONE;7P/1C,SN,BLK	3	SA
...4		3722-003229	JACK-MODULAR;8P/8C W/L,Y,STRAIGHT,N,Au,1	1	SA
...4		3722-003408	JACK-SCART;21P,SN,BLK	1	SA
...4	ET01	BN40-00232A	TUNER;DTOD40FVL084AA,DTOD40FVL084AA,DVB-	1	SA
...4		BN41-01812A	PCB MAIN;X10 PLUS, LED 6 Series,FR-4,4,A	1	SNA
...4		BN97-06569A	ASSY MICOM-MAIN;T-MST10PDEUC-XXXX,U78A,	1	SNA
....5		1107-002088	IC-NAND FLASH;KLM2G1HE3F-B001,2GByte,16G	1	SNA
...4		BN97-06570A	ASSY MICOM-SUB;T-MST10PDEUC-S-XXXX,U78A,	1	SNA
....5		0903-001718	IC-MICROCONTROLLER;61P805-RG480WT,LQFP,4	1	SNA
..3		BN97-06719A	ASSY DRM-KEY;X9/X10+	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00110G	KEY CODE-CERTIFI;HDCP,TV,MSTAR,General	1	SNA
...4		BN46-00115H	KEY CODE-CERTIFI;CI+,TV,2012X,Euro	1	SNA
..3	T0066	BP62-00017A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,26.2,	1	SNA
1		BN92-08215A	ASSY LABEL;UE5N, E5500	1	SNA
.2		BN68-04168A	LABEL-01,TV POP;5500,American,PET,T0.1,1	1	SNA
.2	T0527	BP68-00052B	LABEL-00,RATING;FPTV,PET,T0.05,93,73	1	SNA
1		BN92-09853X	ASSY BOX;UE6100 40	1	SNA
.2		BH68-00662A	LABEL BOX-00;ALL MODEL,MOJO 90G,60,110,W	1	SNA
.2		BN69-07432B	BOX-01,SET;40UE5500-SS,CB,A-01,SW2,YEL,W	1	SNA
1		BN92-09856D	ASSY P/MATERIAL;UE6100 40	1	SNA
.2		6902-001671	BAG ROLL;HDPE/NITRON,T0.3,W750,L450M,TRP	3	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2	M040	6922-000013	BAND PP;PP,W18,L2300/L2900,TRP	1	SNA
.2		BH69-40383L	PACKING INNER-00,PAD;COMM,CB,1200,900,YE	1	SNA
.2		BN01-00043A	FOIL-STRETCH-HOOD;LLDPE,T0.08,W980,L1400	0	SNA
.2		BN63-09367A	COVER-SHEET NITRON;UE40D5003,PE,T2.0,130	1	SNA
.2		BN69-07157A	CUSHION-SET;UE5500 40",EPS,16.7g/l	1	SNA
.2		BN69-07822A	PALLET-WOODEN;WOOD,1230,1120,130,18%	1	SNA
.2		BN74-00008D	TAPE-OPP MASKING;OPP,T0.05,W75,L800M,CLR	3	SNA
.2		BN81-02321A	BAG-AIR;LIGHT FLEX PLASTIK,PE WHITE,L120	1	SNA
1	ACCE1	BN92-10428X	ASSY ACCESSORY;UE40ES5500WXZG	1	SNA
.2		BN68-04098C	LABEL-STICKER;UE5N,EDC,PET,T0.05,60,120,	1	SNA
.2	ACCE2	BN96-18550N	ASSY ACCESSORY-CABLE;UE5N, E5500,EUROPE	1	SNA
...3	T0268	3903-000603	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SA
...3	T0120	4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5mm,HOLDER,7.	2	SNA
...3	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	8	SA
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,9.2	1	SNA
...3	T0524	6902-000341	BAG PE;LDPE,T0.05,L90,W70,TRP,,,PE MARK	1	SNA
...3	REMO2	AA59-00582A	REMOCON;TM1250,49Key,3V,Europe, E5700	1	SA
...3	M9889	BN63-01798B	CLOTH-CLEAN;CLOTH,180,200,sea blue,ToC	1	SNA
...3		BN96-15806B	ASSY HOLDER P-WIRE STAND;UE5500,NYLON,BL	1	SNA
...4		BN61-04731D	BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE	0	SNA
...4		BN61-05491C	HOLDER-WIRE STAND;UE5500,NYLON,BLK	1	SNA
...3	EH03A	BN96-18153A	ASSY HOLDER P-RING;11 LED-TV	1	SNA
...4		6902-001404	BAG ZIPPER;LDPE,T0.05,W80,L100,TRP	1	SNA
...4	AH365	BN61-07295A	HOLDER-RING;40UD5500,ABS,BK0007,HB	4	SNA
.2	ACCE4	BN96-18550Y	ASSY ACCESSORY-MANUAL;UE32ES5500WXZG,37,	1	SNA
...3		6902-000476	BAG PE;LDPE,T0.03,W250,L350,TRP,Recycle,	1	SNA
...3		BN68-00514K	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	SNA
...3		BN68-03019A	LEAFLET-01,SAFETY GUIDE;ALL,SAMSUNG,28LE	1	SNA
...3		BN68-03943X	LEAFLET-UE5500;ALL,SAMSUNG,ENG,EUROPE,W/	1	SNA
...3		BN68-04027J	MANUAL FLYER-STAND GUIDE;UES5500 32/40/4	1	SNA
...3		BN68-04055C	MANUAL USERS-01;E5500,SAMSUNG,ENG/DEU/FR	1	SNA