


1. Exploded View & Part List

Exploded View

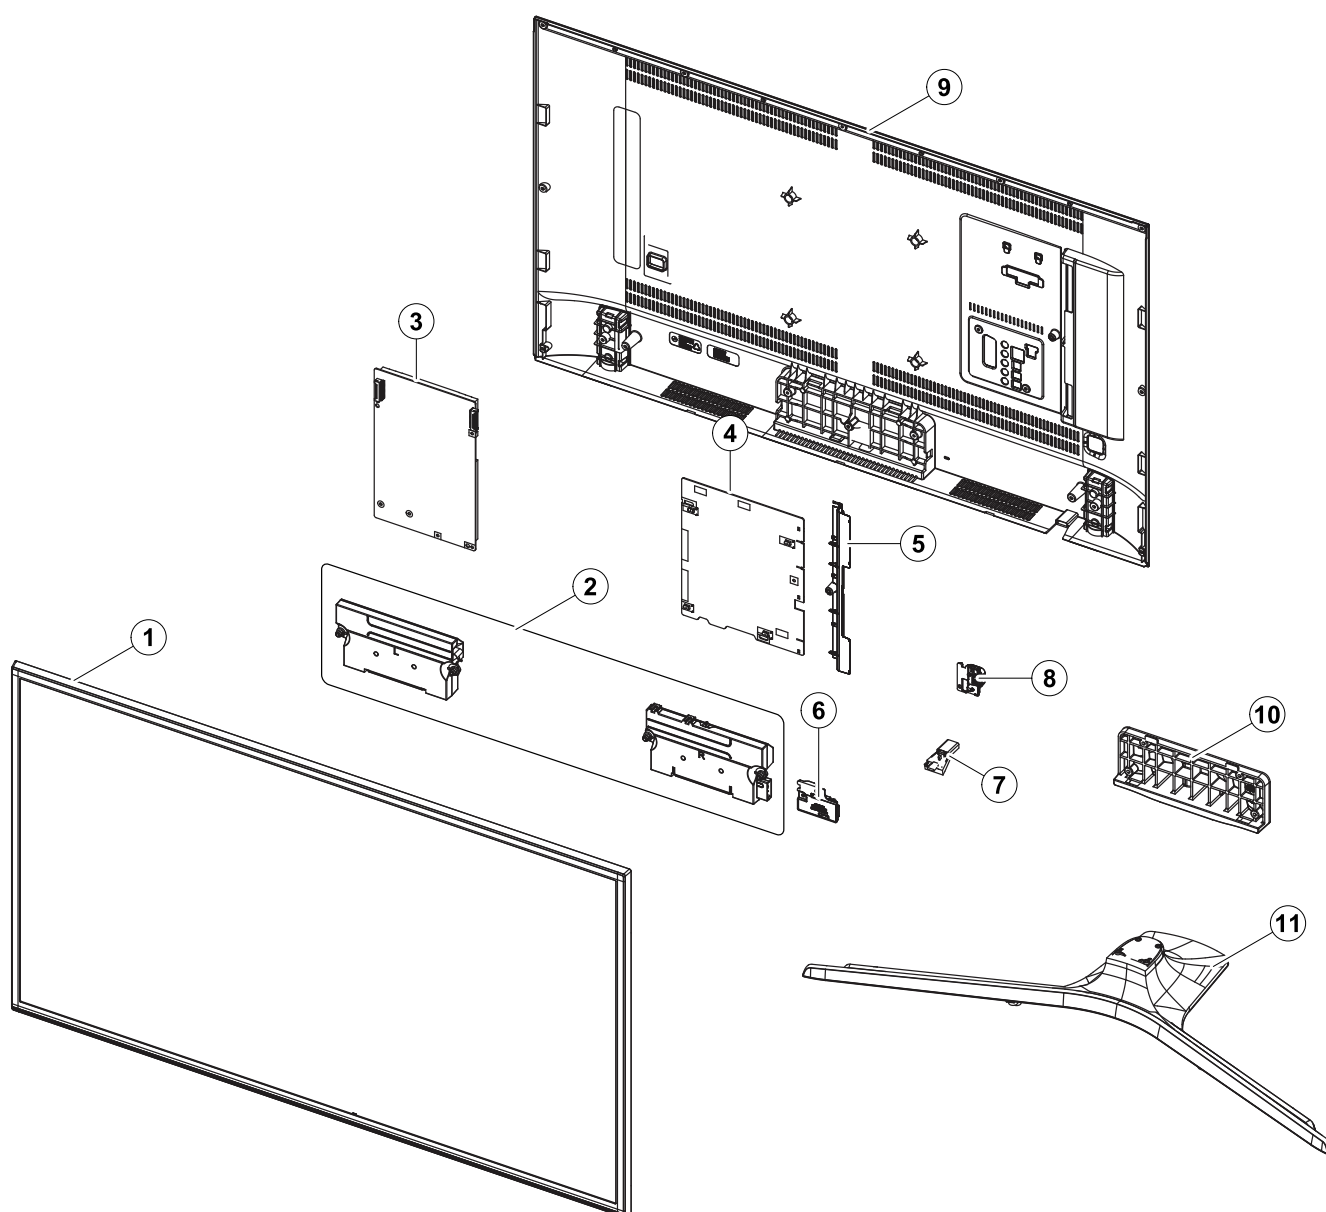

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	1		BN95-02634D	PRODUCT LCD-SDC; CY-GK040HGLV4V/H,KU6000,	SA	1
2	2	SP01A	BN96-35007D	ASSY SPEAKER P-FRONT; TV-SPK,JU6400,6ohm,	SA	1
3	2	P001A	BN44-00806A	DC VSS-PD BOARD; L40S6_FDY,AC/DC,139W,100	SA	1
4	2	M0014	BN94-12034B	ASSY PCB MAIN; UMU6100N,40	SA	1
5	3		BN63-16652A	COVER-TERMINAL SIDE; 55MU6400,HIPS,MOLD,H	SNA	1
6	2		BN59-01264A	NETWORK-WLAN CLIENT; WCM730Q,78.3x29.3x7.	SA	1
7	2		BN96-39955A	ASSY BOARD P-IR FUNCTION; KU6000,IR ASSY_	SA	1
8	2	JOG	BN96-35345B	ASSY BOARD P-FUNCTION JOG; JU7500,CT15SE8	SA	1
9	2	R001A	BN96-43323D	ASSY COVER P-REAR; 40MU6100(TC,T2C),PC+AB	SA	1
10	3	SG03	BN61-11465A	GUIDE-STAND; J5100/5500 40",PC+GF20%,MOLD	SA	1
11	2	SB04A	BN96-35224A	ASSY STAND P-BOTTOM; J5500 40",Silver SMT	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE40MU6105KXXC (FA01)		
1	S001A	BN90-06496D	ASSY STAND;J5000	1	SNA
..2	SG01A	BN96-35223A	ASSY GUIDE P-STAND;J5500 40",PC+GF20%,V2	1	SA
..3		0203-001499	TAPE-OPP;OPP,T0.04,W15,N/A,CLEAR,ROLL	0	SNA
..3	SG03	BN61-11465A	GUIDE-STAND;J5100/5500 40",PC+GF20%,MOLD	1	SA
...4		0103-007285	RESIN PC;HF3200H,K21294,BK0007,V-2,GF20%	330	SNA
..3		BN96-35528A	ASSY ACCESSORY-SCREW;JU7500,40	1	SNA
...4		6902-002474	BAG SCREW;LDPE,T0.05*,W70,L90,TRP,RECYCL	1	SNA
..4	HOLDER-BOLT	BN61-09494D	HOLDER-BOLT;KU6500,SWRCH18A,BLK,PRESS,B	8	SA
..2	SB04A	BN96-35224A	ASSY STAND P-BOTTOM;J5500 40",Silver SMT	1	SA
..3	SCREW	6003-001001	SCREW-TAPTYPE;FH,+,-,B,M3,L8,ZPC(BLK),SW	2	SA
..3		BN61-07463B	TAPE-DOUBLE FACE;ACRYL,T0.25,W7,CLEAR	0	SNA
..3	HOLDER-BOLT	BN61-09494D	HOLDER-BOLT;KU6500,SWRCH18A,BLK,PRESS,B	2	SA
..3		BN61-11430A	BRACKET-STAND BODY;HGI,T1.6,NATURAL,12.7	1	SNA
..3	AS080	BN63-04755H	SHEET-PROTECTION COVER;52LC530,PE,T0.05,	1	SNA
..3	AS080	BN63-04755L	SHEET-PROTECTION COVER;22LC350,PE,T0.05,	1	SNA
..3		BN63-13128E	SHEET-PROTECTION COVER;LED,AL,T0.05,W13,	1	SNA
..3		BN63-13258A	COVER-STAND TOP;Y15 F-LED J5100/5500 40"	1	SNA
...4		0103-009946	RESIN PC ABS;HM-1200,BLACK,BK0007,V-1,GF	360	SNA
...4		BN68-00513D	LABEL-RESIN;resin,-,ART,-,W10,L25,-,-,-,	1	SNA
..3	RF01	BN67-00398L	FOOT-RUBBER;UH6K,Si,GRAY,W8,L15.5,T2	3	SNA
..3	RF01	BN67-00398P	FOOT-RUBBER;UH6K,Si,GRAY,W8,L15.5,T2.5	4	SNA
..3		BN68-05603A	LABEL-E PASS;ART PAPER 90G,W/W	3	SNA
..3		BN95-02140A	ASSY COVER STAND SMT;J5500 STAND,40,Silv	1	SNA
...4		0203-007002	TAPE-SINGLE FACE;OPP,T0.06,W75,L66M,CLEA	0	SNA
...4		0204-007674	COATING;UVICHEM CVM93000(VOC) MATT(5),CL	0	SNA
...4		AA69-05637R	PAD-DP SHEET;JUPITER,CB,W775,L505	1	SNA
...4		AA69-07416G	MASTER BOX-DP;CB,DW,W325,H540	1	SNA
...4		AA69-07495E	PAD-DP SHEET;CTV,CB,DW5,W775,L320,YEL	1	SNA
...4		AA69-07510A	PAD-DP BOTTOM EPP;CTV,CB,W773,L506	1	SNA
...4		BN01-00337A	TARGET-ALUMINIUM CY;Al,99.9%,1924mm, 132	0	SNA
...4		BN01-00340A	TARGET-CHROMIUM CY;Cr,99.5%,1924mm, 132d	0	SNA
...4		BN63-13262A	COVER-STAND DECORATION;J5100/5500 40",PC	1	SNA
....5		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	77	SNA
....5	AS080	BN63-07556C	SHEET-PROTECTION COVER;TOC,PO,T0.068,W50	1	SNA
...4		BN68-03920A	LABEL BOX;ALL,ART PAPER,W100,L75,W/W,100	1	SNA
...4		BN69-10617B	PACKING SHEET;32" UH6300,HDPE/PE FOAM,PE	1	SNA
..3	T0382	BP61-00495C	TAPE SINGLE FACE;ACRYL,PJT,ACRYL FOAM,T0	0	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
1	R001A	BN90-09057D	ASSY COVER REAR;UMU6100N,40	1	SNA
.2	SCREW	6001-003074	SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1	14	SA
.2	R001A	BN96-43323D	ASSY COVER P-REAR;40MU6100(TC,T2C),PC+AB	1	SA
...3	R001	BN63-15583B	COVER-REAR;40KU6000,PC+ABS,MOLD,V-1,BK00	1	SNA
...4		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	1600	SNA
...3		BN64-03903A	INLAY-TERMINAL SIDE;55MU6100,PET,T0.125,	1	SNA
...3		BN68-03518R	LABEL-STICKER CI SLOT;55KU6000,PET,T0.12	1	SNA
1		BN90-09071A	ASSY W/I;UMU6100N	1	SNA
.2		BN81-08159Z	A/S PART SET-ELEC W/I;LED TV ELEC spec-C	1	SNA
.2		BN81-15300A	A/S PART SET-MECH W/I;UMU6100N,U40MN*	1	SNA
1		BN91-18917A	ASSY SHIELD;UMU6100N,40	1	SNA
.2	SCREW	6001-003081	SCREW-MACHINE;PWH,+,M3,L5,ZPC(WHT),SWRCH	5	SA
.2		BN02-00102B	TAPE-SINGLE FACE;FILAMENT,#8917,T0.15,W2	0	SNA
.2		BN39-02025G	LEAD CONNECTOR-POWER;UN65KU6000,Flat Con	1	SA
.2		BN39-02030E	LEAD CONNECTOR-BLU;BLU,UL21016,16P,80mm,	1	SA
.2	EC13	BN39-02219D	LEAD CONNECTOR;40KU6300, 43KU6300, 50KU6	1	SA
.2		BN39-02220A	LEAD CONNECTOR-SUB ASSY;40KU6300,UL21016	1	SA
.2	P001A	BN44-00806A	DC VSS-PD BOARD;L40S6_FDY,AC/DC,139W,100	1	SA
.2		BN59-01264A	NETWORK-WLAN CLIENT;WCM730Q,78.3x29.3x7.	1	SA
.2		BN61-09637A	HOLDER-WIFI;KU6000,ABS,MOLD,BK0007,HB	1	SA
.2	SP01A	BN96-35007D	ASSY SPEAKER P-FRONT;TV-SPK,JU6400,6ohm,	1	SA
.2	JOG	BN96-35345B	ASSY BOARD P-FUNCTION JOG;JU7500,CT15SE8	1	SA
...3	AH240	BN61-11584A	HOLDER-BUTTON;JU7500,ABS,MOLD,BK0007,HB	1	SNA
...3	AH297	BN63-11231B	HOLDER-KNOB;HU7000,ABS,MOLD,BLACK,HB	1	SNA
...3	FK04	BN64-02406B	BUTTON-FUNCTION;LED_HU7000,ABS,HB,BLACK,	1	SNA
...4		0103-004609	RESIN ABS;HF-0680U,K21294,BK0007,HB,High	8	SNA
.2		BN96-39823C	FFC CABLE;40KU6000,43KU6000,Fold,L600,96	1	SA
.2		BN96-39891A	FFC CABLE;55KS7500,Fold,L400,96P	1	SA
.2		BN96-39955A	ASSY BOARD P-IR FUNCTION;KU6000,IR ASSY_	1	SA
1	M0017	BN91-18924B	ASSY CHASSIS;UMU6100N,40	1	SNA
.2	M0014	BN94-12034B	ASSY PCB MAIN;UMU6100N,40	1	SA
...3		BN62-00834A	HEAT SINK-PS;KANT_M heatsink,A1050,T1.5,	1	SNA
...3		BN63-16652A	COVER-TERMINAL SIDE;55MU6400,HIPS,MOLD,H	1	SNA
...3		BN97-12859A	ASSY DRM;Kant_M,DVB,NagSam, MAC, HDCP, C	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFICATION;MAC,TV/AV,General	1	SNA
...4		BN46-00110P	KEY CODE-CERTIFICATION;MIRACAST(HDCP2.2)	1	SNA
...4		BN46-00601A	KEY CODE-CERTIFICATION;KANT-M,CI PLUS,Sa	1	SNA
...4		BN46-00604A	KEY CODE-CERTIFICATION;KANT-M,Nagra CSC	1	SNA
...3		BN97-12957A	ASSY MICOM;TCON DATA_40SDC_F,MU6100	1	SNA
...4		BN46-00662A	S/W MICOM;M40A6U0F,40A6AU2VK,40SDC_F	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3		BN97-12958B	ASSY SMD;UMU6100N,40	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,20-38um,S	5	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8~6.6V,300mW,SO	3	SNA
...4		0403-001831	DIODE-ZENER;KDZ12B,12~13.5V,1000mW,SOD-1	1	SA
...4		0403-002014	DIODE-ZENER;KDZ16B,16.2~18.3V,1000mW,SOD	1	SNA
...4		0404-001307	DIODE-SCHOTTKY;SSC54,40V,5000mA,DO-214AB	1	SA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	2	SA
...4		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	2	SA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	1	SA
...4		0404-001953	DIODE-SCHOTTKY;MBRA340F-HAF,40V,3000mA,S	3	SA
...4		0406-001200	DIODE-TVS;RClamp0504F,6V,1MAV,TP	5	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V,6.7V,7V,200MAV,20	1	SA
...4		0406-001718	DIODE-TVS;SMF36A,40V,44.2V,3.8MAV,1.25VP	1	SA
...4		0406-001778	DIODE-TVS;PUSB3FR4,5.5V,9V,0.2MAV,0.7VPA	1	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	4	SC
...4		0502-001345	TR-POWER;FCX491A,NPN,1000mW,SOT89,TR,900	1	SA
...4		0502-001346	TR-POWER;FCX591A,PNP,1000mW,SOT89,TR,30/	1	SA
...4		0504-000126	TR-DIGITAL;KSR1101,NPN,200mW,4.7K/4.7K,S	1	SA
...4		0505-001844	FET-SILICON;SI4435DDY-T1-GE3,P,30V,-11.4	1	SA
...4		0505-002560	FET-SILICON;AO6415,P,20V,-3.3A,0.15ohm,1	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,20V,-4.2A,0.052oh	1	SA
...4		0505-002660	FET-SILICON;Si2308BDS,N,60V,2.3A,0.156oh	1	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,30V,-5A,2W,SOIC-8	1	SA
...4		0505-003205	FET-SILICON;DMG4435SSS-13,P,30V,-7.3A,1.	1	SA
...4		0505-003391	FET-SILICON;AOD2922,N,100V,8A,140Mohm,18	1	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,0.38A,1.19ohm,	1	SA
...4		0505-003507	FET-SILICON;AO3424,N,30V,3.8A,1.4W,SOT-2	7	SA
...4		0801-003603	IC-CMOS LOGIC;MC74LCX244MN2TWG,Octal buf	1	SA
...4		1001-001998	IC-ANALOG MULTIPLEX;NX3DV221GM,USB switc	1	SA
...4		1003-002878	IC-LEVEL DRIVER;VLS1RO,QFN,46P,4.5x6.5x1	1	SA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA
...4		1105-002704	IC-DDR4 SDRAM;K4F8E304HB-MGCH,LPDDR4-SDR	2	SA
...4		1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	SA
...4		1201-004117	IC-AUDIO AMP;TAS5749M,QFP,48P,7x7x1mm,DU	1	SA
...4		1203-004363	IC-VOL. DETECTOR;SOT-23,3Z30,2.9x1.6mm,P	1	SA
...4		1203-008082	IC-DC/DC CONVERTER;TPS54627DDAR,SOP 8P,8	1	SA
...4		1203-008104	IC-POSIFIXED REG.;S-13A1D18-E800,HSOP,8	1	SNA
...4		1203-008105	IC-POSIFIXED REG.;S-13A1D33-E800,HSOP,8	1	SNA
...4		1203-008392	IC-VOL. DETECTOR;S-6414AAB-L800X,TSOT-23	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1203-008777	IC-DC/DC CONVERTER;TPS563201,SOT-23,6,1.	4	SNA
...4		1203-008880	IC-DC/DC CONVERTER;VPM1RO,QFN,68P,8x8x1m	1	SA
...4		1203-008917	IC-DC/DC CONVERTER;G5334CQT1U,QFN4,23P,4	1	SA
...4		1203-008919	IC-DC/DC CONVERTER;SYD104AADCT,TSOT23,6P,	1	SNA
...4		1203-008921	IC-DC/DC CONVERTER;SYU236ARAC,QFN,20P,3x	1	SNA
...4		1203-008933	IC-POSLADJUST REG.;G942F11U,SOP,8P,4.9x	1	SA
...4		1204-003714	IC-DECODER;SDP1601,FCPBGA,1147,31x31x18m	1	SA
...4		1205-005519	IC-SWITCH;ET20163,SOT23-5,5P,2.95x3.02mm	3	SA
...4		1205-005537	IC-REPEATER;TCA9517,VSSOP,8P,3.00x3.00mm	3	SA
...4		1205-005749	IC-SWITCH;G2897KD1U,TDFN2X3-14,14P,2x3mm	2	SA
...4		1404-001731	THERMISTOR-NTC;33Kohm,4050K,1mW/C,TP,1.6	1	SNA
...4		1405-001232	VARISTOR;6.4V,5.6VDC,30A,1608,TP,19V,200	7	SNA
...4		1405-001271	VARISTOR;35V,20VDC,5A,1005,TP,100V,10pF	25	SA
...4		1405-001381	VARISTOR;11V,8VDC,30A,1608,TP,25V,500pF	3	SA
...4		1405-001382	VARISTOR;24.5V,16VDC,120A,2012,TP,42V,40	1	SA
...4		2007-000039	R-CHIP;0ohm,1%,1/10W,TP,1608	4	SA
...4		2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	16	SA
...4		2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	4	SNA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	2	SA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	10	SNA
...4		2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	3	SA
...4		2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	18	SNA
...4		2007-000343	R-CHIP;120ohm,1%,1/10W,TP,1608	1	SA
...4		2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000772	R-CHIP;33Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000779	R-CHIP;33ohm,1%,1/10W,TP,1608	2	SA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-001288	R-CHIP;18ohm,5%,1/16W,TP,1005	4	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	27	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	9	SNA
...4		2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	18	SA
...4		2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	13	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007131	R-CHIP;13Kohm,1%,1/16W,TP,1005	6	SA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	67	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005,T0.35	10	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	34	SNA
...4		2007-007305	R-CHIP;120ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	15	SNA
...4		2007-007308	R-CHIP;33Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005	5	SA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	16	SA
...4		2007-007313	R-CHIP;6.8Kohm,1%,1/16W,TP,1005	6	SA
...4		2007-007315	R-CHIP;3.9Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	13	SNA
...4		2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	6	SNA
...4		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	5	SNA
...4		2007-007520	R-CHIP;20ohm,1%,1/10W,TP,1608	1	SA
...4		2007-007528	R-CHIP;1.5Kohm,1%,1/16W,TP,1005	5	SA
...4		2007-007588	R-CHIP;1.8Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007697	R-CHIP;2.4Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007736	R-CHIP;510Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	21	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	4	SA
...4		2007-007798	R-CHIP;10ohm,1%,1/16W,TP,1005	8	SA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	7	SNA
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005	4	SA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	5	SA
...4		2007-008596	R-CHIP;0.1ohm,1%,1/4W,TP,3216	3	SC
...4		2007-009322	R-CHIP;1.3Kohm,1%,1/16W,TP,1005	5	SA
...4		2007-009777	R-CHIP;4.99Kohm,1%,1/16W,TP,1005	1	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	17	SNA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	9	SA
...4		2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,TP,1.0x1.0	1	SA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	4	SNA
...4		2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP,4P,TP,1.	2	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP,4P,TP,1	4	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	6	SA
...4	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	3	SNA
...4	AD480	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	8	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	2	SA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	4	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	3	SA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005	4	SA
...4	AD480	2203-001072	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,1005	1	SA
...4	AD480	2203-001851	C-CER,CHIP;0.016nF,5%,50V,NP0,TP,1608	1	SNA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	8	SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	1	SNA
...4	AD480	2203-002720	C-CER,CHIP;10nF,10%,25V,X7R,TP,1005,T0.5	1	SNA
...4	AD480	2203-005057	C-CER,CHIP;0.0082nF,0.25pF,50V,NP0,TP,10	2	SA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,T0.	6	SA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	5	SNA
...4	AD480	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,TP,1005	2	SNA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	2	SNA
...4	AD480	2203-005993	C-CER,CHIP;68nF,10%,16V,X7R,1005	1	SA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	1	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	3	SNA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,T0.	219	SNA
...4	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	15	SA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	1	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	19	SNA
...4	AD480	2203-006636	C-CER,CHIP;220nF,10%,25V,X7R,TP,1608	1	SA
...4	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,T0	11	SNA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	4	SNA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005	3	SA
...4	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005	1	SNA
...4	AD480	2203-006844	C-CER,CHIP;470nF,10%,10V,X5R,TP,1005	2	SA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	66	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	11	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608(	63	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	19	SA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	10	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	33	SNA
...4	AD480	2203-007423	C-CER,CHIP;10000nF,10%,35V,X7R,TP,3216	4	SA
...4	AD480	2203-007486	C-CER,CHIP;1000nF,10%,50V,X5R,TP,1608	2	SNA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,T0.	14	SA
...4	AD480	2203-008096	C-CER,CHIP;2200nF,10%,50V,X5R,TP,2012,1.	1	SA
...4	AD480	2203-008315	C-CER,CHIP;22000nF,20%,25V,X5R,TP,2012,T	6	SA
...4	AD480	2203-008412	C-CER,CHIP;4700nF,10%,50V,X5R,TP,2012,1.	2	SNA
...4		2402-001268	C-AL,SMD;100uF,20%,25V,WT,TP,8x6.3mm	1	SA
...4		2409-001240	C-ORGANIC,SMD;33uF,20%,25V,LR,TP,7343(1.	1	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1.35Ohm,35mA,15,M	1	SA
...4		2703-002269	INDUCTOR-SMD;56nH,5%,1005,T0.5,1.4Ohm,15	3	SA
...4		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	2	SA
...4		2703-003754	INDUCTOR-SMD;1uH,20%,1608,T0.8,0.24Ohm,9	1	SNA
...4		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	4	SA
...4		2703-003937	INDUCTOR-SMD;1uH,20%,70647,T3,0.008Ohm,1	1	SA
...4		2703-004630	INDUCTOR-SMD;2.2uH,20%,7070,T5,0.0025Ohm	2	SNA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,5050,T4,0.072Ohm,	4	SA
...4		2703-005191	INDUCTOR-SMD;1.5uH,20%,6060,T4.5,0.02Ohm	5	SA
...4		2703-005376	INDUCTOR-SMD;10uH,20%,10.7x10mm,T3.8,0.0	1	SA
...4		2801-004021	CRYSTAL-SMD;24.576MHz,20ppm,28-AAN,12pF,	2	SA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	43	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	3	SA
...4		3601-001376	FUSE-SURFACE MOUNT;32V,3A,FAST-ACTING,Hi	1	SNA
...4		3701-001967	CONNECTOR-HDMI;19P,A,FEMALE,AU,0.5mm,BLK	3	SA
...4		3707-001104	CONNECTOR-OPTICAL;ANGLE,SPDIF	1	SA
...4		3708-003241	CONNECTOR-FPC/FFC/PIC;96P,0.5mm,SMD-A,AU	2	SNA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4	EH01	3711-007803	HEADER-BOARD TO CABLE;BOX,12P,1R,1.25mm,	1	SA
...4	EH01	3711-008098	HEADER-BOARD TO CABLE;BOX,20P,1R,1.25mm,	1	SNA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4	EH01	3711-008859	HEADER-BOARD TO CABLE;BOX,12P,2R,2mm,ANG	1	SA
...4		3711-009090	CONNECTOR-HEADER;BOX,16P,1R,1.25mm,SMD-A	1	SA
...4		3722-003199	JACK-MODULAR;8P/8C,Y,ANGLE,NONE,AU,1PORT	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,ANGLE,A,2.0,13.1x1	2	SA
...4		3722-003814	JACK-PHONE;1P/7C,NI/SN,YEL,ANGLE,3.5PI,1	1	SA
...4	JACK	3722-003873	JACK-PHONE;1P/7C,AU/SN,BLU,ANGLE,3.5PI,1	1	SA
...4		6302-001376	GASKET-SMD;,,CONDUCTIVE FABRIC,T14,W43,L	5	SNA
...4		BN40-00330A	TUNER-DTV AIR CABLE;DTOS40EH7A,DVB-TC,38	1	SA
...4		BN41-02568A	PCB-MAIN;MU6400,FR-4,4L,1.6T,1,KANT Buil	1	SNA
...4	CB07	BN61-13312B	BRACKET-SCREWLESS PCB;55KS8000,SK5,T0.3,	4	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN97-12857A	ASSY MICOM-SUB;KMMICOM_TV,UMU7000,W25Q40	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SA
...4		BN97-12955B	ASSY MICOM-MAIN;T-KTMDEUC,MU6100/6300,KL	1	SNA
....5		1107-002374	IC-EMMC;KLM4G1FEPD-B031,4Gbyte,BGA,153P,	1	SNA
...4		BN97-12956A	ASSY MICOM;T-CON F/W KANT-M,MU6100/6300,	1	SNA
....5		1107-002339	IC-NOR FLASH;W25Q80DV,8Mbit,SOP,5.28x5.2	1	SNA
....5		BN46-00636A	S/W MICOM;KANT-M_TCON F/W	1	SNA
1		BN92-21838D	ASSY BOX;UMU6100N,40	1	SNA
.2		BH68-00662A	LABEL BOX;ALL,ART PAPER,W60,L110,WHT,NO	1	SNA
.2		BN69-16150C	BOX UNIT;40MU6100,CB,DW2,F1,L1160,W146,H	1	SNA
1		BN92-21852A	ASSY P/MATERIAL;UMU6100N,40	1	SNA
.2		6902-001956	BAG ROLL;HDPE/PE FOAM,HDPE T0.018mm,T0.2	2	SNA
.2		6902-002233	BAG AIR;LDPE,-,T0.2,W900,L1850,TRP,-,-,-	1	SNA
.2		6922-000003	BAND;PP,T0.8,W18,L1650M,TRP,DA69-90145A	1	SNA
.2		BN02-00319B	TAPE-SINGLE FACE;OPP,T0.05,W75,L800M,CLE	2	SNA
.2		BN68-02422B	LABEL WARNING;ALL,ART PAPER,T0.05,W240,L	1	SNA
.2		BN69-03982N	PACKING ANGLE;ALL,PAPER,-,-,-,-,-,-	1	SNA
.2		BN69-05418N	WRAP;T0.017,750,2000000,2000000,750	0	SNA
.2		BN69-06640E	PAD-PACKING;TRUCK PAD,CB,-,W410,L2500,,	1	SNA
.2		BN69-06641A	PAD-DP SHEET;PAD,CB,SW4,,W1130,L1060,,,	1	SNA
.2		BN69-10434Y	PALLET-DP WOODEN;48" H8000,WOOD,-,W1120,	1	SNA
.2		BN69-15964A	CUSHION-SET;40MU6100,EPS,16.7g/l,WHT,W/W	1	SNA
...3		0103-005099	RESIN EPS;BASF303,Natural,Natural	472	SNA
1	ACCE1	BN92-21859K	ASSY ACCESSORY;UMU6100N,40	1	SNA
.2	ACCE4	BN96-43186E	ASSY ACCESSORY-MANUAL;UE65MU6105KXXC	1	SNA
...3		6902-001964	BAG PE;LDPE,BIOBASED,T0.03,W200,L300,TRP	1	SNA
...3		BN68-00514K	LEAFLET-WARRANTY;comm,Samsung,W.Europe,W	1	SNA
...3		BN68-04972E	LEAFLET-REGULATORY GUIDE;ALL,SAMSUNG,W/W	1	SNA
...3		BN68-07598A	LEAFLET-FICHE;ALL,W/P,0	1	SNA
...3		BN68-08446B	MANUAL USERS;MU6100,XC,W/P,EURO B5	1	SNA
.2	ACCE2	BN96-43187A	ASSY ACCESSORY-CABLE;UE65MU6100KXZT	1	SNA
...3		3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
...3	T0268	3903-001118	CBF-POWER CORD;DT,EU,Angle,2P(C7),250V,2	1	SA
...3		4301-000101	BATTERY-ALKALINE;1.5V,1650mAH,LR6,14.5x5	2	SNA
...3	EC03	BN39-02189A	GENDER CABLE;DC to RCA Cable,3P,L100,UL2	1	SA
...3	EC03	BN39-02190A	GENDER CABLE;DC to RCA Cable,2P,L100,UL2	1	SA
...3		BN59-01266A	REMOCON-SMART CONTROL;2017 TV,Samsung,14	1	SA
...3	T0527	BN68-00513A	LABEL-E PASS;ALL MODEL,WW,YUPO,W50,L15,W	2	SNA
...3		BN68-08112A	LABEL-SECURITY;ALL,PET,T0.05,W55,L52,GLO	1	SNA
...3		BN68-08448E	LEAFLET-ACCESSORY KIT;MU6,EUROPE,W/P,W20	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3		BN69-13918A	BAG ACCESSORY;LDPE,T0.07,L350,W500,TRP,B	1	SNA
1		BN92-21875B	ASSY LABEL;UMU6100N,40	1	SNA
.2		0203-001598	TAPE-SINGLE FACE;FILAMENT,#8915,T0.15,W1	0	SNA
.2		BN68-06708G	LABEL-RATING;Monitor,WW,PP,T0.161,W93,L7	1	SNA
.2		BN68-07519B	LABEL-ENERGY;ALL JORDAN,WW,PP,T0.135,W60	1	SNA
.2		BN68-08455B	LEAFLET-QUICK SETUP GUIDE;MU6100,W/W,W/P	1	SNA
1		BN92-22124A	ASSY LABEL POP;UMU6100N	1	SNA
.2		BN68-08547E	LABEL POP-HIGHLIGHT;55MU6100,PET,T0.188,	1	SNA
1		BN95-02634D	PRODUCT LCD-SDC;CY-GK040HGLV4V/H,KU6000,	1	SA
.2	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	4	SA
.2		BN68-05722A	LABEL-E PASS;POLYPROPYLENE,NON-COATING	1	SNA
.2		BN90-08253A	ASSY BACK LIGHT UNIT;Y16,LCM	1	SNA
..3		BN02-00102B	TAPE-SINGLE FACE;FILAMENT,#8917,T0.15,W2	0	SNA
..3		BN61-11748A	DIFFUSER PLATE;15Y_J6.3K 40INCH_DIFFUSER	1	SNA
..3		BN61-13362A	FRAME-MIDDLE TOP;40KU6300,TPV,HB,BK0008,	1	SNA
..3		BN61-13370A	FRAME-MIDDLE BOTTOM;40KU6300,TPV,HB,BK00	1	SNA
..3		BN61-13378A	FRAME-MIDDLE LEFT RIGHT;40KU6300,TPV,HB,	2	SNA
..3		BN61-13692A	OPTICAL SHEET-MLS;Y16_KU6000_40inch_PTD8	1	SNA
..3		BN63-13498A	OPTICAL SHEET-REFLECTOR;15Y JU7.0K 40inc	1	SNA
..3		BN63-14671A	OPTICAL SHEET-COMPLEX;15Y JU6.0K 40inch	1	SNA
..3		BN96-34791A	ASSY LED BAR P;40" UHD_L_SDC,CEM3,view	5	SA
..3		BN96-34792A	ASSY LED BAR P;40" UHD_R_SDC,CEM3,view	5	SA
..3		BN96-35397Q	ASSY CHASSIS REAR P;40KU6300,EGI-SECC,AG	1	SNA
...4		0203-006897	TAPE-DOUBLE FACE;Si,T1,W10,L50,WHITE	1	SNA
...4	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	1	SA
...4		BN02-00040C	TAPE DOUBLE FACE;F-LED ALL,PET,T0.3,W3,L	2	SNA
...4		BN02-00102B	TAPE-SINGLE FACE;FILAMENT,#8917,T0.15,W2	0	SNA
...4		BN02-00173C	TAPE-SINGLE FACE;PET,T0.05,W40,BLACK	0	SNA
...4		BN02-00352E	TAPE-SINGLE FACE;PET,T0.05,W15,L50M,BLAC	0	SNA
...4		BN61-09771A	HOLDER-SCREW;Y13 OLED CURVED 55",SWRCH18	1	SNA
...4		BN61-11435A	FRAME-CHASSIS REAR TOP;Y15 JU7K 40",PC+G	1	SNA
...4		BN61-11475A	FRAME-CHASSIS REAR BOTTOM;Y15 JU7K 40",P	1	SNA
...4		BN61-11476A	FRAME-CHASSIS REAR LEFT RIGHT;Y15 JU7K 4	2	SNA
...4		BN61-11477A	HOLDER-SOURCE PCB;Y15 JU7K SDC,ABS,MOLD,	4	SNA
....5		0103-004628	RESIN HIPS;HF-1690H,K2901,BK0020,1.5mm H	4	SNA
...4		BN61-11508A	SUPPORT-PLATE;Y15 LED,PC,V-2,CLEAR,OD-19	8	SNA
...4		BN62-00690E	INSULATOR-SMPS;40JU7000,PC,BLACK,L226.6,	1	SNA
...4		BN63-14955A	GASKET-EMI;GASKET,FABRIC,T8,W13,L20,BLAC	2	SNA
...4		BN63-14962A	GASKET-EMI;GASKET,FABRIC,T8,W15,L5,BLACK	2	SNA
...4	CC04	BN64-02881F	CHASSIS-REAR;40KU6000,EGI-SECC,T0.45,NAT	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5	CB20	BN61-11982B	BRACKET-WALL;55KS7000,CR-SPCC,EXTRUSION,	4	SNA
...4	RF01	BN67-00474B	FOOT-RUBBER;PE400,Si,GRAY,W8,L30,T5	2	SNA
...4	T0527	BN68-00513A	LABEL-E PASS;ALL MODEL,WW,YUPO,W50,L15,W	1	SNA
...4		BN96-34707A	ASSY PCB P-LED INTERFACE BOARD;40JU6400,	1	SNA
.2		BN96-35015B	ASSY COVER P-SOURCE PCB;40KU6000,EGI-SEC	1	SNA
...3		BN62-00537E	INSULATOR-SOURCE PCB COVER RIGHT;Y15 JU7	1	SNA
...3		BN62-00537F	INSULATOR-SOURCE PCB COVER LEFT;Y15 JU7K	1	SNA
...3		BN63-13239B	COVER-SOURCE PCB;40KU6000,EGI-SECC,T0.6,	1	SNA
.2		BN96-35593F	ASSY CHASSIS FRONT P;40KU6000,PC+ABS+MF1	1	SA
...3		BN02-00381A	TAPE SINGLE FACE;Y15 UHD Flat 40",CONDUCT	2	SNA
...3		BN02-00381B	TAPE SINGLE FACE;Y15 UHD Flat 40",CONDUCT	2	SNA
...3		BN60-00715A	SPACER-CONDUCTIVE;Y13 Slim F-LED,CONDUCT	2	SNA
...3		BN60-01115A	SPACER-CONDUCTIVE;Y15 JU8K,CONDUCTIVE FA	4	SNA
...3	FD01	BN63-13304C	COVER-DECORATION;JU5900_40,PC+ABS+MF17%,	1	SNA
...3	AS080	BN63-14373D	SHEET-AL;LED_JU7000,AL,T0.068,W30,L10000	3	SNA
...3	AC157	BN64-02893A	CHASSIS-FRONT;JU6400_40,PC+ABS+MF15%,T1.	1	SNA
.2		BN96-39233A	ASSY OPEN CELL;SDC,40Inch,Y16 New Model(	1	SNA
...3		BN81-12946A	A/S-ADHESIVE ACF;ADHESIVE ACF,0201-00232	1	SNA
...3		BN81-12952A	A/S-ADHESIVE SIL;ADHESIVE SIL,0201-00237	1	SNA
...3		BN81-12960A	A/S-IC DRIVER SOURCE;IC DRIVER SOURCE,LJ	1	SNA
...3		BN81-13042A	A/S-POLARIZER CF;POLARIZER CF,LJ01-10786	1	SNA
...3		BN81-13043A	A/S-POLARIZER TFT;POLARIZER TFT,LJ01-107	1	SNA
...3		BN81-13044A	A/S-SOURCE PCB LEFT;SOURCE PCB LEFT,LJ94	1	SNA
...3		BN81-13045A	A/S-SOURCE PCB RIGHT;SOURCE PCB RIGHT,LJ	1	SNA