


1. Exploded View & Part List

Exploded View

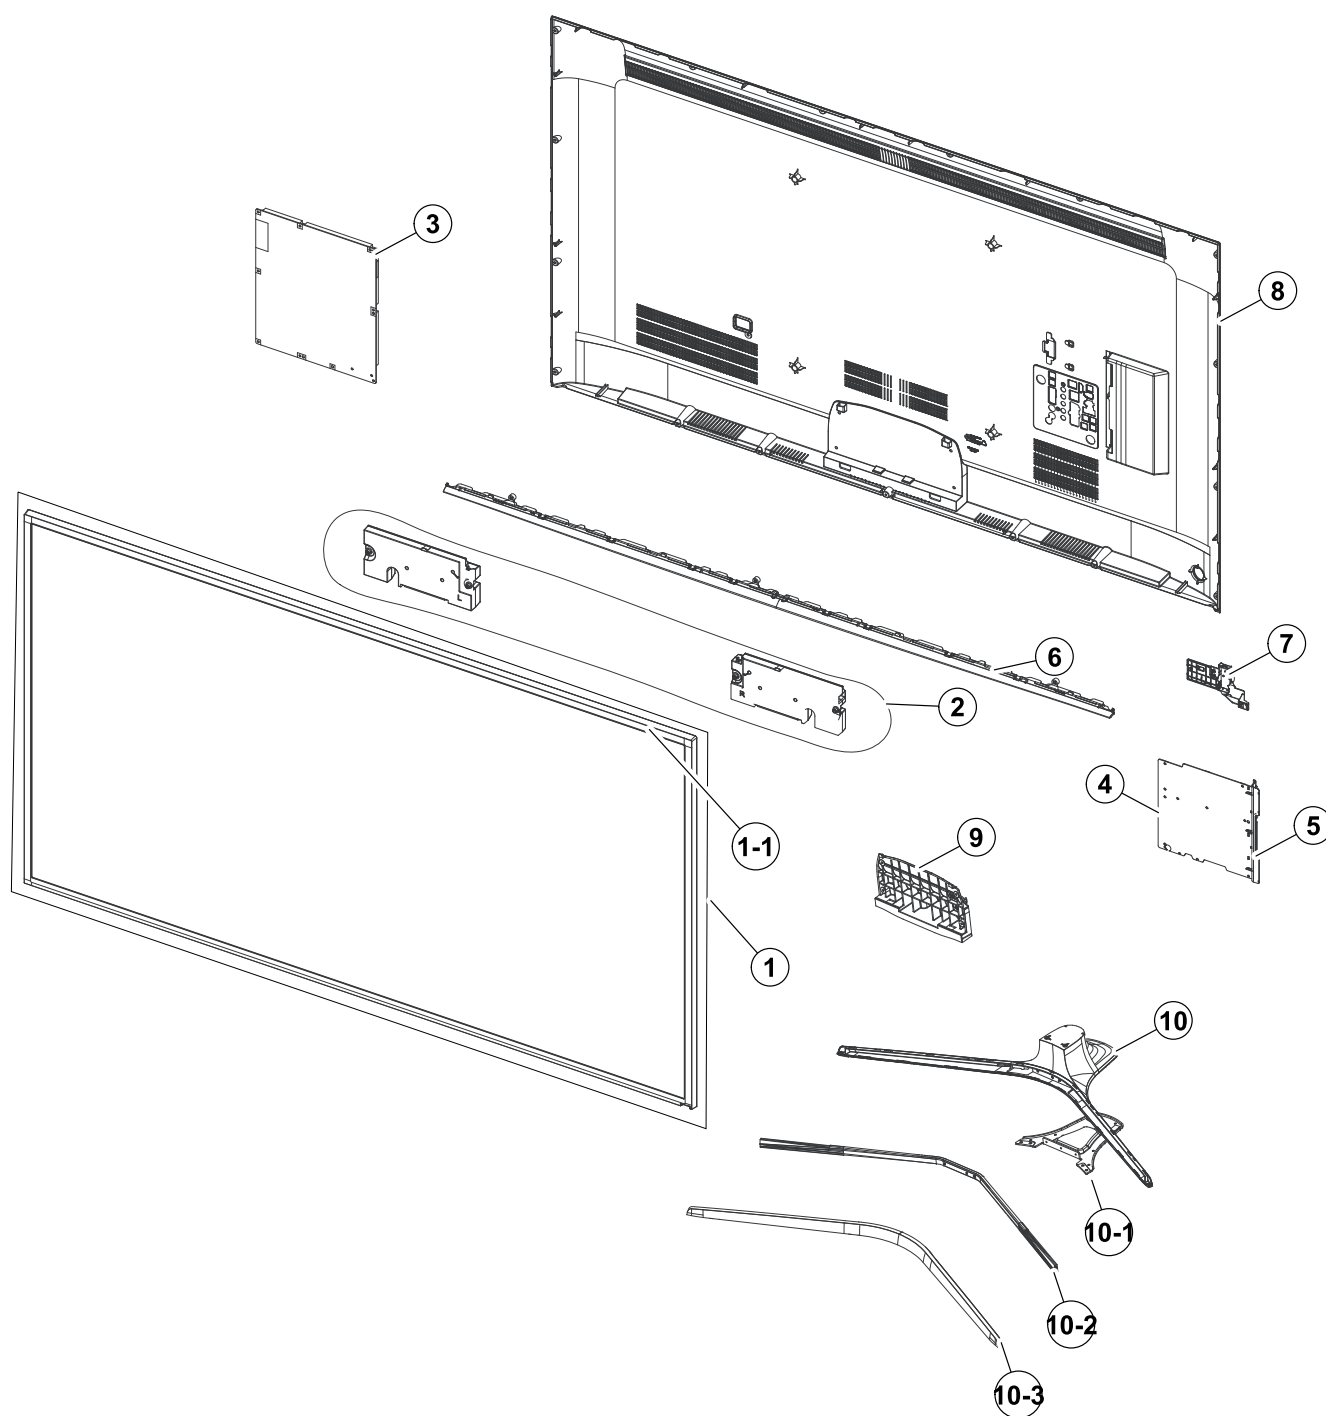

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-01333A	PRODUCT LCD-SHARP; LQ600D3HD6K,CY-HH060CS	SA	1
1-1	3	TC01A	BN96-30743B	ASSY CHASSIS TOP P; 60H6300,PC+ABS+G/F15%	SC	1
2	2	SP01A	BN96-30334M	ASSY SPEAKER P; 6ohm,4pin,10W,J5500 60inc	SA	1
3	2	P001A	BN44-00705C	DC VSS-LED TV PD BD; L60S1_FSM,L60S1_FSM,	SA	1
4	2	M0014	BN94-09095H	ASSY PCB MAIN; LED_J6K	SA	1
5	3		BN61-08813A	HOLDER-SIDE AV; UF6100, 55,HIPS,BK0020,HB	SNA	1
6	2	CD01A	BN95-01460A	ASSY DECORATION SMT; 6000,60,LIGHT TITAN	SA	1
7	2	FB01A	BN96-30902D	ASSY BOARD P-FUNCTION ASSY; UH6500,Functi	SA	1
8	2	R001A	BN96-37179F	ASSY COVER P-REAR; J6200 60",BN63-14352D,	SA	1
9	2	SG01A	BN96-37933A	ASSY GUIDE P-STAND; 15Y J6200 60",BN61-12	SA	1
10	4		BN63-14511A	COVER-STAND BASE; 15Y J6200 60",PC+ABS+GF	SNA	1
10-1	4		BN61-12727A	BRACKET-STAND BASE; 15Y J6200 60",HGI,T3.	SNA	1
10-2	4		BN61-12728A	BRACKET-STAND BAR; 15Y J6200 60",HGI,T1.9	SNA	1
10-3	3		BN95-02371B	ASSY COVER STAND SMT; J6200,60,LIGHT TITA	SNA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE60J6200AWXXH (MS01)		
1		BN90-06520F	ASSY W/I;LED_J6K	1	SNA
.2		BN81-08159Z	PART SET-ELEC W/I;UF**,UH**,UG**,ELEC	1	SNA
.2		BN81-11260P	A/S PART SET-MECH W/I;UJ6L,U60JL*	1	SNA
1	S001A	BN90-06595L	ASSY STAND;LED_J6K	1	SNA
.2	SG01A	BN96-37933A	ASSY GUIDE P-STAND;15Y J6200 60",BN61-12	1	SA
..3		0203-001499	TAPE-OPP;T0.04,W15,,TRP	0	SNA
..3	SG03	BN61-12796A	GUIDE-STAND;15Y J6200 60",PC+GF20%	1	SNA
..4		0103-007285	RESIN PC;HF3200H,K21294,BK0007,V2	1.5mm	440
..3		BN68-05603A	LABEL-E,PASS;ALL MODEL,ART PAPER 90G,60,	1	SNA
..3		BN96-18013Q	ASSY ACCESSORY-SCREW;6003-001807,4EA,ZPC	1	SNA
...4	SCREW	6003-001807	SCREW-TAPTYPE;BH,S,M4,L10,ZPC(BLK),SWRCH	4	SA
...4		BN69-08203G	BAG SCREW;LDPE,0.05,70,90,TRP,Vinyl pack	1	SNA
..3		BN96-32380B	ASSY ACCESSORY-SCREW;BN69-10588A,BN61-09	1	SNA
...4	HOLDER	BN61-09494D	HOLDER-BOLT;BH+,SWRCH18A,L14,M4,B TYPE	4	SA
...4		BN69-10588A	BAG SCREW;LDPE,0.05,70,90,TRP,LED TV,LDP	1	SNA
.2	SB04A	BN96-37971A	ASSY STAND P-BASE;Y15 J6200 60",BN63-145	1	SA
..3	SCREW	6003-001001	SCREW-TAPTYPE;FH,+,-,B,M3,L8,ZPC(BLK),SW	2	SA
..3	AS080	BN63-04755H	SHEET-COVER;52LC530,PE,T0.05,W275mm,200M	1	SNA
..3	AS080	BN63-04755L	SHEET-COVER;22LC350,PE,T0.05,W130mm,200M	1	SNA
..3		BN67-00398P	RUBBER-FOOT;RUBBER,SILICONE,15.5*8,2.5,G	2	SNA
..3		BN95-02371B	ASSY COVER STAND SMT;J6200,60,LIGHT TITA	1	SNA
...4		0204-006861	COATING;SMT-L100,CLEAR,0.928	4	SNA
...4		BN01-00160A	TARGET-CHROMIUM-CY;Chromium target,99.95	1	SNA
...4		BN01-00161A	TARGET-CHROMIUM-PL;chromium target,over	1	SNA
...4		BN63-14512A	COVER-DECORATION STAND;15Y J6200 60",ABS	1	SNA
....5		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	85	SNA
..3		BN96-38154A	ASSY STAND P-BASE SEMI;J6200 60",BN96-37	1	SNA
...4	SCREW	6003-001119	SCREW-TAPTYPE;FH,+,S,M4,L10,ZPC(BLK),SWR	10	SA
...4	SCREW	6003-001355	SCREW-TAPTYPE;BH,+,S,M4,L20,ZPC(BLK),SWR	2	SNA
...4		BN61-12727A	BRACKET-STAND BASE;15Y J6200 60",HGI,T3.	1	SNA
...4		BN61-12728A	BRACKET-STAND BAR;15Y J6200 60",HGI,T1.9	1	SNA
...4		BN63-14511A	COVER-STAND BASE;15Y J6200 60",PC+ABS+GF	1	SNA
...4		BN67-00398P	RUBBER-FOOT;RUBBER,SILICONE,15.5*8,2.5,G	3	SNA
...4		BN68-05603A	LABEL-E,PASS;ALL MODEL,ART PAPER 90G,60,	1	SNA
1	R001A	BN90-07354C	ASSY COVER REAR;LED_J6K	1	SNA
.2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	19	SA
.2	R001A	BN96-37179F	ASSY COVER P-REAR;J6200 60",BN63-14352D,	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3	R001	BN63-14352D	COVER-REAR;J6200 60",ABS+PC,V1,BLK,EU MA	1	SNA
...4		0103-010488	RESIN PC ABS;NH-1055 K21441,Black,BK0008	3900	SNA
...3	T0071	BN64-02886T	INLAY-TERMINAL;J6200,PS,T0.3,128.4,131.6	1	SNA
...3		BN68-03518F	LABEL-STICKER-CI SLOT;WW,ALL,PET,0.1,134	1	SNA
...3		BN68-07096Q	LABEL-TERMINAL SIDE;J6200,PET,0.03,14.7,	1	SNA
1		BN91-12105B	ASSY LCM-SHARP;BN95-01333A,CY-HH060CSSV1	1	SNA
.2	PANEL	BN95-01333A	PRODUCT LCD-SHARP;LQ600D3HD6K,CY-HH060CS	1	SA
...3	SCREW	6001-002756	SCREW-MACHINE;BH,+,M3,L6,ZPC(WHT),SWRCH1	6	SA
...3	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	2	SA
...3		BN02-00114A	TAPE ETC-COF;NNB 55",PET,0.07T,20,12,GRE	8	SNA
...3		BN62-00507C	INSULATION-SOURCE PCB L;Y14 VNB 60",PC,0	1	SNA
...3		BN62-00507D	INSULATION-SOURCE PCB R;Y14 VNB 60",PC,0	1	SNA
...3		BN68-05722A	LABEL-STICKER;ALL MODEL,POLYPROPYLENE,0.	1	SNA
...3		BN74-00053E	TAPE-PAPER;PAPER,3M2307,0.14T,W20,50m,WH	4	SNA
...3		BN90-05216A	ASSY MISC-BLU;H6400 60",CY-HH060CSSV	1	SNA
...4		BN02-00152H	TAPE ETC-SHEET FIXING;Y13 Slim F-LED,PET	3	SNA
...4		BN61-10113A	SUPPORT-PLATE;Y14 F-LED,PC,V2,WHT/CLEAR,	24	SNA
...4		BN61-10235A	LGP-DIFFUSERS PLATE;60inch Diffuser Plat	1	SNA
...4		BN63-11823A	SHEET-COMPLEX;Y14 60inch NNB TMOP-4R,PET	1	SNA
...4		BN63-12906A	SHEET-REFLECTOR;Y14 60inch VNB SY95S,PET	1	SNA
...4		BN96-30649A	ASSY FRAME P-MOLD MIDDLE(U);H6400 60",PC	1	SNA
....5		BN61-10085A	FRAME-MOLD MIDDLE UD;Y14 F-LED 60" (5.5K	1	SNA
...4		BN96-30650A	ASSY FRAME P-MOLD MIDDLE(D);H6400 60",PC	1	SNA
....5		BN60-00744A	SPACER-RUBBER;Y13 F-LED SLIM,SH-0140U+AT	1	SNA
....5		BN60-00822B	SPACER-PANEL (UD);Y14 SF-LED 60,SI,L668.	2	SNA
....5		BN61-10182A	FRAME-MOLD MIDDLE(D);Y14 F-LED 60" (5.5K	1	SNA
...4		BN96-30651A	ASSY FRAME P-MOLD MIDDLE(LR);H6400 60",P	2	SNA
....5		BN60-00823B	SPACER-PANEL (LR);Y14 SF-LED 60,SI,L750,	2	SNA
....5		BN61-10086A	FRAME-MOLD MIDDLE LR;Y14 F-LED 60" (5.5K	2	SNA
...4		BN96-38060A	ASSY CHASSIS BOTTOM P;Y14 F-LED 60",EGI-	1	SNA
....5		0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	3	SNA
....5		BN96-30433A	ASSY LED BAR P;60inch FHD Dire,FCpkg,8ea	7	SA
....5		BN96-30434A	ASSY LED BAR P;60inch FHD Dire,FCpkg,5ea	7	SA
....5		BN96-30652C	ASSY CHASSIS BOTTOM P;H6400 60,EGI-SECC	1	SNA
....6	M0909	AA63-01387A	GASKET-EMI,SPONGE;SP-P300M,Conductive Fa	2	SNA
....6	M0909	AA63-01388A	GASKET-EMI,SPONGE;SP-P300M,Conductive Fa	3	SA
....6		BN02-00040C	TAPE DOUBLE FACE-D-PLATE;F-LED ALL,MKT50	2	SNA
....6		BN02-00105A	TAPE ETC-CONNER;SNB,PET+D263-100H,0.05,8	6	SNA
....6		BN61-10207A	HOLDER-WALL RIVET;Y14 F-LED 32",SWRCH10A	4	SNA
....6		BN62-00501F	INSULATION-PD BOARD;Y14 VNB 60_65,PC,0.4	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....6	CC02	BN64-02521A	CHASSIS-BOTTOM;Y14 F-LED 60" (VNB),EGI-S	1	SNA
.....7		BN01-00191A	STEEL;EGI-SECC AG,1.000mm,830mm,SECC,AG	9	SNA
....6		BN74-00053J	TAPE PAPER-PROTECTION;- ,3M2307,PAPER,-,0	2	SNA
....6		BN96-30421A	ASSY BOARD P-LED INTERFACE B'D;60inch FH	1	SNA
..3	TCON	BN95-01336A	ASSY T CON;LQ600D3HD6K,Sharp 60F120Hz	1	SA
...4		BN62-00487A	HEAT SINK-ES;F6K,A6063,BLACK,18*14*4.4,t	1	SNA
...4		BN62-00573A	HEAT SINK-PS;F7000,A1050,BLACK,108*65.3*	1	SNA
...4		BN97-07994A	ASSY SMD;BN95-01336A	1	SNA
....5		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,20-38um,S	1	SNA
....5		0404-001307	DIODE-SCHOTTKY;SSC54,40V,5000mA,DO-214AB	2	SA
....5		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	2	SA
....5		0404-001643	DIODE-SCHOTTKY;B360A,60V,3000mA,SMA,TP	1	SA
....5		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	2	SA
....5		0406-001438	DIODE-TVS;SMCJ14A,15.6/-17.2V,1500W,DO-	1	SA
....5		0406-001445	DIODE-TVS;RClamp7512N,2.7/2.8/2.9,300W,S	2	SA
....5		0501-000465	TR-SMALL SIGNAL;MMBT3904,NPN,350mW,SOT-2	2	SA
....5		0502-001331	TR-POWER;NSS30100LT1G,PNP,310mW,SOT-23,T	1	SA
....5		0502-001346	TR-POWER;FCX591A,PNP,1000mW,SOT89,TR,30/	1	SA
....5		0502-001360	TR-POWER;STC405D,NPN,15000mW,TO-252	1	SA
....5		0505-000274	FET-SILICON;AO4435L,P,-30V,-11A,0.014ohm	5	SNA
....5		0505-002645	FET-SILICON;AOD4184A,N,40V,50A,0.007ohm,	1	SA
....5		0505-002790	FET-SILICON;ZXMP6A17G,P,-60V,-4.3A,0.190	1	SA
....5		0505-002925	FET-SILICON;AO4438,N,60V,8.2A,3.1W,SOT-8	1	SA
....5		0505-002937	FET-SILICON;AO4854L,DUAL N,30V,8A,2W,SOT	1	SA
....5	EL02	0601-002037	LED;SMD(TOP VIEW),BLUE,1.6x0.8mm,465/470	3	SA
....5		1003-002412	IC-LEVEL DRIVER;MAX17079GTL+,TR,40P,6x6x	1	SA
....5		1105-002274	IC-DDR3 SDRAM;K4B1G1646G-BCMA,DDR3 1866,	1	SNA
....5		1201-002980	IC-OP AMP;MAX9650ATA+,TDFN-EP,TP,8P,3*3m	4	SA
....5		1203-007552	IC-DC/DC CONVERTER;TPS56921PWPR,HTSSOP,2	1	SA
....5		1203-007608	IC-DC/DC CONVERTER;ISL24827,QFN,48Z30,7x	1	SA
....5		1203-008045	IC-DC/DC CONVERTER;SN1304025RHBR,QFN,32P	1	SNA
....5		1204-003485	IC-VIDEO PROCESS;SDP1316,HSFCBGA,888P,27	1	SA
....5		1205-004222	IC-MULTIPLIER;THV3056,64P,9x9x0.9mm,PLAS	1	SA
....5	IS01	1209-002183	IC-SENSOR;S-5851AAA-M6T1U,SOT,6Z30,2.9x1	1	SA
....5		1405-001381	VARIATOR;11V,8Vdc,30A,1.6x0.8mm,TP,25V,5	3	SA
....5		2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	2	SC
....5		2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	7	SA
....5		2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	2	SNA
....5		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA
....5		2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	1	SA
....5		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	9	SNA
....5		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	7	SNA
....5		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	7	SA
....5		2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	2	SA
....5		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	SNA
....5		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	69	SNA
....5		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	2	SNA
....5		2007-000231	R-CHIP;1.3Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000256	R-CHIP;1.6Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000336	R-CHIP;120Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000491	R-CHIP;2.2Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000614	R-CHIP;24Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-000726	R-CHIP;300ohm,1%,1/10W,TP,1608	1	SA
....5		2007-000736	R-CHIP;30Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000744	R-CHIP;30ohm,5%,1/10W,TP,1608	1	SA
....5		2007-000772	R-CHIP;33Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000779	R-CHIP;33ohm,1%,1/10W,TP,1608	1	SA
....5		2007-000857	R-CHIP;4.3Kohm,1%,1/10W,TP,1608	2	SNA
....5		2007-000910	R-CHIP;43Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-001038	R-CHIP;56Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-001090	R-CHIP;620ohm,1%,1/10W,TP,1608	1	SA
....5		2007-001096	R-CHIP;62Kohm,1%,1/10W,TP,1608	2	SNA
....5		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-001206	R-CHIP;82Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-001237	R-CHIP;910ohm,1%,1/10W,TP,1608	1	SA
....5		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	8	SNA
....5		2007-001433	R-CHIP;12Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	4	SNA
....5		2007-002768	R-CHIP;6.2Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	4	SNA
....5		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007134	R-CHIP;39Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	1	SNA
....5		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	14	SNA
....5		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	6	SNA
....5		2007-007229	R-CHIP;360ohm,1%,1/10W,TP,1608	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		2007-007239	R-CHIP;31.6Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	6	SNA
....5		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,0.35T	1	SA
....5		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005	2	SA
....5		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007315	R-CHIP;3.9Kohm,1%,1/16W,TP,1005	2	SNA
....5		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	4	SNA
....5		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	5	SNA
....5		2007-007431	R-CHIP;91Kohm,1%,1/10W,TP,1608	3	SA
....5		2007-007455	R-CHIP;24.9Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-007463	R-CHIP;1.1Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	3	SNA
....5		2007-007590	R-CHIP;82Kohm,1%,1/16W,TP,1005	1	SNA
....5		2007-007627	R-CHIP;16Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007651	R-CHIP;9.1Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-007721	R-CHIP;560ohm,1%,1/10W,TP,1608	1	SA
....5		2007-007723	R-CHIP;75Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	5	SNA
....5		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	1	SA
....5		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	2	SNA
....5		2007-007981	R-CHIP;180Kohm,1%,1/16W,TP,1005	1	SNA
....5		2007-008137	R-CHIP;24Kohm,1%,1/16W,TP,1005	1	SNA
....5		2007-008167	R-CHIP;120Kohm,1%,1/16W,TP,1005	2	SC
....5		2007-008263	R-CHIP;3Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005	1	SA
....5		2007-008714	R-CHIP;0.01ohm,1%,1W,TP,6432	2	SA
....5		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	14	SNA
....5		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	3	SA
....5		2011-001427	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,2.0	3	SA
....5	AD480	2203-000311	C-CER,CHIP;0.12nF,5%,50V,C0G,TP,1005	1	SA
....5	AD480	2203-000332	C-CER,CHIP;0.012nF,5%,50V,C0G,TP,1608	2	SA
....5	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	1	SNA
....5	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	2	SA
....5	AD480	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	SNA
....5	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	1	SA
....5	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	3	SNA
....5	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	3	SA
....5	AD480	2203-000888	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1608	1	SA
....5	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	4	SA
....5	AD480	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,TP,1005	1	SA
....5	AD480	2203-001587	C-CER,CHIP;18nF,10%,50V,X7R,1608	1	SA
....5	AD480	2203-002050	C-CER,CHIP;47nF,10%,50V,X7R,TP,1608	3	SA
....5	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	8	SNA
....5	AD480	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,TP,1608	2	SNA
....5	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	15	SA
....5	AD480	2203-002720	C-CER,CHIP;10nF,10%,25V,X7R,TP,1005,0.5T	2	SNA
....5	AD480	2203-002982	C-CER,CHIP;6.8nF,10%,50V,X7R,TP,1005	1	SA
....5	AD480	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,TP,1005	3	SA
....5	AD480	2203-005221	C-CER,CHIP;15nF,10%,50V,X7R,TP,1608	1	SNA
....5	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	6	SNA
....5	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	8	SNA
....5	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	7	SA
....5	AD480	2203-006090	C-CER,CHIP;10000nF,10%,6.3V,X5R,TP,2012	2	SA
....5	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	95	SNA
....5	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	6	SA
....5	AD480	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	2	SC
....5	AD480	2203-006377	C-CER,CHIP;4700nF,10%,25V,X5R,TP,2012	2	SNA
....5	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	12	SA
....5	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	9	SNA
....5	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,0.	9	SNA
....5	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	1	SNA
....5	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	4	SNA
....5	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	3	SNA
....5	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608(	4	SA
....5	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	20	SNA
....5	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	45	SNA
....5	AD480	2203-007425	C-CER,CHIP;2200nF,10%,25V,X5R,TP,1608,0.	2	SNA
....5	AD480	2203-007486	C-CER,CHIP;1000nF,10%,50V,X5R,TP,1608	1	SNA
....5	AD480	2203-007600	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608	1	SA
....5	AD480	2203-008096	C-CER,CHIP;2200nF,10%,50V,X5R,TP,2012,1.	1	SA
....5	AD480	2203-008315	C-CER,CHIP;22000nF,20%,25V,X5R,TP,2012,1	4	SA
....5	AD480	2203-008412	C-CER,CHIP;4700nF,10%,50V,X5R,TP,2012,1.	3	SNA
....5		2409-001118	C-POLYMER ,CHIP;47uF,20%,10V,WT,TP,3.5X2	1	SA
....5		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	1	SA
....5		2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	1	SA
....5		2703-003803	INDUCTOR-SMD;4.7uH,20%,6060,0.031ohm,270	1	SA
....5		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	1	SA
....5		2703-003937	INDUCTOR-SMD;1uH,20%,7.0x6.47x3.0mm,0.00	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		2703-004847	INDUCTOR-SMD;4.7uH,20%,3838,1.8T,0.075Oh	4	SA
....5		2801-005324	CRYSTAL-SMD;27MHz,30ppm,Ceramic SMD(4pin	1	SA
....5		2901-001362	FILTER-EMI/ESD;5.5V,0A,50pF,2.05x1.25x0.	3	SNA
....5		3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz	2	SA
....5		3301-002039	BEAD-SMD;26ohm,1608,TP	17	SA
....5		3601-001402	FUSE-SURFACE MOUNT;125V,7A,FAST ACTING,C	1	SNA
....5		3708-003043	CONNECTOR-FPC/FFC/PIC;80P,0.5mm,SMD-A+DI	2	SA
....5		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
....5	EH01	3711-005601	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,SMD-	1	SA
....5		6302-001290	GASKET;SMR-TS-4-4.5-3,4.0mm,Ni+Au+SUS+Mg	4	SNA
....5		BN41-02132A	PCB-T CON;2014 SHARP FHD 120Hz,FR-4,4,1.	1	SNA
....5		BN97-08171A	ASSY MICOM;H60H1F005_5517_140217,2014.02	1	SNA
.....6		1107-002224	IC-FLASH MEM. MODULE;W25X40CLSSIG,4Mbit,	1	SNA
..3	OC	BN96-30084A	ASSY OPEN CELL;LQ600D3HD6K,1920*1080,60"	1	SA
...4		BN81-08338A	AS-DRIVER IC;DRIVER IC,S6C277G3,miniLVDS	1	SNA
...4		BN81-08339A	AS-GATE IC;GATE IC,LH16E001,272ch, 2pf,	1	SNA
...4		BN81-09554A	AS-SOURCE PCB;SOURCE PCB,RUNTK5530TPZZ,F	1	SNA
...4		BN81-09555A	AS-SOURCE PCB;SOURCE PCB,RUNTK5531TPZZ,F	1	SNA
...4		BN81-09556A	AS-SOURCE PCB;SOURCE PCB,RUNTK5532TPZZ,F	1	SNA
...4		BN81-09557A	AS-SOURCE PCB;SOURCE PCB,RUNTK5533TPZZ,F	1	SNA
...4		BN81-09559A	AS-POL-C/F;POLARIZER-C/F,PFILV1868TPXZ,A	1	SNA
...4		BN81-09560A	AS-POL-TFT;POLARIZER-TFT,PFILV1869TPXZ,P	1	SNA
..3	TC01A	BN96-30743B	ASSY CHASSIS TOP P;60H6300,PC+ABS+G/F15%	1	SC
...4		BN60-00715A	SPACER-TOP,CORNER;Y13 Slim F-LED,GASKET*	2	SNA
...4		BN60-00930N	SPACER-TOP(UD);Y14 NNB 60",GASKET+PET,L1	2	SNA
...4		BN60-00930P	SPACER-TOP(LR);Y14 NNB 60",GASKET+PET,L7	2	SNA
...4		BN60-00983B	SPACER-GASKET;Y13 SF-LED,GASKET(FG200A),	3	SNA
...4	AS080	BN63-07556X	SHEET-COVER;F-LED 3D VE,PO-SHEET,T0.068,	3	SNA
...4	AS080	BN63-07556Z	SHEET-COVER;Y13 SF-LED,PO-SHEET,T0.068,W	1	SNA
...4	AS080	BN63-10945C	SHEET-COVER;Y13 SF-LED,PO-SHEET,T0.068,W	1	SNA
...4	FW04	BN64-02480A	WINDOW-RMC;UH5500 40",PC,V2,Violet, T25%	1	SNA
...4	AC157	BN64-02498A	CHASSIS-TOP;Y14 F-LED 60" (5.5K-6K),PC+A	1	SNA
..3	OC-TC	BN96-30783B	ASSY CABLE P-FFC;H6000,FFC,NH,57mm 1,80	2	SNA
..3	SB05A	BN96-31500A	ASSY BRACKET P-STAND LINK;UH6300,6400,EG	2	SNA
...4		BN61-02932L	BRACKET-STOPPER NUT;LED TV,M3,D5.5,L7.5,	2	SNA
...4	CB18	BN61-10361A	BRACKET-STAND LINK;UH6K,EGI-SECC,T2.0	2	SNA
1	M0017	BN91-14365Q	ASSY CHASSIS;LED_J6K	1	SNA
.2	M0014	BN94-09095H	ASSY PCB MAIN;LED_J6K	1	SA
..3		BN61-08813A	HOLDER-SIDE AV;UF6100, 55,HIPS,BK0020,HB	1	SNA
...4		0103-004628	RESIN HIPS;HF-1690H,K2901,BK0020,1.5mm H	13	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3	AH020	BN62-00724A	HEAT SINK;AL,1.5T,83.48mm,71.92mm,BLACK,	1	SNA
...3	AH020	BN62-00725A	HEAT SINK;AL,2T,73mm,60mm,BLACK,TAPE	1	SNA
...3		BN97-09470B	ASSY DRM;MAC, MIRACAST HDCP	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00110P	KEY CODE-CERTIFI;MIRACAST(HDCP2.2), TV	1	SNA
...4		BN46-00115P	KEY CODE;CI+, TV, HAWK, EU	1	SNA
...3		BN97-10051V	ASSY SMD;LED_J6K	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,20-38um,S	4	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	3	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	8	SA
...4		0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	3	SA
...4		0406-001628	DIODE-TVS;AOZ8804ADI,6/-V,150W,SLP2510	1	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V, 6.7V, 7V,200W,SM	7	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	3	SC
...4		0505-002560	FET-SILICON;AO6415,P,-20V,-3.3A,0.15ohm,	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,-30V,-5A,2W,SOIC-	1	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,380mA,1.19ohm,	2	SA
...4		0505-003507	FET-SILICON;AO3424,N,30V,3.8A,1.4W,SOT-2	4	SA
...4		0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	2	SA
...4		1001-001872	IC-ANALOG SWITCH;NLAS2750MUTAG,Dual SPDT	1	SA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA
...4		1105-002528	IC-DDR3 SDRAM;K4B4G1646D-BCMA,DDR3 1866,	3	SA
...4		1201-003891	IC-AUDIO AMP;NTP7415,MLF,48P,7x7mm,DUAL,	1	SA
...4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
...4		1203-006330	IC-POWER SUPERVISOR;TPS2065DBV,SOT-23,5P	1	SA
...4		1203-007018	IC-DC/DC CONVERTER;TPS54821RHL,QFN,14P,3	1	SA
...4		1203-007238	IC-PWM CONTROLLER;TPS54427,DDA,8P,4.8x3.	1	SNA
...4		1203-007700	IC-DC/DC CONVERTER;TPS54527DDAR,DDA,8Z30	1	SA
...4		1203-008104	IC-POS.FIXED REG.;S-13A1D18-E800,HSOP,8	2	SNA
...4		1203-008105	IC-POS.FIXED REG.;S-13A1D33-E800,HSOP,8	1	SNA
...4		1203-008118	IC-DC/DC CONVERTER;AOZ3013PI,SO-8,8P,4.9	2	SA
...4		1203-008183	IC-DC/DC CONVERTER;AOZ3015PI-1,EPAD SO-8	1	SA
...4		1203-008392	IC-VOL. DETECTOR;S-6414AAB-L800X,TSOT-23	1	SA
...4		1203-008393	IC-DDR TERMINATION REG.;AP2303MTR-G1-89,	1	SA
...4		1203-008454	IC-DC/DC CONVERTER;TPS56528,HSOP8,8P,4,8	1	SA
...4		1204-003586	IC-DECODER;SDP1415,PBGA,631P,23x23mm,PLA	1	SA
...4		1205-004447	IC-SWITCH;TPS2051CDBVR,SOT23-5,5P,3x1.65	1	SA
...4		1205-004983	IC-SWITCH;BD82032FVJ,TSSOP-B8J,8P,3.0x4.	3	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5mm,TP,100V,	15	SA
...4		2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	16	SNA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	42	SNA
...4		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	20	SNA
...4		2007-000166	R-CHIP;300Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	20	SNA
...4		2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	28	SNA
...4		2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	4	SNA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001116	R-CHIP;680ohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	6	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	15	SNA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005	4	SA
...4		2007-007133	R-CHIP;300ohm,1%,1/16W,TP,1005	1	SA
...4		2007-007134	R-CHIP;39Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	5	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005,0.35T	3	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	21	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	17	SNA
...4		2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,0.35T	2	SA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	6	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007313	R-CHIP;6.8Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	21	SNA
...4		2007-007431	R-CHIP;91Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007470	R-CHIP;7.5Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007528	R-CHIP;1.5Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007587	R-CHIP;3.6Kohm,1%,1/16W,TP,1005	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	5	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	5	SA
...4		2007-007861	R-CHIP;62Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	14	SNA
...4		2007-008213	R-CHIP;4.3Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	4	SA
...4		2007-008429	R-CHIP;499ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008485	R-CHIP;22ohm,1%,1/16W,TP,1005	14	SC
...4		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	4	SA
...4		2007-009117	R-CHIP;49.9Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-009777	R-CHIP;4.99Kohm,1%,1/16W,TP,1005	1	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	4	SA
...4		2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4Points,TP,10	6	SA
...4		2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	1	SNA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	6	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	3	SNA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	14	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	2	SA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	3	SA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	5	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000854	C-CER,CHIP;0.039nF,5%,50V,C0G,TP,1005	1	SA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005	2	SA
...4	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	1	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	9	SNA
...4	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	1	SA
...4	AD480	2203-003019	C-CER,CHIP;8.2nF,10%,50V,X7R,TP,1005	2	SNA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,0.8	2	SA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	8	SNA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	2	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	55	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	2	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	129	SNA
...4	AD480	2203-006257	C-CER,CHIP;470nF,10%,6.3V,X5R,TP,1005,0.	1	SNA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	5	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	24	SNA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	3	SNA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005	11	SA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	49	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	4	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608(	31	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	27	SA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	25	SNA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,0.5	12	SA
...4		2703-000158	INDUCTOR-SMD;1uH,10%,2012,.40ohm,50mA,45,	1	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,1.35Ohm,35mA	1	SA
...4		2703-001938	INDUCTOR-SMD;56nH,5%,1005,1.5Ohm,200mA,1	3	SA
...4		2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	1	SA
...4		2703-003937	INDUCTOR-SMD;1uH,20%,7.0x6.47x3.0mm,0.00	1	SA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,5050,4mm,0.072Ohm	4	SA
...4		2703-005191	INDUCTOR-SMD;1.5uH,20%,6060,4.5,0.02ohm,	2	SA
...4		2703-005192	INDUCTOR-SMD;4.7uH,20%,6060,4.5,0.036ohm	2	SA
...4		2703-005194	INDUCTOR-SMD;3.3uH,20%,6060,4.5,0.03ohm,	1	SA
...4		2801-004477	CRYSTAL-SMD;24.576MHz,20ppm,SMD,18pF,15o	1	SA
...4		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	5	SNA
...4		3301-001364	BEAD-SMD;1000ohm,1608,TP,1085ohm/108MHz,	2	SNA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	41	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	2	SA
...4		3701-001856	CONNECTOR-HDMI;19P,FEMALE,AU,0.5mm,BLK,S	1	SA
...4		3701-001861	CONNECTOR-HDMI;19P,FEMALE,AU,0.5mm,BLK,S	3	SA
...4		3707-001106	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA
...4		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4		3711-007585	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,ANGLE-D	1	SA
...4	EH01	3711-008488	HEADER-BOARD TO CABLE;BOX,14P,2R,2mm,ANG	1	SA
...4	EH01	3711-008558	HEADER-BOARD TO CABLE;BOX,26P,2R,1.25mm,	1	SA
...4		3722-003229	JACK-MODULAR;8P/8C W/L,Y,STRAIGHT,N,Au,1	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,A	3	SA
...4	JACK PIN	3722-003546	JACK-PIN;5P+Screw hole,NI+SN,G,Y/BLU/RED	1	SA
...4		3722-003667	JACK-PHONE;1P/7C,SN/NI,BLK,STRAIGHT,3.6P	1	SA
...4		6302-001376	GASKET;D-Q43-14-180,6mm,SI	1	SNA
...4	ET01	BN40-00313A	TUNER;DTOS40EH5A,DTOS40EH5A,DVB-TC Half,	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN41-02353B	PCB MAIN;J5500~6500,Hawk_M_FHD,FR-4,4F,B	1	SNA
...4		BN97-09450A	ASSY MICOM;T-HKMFDEUC,Hawk-M FHD 5/6	1	SNA
....5		1107-002341	IC-EMMC;THGBMBG5D1KBAIT,4GB,BGA,153P,11x	1	SNA
...4		BN97-09454A	ASSY MICOM;HMMICOM_FHD_EU	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SA
1		BN91-15485H	ASSY SHIELD;LED_J6K	1	SNA
.2	SCREW	6001-003081	SCREW-MACHINE;PWH,+,M3,L5,ZPC(WHT),SWRCH	10	SA
.2		BN02-00102B	TAPE-FILAMENT;#8917,0.15,25,50,WHITE	0	SNA
.2	EC13	BN39-01884B	LEAD CONNECTOR;UN40H5200AF,Lead Connecto	1	SA
.2		BN39-02001D	LEAD CONNECTOR-FUNTION;55J5500,Flat Conn	1	SA
.2	EC13	BN39-02036G	LEAD CONNECTOR;60/65J6200,Flat Connector	1	SA
.2	P001A	BN44-00705C	DC VSS-LED TV PD BD;L60S1_FSM,L60S1_FSM,	1	SA
.2	WIFI	BN59-01174D	NETWORK-WIFI MODULE;WIDT-30Q,Internal Wi	1	SA
.2	HOLDER SCREW	BN61-09175B	SCREW-MACHINE;BH,+,M3,L10,ZPC(WHT),SWRCH	2	SA
.2	CD01A	BN95-01460A	ASSY DECORATION SMT;6000,60,LIGHT TITAN	1	SA
...3		0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,N	0	SNA
...3		0204-002420	SOLVENT;1M-1000,C3H70H,96	0	SNA
...3		BN01-00160A	TARGET-CHROMIUM-CY;Chromium target,99.95	0	SNA
...3		BN01-00161A	TARGET-CHROMIUM-PL;chromium target,over	1	SNA
...3		BN02-00353A	COATING-AFS;SSVD-39,2%,1~10 cps,1.78	5	SNA
...3	FD01	BN63-11682A	COVER-DECORATION;UH6300-60,PC+ABS+G/F15%	1	SNA
...4		0103-010275	RESIN PC ABS;235GNH15/6919H,Black,BK0007	251	SNA
...3		BN68-03920A	LABEL BOX;All Monitor,ART-PAPER 100G,WHT	1	SNA
...3		BN69-10522B	P/TRAY;-,-,305,541,400,PAPER,-,-,-,TRAY 60	1	SNA
...3		BN69-10523C	BOX UNIT-SMT;60" SMT DECORATION,PAPER,-,	1	SNA
.2		BN96-30218F	ASSY BOARD P-BT MODULE;WIBT40A,BT Module	1	SA
.2	SP01A	BN96-30334M	ASSY SPEAKER P;6ohm,4pin,10W,J5500 60inc	1	SA
.2	FB01A	BN96-30902D	ASSY BOARD P-FUNCTION ASSY;UH6500,Functi	1	SA
.2		BN96-36274L	ASSY CABLE P-FFC CABLE;60J6200,FFC,NH,50	1	SA
1	ACCE1	BN92-17071Q	ASSY ACCESSORY;LED_J6K	1	SNA
.2		BN68-07519A	LABEL-ENERGY;EU,Jordan all(A+),WW,PP,0.1	1	SNA
.2		BN96-35678B	ASSY ACCESSORY CABLE;LED_J6K	1	SNA
...3		3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
...3	T0268	3903-000950	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SA
...3		4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,7.5g,AAA	2	SNA
...3		6902-001965	BAG PE;LDPE,BIOBASED,T0.05,W200,L300,TRP	1	SNA
...3		BN59-01198Q	REMOCON-REMOCON;TM1250A,49,3.0V,TM1250A_	1	SA
...3	HOLDER	BN61-08370A	HOLDER-WIRE STAND;26UE4000 GUIDE STAND,P	1	SA
.2		BN96-37434A	ASSY ACCESSORY MANUAL;JU6S,EUROPE.CIS	1	SNA
...3		6902-001964	BAG PE;LDPE,BIOBASED,T0.03,W200,L300,TRP	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),BLACK,	1	SNA
..3		BN68-03548J	LEAFLET-09, WARRANTY;comm,Samsung,17Lan	1	SNA
..3		BN68-04972E	LEAFLET-06,REGULATORY GUIDE;ALL,SAMSUNG,	1	SNA
..3		BN68-07177P	MANUAL USERS-03;UJ6200,XH,W/P	1	SNA
..3		BN68-07598A	LEAFLET-FICHE;ALL,W/P	1	SNA
1		BN92-17127H	ASSY LABEL;LED_J6K	1	SNA
.2		0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA
.2		BN68-06708G	LABEL RATING;Monitor,WW,PP,T0.161,93,73,	1	SNA
.2		BN68-07063C	LEAFLET-02,QSG;UJ6200,EUROPE,W/P,332x242	1	SNA
1		BN92-17128R	ASSY P/MATERIAL;LED_J6000	1	SNA
.2		6902-001955	BAG ROLL;HDPE/PE FOAM,HDPE T0.018mm,T0.2	3	SNA
.2		6902-002233	BAG AIR;LDPE,-,T0.2,W900,L1850,TRP,-,-,-	1	SNA
.2		6922-000003	BAND;PP,T0.8,W18,L1650M,TRP,DA69-90145A	1	SNA
.2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB,17.5g	4	SNA
.2		BN02-00319B	TAPE OPP;OPP,T0.05,W75,L800m,CLEAR	2	SNA
.2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P,T0.	1	SNA
.2		BN69-03982J	PAD PACKING-EDGE;EDGE,PAPER,-,T5,W120,L1	1	SNA
.2		BN69-05418M	WRAP;T0.017,500,2000000,2000000,500	0	SNA
.2		BN69-06640E	PAD-TRUCK PAD;TRUCK PAD,PAPER,-,DW-BC,41	1	SNA
.2		BN69-06642B	PAD;PAD,PAPER,-,CB-SW4,1500,1100,-,-,-	1	SNA
.2		BN69-10937M	PALLET;60" H6203,WOOD,17mm,1200,1685,144	1	SNA
.2		BN69-12434A	CUSHION-SET;60J6200-VS,EPS,16.7g/l	1	SNA
.2		BN69-12437A	CUSHION-SIDE;60J6200,EPS,16.7g/L	1	SNA
..3		0103-005099	RESIN EPS;BASF303,Natural,Natural	162	SNA
1		BN92-18014M	ASSY BOX;LED_J6K	1	SNA
.2		BH68-00662A	LABEL BOX-01;ALL MODEL,ART PAPER,60,110,	1	SNA
.2		BN68-05640A	LABEL-03,BOX;ALL MODEL,ART PAPER 90G,110	1	SNA
.2		BN69-12178A	BOX UNIT-IN;60J6300,CB,DW,W1960,D490	1	SNA
.2		BN69-12685F	BOX UNIT-01,OUT;60J6200-VS,CB,DW4,C-03,W	1	SNA