


1. Main

Exploded View

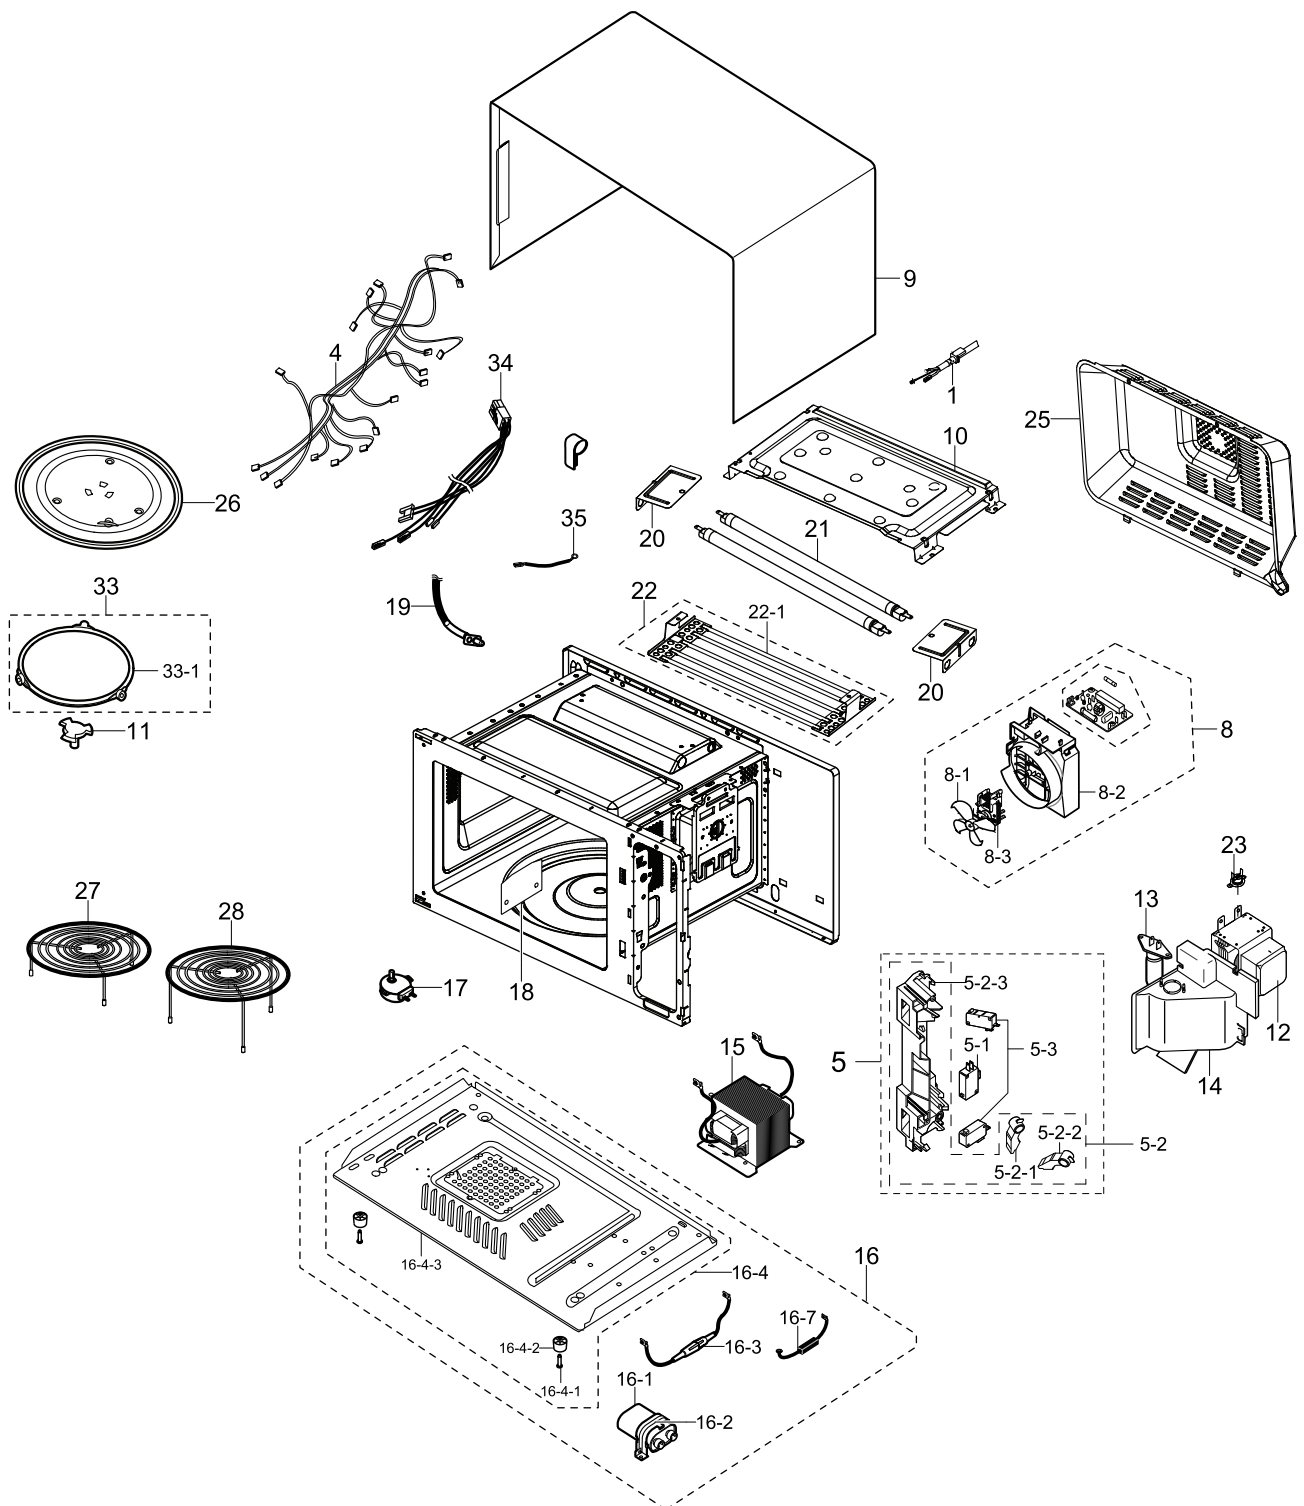


Parts List

No.	Parent	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	DE96-00952A	2	M015	DE96-00385A	ASSY POWER CORD; CEE,Straight,250V/16A,H0	SA	1
4	DE96-00952A	2	W002	DE96-00925A	ASSY WIRE HARNESS-A; CE1071,230V/50HZ,1.0	SNA	1
5	DE96-00120T	4		DE72-00137D	LATCH-BODY; MC1015WB/BB,NYLON(GLASS10%),W	SA	1
5-1	DE96-00120Q	3	B046	3405-001032	SWITCH-MICRO; 125/250VAC,16A,200GF,SPDT	SC	1
5-2	DE96-00120Q	3	B024	DE96-00120T	ASSY BODY LATCH SUB; PG117R(TBMO/SIDE),NY	SA	1
5-2-1	DE96-00120T	4	B010	DE66-00093B	LEVER-SWITCH(A); PG113R,NYLON,NTR,HANDLE,	SA	1
5-2-2	DE96-00120T	4	B011	DE66-00094B	LEVER-SWITCH(B); PG113R,NYLON,NTR,HANDLE	SA	1
5-2-3	DE96-00120T	4		DE72-00137D	LATCH-BODY; MC1015WB/BB,NYLON(GLASS10%),W	SA	1
5-3	DE96-00120Q	3	B048	3405-001034	SWITCH-MICRO; 125/250VAC,16A,200gf,SPST-N	SA	2
8	DE94-02760A	2	M020	DE96-00455P	ASSY MOTOR FAN; CE1031-K/BDW,-,-,-,NO ASS	SA	1
8-1	DE96-00455P	3	H096	DE31-90051A	BLADE-FAN; -,PP,-,D130,-,T,-	SA	1
8-2	DE96-00455P	3	M022	DE61-10006A	COVER-BLOWER; 3RD-W(1.3)-,PP(TB53),3RD-W(	SNA	1
8-3	DE96-00455P	3	M023	DE31-10185A	MOTOR FAN; SMF-3RDEA1,-,-,-,230V50Hz,24	SA	1
9	DE94-02760A	2	M001	DE64-01161L	PANEL-OUTER; CE1031LATB/XTL,EGI-SECC,T0.6	SA	1
10	DE94-02768A	2	M003	DE61-01191A	BRACKET-UPPER; 1.0value convec,SECC,T0.4,	SA	1
11	DE94-02768A	2	M034	DE67-00252B	COUPLER; 1.0 CU.FT VALUE CONVE,PPS,XP-214	SA	1
12	DE94-02769A	2	M035	OM75P(31)ESGN	ASSY-MGT; ASSY-MGT		1
13	DE94-02769A	2	M036	4713-001046	LAMP-INCANDESCENT; 240V,104mA,25W,ORG,25x	SA	1
14	DE94-02768A	2	M037	DE63-00616A	COVER-AIR; CE107V/XEN,PP(FH44N)	SA	1
15	DE94-02769A	2	M038	DE26-00152A	TRANS H.V; SHV-EPT10A,230V,50Hz,2390V/3.4	SNA	1
16	DE94-02760A	2	M155	DE96-00637A	ASSY BASE PLATE; 5TH/1.0 CONVECTION,-,-,-	SNA	1
16-1	DE96-00637A	3	M039	2501-001015	C-OIL; 1.0uF,2100V,BK,35X54X80,20mm	SA	1
16-2	DE96-00637A	3	M040	DE61-50106A	BRACKET-HVC; -,SECC,T0.8,W31,L125.8,-,-	SA	1
16-3	DE96-00637A	3	M042	DE91-70061A	ASSY H.V.FUSE; -,THV060T-0800-H,5KV/0.80A	SA	1

No.	Parent	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
16-4	DE96-00637A	3	M045	DE96-00295M	ASSY BASE PLATE SUB; 5TH/1.0 CONVECTION,-	SA	1
16-4-1	DE96-00295M	4	M046	DE60-60025A	PIN-FOOT; -, -, -, -, -, -, -, -	SA	4
16-4-2	DE96-00295M	4	M047	DE61-40065A	FOOT; -, PP, T2x22x17mm, BLK, -, -, -	SA	4
16-4-3	DE96-00295M	4	M048	DE61-00557M	BASE-PLATE; 5TH/1.0 CONVECTION, SGCC, T0.5,	SNA	1
16-7	DE96-00637A	3	M527	DE59-00002A	DIODE-H.V; MWO ALL, 2CL4512H, -, 450mA 13KV,	SC	1
17	DE94-02769A	2	M495	DE31-10170B	MOTOR SYNCHRONOUS; SM16FHK36P1AW3, CONV, FR	SA	1
18	DE94-02768A	2	M051	DE63-00237A	COVER-CEILING; CE297DN-5, MICA-SHEET, T0.3,	SNA	1
19	DE94-02769A	2	M054	DE32-10013A	SENSOR; PTM-K312-K2, MG620440, -20to+310C, 1	SA	1
20	DE94-02768A	2	M151	DE63-00620A	COVER HEATER; 1.0value convec, SECC, T0.4, W	SA	2
21	DE94-02769A	2	M295	DE47-00024B	HEATER-QUARTZ; SHQ-U7103A, CE7103, 600W, 115	SNA	2
22	DE94-02768A	2	M296	DE96-00799A	ASSY WIRE-PROTECT; CE103VR/BWT, 1.0VALUE C	SNA	1
22-1	DE96-00799A	3	H131	DE75-00075A	RACK-WIRE PROTECT; 1.0VALUE CONVEC, STS304	SA	5
23	DE94-02769A	2	M436	DE47-20009A	THERMOSTAT; NT-101, 250V 10A/125V 15A, 150(	SA	1
25	DE94-02768A	2	P186	DE63-00617A	COVER-BACK; 1.0 VALUE CONVECTION, SGCC, T0.	SA	1
26	DE94-02762A	2	T001	DE74-20015G	TRAY-COOKING; 3RD-1.0, GLASS, T6.0, PI316, -,	SA	1
27	DE98-01029A	3	T010	DE97-00136Q	ASSY WIRE RACK; CE1041DFB, 2.5mm, 39mm, (LOW	SNA	1
28	DE98-01029A	3	T010	DE97-00136P	ASSY WIRE RACK; HQ-Z285VB, Add Spacer	SA	1
33	DE98-01029A	3	T156	DE94-02148B	ASSY GUIDE ROLLER; CE107V-W/XEF, PPS(XP214	SNA	1
33-1	DE94-02148B	4	T107	DE61-01192B	GUIDE-ROLLER; 1.0 Cu.Ft VALUE CONVE, PPS, X	SA	1
34	DE96-00952A	2	W038	DE96-00924A	ASSY WIRE HARNESS-B; CE104VD, 230V/50HZ, 1.	SNA	1
35	DE96-00952A	2	W076	DE96-00650A	ASSY WIRE HARNESS-B; PG2833R, 230V50HZ, -	SA	1

1.1. Assy Door

Exploded View

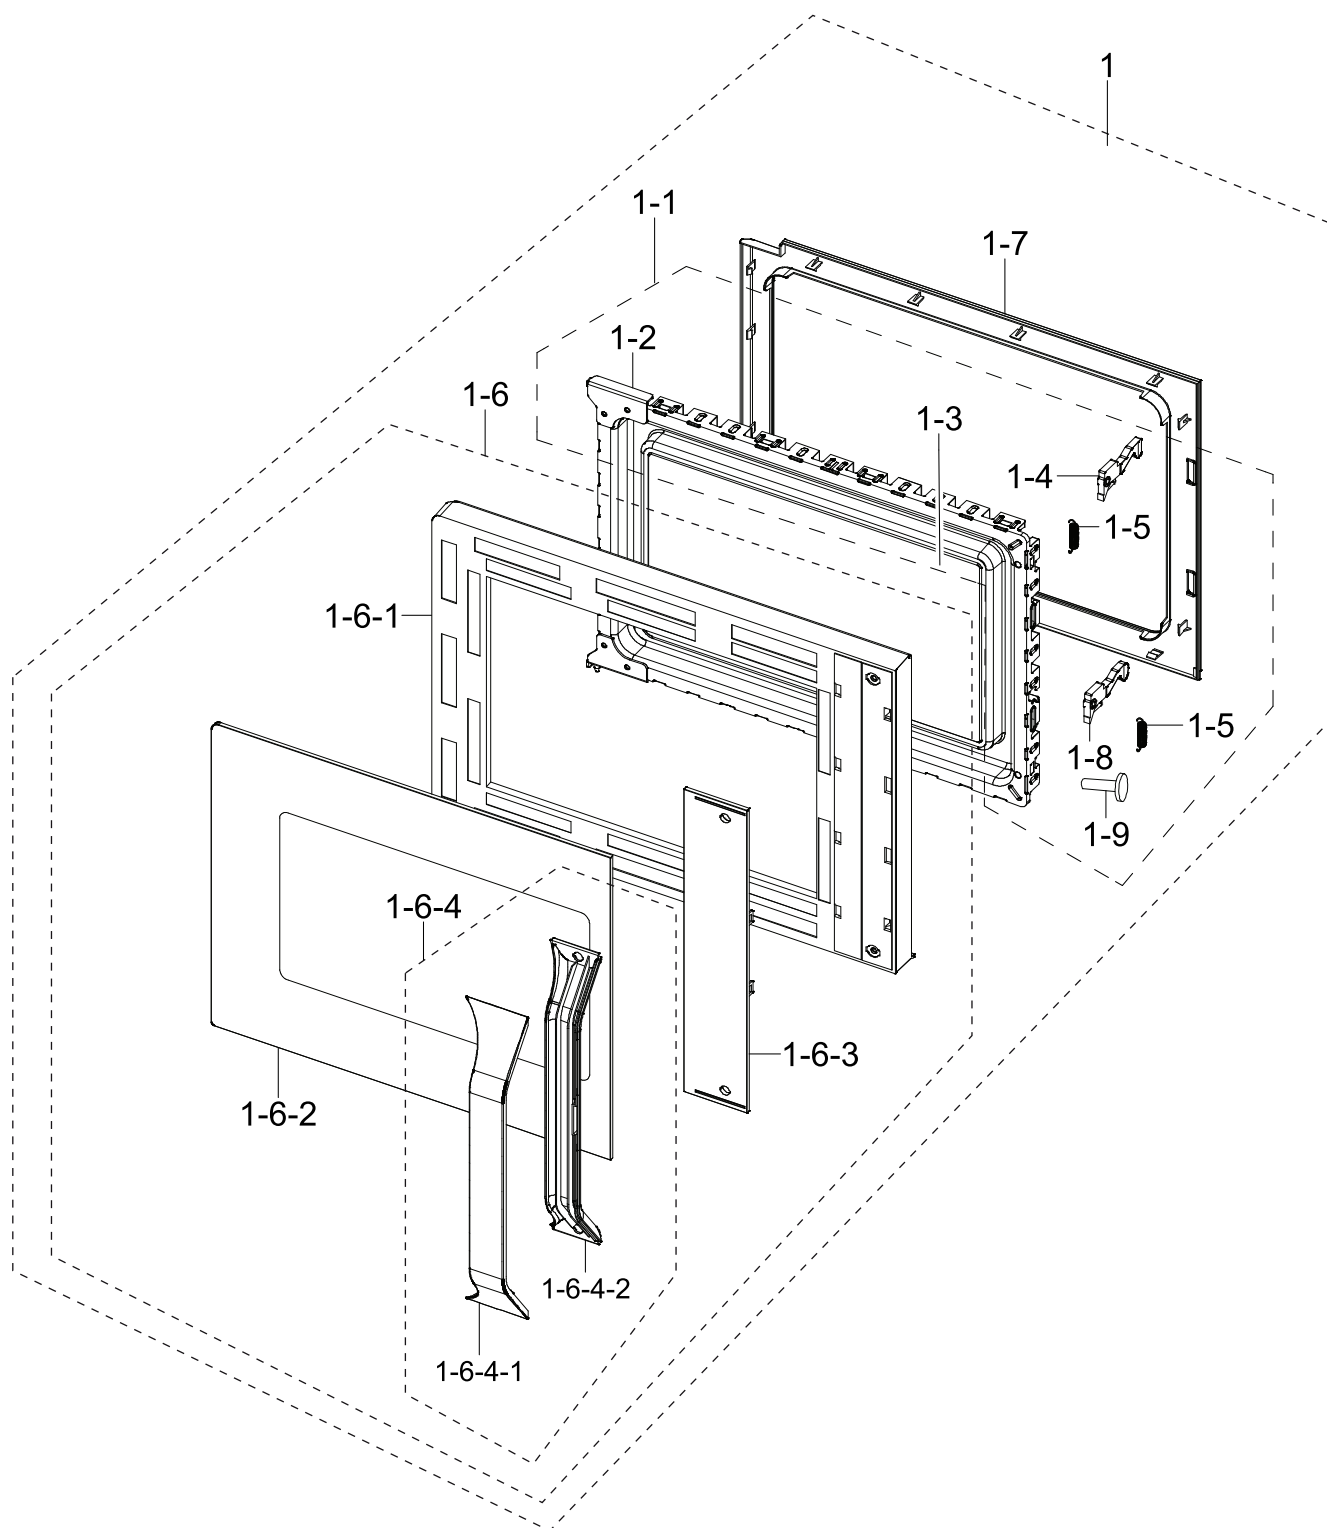


Parts List

No.	Parent	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	CE107FT-S/XEF	1	D049	DE94-02333G	ASSY DOOR; 1.0 CHIC CONV,ABS(SR0340M),BLA	SNA	1
1-1	DE94-02333G	2	D200	DE94-02226C	ASSY DOOR E-SUB; 1.0 CON,EGF,BLACK,OUT-SO	SNA	1
1-2	DE94-02226C	3	D204	DE94-02172A	ASSY DOOR E-SEALANT; 1.0 CONV,SCP,BLACK,N	SNA	1
1-3	DE94-02172A	4	D003	DE67-20185C	SCREEN-DOOR; CK95/CK99,-,T2.0,W317.5,L198	SNA	1
1-4	DE94-02226C	3	D012	DE64-01353A	KEY-DOOR(U); SCOUT,NYLON#66,BLK,UPPER	SA	1
1-5	DE94-02226C	3	D007	DE61-01406A	SPRING ETC-KEY; SWP,0.7,4.6,6,17	SNA	2
1-6	DE94-02333G	2	D037	DE94-02331C	ASSY DOOR A; 1.0 CHIC CONV,ABS(SR0340M),B	SNA	1
1-6-1	DE94-02331C	3	D002	DE64-02426C	DOOR-A; 1.0 CHIC CONV,ABS,SR-0340M,BLACK,	SNA	1
1-6-2	DE94-02331C	3	D024	DE64-02441A	SCREEN-DOOR(B); MS109F,REINFORCED GLASS,T	SNA	1
1-6-3	DE94-02331C	3	D078	DE64-02425A	HANDLE-BASE; 1.0 Chic,ABS,black,Chic proj	SA	1
1-6-4	DE94-02331C	3	D020	DE94-02384A	ASSY HANDLE; MS109F,CHIC PJT.	SA	1
1-6-4-1	DE94-02384A	4	D026	DE63-00676A	COVER-HANDLE; 1.0 CHIC,ABS,Victory silver	SA	1
1-6-4-2	DE94-02384A	4	D019	DE64-02424A	HANDLE-DOOR; 1.0 CHIC,ABS,victory silver	SA	1
1-7	DE94-02333G	2	D006	DE64-02267A	DOOR-C; CE107V/XEN,PBT,BLACK K21249	SA	1
1-8	DE94-02226C	3	D014	DE64-01352A	KEY-DOOR(L); SCOUT,NYLON#66,BLK,LOWER	SA	1
1-9	DE94-02226C	3	D017	DE60-60008A	PIN-HINGE; -,M301TBC,-,-,-,MSWR10,-,-,-	SA	2

1.2. Assy Control

Exploded View

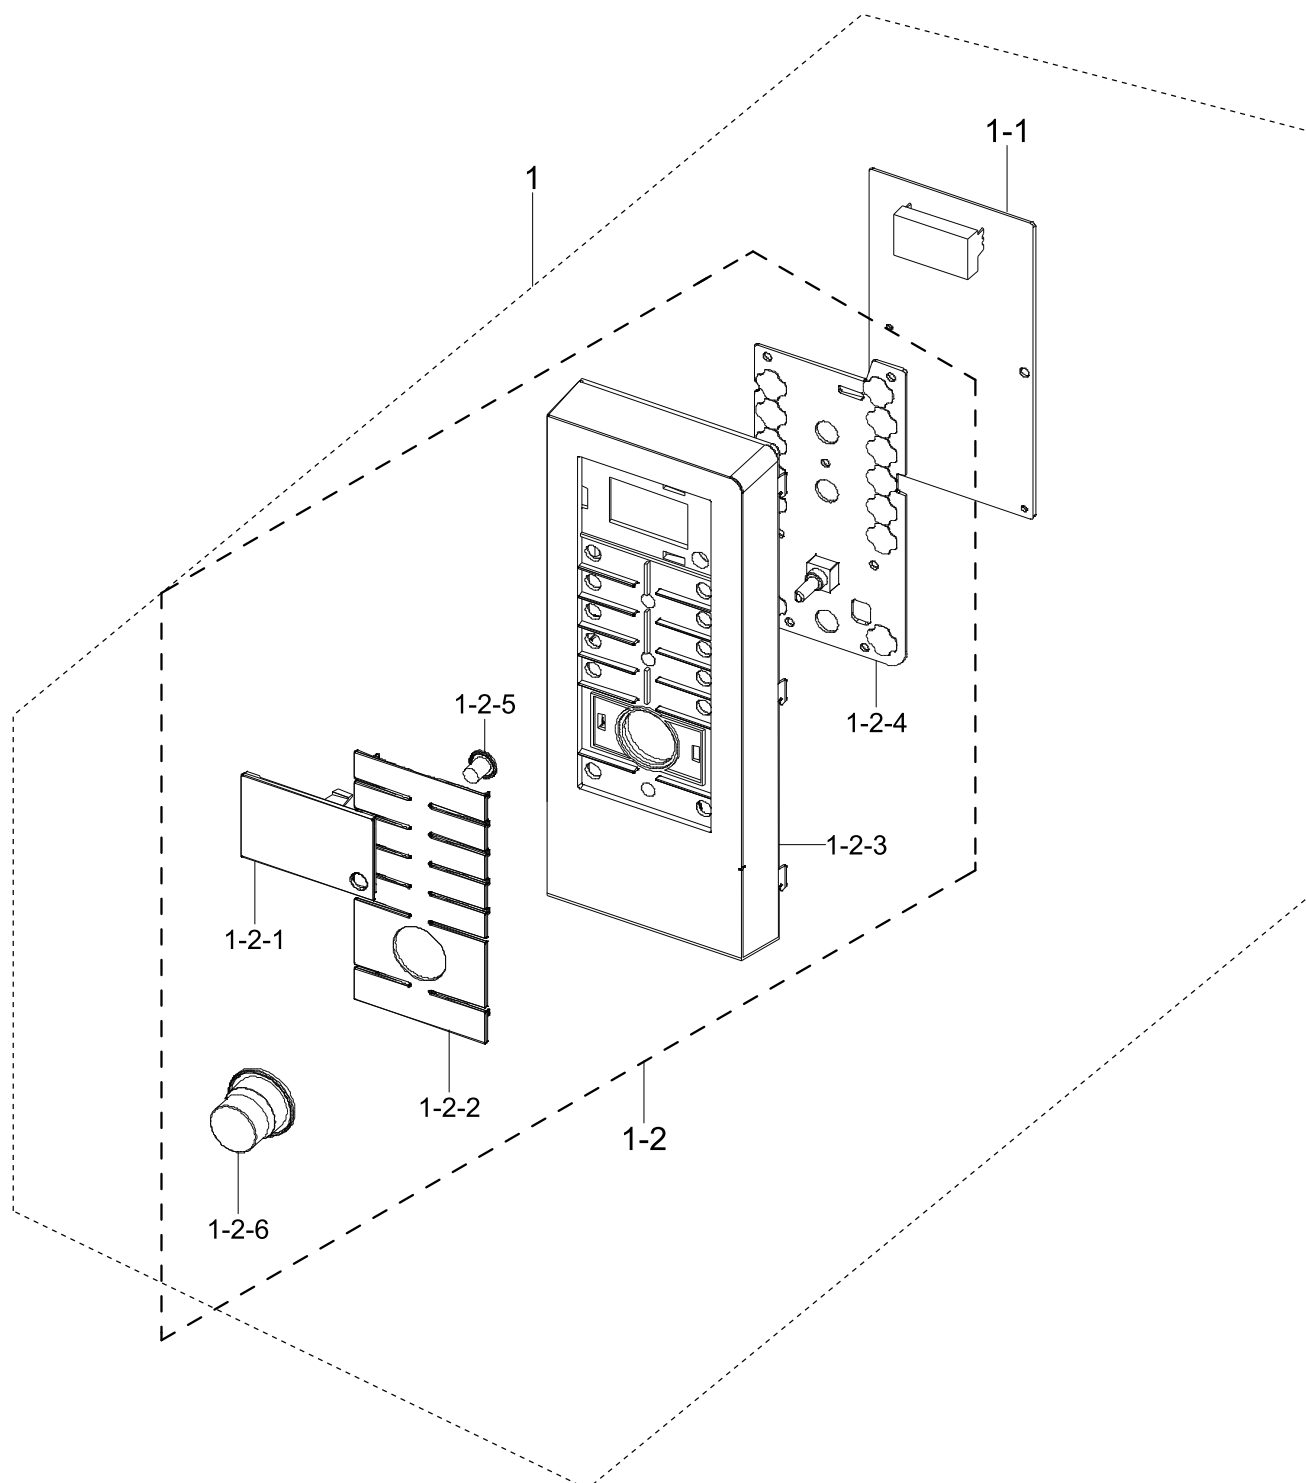


Parts List

No.	Parent	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	CE107FT-S/XEF	1	C082	DE94-02819A	ASSY CONTROL BOX; 1.0 CHIC CONV,VICTORY S	SNA	1
1-1	DE94-02819A	2	F316	DE92-02726A	ASSY PCB MAIN; RCS-S100GL-00,CE107F,LED,2	SA	1
1-2	DE94-02819A	2	C001	DE94-02818A	ASSY CONTROL PANEL; 1.0 CHIC CONV,ABS(HEA	SNA	1
1-2-1	DE94-02818A	3	C009	DE64-02573A	WINDOW-DISPLAY; CE107FTP-S,SAN,CR5381, G0	SNA	1
1-2-2	DE94-02818A	3	C011	DE64-02574A	BUTTON-SELECT(A); CE107FTP-S,PC,BLK,CHIC	SNA	1
1-2-3	DE94-02818A	3	C005	DE64-02569A	CONTROL-PANEL(TACT); CE107FT-S,PC,BLK,CHI	SNA	1
1-2-4	DE94-02818A	3	C084	DE96-00958A	ASSY KEY MODULE; CE107FT-S/XEF,DKM-CE107F	SA	1
1-2-5	DE94-02818A	3	C035	DE64-02575A	BUTTON-CLOCK; CE107FTP-S,PC,BLK,CHIC CONV	SNA	1
1-2-6	DE94-02818A	3	C029	DE64-02572A	KNOB-DIAL; CE107FTP-S,PC,BLK,CHIC CONV 1.	SNA	1

1.3. Assy Casing

Exploded View

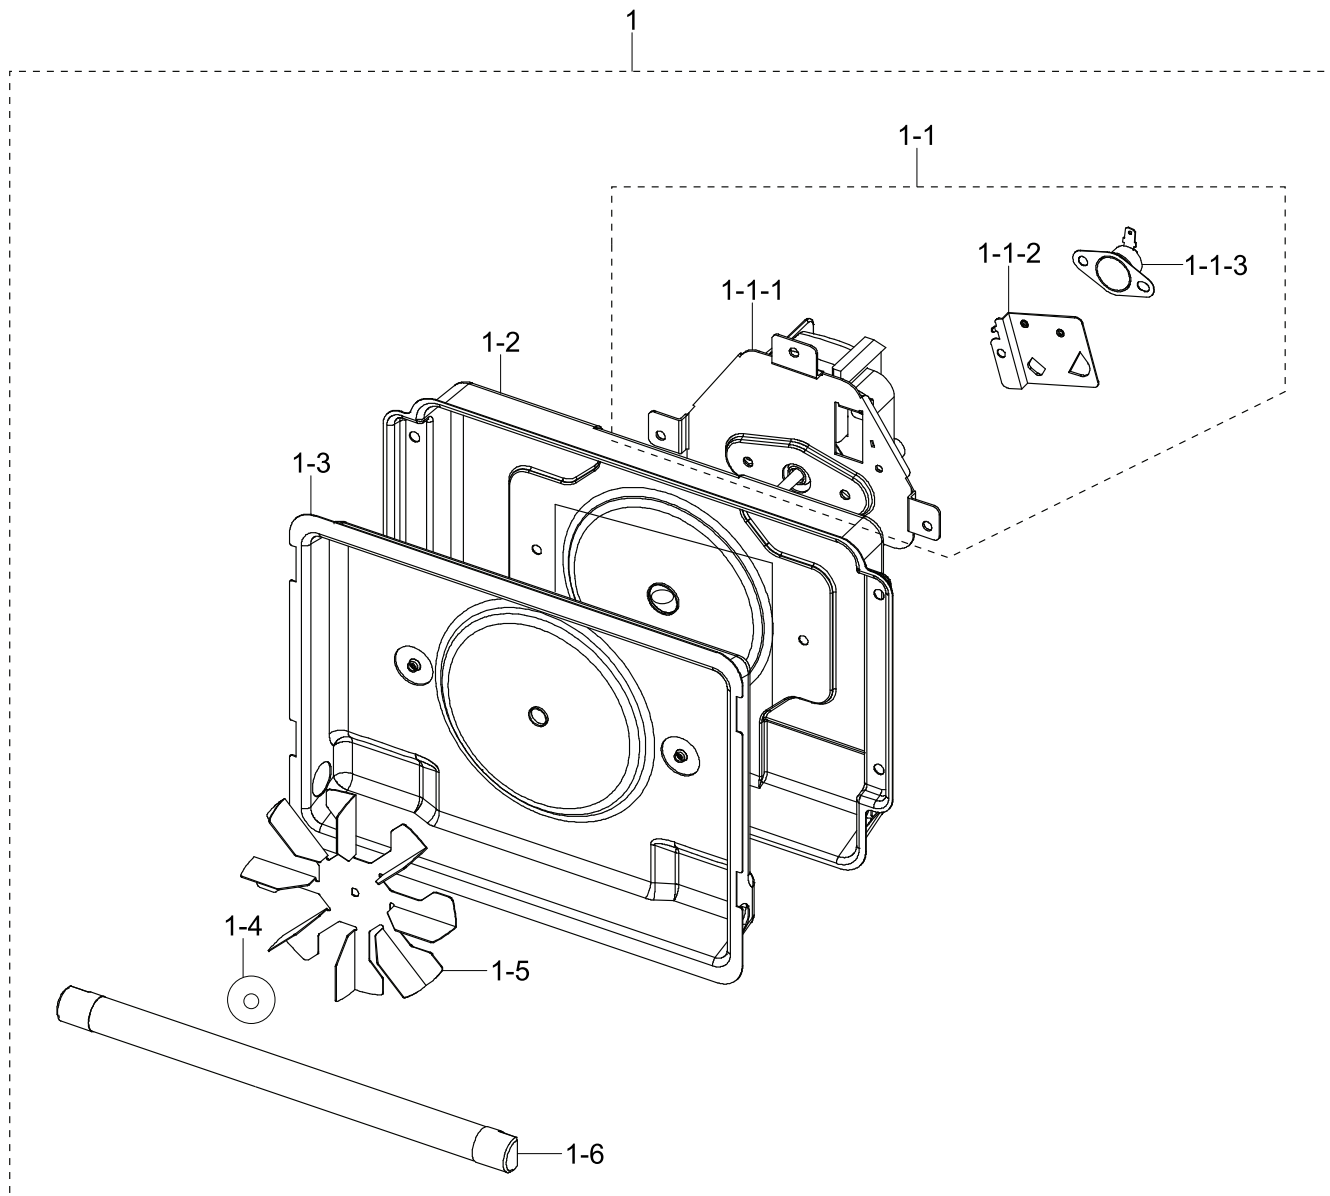

Parts List

No.	Parent	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	DE94-02760A	2	H067	DE94-02137A	ASSY CASING; CE103VR/BWT,600W,1.0VALUE CO	SNA	1
1-1	DE94-02137A	3	H108	DE96-00692D	ASSY MOTOR CONVECTION; CE103VR/BWT,MOTOR-	SA	1
1-1-1	DE96-00692D	4	H001	DE31-00049A	MOTOR CONVECTION; SMC-E7103A,230V/50Hz,27	SNA	1
1-1-2	DE96-00692D	4	H111	DE61-50490A	BRACKET-TCO; -,SECC1,T0.6,34,58,-,-	SA	1
1-1-3	DE96-00692D	4	M436	DE47-20009A	THERMOSTAT; NT-101,250V 10A/125V 15A,150(	SA	1

No.	Parent	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1-2	DE94-02137A	3	H015	DE63-00618A	COVER-CASING; 1.0value convec,SECC,T0.5,W	SA	1
1-3	DE94-02137A	3	H014	DE61-01188A	BRACKET-CASING; 1.0 VALUE CONVECTION,ALST	SNA	1
1-4	DE94-02137A	3	H011	DE60-40014B	WASHER-C MOTOR; -,STS304,-,T1.0,-,-,-,Z	SA	1
1-5	DE94-02137A	3	H098	DE31-00060A	BLADE-FAN; 1.0value convec,ALCOAT,T0.5,VA	SA	1
1-6	DE94-02137A	3	M295	DE47-00048A	HEATER-QUARTZ; SHQ-E107VA,CE107V,600W,230	SNA	1