


WIRING DIAGRAM

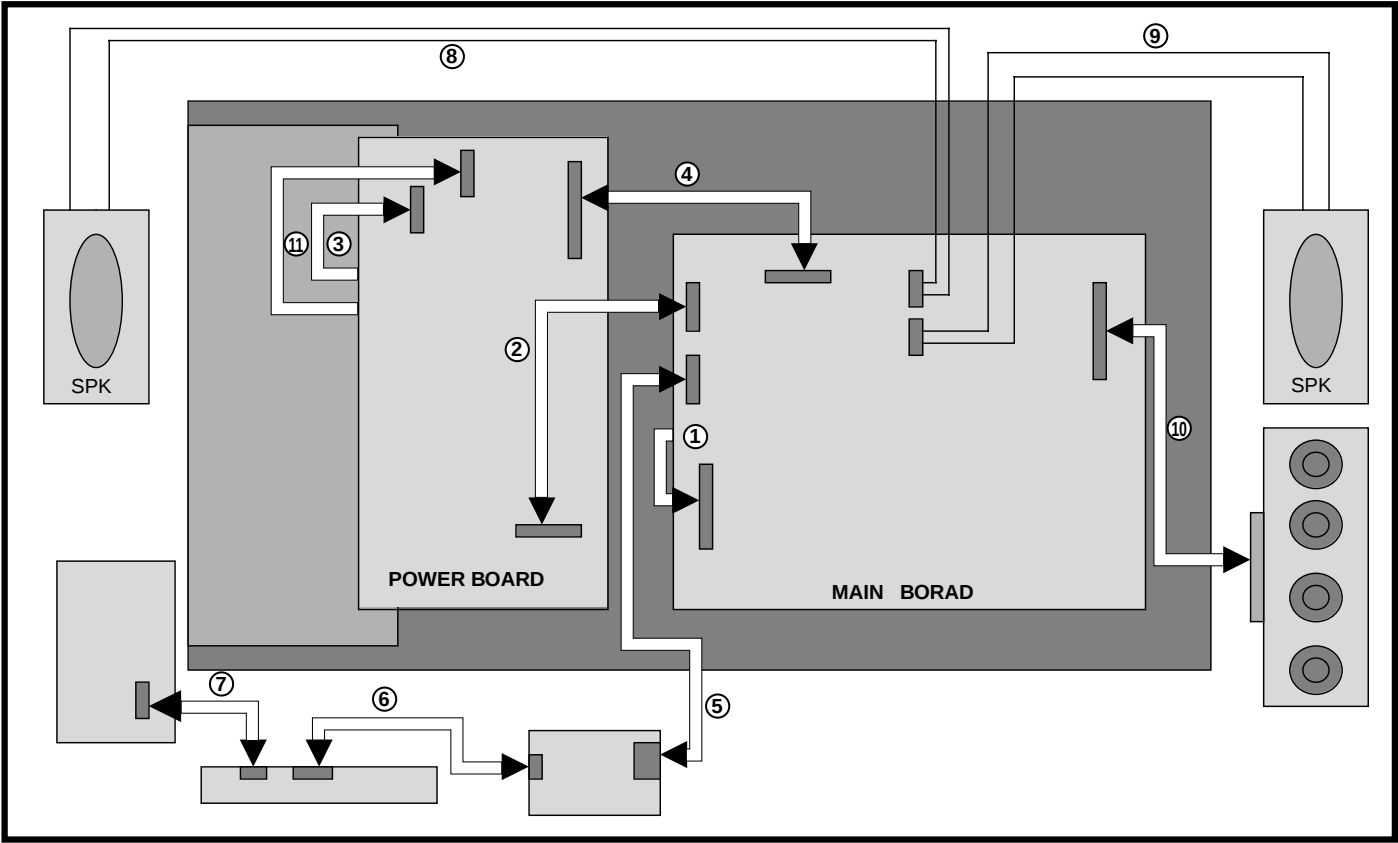


Wiring Part List

NO.	Part No.
1	663111020N-LPL, CMO 6631900059A-AUO
2	6631T20033F
3	6631T20032T-LPL 6631T20032F-CMO 6631T20032A-AUO
4	6631T25019K
5	6631T20033A
6	6631T20033T
7	6631T20033D
8	6401TZZ042C
9	6401TZZ042D
10	6631T20033E
11	6631T20032S-LPL 6631T20032E-CMO, AUO

EXPLODED VIEW

- 23 -

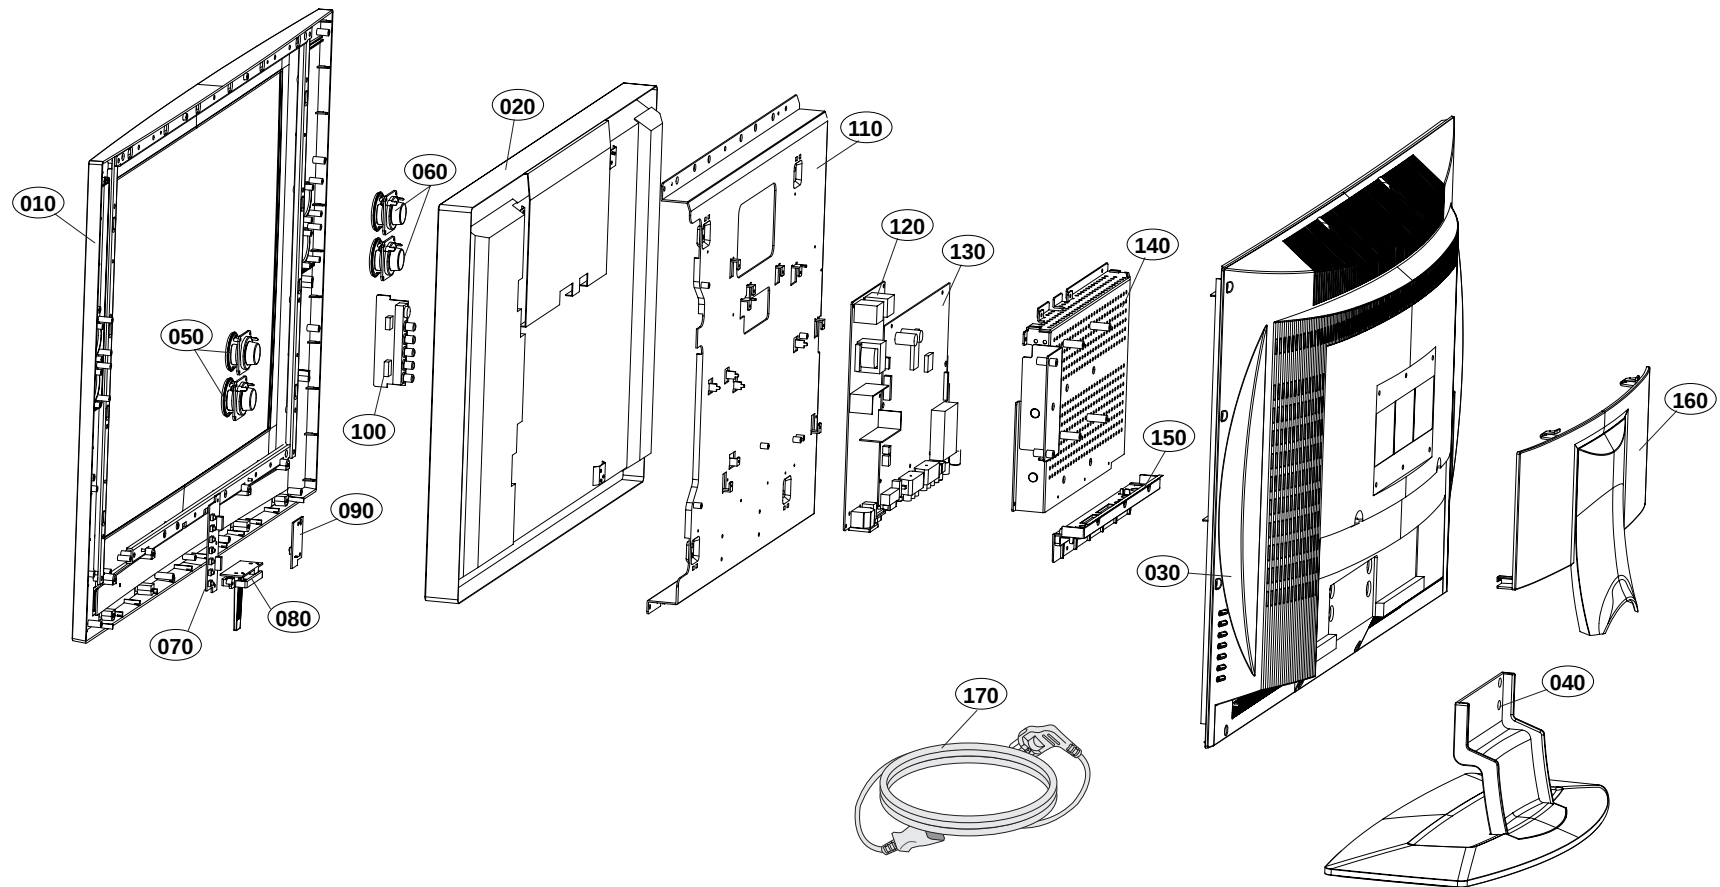

EXPLODED VIEW PARTS LIST

No.	PART NO.	DESCRIPTION
010	3091TKE041B	CABINET ASSEMBLY, RZ-32LZ55 BRAND 3090TKE029 CMO MODULE(MA PHANTOM)
	3091TKE019P	CABINET ASSEMBLY, RZ-32LZ50 LGEMA PHANTOM BRAND 3090TKE014 HIPS 51SF- LPL, AUO
020	6304FCI011A	LCD(LIQUID CRYSTAL DISPLAY), V320B1-L01 CHIMEI TFT COLOR WXGA 500NITS 1000VS1 16 LAMPS
	6304FLP288A	LCD(LIQUID CRYSTAL DISPLAY), LC320W01-SL01 LG PHILIPS TFT COLOR WXGA AIODC SPEC UP LEAD FREE
	6304FAU022A	LCD(LIQUID CRYSTAL DISPLAY), T315XW01-V5 AU TFT COLOR WXGA 600NITS MVA 8MS 16LAMPS
030	3809900009D	BACK COVER ASSEMBLY, RZ-32LZ55 2SCART (1080I) LGEMA PHANTOM
	3809900009C	BACK COVER ASSEMBLY, RZ-32LZ55 2SCART (1080I) NT PHANTOM- NT LOCAL
040	3043TKK172G	TILT SWIVEL ASSEMBLY, RZ-32LZ50 . LGEMA PHANTOM
	3043TKK172F	TILT SWIVEL ASSEMBLY, RT-32LZ50 . LGENT PHANTOM- NT LOCAL
050	6401TZZ042C	SPEAKER ASSEMBLY, RZ-30LZ50 5WX2EA,8OHM,ESTEC(L),5P,UL1185#24,
060	6401TZZ042D	SPEAKER ASSEMBLY, RZ-30LZ50 5WX2EA,8OHM,ESTEC(R),4P,UL1185#24
070	6871TST589D	PWB(PCB) ASSEMBLY,SUB, RZ-26LZ50 CONTROL TOTAL BRAND -LF-
080	6871TST642D	PWB(PCB) ASSEMBLY,SUB, 32LZ50 WALES SKD LED & P/SW TOTAL BRAND -LF-
	6871TST642C	PWB(PCB) ASSEMBLY,SUB, 32LZ50 LED & P/SW TOTAL BRAND -LF- NT LOCAL
090	6871TST588E	PWB(PCB) ASSEMBLY,SUB, RZ-30/32LZ50 IR SUB TOTAL BRAND -LF-
100	6871TVT370C	PWB(PCB) ASSEMBLY,VIDEO, RM-32/26/23LZ50 SIDE A/V SUB TOTAL BRAND LF
110	4951TKS170D	METAL ASSEMBLY, FRAME, 32LZ50 SKD
120	6871TPT275E	PWB(PCB) ASSEMBLY,POWER, RM-32LZ50 POWER TOTAL BRAND 26-32INCH PB FREE
130	33139P3010A	MAIN TOTAL ASSEMBLY, RZ-32LZ55 BRAND ML-041A- CMO
	33139P3009A	MAIN TOTAL ASSEMBLY, RZ-32LZ55 LPL (AI+ODC) BRAND ML-041A
	33139P3013A	MAIN TOTAL ASSEMBLY, RZ-32LZ55 BRAND AUO ML-041A
140	4951TKK169F	METAL ASSEMBLY, REAR RZ-32LZ50 LGEMA C/SKD
150	3551TKK516L	COVER ASSEMBLY, RZ-32LZ50 LGEMA PHANTOM REAR A/V ASSY PHONE
	3551TKK516B	COVER ASSEMBLY, RZ-30LZ50 REAR NON AV C/SKD
160	3550TKK581A	COVER, RZ-32LZ50 REAR AV
	3550TKK581B	COVER, RZ-32LZ50 REAR SKD
170	6410TEW001D	POWER CORD, SP027+IS14 I-SHENG SEV 1870MM WALL BLACK- Only Swiss
	6410TEW010A	POWER CORD, LP34A+LS60 LONGWELL VDE/SEMKO 1870MM WALL CD/PB FREE BLACK
	6410TEW011A	POWER CORD, LP22+LS60 LONGWELL IMQ 1870MM WALL CD/PB FREE BLACK- Only Italy
	6410TPW003A	POWER CORD, LP-33+LS-60 LONGWELL PCT 1870MM WALL CD/PB FREE BLACK- Only Russia
	6410TBW004A	POWER CORD, LP-61+LS-60 LONGWELL BSI 1870MM WALL CD/PB FREE BLACK- Only U.K

REPLACEMENT PARTS LIST

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;

CC, CX, CK, CN, CH : Ceramic
CQ : Polyester
CE : Electrolytic
CF : Fixed Film

RD : Carbon Film
RS : Metal Oxide Film
RN : Metal Film
RH : CHIP, Metal Glazed(Chip)
RR : Drawing

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
MAIN BOARD				
CAPACITOR				
		C108	OCE476EK638	47UF KMG 50V M FM5 TP 5
		C1102	OCE107CK638	"100UF SHL,SD 50V M FM5 TP 5"
		C404	OCE227EJ638	220UF KMG 35V M FM5 TP 5
		C129	181-007F	"MPE ECQ-V1H224JL3(TR), 50V"
		C130	181-007F	"MPE ECQ-V1H224JL3(TR), 50V"
		C1001	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1002	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1003	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1004	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1007	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1010	OCK273DK51A	27000PF 2012 50V 10% B(Y5P)
		C107	OCK225DFK4A	"2.2UF 2012 16V 20%,-20% F(Y"
		C109	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C11	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C110	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C113	OCK225DFK4A	"2.2UF 2012 16V 20%,-20% F(Y"
		C114	OCK225DFK4A	"2.2UF 2012 16V 20%,-20% F(Y"
		C12	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C127	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C128	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1300	OCK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C1302	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1305	OCK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C1307	OCH3103K516	10000PF 50V 10% B(Y5P) 2012
		C135	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C136	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C15	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C16	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C18	OCK106EF56A	10UF 3216 16V 10% X7R R/TP
		C19	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C23	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C3	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C306	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C318	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4004	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4005	OCH3222K516	2200PF 2012 50V 10% B(Y5P)
		C4006	OCH3222K516	2200PF 2012 50V 10% B(Y5P)
		C4009	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4010	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4011	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4016	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4017	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4019	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4021	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C42	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C44	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C45	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C49	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C500	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C505	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C506	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C507	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C508	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C509	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C51	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C510	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C511	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C512	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C513	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C514	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C517	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C518	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C519	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C521	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C522	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C523	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C526	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C527	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C528	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C529	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C530	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C531	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C532	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C533	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C534	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C535	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C536	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C537	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C538	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C539	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C540	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C541	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C542	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C544	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C545	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C546	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C547	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C549	OCK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C550	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C551	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C552	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C553	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C554	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C555	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C556	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C557	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C558	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C559	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C567	OCK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C6	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C60	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C606	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C608	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C609	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C61	OCH3104K566	0.1UF 50V 10% X7R 2012 R/TP

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C614	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C615	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C616	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C618	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C619	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C620	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C621	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C622	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C623	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C624	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C625	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C627	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C628	0CH3822K516	8200PF 2012 50V 10% B(Y5P)
		C629	0CH3823K516	82000PF 2012 50V 10% B(Y5P)
		C632	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C633	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C634	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C635	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C636	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C637	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C638	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C639	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C64	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C640	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C65	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C66	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C67	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C700	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C704	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C705	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C75	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C751	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C76	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C760	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C761	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C77	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C79	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C80	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C804	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C808	0CK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C809	0CK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C81	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C810	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C811	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C812	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C813	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C82	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C84	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C850	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C851	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C852	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C853	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C854	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C855	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C856	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C864	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C865	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C866	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C867	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C868	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C869	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C870	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C90	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C908	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C909	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C910	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C911	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C912	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C913	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C914	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C915	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C916	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C917	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C918	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C919	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C92	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C920	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C921	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C922	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C923	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C926	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C927	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C928	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C929	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C930	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C931	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C935	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C936	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C937	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C938	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C939	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C940	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C941	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C942	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C943	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C944	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C945	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C946	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C947	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C948	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C949	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C950	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C951	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C952	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C958	0CK225DFK4A	"2.2UF 2012 16V 20%,-20% F(V"
		C96	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C963	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C966	0CH3103K516	10000PF 50V 10% B(Y5P) 2012-CMO
		C967	0CH3103K516	10000PF 50V 10% B(Y5P) 2012-CMO
		C969	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C970	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C973	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C10	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C115	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C116	0CK562CK51A	5600PF 1608 50V 10% R/TP B(
		C117	0CK562CK51A	5600PF 1608 50V 10% R/TP B(
		C118	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C125	0CK105EK56A	1UF 3216 50V 10% X7R R/TP
		C126	0CK105EK56A	1UF 3216 50V 10% X7R R/TP
		C1301	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C1306	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C25	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C26	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C27	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C28	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F"
		C29	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C30	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F"
		C32	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F"
		C33	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F"
		C34	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C35	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F"
		C37	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F"
		C40	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C4000	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C4014	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C4018	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C4020	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C41	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C5001	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C504	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C524	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C611	0CK473CK56A	47000PF 1608 50V 10% R/TP X
		C612	0CK473CK56A	47000PF 1608 50V 10% R/TP X
		C613	0CK473CK56A	47000PF 1608 50V 10% R/TP X
		C626	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C7	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C70	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C71	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C72	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C73	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C750	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C752	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C753	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C759	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C78	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C8	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C800	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP"
		C801	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP"
		C802	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP"
		C803	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP"
		C9	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C901	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C902	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C903	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C904	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C905	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C906	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C907	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C964	0CK105DK94A	"1UF 2012 50V 80%,-20% R/TP-CMO"
		C13	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C1303	0CH6101K416	100PF 50V 5% NP0 2012 R/TP
		C1308	0CH6101K416	100PF 50V 5% NP0 2012 R/TP
		C14	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C2	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C20	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C200	0CH6221K416	220PF 2012 50V 5% NP0 -
		C237	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C238	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C319	0CH6120K416	12PF 2012 50V 5% NP0 -
		C324	0CH6120K416	12PF 2012 50V 5% NP0 -
		C328	0CH6120K416	12PF 2012 50V 5% NP0 -
		C329	0CH6120K416	12PF 2012 50V 5% NP0 -
		C331	0CH6150K416	15PF 2012 50V 5% NP0 R/TP
		C336	0CH6150K416	15PF 2012 50V 5% NP0 R/TP
		C340	0CH6150K416	15PF 2012 50V 5% NP0 R/TP
		C341	0CH6150K416	15PF 2012 50V 5% NP0 R/TP

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C352	0CC270DK41A	27PF 2012 50V 5% NP0 R/TP
		C354	0CH6471K416	470PF 2012 50V 5% NP0 R/TP
		C355	0CH6471K416	470PF 2012 50V 5% NP0 R/TP
		C43	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C46	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C50	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C53	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C59	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C701	0CH6120K416	12PF 2012 50V 5% NP0 -
		C702	0CH6120K416	12PF 2012 50V 5% NP0 -
		C74	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C755	0CH6471K416	470PF 2012 50V 5% NP0 R/TP
		C756	0CH6471K416	470PF 2012 50V 5% NP0 R/TP
		C757	0CH6471K416	470PF 2012 50V 5% NP0 R/TP
		C758	0CH6101K416	100PF 50V 5% NP0 2012 R/TP
		C83	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C86	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C924	0CH6080K116	8PF 2012 50V 0.5 PF COG R/T
		C925	0CH6080K116	8PF 2012 50V 0.5 PF COG R/T
		C968	0CH6101K416	100PF 50V 5% NP0 2012 R/TP-CMO
		C1015	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C1016	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C121	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C122	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C1500	0CC330CK41A	33PF 1608 50V 5% R/TP NP0
		C1501	0CC330CK41A	33PF 1608 50V 5% R/TP NP0
		C1502	0CC330CK41A	33PF 1608 50V 5% R/TP NP0
		C202	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C203	0CC221CK41A	220PF 1608 50V 5% R/TP NP0
		C204	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C205	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C207	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C209	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C21	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C210	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C211	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C214	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C217	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C218	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C22	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C220	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C222	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C223	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C224	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C24	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C343	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C348	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C353	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C4003	0CC150CK41A	15PF 1608 50V 5% R/TP NP0
		C4007	0CC150CK41A	15PF 1608 50V 5% R/TP NP0
		C47	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C48	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C501	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C515	0CC330CK41A	33PF 1608 50V 5% R/TP NP0
		C516	0CC330CK41A	33PF 1608 50V 5% R/TP NP0
		C600	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C601	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C602	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C603	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C610	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C754	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C85	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C1006	0CE106EK638	10UF KMG 50V 20% FM5 TP 5
		C1100	0CE106BF618	10UF KME TYPE 16V 20% FL TP
		C111	0CE475EK638	4.7UF KMG 50V 20% FM5 TP 5
		C1112	0CE108EF618	1000UF KMG 16V 20% FL TP 5
		C1113	0CE108EF618	1000UF KMG 16V 20% FL TP 5
		C1114	0CE108EF618	1000UF KMG 16V 20% FL TP 5
		C1115	0CE108EF618	1000UF KMG 16V 20% FL TP 5
		C112	0CE475EK638	4.7UF KMG 50V 20% FM5 TP 5
		C119	0CE106BF618	10UF KME TYPE 16V 20% FL TP
		C120	0CE106BF618	10UF KME TYPE 16V 20% FL TP
		C1202	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C123	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C124	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C1299	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C1304	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C131	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C132	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C133	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C134	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C971	0CE107BF618	100UF KME TYPE 16V 20% FL T-CMO
		C100	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C1008	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C1503	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C1504	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C17	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C206	0CH8226F691	22UF 16V 20% 105STD (CYL) R
		C208	0CH8226F691	22UF 16V 20% 105STD (CYL) R
		C219	0CH8226F691	22UF 16V 20% 105STD (CYL) R
		C221	0CH8226F691	22UF 16V 20% 105STD (CYL) R
		C225	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C226	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C227	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C228	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C235	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C236	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C300	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C301	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C302	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C303	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C304	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C307	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C308	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C309	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C312	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C313	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C314	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C315	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C316	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C317	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C4001	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4002	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4008	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4012	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4013	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4015	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4022	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4023	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4024	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C5	0CE475WJ6DC	4.7UF MVK 35V 20% R/TP(SMD)
		C502	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C503	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C52	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C520	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C525	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C54	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C543	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C55	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C560	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C566	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C604	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C605	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C607	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C62	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C63	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C703	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C805	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C806	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C807	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C814	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C815	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C857	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C858	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C859	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C860	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C861	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C862	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C863	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C87	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C88	0CH8476H691	47UF 25V 20% 105STD (CYL) R
		C89	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C900	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C91	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C953	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C956	0CH8476H691	47UF 25V 20% 105STD (CYL) R-LPL
		C957	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C959	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C960	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP-LPL
		C962	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C965	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C97	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C972	0CH8476H691	47UF 25V 20% 105STD (CYL) R
		C974	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
DIODEs				
		D100	0DRFC00288A	SS14 FAIR CHILD R/TP SMA 20
		D101	0DRFC00288A	SS14 FAIR CHILD R/TP SMA 20
		IC751	0DRSE00018B	"SRV05-4.TCT, SEMTECH R/TP S"
		IC754	0DRSE00018B	"SRV05-4.TCT, SEMTECH R/TP S"
		ZD1300	0DR340009AA	MBRS340 TP FAIRCHILD NON 40
		ZD1301	0DR340009AA	MBRS340 TP FAIRCHILD NON 40
		ZD901	0DR340009AA	MBRS340 TP FAIRCHILD NON 40-CMO
		D107	0DS226009AA	KDS226 TP KEC - 80V - - 4NS
		D711	0DD184009AA	KDS184 TP KEC - 85V - - 3
		D102	0DS181009AA	KDS181 TP KEC SOT-23 80V
		D103	0DS181009AA	KDS181 TP KEC SOT-23 80V
		D104	0DZ620009HB	UDZ S 6.2B TP ROHM SOD323 2
		D105	0DZ620009HB	UDZ S 6.2B TP ROHM SOD323 2
		D703	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		D704	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD101	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD215	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD216	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD217	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		ZD218	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD219	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD220	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD222	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		D700	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		D701	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		D702	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		D705	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		D706	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD10	0DZ620009HB	UDZ S 6.2B TP ROHM SOD323 2
		ZD203	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD204	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD205	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD206	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD207	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD208	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD210	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD213	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD214	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD221	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD5001	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD5002	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD5003	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD851	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD852	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD1000	0DZ330009DF	MTZ333B TP ROHM-K DO34 0.5W
IC				
		IC501	0IMMREB010A	"M12L64322A-6T ESMT 86P,TSOP"
		IC749	0IMMRSG036A	"M24C02-WMN6T(P),LF SGS-THOM"
		IC753	0IMMRSG036A	"M24C02-WMN6T(P),LF SGS-THOM"
		IC907	0IMCRAL006A	"AT24C16AN-10SU-2.7,LF ATMEL"
		IC918	0IMCRAL006A	"AT24C16AN-10SU-2.7,LF ATMEL"
		IC100	0IMCRMZ002A	MP7720 MONOLITHIC POWER SYS
		IC101	0IMCRMZ002A	MP7720 MONOLITHIC POWER SYS
		IC500	0IMCRGN002D	"FLI2300BD-LF,PB FREE GENES"
		IC750	0IMCRSG010A	ST3232CDR SGS-THOMSON SOP16
		IC850	0IMCRMIO06B	"M52758FP,LF RENESAS 36P,SSO"
		IC1	0IPRPMN003G	"VCT49X3F-F2,LF MICRONAS 144"
		IC4002	0IPRPAK013A	"AK4525VF-E2,LF AKM 28P,VOSP"
		IC4005	0IPRPJR017A	"NJU26901E2 JRC 8P,EMP R/TP"
		IC600	0IPRPM3002D	"MST9883C-LF-110 MSTAR 80P,L"
		IC800	0IPRPNP001A	"SM5301BS(ATSC DTV) NPC 28P,"
		IC901	0IPRPGN014C	"GM5221H-BC-LF,PB FREE GENES"
		IC1300	0IPMG00063A	MP1593DN-LF-Z MONOLITHIC PO
		IC1301	0IPMG00063A	MP1593DN-LF-Z MONOLITHIC PO
		IC2	0IPMGFA061A	"FAN1587AD33X FAIRCHILD 3P,D"
		IC3	0IKE702700D	"KIA7027AF 3, SOT-89 TP RESE"
		IC300	0IPMGKE039A	"KIA78D09F KEC 3P,DPAK R/TP"
		IC4	0IPMGFA061A	"FAN1587AD33X FAIRCHILD 3P,D"
		IC4007	0IPMG00107A	AZ1117H-2.5TR/E1 AAC 3PIN S
		IC505	0IPMGSG020A	"LD1117DT18TR,LF SGS-THOMSON"
		IC6	0IPMGSG018D	LD1086DT18TR-LF SGS-THOMSON
		IC601	0IPMGK2001B	AIC1117A-33PYTR(BS33) AIC 3
		IC604	0IPMG78341A	"AZ1085S-3.3TR/E1,LF BCD 3PI"
		IC8	0IMCRFA015A	KA7805R FAIRCHILD 2P D-PAK
		IC904	0IPMG00063A	MP1593DN-LF-Z MONOLITHIC PO-CMO
		IC905	0IPMGFA061A	"FAN1587AD33X FAIRCHILD 3P,D"
		IC906	0IPMGSG018D	LD1086DT18TR-LF SGS-THOMSON
		IC103	0ISS780800J	"KA78M08R 3P,D-PAK TP VOL. R"
		IC200	0ISA722200A	LA7222 (1280 AUDIO) - - - -

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		IC2000	0ISTL00026A	"MC14066BDR2G,LF ON SEMI 14P"
		IC4000	0ISTLFA108A	"NC7SV125P5X FAIRCHILD 5P,SC"
		IC4003	0ISTLFA108A	"NC7SV125P5X FAIRCHILD 5P,SC"
		IC4004	0ISTLFA108A	"NC7SV125P5X FAIRCHILD 5P,SC"
		IC4006	0ISTL00021A	"SN74AHCT1G125DCKR,LF TEXAS"
		IC702	0ISTL00031A	"MC74HC4066ADR2G,LF ON SEMI"
		IC752	0IMCRTI001A	"SN74HCT157DR,LF TEXAS INST"
COIL & CORE & INDUCTOR				
		L104	6140TBZ045A	"38.5UH(DIP), 6A, P7.5, DR8."
		L105	6140TBZ045A	"38.5UH(DIP), 6A, P7.5, DR8."
		L1300	6140VR0008B	SLF12575T-150M3R2 15UH SMD
		L1301	6140VR0008B	SLF12575T-150M3R2 15UH SMD
		L906	6140VR0008B	SLF12575T-150M3R2 15UH SMD-CMO
		L100	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L1002	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L3	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L301	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L302	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L304	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L311	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L4	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L401	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L5	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L500	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L501	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L502	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L503	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L504	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L505	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L600	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L601	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L602	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L701	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L800	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L850	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L900	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L901	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L902	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L903	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L202	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L203	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L204	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L205	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L207	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L208	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L209	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L210	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L4001	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L4003	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L5000	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L603	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L904	6210TCE001G	HH-1M3216-501 CERATEC 3216M-CMO
		L907	6210TCE001G	HH-1M3216-501 CERATEC 3216M-LPL
		Z1000	6200QL3001Z	B39361-X6966-D100 EPCOS ST
		L1	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L1001	0LC1020101A	1UH 10% 2012 R/TC FI-B2012-
		L11	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L13	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L14	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L15	0LC1032101A	10UH 10% 3216 R/TC FI-C3216

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		L17	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L2	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L402	0LC1532101A	15UH 10% 3216 R/TC FI-C3216
		L403	0LC1532101A	15UH 10% 3216 R/TC FI-C3216
		L7	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L10	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L12	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L16	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L200	0LC1020101A	1UH 10% 2012 R/TC FI-B2012-
		L201	0LC1020101A	1UH 10% 2012 R/TC FI-B2012-
		L306	0LC1532101A	15UH 10% 3216 R/TC FI-C3216
		L307	0LC1532101A	15UH 10% 3216 R/TC FI-C3216
		L8	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L9	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
FET & TRANSISTOR				
		Q1000	0TR388109AA	KTC3881 CHIP TP KEC - -
		Q1101	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q212	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q300	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q302	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q303	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q304	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q318	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q701	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q100	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q101	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q12	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q13	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q14	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q15	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q16	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q17	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q301	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q305	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q306	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q308	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q310	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q313	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q315	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q316	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q317	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q500	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q901	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -LPL
		IC902	0TF492509AA	SI4925DY TP TEMIC 30V 6.1A-LPL
		IC1101	0TF492509AA	SI4925DY TP TEMIC 30V 6.1A
RESISTORS				
		RA600	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA601	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA602	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA603	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA604	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA605	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		C333	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		C338	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		C339	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R10	0RH3301D622	3.3K OHM 1 / 10 W 2012 5.00
		R1001	0RH0562D622	56 OHM 1 / 10 W 2012 5.00%
		R1002	0RH1501D622	1.5K OHM 1 / 10 W 2012 5.00

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R1003	0RH8200D622	820 OHM 1 / 10 W 2012 5.00%
		R1004	0RH3000D622	300 OHM 1 / 10 W 2012 5.00%
		R1005	0RH0682D622	68 OHM 1 / 10 W 2012 5.00%
		R1010	0RH7501D622	7.5K OHM 1 / 10 W 2012 5.00
		R1011	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R1012	0RH7502D622	75K OHM 1 / 10 W 2012 5.00%
		R1014	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R1026	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R104	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R106	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R107	0RH1503D622	150K OHM 1 / 10 W 2012 5.00
		R11	0RH3301D622	3.3K OHM 1 / 10 W 2012 5.00
		R1100	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R1102	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R1105	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R1106	0RH1202D622	12K OHM 1 / 10 W 2012 5.00%
		R1107	0RH1502D622	15K OHM 1 / 10 W 2012 5.00%
		R1116	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D-CMO
		R1290	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D-AUO
		R1291	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%-LPL
		R118	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R126	0RH1502D622	15K OHM 1 / 10 W 2012 5.00%
		R1301	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R1304	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R132	0RH1003D622	100K OHM 1 / 10 W 2012 5.00
		R133	0RH1003D622	100K OHM 1 / 10 W 2012 5.00
		R134	0RH1003D622	100K OHM 1 / 10 W 2012 5.00
		R135	0RH1003D622	100K OHM 1 / 10 W 2012 5.00
		R1350	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R140	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R141	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R142	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R143	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R144	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R145	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R146	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R147	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R1501	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R154	0RH0822D622	82 OHM 1 / 10 W 2012 5.00%
		R156	0RH0822D622	82 OHM 1 / 10 W 2012 5.00%
		R158	0RH0822D622	82 OHM 1 / 10 W 2012 5.00%
		R162	0RH2701D622	2.7K OHM 1 / 10 W 2012 5.00
		R201	0RH4703D622	470K OHM 1 / 10 W 2012 5.00
		R202	0RH6801D622	6.8K OHM 1 / 10 W 2012 5.00
		R203	0RH6801D622	6.8K OHM 1 / 10 W 2012 5.00
		R204	0RH4703D622	470K OHM 1 / 10 W 2012 5.00
		R22	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R24	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R25	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R264	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R265	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R266	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00
		R267	0RH4702D622	47K OHM 1 / 10 W 2012 5.00%
		R268	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00
		R300	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R301	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R302	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R304	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R305	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R306	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R307	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R308	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%

DATE: 2005. 09. 18.			
*S	*AL	LOC. NO.	PART NO. DESCRIPTION / SPECIFICATION
		R309	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R312	0RH4700D622 470 OHM 1 / 10 W 2012 5.00%
		R313	0RH1500D622 150 OHM 1 / 10 W 2012 5.00%
		R314	0RH4700D622 470 OHM 1 / 10 W 2012 5.00%
		R315	0RH1500D622 150 OHM 1 / 10 W 2012 5.00%
		R320	0RH4703D622 470K OHM 1 / 10 W 2012 5.00
		R322	0RH1500D622 150 OHM 1 / 10 W 2012 5.00%
		R324	0RH4703D622 470K OHM 1 / 10 W 2012 5.00
		R338	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R339	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R342	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R343	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R348	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R349	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R352	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R353	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R354	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R355	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R363	0RH1001D622 1K OHM 1 / 10 W 2012 5.00%
		R367	0RH1001D622 1K OHM 1 / 10 W 2012 5.00%
		R373	0RH1001D622 1K OHM 1 / 10 W 2012 5.00%
		R377	0RH1001D622 1K OHM 1 / 10 W 2012 5.00%
		R379	0RH1001D622 1K OHM 1 / 10 W 2012 5.00%
		R381	0RH1001D622 1K OHM 1 / 10 W 2012 5.00%
		R383	0RH1001D622 1K OHM 1 / 10 W 2012 5.00%
		R394	0RH6800D622 680 OHM 1 / 10 W 5% D R/TP
		R395	0RH6800D622 680 OHM 1 / 10 W 5% D R/TP
		R4000	0RH1003D622 100K OHM 1 / 10 W 2012 5.00
		R4001	0RH1003D622 100K OHM 1 / 10 W 2012 5.00
		R4002	0RH4700D622 470 OHM 1 / 10 W 2012 5.00%
		R4003	0RH4700D622 470 OHM 1 / 10 W 2012 5.00%
		R4004	0RH0472D622 47 OHM 1 / 10 W 2012 5.00%
		R4008	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R4010	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R4012	0RH4700D622 470 OHM 1 / 10 W 2012 5.00%
		R4025	0RH0472D622 47 OHM 1 / 10 W 2012 5.00%
		R4026	0RH4700D622 470 OHM 1 / 10 W 2012 5.00%
		R44	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R45	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R46	0RH1001D622 1K OHM 1 / 10 W 2012 5.00%
		R5006	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R5008	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R5014	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R502	0RH3301D622 3.3K OHM 1 / 10 W 2012 5.00
		R505	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R506	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R516	0RH0222D622 22 OHM 1 / 10 W 2012 5.00%
		R517	0RH0222D622 22 OHM 1 / 10 W 2012 5.00%
		R519	0RH0222D622 22 OHM 1 / 10 W 2012 5.00%
		R520	0RH1800D622 180 OHM 1 / 10 W 2012 5.00%
		R527	0RH4701D622 4.7K OHM 1 / 10 W 2012 5.00
		R530	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R532	0RH0222D622 22 OHM 1 / 10 W 2012 5.00%
		R607	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R610	0RH2701D622 2.7K OHM 1 / 10 W 2012 5.00
		R700	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R703	0RH4701D622 4.7K OHM 1 / 10 W 2012 5.00
		R705	0RH4701D622 4.7K OHM 1 / 10 W 2012 5.00
		R712	0RH0752D622 75 OHM 1 / 10 W 2012 5.00%
		R713	0RH0752D622 75 OHM 1 / 10 W 2012 5.00%
		R715	0RH1202D622 12K OHM 1 / 10 W 2012 5.00%
		R716	0RH0752D622 75 OHM 1 / 10 W 2012 5.00%

DATE: 2005. 09. 18.			
*S	*AL	LOC. NO.	PART NO. DESCRIPTION / SPECIFICATION
		R719	0RH1502D622 15K OHM 1 / 10 W 2012 5.00%
		R725	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R726	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R729	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R730	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R732	0RH1001D622 1K OHM 1 / 10 W 2012 5.00%
		R737	0RH4701D622 4.7K OHM 1 / 10 W 2012 5.00
		R738	0RH4701D622 4.7K OHM 1 / 10 W 2012 5.00
		R752	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R753	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R755	0RH0102D622 10 OHM 1 / 10 W 2012 5.00%
		R756	0RH0102D622 10 OHM 1 / 10 W 2012 5.00%
		R760	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R761	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R802	0RH8200D622 820 OHM 1 / 10 W 2012 5.00%
		R803	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R805	0RH0752D622 75 OHM 1 / 10 W 2012 5.00%
		R806	0RH4700D622 470 OHM 1 / 10 W 2012 5.00%
		R809	0RH0102D622 10 OHM 1 / 10 W 2012 5.00%
		R83	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R85	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R850	0RH4701D622 4.7K OHM 1 / 10 W 2012 5.00
		R851	0RH4701D622 4.7K OHM 1 / 10 W 2012 5.00
		R854	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R87	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R89	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R930	0RH3301D622 3.3K OHM 1 / 10 W 2012 5.00
		R931	0RH3301D622 3.3K OHM 1 / 10 W 2012 5.00
		R941	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R960	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%
		R961	0RH1000D622 100 OHM 1 / 10 W 2012 5.00%-LPL
		R963	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R964	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R969	0RH1202D622 12K OHM 1 / 10 W 2012 5.00%-LPL
		R970	0RJ1001D677 1K OHM 1/10 W 5% 1608 R/TP-LPL
		R971	0RH1502D622 15K OHM 1 / 10 W 2012 5.00%-LPL
		R973	0RH1202D622 12K OHM 1 / 10 W 2012 5.00%-CMO
		R974	0RH4701D622 4.7K OHM 1 / 10 W 2012 5.00
		R976	0RH4701D622 4.7K OHM 1 / 10 W 2012 5.00
		R977	0RH4701D622 4.7K OHM 1 / 10 W 2012 5.00
		R979	0RH4701D622 4.7K OHM 1 / 10 W 2012 5.00-CMO
		R983	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%-CMO
		R994	0RH1002D622 10K OHM 1 / 10 W 2012 5.00%
		R999	0RH0000D622 0 OHM 1 / 10 W 2012 5.00% D
		R100	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP
		R1013	0RJ0000D677 0 OHM 1/10 W 5% 1608 R/TP
		R1015	0RJ0000D677 0 OHM 1/10 W 5% 1608 R/TP
		R102	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP
		R1027	0RJ1202D677 12K OHM 1/10 W 5% 1608 R/TP
		R1028	0RJ2200D677 220 OHM 1/10 W 5% 1608 R/TP
		R108	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP
		R109	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP
		R110	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP
		R111	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP
		R1104	0RJ2001D677 2K OHM 1/10 W 5% 1608 R/TP-AUO
		R1110	0RJ0000D677 0 OHM 1/10 W 5% 1608 R/TP
		R112	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP
		R113	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP
		R114	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP
		R115	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP
		R116	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP
		R117	0RJ1000D677 100 OHM 1/10 W 5% 1608 R/TP

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R120	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R121	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R122	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R123	0RJ2202D677	22K OHM 1/10 W 5% 1608 R/TP
		R124	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R125	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/T
		R127	0RJ3301D677	3.3K OHM 1/10 W 5% 1608 R/T
		R130	0RJ8201D677	8.2K OHM 1/10 W 5% 1608 R/T
		R1300	0RJ6801D477	6.8K OHM 1/10 W 1% 1608 R/T
		R1302	0RJ2202D477	22K OHM 1/10 W 1% 1608 R/TP
		R1303	0RJ6801D477	6.8K OHM 1/10 W 1% 1608 R/T
		R1305	0RJ2202D477	22K OHM 1/10 W 1% 1608 R/TP
		R131	0RJ8201D677	8.2K OHM 1/10 W 5% 1608 R/T
		R136	0RJ8202D677	82K OHM 1/10 W 5% 1608 R/TP
		R137	0RJ8202D677	82K OHM 1/10 W 5% 1608 R/TP
		R138	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R139	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R15	0RJ4700D677	470 OHM 1/10 W 5% 1608 R/TP
		R1500	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R152	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R153	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R155	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R157	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R159	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R16	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R160	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R161	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R163	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R164	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R17	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R173	0RJ3301D677	3.3K OHM 1/10 W 5% 1608 R/T
		R175	0RJ3301D677	3.3K OHM 1/10 W 5% 1608 R/T
		R18	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R205	0RJ0682D677	68 OHM 1/10 W 5% 1608 R/TP
		R207	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R209	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R210	0RJ2402D677	24K OHM 1/10 W 5% 1608 R/TP
		R211	0RJ5602D477	56K OHM 1/10 W 1% 1608 R/TP
		R213	0RJ1501D677	1.5K OHM 1/10 W 5% 1608 R/T
		R214	0RJ1501D677	1.5K OHM 1/10 W 5% 1608 R/T
		R218	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R220	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R237	0RJ0682D677	68 OHM 1/10 W 5% 1608 R/TP
		R238	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R239	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R240	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R241	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R244	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R245	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R246	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R247	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R248	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R249	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R250	0RJ2402D677	24K OHM 1/10 W 5% 1608 R/TP
		R251	0RJ5602D477	56K OHM 1/10 W 1% 1608 R/TP
		R253	0RJ6801D677	6800 OHM 1/10 W 5% 1608 R/T
		R254	0RJ6801D677	6800 OHM 1/10 W 5% 1608 R/T
		R256	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R257	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R303	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R317	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R319	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R321	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R323	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R326	0RJ6201D677	6.2K OHM 1/10 W 5% 1608 R/T
		R329	0RJ6201D677	6.2K OHM 1/10 W 5% 1608 R/T
		R34	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R35	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R356	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R357	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R358	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R359	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R385	0RJ6800D677	680 OHM 1/10 W 5% 1608 R/TP
		R387	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R390	0RJ6800D677	680 OHM 1/10 W 5% 1608 R/TP
		R392	0RJ6800D677	680 OHM 1/10 W 5% 1608 R/TP
		R393	0RJ6800D677	680 OHM 1/10 W 5% 1608 R/TP
		R4005	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R4006	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R4015	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R4016	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R4019	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R4020	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R4022	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R4023	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R4024	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R4027	0RJ3001D677	3K OHM 1/10 W 5% 1608 R/TP
		R4032	0RJ4700D677	470 OHM 1/10 W 5% 1608 R/TP
		R4033	0RJ4700D677	470 OHM 1/10 W 5% 1608 R/TP
		R449	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R450	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R451	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R47	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R48	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R50	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R500	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R5002	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5007	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5009	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R501	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R5013	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R5015	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5016	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5017	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5019	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5020	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5021	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R504	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R51	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R515	0RJ4703D677	470K OHM 1/10 W 5% 1608 R/T
		R52	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R521	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R522	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R523	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R524	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R525	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R526	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R528	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R529	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R53	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R533	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R534	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R54	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R55	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R56	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R57	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R58	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R59	0RJ1211D477	1.21K OHM 1/10 W 1% 1608 R/
		R60	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R600	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R601	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R602	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R603	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R604	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R606	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R608	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R609	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R62	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R64	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R66	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R68	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R70	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R701	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R702	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R706	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R71	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R711	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R717	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R718	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R72	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R720	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R721	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R722	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R727	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R728	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R73	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R731	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/T
		R739	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R740	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R751	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R754	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R757	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R758	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R759	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R79	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R800	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R801	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R807	0RJ0102D677	10 OHM 1/10 W 5% 1608 R/TP
		R808	0RJ0102D677	10 OHM 1/10 W 5% 1608 R/TP
		R81	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R852	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/T
		R853	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/T
		R855	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R856	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R86	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R88	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R90	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R901	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R902	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R904	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R906	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R908	0RJ0822D677	82 OHM 1/10 W 5% 1608 R/TP
		R909	0RJ0822D677	82 OHM 1/10 W 5% 1608 R/TP
		R910	0RJ0822D677	82 OHM 1/10 W 5% 1608 R/TP
		R913	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R914	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP

DATE: 2005. 09. 18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R915	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R916	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R917	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R918	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R919	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R92	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R920	0RJ4990D477	499 OHM 1/10 W 1% 1608 R/TP
		R921	0RJ4990D477	499 OHM 1/10 W 1% 1608 R/TP
		R923	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R924	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R925	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R926	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R927	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R928	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP-CMO
		R929	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R93	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R933	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R934	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R935	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R936	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R937	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R938	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R939	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R94	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R940	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R942	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R943	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R944	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R945	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R946	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R947	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R948	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R949	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R950	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R952	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R953	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R96	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R965	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R966	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R967	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R968	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R972	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R975	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R98	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R980	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00-AUO
		R981	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP-CMO
		R982	0RJ6801D477	6.8K OHM 1/10 W 1% 1608 R/T-CMO
		R984	0RJ2202D477	22K OHM 1/10 W 1% 1608 R/TP-CMO
		R985	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP-CMO
		R986	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP-CMO
		R987	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP-LPL
		R988	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP-LPL
		R989	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D-AUO
		R99	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R990	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D-AUO
		R992	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D-LPL
		R992	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D-AUO
OTHERs				
		X4000 X11	6202TTB001G 6202VDT002E	HC-49U SUNNY 12.288MHZ +/- SX-1SMD SUNNY RADIAL 202500

DATE: 2005.09.18.				
*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		X500 X900 IC900 TU1000	6202VDT002J 6202VDT002B 6620F00017A 6700VS0003E	SX-1 SUNNY 13.500000MHZ +/- SX-1 SUNNY SC14.3MHZ +/- 30 CCSD-32T-SM WOYOYOUNG 32P PL TAEW-G053D LGIT MULTI VS PA
IR BOARD				
		C1500 L1500 IR1500	0CN1040K949 0LA0102K119 6712000013A	"0.1UF D 50V 80%, -20% F(Y5V)" 10UH K 2.3*3.4 TP TSOP4438SO1 VISHAY 38KHZ AN
CONTROL BOARD				
		L1700 R1700 R1701 R1702 R1703 R1704 R1705 R1706 SW1700 SW1701 SW1702 SW1703 SW1704 SW1705 SW1706	0LA0102K119 0RN8200F409 0RN6200F409 0RN5100F409 0RN4300F409 0RN3300F409 0RN2700F409 0RN2701F409 140-313A 140-313A 140-313A 140-313A 140-313A 140-313A 140-313A	10UH K 2.3*3.4 TP 820 1/6W 1% TA52 620 1/6W 1% TA52 510 OHM 1/6 W 1.00% TA52 430 OHM 1/6 W 1.00% TA52 330 1/6W 1% TA52 270 1/6W 1% TA52 2.7K OHM 1/6 W 1.00% TA52 TACT 2LEAD 100G(TA) LG C&D TACT 2LEAD 100G(TA) LG C&D TACT 2LEAD 100G(TA) LG C&D TACT 2LEAD 100G(TA) LG C&D TACT 2LEAD 100G(TA) LG C&D TACT 2LEAD 100G(TA) LG C&D TACT 2LEAD 100G(TA) LG C&D
LED & P/SW BOARD				
		C1600 L1600 Q1601 Q1602 Q1603 R1600 R1601 R1602 R1603 R1604 R1605 R1606 SW1600 LED1600	0CN1040K949 0LA0102K119 0TR319809AA 0TR319809AA 0TR319809AA 0RD3301Q609 0RD2701Q609 0RD2700Q609 0RD1001Q609 0RD1001Q609 0RD1001Q609 0RD1500Q609 140-313A 0DLBE0128AA	"0.1UF D 50V 80%, -20% F(Y5V)" 10UH K 2.3*3.4 TP KTC3198(KTC1815) KEC TP TO9 KTC3198(KTC1815) KEC TP TO9 KTC3198(KTC1815) KEC TP TO9 3.30K 1/4W(3 5% TA52 2.7K OHM 1/4 W(3.4) 5.00% T 270 1/4W(3 5% TA52 1K OHM 1/4 W(3.4) 5.00% TA5 1K OHM 1/4 W(3.4) 5.00% TA5 1K OHM 1/4 W(3.4) 5.00% TA5 150 1/4W(3 5% TA52 TACT 2LEAD 100G(TA) LG C&D BRIGHT LED ELECTRONICS BL-B
VIDEO BOARD				
		C2006 C2007 R2001 R2002 R2003 R2004 R2005 R2006 R2007	0CN4710K519 0CN4710K519 0RD0752Q609 0RD0752Q609 0RD0752Q609 0RD0752Q609 0RD0752Q609 0RD4703Q609 0RD4703Q609	470PF D 50V 10% B(Y5P) TA52 470PF D 50V 10% B(Y5P) TA52 75 1/4W(3 5% TA52 75 1/4W(3 5% TA52 75 1/4W(3 5% TA52 75 1/4W(3 5% TA52 75 1/4W(3 5% TA52 470K 1/4W(3 5% TA52 470K 1/4W(3 5% TA52